

Industrial Internet Innovation Center (Shanghai) Co.,Ltd.

NFC TEST REPORT

PRODUCT	Smart POS System
BRAND	SUNMI
MODEL	T6831
APPLICANT	Shanghai Sunmi Technology Co.,Ltd.
FCC ID	2AH25T6831
ISSUE DATE	June 7, 2024
STANDARD(S)	FCC CFR47 Part 2, FCC CFR47 Part 15C, ANSI C63.10-2013

Prepared by: Li Liukai

李柳凱

Reviewed by: Qin Yabin

秦亞斌

Approved by: Zhang Min

張旻

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

CONTENTS

1 SUMMARY OF TEST REPORT	3
1.1 TEST STANDARD (S)	3
1.2 SUMMARY OF TEST RESULTS	3
2 GENERAL INFORMATION OF THE LABORATORY	5
2.1 TESTING LABORATORY	5
2.2 LABORATORY ENVIRONMENTAL REQUIREMENTS	5
2.3 PROJECT INFORMATION	5
3 GENERAL INFORMATION OF THE CUSTOMER	6
3.1 APPLICANT	6
3.2 MANUFACTURER	6
3.3 FACTORY	6
4 GENERAL INFORMATION OF THE PRODUCT	7
4.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	7
4.2 DESCRIPTION FOR AUXILIARY EQUIPMENT (AE)	7
5 TEST CONFIGURATION INFORMATION	9
5.1 LABORATORY ENVIRONMENTAL CONDITIONS	9
5.2 DECISION OF FINAL TEST MODE	10
5.3 EUT SYSTEM OPERATION	10
5.4 EUT CONNECTION DIAGRAM OF TEST SYSTEM	10
5.5 TEST EQUIPMENT UTILIZED	11
5.6 MEASUREMENT UNCERTAINTY	11
6 TEST RESULTS	12
6.1 20DB BANDWIDTH	12
6.2 FREQUENCY STABILITY	13
6.3 RADIATED EMISSION	15
6.4 CONDUCTED EMISSIONS	22
6.5 OCCUPIED BANDWIDTH	24
ANNEX A: MEASUREMENT DATA	25
ANNEX B: REVISED HISTORY	31
ANNEX C: ACCREDITATION CERTIFICATE	32

1 Summary of Test Report

1.1 Test Standard (s)

No.	Test Standard(s)	Title
1	FCC CFR47 Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC CFR47 Part 15C	Radio Frequency Devices-Intentional Radiators
3	ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
NOTE: According to customer requirements, test and report using the latest version of the standard.		

1.2 Summary of Test Results

No.	Item(s)	Sub-clause of FCC Standard	Verdicts for Single Item	Detaied Results
1	20 dB bandwidth	2.1049	Pass	See section 6.1
2	Frequency Stability	15.225(e)	Pass	See section 6.2
3	Radiated Emission	15.225 (a) (b) (c) (d) and 15.209	Pass	See section 6.3
4	Conducted Emissions	15.207	Pass	See section 6.4
5	Occupied bandwidth	N/A	Pass	See section 6.5
6	Antenna Requirement	15.203	Pass	See Note 2

No.	Item(s)	Sub-clause of FCC Standard	Verdicts for Single Item	Detailed Results	
NOTE: The T6831, manufactured by Shanghai Sunmi Technology Co.,Ltd. is a variant product for testing. This project is a variant project based on the original report 23T04I30131-EMC04-V01 with below changes:					
Type of Service	Model Name	Scanner	Rear Camera	Flash Lamp	LCD (Just different manufacturers)
Original (23T04I30131-EMC01-V01)	T6F10	Yes	5M AF+flash	Yes	SHENZHEN DJN PHOTOELECTRIC TECHNOLOGY CO., LTD 9A-3R067-7026A
Variant (24T04I300065-020)	T6831	NO	2M FF	NO	SHENZHEN DJN PHOTOELECTRIC TECHNOLOGY CO., LTD 98-31050-7084A S10aa (Mainly Supply)
					SHENZHEN DJN PHOTOELECTRIC TECHNOLOGY CO., LTD 98-31050-7084A-H S12aa (Secondary Supply)
					GUANGDONG SUPERVIEW OPTOELECTRONICS CO.,LTD. (G499BHA085A0) S16aa (Thirdly Supply)
There are three configurations S10aa (Mainly Supply), S12aa (Secondary Supply), S16aa (Thirdly Supply) in this project. According to the product change description and test plan, NFC RF performance is not affected. so we only tested the S10aa (Mainly Supply) and recorded the test results of the worst mode in the report.					
Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 1.3.					
Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 4 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 1 of this test report.					
Note 2:					
The EUT has an internal loop antenna for NFC (13.56MHz) function, so this EUT complies with the 15.203 antenna requirements, please refer to the internal photos.					

2 General Information of The Laboratory

2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	708870
FCC Designation No.	CN1364
IC designation No.	10766A
CAB identifier	CN0067

2.2 Laboratory Environmental Requirements

Temperature	15℃~35℃
Relative Humidity	25%RH~75%RH
Atmospheric Pressure	86kPa~106kPa
Supply Voltage	120V/60Hz

2.3 Project Information

Project Manager	Gao Hongning
Test Date	May 17, 2024 to May 17, 2024

3 General Information of The Customer

3.1 Applicant

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388,Song Hu Road, Yang Pu District, Shanghai, China
Telephone	18826519551

3.2 Manufacturer

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388,Song Hu Road, Yang Pu District, Shanghai, China
Telephone	18826519551

3.3 Factory

Company	N/A
Address	N/A

4 General Information of The Product

4.1 Product Description for Equipment under Test (EUT)

Product	Smart POS System
Model	T6831
Date of Receipt	April 15, 2024
EUT ID*	S10aa (Mainly Supply), S12aa (Secondary Supply), S16aa (Thirdly Supply)
SN/IMEI	860104070000897/860104070005896 860104070001424/86010407006423 860104070002166/86010407007165
Supported Radio Technology and Bands	GSM850/GSM900/GSM1800/GSM1900 WCDMA Band I/II/IV/V/VI/VIII/XIX LTE Band 1/2/3/4/5/7/8/18/19/20/26/28/34/38/39/40/41 BT 5.0 BR/EDR/BLE WLAN 802.11b,g,n WLAN 802.11a,n,ac GPS/Galileo/GLONASS/BDS NFC
Hardware Version	V1.0
Software Version	V3.0.4
Operating Frequency	13.56MHz
Antenna Information	Loop Antenna
Modulation information	ASK
Product Class	1

NOTE1: EUT ID is the internal identification code of the laboratory.

NOTE2: Photographs of EUT are shown in ANNEX A of this test report.

NOTE3: Samples in the test report are provided by the customer. The test results are only applicable to the samples received by the laboratory.

4.2 Description for Auxiliary Equipment (AE)

AE ID*	Description	Model	SN/Remark
CA01	Adapter	TPA-141A050200UU01	N/A
CD01	Adapter	UC13US	N/A
UA02	AC Cable	N/A	N/A
BA10	Battery	HPPA	Guangdong Highpower New Energy Technology Co., Ltd.

AE1	Type-A Card	N/A	N/A
NOTE: *AE ID is the internal identification code of the laboratory.			

5 Test Configuration Information

5.1 Laboratory Environmental Conditions

5.1.1 Permanent Facilities

Semi-anechoic chamber SAC3-1 (9 m*8m*6.2m) & SAC3-2 (9.8m*6.7m*6.7m)	
Shielding effectiveness	0.014MHz ~1MHz, >60dB; 1MHz~1000MHz, >90dB.
Electrical insulation	> 2MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (SVSWR)	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

Shielded room	
Shielding effectiveness	0.014MHz~1MHz, >60dB; 1MHz~1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω

5.2 Decision of final test mode

The EUT was tested in conjunction with the accessories in Section 4.2. We tested all of the following test modes and selected the worst mode from the test results and recorded them in the report.


The test configuration modes are as the following:

Test Item	Test setup and operating modes
20 dB bandwidth	Mode 1: TX Mode
Frequency Stability	Mode 1: TX Mode
Radiated emission	Mode 1: TX Mode
Conducted Emissions	Mode 2: TX Mode+ CA01+ UA02
Occupied bandwidth	Mode 1: TX Mode
Note: After laboratory verification, CA01 is the worst adapter among two adapter and only the worst cases test data are recorded in this report.	


5.3 EUT System Operation

1. Connect the EUT with AE.
2. Setup the EUT according to the standard.
3. Start testing and monitoring the function.
4. TX mode: Enter the NFC card reading mode, place the Type A card on the EUT. The EUT will transmit the NFC command continuously during the test, and will read the information from the Type A Card continuously.

5.4 EUT Connection Diagram of Test System



<Figure 5.4-1> Mode 1

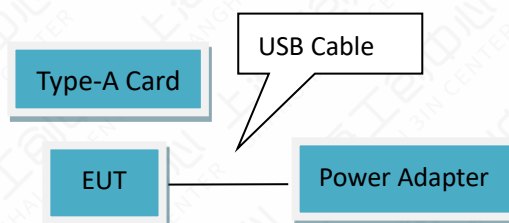

<Figure 5.4-2> Mode 2

5.5 Test Equipment Utilized

No.	Name	Model	S/N	SW Version	HW Version	Manufacturer	Cal. Date	Cal. Interval
1	Test Receiver	ESCI	101235	V5.1-24-3	00	R&S	2023-12-19	1 year
2	Test Receiver	ESU40	100307	00	01	R&S	2023-12-19	1 year
3	Trilog Antenna	VULB9163	01345	N/A	N/A	Schwarzbeck	2024-03-29	1 year
4	Double Ridged Guide Antenna	ETS-3117	00135890	N/A	N/A	ETS	2024-03-16	1 year
5	2-Line V-Network	ENV216	101380	N/A	N/A	R&S	2023-12-19	1 year
6	EMI Test Software	EMC32 V10.35.02	N/A	N/A	N/A	R&S	N/A	N/A
7	Loop Antenna	AL-130R	121083	N/A	N/A	COMPOWE R	2023-09-13	1 year
8	Temperature Box	B-TF-107C	201804107	N/A	N/A	Boyi	2023-06-28	1 year

5.6 Measurement Uncertainty

Item (s)	Uncertainty
20 dB bandwidth	$\pm 1.9\%$
Frequency Stability	$\pm 1.9\%$
Electric Field Strength of Fundamental Emissions	4.38 dB
Electric Field Radiated Emissions (Below 30MHz)	4.38 dB
Electric Field Radiated Emissions (Above 30MHz)	5.10 dB
Conducted Emissions	3.30 dB
Occupied bandwidth	$\pm 1.9\%$
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.	

6 Test Results

6.1 20dB Bandwidth

6.1.1 Measurement Methods

- The transmitter output signal was picked up by coil antenna to the spectrum analyzer.
- The transmitter output signal was picked up by coil antenna connected to the spectrum analyzer.
- The bandwidth of the center frequency was measured with 200Hz RBW, 500Hz VBW and 14kHz span.

6.1.2 EUT Connection Diagram of Test System

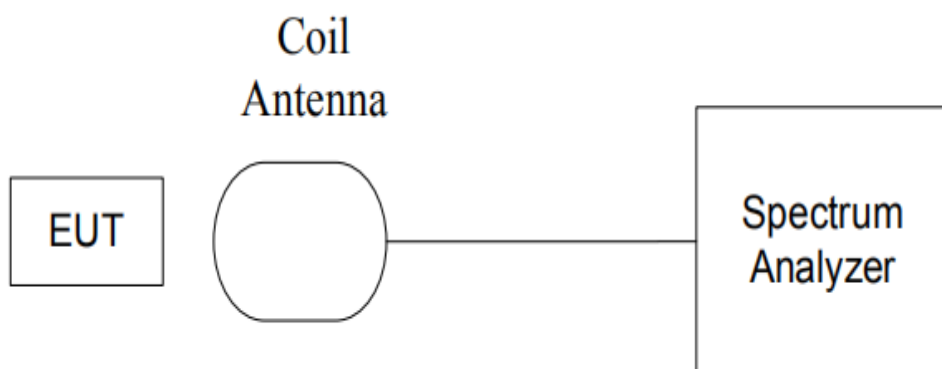


Figure 6.1.2-1 20dB Bandwidth Connection Diagram

6.1.3 Test Condition

The measurement of EUT is carried out under the transmit state of NFC and without modulation.

EUT had been not connected to a travel adapter.

During the measurements, the ambient temperature is in the range of 15~25℃.

6.1.4 Test environmental conditions

Temperature	24.1℃
Relative Humidity	42.4%RH
Atmospheric Pressure	101.4kPa

6.1.5 Test Results

Carrier frequency (MHz)	20dB Bandwidth (kHz)	Test Results	Conclusion
13.56	0.740	See Annex A.1-1	Pass

6.2 Frequency Stability

6.2.1 Measurement Methods

The transmitter output signal was picked up by coil antenna connected to the frequency counter. The center frequency was measured with 30Hz RBW and 1kHz span.

During the test, the EUT was placed in a thermal chamber until thermal balance and lasting appropriate time.

6.2.2 EUT Connection Diagram of Test System

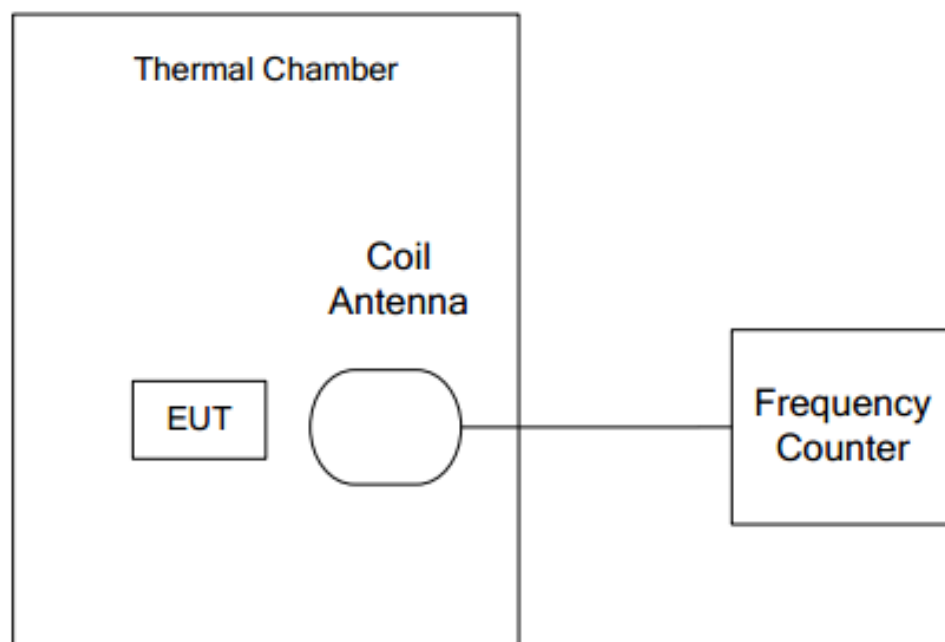


Figure 6.2.2-1 Frequency Stability Connection Diagram

6.2.3 Test Condition

The measurement of EUT is carried out under the transmit state of without modulation, EUT had been not connected to a travel adapter.

Operation Temperature: -10°C、0°C、10°C、20°C、30°C、40°C、50°C

Operation Voltage: $V_{min}=6.0V$, $V_{max}=8.8V$, and $T_{nom}=7.7V$.

6.2.4 Limit/Criterion

15.225(e): The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

6.2.5 Test environmental conditions

Temperature	24.1℃
Relative Humidity	42.4%RH
Atmospheric Pressure	101.4kPa

6.2.6 Test Results

See Annex A.2-1

6.3 Radiated Emission

6.3.1 Electric Field Strength of Fundamental Emissions

6.3.1.1 Method of Measurement

a. The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The transmitter carrier output levels (E-Field) from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1 meter above the ground. The E-field is measured with a shielded loop antenna connected to a measurement receiver. Detected E-field was maximized by rotating the EUT through 360° and adjusting the receiving antenna polarizations. Both horizontal and vertical polarizations of the antenna were set during the measurement. The maximization processes were repeated with the EUT positioned respectively in its three orthogonal axes. The measurements were performed with the peak detector and if required, the quasi-peak detector.

b. The EUT was placed on the axis of X, Y and Z respectively for testing. Only the worst direction data is represented in the report.

c. The measurement bandwidth:

Frequency (MHz)	RBW / VBW
12.56-14.56	10 / 30kHz

6.3.1.2 EUT Connection Diagram of Test System

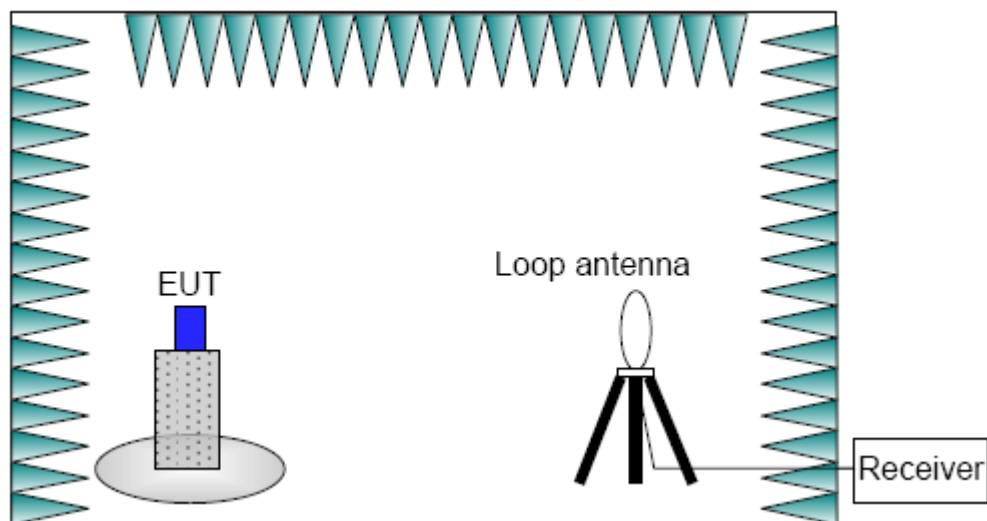


Figure 6.3.1.2-1 Electric Field Strength of Fundamental Emissions Connection Diagram

6.3.1.3 Test Condition

Frequency Range (MHz)	RBW/VBW	Sweep Time (s)
12.56-14.56	10kHz/30kHz	AUTO

6.3.1.4 Limit/Criterion

Clause 15.225(a) the field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Clause 15.225(b) within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Clause 15.225(c) within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Frequency Range (MHz)	E-field Strength Limit @30m (uV/m)	E-field Strength Limit @3m (dBuV/m)
13.560 ± 0.007	+15,848	124
13.410 to 13.553 13.567 to 13.710	+334	90
13.110 to 13.410 13.710 to 14.010	+106	81
Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula: Extrapolation (dB) = 40log10(Measurement Distance / Specification Distance)		

6.3.1.5 Test environmental conditions

Temperature	24.1℃
Relative Humidity	42.4%RH
Atmospheric Pressure	101.4kPa

6.3.1.6 Test Results

Mode	Frequency (MHz)	Test Results	Verdicts
Mode 1: TX Mode	12.56-14.56	See Annex A.3.1-1	Pass
NOTE: a. Abbreviations used in this clause: Pass—P; Fail—F; Not applicable—N/A b. The result displayed take into account applicable antenna factors and cable losses.			

6.3.2 Electric Field Radiated Emissions (Below 30MHz)

6.3.2.1 Method of Measurement

a. The electric field radiated emissions from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1 meter above the ground. The E-field is measured with a shielded loop antenna connected to a measurement receiver. Detected E-field was maximized by rotating the EUT through 360° and adjusting the receiving antenna polarizations. Both horizontal and vertical polarizations of the antenna were set during the measurement. The maximization processes were repeated with the EUT positioned respectively in its three orthogonal axes. The measurements were performed with the peak detector and if required, the quasi-peak detector.

b. The EUT was placed on the axis of X, Y and Z respectively for testing. Only the worst direction data is represented in the report.

c. The measurement bandwidth:

Frequency (MHz)	RBW / VBW
0.009-30	10 / 30kHz

6.3.2.2 EUT Connection Diagram of Test System

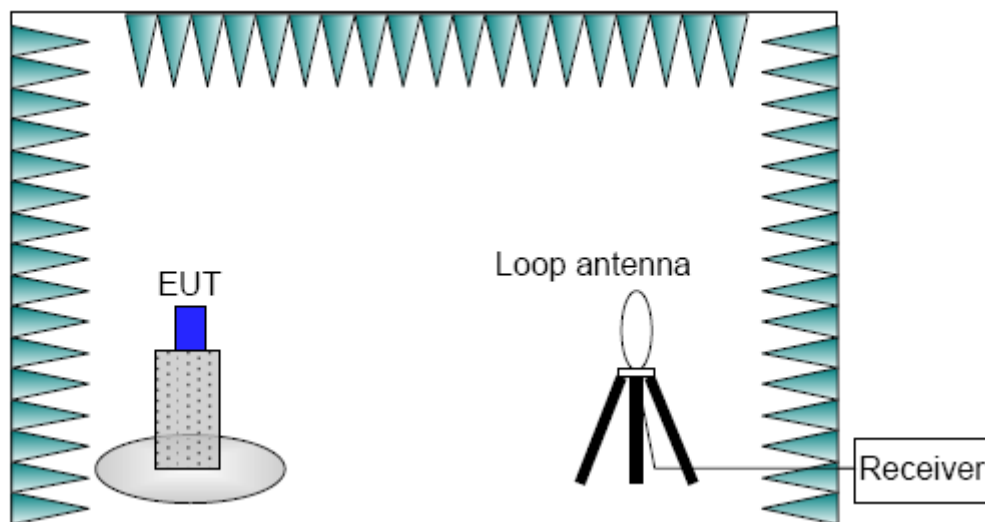


Figure 6.3.2.2-1 Electric Field Radiated Emissions (Below 30MHz) Connection Diagram

6.3.2.3 Test Condition

Frequency Range (MHz)	RBW/VBW	Sweep Time (s)
0.009-30	10kHz/30kHz	AUTO

6.3.2.4 Limit/Criterion

Frequency Range (MHz)	E-field Strength Limit @30m (mV/m)	E-field Strength Limit @3m (dBuV/m)
0.009-0490	2400/F (kHz)	129-94
0.490-1.705	24000/F (kHz)	74-63
1.705-30	30	70

Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula:

Extrapolation (dB) = 40log10(Measurement Distance / Specification Distance)

$\text{dBuA/m} = \text{dBuV/m} / 120\pi$

6.3.2.5 Test environmental conditions

Temperature	24.1℃
Relative Humidity	42.4%RH
Atmospheric Pressure	101.4kPa

6.3.2.6 Test Results

Mode	Frequency (MHz)	Test Results	Verdicts
Mode 1: TX Mode	0.009-30	See Annex A.3.2-1	Pass

NOTE:

a. Abbreviations used in this clause: Pass—P; Fail—F; Not applicable—N/A

b. The result displayed take into account applicable antenna factors and cable losses

c. dBuV/m and dBuA/m can be converted to each other, so the test data of dBuV/m are reflected in the report

6.3.3 Electric Field Radiated Emissions (Above 30MHz)

6.3.3.1 Method of Measurement

a. The electric field radiated emissions from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1 meter above the ground. The E-field is measured with a shielded loop antenna connected to a measurement receiver. Detected E-field was maximized by rotating the EUT through 360° and adjusting the receiving antenna polarizations. Both horizontal and vertical polarizations of the antenna were set during the measurement. The maximization processes were repeated with the EUT positioned respectively in its three orthogonal axes. The measurements were performed with the peak detector and if required, the quasi-peak detector.

b. The EUT was placed on the axis of X, Y and Z respectively for testing. Only the worst direction data is represented in the report.

c. The measurement bandwidth:

Frequency (MHz)	RBW / VBW
30-1000	120 kHz / 300kHz

6.3.3.2 EUT Connection Diagram of Test System

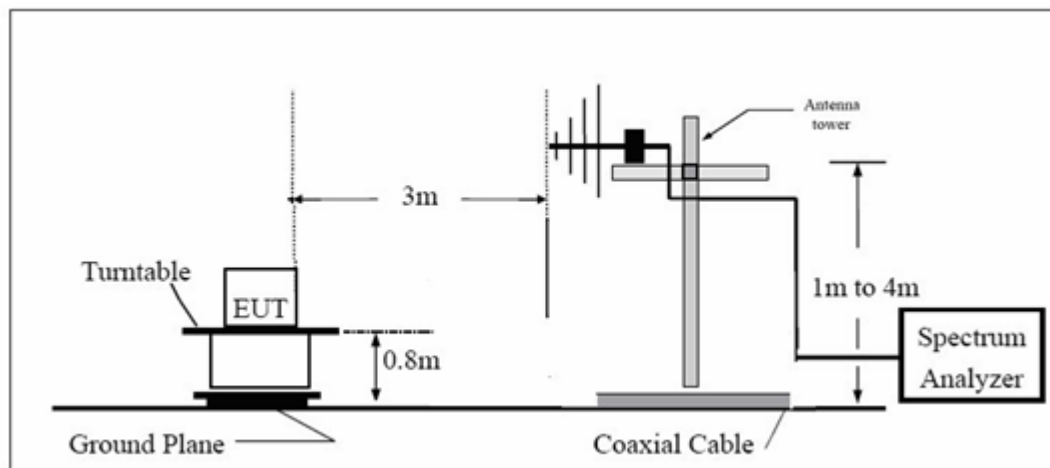


Figure 6.3.3.2-1 Electric Field Radiated Emissions (Above 30MHz) Connection Diagram

6.3.3.3 Test Condition

Frequency Range (MHz)	RBW/VBW	Sweep Time (s)
30-1000	120kHz/300kHz	AUTO

6.3.3.4 Limit/Criterion

Frequency Range (MHz)	Quasi-Peak (dBμV/m)	Peak (dBμV/m)	Average (dBμV/m)
30-88	40	N/A	N/A
88-216	43.5	N/A	N/A
216-960	46	N/A	N/A
Above 960	54	N/A	N/A
Above 1000	N/A	74	54

6.3.3.5 Test environmental conditions

Temperature	24.1℃
Relative Humidity	42.4%RH
Atmospheric Pressure	101.4kPa

6.3.3.6 Test Results

Mode	Frequency (MHz)	Test Results	Verdicts
Mode 1: TX Mode	30-1000	See Annex A.3.3-1	Pass
NOTE: a. Abbreviations used in this clause: Pass—P; Fail—F; Not applicable—N/A b. The result displayed take into account applicable antenna factors and cable losses c. QP detection is used in radiated emissions test, and the Duty Cycle of NFC main frequency signal is 100%.			

6.4 Conducted Emissions

6.4.1 Reference

See Clause 6.2 of ANSI C63.10-2013

6.4.2 Measurement Methods

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector. Tested in accordance with the procedures of ANSI C63.10-2013

6.4.3 Test Setup

The measurement bandwidth and Test Condition

Frequency Range (MHz)	RBW	Sweep Time (s)	Test Voltage
0.15-30	9 kHz	AUTO	120V/60Hz

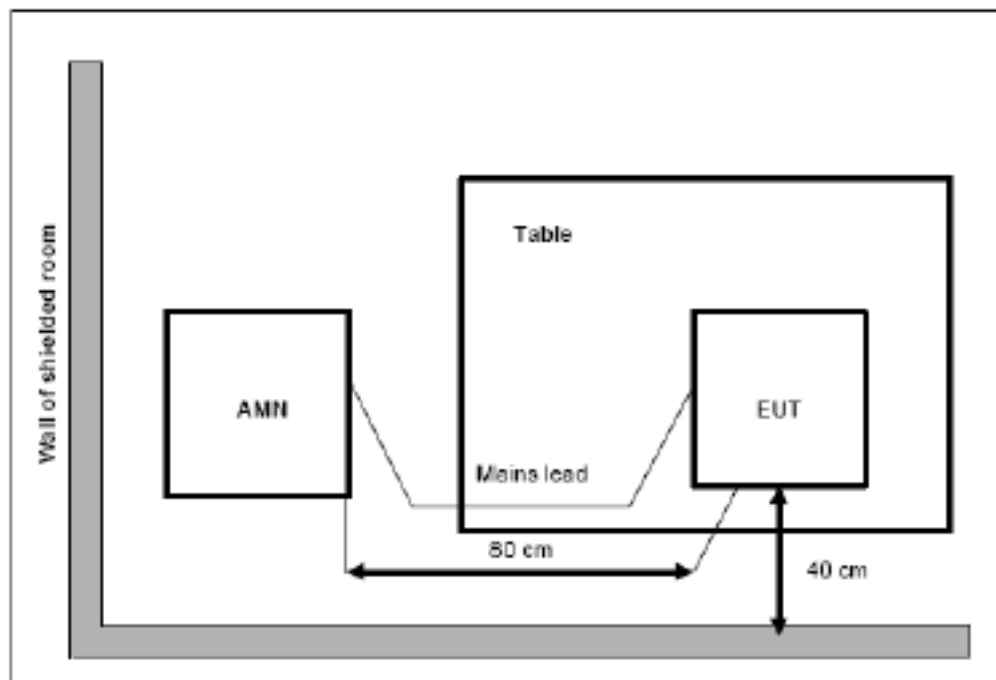


Figure 6.4.3-1 Conducted Emissions Connection Diagram

6.4.4 Limits

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

6.4.5 Test environmental conditions

Temperature	24.1℃
Relative Humidity	42.4%RH
Atmospheric Pressure	101.4kPa

6.4.6 Measurement Results

Mode	Frequency (MHz)	Test Results	Verdicts
Mode 2: TX Mode+ CA01+ UA02	0.009-30	See Annex A.4-1	Pass
NOTE: a. Emission level (quasi-peak or Average peak) =Raw value by receiver + Corr (Insertion loss+ cable loss) b. The raw value is used to calculate by software which is not shown in the sheet. c. Margin=limit value – emission level. d. L1 and N line is all have been tested, the result of them is synthesized in the above data diagram. e. The frequency over the limits is the NFC main signal frequency.			

6.5 Occupied bandwidth

6.5.1 Reference

See Clause 6.7 of RSS-Gen.

6.5.2 Measurement Methods

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

The following conditions shall be observed for measuring the occupied bandwidth:


- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

6.5.3 Measurement Results

See Annex A.5-1

Annex A: Measurement Data

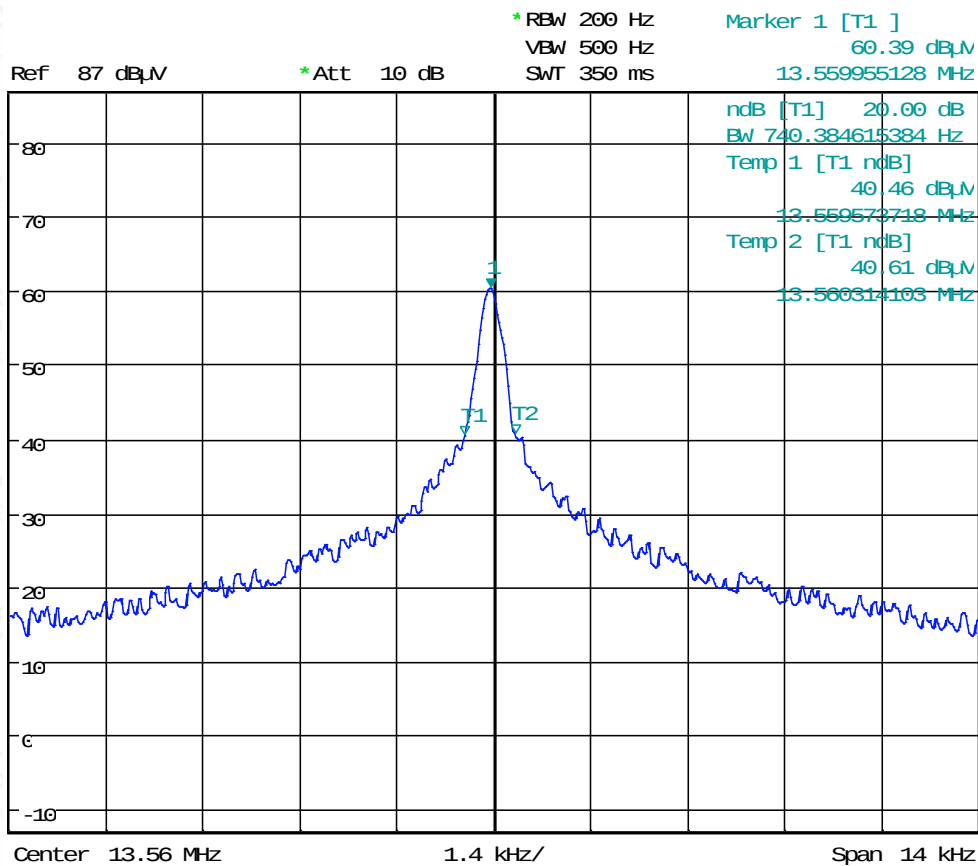

A.1-1 Mode 1 20dB Bandwidth

Temperature	Voltage	Frequency Error (MHz)			
		Startup	2Min Later	5Min Later	10Min Later
-10℃	7.7V	13.559821	13.554237	13.552428	13.561208
0℃		13.560721	13.556928	13.557697	13.562427
20℃		13.552489	13.562421	13.556982	13.556792
30℃		13.553721	13.559024	13.558976	13.559927
40℃		13.559984	13.559627	13.552786	13.556906
50℃		13.559821	13.557829	13.559607	13.560081
20℃	6.0V	13.556901	13.550769	13.559292	13.558925
20℃	8.8V	13.554798	13.559995	13.555769	13.556429
Temperature	Voltage	Frequency Error (%)			
-10℃	7.7V	0.000010	0.000422	0.000555	0.000092
0℃		0.000056	0.000223	0.000167	0.000182
20℃		0.000551	0.000182	0.000219	0.000233
30℃		0.000460	0.000069	0.000072	0.000002
40℃		0.000002	0.000024	0.000529	0.000225
50℃		0.000010	0.000157	0.000026	0.000009
20℃	6.0V	0.000225	0.000677	0.000049	0.000076
20℃	8.8V	0.000380	0.000003	0.000309	0.000260

A.2-1 Mode 1 Frequency Stability

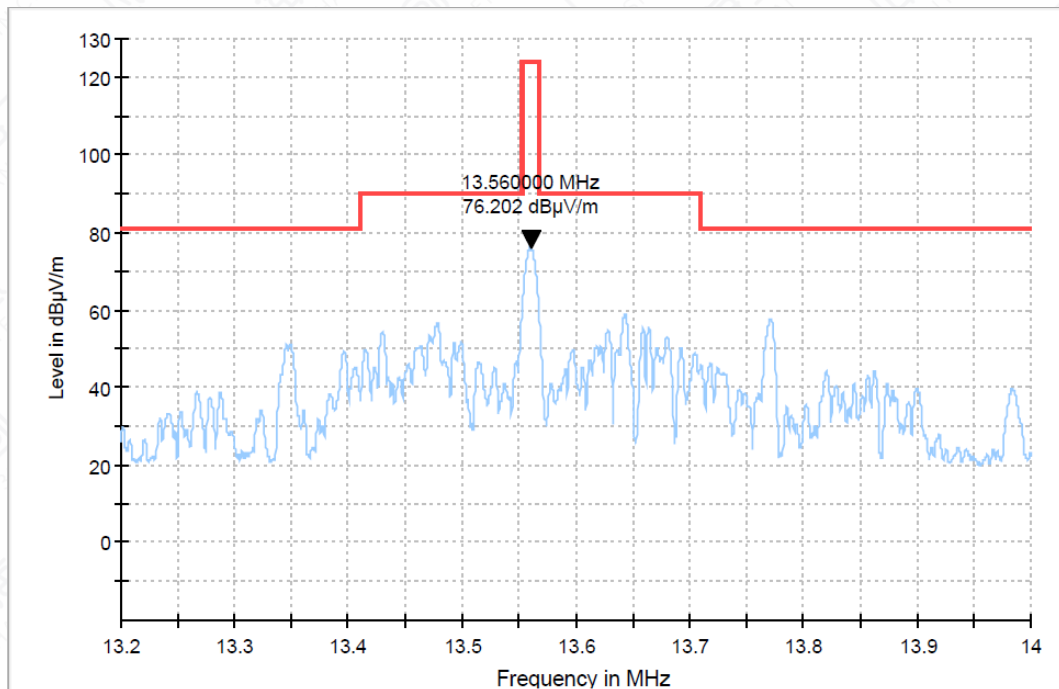


Figure A.3-1-1 Mode 1 Electric Field Strength of Fundamental Emissions

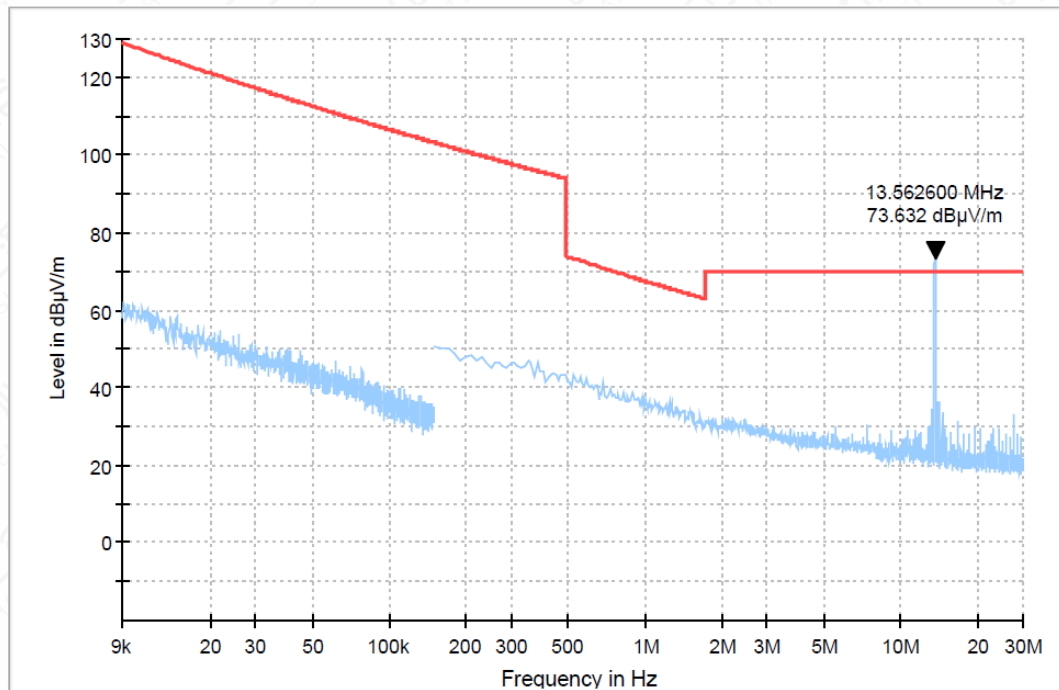


Figure A.3-2-1 Mode 1 Electric Field Radiated Emissions (Below 30MHz)

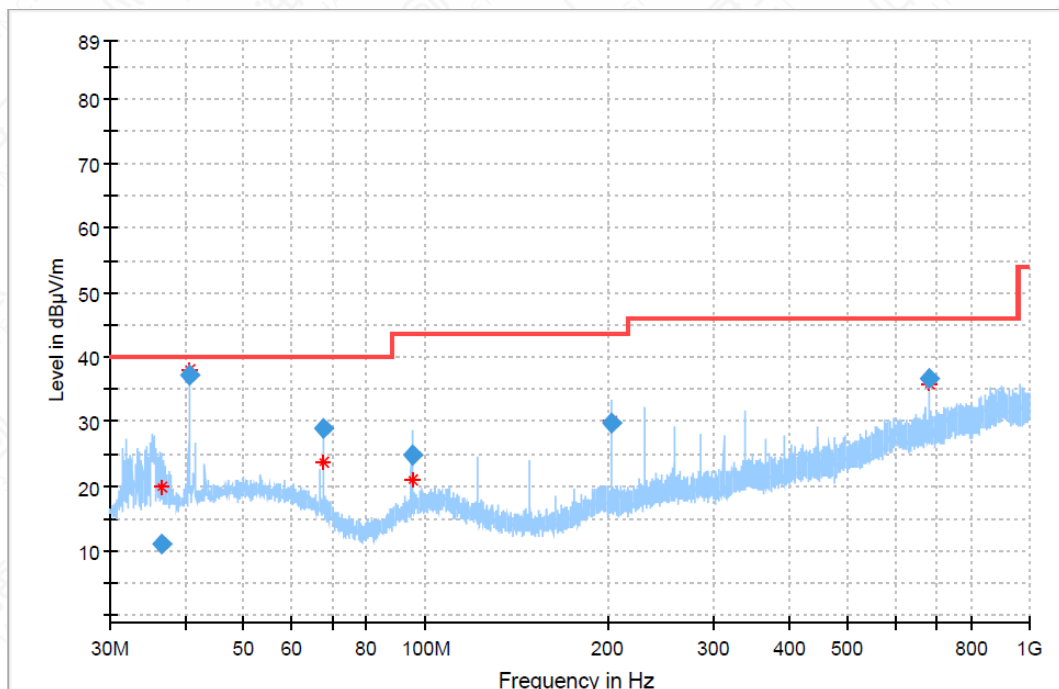


Figure A.3-3-1 Mode 1 Electric Field Radiated Emissions (Above 30MHz)

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.522083	11.05	40.00	28.95	106.0	H	-18.0	-14
40.624344	37.38	40.00	2.62	106.0	H	3.0	-13
67.776355	28.95	40.00	11.05	122.0	V	79.0	-15
94.886952	24.88	43.50	18.62	106.0	H	194.0	-14
203.362725	29.79	43.50	13.71	106.0	V	242.0	-13
684.005704	36.59	46.00	9.41	117.0	V	343.0	-2

Note: Horizontal and vertical polarity is all have been tested, the result of them is synthesized in the above data diagram.

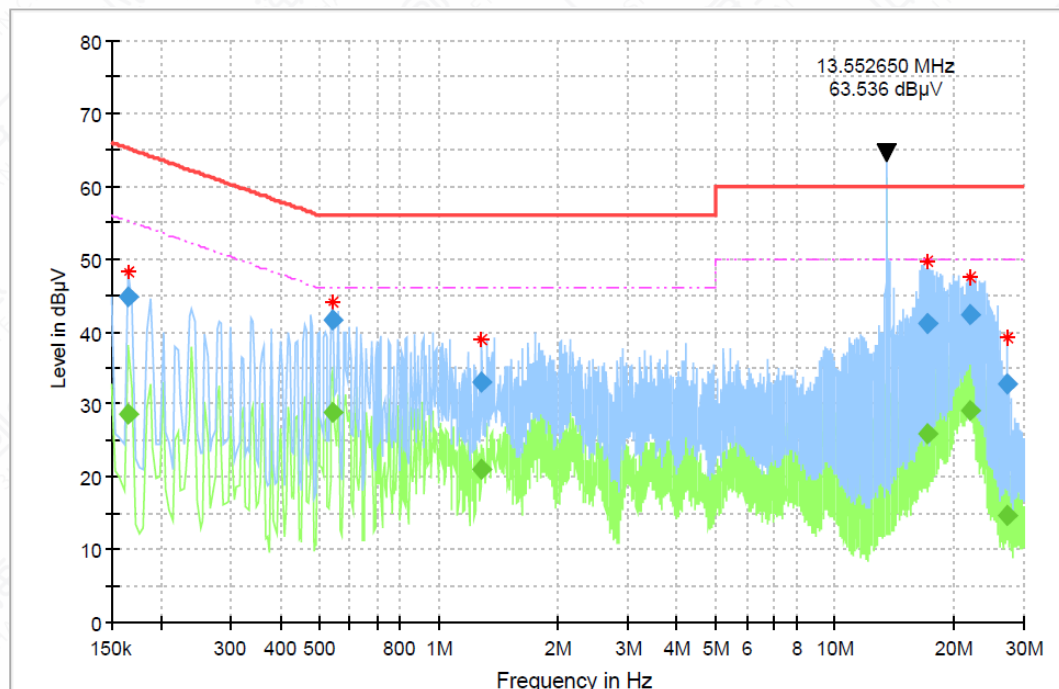


Figure A.4-1 Mode 2 Conducted Emissions

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.164925	---	28.65	55.21	26.56	15000.0	9.000	L1	ON	9.6
0.164925	44.69	---	65.21	20.52	15000.0	9.000	L1	ON	9.6
0.541781	---	28.76	46.00	17.24	15000.0	9.000	L1	ON	9.6
0.541781	41.68	---	56.00	14.32	15000.0	9.000	L1	ON	9.6
1.288031	---	21.06	46.00	24.94	15000.0	9.000	L1	ON	9.6
1.288031	33.14	---	56.00	22.86	15000.0	9.000	L1	ON	9.6
17.104800	---	25.90	50.00	24.10	15000.0	9.000	L1	ON	10.0
17.104800	41.21	---	60.00	18.79	15000.0	9.000	L1	ON	10.0
21.992738	---	29.20	50.00	20.80	15000.0	9.000	L1	ON	10.0
21.992738	42.31	---	60.00	17.69	15000.0	9.000	L1	ON	10.0
27.130669	---	14.62	50.00	35.38	15000.0	9.000	L1	ON	9.9
27.130669	32.86	---	60.00	27.15	15000.0	9.000	L1	ON	9.9

Note:

1. L1 and N line is all have been tested, the result of them is synthesized in the above data diagram.
2. The frequency over the limits is the NFC main signal frequency.

Center Freq. (MHz)	f_L (MHz)	f_H (MHz)	OBW
13.559955	13.558833	13.561054	2.2211 kHz

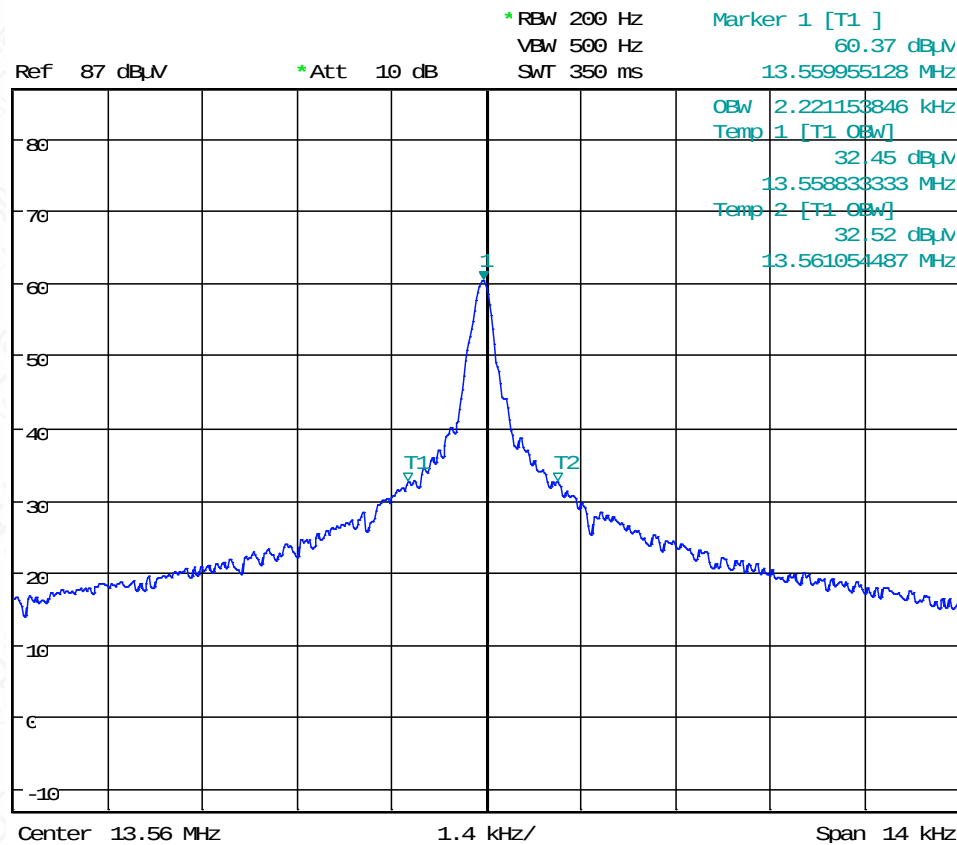


Figure A.5-1 Mode 1 Occupied bandwidth

Annex B: Revised History

Version	Revised Content
021	Initial

Annex C: Accreditation Certificate