

## Industrial Internet Innovation Center (Shanghai) Co.,Ltd.

### RF TEST REPORT

PRODUCT	Smart POS system
BRAND	SUNMI
MODEL	T6831
APPLICANT	Shanghai Sunmi Technology Co.,Ltd.
FCC ID	2AH25T6831
ISSUE DATE	September 19, 2024
STANDARD(S)	FCC Part 2, FCC Part 22H, FCC Part 24E

Prepared by: Fan Yuhang



Reviewed by: Yang Fan



Approved by: Zhang Min

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

## CONTENTS

<b>1. SUMMARY OF TEST REPORT .....</b>	<b>3</b>
1.1 TEST STANDARD (S).....	3
1.2 REFERENCE DOCUMENTS .....	3
1.3 SUMMARY OF TEST RESULTS.....	3
1.4 DATA PROVIDED BY APPLICANT .....	4
<b>2. GENERAL INFORMATION OF THE LABORATORY .....</b>	<b>5</b>
2.1 TESTING LABORATORY.....	5
2.2 LABORATORY ENVIRONMENTAL REQUIREMENTS.....	5
2.3 PROJECT INFORMATION.....	5
<b>3. GENERAL INFORMATION OF THE CUSTOMER.....</b>	<b>6</b>
3.1 APPLICANT.....	6
3.2 MANUFACTURER .....	6
<b>4. GENERAL INFORMATION OF THE PRODUCT.....</b>	<b>7</b>
4.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	7
4.2 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	7
4.3 ADDITIONAL INFORMATION.....	8
<b>5. TEST CONFIGURATION INFORMATION .....</b>	<b>9</b>
5.1 LABORATORY ENVIRONMENTAL CONDITIONS.....	9
5.2 TEST EQUIPMENTS UTILIZED .....	9
5.3 MEASUREMENT UNCERTAINTY.....	10
<b>6. TEST RESULTS .....</b>	<b>12</b>
6.1 OUTPUT POWER.....	12
6.2 EMISSION LIMIT .....	14
<b>ANNEX A: REVISED HISTORY .....</b>	<b>19</b>
<b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>	<b>20</b>

## 1. Summary of Test Report

### 1.1 Test Standard (s)

No.	Test Standard	Title	Version
1	FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	--
2	FCC Part 22H	CELLULAR RADIOTELEPHONE SERVICE	--
3	FCC Part 24E	BROADBAND PCS	--

Note: The standard of FCC Part 2 has not been accredited by A2LA.

### 1.2 Reference Documents

No.	Test Standard	Title	Version
1	ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
2	ANSI C63.26	American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio	2015
3	KDB 971168 D01 Power Meas License Digital Systems	Measurement Guidance for Certification of Licensed Digital Transmitters	v03r01

Note: The standard of KDB 971168 D01 Power Meas License Digital Systems has not been accredited by A2LA.

### 1.3 Summary of Test Results

#### GSM850

Measurement Items	Sub-clause of FCC	Verdict
Output Power/ERP	2.1046/22.913(a)	Pass
Emission Limit	2.1053/22.917(a)	Pass

#### PCS1900

Measurement Items	Sub-clause of FCC	Verdict
Output Power/EIRP	2.1046,24.232(c)	Pass
Emission Limit	2.1053/24.238(a)	Pass

Note:

The T6831 manufactured by Shanghai Sunmi Technology Co.,Ltd. is a variant product for testing. This project is a C2PC project based on the FCC ID: 2AH25T6831, the content of the change is referred to the Product Change Description with below changes:

#### HARDWARE MODIFICATIONS:

Components on PCB changes: Yes

Camera changes: Please refer to the following difference chart

Other changes:

1. Added without front camera and without Pogo Pin configuration.

2. PCBA Change:

The CPU chip model is changed from 8766 to 8768, and the two CPU chips are PIN to PIN, and the RF performance will not be affected.

According to the Product Change Description, We mainly verified the output power of the worst mode and retest Radiated Spurious Emission.

There are two configurations S04aa (Mainly Supply) and S08aa (Secondary Supply) in this project, we tested the Mainly Supply (S04aa) and the worst mode of Secondary Supply(S08aa).The description of the differences between Mainly Supply(S04aa) and Secondary Supply(S08aa) are as follows:

Type of Service	Model Name	Front camera	Pogo Pin	CPU
Original	T6831	YES	YES	8766
Variant1 S04aa (Mainly Supply)	T6831	YES	YES	8768
Variant2 S08aa (Secondary Supply)	T6831	NO	NO	8768

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 1.3.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 4.1 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 6 of this test report.

#### 1.4 Data Provided by Applicant

No.	Item(s)	Data
1	GSM 850	-1.63 dBi
2	PCS 1900	0.46 dBi

Note: The data of antenna gain is provided by Antenna specification may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

## 2. General Information of The Laboratory

### 2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	708870
FCC Designation No.	CN1364

### 2.2 Laboratory Environmental Requirements

Temperature	15°C~35°C
Relative Humidity	25%RH~75%RH
Atmospheric Pressure	86kPa~106kPa

### 2.3 Project Information

Project Manager	Gao Hongning
Test Date	August 21, 2024 to September 9, 2024

### 3. General Information of The Customer

#### 3.1 Applicant

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388,Song Hu Road, Yang Pu District, Shanghai, China
Telephone	18826519551

#### 3.2 Manufacturer

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388,Song Hu Road, Yang Pu District, Shanghai, China
Telephone	18826519551

## 4. General Information of The Product

### 4.1 Product Description for Equipment under Test (EUT)

Product	Smart POS system
Model	T6831
Date of Receipt	S01aa/S04aa: August 20, 2024 S08aa: August 26, 2024
EUT ID*	S01aa/S04aa/S08aa
SN/IMEI	S01aa: 86347707000019'863477070003013 S04aa: 863477070000159'863477070003153 S08aa: 861040700003552'861040700008551
Supported Radio Technology and Bands	GSM850/GSM900/DCS1800/PCS1900 WCDMA Band I/II/IV/V/VI/VIII/XIX LTE Band 1/2/3/4/5/7/8/18/19/20/26/28/34/38/39/40/41 BT 5.0 BLE/BR/EDR WLAN 802.11b/g/n WLAN 802.11a/n/ac GPS/GLONASS/BDS/Galileo NFC
Hardware Version	V1.0
Software Version	V3.0.4
FCC ID	2AH25T6831
NOTE1: EUT ID is the internal identification code of the laboratory.	
NOTE2: Samples in the test report are provided by the customer. The test results are only applicable to the samples received by the laboratory.	

### 4.2 Internal identification of AE used during the test

AE ID*	Description	Model	SN/Remark
CA04	Adapter	TPA-141A050200UU01	N/A
CB02	Adapter	UC13US	N/A
UA04	AC Cable	N/A	N/A
BA04	Battery	HPPA	Guangdong Highpower NewEnergy Technology Co., Ltd.
NOTE1: AE ID is the internal identification code of the laboratory.			
NOTE2: By verifying that BA04 is the worst battery and adapter combination, this battery and adapter are used in all tests.			

#### 4.3 Additional Information

Modulation:

Type of modulation	GMSK/8PSK
--------------------	-----------

Band Frequency Range:

Band	Frequency Range(MHz)
GSM850	824.2-848.8
PCS1900	1850.2-1909.8

Band List:

Band	Low Channel	Low Freq. (MHz)	Mid Channel	Mid Freq. (MHz)	High Channel	High Freq. (MHz)
GSM850	128	824.2	189	836.4	251	848.8
PCS1900	512	1850.2	661	1880	810	1909.8

## 5. Test Configuration Information

### 5.1 Laboratory Environmental Conditions

#### 5.1.1 Permanent Facilities

Relative Humidity	Min. = 45%, Max. = 55 %		
Atmospheric Pressure	101kPa		
Temperature	Normal	Minimum	Maximum
	25°C	-10°C	50°C
Working Voltage of EUT	Normal	Minimum	Maximum
	7.7V	6.0V	8.8 V

### 5.2 Test Equipments Utilized

#### Conduction test system

No.	Name	Model	S/N	SW Version	HW Version	Manufacturer	Cal. Date	Cal. Interval
1	Software	Eagle V3.3	N/A	V3.3	N/A	3IN	N/A	N/A
2	Frequency spectrum analyzer	FSQ	101091	V4.75	V11.00	R&S	2024-07-25	1 Year
3	Wideband Radio Communication Tester	CMW 500	148874	V3.5.136	N/A	R&S	2024-07-26	1 Year
4	Temperature Chamber	B-TF-107C	201804107	N/A	N/A	BoYi	2024-06-07	1 Year
5	Programmable power supply	Keithley 2303	4039070	N/A	N/A	Keithley	2024-06-07	1 Year
6	RF Test Automation Box	RF 2021B	2001	V3.3	N/A	RANATEC	N/A	N/A

#### Radiated emission test system

No.	Name	Model	S/N	SW Version	HW Version	Manufacturer	Cal. Date	Cal. Interval
1	Universal Radio Communication Tester	CMU200	123126	V5.2.1	B12	R&S	2023-10-16	1 Year
2	Universal Radio Communication Tester	CMW500	104178	V3.7.20	1206.06 00.00	R&S	2023-10-16	1 Year
3	EMI Test Receiver	ESU40	100307	V5.1-24-3	01	R&S	2023-12-19	1 Year
4	TRILOG Broadband Antenna	VULB9163	01345	N/A	N/A	Schwarzbeck	2024-03-29	1 Year

5	Double- ridged Waveguide Antenna	ETS-3117	00135890	N/A	N/A	ETS	2024-03-16	1 Years
6	EMI Test Software	EMC32 V10.35.02	N/A	V10.35.02	N/A	R&S	N/A	N/A
7	Preamplifier	SCU08F1	8320024	N/A	N/A	R&S	2023-10-16	1 year
8	Preamplifier	SCU18	10155	N/A	N/A	R&S	2023-10-16	1 year
9	Antenna	SWB-VUBA 9117	9117-266	N/A	N/A	Schwarzbeck	2023-09-08	1 year
							2024-08-31	
10	Antenna	BBHA9120 D	02112	N/A	N/A	Schwarzbeck	2024-8-3	1 year
11	Signal Generator	SMF100A	102314	3.20.390.24	05.10	R&S	2023-10-16	1 year

### 5.3 Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in 3IN documents. The detailed measurement uncertainty is defined in 3IN documents.

#### Measurement Uncertainty of Radiation test

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 1GHz	±5.10
1GHz ≤ f ≤ 18GHz	±5.66
18GHz ≤ f ≤ 40GHz	±5.22

#### Measurement Uncertainty of Conduction test

No	Item	Extended uncertainty (k=2)	
1	Frequency Tolerance	23Hz	
2	RF Output Power	0.7dB	
3	conducted spurious	9kHz~3.6GHz	1.5dB
		3.6GHz~8.4GHz	2.8dB
		8.4GHz~12.75GHz	3.4dB
4	EVM	2.1%	
5	Occupied Bandwidth	Bandwidth 1.4MHz	0.03MHz
		Bandwidth 3MHz	0.03MHz
		Bandwidth 5MHz	0.03MHz
		Bandwidth 10MHz	0.05MHz
		Bandwidth 15MHz	0.06MHz
		Bandwidth 20MHz	0.08MHz
6	Emission intermodulation	Adjacent channel	1.4dB

		Alternate channel	1.4dB
7	Range of frequency		0.08MHz

## 6. Test Results

### 6.1 Output Power

#### 6.1.1 Measurement Limit

FCC §22.913(a) Mobile stations are limited to 7 watts.

FCC §24.232(c) Mobile and portable stations are limited to 2 watts.

#### 6.1.2 Method of Measurements

Method of measurements please refer to KDB971168 D01 v03 clause 5.

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz base station CMW500.

These measurements were done at 3 frequencies.(bottom, middle and top of operational frequency range).


1. The transmitter output port was connected to base station.
2. Set the EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record maximum average power for other modulation signal.
5. During the process of testing, the EUT was controlled Rhode & Schwarz Digital Radio.
6. Communication tester to ensure max power transmission and proper modulation.
7. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

EIRP= Conducted power+Gain, ERP = EIRP -2.15dBi.

#### 6.1.3 Test procedures

The transmitter output power was connected to calibrated attenuator, the other end of which was connected to signal analyzer. Transmitter output power was read off the power in dBm. The power outputs at the transmitter antenna port was determined by adding the value of attenuator to the base station reading.

#### 6.1.4 Test Setup

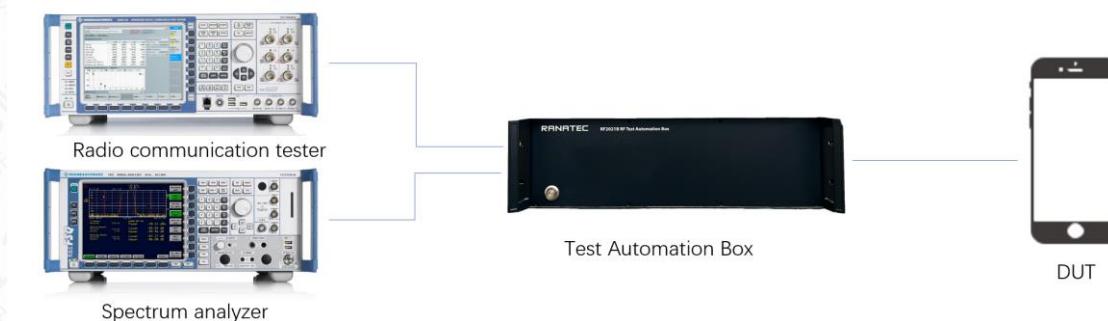

### 6.1.5 Output Power Measurement result

BAND	Mode	Output power(dBm)
GSM850	GMSK	30.34
PCS1900	GMSK	27.89

Note1: The power of the worst part is verified to meet the requirements.

### 6.1.6 EIRP/ERP results

BAND	Mode	EIRP (dBm)	ERP (dBm)
GSM850	GMSK	28.71	26.56
PCS1900	GMSK	28.35	26.2

## 6.2 Emission Limit

### 6.2.1 Summary

FCC §22.917/24.238(a) specifies that " In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power  $P$  (dBW) by at least  $43 + 10 \log_{10} p$  (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power  $P$  (dBW) by at least  $43 + 10 \log_{10} p$  (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required." Limit -13 dBm

### 6.2.2 Method of Measurement


The measurements procedures in TIA-603E-2016 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238 and Part 24.917.

The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.


#### The procedure of radiated spurious emissions is as follows

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

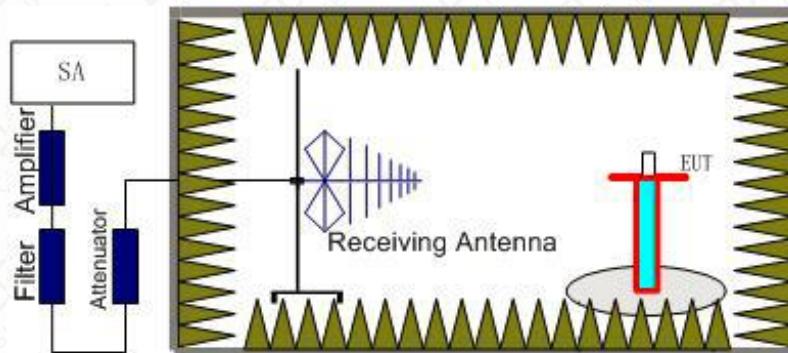

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as  $(Pr)$ .

3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

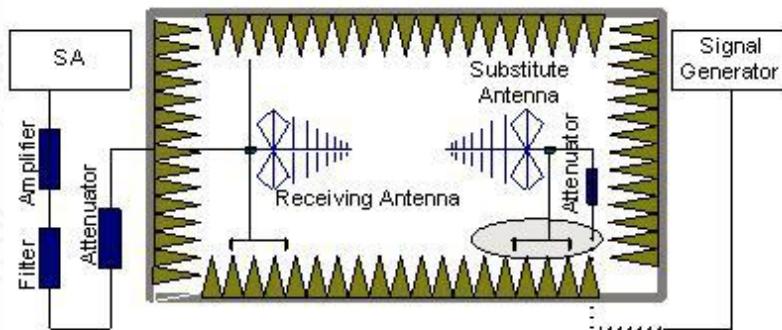

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (Pcl) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (Ga) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (Pcl) is the summation of the cable loss .

The test results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$

### 6.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

test Frequency range: 30M-20G

**Only the worst mode data is provided**

**Mainly Supply**

**RSE-GPRS850-L**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
1643.6	-48.24	4.2	4.7	-47.74	-13	34.74	H

2471.8	-37.89	5.4	5.6	-37.69	-13	24.69	H
3296.5	-49.94	6.2	6.9	-49.24	-13	36.24	H
4150.4	-53.19	7.0	8.9	-51.29	-13	38.29	V
4940.8	-51.18	7.7	9.6	-49.28	-13	36.28	H
5758.8	-51.69	8.5	10.2	-49.99	-13	36.99	V

**RSE-GPRS850-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
1676.8	-48.97	4.5	4.7	-48.77	-13	35.77	V
2510.4	-41.33	5.4	5.6	-41.13	-13	28.13	H
3343.8	-50.45	6.2	6.9	-49.75	-13	36.75	V
4181.5	-51.59	7.0	8.9	-49.69	-13	36.69	V
5025.0	-50.91	7.8	9.6	-49.11	-13	36.11	H
5858.1	-51.76	8.4	10.2	-49.96	-13	36.96	H

**RSE-EGPRS850-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
1673.6	-49.66	4.5	4.7	-49.46	-13	36.46	H
2513.6	-41.82	5.4	5.6	-41.62	-13	28.62	H
3330.0	-49.98	6.2	6.9	-49.28	-13	36.28	H
4183.8	-53.22	7.0	8.9	-51.32	-13	38.32	H
5018.1	-52.13	7.8	9.6	-50.33	-13	37.33	V
5846.5	-51.86	8.4	10.2	-50.06	-13	37.06	H

**RSE-GPRS850-H**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
1696.1	-49.08	4.5	4.7	-48.88	-13	35.88	H
2545.7	-41.36	5.4	5.6	-41.16	-13	28.16	H
3395.8	-51.85	6.3	7.8	-50.35	-13	37.35	H

4243.8	-49.46	7.1	8.9	-47.66	-13	34.66	V
5090.8	-49.76	7.9	9.6	-48.06	-13	35.06	H
5943.5	-51.07	8.5	10.2	-49.37	-13	36.37	H

**RSE-GPRS1900-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3700.2	-51.93	6.6	7.9	-50.63	-13	37.63	V
5551.2	-49.5	8.2	9.8	-47.9	-13	34.90	H
7401.6	-54.51	9.7	11.6	-52.61	-13	39.61	V
9268.8	-51.25	10.7	12.7	-49.25	-13	36.25	H
11210.4	-47.31	12.1	12.3	-47.11	-13	34.11	V
12962.4	-45.8	13.2	12.3	-46.7	-13	33.70	H

**RSE-EGPRS1900-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3700.2	-53.5	6.6	7.9	-52.2	-13	39.20	H
5551.2	-50.13	8.2	9.8	-48.53	-13	35.53	H
7402.8	-53.89	9.7	11.6	-51.99	-13	38.99	V
9246.0	-51.25	10.5	12.6	-49.15	-13	36.15	V
11126.4	-47.14	12.1	12.3	-46.94	-13	33.94	V
12796.8	-45.96	12.5	12.3	-46.16	-13	33.16	H

**Secondary Supply**
**RSE-GPRS850-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
1673.6	-43.26	4.5	4.7	-43.06	-13	30.06	H
2555.4	-42.95	5.4	5.6	-42.75	-13	29.75	H
3345.0	-49.92	6.2	6.9	-49.22	-13	36.22	V
4038.5	-52.32	6.9	8.6	-50.62	-13	37.62	H

5093.1	-50.18	7.9	9.6	-48.48	-13	35.48	V
5956.2	-51.71	8.5	10.2	-50.01	-13	37.01	V

**RSE-EGPRS850-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
1713.2	-48.8	4.5	4.7	-48.6	-13	35.60	H
2511.4	-41.89	5.4	5.6	-41.69	-13	28.69	H
3358.8	-53.39	6.2	6.9	-52.69	-13	39.69	V
4253.1	-52.15	7.1	8.9	-50.35	-13	37.35	V
5123.1	-50.33	7.9	9.6	-48.63	-13	35.63	H
5862.7	-52.19	8.4	10.2	-50.39	-13	37.39	V

**RSE-GPRS1900-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3759.6	-49.98	6.6	7.9	-48.68	-13	35.68	H
5640.0	-51.41	8.3	10.2	-49.51	-13	36.51	H
7534.8	-53.9	9.7	11.6	-52	-13	39.00	V
9399.6	-48.89	10.7	12.7	-46.89	-13	33.89	H
11595.6	-46.93	12.2	12.3	-46.83	-13	33.83	V
3759.6	-49.98	6.6	7.9	-48.68	-13	35.68	H

**RSE-EGPRS1900-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3842.4	-54.97	6.7	7.9	-53.77	-13	40.77	H
5721.6	-55.48	8.5	10.2	-53.78	-13	40.78	V
7506.0	-54.2	9.7	11.6	-52.3	-13	39.30	H
9399.6	-50.05	10.7	12.7	-48.05	-13	35.05	H
11347.2	-48.68	12.1	12.3	-48.48	-13	35.48	V
13326.0	-43.8	13.6	12.3	-45.1	-13	32.10	H

## Annex A: Revised History

Version	Revised Content
V0	Initial

## Annex B: Accreditation Certificate



### Accredited Laboratory

A2LA has accredited

### INDUSTRIAL INTERNET INNOVATION CENTER (SHANGHAI) CO., LTD.

Shanghai, People's Republic of China

for technical competence in the field of

#### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 20<sup>th</sup> day of September 2023.



Mr. Trace McInturff, Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 3682.01  
Valid to February 28, 2025



For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

**END OF REPORT**