


Industrial Internet Innovation Center (Shanghai) Co.,Ltd.


SAR TEST REPORT

PRODUCT	Smart POS system
BRAND	SUNMI
MODEL	T6900
FCC ID	2AH25T6900P2
IC	22621-T6900P2
APPLICANT	Shanghai Sunmi Technology Co.,Ltd.
ISSUE DATE	November 22, 2023
STANDARD(S)	ANSI/IEEE C95.1-1992, IEEE std 1528-2013, RSS 102:2015 Issue 5, IEC/IEEE 62209-1528:2020


Prepared by: Chen Jintao



Reviewed by: Yan Hang



Approved by: Zhang Min

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

CONTENTS

1	SUMMARY OF TEST REPORT	5
1.1	TEST STANDARD (S)	5
1.2	REFERENCE DOCUMENTS.....	5
1.3	SUMMARY OF TEST RESULTS	6
2	GENERAL INFORMATION OF THE LABORATORY	8
2.1	TESTING LABORATORY.....	8
2.2	LABORATORY ENVIRONMENTAL REQUIREMENTS	8
2.3	PROJECT INFORMATION.....	8
3	GENERAL INFORMATION OF THE CUSTOMER	9
3.1	APPLICANT	9
3.2	MANUFACTURER	9
3.3	FACTORY	9
4	GENERAL INFORMATION OF THE PRODUCT.....	10
4.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	10
4.2	DESCRIPTION FOR AUXILIARY EQUIPMENT (AE)	11
5	TEST CONFIGURATION INFORMATION.....	12
5.1	TEST EQUIPMENTS UTILIZED	12
5.2	MEASUREMENT UNCERTAINTY	12
5.3	EUT CONNECTION DIAGRAM OF TEST SYSTEM	13
6	SPECIFIC ABSORPTION RATE(SAR)	14
6.1	INTRODUCTION	14
6.2	SAR DEFINITION.....	14
7	SAR MEASUREMENT SYSTEM INTRODUCTION.....	15
7.1	MEASUREMENT SET-UP	15
7.2	E-FIELD PROBE SYSTEM.....	16
7.3	E-FIELD PROBE CALIBRATION.....	17
7.4	OTHER TEST EQUIPMENT	18
8	TEST POSITION IN RELATION TO THE PHANTOM.....	21
8.1	GENERAL CONSIDERATIONS	21
8.2	BODY-WORN DEVICE	22
8.3	DESKTOP DEVICE	23
9	TISSUE SIMULATING LIQUIDS.....	24
9.1	EQUIVALENT TISSUES COMPOSITION.....	24
9.2	LIQUID DEPTH	26
9.3	DIELECTRIC PERFORMANCE OF TSL	27

10	SYSTEM CHECK	28
10.1	SYSTEM CHECK	28
10.2	SYSTEM SETUP	28
10.3	SYSTEM CHECK RESULT	28
11	MEASUREMENT PROCEDURES	29
11.1	TEST STEPS	29
11.2	SPATIAL PEAK SAR EVALUATION.....	30
11.3	GENERAL MEASUREMENT PROCEDURE	31
11.4	GSM/GPRS MEASUREMENT PROCEDURES.....	32
11.5	WCDMA MEASUREMENT PROCEDURES.....	32
11.6	LTE MEASUREMENT PROCEDURE.....	33
11.7	BLUETOOTH & WI-FI MEASUREMENT PROCEDURES	35
11.8	AREA SCAN BASED 1G SAR	36
12	SIMULTANEOUS TRANSMISSION SAR CONSIDERATIONS	37
12.1	REFERENCE DOCUMENT	37
12.2	ANTENNA SEPARATION DISTANCES	37
12.3	SAR MEASUREMENT POSITIONS.....	38
12.4	LOW POWER TRANSMITTERS SAR CONSIDERATION	38
12.5	SIMULTANEOUS TRANSMISSION ANALYSIS	39
12.6	SIMULTANEOUS TRANSMISSION TABLE	40
13	CONDUCTED OUTPUT POWER	41
13.1	POWER REDUCTION PROCEDURES.....	41
13.2	GSM MEASUREMENT RESULT	42
13.3	WCDMA MEASUREMENT RESULT	43
13.4	LTE MEASUREMENT RESULT.....	46
13.5	BT MEASUREMENT RESULT	81
13.6	WI-FI MEASUREMENT RESULT	81
13.7	NFC MEASUREMENT RESULT	82
14	TEST RESULTS	83
14.1	STANDALONE SAR TEST RESULT.....	83
14.2	SIMULTANEOUS SAR EVALUATION	88
14.3	SAR MEASUREMENT VARIABILITY	90
15	SAR REDUCTION FUNCTION VALIDATION PROCEDURE	91
15.1	REFERENCE DOCUMENT (POWER REDUCTION FOR PROXIMITY SENSOR)	91
15.2	PROCEDURES FOR DETERMINING PROXIMITY SENSOR TRIGGERING DISTANCES.....	91
15.3	PROCEDURES FOR DETERMINING ANTENNA AND PROXIMITY SENSOR COVERAGE	91
15.4	PROXIMITY SENSOR STATUS TABLE OF TRIGGER DISTANCE.....	93
15.5	TILT ANGLE INFLUENCES TO PROXIMITY SENSOR TRIGGERING	97
15.6	POWER REDUCTION PER AIR-INTERFACE	99

15.7	PROXIMITY SENSOR COVERAGE AREA	100
ANNEX A: MEASUREMENT DATA.....		101
A.1	SAR GRAPH RESULTS.....	101
A.2	SYSTEM CHECK GRAPH RESULTS.....	109
ANNEX B: CALIBRATION CERTIFICATE		113
ANNEX C: REVISED HISTORY		149
ANNEX D: ACCREDITATION CERTIFICATE.....		150

1 Summary of Test Report

1.1 Test Standard (s)

No.	Test Standard(s)	Title	Version
1	ANSI/IEEE C95.1	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.	1992
2	IEEE Std 1528	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.	2013
3	IEC/IEEE 62209-1528	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)	2020
4	RSS 102	Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands)	2015 Issue 5

1.2 Reference Documents

No.	Reference Document(s)	Title	Version
1	KDB248227	802.11 Wi-Fi SAR	D01 v02r02
2	KDB447498	General RF Exposure Guidance	D01 v06
3	KDB865664	SAR Measurement 100 MHz to 6 GHz	D01 v01r04
4	KDB865664	RF Exposure Reporting	D02 v01r02
5	KDB941225	3G SAR Procedures	D01 v03r01
6	KDB941225	SAR for LTE Devices	D05 v02r05
7	KDB941225	Hotspot SAR	D06 v02r01
8	KDB616217	SAR for laptop and tablets	D04 v01r02

1.3 Summary of Test Results

1.3.1 The maximum results of Specific Absorption Rate (SAR) in standalone mode are as follows.

Band	Reported SAR 1g(W/Kg)	Reported SAR 10g(W/Kg)	Detailed Results
	Body-Worn&Hotspot(5mm)	Limb(0mm)	
GSM850	0.246	0.255	See section 14.1
GSM1900	0.920	0.347	See section 14.1
WCDMA Band II	1.203	0.632	See section 14.1
WCDMA Band IV	1.167	0.630	See section 14.1
WCDMA Band V	0.621	0.706	See section 14.1
LTE Band 2	1.157	0.924	See section 14.1
LTE Band 4	1.254	0.670	See section 14.1
LTE Band 5	0.674	0.587	See section 14.1
LTE Band 7	1.142	1.395	See section 14.1
LTE Band 12	0.667	0.806	See section 14.1
LTE Band 17	0.624	0.632	See section 14.1
LTE Band 25	0.695	0.666	See section 14.1
LTE Band 26	0.649	0.630	See section 14.1
LTE Band 41	0.866	0.729	See section 14.1
LTE Band 66	1.002	0.957	See section 14.1
Wi-Fi 2.4G	0.630	0.748	See section 14.1
Wi-Fi 5G	0.513	0.455	See section 14.1
BT	0.068	0.052	See section 14.1

NOTE1:The T6900 manufactured by Shanghai Sunmi Technology Co.,Ltd. is a variant product for testing.

NOTE2:This project is a variant project based on the original report I22I30110-SAR01-V02. According to the product change description, this project fully tested LTE Band 12, LTE Band 25, LTE Band 26 and LTE Band 66, and recorded the test results in the report. Other information is referred to the original report.

NOTE3:The device implements proximity sensor trigger reduced power for SAR compliance at different exposure conditions, which can refer to chapter 13.1.

NOTE4:Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 4 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 1 of this test report.

1.3.2 The maximum results of Specific Absorption Rate (SAR) in simultaneous mode are as follows.

Highest Reported SAR 1g(W/kg)			
Mode	Position	Simultaneous Transmission SAR	Detailed Results
LTE Band 4&Wi-Fi 5G	Body-Worn&Hotspot(5mm)	1.449	See section 14.2
Highest Reported SAR 10g(W/kg)			
LTE Band 7&Wi-Fi 5G	Limb(0mm)	1.395	See section 14.2

2 General Information of The Laboratory

2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	708870
FCC Designation No.	CN1364
IC Designation No.	10766A
CAB identifier	CN0067

2.2 Laboratory Environmental Requirements

Temperature	18°C~25°C
Relative Humidity	25%RH~75%RH

2.3 Project Information

Project Manager	Gao Hongning
Test Date	October 26, 2023 to November 14, 2023

3 General Information of The Customer

3.1 Applicant

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388, Song Hu Road, Yang Pu District, Shanghai, China
Telephone	+86-17302160204

3.2 Manufacturer

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388, Song Hu Road, Yang Pu District, Shanghai, China

3.3 Factory

Company	N/A
Address	N/A

4 General Information of The Product

4.1 Product Description for Equipment under Test (EUT)

Product	Smart POS system
Model	T6900
Date of Receipt	October 25, 2023
EUT ID*	S04
SN/IMEI	S04:869325026801408/869325026801416
Supported Radio Technology and Bands	GSM850/GSM900/GSM1800/GSM1900 WCDMA Band I / II / IV / V / VIII LTE Band 1/2/3/4/5/7/12/17/19/25/26/28/38/41/66 Wi-Fi 802.11a/b/g/n BT4.2,BLE
Tx Frequency	824-849 MHz (GSM850) 1850-1910 MHz (GSM1900) 1850-1910 MHz (WCDMA Band II) 1710-1755 MHz (WCDMA Band IV) 824-849 MHz (WCDMA Band V) 1850-1910 MHz (LTE Band 2) 1710-1755 MHz (LTE Band 4) 824-849 MHz (LTE Band 5) 2500-2570 MHz (LTE Band 7) 699-716 MHz (LTE Band 12) 704-716 MHz (LTE Band 17) 1850-1915 MHz (LTE Band 25) 814-849 MHz (LTE Band 26) 2570-2620 MHz (LTE Band 38) 2535-2655 MHz (LTE Band 41) 1710-1780 MHz (LTE Band 66) 2412-2462 MHz (Wi-Fi 2.4G) 5180-5240 MHz (U-NII-1) 5260-5320 MHz (U-NII-2A) 5745-5825 MHz (U-NII-3) 2402-2480 MHz (BT)
HVIN	T6900P2-3
Hardware Version	B1691_MAIN_PCB
Software Version	SP6359A-20230925115332
Dimension	222mm*81.6m*17.6mm
NOTE: EUT ID is the internal identification code of the laboratory.	

4.2 Description for Auxiliary Equipment (AE)

AE ID*	Description	Model	SN/Remark
BA01	Battery	P2	N/A
NOTE: AE ID is the internal identification code of the laboratory.			

5 Test Configuration Information

5.1 Test Equipments Utilized

No.	Name	Model	S/N	Software Version	Hardware Version	Manufacturer	Cal. Date	Cal. Interval
1	Network analyzer	N5242 A	MY51221755	A.09.33.09	N/A	Agilent	Oct.16, 2023	1 Year
2	Power meter	NRX	103851	02.50.21112602	N/A	R&S	Jul.26, 2023	1 Year
3	Power sensor	NRP18S-10	101841	N/A	N/A	R&S	Jul.26, 2023	1 Year
4	Power sensor	NRP18S-10	101842	N/A	N/A	R&S	Jul.26, 2023	1 Year
5	Signal Generator	E4438C	MY49072044	N/A	C.05.83	Agilent	Jul.26, 2023	1 Year
6	Amplifier	NTWPA-07605	22039018	N/A	N/A	RFLIGHT	Jul.26, 2023	1 Year
7	Test Software	DASY5	N/A	52.10.4.1527	N/A	SPEAG	N/A	N/A
8	DAE	DAE4	1244	N/A	N/A	SPEAG	Apr.10, 2023	1 Year
9	E-field Probe	EX3DV4	7633	N/A	N/A	SPEAG	Apr.28, 2023	1 Year
10	BTS	MT8820C	6201240338	V3.8.10	N/A	Anritsu	Oct.16, 2023	1 Year
11	Dipole Validation Kit	D750 V3	1144	N/A	N/A	SPEAG	Sep.12, 2023	1 Year
12	Dipole Validation Kit	D835 V2	4d112	N/A	N/A	SPEAG	Sep.6, 2023	1 Year
13	Dipole Validation Kit	D1750 V2	1044	N/A	N/A	SPEAG	Sep.8, 2023	1 Year
14	Dipole Validation Kit	D1900 V2	5d232	N/A	N/A	SPEAG	Dec.12, 2022	1 Year

5.2 Measurement Uncertainty

Item	Uncertainty
SAR	$U_{SAR(1g)}=22.08\%$, $U_{SAR(10g)}=21.82\%$
NOTE: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5.3 EUT Connection Diagram of Test System

5.3.1 SAR

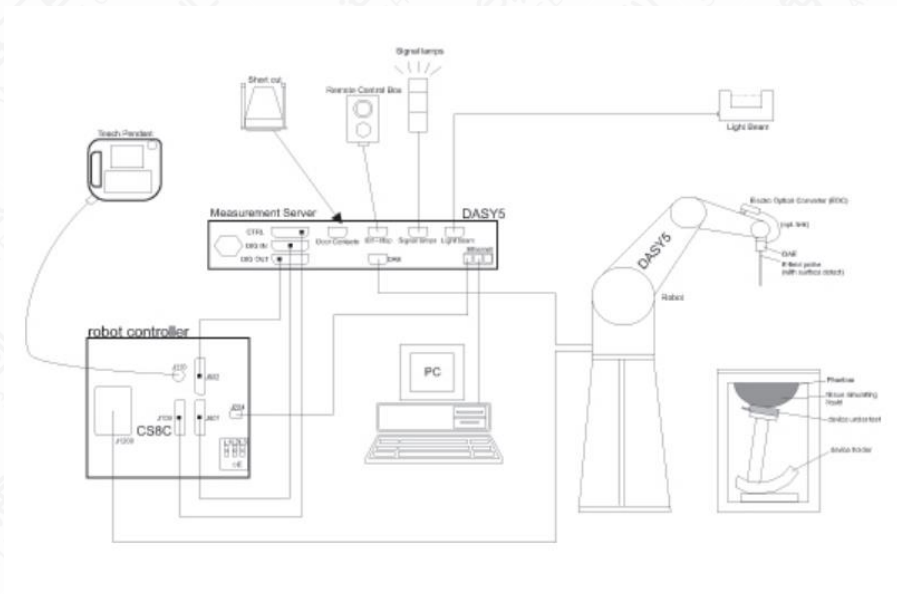


Figure 5.3.1-1 SAR Connection Diagram

6 Specific Absorption Rate(SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/ controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by:

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by:

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

σ is the conductivity of the tissue

ρ is the mass density of tissue, which is normally set to 1g/cm^3


E is the RMS electrical field strength

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 SAR Measurement System Introduction

7.1 Measurement Set-up

The DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

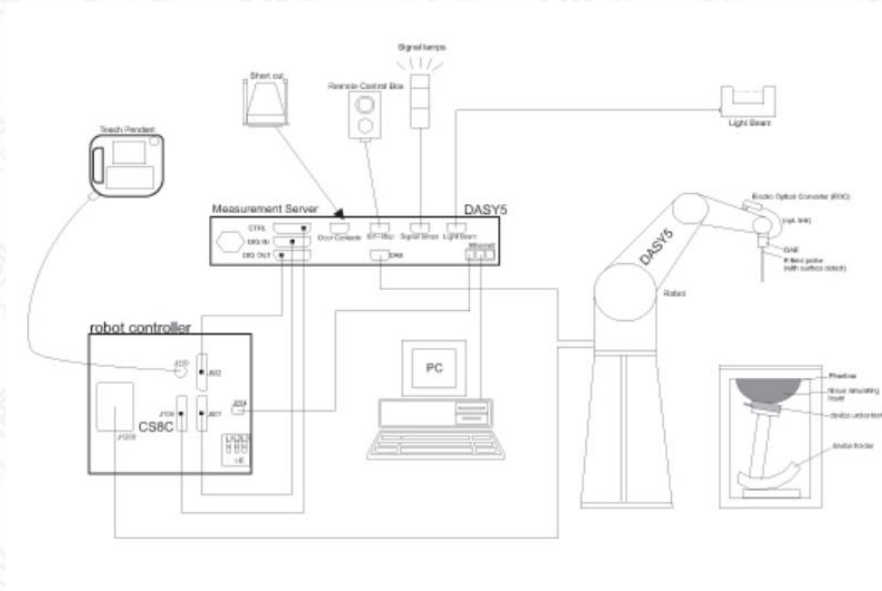

Figures 7.1-1 SAR Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.

The phantom, the device holder and other accessories according to the targeted measurement.

7.2 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY software reads the reflection during a software approach and looks for the maximum using 2nd order curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications		
Model	EX3DV4	
Frequency Range	4 MHz – 10 GHz	
Calibration	In head simulating tissue at frequency from 650MHz to 5900MHz	
Linearity	±0.2 dB (30 MHz – 10 GHz)	
Dynamic Range	10 µW/g – >100 mW/g	
Probe Length	337 mm	
Probe Tip Length	20 mm	
Body Diameter	12 mm	
Tip Diameter	2.5 mm	
Tip-Center	1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better than 30%.	

Figure 7.2-1 Detail of Probe

Figure 7.2-2 E-field Probe

7.3 E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equate to 1 mW/cm².

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

7.4 Other Test Equipment

7.4.1 Data Acquisition Electronics (DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



Figure 7.4.1-1: DAE

7.4.2 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX90) type from Stäubli SA (France).

For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchronal motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Figure 7.4.2-1: DASY5

7.4.3 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400 MHz intel ULV Celeron, 128 MB chipdisk and 128 MB RAM. The necessary circuits for communication with either the DAE4 (or DAE3) electronics box as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.



Figure 7.4.3-1 Server for DASY5

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.

7.4.4 Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Figure 7.4.4-1: Device Holder

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Figure 7.4.4-2: Laptop Extension Kit

7.4.5 Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness	$2 \pm 0.2 \text{ mm}$
Available	Special
Filling Volume	Approx. 25 liters
Dimensions	810 mm x 1000 mm x 500 mm (H x L x W)



Figure 7.4.5-1: SAM Twin Phantom

8 Test Position in Relation to the Phantom

8.1 General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

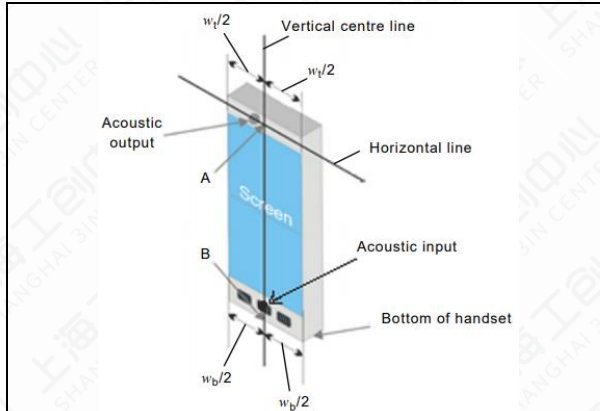


Figure 8.1-1 full touch screen smart phone (top)

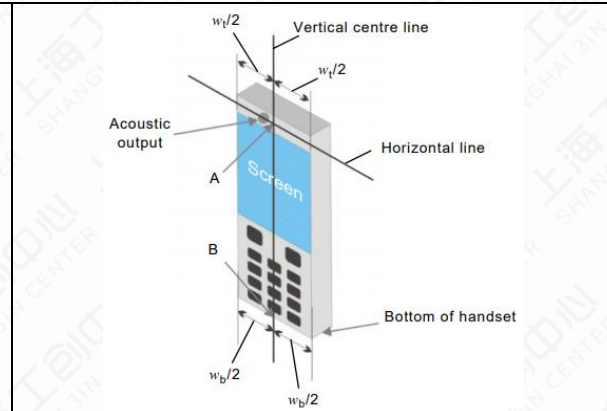


Figure 8.1-2 keyboard handset (bottom)

w_t	Width of the handset at the level of the acoustic output
w_b	Width of the bottom of the handset
A	Midpoint of the width w_t of the DUT at the level of the acoustic output
B	Midpoint of the width w_b of the bottom of the handset

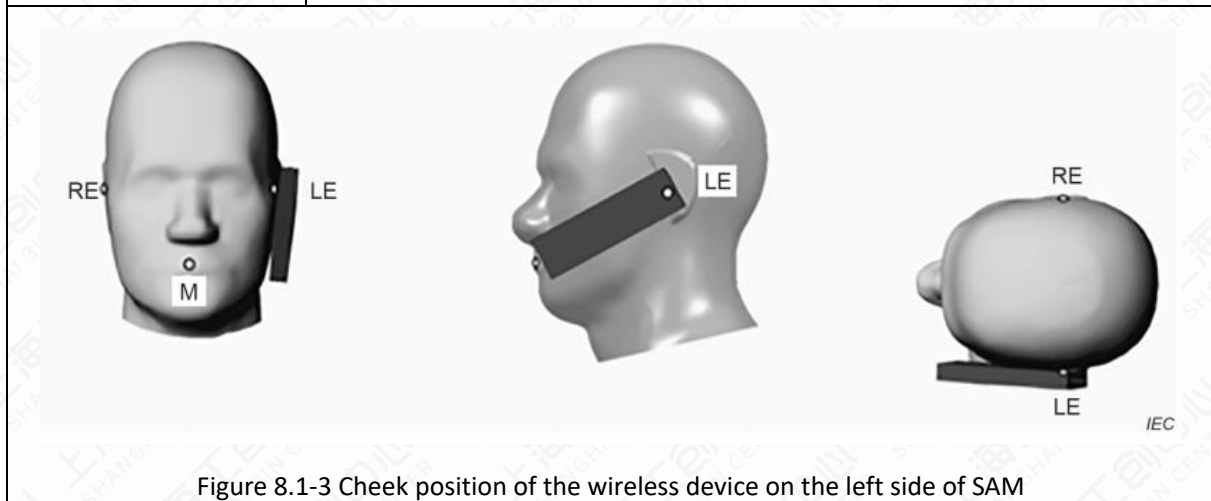


Figure 8.1-3 Cheek position of the wireless device on the left side of SAM

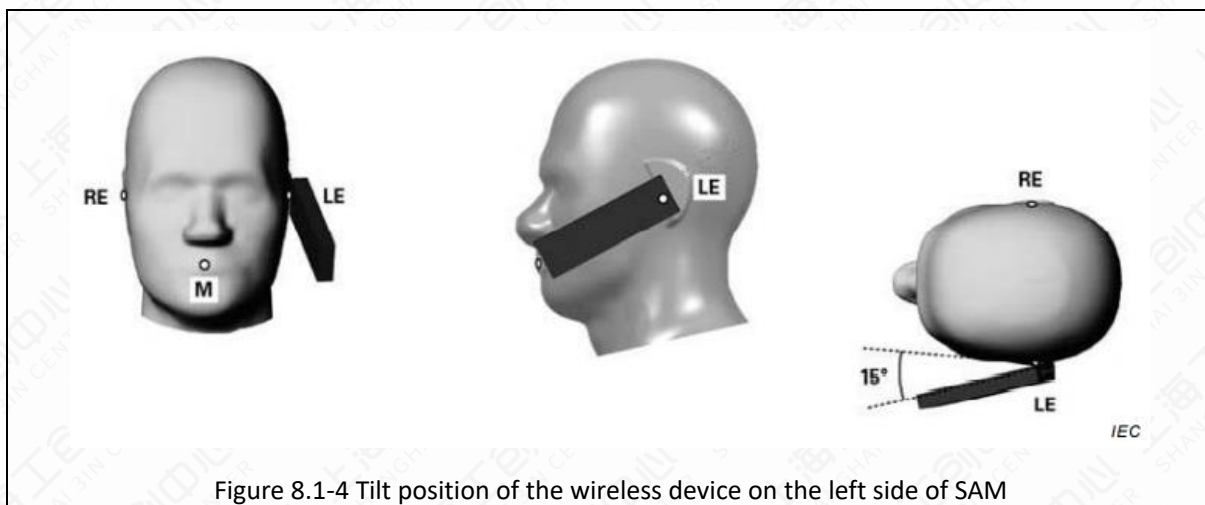


Figure 8.1-4 Tilt position of the wireless device on the left side of SAM

8.2 Body-worn device

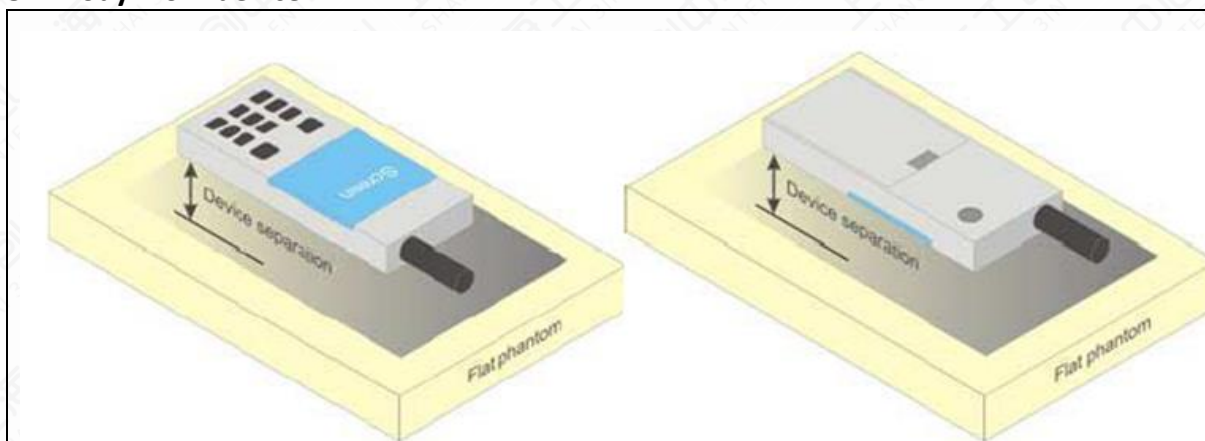


Figure 8.2-1 Test positions for body-worn devices

A typical example of a body-worn device is a mobile phone, wireless enabled PDA (personal digital assistant) or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

8.3 Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions.

Tests shall be performed for all antenna positions specified.

Picture 8-6 shows positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat

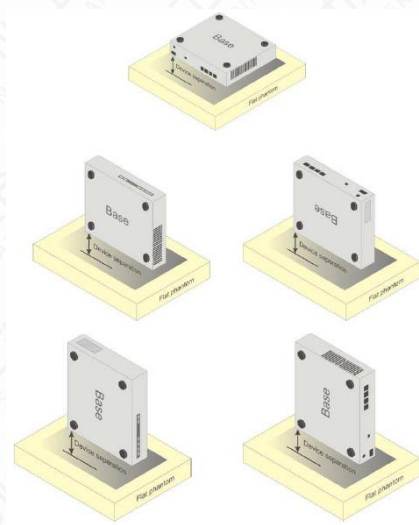


Figure 8.3-1 Test positions for desktop devices

9 Tissue Simulating Liquids

9.1 Equivalent Tissues Composition

The liquid used for the frequency range of 650-6000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table 9.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE Std 1528.

Table 9.1-1: Composition of the Head Tissue Equivalent Matter

Frequency (MHz)	835	900	1800	1950	2300	2450	2600	5800
Ingredients (% by weight)								
Water	41.45	40.92	55.242	54.89	56.34	58.79	58.79	65.53
Sugar	56.0	56.5	/	/	/	/	/	/
Salt	1.45	1.48	0.306	0.18	0.14	0.06	0.06	/
Preventol	0.1	0.1	/	/	/	/	/	/
Cellulose	1.0	1.0	/	/	/	/	/	/
GlycolMonobutyl	/	/	44.452	44.93	43.52	41.15	41.15	/
Diethyleneglycol momohexylether	/	/	/	/	/	/	/	17.24
Triton X-100	/	/	/	/	/	/	/	17.23
Dielectric Parameters Target Value	$\epsilon=41.5$ $\sigma=0.90$	$\epsilon=41.5$ $\sigma=0.97$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=39.5$ $\sigma=1.67$	$\epsilon=39.2$ $\sigma=1.80$	$\epsilon=39.0$ $\sigma=1.96$	$\epsilon=35.3$ $\sigma=5.27$


Table 9.1-2: Targets for tissue simulating liquid

Frequency (MHz)	Liquid Type	Conductivity (σ)	$\pm 5\%$ Range	Permittivity (ϵ)	$\pm 5\%$ Range
750	Head	0.89	0.846~0.934	41.9	39.805~43.995
835	Head	0.90	0.855~0.945	41.5	39.425~43.575
900	Head	0.97	0.922~1.018	41.5	39.425~43.575
1450	Head	1.20	1.140~1.260	40.5	38.475~42.525
1800	Head	1.40	1.330~1.470	40.0	38.000~42.000
1900	Head	1.40	1.330~1.470	40.0	38.000~42.000
1950	Head	1.40	1.330~1.470	40.0	38.000~42.000
2000	Head	1.40	1.330~1.470	40.0	38.000~42.000
2100	Head	1.49	1.416~1.564	39.8	37.810~41.790
2450	Head	1.80	1.710~1.890	39.2	37.240~41.160
2600	Head	1.96	1.862~2.058	39.0	37.050~40.950
3000	Head	2.40	2.280~2.520	38.5	36.575~40.425
3500	Head	2.91	2.765~3.055	37.9	36.005~39.795
4000	Head	3.43	3.259~3.601	37.4	35.530~39.270
4500	Head	3.94	3.743~4.137	36.8	34.960~38.640
5000	Head	4.45	4.228~4.672	36.2	34.390~38.010
5200	Head	4.66	4.427~4.893	36.0	34.200~37.800
5400	Head	4.86	4.617~5.103	35.8	34.010~37.590
5600	Head	5.07	4.817~5.323	35.5	33.725~37.275
5800	Head	5.27	5.007~5.533	35.3	33.535~37.065
6000	Head	5.48	5.206~5.754	35.1	33.345~36.855


9.2 Liquid depth

The Measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: $2.0 \pm 0.2 \text{ mm}$ (bottom Plate) filled with Body or Head simulating Liquid.

The depth of tissue-equivalent liquid in a phantom must be $\geq 15.0 \text{ cm}$ with $\leq \pm 0.5 \text{ cm}$ variation for SAR measurements $\leq 3 \text{ GHz}$ and $\geq 10.0 \text{ cm}$ with $\pm 0.5 \text{ cm}$ variation for measurements $> 3 \text{ GHz}$.

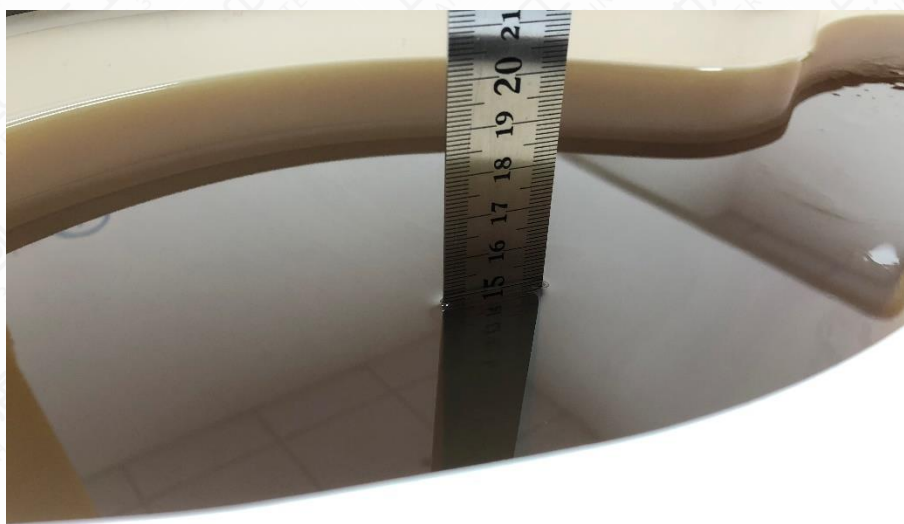

Picture 9.2-1 Liquid depth in the Flat Phantom for SAR measurements $\leq 3 \text{ GHz}$

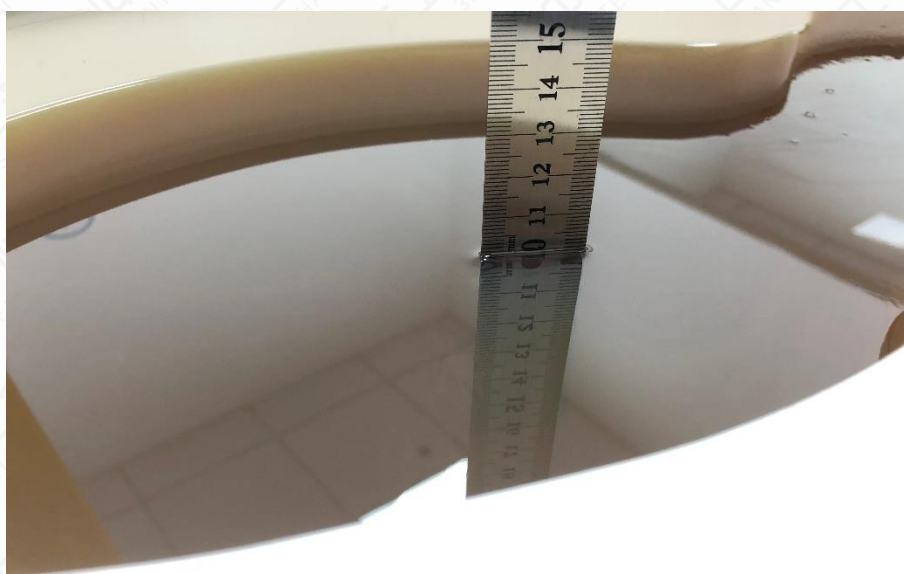

Picture 9.2-2 Liquid depth in the Flat Phantom for SAR measurements $> 3 \text{ GHz}$

9.3 Dielectric Performance of TSL

Table 9.3-1: Dielectric Performance of Head Tissue Simulating Liquid

Frequency (MHz)	Head(Standard)		Temperature	Date	Test Result		Deviation (%)	
	Permittivity ϵ	Conductivity σ			Permittivity ϵ	Conductivity σ	Permittivity ϵ	Conductivity σ
704	42.181	0.889	20.5℃	October 26, 2023	42.377	0.874	0.46	-1.69
707.5	42.162	0.890	20.5℃	October 26, 2023	42.357	0.875	0.46	-1.69
711	42.144	0.890	20.5℃	October 26, 2023	42.345	0.876	0.48	-1.57
750	41.900	0.890	20.5℃	October 26, 2023	42.207	0.889	0.73	-0.11
1720	40.114	1.354	20.3℃	October 31, 2023	38.859	1.306	-3.13	-3.55
1745	40.079	1.369	20.3℃	October 31, 2023	38.817	1.321	-3.15	-3.51
1770	40.043	1.383	20.3℃	October 31, 2023	38.783	1.336	-3.15	-3.40
1750	40.100	1.370	20.3℃	October 31, 2023	38.810	1.324	-3.22	-3.36
821.5	41.604	0.905	20.4℃	November 8, 2023	41.911	0.915	0.74	1.10
831.5	41.567	0.909	20.4℃	November 8, 2023	41.876	0.919	0.74	1.10
841.5	41.531	0.913	20.4℃	November 8, 2023	41.839	0.923	0.74	1.10
835	41.500	0.900	20.4℃	November 8, 2023	41.865	0.921	0.88	2.33
1860	40.000	1.400	20.3℃	November 14, 2023	40.153	1.354	0.38	-3.29
1882.5	40.000	1.400	20.3℃	November 14, 2023	40.080	1.377	0.20	-1.64
1905	40.000	1.400	20.3℃	November 14, 2023	39.978	1.394	-0.05	-0.43
1900	40.000	1.400	20.3℃	November 14, 2023	40.006	1.391	0.02	-0.64

10 System Check

10.1 System Check

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

10.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

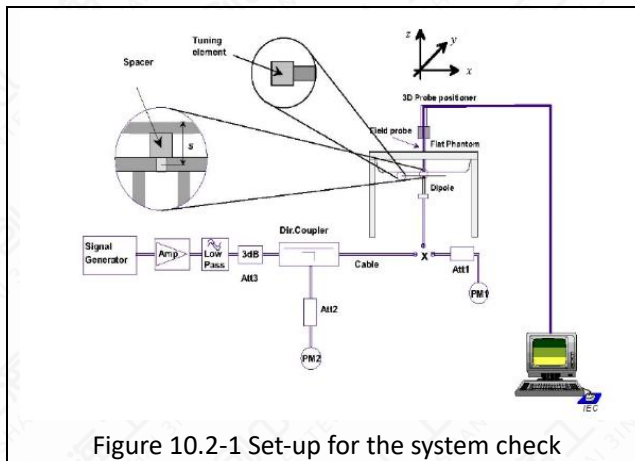


Figure 10.2-1 Set-up for the system check

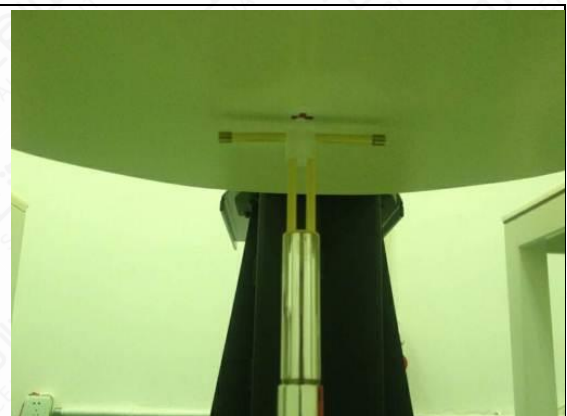


Figure 10.2-2. Setup for Dipole

10.3 System Check Result

Table 10.3-1: System Check Result of SAR

SAR System Check								
Frequency (MHz)	Target Value (w/kg)		Temperature	Date	Test Result (w/kg)		Deviation (%)	
	10g	1g			10g	1g	10g	1g
750	5.48	8.43	21.5°C	October 26, 2023	5.28	8.16	-3.65	-3.20
835	6.24	9.67	21.6°C	November 8, 2023	6.24	9.68	0.00	0.10
1750	19.40	36.70	21.4°C	October 31, 2023	18.72	35.28	-3.51	-3.87
1900	20.70	40.00	21.3°C	November 14, 2023	20.12	39.00	-2.80	-2.50
NOTE: The system verifies that the measured input power level is equivalent to 250mW for 0.6GHz to 3GHz and above 3GHz is equivalent to 100mW, and the measured results are compared with the target value by converting to 1W.								

11 Measurement Procedures

11.1 Test Steps

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

(a) Power reference measurement

The reference and drift jobs are useful for monitoring the power drift of the device under test in the batch process. Both jobs measure the electric field strength at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

(b) Area scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought up, grid was at to 15mm * 15mm and can be edited by users.

(c) Zoom scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1g and 10g of simulated tissue. The default zoom scan measures 5 * 5 * 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly.

(d) Power drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same setting. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under within a batch process. In the properties of the drift job, the user can specify a limit for the drift and have DASY software stop the measurements if this limit is exceeded. This ensures that the power drift during one measurement is within 5%.

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit it maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Measure SAR results for Middle channel or the highest power channel on each testing position
- (e) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg
- (f) Record the SAR value

11.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE Std 1528 standard. It can be conducted for 1g and 10g.

The DASY system allows evaluations that combine measured data and robot positions, such as:

(a) Maximum Search

During a maximum search, global and local maximum searches are automatically performed in 2D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2dB of the global maxima for all SAR distributions.

(b) Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

Extrapolation routines require at least 10 measurement points in 3D space. They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 5*5*5 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10 cubes.

(c) Boundary effect

For measurements in the immediate vicinity of a phantom surface, the field coupling effects between the probe and the boundary influence the probe characteristics. Boundary effect errors of different dosi-metric probe types have been analyzed by measurements and using a numerical probe model. As expected, both methods showed an enhanced sensitivity in the immediate vicinity of the boundary. The effect strongly depends on the probe dimensions and disappears with increasing distance from the boundary. The sensitivity can be approximately given as:

$$S \approx S_0 + S_b * \exp\left(-\frac{z}{a}\right) * \cos\left(\pi \frac{z}{\lambda}\right)$$

Since the decay of the boundary effect dominates for small probe ($a \ll \lambda$), the cos-term can be omitted. Factors S_b (parameter Alpha in the DASY software) and a (parameter Delta in the DASY software) and assessed during probe calibration and used for numerical compensation of the boundary effect. Several simulations and measurements have confirmed that the compensation is valid for different field and boundary configurations.

This simple compensation procedure can largely reduce the probe uncertainty near boundaries. It works well as long as:

- The boundary curvature is small
- The probe axis is angled less than 30° to the boundary normal
- The distance between probe and boundary is larger than 25% of the probe diameter
- The probe is symmetric (all sensors have the same offset from the probe tip)

Since all of these requirements are fulfilled in a DASY system, the correction of the probe boundary effect in the vicinity of the phantom surface is performed in a fully automated manner via the

measurement data extraction during post processing.

11.3 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

Table 11.3-1: Test Resolution Requirement

Items			≤3GHz	>3GHz
Maximum Distance			5mm ±1mm	$\frac{1}{2} * \delta * \ln(2)$ mm ±0.5mm
Maximum probe angle			30±1°	20±1°
Maximum Area Scan spatial resolution: Δx_{Area} , Δy_{Area}			≤2GHz: ≤15mm	3-4GHz: ≤12mm
			2-3GHz: ≤12mm	4-6GHz: ≤10mm
			when the x or y dimension of the device , in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the device with at least one measurement point on the device	
Maximum Zoom Scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤2GHz: ≤8mm	3-4GHz: ≤5mm
			2-3GHz: ≤5mm	4-6GHz: ≤4mm
maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤5mm	3-4GHz: ≤4mm 4-5GHz: ≤3mm 5-6GHz: ≤2mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤4mm	3-4GHz: ≤3mm 4-5GHz: ≤2.5mm 5-6GHz: ≤2mm
		$\Delta z_{Zoom}(n > 1)$ between subsequent points	≤1.5*	
minimum zoom scan volume	x, y, z		≥30mm	3-4GHz: ≥28mm 4-5GHz: ≥25mm 5-6GHz: ≥22mm

Notes:

δ is the penetration depth of a plane-wave at normal incidence to the tissue medium in IEEE Std 1528-2013.

When Zoom Scan is required and reported SAR from the Area Scan based 1-g SAR estimation procedure of KDB publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm for 2GHz-3GHz, ≤ 7 mm for 3GHz-4GHz, ≤ 5 mm for 4GHz-6GHz Zoom Scan resolution may be applied.

11.4 GSM/GPRS Measurement Procedures

GSM/GPRS/EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Other configurations of GSM/GPRS/EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

11.5 WCDMA Measurement Procedures

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

Table 11.5-1: HSDPA setting for Release 5

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM (dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	1.5	0.5
2	12/15	15/15	64	12/15	24/25	2.0	1
3	15/15	8/15	64	15/8	30/15	2.0	1
4	15/15	4/15	64	15/4	30/15	2.0	1

Table 11.5-2: HSUPA setting for Release 6

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
----------	-----------	-----------	----------------	---------------------	--------------	--------------	--------------	-------------------	----------------------	---------	----------	----------	--------

1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	2.0	1.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	3.0	2.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	2.0	1.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	2.0	1.0	21	81

11.6 LTE Measurement Procedure

SAR tests for LTE are performed with a base station simulator. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.

- KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- 16QAM/64QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}\text{dB}$ higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; 16QAM/64QAM SAR testing is not required.
- Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}\text{dB}$ higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; smaller bandwidth SAR testing is not required.
- For LTE Band 12/26 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE band 17/2/5/38/4 SAR test was covered by Band 12/25/26/41/66; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

11.6.1 LTE Carrier Aggregation Conducted Power (Downlink)

Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.

11.6.2 LTE Carrier Aggregation Conducted Power (Uplink)

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

UL CA power measurements were performed for each antennas at with QPSK modulation based on the worst-case standalone SAR.

The UL CA mode power measurements represent the total power across both carriers. Measurements were made for all supported PCC bandwidths using the channel/RB combination resulting in the highest standalone output power at the least MPR (0 dB). SCCs were set to use configurations similar to the PCC to establish conservative or worst case equivalent SAR test conditions (highest maximum power with MPR of 0 dB).

The standalone power measurement is the power for the PCC in the non-CA mode (i.e. single carrier power). In all cases the UL CA power is less than or equal to the standalone power.

11.6.3 LTE TDD Considerations

Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special sub-frame configuration 7.

Table 11.6.3-1 Calculated Duty Cycle for LTE TDD

Uplink-Downlink Configuration		Sub-frame Number										Calculated
Config	Periodicity	1	2	3	4	5	6	7	8	9	10	Duty Cycle (%)
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67

6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33
---	------	---	---	---	---	---	---	---	---	---	---	-------

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

$$\text{Calculated Duty Cycle} = (5120 \times T_s \times 2 + 6 \text{ ms}) / 10\text{ms} = 63.33\%$$

Where

$$T_s = 1/(15000 \times 2048) \text{ seconds}$$

11.7 Bluetooth & Wi-Fi Measurement Procedures

Normal network operating configurations are not suitable for measuring the SAR of IEEE 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

11.8 Area Scan Based 1g SAR

According to the KDB447498 D01, a first class of fast SAR techniques is based on a modified measurement procedure and post processing algorithms. In practice, these methods require a special software, for example DASY52 form SPEAG.

When the implementation is based the specific polynomial fit algorithm as presented at the 29th Bio-electromagnetics Society meeting (2007) and the estimated 1-g SAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1-g and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30MHz-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

12 Simultaneous Transmission SAR Considerations

12.1 Reference Document

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as IEEE 802.11 a/b/g/n/ac/ax and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Antenna Separation Distances

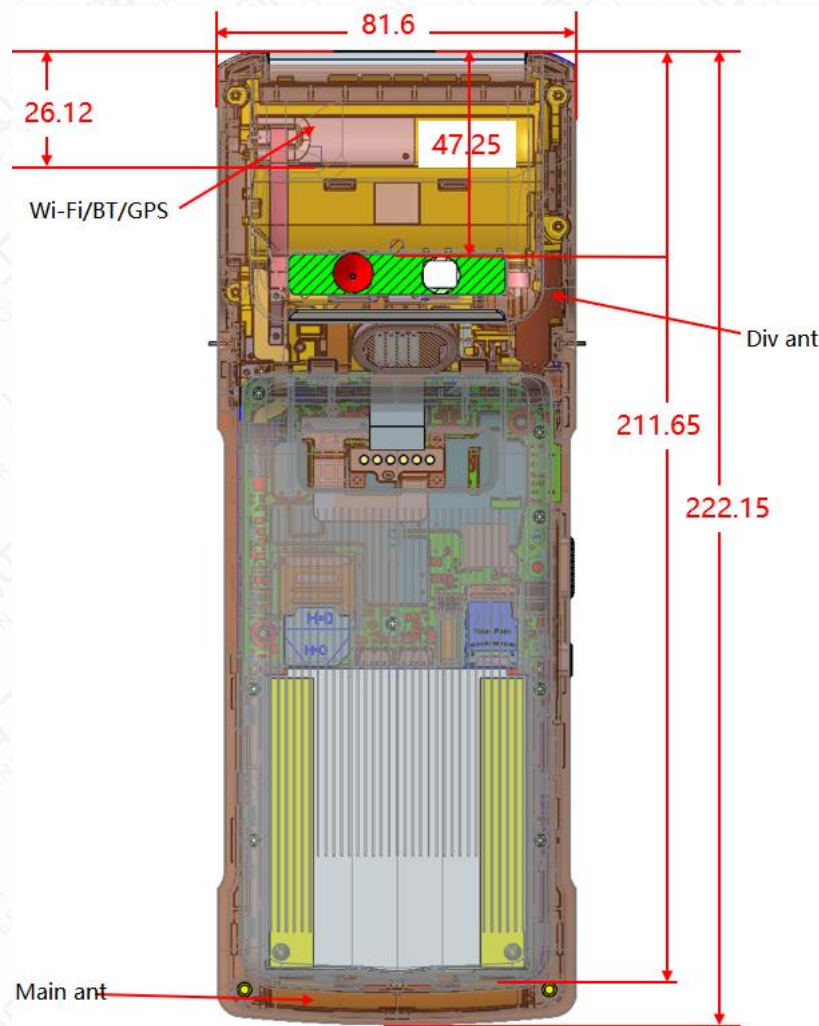


Figure 12.2-1 Antenna Locations

12.3 SAR Measurement Positions

The edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

Table 12.3-1: SAR measurement Positions

Antenna Mode	Front	Back	Left	Right	Top	Bottom
GSM/WCDMA/LTE	Yes	Yes	Yes	Yes	No	Yes
BT/ Wi-Fi	Yes	Yes	Yes	Yes	Yes	No

12.4 Low Power Transmitters SAR Consideration

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation for low power transmitters is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\frac{(\text{max. power of channel, including tune – up tolerance, mW})}{(\text{min. test separation distance, mm})} \times \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Where:

- Frequency (GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

According to the KDB447498 appendix A, the SAR test exclusion threshold for 2450MHz at 5mm test separation distances is 10mW. That means the transmitters with tune-up power below 10mW are excluded for SAR measurement. SAR test exclusion for NFC separation $< 50\text{mm} = [474 \times (1 + \log(100/f_{\text{(MHz)}}))] / 2 = 443$ mW, the maximum tune up of NFC is -23.00 dBm(0.005mW), NFC can be exempted.

According to RSS 102 issue5 section 2.5.1 Exemption Limits for Routine Evaluation – SAR Evaluation, BT standalone SAR are required, because tune up output power is greater than 4mW, the maximum tune up of NFC(-23.00 dBm(0.005mW)) is below 71 mW, NFC can be exempted.

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤ 5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤ 300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

12.5 Simultaneous Transmission Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SPLSR (SAR to Peak Location Ratio) between pairs of simultaneously transmitting antennas:

$$\text{SPLSR} = \sqrt{(\text{SAR1} + \text{SAR2})^3 / R_i}$$

Where:

- SAR1 is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition.
- SAR2 is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first.
- R_i is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of

$$(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2$$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$\sqrt{(\text{SAR1} + \text{SAR2})^3 / R_i} < 0.04$$

12.6 Simultaneous Transmission Table

Table 12.6-1: Simultaneous Transmission Configurations

Items	Capable Transmit Configurations
1	GPRS + BT
2	GPRS + Wi-Fi 2.4G
3	GPRS + Wi-Fi 5G
4	WCDMA + BT
5	WCDMA+ Wi-Fi 2.4G
6	WCDMA+ Wi-Fi 5G
7	LTE + BT
8	LTE + Wi-Fi 2.4G
9	LTE + Wi-Fi 5G
NOTE: For the DUT, the Wi-Fi and BT modules sharing a single antenna, and so these two modules can't transmit signal simultaneously. GSM/WCDMA/LTE modules sharing a single antenna, so these two modules can't transmit signal simultaneously. So we can get following combination that can transmit signal simultaneously.	

13 Conducted Output Power

13.1 Power Reduction Procedures

The device use the proximity sensor detection for SAR compliance.

The sensors can identify and facilitate triggering different max power levels for different scenarios different exposure test positions (Front side/Back side/Bottom side) when the device is closed to a user's body.

Table 13.1-1:WWAN power reduction table

Main Antenna				
Band	Mode	Full Power (Tune Up)dBm	Power Reduction(dB)	
			Body-worn&hotspot&Limb	
			Sensor off	Sensor on
GSM850	GPRS 1TS	33.50	0.00	0.00
	GPRS 2TS	32.00	0.00	0.00
	GPRS 3TS	30.00	0.00	0.00
	GPRS 4TS	29.00	0.00	0.00
GSM1900	GPRS 1TS	31.50	0.00	6.50
	GPRS 2TS	30.50	0.00	5.50
	GPRS 3TS	28.50	0.00	3.50
	GPRS 4TS	27.50	0.00	2.50
WCDMA Band II	RMC	24.00	0.00	7.50
WCDMA Band IV	RMC	23.00	0.00	6.50
WCDMA Band V	RMC	24.00	0.00	0.00
LTE Band 2	QPSK	23.50	0.00	8.00
LTE Band 4	QPSK	22.50	0.00	9.50
LTE Band 5	QPSK	23.50	0.00	0.00
LTE Band 7	QPSK	22.50	0.00	1.00
LTE Band 12	QPSK	23.50	0.00	0.00
LTE Band 17	QPSK	23.50	0.00	0.00
LTE Band 25	QPSK	23.50	0.00	8.00
LTE Band 26	QPSK	23.50	0.00	0.00
LTE Band 38	QPSK	24.00	0.00	4.00
LTE Band 41	QPSK	24.00	0.00	4.00
LTE Band 66	QPSK	22.50	0.00	9.50

13.2 GSM Measurement result

Table 13.2-1: The conducted power measurement results for GSM850

GSM			GSM850								
Model	Modulation	Time Slot	Tune up (dBm)	Measure Power(dBm)			Devision Factor (dB)	Tune up Max	Average Power(dBm)		
				128	190	251			128	190	251
GPRS	GMSK	1 Tx	33.50	32.54	32.73	32.83	-9.03	24.47	23.51	23.70	23.80
		2 Tx	32.00	31.44	31.62	31.70	-6.02	25.98	25.42	25.60	25.68
		3 Tx	30.00	29.33	29.49	29.63	-4.26	25.74	25.07	25.23	25.37
		4 Tx	29.00	28.14	28.35	28.49	-3.01	25.99	25.13	25.34	25.48

Table 13.2-2: The conducted power measurement results for GSM1900

Full power&Sensor off											
GSM			GSM1900								
Model	Modulation	Time Slot	Tune up (dBm)	Measure Power(dBm)			Devison Factor (dB)	Tune up Max	Average Power(dBm)		
				512	661	810			512	661	810
GPRS	GMSK	1 Tx	31.50	30.43	31.09	31.13	-9.03	22.47	21.40	22.06	22.10
		2 Tx	30.50	29.46	30.11	30.09	-6.02	24.48	23.44	24.09	24.07
		3 Tx	28.50	27.41	28.02	28.05	-4.26	24.24	23.15	23.76	23.79
		4 Tx	27.50	26.22	26.87	26.84	-3.01	24.49	23.21	23.86	23.83
Sensor on											
GSM			GSM1900								
Model	Modulation	Time Slot	Tune up (dBm)	Measure Power(dBm)			Devison Factor (dB)	Tune up Max	Average Power(dBm)		
				512	661	810			512	661	810
GPRS	GMSK	1 Tx	25.00	24.12	24.26	24.24	-9.03	15.97	15.09	15.23	15.21
		2 Tx	25.00	24.08	24.20	24.20	-6.02	18.98	18.06	18.18	18.18
		3 Tx	25.00	24.03	24.10	24.08	-4.26	20.74	19.77	19.84	19.82
		4 Tx	25.00	24.00	24.07	24.04	-3.01	21.99	20.99	21.06	21.03

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots for GSM850 and 4Txslots for GSM1900.

13.3 WCDMA Measurement result

Table 13.3-1: The conducted power for WCDMA Band II

Full power&Sensor off					
WCDMA Band II		Maximum Conducted Power (dBm)			
Mode	Test Mode	Tune up	Channel		
			9262	9400	9538
WCDMA	RMC	24.00	23.03	23.26	23.79
HSDPA	Subtest1	23.50	22.57	22.84	23.35
	Subtest2	23.50	22.57	22.62	23.29
	Subtest3	23.50	22.07	22.42	22.93
	Subtest4	23.00	22.17	22.12	22.77
HSUPA	Subtest1	23.50	22.49	22.62	23.13
	Subtest2	23.00	21.37	21.78	22.21
	Subtest3	23.50	22.07	22.28	22.75
	Subtest4	22.50	21.61	21.64	22.19
	Subtest5	23.50	22.61	22.90	23.15

Sensor on					
WCDMA Band II		Maximum Conducted Power (dBm)			
Mode	Test Mode	Tune up	Channel		
			9262	9400	9538
WCDMA	RMC	16.50	16.05	16.15	16.34
HSDPA	Subtest1	16.50	15.59	15.75	15.94
	Subtest2	16.50	15.41	15.51	15.80
	Subtest3	16.50	14.97	15.09	15.24
	Subtest4	16.50	14.99	15.11	15.40
HSUPA	Subtest1	16.50	15.55	15.69	15.76
	Subtest2	16.50	14.67	14.65	14.94
	Subtest3	16.50	15.17	15.31	15.28
	Subtest4	16.50	14.65	14.59	14.88
	Subtest5	16.50	15.51	15.77	15.76

Table 13.3-2: The conducted power for WCDMA Band IV

Full power&Sensor off					
WCDMA BandIV		Maximum Conducted Power (dBm)			
Mode	Test Mode	Tune up	Channel		
			1312	1413	1513
WCDMA	RMC	23.00	22.79	22.67	22.50
HSDPA	Subtest1	22.50	22.31	22.33	22.02
	Subtest2	22.50	22.25	22.07	22.00
	Subtest3	22.50	21.93	21.71	21.54
	Subtest4	22.50	21.81	21.67	21.42
HSUPA	Subtest1	22.50	22.31	22.05	21.88
	Subtest2	22.00	21.31	21.01	21.14
	Subtest3	22.50	21.91	21.79	21.36
	Subtest4	22.00	21.41	21.17	21.06
	Subtest5	22.50	22.23	22.29	22.12
Sensor on					
WCDMA BandIV		Maximum Conducted Power (dBm)			
Mode	Test Mode	Tune up	Channel		
			1312	1413	1513
WCDMA	RMC	16.50	16.04	16.11	16.12
HSDPA	Subtest1	16.00	15.52	15.59	15.48
	Subtest2	16.00	15.62	15.57	15.76
	Subtest3	15.50	15.18	15.11	14.98
	Subtest4	15.50	15.18	15.23	15.02
HSUPA	Subtest1	16.00	15.40	15.57	15.78
	Subtest2	15.00	14.42	14.45	14.58
	Subtest3	15.50	15.12	15.15	15.04
	Subtest4	15.00	14.62	14.61	14.66
	Subtest5	16.00	15.48	15.55	15.48

Table 13.3-3: The conducted power for WCDMA Band V

Full power&Sensor off					
WCDMA Band V		Maximum Conducted Power (dBm)			
Mode	Test Mode	Tune up	Channel		
			4132	4183	4233
WCDMA	RMC	24.00	23.31	23.41	23.52
HSDPA	Subtest1	23.50	22.81	22.77	22.94
	Subtest2	23.50	22.77	22.99	22.98
	Subtest3	23.00	22.31	22.29	22.54
	Subtest4	23.00	22.33	22.29	22.42
HSUPA	Subtest1	23.50	22.75	22.87	23.06
	Subtest2	22.50	21.69	21.85	22.08
	Subtest3	23.00	22.19	22.37	22.62
	Subtest4	22.50	21.71	21.79	21.98
	Subtest5	23.50	22.89	23.07	23.18

13.4 LTE Measurement result

Table 13.4-1: The conducted power for LTE Band 2

Full power&Sensor off						
LTE Band 2			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				18607	18900	19193
QPSK	1	Low	23.50	22.08	22.35	22.54
		Middle		22.54	22.81	22.79
		High		22.30	22.48	22.69
	50%	Low	23.50	22.42	22.67	22.60
		Middle		22.34	22.56	22.64
		High		22.43	22.60	22.66
	100%	/	22.50	21.46	21.64	21.75
16QAM	1	Low	22.50	21.74	21.61	21.56
		Middle		21.72	21.68	21.62
		High		21.75	21.73	21.65
	50%	Low	22.50	21.46	21.49	21.53
		Middle		21.55	21.53	21.48
		High		21.64	21.59	21.55
	100%	/	21.50	20.66	20.60	20.68
Modulation	RB	RB Offset	Tune up	3MHz		
				18615	18900	19185
QPSK	1	Low	23.50	22.10	22.39	22.57
		Middle		22.52	22.84	22.83
		High		22.33	22.53	22.73
	50%	Low	22.50	21.52	21.79	21.73
		Middle		21.46	21.66	21.76
		High		21.53	21.71	21.76
	100%	/	22.50	21.46	21.68	21.78
16QAM	1	Low	22.50	21.77	21.63	21.59
		Middle		21.75	21.68	21.66
		High		21.77	21.77	21.68
	50%	Low	21.50	20.57	20.62	20.65
		Middle		20.66	20.66	20.60
		High		20.74	20.71	20.68
	100%	/	21.50	20.69	20.64	20.71
Modulation	RB	RB Offset	Tune up	5MHz		
				18625	18900	19175
QPSK	1	Low	23.50	22.07	22.37	22.53
		Middle		22.50	22.80	22.80
		High		22.30	22.48	22.69

	50%	Low	22.50	21.49	21.74	21.69
		Middle		21.44	21.62	21.71
		High		21.51	21.69	21.72
	100%	/	22.50	21.46	21.67	21.76
16QAM	1	Low	22.50	21.74	21.59	21.56
		Middle		21.72	21.66	21.63
		High		21.74	21.75	21.64
	50%	Low	21.50	20.55	20.58	20.62
		Middle		20.63	20.61	20.56
		High		20.71	20.66	20.64
	100%	/	21.50	20.67	20.60	20.66
Modulation	RB	RB Offset	Tune up	10MHz		
				18650	18900	19150
QPSK	1	Low	23.50	22.09	22.38	22.56
		Middle		22.53	22.85	22.84
		High		22.32	22.52	22.72
	50%	Low	22.50	21.52	21.79	21.73
		Middle		21.47	21.67	21.75
		High		21.53	21.73	21.77
	100%	/	22.50	21.50	21.69	21.80
16QAM	1	Low	22.50	21.76	21.62	21.58
		Middle		21.75	21.70	21.66
		High		21.77	21.77	21.67
	50%	Low	21.50	20.58	20.63	20.66
		Middle		20.65	20.65	20.59
		High		20.74	20.71	20.68
	100%	/	21.50	20.70	20.65	20.70
Modulation	RB	RB Offset	Tune up	15MHz		
				18675	18900	19125
QPSK	1	Low	23.50	22.08	22.34	22.54
		Middle		22.51	22.84	22.81
		High		22.29	22.47	22.68
	50%	Low	22.50	21.50	21.75	21.70
		Middle		21.44	21.62	21.71
		High		21.50	21.70	21.73
	100%	/	22.50	21.48	21.65	21.75
16QAM	1	Low	22.50	21.71	21.60	21.56
		Middle		21.73	21.67	21.64
		High		21.74	21.73	21.64
	50%	Low	21.50	20.55	20.61	20.63
		Middle		20.62	20.60	20.55
		High		20.72	20.67	20.65

	100%	/	21.50	20.67	20.60	20.66
Modulation	RB	RB Offset	Tune up	20MHz		
				18700	18900	19100
QPSK	1	Low	23.50	22.05	22.30	22.51
		Middle		22.50	22.80	22.79
		High		22.27	22.46	22.65
	50%	Low	22.50	21.47	21.70	21.66
		Middle		21.42	21.58	21.68
		High		21.47	21.65	21.69
	100%	/	22.50	21.45	21.60	21.71
16QAM	1	Low	22.50	21.62	21.56	21.51
		Middle		21.69	21.65	21.60
		High		21.72	21.70	21.62
	50%	Low	21.50	20.52	20.57	20.60
		Middle		20.59	20.58	20.52
		High		20.69	20.62	20.61
	100%	/	21.50	20.65	20.56	20.63
Sensor on						
LTE Band 2			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				18607	18900	19193
QPSK	1	Low	15.50	14.55	14.49	14.52
		Middle		14.69	14.88	14.82
		High		14.30	14.34	14.51
	50%	Low	15.50	14.72	14.86	14.79
		Middle		14.60	14.66	14.81
		High		14.60	14.76	14.72
	100%	/	15.50	14.58	14.70	14.74
16QAM	1	Low	15.50	14.81	14.72	14.71
		Middle		14.83	14.60	14.78
		High		14.72	14.66	14.71
	50%	Low	15.50	14.66	14.79	14.75
		Middle		14.78	14.63	14.68
		High		14.58	14.77	14.61
	100%	/	15.50	14.62	14.68	14.67
Modulation	RB	RB Offset	Tune up	3MHz		
				18615	18900	19185
QPSK	1	Low	15.50	14.63	14.59	14.61
		Middle		14.78	14.93	14.91
		High		14.41	14.48	14.62
	50%	Low	15.50	14.80	14.94	14.87
		Middle		14.69	14.75	14.92

	100%	High		14.69	14.81	14.80
		/	15.50	14.62	14.77	14.82
16QAM	1	Low	15.50	14.92	14.80	14.78
		Middle		14.90	14.68	14.85
		High		14.82	14.76	14.82
	50%	Low	15.50	14.74	14.85	14.83
		Middle		14.88	14.76	14.79
		High		14.66	14.85	14.69
	100%	/	15.50	14.71	14.77	14.78
Modulation	RB	RB Offset	Tune up	5MHz		
				18625	18900	19175
QPSK	1	Low	15.50	14.60	14.57	14.57
		Middle		14.76	14.89	14.88
		High		14.38	14.43	14.58
	50%	Low	15.50	14.77	14.89	14.83
		Middle		14.67	14.71	14.87
		High		14.67	14.79	14.76
	100%	/	15.50	14.62	14.76	14.80
16QAM	1	Low	15.50	14.89	14.76	14.75
		Middle		14.87	14.66	14.82
		High		14.79	14.74	14.78
	50%	Low	15.50	14.72	14.81	14.80
		Middle		14.85	14.71	14.75
		High		14.63	14.80	14.65
	100%	/	15.50	14.69	14.73	14.73
Modulation	RB	RB Offset	Tune up	10MHz		
				18650	18900	19150
QPSK	1	Low	15.50	14.62	14.58	14.60
		Middle		14.79	14.94	14.92
		High		14.40	14.47	14.61
	50%	Low	15.50	14.80	14.94	14.87
		Middle		14.70	14.76	14.91
		High		14.69	14.83	14.81
	100%	/	15.50	14.66	14.78	14.84
16QAM	1	Low	15.50	14.91	14.79	14.77
		Middle		14.90	14.70	14.85
		High		14.82	14.76	14.81
	50%	Low	15.50	14.75	14.86	14.84
		Middle		14.87	14.75	14.78
		High		14.66	14.85	14.69
	100%	/	15.50	14.72	14.78	14.77
Modulation	RB	RB Offset	Tune up	15MHz		

				18675	18900	19125
QPSK	1	Low	15.50	14.61	14.54	14.58
		Middle		14.77	14.93	14.89
		High		14.37	14.42	14.57
	50%	Low	15.50	14.78	14.90	14.84
		Middle		14.67	14.71	14.87
		High		14.66	14.80	14.77
	100%	/	15.50	14.64	14.74	14.79
16QAM	1	Low	15.50	14.86	14.77	14.75
		Middle		14.88	14.67	14.83
		High		14.79	14.72	14.78
	50%	Low	15.50	14.72	14.84	14.81
		Middle		14.84	14.70	14.74
		High		14.64	14.81	14.66
	100%	/	15.50	14.69	14.73	14.73
Modulation	RB	RB Offset	Tune up	20MHz		
				18700	18900	19100
QPSK	1	Low	15.50	14.58	14.50	14.55
		Middle		14.76	14.89	14.87
		High		14.35	14.41	14.54
	50%	Low	15.50	14.75	14.85	14.80
		Middle		14.65	14.67	14.84
		High		14.63	14.75	14.73
	100%	/	15.50	14.61	14.69	14.75
16QAM	1	Low	15.50	14.63	14.73	14.70
		Middle		14.84	14.65	14.79
		High		14.77	14.69	14.76
	50%	Low	15.50	14.69	14.80	14.78
		Middle		14.81	14.68	14.71
		High		14.61	14.76	14.62
	100%	/	15.50	14.67	14.69	14.70

Table 13.4-2: The conducted power for LTE Band 4

Full power&Sensor off						
LTE Band 4			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				19957	20175	20393
QPSK	1	Low	22.50	22.06	21.96	21.72
		Middle		22.18	22.16	21.73
		High		21.66	21.47	21.32
	50%	Low	22.50	21.99	22.02	21.86

		Middle		21.95	21.97	21.71
		High		21.95	21.70	21.59
	100%	/	21.50	21.07	20.94	20.71
16QAM	1	Low	21.50	21.14	20.98	20.92
		Middle		21.12	21.16	20.78
		High		20.79	20.92	20.77
	50%	Low	21.50	21.05	21.00	20.80
		Middle		20.94	20.90	20.63
		High		20.95	20.79	20.46
	100%	/	20.50	20.00	19.84	19.73
Modulation	RB	RB Offset	Tune up	3MHz		
				19965	20175	20385
QPSK	1	Low	22.50	22.08	22.00	21.75
		Middle		22.16	22.19	21.77
		High		21.69	21.52	21.36
	50%	Low	21.50	21.09	21.14	20.99
		Middle		21.07	21.07	20.83
		High		21.05	20.81	20.69
	100%	/	21.50	21.07	20.98	20.74
16QAM	1	Low	21.50	21.17	21.00	20.95
		Middle		21.15	21.16	20.82
		High		20.81	20.96	20.80
	50%	Low	20.50	20.16	20.13	19.92
		Middle		20.05	20.03	19.75
		High		20.05	19.91	19.59
	100%	/	20.50	20.03	19.88	19.76
Modulation	RB	RB Offset	Tune up	5MHz		
				19975	20175	20375
QPSK	1	Low	22.50	22.05	21.98	21.71
		Middle		22.14	22.15	21.74
		High		21.66	21.47	21.32
	50%	Low	21.50	21.06	21.09	20.95
		Middle		21.05	21.03	20.78
		High		21.03	20.79	20.65
	100%	/	21.50	21.07	20.97	20.72
16QAM	1	Low	21.50	21.14	20.96	20.92
		Middle		21.12	21.14	20.79
		High		20.78	20.94	20.76
	50%	Low	20.50	20.14	20.09	19.89
		Middle		20.02	19.98	19.71
		High		20.02	19.86	19.55
	100%	/	20.50	20.01	19.84	19.71

Modulation	RB	RB Offset	Tune up	10MHz		
				20000	20175	20350
QPSK	1	Low	22.50	22.07	21.99	21.74
		Middle		22.17	22.20	21.78
		High		21.68	21.51	21.35
	50%	Low	21.50	21.09	21.14	20.99
		Middle		21.08	21.08	20.82
		High		21.05	20.83	20.70
	100%	/	21.50	21.11	20.99	20.76
16QAM	1	Low	21.50	21.16	20.99	20.94
		Middle		21.15	21.18	20.82
		High		20.81	20.96	20.79
	50%	Low	20.50	20.17	20.14	19.93
		Middle		20.04	20.02	19.74
		High		20.05	19.91	19.59
	100%	/	20.50	20.04	19.89	19.75
Modulation	RB	RB Offset	Tune up	15MHz		
				20025	20175	20325
QPSK	1	Low	22.50	22.06	21.95	21.72
		Middle		22.15	22.19	21.75
		High		21.65	21.46	21.31
	50%	Low	21.50	21.07	21.10	20.96
		Middle		21.05	21.03	20.78
		High		21.02	20.80	20.66
	100%	/	21.50	21.09	20.95	20.71
16QAM	1	Low	21.50	21.11	20.97	20.92
		Middle		21.13	21.15	20.80
		High		20.78	20.92	20.76
	50%	Low	20.50	20.14	20.12	19.90
		Middle		20.01	19.97	19.70
		High		20.03	19.87	19.56
	100%	/	20.50	20.01	19.84	19.71
Modulation	RB	RB Offset	Tune up	20MHz		
				20050	20175	20300
QPSK	1	Low	22.50	22.03	21.91	21.69
		Middle		22.14	22.15	21.73
		High		21.63	21.45	21.28
	50%	Low	21.50	21.04	21.05	20.92
		Middle		21.03	20.99	20.75
		High		20.99	20.75	20.62
	100%	/	21.50	21.06	20.90	20.67
16QAM	1	Low	21.50	21.13	20.93	20.87

		Middle		21.09	21.13	20.76
		High		20.76	20.89	20.74
	50%	Low	20.50	20.11	20.08	19.87
		Middle		19.98	19.95	19.67
		High		20.00	19.82	19.52
	100%	/	20.50	19.99	19.80	19.68
Sensor on						
LTE Band 4			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				19957	20175	20393
QPSK	1	Low	13.00	12.35	12.18	12.19
		Middle		12.53	12.60	12.22
		High		12.03	11.89	11.85
	50%	Low	13.00	12.41	12.47	12.32
		Middle		12.40	12.33	12.22
		High		12.33	12.27	12.08
	100%	/	13.00	12.42	12.35	12.13
16QAM	1	Low	13.00	12.27	12.22	12.14
		Middle		12.29	12.28	12.25
		High		12.22	12.29	12.25
	50%	Low	13.00	12.11	12.23	12.21
		Middle		12.19	12.16	12.19
		High		12.26	12.23	12.19
	100%	/	13.00	12.28	12.25	12.31
Modulation	RB	RB Offset	Tune up	3MHz		
				19965	20175	20385
QPSK	1	Low	13.00	12.42	12.25	12.22
		Middle		12.61	12.64	12.30
		High		12.13	12.02	12.10
	50%	Low	13.00	12.48	12.54	12.39
		Middle		12.48	12.32	12.32
		High		12.41	12.30	12.15
	100%	/	13.00	12.45	12.41	12.20
16QAM	1	Low	13.00	12.37	12.29	12.20
		Middle		12.35	12.35	12.29
		High		12.32	12.37	12.35
	50%	Low	13.00	12.18	12.28	12.28
		Middle		12.28	12.28	12.29
		High		12.33	12.22	12.26
	100%	/	13.00	12.36	12.41	12.38
Modulation	RB	RB Offset	Tune up	5MHz		
				19975	20175	20375

QPSK	1	Low	13.00	12.39	12.23	12.18
		Middle		12.59	12.60	12.27
		High		12.10	11.97	11.91
	50%	Low	13.00	12.45	12.49	12.35
		Middle		12.46	12.37	12.27
		High		12.39	12.28	12.11
	100%	/	13.00	12.45	12.40	12.18
16QAM	1	Low	13.00	12.34	12.25	12.17
		Middle		12.32	12.33	12.26
		High		12.29	12.35	12.31
	50%	Low	13.00	12.16	12.24	12.25
		Middle		12.25	12.23	12.25
		High		12.30	12.25	12.22
	100%	/	13.00	12.34	12.37	12.39
Modulation	RB	RB Offset	Tune up	10MHz		
				20000	20175	20350
QPSK	1	Low	13.00	12.41	12.24	12.21
		Middle		12.62	12.61	12.31
		High		12.12	12.01	11.94
	50%	Low	13.00	12.48	12.54	12.39
		Middle		12.50	12.37	12.31
		High		12.41	12.32	12.16
	100%	/	13.00	12.49	12.42	12.22
16QAM	1	Low	13.00	12.36	12.28	12.21
		Middle		12.35	12.37	12.29
		High		12.32	12.37	12.34
	50%	Low	13.00	12.19	12.32	12.29
		Middle		12.27	12.27	12.28
		High		12.33	12.30	12.26
	100%	/	13.00	12.37	12.42	12.43
Modulation	RB	RB Offset	Tune up	15MHz		
				20025	20175	20325
QPSK	1	Low	13.00	12.32	12.14	12.16
		Middle		12.52	12.56	12.20
		High		12.01	11.88	11.82
	50%	Low	13.00	12.38	12.42	12.28
		Middle		12.38	12.29	12.19
		High		12.30	12.22	12.04
	100%	/	13.00	12.39	12.30	12.09
16QAM	1	Low	13.00	12.19	12.18	12.09
		Middle		12.25	12.26	12.21
		High		12.20	12.26	12.23

	50%	Low	13.00	12.08	12.19	12.18
		Middle		12.16	12.14	12.16
		High		12.23	12.18	12.15
	100%	/	13.00	12.26	12.21	12.28
Modulation	RB	RB Offset	Tune up	20MHz		
				20050	20175	20300
QPSK	1	Low	13.00	12.37	12.16	12.16
		Middle		12.59	12.60	12.26
		High		12.07	11.95	11.87
	50%	Low	13.00	12.43	12.45	12.32
		Middle		12.44	12.33	12.24
		High		12.35	12.24	12.08
	100%	/	13.00	12.44	12.33	12.13
16QAM	1	Low	13.00	12.28	12.22	12.12
		Middle		12.29	12.32	12.23
		High		12.27	12.30	12.29
	50%	Low	13.00	12.13	12.23	12.23
		Middle		12.21	12.20	12.21
		High		12.28	12.21	12.19
	100%	/	13.00	12.32	12.33	12.36

Table 13.4-3: The conducted power for LTE Band 5

Full power&Sensor off						
LTE Band 5			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				20407	20525	20643
QPSK	1	Low	23.50	22.26	22.45	22.39
		Middle		22.45	22.45	22.41
		High		22.36	22.39	22.39
	50%	Low	23.50	22.35	22.52	22.37
		Middle		22.28	22.47	22.48
		High		22.42	22.38	22.42
	100%	/	22.50	21.47	21.45	21.46
16QAM	1	Low	22.50	21.49	21.37	21.54
		Middle		21.47	21.51	21.42
		High		21.38	21.32	21.40
	50%	Low	22.50	21.38	21.41	21.40
		Middle		21.37	21.46	21.50
		High		21.37	21.43	21.42
	100%	/	21.50	20.50	20.56	20.49
Modulation	RB	RB Offset	Tune up	3MHz		

				20415	20525	20635
QPSK	1	Low	23.50	22.27	22.48	22.41
		Middle		22.44	22.49	22.46
		High		22.38	22.43	22.42
	50%	Low	22.50	21.45	21.64	21.50
		Middle		21.41	21.58	21.59
		High		21.52	21.51	21.53
	100%	/	22.50	21.51	21.50	21.51
16QAM	1	Low	22.50	21.51	21.38	21.56
		Middle		21.50	21.53	21.46
		High		21.40	21.36	21.42
	50%	Low	21.50	20.50	20.55	20.53
		Middle		20.47	20.58	20.61
		High		20.47	20.55	20.55
	100%	/	21.50	20.54	20.61	20.51
Modulation	RB	RB Offset	Tune up	5MHz		
				20425	20525	20625
QPSK	1	Low	23.50	22.26	22.44	22.39
		Middle		22.42	22.48	22.43
		High		22.35	22.38	22.38
	50%	Low	22.50	21.43	21.60	21.47
		Middle		21.38	21.53	21.55
		High		21.49	21.48	21.49
	100%	/	22.50	21.49	21.46	21.46
16QAM	1	Low	22.50	21.46	21.36	21.54
		Middle		21.48	21.50	21.44
		High		21.37	21.32	21.39
	50%	Low	21.50	20.47	20.53	20.50
		Middle		20.44	20.53	20.57
		High		20.45	20.51	20.52
	100%	/	21.50	20.51	20.56	20.47
Modulation	RB	RB Offset	Tune up	10MHz		
				20450	20525	20600
QPSK	1	Low	23.50	22.23	22.40	22.36
		Middle		22.41	22.44	22.41
		High		22.33	22.37	22.35
	50%	Low	22.50	21.40	21.55	21.43
		Middle		21.36	21.49	21.52
		High		21.46	21.43	21.45
	100%	/	22.50	21.46	21.41	21.42
16QAM	1	Low	22.50	21.40	21.32	21.49
		Middle		21.44	21.48	21.40

	50%	High	21.50	21.35	21.29	21.37
		Low		20.44	20.49	20.47
		Middle		20.41	20.51	20.54
		High		20.42	20.46	20.48
	100%	/	21.50	20.49	20.52	20.44

Table 13.4-4: The conducted Power for LTE Band 7

Full power&Sensor off						
LTE Band 7			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	5MHz		
				20775	21100	21425
QPSK	1	Low	23.00	21.94	21.65	21.69
		Middle		22.04	21.94	22.13
		High		21.85	21.72	22.02
	50%	Low	22.00	21.12	20.86	21.15
		Middle		21.05	20.94	21.05
		High		21.13	20.96	21.06
	100%	/	22.00	21.02	20.90	21.05
16QAM	1	Low	22.00	20.91	20.72	20.75
		Middle		20.89	20.99	20.85
		High		20.92	20.87	20.82
	50%	Low	21.00	19.77	19.73	19.72
		Middle		19.90	19.85	19.78
		High		19.84	19.90	19.74
	100%	/	21.00	19.82	19.93	19.82
Modulation	RB	RB Offset	Tune up	10MHz		
				20800	21100	21400
QPSK	1	Low	23.00	21.96	21.66	21.72
		Middle		22.07	21.99	22.17
		High		21.87	21.76	22.05
	50%	Low	22.00	21.15	20.91	21.19
		Middle		21.08	20.99	21.09
		High		21.15	21.00	21.11
	100%	/	22.00	21.06	20.92	21.09
16QAM	1	Low	22.00	20.93	20.75	20.77
		Middle		20.92	21.03	20.88
		High		20.95	20.89	20.85
	50%	Low	21.00	19.80	19.78	19.76
		Middle		19.92	19.89	19.81
		High		19.87	19.95	19.78
	100%	/	21.00	19.85	19.98	19.86

Modulation	RB	RB Offset	Tune up	15MHz		
				20825	21100	21375
QPSK	1	Low	23.00	21.95	21.62	21.70
		Middle		22.05	21.98	22.14
		High		21.84	21.71	22.01
	50%	Low	22.00	21.13	20.87	21.16
		Middle		21.05	20.94	21.05
		High		21.12	20.97	21.07
	100%	/	22.00	21.04	20.88	21.04
16QAM	1	Low	22.00	20.88	20.73	20.75
		Middle		20.90	21.00	20.86
		High		20.92	20.85	20.82
	50%	Low	21.00	19.77	19.76	19.73
		Middle		19.89	19.84	19.77
		High		19.85	19.91	19.75
	100%	/	21.00	19.82	19.93	19.82
Modulation	RB	RB Offset	Tune up	20MHz		
				20850	21100	21350
QPSK	1	Low	22.50	21.92	21.58	21.67
		Middle		22.04	21.94	22.12
		High		21.82	21.70	21.98
	50%	Low	21.50	21.10	20.82	21.12
		Middle		21.03	20.90	21.02
		High		21.09	20.92	21.03
	100%	/	21.50	21.01	20.83	21.00
16QAM	1	Low	21.50	20.82	20.69	20.70
		Middle		20.86	20.98	20.82
		High		20.90	20.82	20.80
	50%	Low	20.50	19.74	19.72	19.70
		Middle		19.86	19.82	19.74
		High		19.82	19.86	19.71
	100%	/	20.50	19.80	19.89	19.79
Sensor on						
LTE Band 7			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	5MHz		
				20775	21100	21425
QPSK	1	Low	21.50	19.61	19.98	19.56
		Middle		20.43	20.32	20.45
		High		19.88	19.96	19.82
	50%	Low	21.00	20.12	20.16	20.24
		Middle		20.19	20.22	19.90
		High		20.19	20.21	20.01

	100%	/	21.00	20.04	20.18	19.92
16QAM	1	Low	21.00	19.99	19.87	19.97
		Middle		19.97	20.20	20.13
		High		19.99	20.11	19.91
	50%	Low	21.00	19.78	20.15	19.83
		Middle		19.91	20.30	19.92
		High		19.82	20.26	19.88
	100%	/	21.00	19.89	20.13	19.92
Modulation	RB	RB Offset	Tune up	10MHz		
				20800	21100	21400
QPSK	1	Low	21.50	19.60	19.97	19.50
		Middle		20.46	20.37	20.49
		High		19.90	20.00	19.85
	50%	Low	21.00	20.15	20.21	20.28
		Middle		20.22	20.27	19.94
		High		20.21	20.25	20.06
	100%	/	21.00	20.08	20.20	19.96
16QAM	1	Low	21.00	20.01	19.87	19.99
		Middle		20.00	20.24	20.16
		High		20.02	20.13	19.94
	50%	Low	21.00	19.81	20.20	19.87
		Middle		19.93	20.30	19.95
		High		19.85	20.31	19.92
	100%	/	21.00	19.92	20.21	19.94
Modulation	RB	RB Offset	Tune up	15MHz		
				20825	21100	21375
QPSK	1	Low	21.50	19.59	19.93	19.48
		Middle		20.44	20.36	20.46
		High		19.87	19.95	19.81
	50%	Low	21.00	20.13	20.17	20.25
		Middle		20.19	20.22	19.90
		High		20.18	20.22	20.02
	100%	/	21.00	20.06	20.16	19.91
16QAM	1	Low	21.00	19.96	19.92	19.97
		Middle		20.00	20.21	20.11
		High		19.99	20.09	19.91
	50%	Low	21.00	19.78	20.18	19.84
		Middle		19.96	20.25	19.91
		High		19.90	20.31	19.89
	100%	/	21.00	19.89	20.16	19.90
Modulation	RB	RB Offset	Tune up	20MHz		
				20850	21100	21350

QPSK	1	Low	21.50	19.56	19.89	19.45
		Middle		20.43	20.44	20.32
		High		19.85	19.94	19.78
	50%	Low	21.00	20.10	20.21	20.12
		Middle		20.17	20.18	19.87
		High		20.15	20.17	19.98
	100%	/	21.00	20.03	20.11	19.87
16QAM	1	Low	21.00	19.98	19.81	19.92
		Middle		19.94	20.19	20.10
		High		19.97	20.06	19.89
	50%	Low	21.00	19.75	20.14	19.81
		Middle		19.87	20.23	19.88
		High		19.80	20.22	19.85
	100%	/	21.00	19.87	20.12	19.87

Table 13.4-5: The conducted Power for LTE Band 12

Full power&Sensor off						
LTE Band 12			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				23017	23095	23173
QPSK	1	Low	23.50	22.01	22.04	22.06
		Middle		22.21	22.34	22.16
		High		22.08	22.08	22.11
	50%	Low	22.50	21.14	21.18	21.19
		Middle		21.13	21.15	21.17
		High		21.07	21.12	21.15
	100%	/	22.50	21.08	21.21	21.14
16QAM	1	Low	22.50	21.19	21.21	21.20
		Middle		21.17	21.17	21.15
		High		21.19	21.23	21.16
	50%	Low	21.50	20.08	20.08	20.18
		Middle		20.13	20.06	20.15
		High		20.14	20.08	20.18
	100%	/	21.50	20.11	20.07	20.10
Modulation	RB	RB Offset	Tune up	3MHz		
				23025	23095	23165
QPSK	1	Low	23.50	22.03	22.05	22.09
		Middle		22.24	22.31	22.20
		High		22.10	22.12	22.14
	50%	Low	22.50	21.17	21.18	21.17
		Middle		21.16	21.18	21.14

		High		21.09	21.16	21.17
	100%	/	22.50	21.12	21.23	21.18
16QAM	1	Low	22.50	21.21	21.24	21.22
		Middle		21.20	21.21	21.18
		High		21.22	21.25	21.19
	50%	Low	21.50	20.11	20.13	20.22
		Middle		20.15	20.10	20.18
		High		20.17	20.13	20.22
	100%	/	21.50	20.14	20.12	20.14
Modulation	RB	RB Offset	Tune up	5MHz		
				23035	23095	23155
QPSK	1	Low	23.50	22.02	22.01	22.07
		Middle		22.22	22.32	22.17
		High		22.07	22.07	22.10
	50%	Low	22.50	21.15	21.19	21.15
		Middle		21.13	21.18	21.17
		High		21.06	21.13	21.16
	100%	/	22.50	21.10	21.19	21.13
16QAM	1	Low	22.50	21.16	21.22	21.20
		Middle		21.18	21.18	21.16
		High		21.19	21.21	21.16
	50%	Low	21.50	20.08	20.11	20.19
		Middle		20.12	20.05	20.14
		High		20.15	20.09	20.19
	100%	/	21.50	20.11	20.07	20.10
Modulation	RB	RB Offset	Tune up	10MHz		
				23060	23095	23130
QPSK	1	Low	23.50	21.99	21.97	22.04
		Middle		22.21	22.34	22.15
		High		22.05	22.06	22.07
	50%	Low	22.50	21.12	21.14	21.16
		Middle		21.11	21.19	21.14
		High		21.03	21.08	21.12
	100%	/	22.50	21.07	21.14	21.09
16QAM	1	Low	22.50	21.11	21.18	21.15
		Middle		21.14	21.16	21.12
		High		21.17	21.18	21.14
	50%	Low	21.50	20.05	20.07	20.16
		Middle		20.09	20.03	20.11
		High		20.12	20.04	20.15
	100%	/	21.50	20.09	20.03	20.07

Table 13.4-6: The conducted Power for LTE Band 17

Full power&Sensor off						
LTE Band 17			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	5MHz		
				23755	23790	23825
QPSK	1	Low	23.50	22.44	22.62	22.49
		Middle		22.65	22.69	22.54
		High		22.55	22.56	22.54
	50%	Low	22.50	21.64	21.61	21.66
		Middle		21.57	21.62	21.52
		High		21.60	21.59	21.51
	100%	/	22.50	21.59	21.57	21.62
16QAM	1	Low	22.50	21.89	21.67	21.86
		Middle		21.91	21.99	21.94
		High		21.61	21.67	21.76
	50%	Low	21.50	20.51	20.58	20.48
		Middle		20.46	20.53	20.53
		High		20.43	20.54	20.48
	100%	/	21.50	20.52	20.63	20.55
Modulation	RB	RB Offset	Tune up	10MHz		
				23780	23790	23800
QPSK	1	Low	23.50	22.41	22.58	22.46
		Middle		22.64	22.65	22.52
		High		22.53	22.55	22.51
	50%	Low	22.50	21.61	21.56	21.62
		Middle		21.55	21.58	21.49
		High		21.57	21.54	21.47
	100%	/	22.50	21.56	21.52	21.58
16QAM	1	Low	22.50	21.70	21.63	21.81
		Middle		21.87	21.97	21.90
		High		21.59	21.64	21.74
	50%	Low	21.50	20.48	20.54	20.45
		Middle		20.43	20.51	20.50
		High		20.40	20.49	20.44
	100%	/	21.50	20.50	20.59	20.52

Table 13.4-7: The conducted Power for LTE Band 25

Full power&Sensor off				
LTE Band 25			Maximum Conducted Power (dBm)	
Modulation	RB	RB Offset	Tune up	1.4MHz

				26047	26365	26683
QPSK	1	Low	23.50	22.30	22.43	22.41
		Middle		22.64	22.65	22.57
		High		22.27	22.49	22.26
	50%	Low	23.50	22.48	22.61	22.58
		Middle		22.46	22.66	22.56
		High		22.53	22.60	22.52
	100%	/	22.50	21.55	21.57	21.54
16QAM	1	Low	22.50	21.55	21.60	21.59
		Middle		21.53	21.26	21.52
		High		21.43	21.29	21.48
	50%	Low	22.50	21.51	21.52	21.48
		Middle		21.45	21.50	21.50
		High		21.46	21.50	21.52
	100%	/	21.50	20.55	20.62	20.65
Modulation	RB	RB Offset	Tune up	3MHz		
				26055	26365	26675
QPSK	1	Low	23.50	22.32	22.47	22.44
		Middle		22.62	22.65	22.61
		High		22.30	22.54	22.30
	50%	Low	22.50	21.58	21.64	21.59
		Middle		21.58	21.66	21.67
		High		21.63	21.64	21.62
	100%	/	22.50	21.55	21.61	21.57
16QAM	1	Low	22.50	21.58	21.62	21.62
		Middle		21.56	21.26	21.56
		High		21.45	21.33	21.51
	50%	Low	21.50	20.62	20.65	20.60
		Middle		20.56	20.63	20.62
		High		20.56	20.62	20.65
	100%	/	21.50	20.58	20.66	20.68
Modulation	RB	RB Offset	Tune up	5MHz		
				26065	26365	26665
QPSK	1	Low	23.50	22.29	22.45	22.40
		Middle		22.60	22.69	22.58
		High		22.27	22.49	22.26
	50%	Low	22.50	21.55	21.65	21.67
		Middle		21.56	21.63	21.63
		High		21.61	21.64	21.58
	100%	/	22.50	21.55	21.60	21.55
16QAM	1	Low	22.50	21.55	21.58	21.59
		Middle		21.53	21.24	21.53

	50%	High	21.50	21.42	21.31	21.47
		Low		20.60	20.61	20.57
		Middle		20.53	20.58	20.58
		High		20.53	20.57	20.61
	100%	/	21.50	20.56	20.62	20.63
Modulation	RB	RB Offset	Tune up	10MHz		
				26090	26365	26640
QPSK	1	Low	23.50	22.31	22.46	22.43
		Middle		22.63	22.69	22.62
		High		22.29	22.53	22.29
	50%	Low	22.50	21.58	21.64	21.64
		Middle		21.59	21.61	21.67
		High		21.63	21.62	21.63
	100%	/	22.50	21.59	21.62	21.59
16QAM	1	Low	22.50	21.57	21.61	21.61
		Middle		21.56	21.28	21.56
		High		21.45	21.33	21.50
	50%	Low	21.50	20.63	20.66	20.61
		Middle		20.55	20.62	20.61
		High		20.56	20.62	20.65
	100%	/	21.50	20.59	20.67	20.67
Modulation	RB	RB Offset	Tune up	15MHz		
				26115	26365	26615
QPSK	1	Low	23.50	22.30	22.42	22.41
		Middle		22.61	22.68	22.59
		High		22.26	22.48	22.25
	50%	Low	22.50	21.56	21.65	21.67
		Middle		21.56	21.63	21.63
		High		21.60	21.63	21.59
	100%	/	22.50	21.57	21.58	21.54
16QAM	1	Low	22.50	21.52	21.59	21.59
		Middle		21.54	21.25	21.54
		High		21.42	21.29	21.47
	50%	Low	21.50	20.60	20.64	20.58
		Middle		20.52	20.57	20.57
		High		20.54	20.58	20.62
	100%	/	21.50	20.56	20.62	20.63
Modulation	RB	RB Offset	Tune up	20MHz		
				26140	26365	26590
QPSK	1	Low	23.50	22.27	22.38	22.38
		Middle		22.60	22.71	22.57
		High		22.24	22.47	22.22

	50%	Low	22.50	21.53	21.64	21.64
		Middle		21.54	21.68	21.60
		High		21.57	21.65	21.55
	100%	/	22.50	21.54	21.53	21.50
16QAM	1	Low	22.50	21.45	21.55	21.54
		Middle		21.50	21.23	21.50
		High		21.40	21.26	21.45
	50%	Low	21.50	20.57	20.60	20.55
		Middle		20.49	20.55	20.54
		High		20.51	20.53	20.58
	100%	/	21.50	20.54	20.58	20.60
Sensor on						
LTE Band 25			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				26047	26365	26683
QPSK	1	Low	15.50	14.05	14.20	14.18
		Middle		14.31	14.41	14.41
		High		13.93	14.05	14.10
	50%	Low	15.50	13.96	14.11	14.09
		Middle		14.29	14.43	14.39
		High		13.91	14.03	14.08
	100%	/	14.50	13.22	13.29	13.26
16QAM	1	Low	14.50	13.61	13.60	13.59
		Middle		13.63	13.64	13.64
		High		13.46	13.53	13.56
	50%	Low	14.50	13.61	13.60	13.59
		Middle		13.63	13.64	13.64
		High		13.46	13.53	13.56
	100%	/	13.50	12.32	12.40	12.56
Modulation	RB	RB Offset	Tune up	3MHz		
				26055	26365	26675
QPSK	1	Low	15.50	13.98	14.12	14.11
		Middle		14.26	14.37	14.35
		High		13.87	14.00	14.03
	50%	Low	14.50	13.16	13.36	13.22
		Middle		13.29	13.29	13.35
		High		13.34	13.28	13.32
	100%	/	14.50	13.28	13.33	13.31
16QAM	1	Low	14.50	13.70	13.65	13.63
		Middle		13.68	13.71	13.69
		High		13.53	13.59	13.63
	50%	Low	13.50	12.47	12.39	12.38

		Middle		12.45	12.40	12.45
		High		12.41	12.38	12.41
	100%	/	13.50	12.30	12.36	12.53
Modulation	RB	RB Offset	Tune up	5MHz		
				26065	26365	26665
QPSK	1	Low	15.50	13.95	14.10	14.07
		Middle		14.24	14.33	14.32
		High		13.84	13.95	13.99
	50%	Low	14.50	13.13	13.31	13.18
		Middle		13.27	13.25	13.30
		High		13.32	13.26	13.28
	100%	/	14.50	13.28	13.32	13.29
16QAM	1	Low	14.50	13.67	13.61	13.60
		Middle		13.65	13.69	13.66
		High		13.50	13.57	13.59
	50%	Low	13.50	12.45	12.35	12.35
		Middle		12.42	12.35	12.41
		High		12.38	12.33	12.37
	100%	/	13.50	12.28	12.32	12.48
Modulation	RB	RB Offset	Tune up	10MHz		
				26090	26365	26640
QPSK	1	Low	15.50	13.97	14.11	14.10
		Middle		14.27	14.38	14.36
		High		13.86	13.99	14.02
	50%	Low	14.50	13.16	13.36	13.22
		Middle		13.30	13.30	13.34
		High		13.34	13.30	13.33
	100%	/	14.50	13.32	13.34	13.33
16QAM	1	Low	14.50	13.69	13.64	13.62
		Middle		13.68	13.73	13.69
		High		13.53	13.59	13.62
	50%	Low	13.50	12.48	12.40	12.39
		Middle		12.44	12.39	12.44
		High		12.41	12.38	12.41
	100%	/	13.50	12.31	12.37	12.52
Modulation	RB	RB Offset	Tune up	15MHz		
				26115	26365	26615
QPSK	1	Low	15.50	13.96	14.07	14.08
		Middle		14.25	14.37	14.33
		High		13.83	13.94	13.98
	50%	Low	14.50	13.14	13.32	13.19
		Middle		13.27	13.25	13.30

	100%	High	14.50	13.31	13.27	13.29
		/		13.30	13.30	13.28
16QAM	1	Low	14.50	13.64	13.62	13.60
		Middle		13.66	13.70	13.67
		High		13.50	13.55	13.59
	50%	Low	13.50	12.45	12.38	12.36
		Middle		12.41	12.34	12.40
		High		12.39	12.34	12.38
	100%	/	13.50	12.28	12.32	12.48
Modulation	RB	RB Offset	Tune up	20MHz		
				26140	26365	26590
QPSK	1	Low	15.50	14.04	14.14	14.16
		Middle		14.35	14.44	14.42
		High		13.92	14.04	14.06
	50%	Low	14.50	13.22	13.38	13.26
		Middle		13.25	13.21	13.27
		High		13.28	13.22	13.25
	100%	/	14.50	13.27	13.25	13.24
16QAM	1	Low	14.50	13.54	13.58	13.55
		Middle		13.62	13.68	13.63
		High		13.48	13.52	13.57
	50%	Low	13.50	12.42	12.34	12.33
		Middle		12.38	12.32	12.37
		High		12.36	12.29	12.34
	100%	/	13.50	12.26	12.28	12.45

Table 13.4-8: The conducted Power for LTE Band 26

Full power&Sensor off						
LTE Band 26			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				26697	26865	27033
QPSK	1	Low	23.50	22.41	22.38	22.35
		Middle		22.37	22.39	22.38
		High		22.37	22.37	22.37
	50%	Low	23.50	22.46	22.43	22.41
		Middle		22.45	22.52	22.49
		High		22.47	22.41	22.37
	100%	/	22.50	21.50	21.54	21.51
16QAM	1	Low	22.50	21.42	21.49	21.46
		Middle		21.40	21.54	21.42
		High		21.48	21.47	21.42

	50%	Low	22.50	21.44	21.43	21.38
		Middle		21.40	21.50	21.37
		High		21.35	21.45	21.38
	100%	/	21.50	20.40	20.49	20.45
Modulation	RB	RB Offset	Tune up	3MHz		
				26705	26865	27025
QPSK	1	Low	23.50	22.33	22.37	22.34
		Middle		22.39	22.41	22.39
		High		22.33	22.37	22.35
	50%	Low	22.50	21.53	21.50	21.50
		Middle		21.45	21.48	21.46
		High		21.48	21.51	21.43
	100%	/	22.50	21.50	21.57	21.52
16QAM	1	Low	22.50	21.42	21.47	21.46
		Middle		21.40	21.52	21.43
		High		21.47	21.49	21.41
	50%	Low	21.50	20.53	20.52	20.47
		Middle		20.48	20.58	20.45
		High		20.42	20.52	20.47
	100%	/	21.50	20.41	20.49	20.43
Modulation	RB	RB Offset	Tune up	5MHz		
				26715/	26865	27015
QPSK	1	Low	23.50	22.35	22.38	22.37
		Middle		22.42	22.37	22.33
		High		22.35	22.41	22.38
	50%	Low	22.50	21.46	21.45	21.44
		Middle		21.58	21.53	21.51
		High		21.47	21.52	21.48
	100%	/	22.50	21.54	21.59	21.56
16QAM	1	Low	22.50	21.44	21.50	21.48
		Middle		21.43	21.56	21.46
		High		21.50	21.51	21.44
	50%	Low	21.50	20.56	20.57	20.51
		Middle		20.50	20.62	20.48
		High		20.45	20.57	20.51
	100%	/	21.50	20.44	20.54	20.47
Modulation	RB	RB Offset	Tune up	10MHz		
				26740	26865	26990
QPSK	1	Low	23.50	22.41	22.37	22.35
		Middle		22.40	22.36	22.40
		High		22.41	22.36	22.34
	50%	Low	22.50	21.53	21.51	21.51

		Middle		21.45	21.48	21.52
		High		21.51	21.51	21.44
	100%	/	22.50	21.52	21.55	21.51
16QAM	1	Low	22.50	21.39	21.48	21.46
		Middle		21.41	21.53	21.44
		High		21.47	21.47	21.41
	50%	Low	21.50	20.53	20.55	20.48
		Middle		20.47	20.57	20.44
		High		20.43	20.53	20.48
	100%	/	21.50	20.41	20.49	20.43
Modulation	RB	RB Offset	Tune up	15MHz		
				26765	26865	26965
QPSK	1	Low	23.50	22.38	22.40	22.32
		Middle		22.39	22.42	22.38
		High		22.37	22.35	22.36
	50%	Low	22.50	21.51	21.46	21.47
		Middle		21.53	21.54	21.53
		High		21.51	21.46	21.40
	100%	/	22.50	21.49	21.50	21.47
16QAM	1	Low	22.50	21.41	21.44	21.41
		Middle		21.37	21.51	21.40
		High		21.45	21.44	21.39
	50%	Low	21.50	20.50	20.51	20.45
		Middle		20.44	20.55	20.41
		High		20.40	20.48	20.44
	100%	/	21.50	20.39	20.45	20.40

Table 13.4-9: The conducted Power for LTE Band 38

Full power&Sensor off						
LTE Band 38			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	5MHz		
				37775	38000	38225
QPSK	1	Low	24.00	21.42	21.94	22.19
		Middle		22.07	22.42	22.71
		High		22.15	22.43	22.60
	50%	Low	23.00	20.80	21.13	21.51
		Middle		21.09	21.37	21.76
		High		21.15	21.42	21.84
	100%	/	23.00	21.01	21.34	21.68
16QAM	1	Low	23.00	21.10	20.87	21.23
		Middle		21.08	21.48	21.92

	50%	High	22.00	21.01	21.41	21.69
		Low		19.82	20.14	20.50
		Middle		19.94	20.37	20.73
		High		20.02	20.47	20.74
	100%	/	22.00	19.98	20.25	20.66
Modulation	RB	RB Offset	Tune up	10MHz		
				37800	38000	38200
QPSK	1	Low	24.00	21.44	21.95	22.22
		Middle		22.10	22.47	22.75
		High		22.17	22.47	22.63
	50%	Low	23.00	20.83	21.18	21.55
		Middle		21.12	21.42	21.80
		High		21.17	21.46	21.89
	100%	/	23.00	21.05	21.36	21.72
16QAM	1	Low	23.00	21.12	20.90	21.25
		Middle		21.11	21.52	21.95
		High		21.04	21.43	21.72
	50%	Low	22.00	19.85	20.19	20.54
		Middle		19.96	20.41	20.76
		High		20.05	20.52	20.78
	100%	/	22.00	20.01	20.30	20.70
Modulation	RB	RB Offset	Tune up	15MHz		
				37825	38000	38175
QPSK	1	Low	24.00	21.43	21.91	22.20
		Middle		22.08	22.46	22.72
		High		22.14	22.42	22.59
	50%	Low	23.00	20.81	21.14	21.52
		Middle		21.09	21.37	21.76
		High		21.14	21.43	21.85
	100%	/	23.00	21.03	21.32	21.67
16QAM	1	Low	23.00	21.07	20.88	21.23
		Middle		21.09	21.49	21.93
		High		21.01	21.39	21.69
	50%	Low	22.00	19.82	20.17	20.51
		Middle		19.93	20.36	20.72
		High		20.03	20.48	20.75
	100%	/	22.00	19.98	20.25	20.66
Modulation	RB	RB Offset	Tune up	20MHz		
				37850	38000	38150
QPSK	1	Low	24.00	21.40	21.87	22.17
		Middle		22.07	22.42	22.70
		High		22.12	22.41	22.56

	50%	Low	23.00	21.12	21.09	21.48
		Middle		21.07	21.33	21.73
		High		21.11	21.38	21.81
	100%	/	23.00	21.20	21.27	21.63
16QAM	1	Low	23.00	20.57	20.84	21.18
		Middle		21.05	21.47	21.89
		High		21.01	21.36	21.67
	50%	Low	22.00	19.79	20.13	20.48
		Middle		19.90	20.34	20.69
		High		20.00	20.43	20.71
	100%	/	22.00	19.96	20.21	20.63
Sensor on						
LTE Band 38			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	5MHz		
				37775	38000	38225
QPSK	1	Low	20.00	18.23	18.39	18.41
		Middle		18.62	18.72	18.79
		High		18.47	18.53	18.71
	50%	Low	19.00	17.41	17.72	17.80
		Middle		17.59	17.75	17.70
		High		17.60	17.96	17.90
	100%	/	19.00	17.70	17.92	17.95
16QAM	1	Low	19.00	17.85	17.40	17.53
		Middle		17.83	17.83	17.75
		High		17.73	17.70	17.65
	50%	Low	18.00	16.56	16.67	16.80
		Middle		16.77	16.81	16.75
		High		16.74	16.83	16.73
	100%	/	18.00	16.83	16.87	16.85
Modulation	RB	RB Offset	Tune up	10MHz		
				37800	38000	38200
QPSK	1	Low	20.00	18.25	18.40	18.44
		Middle		18.65	18.77	18.83
		High		18.49	18.57	18.74
	50%	Low	19.00	17.44	17.77	17.84
		Middle		17.62	17.80	17.74
		High		17.62	18.00	17.95
	100%	/	19.00	17.74	17.94	17.99
16QAM	1	Low	19.00	17.87	17.43	17.55
		Middle		17.86	17.87	17.78
		High		17.76	17.72	17.68
	50%	Low	18.00	16.59	16.72	16.84

		Middle		16.79	16.85	16.78
		High		16.77	16.88	16.77
	100%	/	18.00	16.86	16.92	16.89
Modulation	RB	RB Offset	Tune up	15MHz		
				37825	38000	38175
QPSK	1	Low	20.00	18.24	18.36	18.42
		Middle		18.63	18.76	18.80
		High		18.46	18.52	18.70
	50%	Low	19.00	17.42	17.73	17.81
		Middle		17.59	17.75	17.70
		High		17.59	17.97	17.91
	100%	/	19.00	17.72	17.90	17.94
16QAM	1	Low	19.00	17.82	17.41	17.53
		Middle		17.84	17.84	17.76
		High		17.73	17.68	17.65
	50%	Low	18.00	16.56	16.70	16.81
		Middle		16.76	16.80	16.74
		High		16.75	16.84	16.74
	100%	/	18.00	16.83	16.87	16.85
Modulation	RB	RB Offset	Tune up	20MHz		
				37850	38000	38150
QPSK	1	Low	20.00	18.21	18.32	18.39
		Middle		18.62	18.72	18.78
		High		18.44	18.51	18.67
	50%	Low	19.00	17.39	17.68	17.77
		Middle		17.57	17.71	17.67
		High		17.56	17.92	17.87
	100%	/	19.00	17.69	17.85	17.90
16QAM	1	Low	19.00	17.27	17.37	17.48
		Middle		17.80	17.82	17.72
		High		17.71	17.65	17.63
	50%	Low	18.00	16.53	16.66	16.78
		Middle		16.73	16.78	16.71
		High		16.72	16.79	16.70
	100%	/	18.00	16.81	16.83	16.82

Table 13.4-10: The conducted Power for LTE Band 41

Full power&Sensor off						
LTE Band 41			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	5MHz		
				40065	40640	41215

QPSK	1	Low	24.00	22.14	22.37	22.65
		Middle		22.52	22.75	22.91
		High		22.19	22.58	22.79
	50%	Low	23.00	21.28	21.63	21.91
		Middle		21.54	21.76	21.93
		High		21.58	21.82	21.95
	100%	/	23.00	21.45	21.77	21.95
16QAM	1	Low	23.00	21.63	21.48	21.77
		Middle		21.61	21.84	22.13
		High		21.36	21.65	21.86
	50%	Low	22.00	20.33	20.63	20.92
		Middle		20.57	20.77	21.02
		High		20.69	20.79	20.97
	100%	/	22.00	20.52	20.76	20.91
Modulation	RB	RB Offset	Tune up	10MHz		
				40090	40640	41190
QPSK	1	Low	24.00	22.16	22.38	22.68
		Middle		22.55	22.80	22.95
		High		22.21	22.62	22.82
	50%	Low	23.00	21.31	21.68	21.95
		Middle		21.57	21.81	21.97
		High		21.60	21.86	22.00
	100%	/	23.00	21.49	21.79	21.99
16QAM	1	Low	23.00	21.65	21.51	21.79
		Middle		21.64	21.88	22.16
		High		21.39	21.67	21.89
	50%	Low	22.00	20.36	20.68	20.96
		Middle		20.59	20.81	21.05
		High		20.72	20.84	21.01
	100%	/	22.00	20.55	20.81	20.95
Modulation	RB	RB Offset	Tune up	15MHz		
				40115	40640	41165
QPSK	1	Low	24.00	22.15	22.34	22.66
		Middle		22.53	22.79	22.92
		High		22.18	22.57	22.78
	50%	Low	23.00	21.29	21.64	21.92
		Middle		21.54	21.76	21.93
		High		21.57	21.83	21.96
	100%	/	23.00	21.47	21.75	21.94
16QAM	1	Low	23.00	21.60	21.49	21.77
		Middle		21.62	21.85	22.14
		High		21.36	21.63	21.86

	50%	Low	22.00	20.33	20.66	20.93
		Middle		20.56	20.76	21.01
		High		20.70	20.80	20.98
	100%	/	22.00	20.52	20.76	20.91
Modulation	RB	RB Offset	Tune up	20MHz		
				40140	40640	41140
QPSK	1	Low	24.00	22.12	22.30	22.63
		Middle		22.52	22.75	22.90
		High		22.16	22.56	22.75
	50%	Low	23.00	21.26	21.59	21.88
		Middle		21.52	21.72	21.90
		High		21.54	21.78	21.92
	100%	/	23.00	21.44	21.70	21.90
16QAM	1	Low	23.00	21.19	21.45	21.72
		Middle		21.58	21.83	22.10
		High		21.34	21.60	21.84
	50%	Low	22.00	20.30	20.62	20.90
		Middle		20.53	20.74	20.98
		High		20.67	20.75	20.94
	100%	/	22.00	20.50	20.72	20.88
Sensor on						
LTE Band 41			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	5MHz		
				40065	40640	41215
QPSK	1	Low	20.00	17.94	18.20	18.50
		Middle		18.30	18.82	18.81
		High		17.98	18.40	18.60
	50%	Low	20.00	18.04	18.47	18.84
		Middle		18.21	18.83	18.80
		High		18.33	18.57	18.77
	100%	/	20.00	18.26	18.63	18.77
16QAM	1	Low	20.00	18.46	18.35	18.61
		Middle		18.44	18.57	18.56
		High		18.21	18.52	18.63
	50%	Low	20.00	18.15	18.30	18.67
		Middle		18.33	18.55	18.72
		High		18.40	18.54	18.76
	100%	/	20.00	18.26	18.54	18.70
Modulation	RB	RB Offset	Tune up	10MHz		
				40090	40640	41190
QPSK	1	Low	20.00	17.96	18.25	18.53
		Middle		18.33	18.87	18.85

	50%	High	20.00	17.96	18.42	18.63
		Low		18.12	18.51	18.79
		Middle		18.36	18.88	18.84
		High		18.35	18.61	18.87
	100%	/	20.00	18.30	18.65	18.81
16QAM	1	Low	20.00	18.48	18.32	18.66
		Middle		18.47	18.61	18.59
		High		18.16	18.50	18.66
	50%	Low	20.00	18.18	18.35	18.71
		Middle		18.31	18.59	18.77
		High		18.40	18.59	18.80
	100%	/	20.00	18.29	18.63	18.78
Modulation	RB	RB Offset	Tune up	15MHz		
				40115	40640	41165
QPSK	1	Low	20.00	18.02	18.09	18.45
		Middle		18.31	18.86	18.82
		High		17.98	18.39	18.59
	50%	Low	20.00	18.11	18.47	18.76
		Middle		18.25	18.83	18.80
		High		18.32	18.58	18.81
	100%	/	20.00	18.28	18.61	18.76
16QAM	1	Low	20.00	18.43	18.30	18.64
		Middle		18.45	18.58	18.57
		High		18.13	18.49	18.63
	50%	Low	20.00	18.15	18.33	18.68
		Middle		18.28	18.54	18.73
		High		18.38	18.55	18.77
	100%	/	20.00	18.26	18.58	18.74
Modulation	RB	RB Offset	Tune up	20MHz		
				40140	40640	41140
QPSK	1	Low	20.00	17.92	18.13	18.48
		Middle		18.30	18.82	18.80
		High		17.91	18.38	18.56
	50%	Low	20.00	18.02	18.42	18.72
		Middle		18.19	18.79	18.77
		High		18.29	18.53	18.77
	100%	/	20.00	18.25	18.56	18.72
16QAM	1	Low	20.00	18.04	18.26	18.59
		Middle		18.41	18.56	18.53
		High		18.11	18.46	18.61
	50%	Low	20.00	18.12	18.29	18.65
		Middle		18.25	18.52	18.70

		High		18.35	18.50	18.73
	100%	/	20.00	18.24	18.54	18.71

Table 13.4-11: The conducted Power for LTE Band 66

Full power&Sensor off						
LTE Band 66			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				131979	132322	132665
QPSK	1	Low	22.50	21.84	21.86	21.80
		Middle		22.21	22.19	22.05
		High		21.82	21.66	21.65
	50%	Low	22.50	22.12	22.16	22.08
		Middle		21.99	22.09	22.12
		High		22.10	22.04	22.10
	100%	/	21.50	21.13	21.18	21.21
16QAM	1	Low	21.50	21.21	21.23	21.18
		Middle		21.19	21.21	21.14
		High		21.09	21.04	21.18
	50%	Low	21.50	21.07	21.04	21.09
		Middle		21.13	21.08	21.13
		High		21.04	20.98	20.98
	100%	/	20.50	20.06	20.07	20.17
Modulation	RB	RB Offset	Tune up	3MHz		
				131987	132322	132657
QPSK	1	Low	22.50	21.86	21.90	21.83
		Middle		22.21	22.18	22.09
		High		21.85	21.71	21.69
	50%	Low	21.50	21.17	21.13	21.17
		Middle		21.11	21.16	21.17
		High		21.16	21.15	21.16
	100%	/	21.50	21.13	21.22	21.24
16QAM	1	Low	21.50	21.24	21.25	21.21
		Middle		21.22	21.21	21.18
		High		21.11	21.08	21.21
	50%	Low	20.50	20.18	20.17	20.21
		Middle		20.24	20.21	20.25
		High		20.14	20.10	20.11
	100%	/	20.50	20.09	20.11	20.20
Modulation	RB	RB Offset	Tune up	5MHz		
				131997	132322	132647
QPSK	1	Low	22.50	21.83	21.88	21.79

		Middle		22.21	22.19	22.06
		High		21.82	21.66	21.65
	50%	Low	21.50	21.18	21.16	21.17
		Middle		21.09	21.15	21.19
		High		21.18	21.13	21.16
	100%	/	21.50	21.13	21.21	21.22
16QAM	1	Low	21.50	21.21	21.21	21.18
		Middle		21.19	21.19	21.15
		High		21.08	21.06	21.17
	50%	Low	20.50	20.16	20.13	20.18
		Middle		20.21	20.16	20.21
		High		20.11	20.05	20.07
	100%	/	20.50	20.07	20.07	20.15
Modulation	RB	RB Offset	Tune up	10MHz		
				132022	132322	132622
QPSK	1	Low	22.50	21.85	21.89	21.82
		Middle		22.18	22.16	22.10
		High		21.84	21.70	21.68
	50%	Low	21.50	21.17	21.18	21.15
		Middle		21.12	21.15	21.16
		High		21.18	21.17	21.17
	100%	/	21.50	21.17	21.23	21.26
16QAM	1	Low	21.50	21.23	21.24	21.20
		Middle		21.22	21.23	21.18
		High		21.11	21.08	21.20
	50%	Low	20.50	20.19	20.18	20.22
		Middle		20.23	20.20	20.24
		High		20.14	20.10	20.11
	100%	/	20.50	20.10	20.12	20.19
Modulation	RB	RB Offset	Tune up	15MHz		
				132047	132322	132597
QPSK	1	Low	22.50	21.84	21.85	21.80
		Middle		22.18	22.17	22.07
		High		21.81	21.65	21.64
	50%	Low	21.50	21.16	21.18	21.18
		Middle		21.09	21.15	21.16
		High		21.17	21.14	21.17
	100%	/	21.50	21.15	21.19	21.21
16QAM	1	Low	21.50	21.18	21.22	21.18
		Middle		21.20	21.20	21.16
		High		21.08	21.04	21.17
	50%	Low	20.50	20.16	20.16	20.19

		Middle		20.20	20.15	20.20
		High		20.12	20.06	20.08
	100%	/	20.50	20.07	20.07	20.15
Modulation	RB	RB Offset	Tune up	20MHz		
				132072	132322	132572
QPSK	1	Low	22.50	21.81	21.81	21.77
		Middle		22.21	22.22	22.05
		High		21.79	21.64	21.61
	50%	Low	21.50	21.17	21.19	21.14
		Middle		21.07	21.11	21.16
		High		21.14	21.09	21.13
	100%	/	21.50	21.12	21.14	21.17
16QAM	1	Low	21.50	21.14	21.18	21.13
		Middle		21.16	21.18	21.12
		High		21.06	21.01	21.15
	50%	Low	20.50	20.13	20.12	20.16
		Middle		20.17	20.13	20.17
		High		20.09	20.01	20.04
	100%	/	20.50	20.05	20.03	20.12
Sensor on						
LTE Band 66			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				131979	132322	132665
QPSK	1	Low	13.00	12.27	12.20	12.21
		Middle		12.52	12.53	12.52
		High		12.04	11.88	12.05
	50%	Low	13.00	12.26	12.32	12.28
		Middle		12.21	12.29	12.29
		High		12.13	12.14	12.18
	100%	/	12.00	11.29	11.35	11.30
16QAM	1	Low	12.00	11.74	11.59	11.56
		Middle		11.72	11.70	11.67
		High		11.44	11.39	11.35
	50%	Low	12.00	11.32	11.27	11.34
		Middle		11.30	11.26	11.29
		High		11.24	11.23	11.21
	100%	/	11.00	10.29	10.29	10.27
Modulation	RB	RB Offset	Tune up	3MHz		
				131987	132322	132657
QPSK	1	Low	13.00	12.29	12.24	12.24
		Middle		12.50	12.53	12.52
		High		12.07	11.93	12.09

	50%	Low	12.00	11.32	11.34	11.32
		Middle		11.33	11.32	11.31
		High		11.23	11.25	11.28
	100%	/	12.00	11.29	11.39	11.33
16QAM	1	Low	12.00	11.77	11.61	11.59
		Middle		11.75	11.70	11.71
		High		11.46	11.43	11.38
	50%	Low	11.00	10.43	10.40	10.46
		Middle		10.41	10.39	10.41
		High		10.34	10.35	10.34
	100%	/	11.00	10.32	10.33	10.30
Modulation	RB	RB Offset	Tune up	5MHz		
				131997	132322	132647
QPSK	1	Low	13.00	12.26	12.22	12.20
		Middle		12.48	12.52	12.53
		High		12.04	11.88	12.05
	50%	Low	12.00	11.33	11.34	11.32
		Middle		11.31	11.34	11.33
		High		11.21	11.23	11.24
	100%	/	12.00	11.29	11.38	11.31
16QAM	1	Low	12.00	11.74	11.57	11.56
		Middle		11.72	11.68	11.68
		High		11.43	11.41	11.34
	50%	Low	11.00	10.41	10.36	10.43
		Middle		10.38	10.34	10.37
		High		10.31	10.30	10.30
	100%	/	11.00	10.30	10.29	10.25
Modulation	RB	RB Offset	Tune up	10MHz		
				132022	132322	132622
QPSK	1	Low	13.00	12.28	12.23	12.23
		Middle		12.51	12.52	12.53
		High		12.06	11.92	12.08
	50%	Low	12.00	11.34	11.32	11.34
		Middle		11.34	11.34	11.29
		High		11.23	11.27	11.29
	100%	/	12.00	11.33	11.40	11.35
16QAM	1	Low	12.00	11.76	11.60	11.58
		Middle		11.75	11.72	11.71
		High		11.46	11.43	11.37
	50%	Low	11.00	10.44	10.41	10.47
		Middle		10.40	10.38	10.40
		High		10.34	10.35	10.34

	100%	/	11.00	10.33	10.34	10.29
Modulation	RB	RB Offset	Tune up	15MHz		
				132047	132322	132597
QPSK	1	Low	13.00	12.27	12.19	12.21
		Middle		12.49	12.53	12.52
		High		12.03	11.87	12.04
	50%	Low	12.00	11.34	11.34	11.33
		Middle		11.31	11.34	11.33
		High		11.20	11.24	11.25
	100%	/	12.00	11.31	11.36	11.30
16QAM	1	Low	12.00	11.71	11.58	11.56
		Middle		11.73	11.69	11.69
		High		11.43	11.39	11.34
	50%	Low	11.00	10.41	10.39	10.44
		Middle		10.37	10.33	10.36
		High		10.32	10.31	10.31
	100%	/	11.00	10.30	10.29	10.25
Modulation	RB	RB Offset	Tune up	20MHz		
				132072	132322	132572
QPSK	1	Low	13.00	12.24	12.15	12.18
		Middle		12.48	12.52	12.54
		High		12.01	11.86	12.01
	50%	Low	12.00	11.31	11.35	11.34
		Middle		11.29	11.31	11.33
		High		11.17	11.19	11.21
	100%	/	12.00	11.28	11.31	11.26
16QAM	1	Low	12.00	11.51	11.54	11.51
		Middle		11.69	11.67	11.65
		High		11.41	11.36	11.32
	50%	Low	11.00	10.38	10.35	10.41
		Middle		10.34	10.31	10.33
		High		10.29	10.26	10.27
	100%	/	11.00	10.28	10.25	10.22

13.5 BT Measurement result

Table 13.5-1: The conducted power for Bluetooth

Full power&Sensor off						
BlueTooth	Maximum Output Power (dBm)					
Channel	0		39		78	
Mode	Tune up	Output Power	Tune up	Output Power	Tune up	Output Power
GFSK	6.50	5.65	7.50	6.89	6.50	5.45
DQPSK	5.50	4.57	6.50	5.74	5.50	4.22
8DPSK	5.50	4.60	6.50	5.84	5.50	4.36
BlueTooth	Maximum Output Power (dBm)					
Mode	Tune up		Channel		Output Power	
BLE	7.00		0		5.545	
	7.00		19		6.323	
	7.00		38		5.278	

13.6 Wi-Fi Measurement result

Table 13.6-1: The average conducted power for Wi-Fi 2.4G

Full power&Sensor off				
Wi-Fi			Wi-Fi 2.4G conducted power(dBm)	
Mode	Bandwidth(MHz)	Channel	Tune up	Output Power
802.11b	20	1	15.00	14.84
		6	15.50	15.38
		11	15.00	14.62
802.11g	20	1	15.00	14.18
		6	15.00	14.66
		11	14.00	13.58
802.11n	20	1	14.50	13.73
		6	15.00	14.44
		11	14.50	13.48
	40	3	14.50	13.60
		6	14.50	13.92
		9	14.50	13.91

Table 13.6-2: The average conducted power for Wi-Fi 5G

Full power&Sensor off				
Wi-Fi			Wi-Fi 5G conducted power(dBm)	
Mode	Bandwidth(MHz)	Channel	Tune up	Output Power
802.11a	20	36	13.00	12.37
		40	13.00	12.28
		48	11.50	11.05
		52	11.50	11.04
		56	11.50	10.90
		64	11.50	10.68
		149	10.00	9.61
		157	9.50	9.07
		165	9.00	8.36
802.11n	20	36	13.00	12.65
		40	12.50	12.26
		48	12.00	11.12
		52	11.50	10.62
		56	11.00	10.27
		64	11.00	10.59
		149	10.50	9.79
		157	10.50	9.09
		165	9.00	8.37
	40	38	13.00	12.46
		46	12.00	11.61
		54	11.50	10.61
		62	11.50	10.81
		151	10.50	9.36
		159	10.50	9.04

13.7 NFC Measurement result

Frequency(MHz)	dBμV/m @3m	EIRP(dBm)	Tune up(dBm)
13.56	71.109	-24.119	-23.00
Note: EIRP(dBm)=Radiated field strength(dBμV/m)+20Log(3)-104.77.			

14 Test Results

14.1 Standalone SAR Test Result

14.1.1 Limit/Criterion

At frequencies between 100 kHz and 6 GHz, the MPE (Maximum Permissible Exposure) in population/uncontrolled environments for electromagnetic field strengths may be exceeded if

- (a) The exposure conditions can be shown by appropriate techniques to produce SARs below 0.08W/kg, as averaged over the whole body, and spatial peak SAR values not exceeding 1.6 W/kg, as averaged over any 1g of tissue (defined as a tissue volume in the shape of a cube), except for the hands, wrists, feet, and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10g of tissue (defined as a tissue volume in the shape of a cube); and
- (b) The induced currents in the body confirm with the MPE in table 2, Part B in ANSI/IEEE C95.1-1992.

14.1.2 Test Results

This section only shows the test result of LTE Band 12, LTE Band 25, LTE Band 26 and LTE Band 66, the test results for other frequency bands are referred to the original report.

Table 14.1.2-1: SAR Values for LTE Band 12

Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
Body SAR (Worn&HotSpot 5mm)														
Front Side	Full power&Sensor off	QPSK	10	1	mid	23095	707.5	22.34	23.50	0.03	0.477	1.31	0.623	/
Back Side	Full power&Sensor off	QPSK	10	1	mid	23095	707.5	22.34	23.50	0.01	0.233	1.31	0.304	/
Left Side	Full power&Sensor off	QPSK	10	1	mid	23095	707.5	22.34	23.50	0.08	0.076	1.31	0.099	/
Right Side	Full power&Sensor off	QPSK	10	1	mid	23095	707.5	22.34	23.50	0.03	0.137	1.31	0.179	/
Bottom Side	Full power&Sensor off	QPSK	10	1	mid	23095	707.5	22.34	23.50	0.04	0.317	1.31	0.414	/
Front Side	Full power&Sensor off	QPSK	10	50%	mid	23095	707.5	21.19	22.50	-0.08	0.377	1.35	0.510	/
Back Side	Full power&Sensor off	QPSK	10	50%	mid	23095	707.5	21.19	22.50	-0.10	0.189	1.35	0.256	/
Left Side	Full power&Sensor off	QPSK	10	50%	mid	23095	707.5	21.19	22.50	0.03	0.061	1.35	0.082	/
Right Side	Full power&Sensor off	QPSK	10	50%	mid	23095	707.5	21.19	22.50	-0.01	0.108	1.35	0.146	/
Bottom Side	Full power&Sensor off	QPSK	10	50%	mid	23095	707.5	21.19	22.50	0.03	0.254	1.35	0.343	/
Front Side	Full power&Sensor off	QPSK	10	1	mid	23060	704	22.21	23.50	0.05	0.474	1.35	0.638	/
Front Side	Full power&Sensor off	QPSK	10	1	mid	23130	711	22.15	23.50	-0.03	0.489	1.36	0.667	A.1-1
Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR (0mm)														
Front Side	Full power&Sensor off	QPSK	10	1	mid	23095	707.5	22.34	23.50	-0.02	0.589	1.31	0.769	/
Back Side	Full power&Sensor off	QPSK	10	1	mid	23095	707.5	22.34	23.50	-0.03	0.291	1.31	0.380	/
Left Side	Full power&Sensor off	QPSK	10	1	mid	23095	707.5	22.34	23.50	0.10	0.122	1.31	0.159	/
Right Side	Full power&Sensor off	QPSK	10	1	mid	23095	707.5	22.34	23.50	0.07	0.132	1.31	0.172	/
Bottom Side	Full power&Sensor off	QPSK	10	1	mid	23095	707.5	22.34	23.50	0.03	0.420	1.31	0.549	/
Front Side	Full power&Sensor off	QPSK	10	50%	mid	23095	707.5	21.19	22.50	-0.06	0.479	1.35	0.648	/
Back Side	Full power&Sensor off	QPSK	10	50%	mid	23095	707.5	21.19	22.50	-0.04	0.232	1.35	0.314	/
Left Side	Full power&Sensor off	QPSK	10	50%	mid	23095	707.5	21.19	22.50	0.13	0.100	1.35	0.135	/
Right Side	Full power&Sensor off	QPSK	10	50%	mid	23095	707.5	21.19	22.50	0.18	0.105	1.35	0.142	/
Bottom Side	Full power&Sensor off	QPSK	10	50%	mid	23095	707.5	21.19	22.50	0.04	0.332	1.35	0.449	/
Front Side	Full power&Sensor off	QPSK	10	1	mid	23060	704	22.21	23.50	-0.03	0.599	1.35	0.806	A.1-2
Front Side	Full power&Sensor off	QPSK	10	1	mid	23095	711	22.15	23.50	-0.13	0.572	1.36	0.781	/

Table 14.1.2-2: SAR Values for LTE Band 25

Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
Body SAR (Worn&HotSpot 5mm)														
Front Side	Sensor on	QPSK	20	1	mid	26365	1882.5	14.44	15.50	0.07	0.166	1.28	0.212	/
Back Side	Sensor on	QPSK	20	1	mid	26365	1882.5	14.44	15.50	-0.05	0.144	1.28	0.184	/
Left Side	Full power&Sensor off	QPSK	20	1	mid	26365	1882.5	22.71	23.50	-0.14	0.119	1.20	0.143	/
Right Side	Full power&Sensor off	QPSK	20	1	mid	26365	1882.5	22.71	23.50	0.06	0.089	1.20	0.107	/
Bottom Side	Sensor on	QPSK	20	1	mid	26365	1882.5	14.44	15.50	-0.06	0.429	1.28	0.548	/
Front Side	Sensor on	QPSK	20	50%	low	26365	1882.5	13.38	14.50	-0.07	0.132	1.29	0.171	/
Back Side	Sensor on	QPSK	20	50%	low	26365	1882.5	13.38	14.50	0.00	0.109	1.29	0.141	/
Left Side	Full power&Sensor off	QPSK	20	50%	mid	26365	1882.5	21.68	22.50	-0.11	0.115	1.21	0.139	/
Right Side	Full power&Sensor off	QPSK	20	50%	mid	26365	1882.5	21.68	22.50	-0.08	0.066	1.21	0.079	/
Bottom Side	Sensor on	QPSK	20	50%	low	26365	1882.5	13.38	14.50	-0.05	0.327	1.29	0.423	/
Bottom Side	Sensor on	QPSK	20	1	mid	26140	1860	14.35	15.50	0.02	0.441	1.30	0.575	/
Bottom Side	Sensor on	QPSK	20	1	mid	26590	1905	14.42	15.50	0.05	0.542	1.28	0.695	A.1-3
Body SAR (Front Side:9mm;Back Side/Bottom Side:19mm)														
Front Side	Full power&Sensor off	QPSK	20	1	mid	26365	1882.5	22.71	23.50	0.02	0.457	1.20	0.548	/
Back Side	Full power&Sensor off	QPSK	20	1	mid	26365	1882.5	22.71	23.50	0.02	0.164	1.20	0.197	/
Bottom Side	Full power&Sensor off	QPSK	20	1	mid	26365	1882.5	22.71	23.50	0.08	0.297	1.20	0.356	/
Front Side	Full power&Sensor off	QPSK	20	50%	mid	26365	1882.5	21.68	22.50	0.09	0.363	1.21	0.438	/
Back Side	Full power&Sensor off	QPSK	20	50%	mid	26365	1882.5	21.68	22.50	0.00	0.128	1.21	0.155	/
Bottom Side	Full power&Sensor off	QPSK	20	50%	mid	26365	1882.5	21.68	22.50	0.08	0.233	1.21	0.281	/
Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR (0mm)														
Front Side	Sensor on	QPSK	20	1	mid	26365	1882.5	14.44	15.50	0.02	0.201	1.28	0.257	/
Back Side	Sensor on	QPSK	20	1	mid	26365	1882.5	14.44	15.50	-0.03	0.140	1.28	0.179	/
Left Side	Full power&Sensor off	QPSK	20	1	mid	26365	1882.5	22.71	23.50	0.02	0.166	1.20	0.199	/
Right Side	Full power&Sensor off	QPSK	20	1	mid	26365	1882.5	22.71	23.50	0.09	0.055	1.20	0.066	/
Bottom Side	Sensor on	QPSK	20	1	mid	26365	1882.5	14.44	15.50	0.05	0.430	1.28	0.549	/
Front Side	Sensor on	QPSK	20	50%	low	26365	1882.5	13.38	14.50	0.01	0.152	1.29	0.197	/
Back Side	Sensor on	QPSK	20	50%	low	26365	1882.5	13.38	14.50	0.00	0.106	1.29	0.137	/
Left Side	Full power&Sensor off	QPSK	20	50%	mid	26365	1882.5	21.68	22.50	0.04	0.126	1.21	0.152	/
Right Side	Full power&Sensor off	QPSK	20	50%	mid	26365	1882.5	21.68	22.50	0.03	0.040	1.21	0.048	/
Bottom Side	Sensor on	QPSK	20	50%	low	26365	1882.5	13.38	14.50	-0.05	0.333	1.29	0.431	/
Bottom Side	Sensor on	QPSK	20	1	mid	26140	1860	14.35	15.50	-0.04	0.484	1.30	0.631	/
Bottom Side	Sensor on	QPSK	20	1	mid	26590	1905	14.42	15.50	-0.16	0.519	1.28	0.666	A.1-4

Table 14.1.2-3: SAR Values for LTE Band 26

Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
Body SAR (Worn&HotSpot 5mm)														
Front Side	Full power&Sensor off	QPSK	15	1	mid	26865	831.5	22.42	23.50	-0.08	0.506	1.28	0.649	A.1-5
Back Side	Full power&Sensor off	QPSK	15	1	mid	26865	831.5	22.42	23.50	-0.06	0.505	1.28	0.648	/
Left Side	Full power&Sensor off	QPSK	15	1	mid	26865	831.5	22.42	23.50	-0.13	0.117	1.28	0.150	/
Right Side	Full power&Sensor off	QPSK	15	1	mid	26865	831.5	22.42	23.50	0.03	0.177	1.28	0.227	/
Bottom Side	Full power&Sensor off	QPSK	15	1	mid	26865	831.5	22.42	23.50	-0.17	0.312	1.28	0.400	/
Front Side	Full power&Sensor off	QPSK	15	50%	mid	26865	831.5	21.54	22.50	-0.03	0.397	1.25	0.495	/
Back Side	Full power&Sensor off	QPSK	15	50%	mid	26865	831.5	21.54	22.50	0.03	0.405	1.25	0.505	/
Left Side	Full power&Sensor off	QPSK	15	50%	mid	26865	831.5	21.54	22.50	0.11	0.084	1.25	0.104	/
Right Side	Full power&Sensor off	QPSK	15	50%	mid	26865	831.5	21.54	22.50	-0.10	0.138	1.25	0.172	/
Bottom Side	Full power&Sensor off	QPSK	15	50%	mid	26865	831.5	21.54	22.50	0.19	0.246	1.25	0.307	/
Front Side	Full power&Sensor off	QPSK	15	1	mid	26765	821.5	22.39	23.50	-0.05	0.410	1.29	0.529	/
Front Side	Full power&Sensor off	QPSK	15	1	mid	26965	841.5	22.38	23.50	0.03	0.432	1.29	0.559	/
Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR (0mm)														
Front Side	Full power&Sensor off	QPSK	15	1	mid	26865	831.5	22.42	23.50	-0.07	0.491	1.28	0.630	A.1-6
Back Side	Full power&Sensor off	QPSK	15	1	mid	26865	831.5	22.42	23.50	0.02	0.458	1.28	0.587	/
Left Side	Full power&Sensor off	QPSK	15	1	mid	26865	831.5	22.42	23.50	0.13	0.200	1.28	0.256	/
Right Side	Full power&Sensor off	QPSK	15	1	mid	26865	831.5	22.42	23.50	0.08	0.179	1.28	0.230	/
Bottom Side	Full power&Sensor off	QPSK	15	1	mid	26865	831.5	22.42	23.50	0.01	0.367	1.28	0.471	/
Front Side	Full power&Sensor off	QPSK	15	50%	mid	26865	831.5	21.54	22.50	0.03	0.405	1.25	0.505	/
Back Side	Full power&Sensor off	QPSK	15	50%	mid	26865	831.5	21.54	22.50	0.00	0.372	1.25	0.464	/
Left Side	Full power&Sensor off	QPSK	15	50%	mid	26865	831.5	21.54	22.50	-0.04	0.158	1.25	0.197	/
Right Side	Full power&Sensor off	QPSK	15	50%	mid	26865	831.5	21.54	22.50	0.07	0.145	1.25	0.181	/
Bottom Side	Full power&Sensor off	QPSK	15	50%	mid	26865	831.5	21.54	22.50	0.08	0.301	1.25	0.375	/
Front Side	Full power&Sensor off	QPSK	15	1	mid	26765	821.5	22.39	23.50	-0.03	0.389	1.29	0.502	/
Front Side	Full power&Sensor off	QPSK	15	1	mid	26965	841.5	22.38	23.50	-0.10	0.436	1.29	0.564	/

Table 14.1.2-4: SAR Values for LTE Band 66

Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
Body SAR (Worn&HotSpot 5mm)														
Front Side	Sensor on	QPSK	20	1	mid	132572	1770	12.54	13.00	0.13	0.580	1.11	0.645	/
Back Side	Sensor on	QPSK	20	1	mid	132572	1770	12.54	13.00	-0.02	0.499	1.11	0.555	/
Left Side	Full power&Sensor off	QPSK	20	1	mid	132322	1745	22.22	22.50	0.06	0.037	1.07	0.039	/
Right Side	Full power&Sensor off	QPSK	20	1	mid	132322	1745	22.22	22.50	0.10	0.097	1.07	0.103	/
Bottom Side	Sensor on	QPSK	20	1	mid	132572	1770	12.54	13.00	-0.13	0.900	1.11	1.001	/
Front Side	Sensor on	QPSK	20	50%	low	132322	1745	11.35	12.00	-0.19	0.406	1.16	0.472	/
Back Side	Sensor on	QPSK	20	50%	low	132322	1745	11.35	12.00	0.04	0.350	1.16	0.407	/
Left Side	Full power&Sensor off	QPSK	20	50%	low	132322	1745	21.19	21.50	-0.10	0.029	1.07	0.031	/
Right Side	Full power&Sensor off	QPSK	20	50%	low	132322	1745	21.19	21.50	0.06	0.079	1.07	0.084	/
Bottom Side	Sensor on	QPSK	20	50%	low	132322	1745	11.35	12.00	0.15	0.695	1.16	0.807	/
Bottom Side	Sensor on	QPSK	20	1	mid	132072	1720	12.48	13.00	-0.06	0.747	1.13	0.842	/
Bottom Side	Sensor on	QPSK	20	1	mid	132322	1745	12.52	13.00	-0.07	0.832	1.12	0.929	/
Bottom Side	Sensor on	QPSK	20	50%	low	132072	1720	11.31	12.00	-0.07	0.598	1.17	0.701	/
Bottom Side	Sensor on	QPSK	20	50%	low	132572	1770	11.34	12.00	-0.07	0.761	1.16	0.886	/
Repeat														
Bottom Side	Sensor on	QPSK	20	1	mid	132572	1770	12.54	13.00	0.17	0.901	1.11	1.002	A.1-7
Body SAR (Front Side:9mm;Back Side/Bottom Side:19mm)														
Front Side	Full power&Sensor off	QPSK	20	1	mid	132322	1745	22.22	22.50	0.04	0.758	1.07	0.808	/
Back Side	Full power&Sensor off	QPSK	20	1	mid	132322	1745	22.22	22.50	0.04	0.183	1.07	0.195	/
Bottom Side	Full power&Sensor off	QPSK	20	1	mid	132322	1745	22.22	22.50	-0.09	0.347	1.07	0.370	/
Front Side	Full power&Sensor off	QPSK	20	50%	low	132322	1745	21.19	21.50	-0.03	0.614	1.07	0.659	/
Back Side	Full power&Sensor off	QPSK	20	50%	low	132322	1745	21.19	21.50	0.04	0.146	1.07	0.157	/
Bottom Side	Full power&Sensor off	QPSK	20	50%	low	132322	1745	21.19	21.50	0.02	0.276	1.07	0.296	/
Front Side	Full power&Sensor off	QPSK	20	1	mid	132072	1720	22.21	22.50	-0.14	0.678	1.07	0.725	/
Front Side	Full power&Sensor off	QPSK	20	1	mid	132572	1770	22.05	22.50	0.04	0.758	1.11	0.841	/
Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR (0mm)														
Front Side	Sensor on	QPSK	20	1	mid	132572	1770	12.54	13.00	-0.07	0.586	1.11	0.651	/
Back Side	Sensor on	QPSK	20	1	mid	132572	1770	12.54	13.00	0.06	0.527	1.11	0.586	/
Left Side	Full power&Sensor off	QPSK	20	1	mid	132322	1745	22.22	22.50	0.02	0.047	1.07	0.050	/
Right Side	Full power&Sensor off	QPSK	20	1	mid	132322	1745	22.22	22.50	0.02	0.165	1.07	0.176	/
Bottom Side	Sensor on	QPSK	20	1	mid	132572	1770	12.54	13.00	0.02	0.861	1.11	0.957	A.1-8
Front Side	Sensor on	QPSK	20	50%	low	132322	1745	11.35	12.00	0.04	0.410	1.16	0.476	/
Back Side	Sensor on	QPSK	20	50%	low	132322	1745	11.35	12.00	-0.08	0.369	1.16	0.429	/
Left Side	Full power&Sensor off	QPSK	20	50%	low	132322	1745	21.19	21.50	-0.03	0.043	1.07	0.046	/
Right Side	Full power&Sensor off	QPSK	20	50%	low	132322	1745	21.19	21.50	-0.11	0.134	1.07	0.144	/
Bottom Side	Sensor on	QPSK	20	50%	low	132322	1745	11.35	12.00	0.19	0.753	1.16	0.875	/
Bottom Side	Sensor on	QPSK	20	1	mid	132072	1720	11.31	12.00	0.02	0.672	1.17	0.788	/
Bottom Side	Sensor on	QPSK	20	1	mid	132322	1745	11.45	12.00	0.03	0.599	1.14	0.680	/

14.2 Simultaneous SAR Evaluation

Table 14.2-1 Max. Reported SAR for GSM/WCDMA/LTE

Simultaneous Transmission Table	Test Position	Cellular																MaxReport SAR _{10g} GSMWCDMA/LTE
		Report SAR _{10g} (W/kg)	GSM850	GSM1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE B2	LTE B4	LTE B5	LTE B7	LTE B12	LTE B17	LTE B25	LTE B26	LTE B41	LTE B66	
Body SAR (Worn&HotSpot 5mm)	Front Side		0.177	0.165	0.284	0.632	0.499	0.341	0.453	0.631	0.415	0.667	0.624	0.212	0.649	0.331	0.645	0.667
	Back Side		0.102	0.133	0.235	0.466	0.621	0.306	0.416	0.674	0.391	0.304	0.333	0.184	0.648	0.268	0.555	0.674
	Left Side		0.022	0.173	0.170	0.076	0.269	0.258	0.082	0.253	0.657	0.099	0.079	0.143	0.150	0.038	0.039	0.657
	Right Side		0.044	0.082	0.099	0.201	0.262	0.088	0.197	0.126	0.050	0.179	0.164	0.107	0.227	0.045	0.103	0.262
	Top Side		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Bottom Side		0.246	0.431	0.852	0.821	0.430	1.157	1.002	0.600	1.142	0.414	0.511	0.695	0.400	0.866	1.002	1.157
Body SAR Define	Front Side(9mm)		N/A	0.920	1.203	1.167	N/A	0.705	1.254	N/A	0.248	N/A	N/A	0.548	N/A	0.216	0.841	1.254
	Back Side(19mm)		N/A	0.267	0.270	0.342	N/A	0.246	0.334	N/A	0.123	N/A	N/A	0.197	N/A	0.101	0.195	0.342
	Bottom Side(19mm)		N/A	0.458	0.529	0.655	N/A	0.550	0.642	N/A	0.240	N/A	N/A	0.356	N/A	0.225	0.370	0.655
Simultaneous Transmission Table	Test Position	Cellular																Max Report SAR _{10g} GSMWCDMA/LTE
		Report SAR _{10g} (W/kg)	GSM850	GSM1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE B2	LTE B4	LTE B5	LTE B7	LTE B12	LTE B17	LTE B25	LTE B26	LTE B41	LTE B66	
Limb SAR(0mm)	Front Side		0.196	0.144	0.256	0.394	0.706	0.382	0.411	0.587	0.375	0.806	0.632	0.257	0.630	0.339	0.651	0.806
	Back Side		0.121	0.141	0.217	0.377	0.636	0.322	0.374	0.346	0.489	0.380	0.343	0.179	0.587	0.297	0.586	0.636
	Left Side		0.027	0.227	0.225	0.056	0.289	0.226	0.052	0.179	0.480	0.159	0.081	0.199	0.256	0.420	0.050	0.480
	Right Side		0.043	0.051	0.050	0.256	0.186	0.058	0.175	0.119	0.096	0.172	0.124	0.066	0.230	0.049	0.176	0.256
	Top Side		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Bottom Side		0.255	0.347	0.632	0.630	0.448	0.924	0.670	0.509	1.395	0.549	0.482	0.666	0.471	0.729	0.957	1.395

Table 14.2-2 Max. Reported SAR for Wi-Fi&BT

Simultaneous Transmission Table		Non-Cellular				
	Report SAR _{10g} (W/kg) Test Position	Max.Report SAR _{10g} BT	Max.Report SAR _{10g} Wi-Fi 2.4G	Wi-Fi 5G		Max.Report SAR _{10g} Wi-Fi 5G
				U-NII-1&2A	U-NII-3	
Body SAR (Worn&HotSpot 5mm)	Front Side	0.000	0.030	0.195	0.151	0.195
	Back Side	0.068	0.630	0.513	0.324	0.513
	Left Side	0.000	0.019	0.079	0.057	0.079
	Right Side	0.006	0.129	0.042	0.171	0.171
	Top Side	0.015	0.148	0.127	0.163	0.163
	Bottom Side	0.000	0.000	0.000	0.000	0.000
Body SAR Define	Front Side(9mm)	0.000	0.030	0.195	0.151	0.195
	Back Side(19mm)	0.068	0.630	0.513	0.324	0.513
	Bottom Side(19mm)	0.000	0.000	0.000	0.000	0.000
Simultaneous Transmission Table		Non-Cellular				
	Report SAR _{10g} (W/kg) Test Position	Max.Report SAR _{10g} BT	Max.Report SAR _{10g} Wi-Fi 2.4G	Wi-Fi 5G		Max.Report SAR _{10g} Wi-Fi 5G
				U-NII-1&2A	U-NII-3	
Limb SAR(0mm)	Front Side	0.000	0.019	0.115	0.036	0.115
	Back Side	0.052	0.748	0.455	0.264	0.455
	Left Side	0.000	0.013	0.029	0.042	0.042
	Right Side	0.006	0.087	0.035	0.080	0.080
	Top Side	0.012	0.140	0.049	0.072	0.072
	Bottom Side	0.000	0.000	0.000	0.000	0.000

Table 14.2-3 Simultaneous transmission SAR

Simultaneous Transmission Table	Test Position	Report SAR _{10g} (W/kg)	Max.Report SAR _{10g} GSM/WCDMA/LTE	Non-Cellular			WWAN+BT	WWAN+Wi-Fi 2.4G	WWAN+Wi-Fi 5G	MAX.ΣSAR _{10g}
				Max.Report SAR _{10g} BT	Max.Report SAR _{10g} Wi-Fi 2.4G	Max.Report SAR _{10g} Wi-Fi 5G				
Body SAR (Worn&HotSpot 5mm)	Front Side		0.667	0.000	0.030	0.195	0.667	0.697	0.863	0.863
	Back Side		0.674	0.068	0.630	0.513	0.742	1.304	1.187	1.304
	Left Side		0.657	0.000	0.019	0.079	0.657	0.676	0.736	0.736
	Right Side		0.262	0.006	0.129	0.171	0.268	0.391	0.433	0.433
	Top Side		0.000	0.015	0.148	0.163	0.015	0.148	0.163	0.163
	Bottom Side		1.157	0.000	0.000	0.000	1.157	1.157	1.157	1.157
Body SAR Define	Front Side(9mm)		1.254	0.000	0.030	0.195	1.254	1.283	1.449	1.449
	Back Side(19mm)		0.342	0.068	0.630	0.513	0.410	0.972	0.855	0.972
	Bottom Side(19mm)		0.655	0.000	0.000	0.000	0.655	0.655	0.655	0.655
Simultaneous Transmission Table	Test Position	Report SAR _{10g} (W/kg)	Max.Report SAR _{10g} GSM/WCDMA/LTE	Non-Cellular			WWAN+BT	WWAN+Wi-Fi 2.4G	WWAN+Wi-Fi 5G	MAX.ΣSAR _{10g}
				Max.Report SAR _{10g} BT	Max.Report SAR _{10g} Wi-Fi 2.4G	Max.Report SAR _{10g} Wi-Fi 5G				
Limb SAR(0mm)	Front Side		0.806	0.000	0.019	0.115	0.806	0.825	0.921	0.921
	Back Side		0.636	0.052	0.748	0.455	0.688	1.383	1.091	1.383
	Left Side		0.480	0.000	0.013	0.042	0.480	0.493	0.522	0.522
	Right Side		0.256	0.006	0.087	0.080	0.262	0.343	0.335	0.343
	Top Side		0.000	0.012	0.140	0.072	0.012	0.140	0.072	0.140
	Bottom Side		1.395	0.000	0.000	0.000	1.395	1.395	1.395	1.395

According to the conducted power measurement result, we can draw the conclusion that: stand-alone SAR for Wi-Fi and BT should be performed. Then, simultaneous transmission SAR for Wi-Fi/BT is considered with measurement results of GSM/WCDMA/LTE and Wi-Fi/BT.

According to the above table, the sum of reported SAR values for partial-body GSM/WCDMA/LTE and Wi-Fi < 1.6W/kg; the sum of reported SAR values for Limb GSM/WCDMA/LTE and Wi-Fi < 4.0W/kg. So the simultaneous transmission SAR is not required for Wi-Fi/BT transmitter.

14.3 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- (a) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps(b) through (d) do not apply.
- (b) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- (c) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- (d) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Table 14.3-1: SAR Measurement Variability (1g)

Frequency		Configuration	Test Position	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio
Channel	Frequency (MHz)					
132572	1770	QPSK 20MHz 1RB 50offset	Bottom side 5mm	0.900	0.901	1.001

Note: According to the KDB 865664 D01 repeated measurement is not required when the original highest measured SAR is < 0.8 W/kg.

15 SAR Reduction Function Validation Procedure

15.1 Reference Document (Power Reduction for Proximity Sensor)

A proximity sensor for power reduction is implemented in this device to address RF exposure compliance when the cellular antenna is positioned close to the user's body. The sensor's mechanical structure is designed to fit within the enclosure design used in this device and also extended around the edge and top of the antenna element in order to optimize sensitivity in these orientations.

15.2 Procedures for Determining Proximity Sensor Triggering Distances

The following procedures should be applied to determine proximity sensor triggering distances for the back surface and individual edges of a tablet. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing, as required by the procedures. Unless there is built-in test software that reports the triggering conditions and enables the power levels to be confirmed separately, monitoring of conducted power during the triggering tests typically requires internal access to the antenna ports inside the tablet, which may interfere with the triggering tests.

- (a) The relevant transmitter should be set to operate at its normal maximum output power.
- (b) The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue-equivalent medium, and positioned at least 20 mm further than the distance that triggers power reduction.
- (c) It should be ensured that the cables required for power measurements are not interfering with the proximity sensor. Cable losses should be properly compensated to report the measured power results.
- (d) The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
- (e) The back surface or edge is then moved back (further away) from the phantom by at least 5 mm or until maximum output power is returned to the normal maximum level.
- (f) If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
- (g) The process is then reversed by moving the tablet away from the phantom according to steps 4) to 7), to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
- (h) The measured output power within ± 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated in the SAR report.
- (i) (9) If the sensor design and implementation allow additional variations for triggering distance tolerances, multiple samples should be tested to determine the most conservative distance required for SAR evaluation.

To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

15.3 Procedures for Determining Antenna and Proximity Sensor Coverage

The sensing regions are usually limited to areas near the sensor element. If a sensor is spatially offset

from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. The following are used to determine if additional SAR measurements may be necessary due to sensor and antenna offset. 25 These procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

- (a) The back surface or edge of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset. For the back surface, if the direction of maximum offset is not aligned with the tablet coordinates (physical edges) the tablet test position would not be aligned with the phantom coordinates (orientations). Each applicable tablet edge should be positioned perpendicularly to the phantom to determine sensor coverage. For antennas and/or sensors located near the corner of a tablet, both adjacent edges must be considered.
- (b) The similar sequence of steps applied to determine sensor triggering distance are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
- (c) After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
- (d) The process is then repeated from the opposite direction, starting at the other end of the maximum antenna and sensor offset, by rotating the tablet 180° along the vertical axis.
- (e) The triggering points should be documented graphically, with the antenna and sensor clearly identified, along with all relevant dimensions.

If the subsequently measured peak SAR location for the antenna is not between the triggering points, established by the sensor coverage tests from opposite ends of the antenna and sensor, additional SAR tests may be required for conditions where only part of the back surface or edge of a tablet corresponding to the antenna is in proximity to the user and the sensor may not be triggering as desired. A KDB inquiry must be submitted by the test lab to determine if additional tests are required and the proper test configurations to use for testing. This may include situations where the sensor coverage region is too small for the antenna, the sensor is located too far away from the antenna, the sensor location is insufficient to cover multiple antennas or the antenna is at the corner of a tablet etc.

15.4 Proximity Sensor Status Table of Trigger Distance

The following tables summarize the key power reduction information for proximity sensor. The test procedures be applied to determine proximity sensor triggering distances, and sensor coverage for normal and tilt positions.

To ensure all production units are compliant, the smallest separation distance determined by the sensor triggering and sensor coverage for normal and tilt positions for all usage conditions and applicable sides, minus 1 mm, must be used as the test separation distance for additional SAR testing of each higher power stage.

Table 15.4-1 Power reduction for proximity sensor

Main Antenna			
Band	Test position	Sensor Trigger Distance range (DUT to Phantom)	Power reduction amount(dB)
GSM1900 GPRS1TS	Front side	0mm≤distance≤10mm	6.5
		distance>10mm	0.0
	Back side	0mm≤distance≤20mm	6.5
		distance>20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0
	Top edge	N/A	0.0
	Bottom Edge	0mm≤distance≤20mm	6.5
		distance>20mm	0.0
GSM1900 GPRS2TS	Front side	0mm≤distance≤10mm	5.5
		distance>10mm	0.0
	Back side	0mm≤distance≤20mm	5.5
		distance>20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0
	Top edge	N/A	0.0
	Bottom Edge	0mm≤distance≤20mm	5.5
		distance>20mm	0.0
GSM1900 GPRS3TS	Front side	0mm≤distance≤10mm	3.5
		distance>10mm	0.0
	Back side	0mm≤distance≤20mm	3.5
		distance>20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0
	Top edge	N/A	0.0
	Bottom Edge	0mm≤distance≤20mm	3.5
		distance>20mm	0.0
GSM1900 GPRS4TS	Front side	0mm≤distance≤10mm	2.5
		distance>10mm	0.0
	Back side	0mm≤distance≤20mm	2.5

		distance > 20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0
	Top edge	N/A	0.0
	Bottom Edge	0mm ≤ distance ≤ 20mm	2.5
		distance > 20mm	0.0
WCDMA Band II RMC	Front side	0mm ≤ distance ≤ 10mm	7.5
		distance > 10mm	0.0
	Back side	0mm ≤ distance ≤ 20mm	7.5
		distance > 20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0
	Top edge	N/A	0.0
	Bottom Edge	0mm ≤ distance ≤ 20mm	7.5
		distance > 20mm	0.0
WCDMA Band IV RMC	Front side	0mm ≤ distance ≤ 10mm	6.5
		distance > 10mm	0.0
	Back side	0mm ≤ distance ≤ 20mm	6.5
		distance > 20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0
	Top edge	N/A	0.0
	Bottom Edge	0mm ≤ distance ≤ 20mm	6.5
		distance > 20mm	0.0
LTE B2 QPSK	Front side	0mm ≤ distance ≤ 10mm	8.0
		distance > 10mm	0.0
	Back side	0mm ≤ distance ≤ 20mm	8.0
		distance > 20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0
	Top edge	N/A	0.0
	Bottom Edge	0mm ≤ distance ≤ 20mm	8.0
		distance > 20mm	0.0
LTE B4 QPSK	Front side	0mm ≤ distance ≤ 10mm	9.5
		distance > 10mm	0.0
	Back side	0mm ≤ distance ≤ 20mm	9.5
		distance > 20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0
	Top edge	N/A	0.0
	Bottom Edge	0mm ≤ distance ≤ 20mm	9.5
		distance > 20mm	0.0

LTE B7 QPSK	Front side	0mm≤distance≤10mm	1.0
		distance>10mm	0.0
	Back side	0mm≤distance≤20mm	1.0
		distance>20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0
	Top edge	N/A	0.0
	Bottom Edge	0mm≤distance≤20mm	1.0
		distance>20mm	0.0
LTE B25 QPSK	Front side	0mm≤distance≤10mm	8.0
		distance>10mm	0.0
	Back side	0mm≤distance≤20mm	8.0
		distance>20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0
	Top edge	N/A	0.0
	Bottom Edge	0mm≤distance≤20mm	8.0
		distance>20mm	0.0
LTE B38 QPSK	Front side	0mm≤distance≤10mm	4.0
		distance>10mm	0.0
	Back side	0mm≤distance≤20mm	4.0
		distance>20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0
	Top edge	N/A	0.0
	Bottom Edge	0mm≤distance≤20mm	4.0
		distance>20mm	0.0
LTE B41 QPSK	Front side	0mm≤distance≤10mm	4.0
		distance>10mm	0.0
	Back side	0mm≤distance≤20mm	4.0
		distance>20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0
	Top edge	N/A	0.0
	Bottom Edge	0mm≤distance≤20mm	4.0
		distance>20mm	0.0
LTE B66 QPSK	Front side	0mm≤distance≤10mm	9.5
		distance>10mm	0.0
	Back side	0mm≤distance≤20mm	9.5
		distance>20mm	0.0
	Left edge	N/A	0.0
	Right edge	N/A	0.0

	Top edge	N/A	0.0
	Bottom Edge	$0\text{mm} \leq \text{distance} \leq 20\text{mm}$	9.5
		$\text{distance} > 20\text{mm}$	0.0

Procedures for determining proximity sensor triggering distances

The device was tested by the test lab to determine the proximity sensor triggering distances for the front side, back side and bottom side of the device. To ensure all production units are compliant, the smallest separation distance determined by the sensor triggering minus 1 mm, must be used as the test separation distance for SAR testing.

The Proximity sensor triggering distance measurement method are as below:

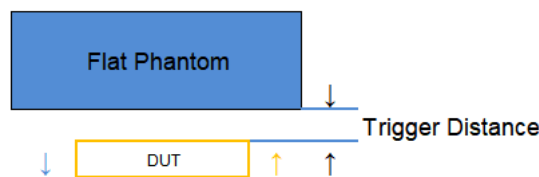


Figure 15.4-1 Proximity sensor triggering distances assessment(Front/Back side)

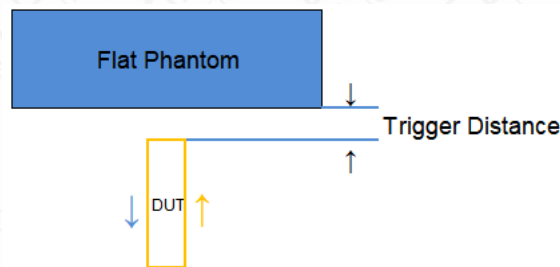


Figure 15.4-2 Proximity sensor triggering distances assessment(Bottom side)

The following table is the summary of the trigger distance.

Table 15.4-2 Summary of trigger distance

Band	Trigger distance- Front Side		Trigger distance- Back Side		Trigger distance- Bottom Edge	
	Moving toward Phantom	Moving away from Phantom	Moving toward Phantom	Moving away from Phantom	Moving toward Phantom	Moving away from Phantom
GSM1900	10mm	10mm	20mm	20mm	20mm	20mm
WCDMA Band II	10mm	10mm	20mm	20mm	20mm	20mm
WCDMA Band IV	10mm	10mm	20mm	20mm	20mm	20mm
LTE B2	10mm	10mm	20mm	20mm	20mm	20mm
LTE B4	10mm	10mm	20mm	20mm	20mm	20mm
LTE B7	10mm	10mm	20mm	20mm	20mm	20mm
LTE B25	10mm	10mm	20mm	20mm	20mm	20mm
LTE B38	10mm	10mm	20mm	20mm	20mm	20mm

LTE B41	10mm	10mm	20mm	20mm	20mm	20mm
LTE B66	10mm	10mm	20mm	20mm	20mm	20mm

15.5 Tilt Angle Influences to Proximity Sensor Triggering

The following procedure is used to determine the tilt angle influences to proximity sensor triggering.

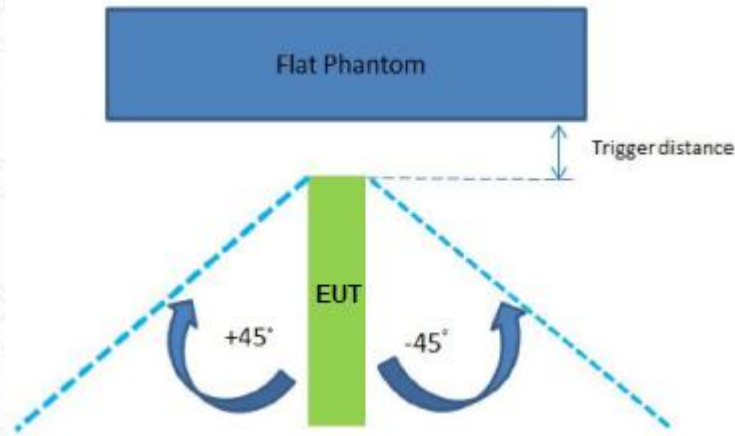


Table 15.5-1 Summary of tilt angle(Front side)

Distance to the DUT(mm)	Power Sensor Status 0° to +45°	Power Sensor Status 0° to -45°
25	OFF	OFF
24	OFF	OFF
23	OFF	OFF
22	OFF	OFF
21	OFF	OFF
20	OFF	OFF
19	OFF	OFF
18	OFF	OFF
17	OFF	OFF
16	OFF	OFF
15	OFF	OFF
14	OFF	OFF
13	OFF	OFF
12	OFF	OFF
11	OFF	OFF
10	ON	ON
9	ON	ON
8	ON	ON
7	ON	ON
6	ON	ON

5	ON	ON
4	ON	ON
3	ON	ON
2	ON	ON
1	ON	ON
0	ON	ON


Table 15.5-2 Summary of tilt angle(Back/Bottom side)

Distance to the DUT(mm)	Power Sensor Status 0° to +45°	Power Sensor Status 0° to -45°
30	OFF	OFF
29	OFF	OFF
28	OFF	OFF
27	OFF	OFF
26	OFF	OFF
25	OFF	OFF
24	OFF	OFF
23	OFF	OFF
22	OFF	OFF
21	OFF	OFF
20	ON	ON
19	ON	ON
18	ON	ON
17	ON	ON
16	ON	ON
15	ON	ON
14	ON	ON
13	ON	ON
12	ON	ON
11	ON	ON
10	ON	ON
9	ON	ON
8	ON	ON
7	ON	ON
6	ON	ON
5	ON	ON
4	ON	ON
3	ON	ON
2	ON	ON
1	ON	ON
0	ON	ON


15.6 Power Reduction per Air-interface

The following graphs show the detailed conducted power and the distance from the DUT to the flat phantom for the Front side, Back side and Bottom side.


Front Side:

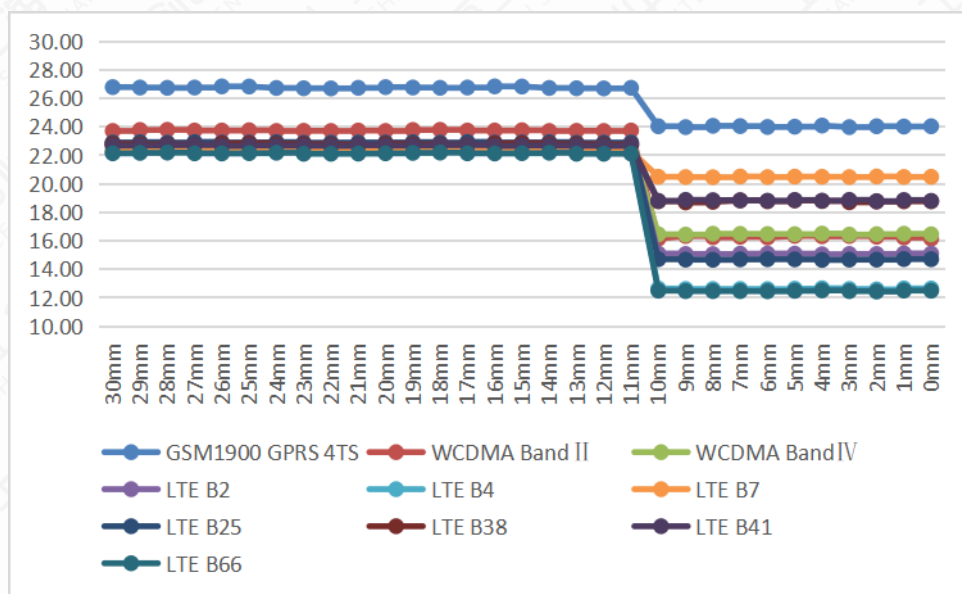

Back side:

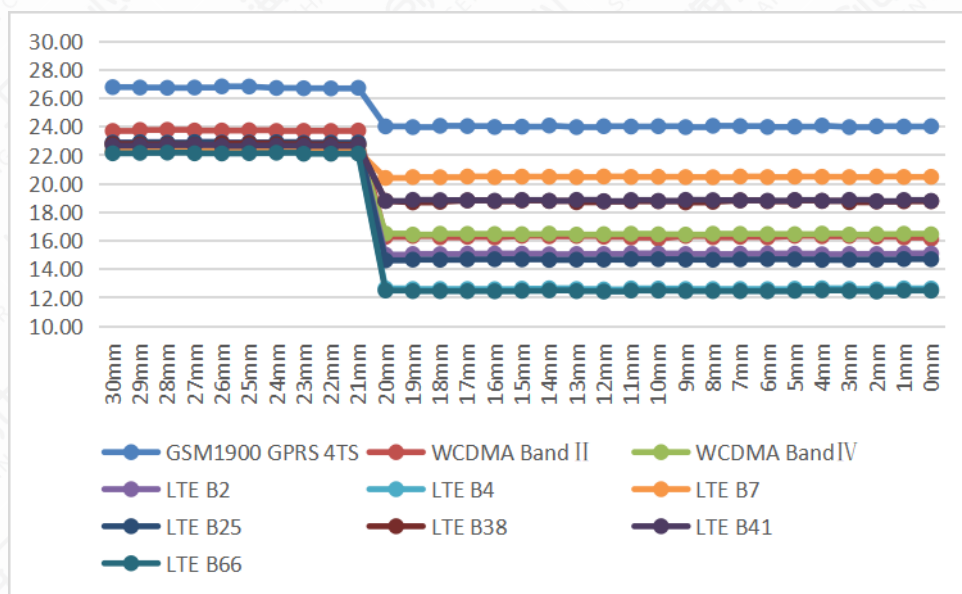

Bottom side:

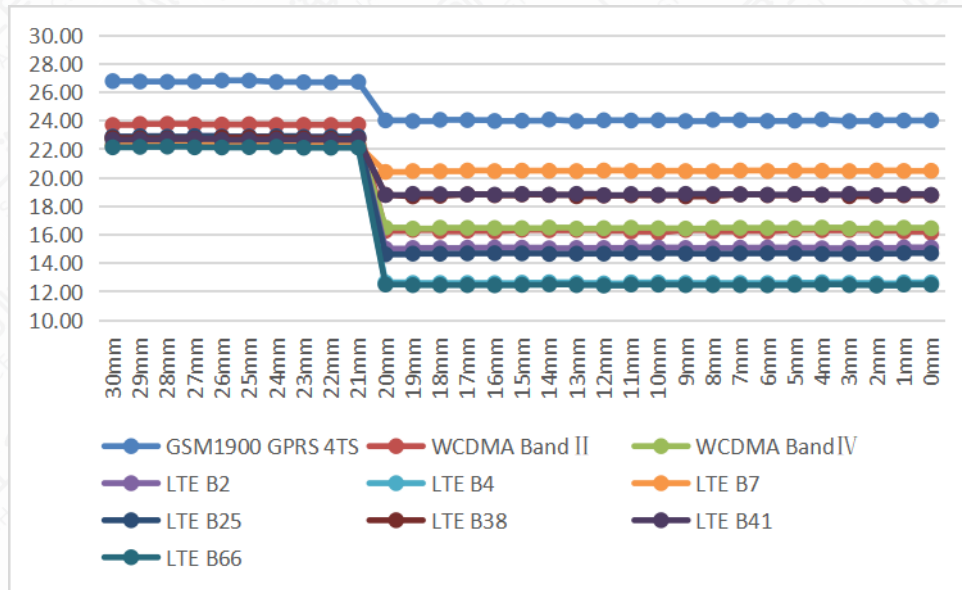

15.7 Proximity Sensor Coverage Area

Proximity Sensor Coverage Area of not request when the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

Annex A: Measurement Data

A.1 SAR Graph Results

LTE B12 10MHz 1RB 25offset Front Mode High 5mm

Date/Time: 2023/10/26

Electronics: DAE4 Sn1244

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.876 \text{ S/m}$; $\epsilon_r = 42.345$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 21.5°C Liquid Temperature: 20.4°C

Communication System: LTE Band 12 Professional 900MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(11.03, 11.03, 11.03) @ 711 MHz

LTE B12 10MHz 1RB 25offset Front Mode High 5mm/Area Scan (7x11x1):

Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.659 W/kg

LTE B12 10MHz 1RB 25offset Front Mode High 5mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.47 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.926 W/kg

SAR(1 g) = 0.489 W/kg ; SAR(10 g) = 0.296 W/kg

Maximum of SAR (measured) = 0.717 W/kg

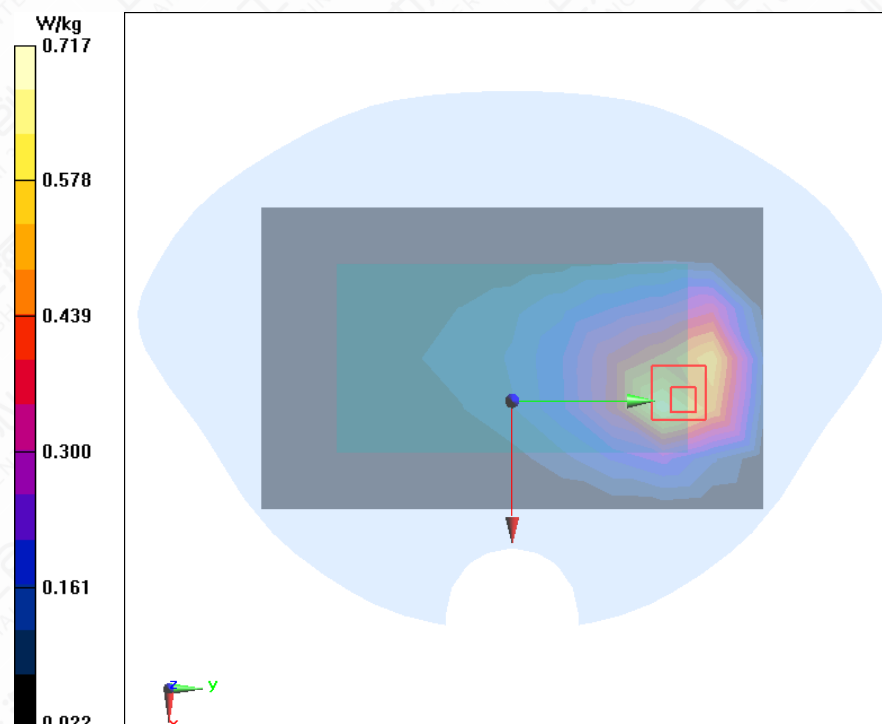


Figure A.1-1 LTE B12 10MHz 1RB 25offset Front Mode High 5mm

LTE B12 10MHz 1RB 25offset Front Mode Low 0mm

Date/Time: 2023/10/26

Electronics: DAE4 Sn1244

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 42.377$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 21.5°C Liquid Temperature: 20.4°C

Communication System: LTE Band 12 Professional 900MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(11.03, 11.03, 11.03) @ 704 MHz

LTE B12 10MHz 1RB 25offset Front Mode Low 0mm/Area Scan (7x11x1):

Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 1.20 W/kg

LTE B12 10MHz 1RB 25offset Front Mode Low 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.42 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 4.43 W/kg

SAR(1 g) = 1.25 W/kg ; SAR(10 g) = 0.599 W/kg

Maximum of SAR (measured) = 2.82 W/kg

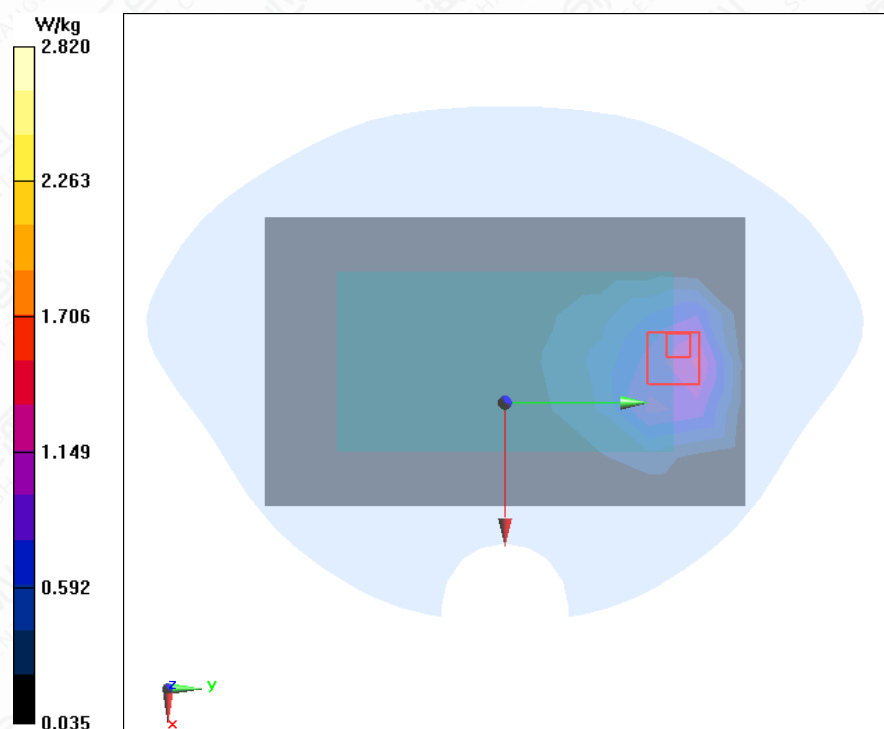


Figure A.1-2 LTE B12 10MHz 1RB 25offset Front Mode Low 0mm

LTE B25 20MHz 1RB 50offset Bottom Mode High 5mm

Date/Time: 2023/11/14

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1905 \text{ MHz}$; $\sigma = 1.394 \text{ S/m}$; $\epsilon_r = 39.978$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 21.4°C Liquid Temperature: 20.3°C

Communication System: LTE B25 1900MHz; Frequency: 1905 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(8.67, 8.67, 8.67) @ 1905 MHz

LTE B25 20MHz 1RB 50offset Bottom Mode High 5mm/Area Scan (6x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.793 W/kg

LTE B25 20MHz 1RB 50offset Bottom Mode High 5mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.76 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.542 W/kg ; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 0.884 W/kg

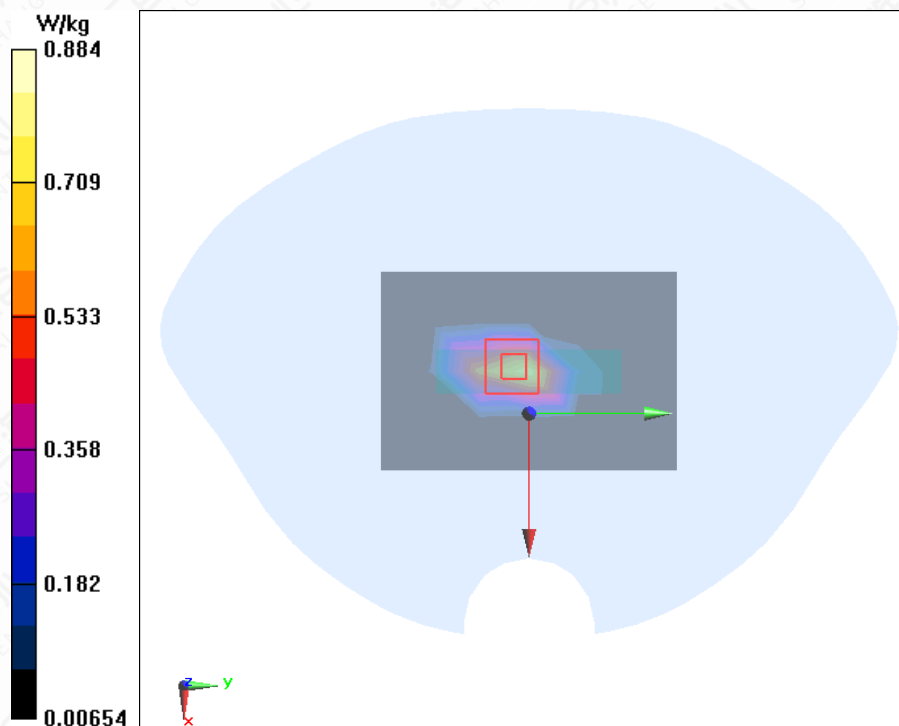


Figure A.1-3 LTE B25 20MHz 1RB 50offset Bottom Mode High 5mm

LTE B25 20MHz 1RB 50offset Bottom Mode High 0mm

Date/Time: 2023/11/14

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1905 \text{ MHz}$; $\sigma = 1.394 \text{ S/m}$; $\epsilon_r = 39.978$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 21.4°C Liquid Temperature: 20.3°C

Communication System: LTE B25 1900MHz; Frequency: 1905 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(8.67, 8.67, 8.67) @ 1905 MHz

LTE B25 20MHz 1RB 50offset Bottom Mode High 0mm/Area Scan (6x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.17 W/kg

LTE B25 20MHz 1RB 50offset Bottom Mode High 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 39.30 V/m ; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 1.22 W/kg ; SAR(10 g) = 0.519 W/kg

Maximum of SAR (measured) = 2.20 W/kg

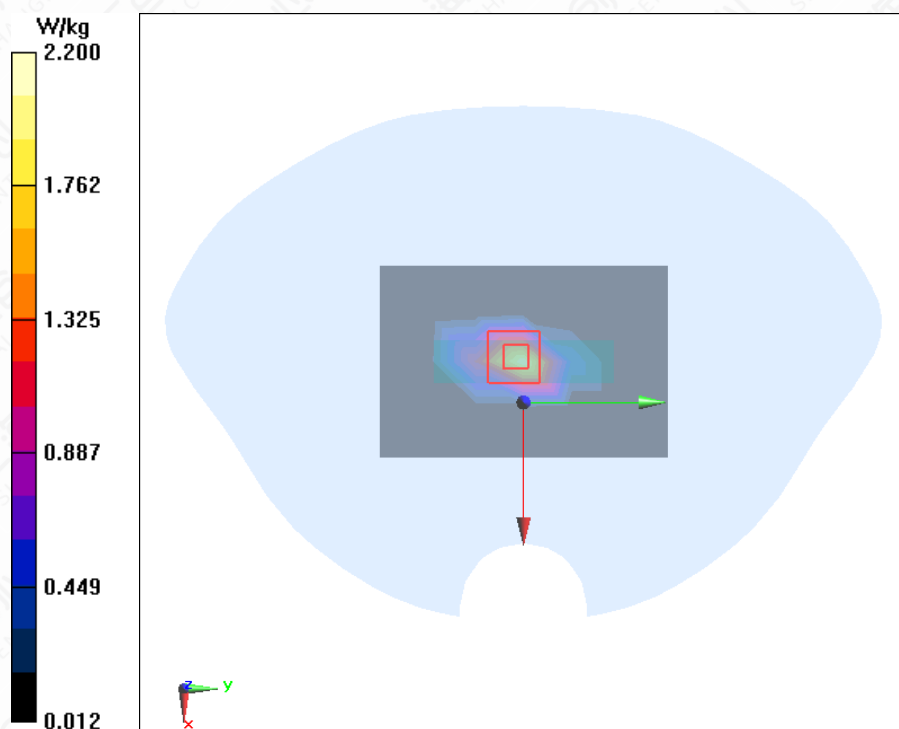


Figure A.1-4 LTE B25 20MHz 1RB 50offset Bottom Mode High 0mm

LTE B26 15MHz 1RB 38offset Front Mode Middle 5mm

Date/Time: 2023/11/8

Electronics: DAE4 Sn1244

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.876$; $\rho = 1000$ kg/m³

Ambient Temperature: 21.5°C Liquid Temperature: 20.4°C

Communication System: LTE B26 900MHz; Frequency: 831.5 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(10.66, 10.66, 10.66) @ 831.5 MHz

LTE B26 15MHz 1RB 38offset Front Mode Middle 5mm/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.690 W/kg

LTE B26 15MHz 1RB 38offset Front Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.05 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.843 W/kg

SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.333 W/kg

Maximum of SAR (measured) = 0.690 W/kg

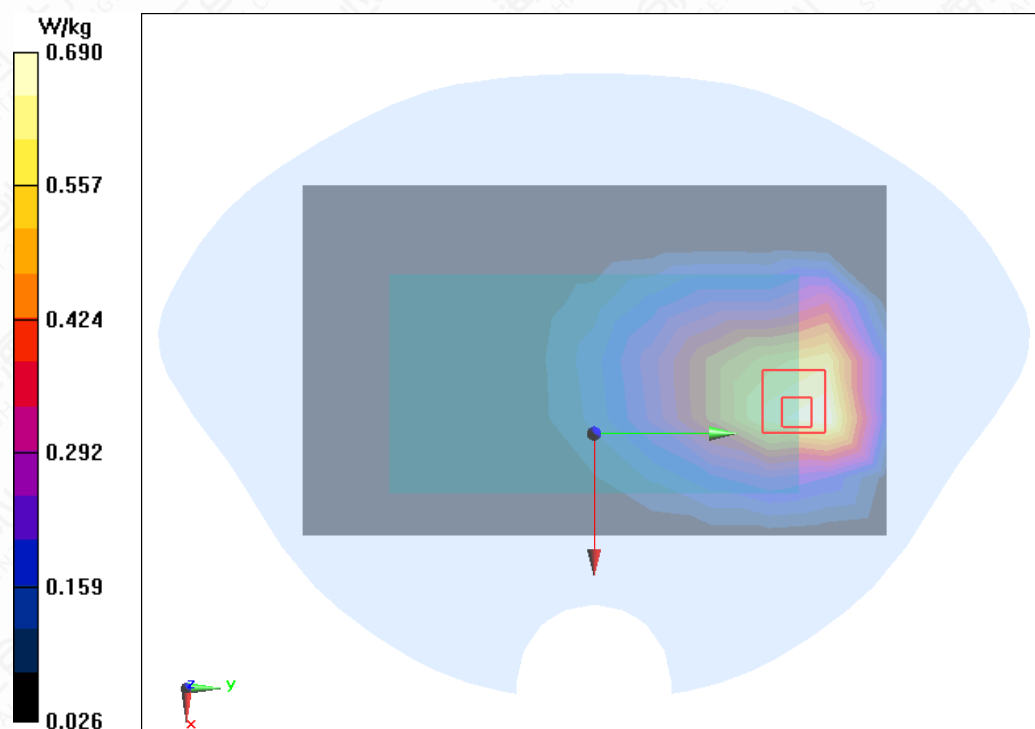


Figure A.1-5 LTE B26 15MHz 1RB 38offset Front Mode Middle 5mm

LTE B26 15MHz 1RB 38offset Front Mode Middle 0mm

Date/Time: 2023/11/8

Electronics: DAE4 Sn1244

Medium parameters used (interpolated): $f = 831.5 \text{ MHz}$; $\sigma = 0.919 \text{ S/m}$; $\epsilon_r = 41.876$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 21.5°C Liquid Temperature: 20.4°C

Communication System: LTE B26 900MHz; Frequency: 831.5 MHz ; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(10.66, 10.66, 10.66) @ 831.5 MHz

LTE B26 15MHz 1RB 38offset Front Mode Middle 0mm/Area Scan (7x11x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.86 W/kg

LTE B26 15MHz 1RB 38offset Front Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.22 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.75 W/kg

SAR(1 g) = 0.991 W/kg ; SAR(10 g) = 0.491 W/kg

Maximum of SAR (measured) = 1.86 W/kg

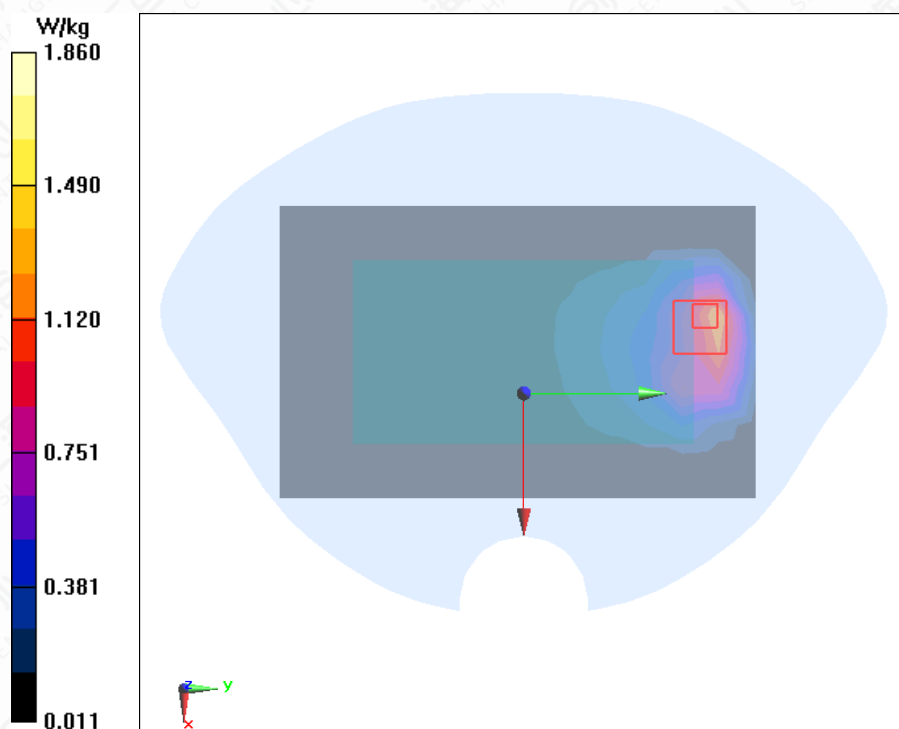


Figure A.1-6 LTE B26 15MHz 1RB 38offset Front Mode Middle 0mm