

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 1 of 83

FCC SAR TEST REPORT

Application No.: SUCR2504000337AT
Applicant: Shanghai Sunmi Technology Co.,Ltd.
Manufacturer: Shanghai Sunmi Technology Co.,Ltd.
Product Name: Smart POS System
Model No.(EUT): T6F0A
Trade Mark: SUNMI
FCC ID: 2AH25T6F0A
Standards: FCC 47CFR §2.1093
Date of Receipt: 2025-04-20
Date of Test: 2025-05-05 to 2025-05-16
Date of Issue: 2025-05-16
Test conclusion: **PASS ***

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708
Rev.: 01
Page: 2 of 83

Revision Record			
Version	Description	Date	Remark
01	Original	2025/05/16	/

Authorized for issue by:		
Prepared By		
		Leon Liu/ Project Manager
Approved By		
		Nick Hu/ Technical Manager



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 3 of 83

TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)			
	Head	Body-worn	Hotspot	Product specific 10g SAR
GSM850	<0.10	0.25	0.25	/
GSM1900	0.16	0.30	0.30	/
WCDMA Band II	0.29	0.49	0.49	/
WCDMA Band IV	0.33	1.08	1.08	/
WCDMA Band V	0.13	0.54	0.54	/
LTE Band 7	<0.10	0.64	0.84	/
LTE Band 12(17)	0.12	0.30	0.30	/
LTE Band 13	0.20	0.39	0.39	/
LTE Band 14	0.18	0.38	0.38	/
LTE Band 25(2)	0.27	0.44	0.44	/
LTE Band 26(5)	<0.10	0.31	0.31	/
LTE Band 30	0.24	0.65	0.65	/
LTE Band 40	<0.10	0.23	0.23	/
LTE Band 41(38)	<0.10	0.92	1.05	/
LTE Band 66(4)	0.30	0.85	0.85	/
LTE Band 71	0.12	0.32	0.32	/
WI-FI (2.4GHz)	0.47	0.30	0.59	/
WI-FI (5GHz)	0.41	0.51	0.74	2.92
BT	0.13	<0.10	0.18	/
NFC	/	/	/	<0.10
SAR Limited(W/kg)	1.6			4.0
Maximum Simultaneous Transmission SAR (W/kg)				
Scenario	Head	Body-worn	Hotspot	Product specific 10g SAR
Sum SAR	0.80	1.51	1.51	2.92
SPLSR	/	0.01	0.01	/
SPLSR Limited	0.04			0.1

CONTENTS

1 General Information	6
1.1 Details of Client	6
1.2 Test Location	6
1.3 Test Facility	6
1.4 General Description of EUT	7
1.4.1 DUT Antenna Locations (Back View)	9
1.5 Test Specification	10
1.6 RF exposure limits	11
2 Laboratory Environment	12
3 SAR Measurements System Configuration	13
3.1 The SAR Measurement System	13
3.2 Isotropic E-field Probe EX3DV4	15
3.3 Data Acquisition Electronics (DAE)	16
3.4 SAM Twin Phantom	16
3.5 ELI Phantom	17
3.6 Device Holder for Transmitters	18
3.7 Measurement procedure	19
3.7.1 Scanning procedure	19
3.7.2 Data Storage	21
3.7.3 Data Evaluation by SEMCAD	21
4 SAR measurement variability and uncertainty	23
4.1 SAR measurement variability	23
4.2 SAR measurement uncertainty	23
5 Description of Test Position	24
5.1 The Head Test Position	24
5.1.1 SAM Phantom Shape	24
5.1.2 EUT constructions	25
5.1.3 Definition of the “cheek” position	25
5.1.4 Definition of the “tilted” position	25
5.2 The Body Test Position	27
5.2.1 Body-worn exposure conditions	27
5.2.2 Wireless Router exposure conditions	28
5.3 Extremity exposure conditions	28
6 SAR System Verification Procedure	29
6.1 Tissue Simulate Liquid	29
6.1.1 Recipes for Tissue Simulate Liquid	29
6.1.2 Measurement for Tissue Simulate Liquid	30
6.2 SAR System Check	31
6.2.1 Justification for Extended SAR Dipole Calibrations	32
6.2.2 Summary System Check Result(s)	33
6.2.3 Detailed System Check Results	33
7 Test Configuration	34
7.1 Operation Configurations	34
7.1.1 GSM Test Configuration	34



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 5 of 83

7.1.2 WCDMA Test Configuration	35
7.1.3 WiFi Test Configuration	38
7.1.4 Duty cycle.....	38
7.1.5 BT Test Configuration.....	45
7.1.6 LTE Test Configuration.....	46
8 Test Result	49
8.1 Measurement of RF Conducted Power.....	49
8.2 Measurement of SAR Data.....	50
8.2.1 SAR Result of GSM850	51
8.2.2 SAR Result of GSM1900	52
8.2.3 SAR Result of WCDMA Band II	53
8.2.4 SAR Result of WCDMA Band IV.....	54
8.2.5 SAR Result of WCDMA Band V.....	55
8.2.6 SAR Result of LTE Band 7	56
8.2.7 SAR Result of LTE Band 12	57
8.2.8 SAR Result of LTE Band 13	58
8.2.9 SAR Result of LTE Band 14	59
8.2.10 SAR Result of LTE Band 25	60
8.2.11 SAR Result of LTE Band 26	61
8.2.12 SAR Result of LTE Band 30	62
8.2.13 SAR Result of LTE Band 40	63
8.2.14 SAR Result of LTE Band 41	64
8.2.15 SAR Result of LTE Band 66	66
8.2.16 SAR Result of LTE Band 71	67
8.2.17 SAR Result of WIFI 2.4G	68
8.2.18 SAR Result of WIFI 5G.....	69
8.2.19 SAR Result of BT	71
8.2.20 SAR Result of NFC.....	72
8.3 Multiple Transmitter Evaluation	73
8.3.1 Simultaneous SAR test evaluation.....	73
8.3.2 Simultaneous Transmission SAR Summation Scenario.....	74
8.3.3 SPLSR Evaluation Analysis.....	80
9 Equipment list	82
10 Calibration certificate	83
11 Photographs.....	83
Appendix A: Detailed System Check Results	83
Appendix B: Detailed Test Results	83
Appendix C: Calibration certificate.....	83
Appendix D: Photographs	83
Appendix E: Conducted RF Output Power.....	83



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 6 of 83

1 General Information

1.1 Details of Client

Applicant:	Shanghai Sunmi Technology Co.,Ltd
Address:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer:	Shanghai Sunmi Technology Co.,Ltd
Address:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China

1.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test Engineer:	Xu Bert,Liu Leon

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 0031225543

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 7 of 83

1.4 General Description of EUT

Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Name:	Smart POS System		
Model No.(EUT):	T6F0A		
Trade Mark:	SUNMI		
Product Phase:	Production Unit		
Hardware Version:	V2.1		
Software Version:	P3_AIR-MGL_user_4.1.1_10_20250416		
IMEI:	1# 862908070002317/862908070008736 2# 862908070003778/862908070009072		
Device Operating Configurations :			
Modulation Mode:	GSM: GMSK, 8PSK; WCDMA: QPSK; LTE: QPSK,16QAM WIFI: DSSS, OFDM; BT: GFSK, $\pi/4$ DQPSK,8DPSK NFC: ASK		
Device Class:	B		
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12
HSDPA UE Category:	24	HSUPA UE Category	7
Power Class	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control “all 1”(WCDMA Band)		
	3, tested with power control Max Power(LTE Band)		
Frequency Bands:	Band	Tx (MHz)	
	GSM850	824 - 849	
	GSM1900	1850 - 1910	
	WCDMA Band II	1850 - 1910	
	WCDMA Band IV	1710 - 1755	
	WCDMA Band V	824 - 849	
	LTE Band 2	1850 - 1910	
	LTE Band 4	1710 - 1755	
	LTE Band 5	824 - 849	
	LTE Band 7	2500 - 2570	
	LTE Band 12	699 - 716	
	LTE Band 13	777 - 787	
	LTE Band 14	788 - 798	
	LTE Band 17	704 - 716	
	LTE Band 25	1850 - 1915	
	LTE Band 26	814 - 849	
	LTE Band 30	2305 - 2315	
	LTE Band 38	2570 - 2620	
	LTE Band 40	2300 - 2400	
	LTE Band 41	2496 - 2690	
	LTE Band 66	1710 - 1780	
	LTE Band 71	663-698	
	Bluetooth	2400 - 2483.5	
	Wi-Fi 2.4G	2402 - 2462	
	Wi-Fi 5G	5150 - 5250	
		5250 - 5350	

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 8 of 83

		5470 - 5725
		5725 - 5850
	NFC	13.56MHz
RF Cable:	☒ Provided by the applicant ☐ Provided by the laboratory	
Battery Information:	Model:	HPPC 1ICP9/59/57
	Normal Voltage:	3.87V
	Rated capacity:	5000mAh
	Manufacturer:	Guangdong Highpower New Energy Technology Co., Ltd
Note: *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion. 1) According to TCB workshop October,2014 RF Exposure Procedures Update (Overlapping Bands): SAR for LTE Band 2 (Frequency range:1850 - 1910 MHz)/LTE Band 4 (Frequency range:1710 - 1755 MHz)/LTE Band 5 (Frequency range:824 - 849 MHz)/LTE Band 17 (Frequency range:704-716 MHz)/LTE Band 38 (Frequency range:2570 - 2620 MHz) is respectively covered by LTE Band25 (Frequency range:1850 - 1915 MHz)/LTE Band66 (Frequency range:1710 - 1780 MHz)/LTE Band26 (Frequency range:814 - 849 MHz)/LTE Band12 (Frequency range:699 - 716 MHz)/ LTE Band41 (Frequency range:2496 - 2690 MHz) due to similar frequency range, same maximum tune up limit and same channel bandwidth. 2) For LTE band 4/5/12/13/17/26/30/38/71 that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing. Remark: As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.		



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 9 of 83

1.4.1 DUT Antenna Locations (Back View)

The DUT Antenna Locations can be referred to Appendix D

Ant	Band:
Ant1	WIFI5G
Ant2	WIFI2.4G BT
Ant4	GSM: G850/1900 WCDMA: B2/4/5 LTE: B2/4/5/7/12/13/14/17/25/26/30/38/40/41/66/71

Note: According to the distance between LTE/WCDMA/GSM&WIFI&BT antennas and the sides of the EUT we can draw the conclusion that:

EUT Sides for SAR Testing							
Mode	Exposure Condition	Front	Back	Left	Right	Top	Bottom
Ant 1	Hotspot/Product specific 10g SAR	Yes	Yes	No	Yes	Yes	No
Ant 2	Hotspot/Product specific 10g SAR	Yes	Yes	No	Yes	Yes	No
Ant 4	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	Yes	No	Yes

Note:

1) When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 10 of 83

1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC/IEEE 62209-1528:2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices –Part 1528: Human models, instrumentation, and procedures(Frequency range of 4 MHz to 10 GHz)
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D06	Hotspot Mode SAR v02r01
KDB 248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB 648474 D04	Handset SAR v01r03
KDB 447498 D04	General RF Exposure Guidance v01
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 11 of 83

1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708
Rev.: 01
Page: 12 of 83

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

Table 1: The Ambient Conditions



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 13 of 83

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.

The DASY system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.


The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 14 of 83

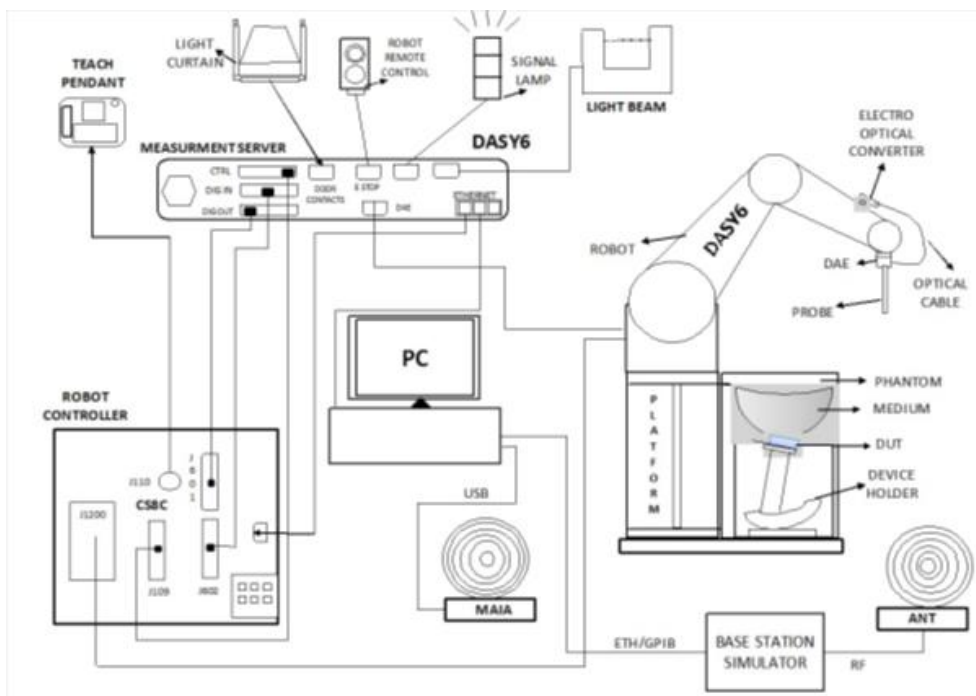

F-1. SAR Measurement System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY6 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY52 SAR and higher, EASY4/MRI

3.3 Data Acquisition Electronics (DAE)

Model	DAE	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEEE 1528 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 32mm*32mm*30mm ($f \leq 2\text{GHz}$), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points ($f \leq 2\text{GHz}$), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 20 of 83

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcpi$$

With V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcpi = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 22 of 83

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

$Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

4.2 SAR measurement uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

5 Description of Test Position

5.1 The Head Test Position

5.1.1 SAM Phantom Shape




F-3. Front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only—procedures in this recommended practice are intended primarily for the phantom setup.


Note: The centre strip including the nose region has a different thickness tolerance.



F-4. Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

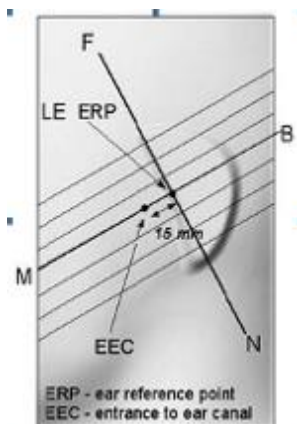


F-5. Close-up side view of phantom, showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

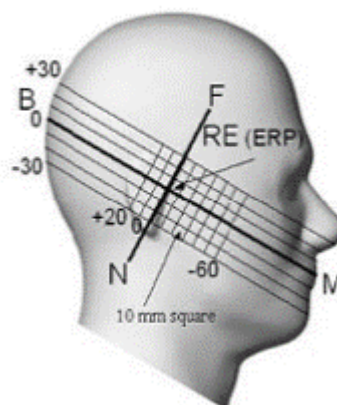


F-6. Side view of the phantom showing relevant markings and seven cross-sectional plane locations

5.1.2 EUT constructions

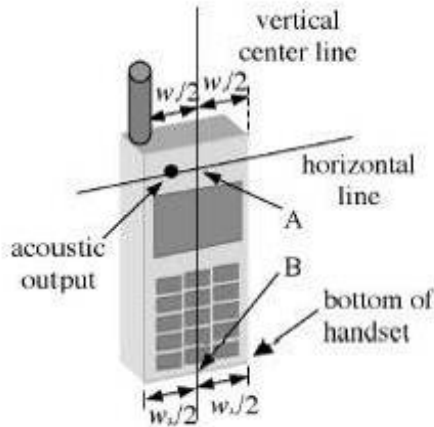

F-7. Handset vertical and horizontal reference lines-“fixed case”

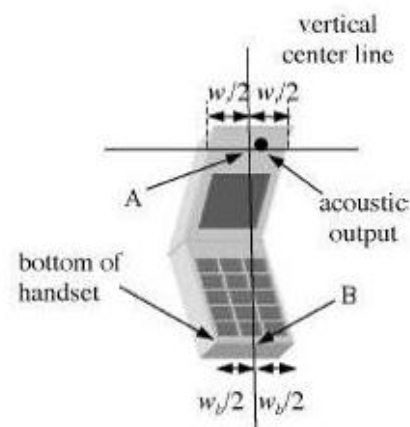



F-8. Handset vertical and horizontal reference lines-“clam-shell case”

5.1.3 Definition of the “cheek” position


- Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom (“initial position”). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE.
- Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until telephone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

5.1.4 Definition of the “tilted” position

- Position the device in the “cheek” position described above;
- While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

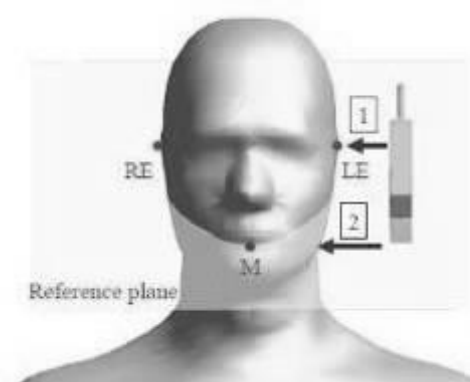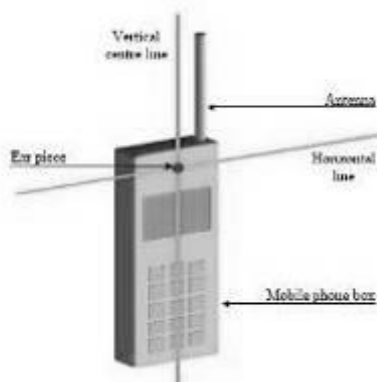

F-9. Definition of the reference lines and points, on the phone and on the phantom and initial position

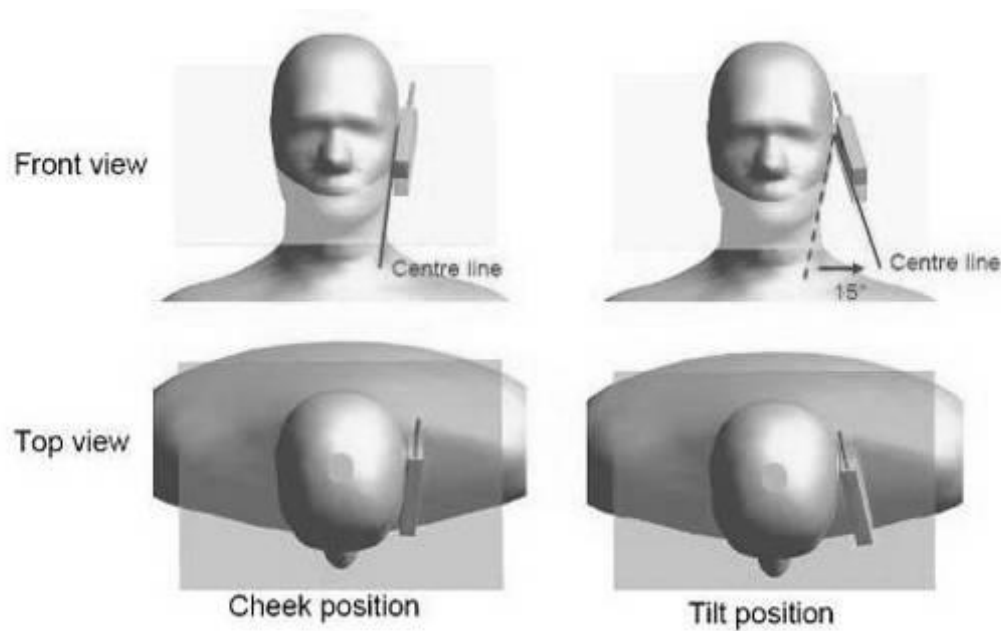

F-10. "Cheek" and "tilt" positions of the mobile phone on the left side

5.2 The Body Test Position


5.2.1 Body-worn exposure conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

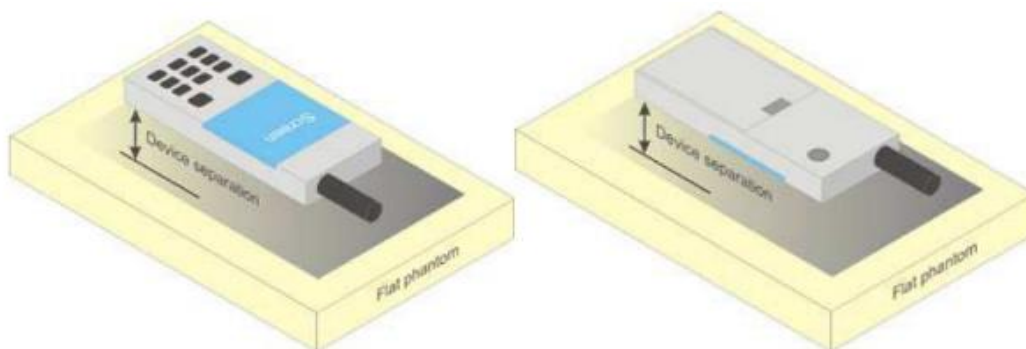

F-11. Test positions for body-worn devices.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 28 of 83

5.2.2 Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than $9 \text{ cm} \times 5 \text{ cm}$, a test separation distance of 5 mm is required.

5.3 Extremity exposure conditions

Per FCC KDB 648474 D04, for smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as "Phablet". The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Due to the SAR result, only the WIFI 5G and NFC need to test with 0mm for the Product Specific 10-g SAR, the others are not required.

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99+% Pure Sodium Chloride Sucrose: 98+% Pure Sucrose Water: De-ionized, 16 MΩ ⁺ resistivity HEC: Hydroxyethyl Cellulose Tween: Polyoxyethylene (20) sorbitan monolaurate					
HSL13MHz is composed of the following ingredients: Water: 50-90% Non-ionic detergents: 5-50% NaCl: 0-2% Preservative: 0.03-0.1% HSL5GHz is composed of the following ingredients: Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%					

Table 2: Recipe of Tissue Simulate Liquid



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 30 of 83

6.1.2 Measurement for Tissue Simulate Liquid


The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm 2^{\circ}\text{C}$.

Tissue Type	Measured Frequency (MHz)	Measured Tissue		Target Tissue ($\pm 5\%$)		Deviation (Within $\pm 5\%$)		Liquid Temp. ($^{\circ}\text{C}$)	Test Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
13 Head	13	56.3	0.761	55.0	0.75	2.36%	1.47%	22.6	2025-05-16
750 Head	750	41.3	0.872	41.9	0.89	-1.43%	-2.02%	22.8	2025-05-05
835 Head	835	41.1	0.889	41.5	0.90	-0.96%	-1.22%	22.7	2025-05-07
1800 Head	1800	40.2	1.36	40.0	1.40	0.50%	-2.86%	22.9	2025-05-09
1950 Head	1950	39.8	1.37	40.0	1.40	-0.50%	-2.14%	22.5	2025-05-10
2300 Head	2300	38.5	1.63	39.5	1.67	-2.53%	-2.40%	22.4	2025-05-12
2450 Head	2450	39.3	1.84	39.2	1.80	0.26%	2.22%	22.7	2025-05-13
2600 Head	2600	38.8	2.01	39.0	1.96	-0.51%	2.55%	22.9	2025-05-14
5250 Head	5250	36.7	4.76	35.9	4.71	2.23%	1.06%	22.6	2025-05-15
5600 Head	5600	35.8	5.06	35.5	5.07	0.85%	-0.20%	22.6	2025-05-16
5750 Head	5750	35.3	5.18	35.4	5.22	-0.28%	-0.77%	22.6	2025-05-16

Table 3: Measurement result of Tissue electric parameters.

6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^{\circ}\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 ± 0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

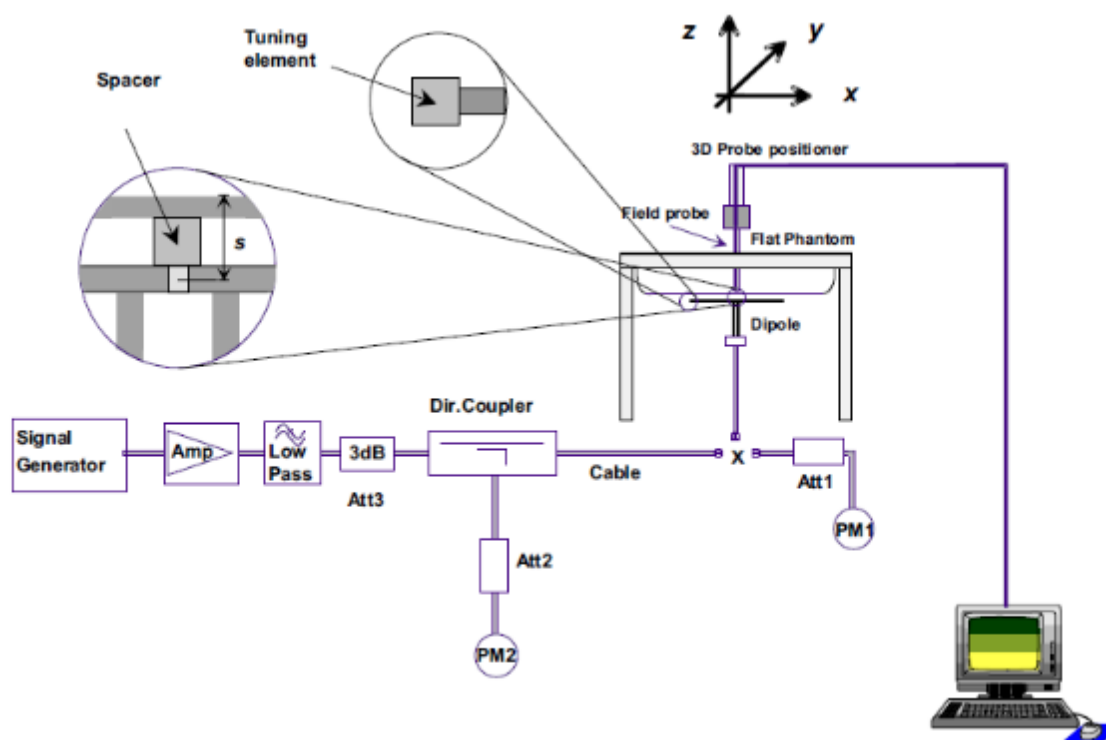

F-12. the microwave circuit arrangement used for SAR system check



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 32 of 83

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 20% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 33 of 83

6.2.2 Summary System Check Result(s)

Validation Kit	Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Deviation (Within ±10%)		Liquid Temp. (°C)	Test Date
	1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1- g(W/kg)	10- g(W/kg)		
CLA13_Head	0.105	0.068	0.42	0.27	0.421	0.266	-0.24%	2.26%	22.6	2025-05-16
D750V3_Head	2.21	1.53	8.84	6.12	8.54	5.8	3.51%	5.52%	22.8	2025-05-05
D835V2_Head	2.29	1.52	9.16	6.08	9.6	6.16	-4.58%	-1.30%	22.7	2025-05-07
D1800V2_Head	9.27	5.08	37.08	20.32	38.9	20.7	-4.68%	-1.84%	22.9	2025-05-09
D1950V3_Head	9.97	5.29	39.88	21.16	40.4	20.8	-1.29%	1.73%	22.5	2025-05-10
D2300V2_Head	12.1	5.76	48.40	23.04	49	23.5	-1.22%	-1.96%	22.4	2025-05-12
D2450V2_Head	13.2	6.28	52.80	25.12	52.7	24.6	0.19%	2.11%	22.7	2025-05-13
D2600V2_Head	13.3	6.12	53.20	24.48	55.2	24.7	-3.62%	-0.89%	22.9	2025-05-14
Validation Kit	Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Deviation (Within ±10%)		Liquid Temp. (°C)	Test Date
	1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1- g(W/kg)	10- g(W/kg)		
D5GHzV2_5.25G_Head	7.36	2.18	73.60	21.80	77.20	21.90	-4.66%	-0.46%	22.6	2025-05-15
D5GHzV2_5.6G_Head	8.14	2.35	81.40	23.50	81.10	22.80	0.37%	3.07%	22.6	2025-05-16
D5GHzV2_5.75G_Head	7.88	2.25	78.80	22.50	77.80	21.70	1.29%	3.69%	22.6	2025-05-16

Table 4: SAR System Check Result.

6.2.3 Detailed System Check Results

Please see the Appendix A

7 Test Configuration

7.1 Operation Configurations

7.1.1 GSM Test Configuration

SAR tests for GSM frequency band, a communication link is set up with a base station by air link. Using Radio Communication Analyzer, the power lever is set to “5” or “0” in SAR of GSM frequency band. The tests in the GSM frequency band are performed in the mode of GPRS/EGPRS function.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power, the higher number time-slot configuration should be tested.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

Frame-averaged power = 10 x log (Burst-averaged power mW x Slot used / 8).

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 35 of 83

7.1.2 WCDMA Test Configuration

1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

3) Body SAR

SAR for body configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

4) HSDPA / HSUPA

RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest measured SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.5 W/kg, SAR measurement is not required for HSDPA / HSUPA.

a) HSDPA

HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in the following table. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	β_c	Bd	β_d (SF)	β_c/β_d	β_{hs}	CM(dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8$ Ahs = $\beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 8$ (Ahs=30/15) with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 7$ (Ahs=24/15) with $\beta_{hs} = 24/15 * \beta_c$.

Note3: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 36 of 83

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 5: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	MaximumHS-DSCH Codes Received	Minimum Inter-TTI Interval	MaximumHS-DSCH TransportBlockBits/HS-DSCH TTI	TotalSoft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 6: HSDPA UE category

b) HSUPA

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should be configured according to the values indicated below as well as other applicable procedures described in the WCDMA Handset and Release 5 HSUPA Data Device sections of 3G device.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 37 of 83

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c/β_d ^o	$\beta_{hs}^{(1)}$ ^o	β_{ec} ^o	β_{ed} ^o	β_c (SF) ^o	β_{ed} (code) ^o	CM ⁽²⁾ (dB) ^o	MP R ^o (dB) ^o	AG ⁽⁴⁾ Inde ^o	E-TFC I ^o
1 ^o	11/15 ⁽³⁾	15/15 ⁽³⁾	64 ^o	11/15 ⁽³⁾	22/15 ^o	209/225 ^o	1039/225 ^o	4 ^o	1 ^o	1.0 ^o	0.0 ^o	20 ^o	75 ^o
2 ^o	6/15 ^o	15/15 ^o	64 ^o	6/15 ^o	12/15 ^o	12/15 ^o	94/75 ^o	4 ^o	1 ^o	3.0 ^o	2.0 ^o	12 ^o	67 ^o
3 ^o	15/15 ^o	9/15 ^o	64 ^o	15/9 ^o	30/15 ^o	30/15 ^o	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4 ^o	2 ^o	2.0 ^o	1.0 ^o	15 ^o	92 ^o
4 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	2/15 ^o	56/75 ^o	4 ^o	1 ^o	3.0 ^o	2.0 ^o	17 ^o	71 ^o
5 ^o	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64 ^o	15/15 ⁽⁴⁾	30/15 ^o	24/15 ^o	134/15 ^o	4 ^o	1 ^o	1.0 ^o	0.0 ^o	21 ^o	81 ^o
Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference ^o Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ ^o Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ ^o Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g ^o Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value. ^o													

Table 7: Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).						

Table 8: HSUPA UE category

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 38 of 83


7.1.3 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.1.4 Duty cycle


Wi-Fi 2.4GHz 802.11b:

Duty cycle= 98.47%

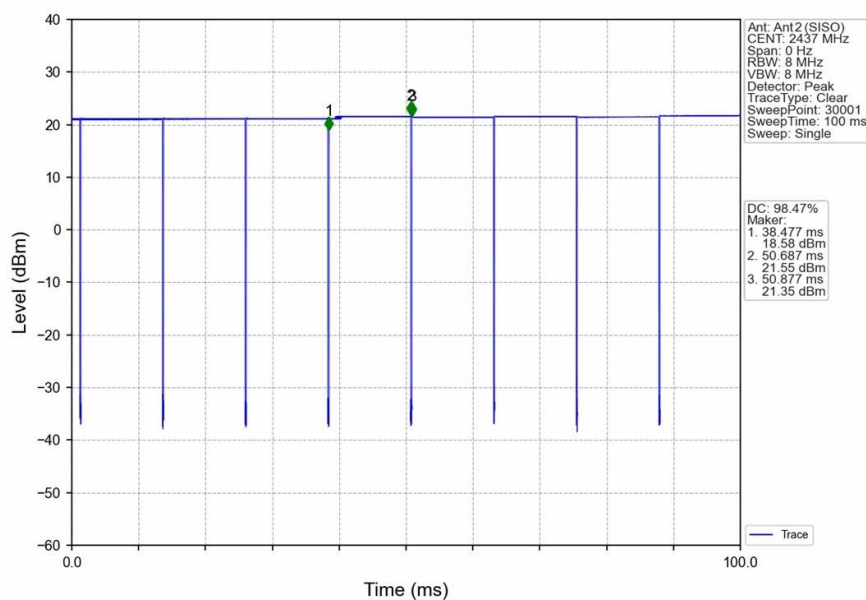

Wi-Fi 5GHz 802.11a:

Duty cycle=98.31%

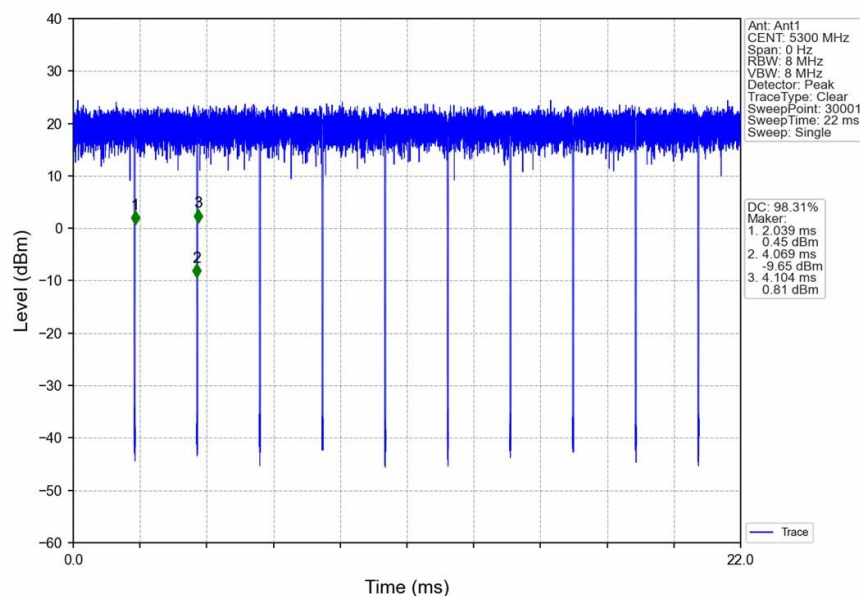




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708
Rev.: 01
Page: 39 of 83

Wi-Fi 5GHz 802.11ac VHT40:
Duty cycle=96.37%

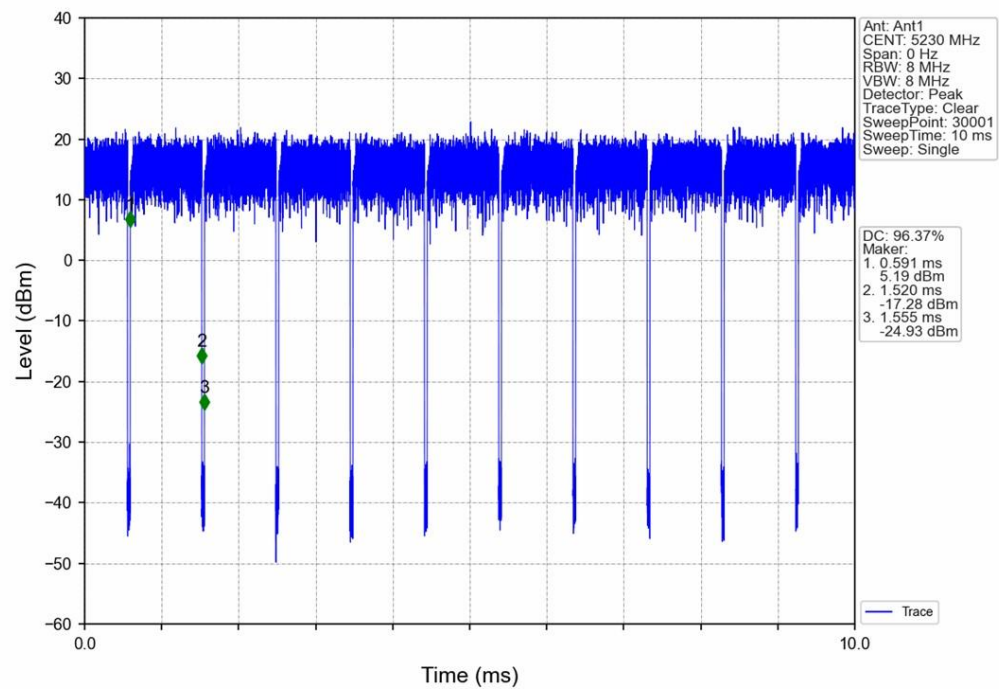

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 40 of 83

7.1.4.1 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.1.4.2 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 41 of 83

7.1.4.3 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace “initial test configuration” with “all tested higher output power configurations”

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 42 of 83

7.1.4.4 2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 43 of 83

7.1.4.5 5 GHz WiFi SAR Procedures

- **U-NII-1 and U-NII-2A Bands**

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

- **U-NII-2C and U-NII-3 Bands**

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 44 of 83

OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
 - a) The channel closest to mid-band frequency is selected for SAR measurement.
 - b) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

• SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708
Rev.: 01
Page: 45 of 83

7.1.5 BT Test Configuration

For the Bluetooth SAR tests, a communication link is set up with the test mode software for BT mode test. Bluetooth USES frequency hopping technology to divide the transmitted data into packets and transmit the packets respectively through 79 designated Bluetooth channels, frequency hops at 1600 hops/second per the Bluetooth standard, the EUT is operated at the RF continuous emission mode.

BT DH5 Duty Cycle=76.86%



7.1.6 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The Anritsu MT8820C was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.


TDD LTE test consideration

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Frame structure type 2:

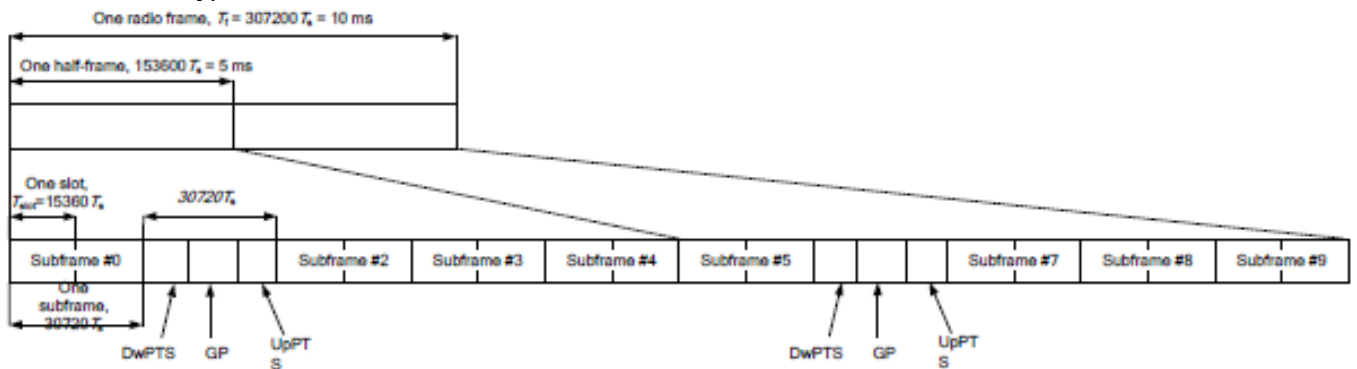

Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592.Ts	2192.Ts	2560.Ts	7680.Ts	2192.Ts	2560.Ts
1	19760.Ts			20480.Ts		
2	21952.Ts			23040.Ts		
3	24144.Ts			25600.Ts		
4	26336.Ts			7680.Ts		
5	6592.Ts	4384.Ts	5120.Ts	20480.Ts	4384.Ts	5120.Ts
6	19760.Ts			23040.Ts		
7	21952.Ts			25600.Ts		
8	24144.Ts			-	-	-
9	13168.Ts			-	-	-

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 47 of 83

Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth/Transmission bandwidth						MPR (dB)
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 48 of 83

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 49 of 83

8 Test Result

8.1 Measurement of RF Conducted Power

The detailed power data can be referred to Appendix E Conducted RF Output Power.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 50 of 83

8.2 Measurement of SAR Data

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB 447498 D04, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) The device does not support DTM function.
- 4) For WiFi 5G, U-NII-2A and U-NII-2C band does not support hotspot function.
- 5) For WiFi SAR test, as the highest reported SAR is smaller than 1.2 W/kg , and the tune-up of the other 802.11 modes are not higher than SAR measurement mode, therefore the adjusted SAR is $\leq 1.2\text{ W/kg}$ for other 802.11 modes, SAR test for the other 802.11 modes are not required. For Product specific 10gSAR the highest reported SAR is smaller than 3.0 W/kg , SAR test for the other 802.11 modes are also not required.
- 6) NFC is different from the working scenario of WWAN/WIFI(Head/Body-worn/Hotspot) and does not participate in the simultaneous transmission.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 51 of 83

8.2.1 SAR Result of GSM850

Ant 4 Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data										
Left cheek	GPRS 4TS	190/836.6	1:2.075	0.072	0.04	29.48	30.50	1.265	0.091	22.7
Left tilted	GPRS 4TS	190/836.6	1:2.075	0.034	-0.09	29.48	30.50	1.265	0.043	22.7
Right cheek	GPRS 4TS	190/836.6	1:2.075	0.032	0.14	29.48	30.50	1.265	0.040	22.7
Right tilted	GPRS 4TS	190/836.6	1:2.075	0.014	-0.16	29.48	30.50	1.265	0.018	22.7
Body worn Test data(Separate 10mm)										
Front side	GPRS 4TS	190/836.6	1:2.075	0.070	0.06	29.48	30.50	1.265	0.089	22.7
Back side	GPRS 4TS	190/836.6	1:2.075	0.196	-0.02	29.48	30.50	1.265	0.248	22.7
Hotspot Test data(Separate 10mm)										
Front side	GPRS 4TS	190/836.6	1:2.075	0.070	0.06	29.48	30.50	1.265	0.089	22.7
Back side	GPRS 4TS	190/836.6	1:2.075	0.196	-0.02	29.48	30.50	1.265	0.248	22.7
Left side	GPRS 4TS	190/836.6	1:2.075	0.074	0.09	29.48	30.50	1.265	0.094	22.7
Right side	GPRS 4TS	190/836.6	1:2.075	0.013	0.04	29.48	30.50	1.265	0.016	22.7
Bottom side	GPRS 4TS	190/836.6	1:2.075	0.016	0.02	29.48	30.50	1.265	0.020	22.7

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 52 of 83

8.2.2 SAR Result of GSM1900

Ant 4 Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data										
Left cheek	GPRS 4TS	661/1880	1:2.075	0.132	0.02	26.57	27.50	1.239	0.164	22.5
Left tilted	GPRS 4TS	661/1880	1:2.075	0.056	0.04	26.57	27.50	1.239	0.069	22.5
Right cheek	GPRS 4TS	661/1880	1:2.075	0.066	0.09	26.57	27.50	1.239	0.082	22.5
Right tilted	GPRS 4TS	661/1880	1:2.075	0.030	0.00	26.57	27.50	1.239	0.037	22.5
Body worn Test data(Separate 10mm)										
Front side	GPRS 4TS	661/1880	1:2.075	0.131	-0.14	26.57	27.50	1.239	0.162	22.5
Back side	GPRS 4TS	661/1880	1:2.075	0.238	-0.04	26.57	27.50	1.239	0.295	22.5
Hotspot Test data(Separate 10mm)										
Front side	GPRS 4TS	661/1880	1:2.075	0.131	-0.14	26.57	27.50	1.239	0.162	22.5
Back side	GPRS 4TS	661/1880	1:2.075	0.238	-0.04	26.57	27.50	1.239	0.295	22.5
Left side	GPRS 4TS	661/1880	1:2.075	0.184	0.15	26.57	27.50	1.239	0.228	22.5
Right side	GPRS 4TS	661/1880	1:2.075	0.015	-0.16	26.57	27.50	1.239	0.019	22.5
Bottom side	GPRS 4TS	661/1880	1:2.075	0.146	-0.15	26.57	27.50	1.239	0.181	22.5

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 53 of 83

8.2.3 SAR Result of WCDMA Band II

Ant 4 Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data										
Left cheek	RMC	9400/1880	1:1	0.231	0.03	24.09	25.00	1.233	0.285	22.5
Left tilted	RMC	9400/1880	1:1	0.206	-0.17	24.09	25.00	1.233	0.254	22.5
Right cheek	RMC	9400/1880	1:1	0.190	-0.08	24.09	25.00	1.233	0.234	22.5
Right tilted	RMC	9400/1880	1:1	0.105	0.11	24.09	25.00	1.233	0.129	22.5
Body worn Test data(Separate 10mm)										
Front side	RMC	9400/1880	1:1	0.365	-0.09	24.09	25.00	1.233	0.450	22.5
Back side	RMC	9400/1880	1:1	0.395	0.01	24.09	25.00	1.233	0.487	22.5
Hotspot Test data(Separate 10mm)										
Front side	RMC	9400/1880	1:1	0.365	-0.09	24.09	25.00	1.233	0.450	22.5
Back side	RMC	9400/1880	1:1	0.395	0.01	24.09	25.00	1.233	0.487	22.5
Left side	RMC	9400/1880	1:1	0.327	0.03	24.09	25.00	1.233	0.403	22.5
Right side	RMC	9400/1880	1:1	0.107	0.08	24.09	25.00	1.233	0.132	22.5
Bottom side	RMC	9400/1880	1:1	0.319	-0.15	24.09	25.00	1.233	0.393	22.5

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 54 of 83

8.2.4 SAR Result of WCDMA Band IV

Ant 4 Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data										
Left cheek	RMC	1412/1732.4	1:1	0.251	0.07	23.81	25.00	1.315	0.330	22.9
Left tilted	RMC	1412/1732.4	1:1	0.116	-0.17	23.81	25.00	1.315	0.153	22.9
Right cheek	RMC	1412/1732.4	1:1	0.207	-0.11	23.81	25.00	1.315	0.272	22.9
Right tilted	RMC	1412/1732.4	1:1	0.102	-0.09	23.81	25.00	1.315	0.134	22.9
Body worn Test data(Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.521	0.09	23.81	25.00	1.315	0.685	22.9
Back side	RMC	1412/1732.4	1:1	0.819	-0.01	23.81	25.00	1.315	1.077	22.9
Back side-Repeated	RMC	1412/1732.4	1:1	0.807	0.06	23.81	25.00	1.315	1.061	22.9
Back side	RMC	1312/1712.4	1:1	0.741	0.03	23.59	25.00	1.384	1.025	22.9
Back side	RMC	1513/1752.6	1:1	0.782	0.09	23.74	25.00	1.337	1.045	22.9
Hotspot Test data(Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.521	0.09	23.81	25.00	1.315	0.685	22.9
Back side	RMC	1412/1732.4	1:1	0.819	-0.01	23.81	25.00	1.315	1.077	22.9
Back side-Repeated	RMC	1412/1732.4	1:1	0.807	0.06	23.81	25.00	1.315	1.061	22.9
Back side	RMC	1312/1712.4	1:1	0.741	0.03	23.59	25.00	1.384	1.025	22.9
Back side	RMC	1513/1752.6	1:1	0.782	0.09	23.74	25.00	1.337	1.045	22.9
Left side	RMC	1412/1732.4	1:1	0.569	-0.13	23.81	25.00	1.315	0.748	22.9
Right side	RMC	1412/1732.4	1:1	0.164	-0.19	23.81	25.00	1.315	0.216	22.9
Bottom side	RMC	1412/1732.4	1:1	0.435	0.18	23.81	25.00	1.315	0.572	22.9

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Back side 10mm	1412/1732.4	0.819	0.807	1.015	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 55 of 83

8.2.5 SAR Result of WCDMA Band V

Ant 4 Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data										
Left cheek	RMC	4182/836.4	1:1	0.098	0.02	23.69	25.00	1.352	0.133	22.7
Left tilted	RMC	4182/836.4	1:1	0.042	-0.14	23.69	25.00	1.352	0.057	22.7
Right cheek	RMC	4182/836.4	1:1	0.085	-0.18	23.69	25.00	1.352	0.115	22.7
Right tilted	RMC	4182/836.4	1:1	0.038	0.12	23.69	25.00	1.352	0.051	22.7
Body worn Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.246	-0.02	23.69	25.00	1.352	0.333	22.7
Back side	RMC	4182/836.4	1:1	0.402	-0.05	23.69	25.00	1.352	0.544	22.7
Hotspot Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.246	-0.02	23.69	25.00	1.352	0.333	22.7
Back side	RMC	4182/836.4	1:1	0.402	-0.05	23.69	25.00	1.352	0.544	22.7
Left side	RMC	4182/836.4	1:1	0.207	-0.10	23.69	25.00	1.352	0.280	22.7
Right side	RMC	4182/836.4	1:1	0.213	0.12	23.69	25.00	1.352	0.288	22.7
Bottom side	RMC	4182/836.4	1:1	0.175	0.11	23.69	25.00	1.352	0.237	22.7

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 56 of 83

8.2.6 SAR Result of LTE Band 7

Ant 4 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB)											
Left cheek	20	QPSK 1_0	21100/2535	1:1	0.054	0.04	22.93	24.00	1.279	0.069	22.9
Left tilted	20	QPSK 1_0	21100/2535	1:1	0.038	0.05	22.93	24.00	1.279	0.049	22.9
Right cheek	20	QPSK 1_0	21100/2535	1:1	0.049	-0.02	22.93	24.00	1.279	0.063	22.9
Right tilted	20	QPSK 1_0	21100/2535	1:1	0.027	0.17	22.93	24.00	1.279	0.035	22.9
Head Test Data (50%RB)											
Left cheek	20	QPSK 50_0	21100/2535	1:1	0.046	-0.05	21.99	23.00	1.262	0.058	22.9
Left tilted	20	QPSK 50_0	21100/2535	1:1	0.031	-0.16	21.99	23.00	1.262	0.039	22.9
Right cheek	20	QPSK 50_0	21100/2535	1:1	0.043	0.15	21.99	23.00	1.262	0.054	22.9
Right tilted	20	QPSK 50_0	21100/2535	1:1	0.022	-0.06	21.99	23.00	1.262	0.028	22.9
Body worn Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1_0	21100/2535	1:1	0.323	-0.11	22.93	24.00	1.279	0.413	22.9
Back side	20	QPSK 1_0	21100/2535	1:1	0.499	-0.01	22.93	24.00	1.279	0.638	22.9
Body worn Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50_0	21100/2535	1:1	0.268	-0.05	21.99	23.00	1.262	0.338	22.9
Back side	20	QPSK 50_0	21100/2535	1:1	0.415	0.13	21.99	23.00	1.262	0.524	22.9
Hotspot Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1_0	21100/2535	1:1	0.323	-0.11	22.93	24.00	1.279	0.413	22.9
Back side	20	QPSK 1_0	21100/2535	1:1	0.499	-0.01	22.93	24.00	1.279	0.638	22.9
Left side	20	QPSK 1_0	21100/2535	1:1	0.654	-0.09	22.93	24.00	1.279	0.837	22.9
Left side	20	QPSK 1_0	20850/2510	1:1	0.608	0.07	22.79	24.00	1.321	0.803	22.9
Left side	20	QPSK 1_0	21350/2560	1:1	0.617	0.09	22.84	24.00	1.306	0.806	22.9
Right side	20	QPSK 1_0	21100/2535	1:1	0.136	-0.17	22.93	24.00	1.279	0.174	22.9
Bottom side	20	QPSK 1_0	21100/2535	1:1	0.188	-0.02	22.93	24.00	1.279	0.241	22.9
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50_0	21100/2535	1:1	0.268	-0.05	21.99	23.00	1.262	0.338	22.9
Back side	20	QPSK 50_0	21100/2535	1:1	0.415	0.13	21.99	23.00	1.262	0.524	22.9
Left side	20	QPSK 50_0	21100/2535	1:1	0.544	-0.13	21.99	23.00	1.262	0.686	22.9
Right side	20	QPSK 50_0	21100/2535	1:1	0.114	0.19	21.99	23.00	1.262	0.144	22.9
Bottom side	20	QPSK 50_0	21100/2535	1:1	0.157	0.18	21.99	23.00	1.262	0.198	22.9
Hotspot Test data (Separate 10mm 100%RB)											
Left side	20	QPSK 100_0	21100/2535	1:1	0.525	0.06	21.94	23.00	1.276	0.670	22.9

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 57 of 83

8.2.7 SAR Result of LTE Band 12

Ant 4 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB)											
Left cheek	10	QPSK 1_0	23095/707.5	1:1	0.097	0.12	23.03	24.00	1.250	0.121	22.8
Left tilted	10	QPSK 1_0	23095/707.5	1:1	0.055	0.14	23.03	24.00	1.250	0.069	22.8
Right cheek	10	QPSK 1_0	23095/707.5	1:1	0.092	-0.01	23.03	24.00	1.250	0.115	22.8
Right tilted	10	QPSK 1_0	23095/707.5	1:1	0.056	-0.05	23.03	24.00	1.250	0.070	22.8
Head Test Data (50%RB)											
Left cheek	10	QPSK 25_0	23095/707.5	1:1	0.077	-0.10	22.09	23.00	1.233	0.095	22.8
Left tilted	10	QPSK 25_0	23095/707.5	1:1	0.040	0.00	22.09	23.00	1.233	0.049	22.8
Right cheek	10	QPSK 25_0	23095/707.5	1:1	0.071	0.10	22.09	23.00	1.233	0.088	22.8
Right tilted	10	QPSK 25_0	23095/707.5	1:1	0.041	0.14	22.09	23.00	1.233	0.051	22.8
Body worn Test data (Separate 10mm 1RB)											
Front side	10	QPSK 1_0	23095/707.5	1:1	0.150	-0.14	23.03	24.00	1.250	0.188	22.8
Back side	10	QPSK 1_0	23095/707.5	1:1	0.237	-0.01	23.03	24.00	1.250	0.296	22.8
Body worn Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25_0	23095/707.5	1:1	0.122	0.11	22.09	23.00	1.233	0.150	22.8
Back side	10	QPSK 25_0	23095/707.5	1:1	0.202	0.09	22.09	23.00	1.233	0.249	22.8
Hotspot Test data (Separate 10mm 1RB)											
Front side	10	QPSK 1_0	23095/707.5	1:1	0.150	-0.14	23.03	24.00	1.250	0.188	22.8
Back side	10	QPSK 1_0	23095/707.5	1:1	0.237	-0.01	23.03	24.00	1.250	0.296	22.8
Left side	10	QPSK 1_0	23095/707.5	1:1	0.153	-0.07	23.03	24.00	1.250	0.191	22.8
Right side	10	QPSK 1_0	23095/707.5	1:1	0.132	-0.14	23.03	24.00	1.250	0.165	22.8
Bottom side	10	QPSK 1_0	23095/707.5	1:1	0.088	0.01	23.03	24.00	1.250	0.110	22.8
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25_0	23095/707.5	1:1	0.122	0.11	22.09	23.00	1.233	0.150	22.8
Back side	10	QPSK 25_0	23095/707.5	1:1	0.202	0.09	22.09	23.00	1.233	0.249	22.8
Left side	10	QPSK 25_0	23095/707.5	1:1	0.124	-0.04	22.09	23.00	1.233	0.153	22.8
Right side	10	QPSK 25_0	23095/707.5	1:1	0.110	-0.06	22.09	23.00	1.233	0.136	22.8
Bottom side	10	QPSK 25_0	23095/707.5	1:1	0.074	0.16	22.09	23.00	1.233	0.091	22.8

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 58 of 83

8.2.8 SAR Result of LTE Band 13

Ant 4 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB)											
Left cheek	10	QPSK 1_0	23230/782	1:1	0.152	0.05	22.89	24.00	1.291	0.196	22.8
Left tilted	10	QPSK 1_0	23230/782	1:1	0.096	-0.12	22.89	24.00	1.291	0.124	22.8
Right cheek	10	QPSK 1_0	23230/782	1:1	0.142	-0.07	22.89	24.00	1.291	0.183	22.8
Right tilted	10	QPSK 1_0	23230/782	1:1	0.088	-0.10	22.89	24.00	1.291	0.114	22.8
Head Test Data (50%RB)											
Left cheek	10	QPSK 25_0	23230/782	1:1	0.096	-0.16	22.04	23.00	1.247	0.120	22.8
Left tilted	10	QPSK 25_0	23230/782	1:1	0.060	0.18	22.04	23.00	1.247	0.075	22.8
Right cheek	10	QPSK 25_0	23230/782	1:1	0.091	-0.16	22.04	23.00	1.247	0.114	22.8
Right tilted	10	QPSK 25_0	23230/782	1:1	0.053	-0.17	22.04	23.00	1.247	0.066	22.8
Body worn Test data (Separate 10mm 1RB)											
Front side	10	QPSK 1_0	23230/782	1:1	0.273	0.11	22.89	24.00	1.291	0.353	22.8
Back side	10	QPSK 1_0	23230/782	1:1	0.298	0.05	22.89	24.00	1.291	0.385	22.8
Body worn Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25_0	23230/782	1:1	0.216	0.03	22.04	23.00	1.247	0.269	22.8
Back side	10	QPSK 25_0	23230/782	1:1	0.237	0.16	22.04	23.00	1.247	0.296	22.8
Hotspot Test data (Separate 10mm 1RB)											
Front side	10	QPSK 1_0	23230/782	1:1	0.273	0.11	22.89	24.00	1.291	0.353	22.8
Back side	10	QPSK 1_0	23230/782	1:1	0.298	0.05	22.89	24.00	1.291	0.385	22.8
Left side	10	QPSK 1_0	23230/782	1:1	0.156	0.14	22.89	24.00	1.291	0.201	22.8
Right side	10	QPSK 1_0	23230/782	1:1	0.189	-0.12	22.89	24.00	1.291	0.244	22.8
Bottom side	10	QPSK 1_0	23230/782	1:1	0.132	-0.19	22.89	24.00	1.291	0.170	22.8
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25_0	23230/782	1:1	0.216	0.03	22.04	23.00	1.247	0.269	22.8
Back side	10	QPSK 25_0	23230/782	1:1	0.237	0.16	22.04	23.00	1.247	0.296	22.8
Left side	10	QPSK 25_0	23230/782	1:1	0.124	-0.06	22.04	23.00	1.247	0.155	22.8
Right side	10	QPSK 25_0	23230/782	1:1	0.150	-0.07	22.04	23.00	1.247	0.187	22.8
Bottom side	10	QPSK 25_0	23230/782	1:1	0.105	0.15	22.04	23.00	1.247	0.131	22.8

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 59 of 83

8.2.9 SAR Result of LTE Band 14

Ant 4 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB)											
Left cheek	10	QPSK 1_0	23330/793	1:1	0.144	0.03	22.98	24.00	1.265	0.182	22.8
Left tilted	10	QPSK 1_0	23330/793	1:1	0.090	-0.17	22.98	24.00	1.265	0.114	22.8
Right cheek	10	QPSK 1_0	23330/793	1:1	0.140	-0.01	22.98	24.00	1.265	0.177	22.8
Right tilted	10	QPSK 1_0	23330/793	1:1	0.089	0.03	22.98	24.00	1.265	0.113	22.8
Head Test Data (50%RB)											
Left cheek	10	QPSK 25_0	23330/793	1:1	0.113	-0.14	22.04	23.00	1.247	0.141	22.8
Left tilted	10	QPSK 25_0	23330/793	1:1	0.067	0.15	22.04	23.00	1.247	0.084	22.8
Right cheek	10	QPSK 25_0	23330/793	1:1	0.108	0.14	22.04	23.00	1.247	0.135	22.8
Right tilted	10	QPSK 25_0	23330/793	1:1	0.062	0.09	22.04	23.00	1.247	0.077	22.8
Body worn Test data (Separate 10mm 1RB)											
Front side	10	QPSK 1_0	23330/793	1:1	0.269	0.06	22.98	24.00	1.265	0.340	22.8
Back side	10	QPSK 1_0	23330/793	1:1	0.301	-0.04	22.98	24.00	1.265	0.381	22.8
Body worn Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25_0	23330/793	1:1	0.214	0.02	22.04	23.00	1.247	0.267	22.8
Back side	10	QPSK 25_0	23330/793	1:1	0.239	-0.02	22.04	23.00	1.247	0.298	22.8
Hotspot Test data (Separate 10mm 1RB)											
Front side	10	QPSK 1_0	23330/793	1:1	0.269	0.06	22.98	24.00	1.265	0.340	22.8
Back side	10	QPSK 1_0	23330/793	1:1	0.301	-0.04	22.98	24.00	1.265	0.381	22.8
Left side	10	QPSK 1_0	23330/793	1:1	0.156	-0.03	22.98	24.00	1.265	0.197	22.8
Right side	10	QPSK 1_0	23330/793	1:1	0.200	-0.17	22.98	24.00	1.265	0.253	22.8
Bottom side	10	QPSK 1_0	23330/793	1:1	0.144	0.17	22.98	24.00	1.265	0.182	22.8
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25_0	23330/793	1:1	0.214	0.02	22.04	23.00	1.247	0.267	22.8
Back side	10	QPSK 25_0	23330/793	1:1	0.239	-0.02	22.04	23.00	1.247	0.298	22.8
Left side	10	QPSK 25_0	23330/793	1:1	0.124	0.09	22.04	23.00	1.247	0.155	22.8
Right side	10	QPSK 25_0	23330/793	1:1	0.158	0.13	22.04	23.00	1.247	0.197	22.8
Bottom side	10	QPSK 25_0	23330/793	1:1	0.114	-0.07	22.04	23.00	1.247	0.142	22.8

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 60 of 83

8.2.10 SAR Result of LTE Band 25

Ant 4 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB)											
Left cheek	20	QPSK 1_0	26365/1882.5	1:1	0.239	-0.12	23.41	24.00	1.146	0.274	22.5
Left tilted	20	QPSK 1_0	26365/1882.5	1:1	0.105	0.11	23.41	24.00	1.146	0.120	22.5
Right cheek	20	QPSK 1_0	26365/1882.5	1:1	0.224	0.15	23.41	24.00	1.146	0.257	22.5
Right tilted	20	QPSK 1_0	26365/1882.5	1:1	0.093	0.08	23.41	24.00	1.146	0.107	22.5
Head Test Data (50%RB)											
Left cheek	20	QPSK 50_0	26365/1882.5	1:1	0.188	0.17	22.29	23.00	1.178	0.221	22.5
Left tilted	20	QPSK 50_0	26365/1882.5	1:1	0.082	0.11	22.29	23.00	1.178	0.097	22.5
Right cheek	20	QPSK 50_0	26365/1882.5	1:1	0.178	-0.02	22.29	23.00	1.178	0.210	22.5
Right tilted	20	QPSK 50_0	26365/1882.5	1:1	0.074	0.03	22.29	23.00	1.178	0.087	22.5
Body worn Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1_0	26365/1882.5	1:1	0.303	0.15	23.41	24.00	1.146	0.347	22.5
Back side	20	QPSK 1_0	26365/1882.5	1:1	0.388	0.05	23.41	24.00	1.146	0.444	22.5
Body worn Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50_0	26365/1882.5	1:1	0.235	-0.03	22.29	23.00	1.178	0.277	22.5
Back side	20	QPSK 50_0	26365/1882.5	1:1	0.301	-0.09	22.29	23.00	1.178	0.354	22.5
Hotspot Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1_0	26365/1882.5	1:1	0.303	0.15	23.41	24.00	1.146	0.347	22.5
Back side	20	QPSK 1_0	26365/1882.5	1:1	0.388	0.05	23.41	24.00	1.146	0.444	22.5
Left side	20	QPSK 1_0	26365/1882.5	1:1	0.313	-0.10	23.41	24.00	1.146	0.359	22.5
Right side	20	QPSK 1_0	26365/1882.5	1:1	0.098	-0.13	23.41	24.00	1.146	0.112	22.5
Bottom side	20	QPSK 1_0	26365/1882.5	1:1	0.273	0.18	23.41	24.00	1.146	0.313	22.5
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50_0	26365/1882.5	1:1	0.235	-0.03	22.29	23.00	1.178	0.277	22.5
Back side	20	QPSK 50_0	26365/1882.5	1:1	0.301	-0.09	22.29	23.00	1.178	0.354	22.5
Left side	20	QPSK 50_0	26365/1882.5	1:1	0.243	0.03	22.29	23.00	1.178	0.286	22.5
Right side	20	QPSK 50_0	26365/1882.5	1:1	0.076	0.06	22.29	23.00	1.178	0.089	22.5
Bottom side	20	QPSK 50_0	26365/1882.5	1:1	0.212	-0.14	22.29	23.00	1.178	0.250	22.5

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 61 of 83

8.2.11 SAR Result of LTE Band 26

Ant 4 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB)											
Left cheek	15	QPSK 1_0	26865/831.5	1:1	0.074	0.03	23.51	24.00	1.119	0.083	22.7
Left tilted	15	QPSK 1_0	26865/831.5	1:1	0.052	0.07	23.51	24.00	1.119	0.058	22.7
Right cheek	15	QPSK 1_0	26865/831.5	1:1	0.060	0.13	23.51	24.00	1.119	0.067	22.7
Right tilted	15	QPSK 1_0	26865/831.5	1:1	0.042	0.13	23.51	24.00	1.119	0.047	22.7
Head Test Data (50%RB)											
Left cheek	15	QPSK 36_0	26865/831.5	1:1	0.059	-0.09	22.58	23.00	1.102	0.065	22.7
Left tilted	15	QPSK 36_0	26865/831.5	1:1	0.040	0.03	22.58	23.00	1.102	0.044	22.7
Right cheek	15	QPSK 36_0	26865/831.5	1:1	0.054	-0.08	22.58	23.00	1.102	0.059	22.7
Right tilted	15	QPSK 36_0	26865/831.5	1:1	0.034	0.18	22.58	23.00	1.102	0.037	22.7
Body worn Test data (Separate 10mm 1RB)											
Front side	15	QPSK 1_0	26865/831.5	1:1	0.180	0.18	23.51	24.00	1.119	0.201	22.7
Back side	15	QPSK 1_0	26865/831.5	1:1	0.277	-0.04	23.51	24.00	1.119	0.310	22.7
Body worn Test data (Separate 10mm 50%RB)											
Front side	15	QPSK 36_0	26865/831.5	1:1	0.166	-0.08	22.58	23.00	1.102	0.183	22.7
Back side	15	QPSK 36_0	26865/831.5	1:1	0.252	-0.02	22.58	23.00	1.102	0.278	22.7
Hotspot Test data (Separate 10mm 1RB)											
Front side	15	QPSK 1_0	26865/831.5	1:1	0.180	0.18	23.51	24.00	1.119	0.201	22.7
Back side	15	QPSK 1_0	26865/831.5	1:1	0.277	-0.04	23.51	24.00	1.119	0.310	22.7
Left side	15	QPSK 1_0	26865/831.5	1:1	0.074	0.03	23.51	24.00	1.119	0.083	22.7
Right side	15	QPSK 1_0	26865/831.5	1:1	0.109	-0.18	23.51	24.00	1.119	0.122	22.7
Bottom side	15	QPSK 1_0	26865/831.5	1:1	0.091	-0.19	23.51	24.00	1.119	0.102	22.7
Hotspot Test data (Separate 10mm 50%RB)											
Front side	15	QPSK 36_0	26865/831.5	1:1	0.166	-0.08	22.58	23.00	1.102	0.183	22.7
Back side	15	QPSK 36_0	26865/831.5	1:1	0.252	-0.02	22.58	23.00	1.102	0.278	22.7
Left side	15	QPSK 36_0	26865/831.5	1:1	0.066	-0.04	22.58	23.00	1.102	0.073	22.7
Right side	15	QPSK 36_0	26865/831.5	1:1	0.099	-0.06	22.58	23.00	1.102	0.109	22.7
Bottom side	15	QPSK 36_0	26865/831.5	1:1	0.086	-0.06	22.58	23.00	1.102	0.095	22.7

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 62 of 83

8.2.12 SAR Result of LTE Band 30

Ant 4 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB)											
Left cheek	10	QPSK 1_0	27710/2310	1:1	0.162	0.03	22.36	24.00	1.459	0.236	22.4
Left tilted	10	QPSK 1_0	27710/2310	1:1	0.058	-0.06	22.36	24.00	1.459	0.085	22.4
Right cheek	10	QPSK 1_0	27710/2310	1:1	0.119	0.10	22.36	24.00	1.459	0.174	22.4
Right tilted	10	QPSK 1_0	27710/2310	1:1	0.052	0.09	22.36	24.00	1.459	0.076	22.4
Head Test Data (50%RB)											
Left cheek	10	QPSK 25_0	27710/2310	1:1	0.132	-0.06	21.37	23.00	1.455	0.192	22.4
Left tilted	10	QPSK 25_0	27710/2310	1:1	0.047	-0.04	21.37	23.00	1.455	0.068	22.4
Right cheek	10	QPSK 25_0	27710/2310	1:1	0.096	-0.04	21.37	23.00	1.455	0.140	22.4
Right tilted	10	QPSK 25_0	27710/2310	1:1	0.041	-0.14	21.37	23.00	1.455	0.060	22.4
Body worn Test data (Separate 10mm 1RB)											
Front side	10	QPSK 1_0	27710/2310	1:1	0.442	0.01	22.36	24.00	1.459	0.645	22.4
Back side	10	QPSK 1_0	27710/2310	1:1	0.337	-0.19	22.36	24.00	1.459	0.492	22.4
Body worn Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25_0	27710/2310	1:1	0.351	0.11	21.37	23.00	1.455	0.511	22.4
Back side	10	QPSK 25_0	27710/2310	1:1	0.268	0.11	21.37	23.00	1.455	0.390	22.4
Hotspot Test data (Separate 10mm 1RB)											
Front side	10	QPSK 1_0	27710/2310	1:1	0.442	0.01	22.36	24.00	1.459	0.645	22.4
Back side	10	QPSK 1_0	27710/2310	1:1	0.337	-0.03	22.36	24.00	1.459	0.492	22.4
Left side	10	QPSK 1_0	27710/2310	1:1	0.381	0.03	22.36	24.00	1.459	0.556	22.4
Right side	10	QPSK 1_0	27710/2310	1:1	0.150	-0.10	22.36	24.00	1.459	0.219	22.4
Bottom side	10	QPSK 1_0	27710/2310	1:1	0.338	-0.04	22.36	24.00	1.459	0.493	22.4
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25_0	27710/2310	1:1	0.351	0.09	21.37	23.00	1.455	0.511	22.4
Back side	10	QPSK 25_0	27710/2310	1:1	0.268	-0.11	21.37	23.00	1.455	0.390	22.4
Left side	10	QPSK 25_0	27710/2310	1:1	0.303	0.08	21.37	23.00	1.455	0.441	22.4
Right side	10	QPSK 25_0	27710/2310	1:1	0.119	-0.15	21.37	23.00	1.455	0.173	22.4
Bottom side	10	QPSK 25_0	27710/2310	1:1	0.269	-0.12	21.37	23.00	1.455	0.392	22.4

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 63 of 83

8.2.13 SAR Result of LTE Band 40

Ant 4 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB)											
Left cheek	20	QPSK 1_0	39150/2350	1:1.58	0.065	0.05	23.49	24.00	1.125	0.073	22.4
Left tilted	20	QPSK 1_0	39150/2350	1:1.58	0.033	0.08	23.49	24.00	1.125	0.037	22.4
Right cheek	20	QPSK 1_0	39150/2350	1:1.58	0.054	0.13	23.49	24.00	1.125	0.061	22.4
Right tilted	20	QPSK 1_0	39150/2350	1:1.58	0.051	-0.09	23.49	24.00	1.125	0.057	22.4
Head Test Data (50%RB)											
Left cheek	20	QPSK 50_0	39150/2350	1:1.58	0.058	0.19	22.54	23.00	1.112	0.064	22.4
Left tilted	20	QPSK 50_0	39150/2350	1:1.58	0.029	-0.05	22.54	23.00	1.112	0.032	22.4
Right cheek	20	QPSK 50_0	39150/2350	1:1.58	0.047	0.19	22.54	23.00	1.112	0.052	22.4
Right tilted	20	QPSK 50_0	39150/2350	1:1.58	0.042	0.06	22.54	23.00	1.112	0.047	22.4
Body worn Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1_0	39150/2350	1:1.58	0.204	-0.04	23.49	24.00	1.125	0.229	22.4
Back side	20	QPSK 1_0	39150/2350	1:1.58	0.165	-0.13	23.49	24.00	1.125	0.186	22.4
Body worn Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50_0	39150/2350	1:1.58	0.169	0.15	22.54	23.00	1.112	0.188	22.4
Back side	20	QPSK 50_0	39150/2350	1:1.58	0.138	-0.04	22.54	23.00	1.112	0.153	22.4
Hotspot Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1_0	39150/2350	1:1.58	0.204	-0.04	23.49	24.00	1.125	0.229	22.4
Back side	20	QPSK 1_0	39150/2350	1:1.58	0.165	-0.13	23.49	24.00	1.125	0.186	22.4
Left side	20	QPSK 1_0	39150/2350	1:1.58	0.157	-0.04	23.49	24.00	1.125	0.177	22.4
Right side	20	QPSK 1_0	39150/2350	1:1.58	0.092	0.10	23.49	24.00	1.125	0.103	22.4
Bottom side	20	QPSK 1_0	39150/2350	1:1.58	0.172	0.17	23.49	24.00	1.125	0.193	22.4
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50_0	39150/2350	1:1.58	0.169	0.15	22.54	23.00	1.112	0.188	22.4
Back side	20	QPSK 50_0	39150/2350	1:1.58	0.138	-0.04	22.54	23.00	1.112	0.153	22.4
Left side	20	QPSK 50_0	39150/2350	1:1.58	0.130	-0.17	22.54	23.00	1.112	0.145	22.4
Right side	20	QPSK 50_0	39150/2350	1:1.58	0.076	0.00	22.54	23.00	1.112	0.084	22.4
Bottom side	20	QPSK 50_0	39150/2350	1:1.58	0.144	-0.04	22.54	23.00	1.112	0.160	22.4

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 64 of 83

8.2.14 SAR Result of LTE Band 41

Ant 4 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB)											
Left cheek	20	QPSK 1_0	40620/2593	1:1.58	0.024	-0.01	23.22	24.00	1.197	0.029	22.9
Left tilted	20	QPSK 1_0	40620/2593	1:1.58	0.014	-0.19	23.22	24.00	1.197	0.017	22.9
Right cheek	20	QPSK 1_0	40620/2593	1:1.58	0.005	-0.15	23.22	24.00	1.197	0.006	22.9
Right tilted	20	QPSK 1_0	40620/2593	1:1.58	0.002	0.11	23.22	24.00	1.197	0.002	22.9
Head Test Data (50%RB)											
Left cheek	20	QPSK 50_0	40620/2593	1:1.58	0.018	-0.01	22.26	23.00	1.186	0.021	22.9
Left tilted	20	QPSK 50_0	40620/2593	1:1.58	0.011	0.13	22.26	23.00	1.186	0.013	22.9
Right cheek	20	QPSK 50_0	40620/2593	1:1.58	0.004	-0.13	22.26	23.00	1.186	0.005	22.9
Right tilted	20	QPSK 50_0	40620/2593	1:1.58	0.002	0.06	22.26	23.00	1.186	0.002	22.9
Body worn Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1_0	40620/2593	1:1.58	0.344	0.01	23.22	24.00	1.197	0.412	22.9
Back side	20	QPSK 1_0	40620/2593	1:1.58	0.772	-0.08	23.22	24.00	1.197	0.924	22.9
Back side	20	QPSK 1_0	39750/2506	1:1.58	0.742	0.09	23.09	24.00	1.233	0.915	22.9
Back side	20	QPSK 1_0	40185/2549.5	1:1.58	0.721	0.01	23.01	24.00	1.256	0.906	22.9
Back side	20	QPSK 1_0	41055/2636.5	1:1.58	0.738	0.07	23.11	24.00	1.227	0.906	22.9
Back side	20	QPSK 1_0	41490/2680	1:1.58	0.749	0.03	23.15	24.00	1.216	0.911	22.9
Body worn Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50_0	40620/2593	1:1.58	0.292	-0.05	22.26	23.00	1.186	0.346	22.9
Back side	20	QPSK 50_0	40620/2593	1:1.58	0.657	0.06	22.26	23.00	1.186	0.779	22.9
Back side	20	QPSK 1_0	39750/2506	1:1.58	0.613	0.09	22.09	23.00	1.233	0.756	22.9
Back side	20	QPSK 1_0	40185/2549.5	1:1.58	0.607	-0.06	21.97	23.00	1.268	0.769	22.9
Back side	20	QPSK 1_0	41055/2636.5	1:1.58	0.621	0.02	22.06	23.00	1.242	0.771	22.9
Back side	20	QPSK 1_0	41490/2680	1:1.58	0.629	0.05	22.16	23.00	1.213	0.763	22.9
Body worn Test data (Separate 10mm 100%RB)											
Back side	20	QPSK 100_0	40620/2593	1:1.58	0.607	0.06	22.19	23.00	1.205	0.731	22.9
Hotspot Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1_0	40620/2593	1:1.58	0.344	0.01	23.22	24.00	1.197	0.412	22.9
Back side	20	QPSK 1_0	40620/2593	1:1.58	0.772	-0.08	23.22	24.00	1.197	0.924	22.9
Back side	20	QPSK 1_0	39750/2506	1:1.58	0.742	0.09	23.09	24.00	1.233	0.915	22.9
Back side	20	QPSK 1_0	40185/2549.5	1:1.58	0.721	0.01	23.01	24.00	1.256	0.906	22.9
Back side	20	QPSK 1_0	41055/2636.5	1:1.58	0.738	0.07	23.11	24.00	1.227	0.906	22.9
Back side	20	QPSK 1_0	41490/2680	1:1.58	0.749	0.03	23.15	24.00	1.216	0.911	22.9
Left side	20	QPSK 1_0	40620/2593	1:1.58	0.877	-0.05	23.22	24.00	1.197	1.050	22.9
Left side-Repeated	20	QPSK 1_0	40620/2593	1:1.58	0.859	0.03	23.22	24.00	1.197	1.028	22.9
Left side	20	QPSK 1_0	39750/2506	1:1.58	0.819	0.01	23.09	24.00	1.233	1.010	22.9
Left side	20	QPSK 1_0	40185/2549.5	1:1.58	0.789	0.08	23.01	24.00	1.256	0.991	22.9
Left side	20	QPSK 1_0	41055/2636.5	1:1.58	0.813	0.06	23.11	24.00	1.227	0.998	22.9
Left side	20	QPSK 1_0	41490/2680	1:1.58	0.829	0.05	23.15	24.00	1.216	1.008	22.9
Right side	20	QPSK 1_0	40620/2593	1:1.58	0.096	-0.03	23.22	24.00	1.197	0.115	22.9
Bottom side	20	QPSK 1_0	40620/2593	1:1.58	0.290	-0.14	23.22	24.00	1.197	0.347	22.9
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50_0	40620/2593	1:1.58	0.292	-0.05	22.26	23.00	1.186	0.346	22.9
Back side	20	QPSK 50_0	40620/2593	1:1.58	0.657	0.06	22.26	23.00	1.186	0.779	22.9

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 66 of 83

8.2.15 SAR Result of LTE Band 66

Ant 4 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB)											
Left cheek	20	QPSK 1_0	132322/1745	1:1	0.254	0.06	23.35	24.00	1.161	0.295	22.9
Left tilted	20	QPSK 1_0	132322/1745	1:1	0.139	0.18	23.35	24.00	1.161	0.161	22.9
Right cheek	20	QPSK 1_0	132322/1745	1:1	0.165	0.11	23.35	24.00	1.161	0.192	22.9
Right tilted	20	QPSK 1_0	132322/1745	1:1	0.107	0.03	23.35	24.00	1.161	0.124	22.9
Head Test Data (50%RB)											
Left cheek	20	QPSK 50_0	132322/1745	1:1	0.215	0.06	22.34	23.00	1.164	0.250	22.9
Left tilted	20	QPSK 50_0	132322/1745	1:1	0.120	0.15	22.34	23.00	1.164	0.140	22.9
Right cheek	20	QPSK 50_0	132322/1745	1:1	0.138	0.06	22.34	23.00	1.164	0.161	22.9
Right tilted	20	QPSK 50_0	132322/1745	1:1	0.088	0.15	22.34	23.00	1.164	0.102	22.9
Body worn Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1_0	132322/1745	1:1	0.448	-0.14	23.35	24.00	1.161	0.520	22.9
Back side	20	QPSK 1_0	132322/1745	1:1	0.733	-0.01	23.35	24.00	1.161	0.851	22.9
Back side	20	QPSK 1_0	132072/1720	1:1	0.682	0.09	23.16	24.00	1.213	0.828	22.9
Back side	20	QPSK 1_0	132572/1770	1:1	0.705	0.04	23.21	24.00	1.199	0.846	22.9
Body worn Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50_0	132322/1745	1:1	0.348	0.09	22.34	23.00	1.164	0.405	22.9
Back side	20	QPSK 50_0	132322/1745	1:1	0.569	-0.08	22.34	23.00	1.164	0.662	22.9
Body worn Test data (Separate 10mm 100%RB)											
Back side	20	QPSK 100_0	132322/1745	1:1	0.548	0.01	22.30	23.00	1.175	0.644	22.9
Hotspot Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1_0	132322/1745	1:1	0.448	-0.14	23.35	24.00	1.161	0.520	22.9
Back side	20	QPSK 1_0	132322/1745	1:1	0.733	-0.01	23.35	24.00	1.161	0.851	22.9
Back side	20	QPSK 1_0	132072/1720	1:1	0.682	0.09	23.16	24.00	1.213	0.828	22.9
Back side	20	QPSK 1_0	132572/1770	1:1	0.705	0.04	23.21	24.00	1.199	0.846	22.9
Left side	20	QPSK 1_0	132322/1745	1:1	0.514	-0.12	23.35	24.00	1.161	0.597	22.9
Right side	20	QPSK 1_0	132322/1745	1:1	0.103	-0.03	23.35	24.00	1.161	0.120	22.9
Bottom side	20	QPSK 1_0	132322/1745	1:1	0.437	0.00	23.35	24.00	1.161	0.508	22.9
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50_0	132322/1745	1:1	0.348	0.09	22.34	23.00	1.164	0.405	22.9
Back side	20	QPSK 50_0	132322/1745	1:1	0.569	-0.08	22.34	23.00	1.164	0.662	22.9
Left side	20	QPSK 50_0	132322/1745	1:1	0.399	-0.08	22.34	23.00	1.164	0.464	22.9
Right side	20	QPSK 50_0	132322/1745	1:1	0.079	-0.18	22.34	23.00	1.164	0.092	22.9
Bottom side	20	QPSK 50_0	132322/1745	1:1	0.339	0.08	22.34	23.00	1.164	0.395	22.9
Hotspot Test data (Separate 10mm 100%RB)											
Back side	20	QPSK 100_0	132322/1745	1:1	0.548	0.01	22.30	23.00	1.175	0.644	22.9

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 67 of 83

8.2.16 SAR Result of LTE Band 71

Ant 4 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data (1RB)											
Left cheek	20	QPSK 1_0	133322/683	1:1	0.103	0.09	23.31	24.00	1.172	0.121	22.8
Left tilted	20	QPSK 1_0	133322/683	1:1	0.079	0.19	23.31	24.00	1.172	0.093	22.8
Right cheek	20	QPSK 1_0	133322/683	1:1	0.086	0.16	23.31	24.00	1.172	0.101	22.8
Right tilted	20	QPSK 1_0	133322/683	1:1	0.068	-0.01	23.31	24.00	1.172	0.080	22.8
Head Test Data (50%RB)											
Left cheek	20	QPSK 50_0	133322/683	1:1	0.081	0.08	22.43	23.00	1.140	0.092	22.8
Left tilted	20	QPSK 50_0	133322/683	1:1	0.074	-0.15	22.43	23.00	1.140	0.084	22.8
Right cheek	20	QPSK 50_0	133322/683	1:1	0.065	-0.07	22.43	23.00	1.140	0.074	22.8
Right tilted	20	QPSK 50_0	133322/683	1:1	0.071	-0.05	22.43	23.00	1.140	0.081	22.8
Body worn Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1_0	133322/683	1:1	0.174	-0.11	23.31	24.00	1.172	0.204	22.8
Back side	20	QPSK 1_0	133322/683	1:1	0.275	0.03	23.31	24.00	1.172	0.322	22.8
Body worn Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50_0	133322/683	1:1	0.141	0.06	22.43	23.00	1.140	0.161	22.8
Back side	20	QPSK 50_0	133322/683	1:1	0.235	-0.12	22.43	23.00	1.140	0.268	22.8
Hotspot Test data (Separate 10mm 1RB)											
Front side	20	QPSK 1_0	133322/683	1:1	0.174	-0.11	23.31	24.00	1.172	0.204	22.8
Back side	20	QPSK 1_0	133322/683	1:1	0.275	0.03	23.31	24.00	1.172	0.322	22.8
Left side	20	QPSK 1_0	133322/683	1:1	0.178	0.00	23.31	24.00	1.172	0.209	22.8
Right side	20	QPSK 1_0	133322/683	1:1	0.153	0.09	23.31	24.00	1.172	0.179	22.8
Bottom side	20	QPSK 1_0	133322/683	1:1	0.102	0.14	23.31	24.00	1.172	0.120	22.8
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50_0	133322/683	1:1	0.141	0.06	22.43	23.00	1.140	0.161	22.8
Back side	20	QPSK 50_0	133322/683	1:1	0.235	-0.12	22.43	23.00	1.140	0.268	22.8
Left side	20	QPSK 50_0	133322/683	1:1	0.144	0.05	22.43	23.00	1.140	0.164	22.8
Right side	20	QPSK 50_0	133322/683	1:1	0.127	0.14	22.43	23.00	1.140	0.145	22.8
Bottom side	20	QPSK 50_0	133322/683	1:1	0.086	-0.13	22.43	23.00	1.140	0.098	22.8

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 68 of 83

8.2.17 SAR Result of WIFI 2.4G

Ant2 Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data											
Left cheek	802.11b	6/2437	98.47%	1.016	0.342	0.11	17.66	19.00	1.361	0.473	22.7
Left tilted	802.11b	6/2437	98.47%	1.016	0.217	-0.01	17.66	19.00	1.361	0.300	22.7
Right cheek	802.11b	6/2437	98.47%	1.016	0.096	-0.16	17.66	19.00	1.361	0.133	22.7
Right tilted	802.11b	6/2437	98.47%	1.016	0.091	-0.11	17.66	19.00	1.361	0.126	22.7
Body worn Test data (Separate 10mm)											
Front side	802.11b	6/2437	98.47%	1.016	0.091	0.04	17.66	19.00	1.361	0.126	22.7
Back side	802.11b	6/2437	98.47%	1.016	0.219	-0.03	17.66	19.00	1.361	0.303	22.7
Hotspot Test data (Separate 10mm)											
Front side	802.11b	6/2437	98.47%	1.016	0.091	0.04	17.66	19.00	1.361	0.126	22.7
Back side	802.11b	6/2437	98.47%	1.016	0.219	-0.03	17.66	19.00	1.361	0.303	22.7
Right side	802.11b	6/2437	98.47%	1.016	0.425	0.07	17.66	19.00	1.361	0.588	22.7
Top side	802.11b	6/2437	98.47%	1.016	0.125	0.19	17.66	19.00	1.361	0.173	22.7

Note: When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 69 of 83

8.2.18 SAR Result of WIFI 5G

Ant1 Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data of U-NII-2A											
Left cheek	802.11a	60/5300	98.31%	1.017	0.252	-0.01	19.30	20.50	1.318	0.338	22.6
Left tilted	802.11a	60/5300	98.31%	1.017	0.287	0.09	19.30	20.50	1.318	0.385	22.6
Right cheek	802.11a	60/5300	98.31%	1.017	0.302	0.02	19.30	20.50	1.318	0.405	22.6
Right tilted	802.11a	60/5300	98.31%	1.017	0.304	0.01	19.30	20.50	1.318	0.408	22.6
Head Test Data of U-NII-2C											
Left cheek	802.11a	116/5580	98.31%	1.017	0.199	-0.01	19.29	20.50	1.321	0.267	22.6
Left tilted	802.11a	116/5580	98.31%	1.017	0.211	0.08	19.29	20.50	1.321	0.284	22.6
Right cheek	802.11a	116/5580	98.31%	1.017	0.220	-0.07	19.29	20.50	1.321	0.296	22.6
Right tilted	802.11a	116/5580	98.31%	1.017	0.258	0.09	19.29	20.50	1.321	0.347	22.6
Head Test Data of U-NII-3											
Left cheek	802.11a	157/5785	98.31%	1.017	0.138	0.04	19.38	20.50	1.294	0.182	22.6
Left tilted	802.11a	157/5785	98.31%	1.017	0.143	-0.11	19.38	20.50	1.294	0.188	22.6
Right cheek	802.11a	157/5785	98.31%	1.017	0.150	0.02	19.38	20.50	1.294	0.197	22.6
Right tilted	802.11a	157/5785	98.31%	1.017	0.167	0.06	19.38	20.50	1.294	0.220	22.6
Body worn Test data of U-NII-2A (Separate 10mm)											
Front side	802.11a	60/5300	98.31%	1.017	0.201	-0.06	19.30	20.50	1.318	0.270	22.6
Back side	802.11a	60/5300	98.31%	1.017	0.373	-0.05	19.30	20.50	1.318	0.500	22.6
Body worn Test data of U-NII-2C (Separate 10mm)											
Front side	802.11a	116/5580	98.31%	1.017	0.227	-0.05	19.29	20.50	1.321	0.305	22.6
Back side	802.11a	116/5580	98.31%	1.017	0.377	-0.09	19.29	20.50	1.321	0.507	22.6
Body worn Test data of U-NII-3 (Separate 10mm)											
Front side	802.11a	157/5785	98.31%	1.017	0.152	-0.05	19.38	20.50	1.294	0.200	22.6
Back side	802.11a	157/5785	98.31%	1.017	0.264	0.07	19.38	20.50	1.294	0.348	22.6
Hotspot Test data of U-NII-1 (Separate 10mm)											
Front side	802.11ac VHT40	46/5230	96.37%	1.038	0.152	-0.05	18.86	20.00	1.300	0.205	22.6
Back side	802.11ac VHT40	46/5230	96.37%	1.038	0.373	-0.12	18.86	20.00	1.300	0.503	22.6
Right side	802.11ac VHT40	46/5230	96.37%	1.038	0.546	0.03	18.86	20.00	1.300	0.737	22.6
Top side	802.11ac VHT40	46/5230	96.37%	1.038	0.428	0.09	18.86	20.00	1.300	0.577	22.6
Hotspot Test data of U-NII-3 (Separate 10mm)											
Front side	802.11a	157/5785	98.31%	1.017	0.152	-0.05	19.38	20.50	1.294	0.200	22.6
Back side	802.11a	157/5785	98.31%	1.017	0.264	0.07	19.38	20.50	1.294	0.348	22.6
Right side	802.11a	157/5785	98.31%	1.017	0.465	0.02	19.38	20.50	1.294	0.612	22.6
Top side	802.11a	157/5785	98.31%	1.017	0.169	0.17	19.38	20.50	1.294	0.222	22.6
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Product specific 10gSAR Test data of U-NII-2A (Separate 0mm)											
Front side	802.11a	60/5300	98.31%	1.017	0.301	-0.02	19.30	20.50	1.318	0.404	22.6
Back side	802.11a	60/5300	98.31%	1.017	0.938	0.10	19.30	20.50	1.318	1.258	22.6
Right side	802.11a	60/5300	98.31%	1.017	2.180	0.06	19.30	20.50	1.318	2.923	22.6
Right side	802.11a	52/5260	98.31%	1.017	2.060	0.05	19.21	20.50	1.346	2.820	22.6
Right side-Repeated	802.11a	60/5300	98.31%	1.017	2.070	0.03	19.30	20.50	1.318	2.776	22.6
Top side	802.11a	60/5300	98.31%	1.017	0.657	-0.02	19.30	20.50	1.318	0.881	22.6

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 70 of 83

Product specific 10gSAR Test data of U-NII-2C (Separate 0mm)											
Front side	802.11a	116/5580	98.31%	1.017	0.179	-0.10	19.29	20.50	1.321	0.241	22.6
Back side	802.11a	116/5580	98.31%	1.017	0.431	0.07	19.29	20.50	1.321	0.579	22.6
Right side	802.11a	116/5580	98.31%	1.017	1.450	0.06	19.29	20.50	1.321	1.949	22.6
Top side	802.11a	116/5580	98.31%	1.017	0.222	-0.15	19.29	20.50	1.321	0.298	22.6

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Right side 0mm	60/5300	2.180	2.070	1.053	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.

Note:

- 1) As the 802.11a highest reported SAR is smaller than 1.2 W/kg, and the tune-up of the other 802.11 modes are not higher than 802.11a, therefore the adjusted SAR is ≤ 1.2 W/kg for other 802.11 modes, SAR test for the other 802.11 modes are not required. For Product specific 10gSAR the highest reported SAR is smaller than 3.0 W/kg, SAR test for the other 802.11 modes are also not required.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 71 of 83

8.2.19 SAR Result of BT

Ant2 Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data											
Left cheek	DH5	39/2441	76.86%	1.301	0.078	0.05	8.34	9.50	1.306	0.133	22.7
Left tilted	DH5	39/2441	76.86%	1.301	0.057	-0.14	8.34	9.50	1.306	0.097	22.7
Right cheek	DH5	39/2441	76.86%	1.301	0.025	-0.12	8.34	9.50	1.306	0.042	22.7
Right tilted	DH5	39/2441	76.86%	1.301	0.023	0.04	8.34	9.50	1.306	0.039	22.7
Body worn Test data (Separate 10mm)											
Front side	DH5	39/2441	76.86%	1.301	0.020	-0.10	8.34	9.50	1.306	0.034	22.7
Back side	DH5	39/2441	76.86%	1.301	0.047	-0.16	8.34	9.50	1.306	0.080	22.7
Hotspot Test data (Separate 10mm)											
Front side	DH5	39/2441	76.86%	1.301	0.020	-0.10	8.34	9.50	1.306	0.034	22.7
Back side	DH5	39/2441	76.86%	1.301	0.047	-0.16	8.34	9.50	1.306	0.080	22.7
Right side	DH5	39/2441	76.86%	1.301	0.107	-0.07	8.34	9.50	1.306	0.182	22.7
Top side	DH5	39/2441	76.86%	1.301	0.031	0.08	8.34	9.50	1.306	0.053	22.7



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 72 of 83

8.2.20 SAR Result of NFC

NFC SAR Test Record									
Ant5 Test Record									
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 10-g	Power drift (dB)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
NFC Test data (Separate 0mm)									
Front side	NFC	13.56MHz	100.00%	1.000	0.000	0.01	1.000	0.000	22.6
Back side	NFC	13.56MHz	100.00%	1.000	0.064	0.03	1.000	0.064	22.6
Left side	NFC	13.56MHz	100.00%	1.000	0.000	0.01	1.000	0.000	22.6
Right side	NFC	13.56MHz	100.00%	1.000	0.000	0.08	1.000	0.000	22.6
Top side	NFC	13.56MHz	100.00%	1.000	0.000	0.03	1.000	0.000	22.6
Bottom side	NFC	13.56MHz	100.00%	1.000	0.000	0.01	1.000	0.000	22.6
Ant6 Test Record									
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 10-g	Power drift (dB)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
NFC Test data (Separate 0mm)									
Front side	NFC	13.56MHz	100.00%	1.000	0.058	0.05	1.000	0.058	22.6
Back side	NFC	13.56MHz	100.00%	1.000	0.003	0.02	1.000	0.003	22.6
Left side	NFC	13.56MHz	100.00%	1.000	0.000	0.01	1.000	0.000	22.6
Right side	NFC	13.56MHz	100.00%	1.000	0.000	0.06	1.000	0.000	22.6
Top side	NFC	13.56MHz	100.00%	1.000	0.000	0.01	1.000	0.000	22.6
Bottom side	NFC	13.56MHz	100.00%	1.000	0.000	0.09	1.000	0.000	22.6



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 73 of 83

8.3 Multiple Transmitter Evaluation

8.3.1 Simultaneous SAR test evaluation

•Simultaneous Transmission Possibilities

No.	Simultaneous Tx Combination	Head	Body	Hotspot	Product specific 10g
1	WWAN + WLAN 2.4GHz	Yes	Yes	Yes	Yes
2	WWAN + WLAN 5GHz + BT	Yes	Yes	Yes	Yes



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 74 of 83

8.3.2 Simultaneous Transmission SAR Summation Scenario

Head:

Test position		SARmax (W/kg)				Summed SAR	
		Main Ant0	WiFi 2.4G Ant2	WiFi 5G Ant1	BT		
		1	2	3	4	1+2	1+3+4
GSM850	Left cheek	0.091	0.473	0.338	0.133	0.564	0.562
	Left tilted	0.043	0.300	0.385	0.097	0.343	0.525
	Right cheek	0.040	0.133	0.405	0.042	0.173	0.487
	Right tilted	0.018	0.126	0.408	0.039	0.144	0.465
GSM1900	Left cheek	0.164	0.473	0.338	0.133	0.637	0.635
	Left tilted	0.069	0.300	0.385	0.097	0.369	0.551
	Right cheek	0.082	0.133	0.405	0.042	0.215	0.529
	Right tilted	0.037	0.126	0.408	0.039	0.163	0.484
WCDMA BII	Left cheek	0.285	0.473	0.338	0.133	0.758	0.756
	Left tilted	0.254	0.300	0.385	0.097	0.554	0.736
	Right cheek	0.234	0.133	0.405	0.042	0.367	0.681
	Right tilted	0.129	0.126	0.408	0.039	0.255	0.576
WCDMA BIV	Left cheek	0.330	0.473	0.338	0.133	0.803	0.801
	Left tilted	0.153	0.300	0.385	0.097	0.453	0.635
	Right cheek	0.272	0.133	0.405	0.042	0.405	0.719
	Right tilted	0.134	0.126	0.408	0.039	0.260	0.581
WCDMA BV	Left cheek	0.133	0.473	0.338	0.133	0.606	0.604
	Left tilted	0.057	0.300	0.385	0.097	0.357	0.539
	Right cheek	0.115	0.133	0.405	0.042	0.248	0.562
	Right tilted	0.051	0.126	0.408	0.039	0.177	0.498
LTE B7	Left cheek	0.069	0.473	0.338	0.133	0.542	0.540
	Left tilted	0.049	0.300	0.385	0.097	0.349	0.531
	Right cheek	0.063	0.133	0.405	0.042	0.196	0.510
	Right tilted	0.035	0.126	0.408	0.039	0.161	0.482
LTE B12(17)	Left cheek	0.121	0.473	0.338	0.133	0.594	0.592
	Left tilted	0.069	0.300	0.385	0.097	0.369	0.551
	Right cheek	0.115	0.133	0.405	0.042	0.248	0.562
	Right tilted	0.070	0.126	0.408	0.039	0.196	0.517
LTE B13	Left cheek	0.196	0.473	0.338	0.133	0.669	0.667
	Left tilted	0.124	0.300	0.385	0.097	0.424	0.606
	Right cheek	0.183	0.133	0.405	0.042	0.316	0.630
	Right tilted	0.114	0.126	0.408	0.039	0.240	0.561
LTE B14	Left cheek	0.182	0.473	0.338	0.133	0.655	0.653
	Left tilted	0.114	0.300	0.385	0.097	0.414	0.596
	Right cheek	0.177	0.133	0.405	0.042	0.310	0.624
	Right tilted	0.113	0.126	0.408	0.039	0.239	0.560
LTE B25(2)	Left cheek	0.274	0.473	0.338	0.133	0.747	0.745
	Left tilted	0.120	0.300	0.385	0.097	0.420	0.602
	Right cheek	0.257	0.133	0.405	0.042	0.390	0.704
	Right tilted	0.107	0.126	0.408	0.039	0.233	0.554
LTE B26(5)	Left cheek	0.083	0.473	0.338	0.133	0.556	0.554
	Left tilted	0.058	0.300	0.385	0.097	0.358	0.540
	Right cheek	0.067	0.133	0.405	0.042	0.200	0.514
	Right tilted	0.047	0.126	0.408	0.039	0.173	0.494



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 75 of 83

LTE B30	Left cheek	0.236	0.473	0.338	0.133	0.709	0.707
	Left tilted	0.085	0.300	0.385	0.097	0.385	0.567
	Right cheek	0.174	0.133	0.405	0.042	0.307	0.621
	Right tilted	0.076	0.126	0.408	0.039	0.202	0.523
LTE B40	Left cheek	0.073	0.473	0.338	0.133	0.546	0.544
	Left tilted	0.037	0.300	0.385	0.097	0.337	0.519
	Right cheek	0.061	0.133	0.405	0.042	0.194	0.508
	Right tilted	0.057	0.126	0.408	0.039	0.183	0.504
LTE B41(38)	Left cheek	0.029	0.473	0.338	0.133	0.502	0.500
	Left tilted	0.017	0.300	0.385	0.097	0.317	0.499
	Right cheek	0.006	0.133	0.405	0.042	0.139	0.453
	Right tilted	0.002	0.126	0.408	0.039	0.128	0.449
LTE B66(4)	Left cheek	0.295	0.473	0.338	0.133	0.768	0.766
	Left tilted	0.161	0.300	0.385	0.097	0.461	0.643
	Right cheek	0.192	0.133	0.405	0.042	0.325	0.639
	Right tilted	0.124	0.126	0.408	0.039	0.250	0.571
LTE B71	Left cheek	0.121	0.473	0.338	0.133	0.594	0.592
	Left tilted	0.093	0.300	0.385	0.097	0.393	0.575
	Right cheek	0.101	0.133	0.405	0.042	0.234	0.548
	Right tilted	0.081	0.126	0.408	0.039	0.207	0.528

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 76 of 83

Body-worn:

Test position		SARmax (W/kg)				Summed SAR		Case NO	SPLSR Results
		Main Ant0	WiFi 2.4G Ant2	WiFi 5G Ant1	BT				
		1	2	3	4	1+2	1+3+4		
GSM850	Front side	0.089	0.126	0.305	0.034	0.215	0.428	/	/
	Back side	0.248	0.303	0.507	0.080	0.551	0.835	/	/
GSM1900	Front side	0.162	0.126	0.305	0.034	0.288	0.501	/	/
	Back side	0.295	0.303	0.507	0.080	0.598	0.882	/	/
WCDMA BII	Front side	0.450	0.126	0.305	0.034	0.576	0.789	/	/
	Back side	0.487	0.303	0.507	0.080	0.790	1.074	/	/
WCDMA BIV	Front side	0.685	0.126	0.305	0.034	0.811	1.024	/	/
	Back side	1.077	0.303	0.507	0.080	1.380	1.664	1#	0.01
WCDMA BV	Front side	0.333	0.126	0.305	0.034	0.459	0.672	/	/
	Back side	0.544	0.303	0.507	0.080	0.847	1.131	/	/
LTE B7	Front side	0.413	0.126	0.305	0.034	0.539	0.752	/	/
	Back side	0.638	0.303	0.507	0.080	0.941	1.225	/	/
LTE B12(17)	Front side	0.188	0.126	0.305	0.034	0.314	0.527	/	/
	Back side	0.296	0.303	0.507	0.080	0.599	0.883	/	/
LTE B13	Front side	0.353	0.126	0.305	0.034	0.479	0.692	/	/
	Back side	0.385	0.303	0.507	0.080	0.688	0.972	/	/
LTE B14	Front side	0.340	0.126	0.305	0.034	0.466	0.679	/	/
	Back side	0.381	0.303	0.507	0.080	0.684	0.968	/	/
LTE B25(2)	Front side	0.347	0.126	0.305	0.034	0.473	0.686	/	/
	Back side	0.444	0.303	0.507	0.080	0.747	1.031	/	/
LTE B26(5)	Front side	0.201	0.126	0.305	0.034	0.327	0.540	/	/
	Back side	0.310	0.303	0.507	0.080	0.613	0.897	/	/
LTE B30	Front side	0.645	0.126	0.305	0.034	0.771	0.984	/	/
	Back side	0.492	0.303	0.507	0.080	0.795	1.079	/	/
LTE B40	Front side	0.229	0.126	0.305	0.034	0.355	0.568	/	/
	Back side	0.186	0.303	0.507	0.080	0.489	0.773	/	/
LTE B41(38)	Front side	0.412	0.126	0.305	0.034	0.538	0.751	/	/
	Back side	0.924	0.303	0.507	0.080	1.227	1.511	/	/
LTE B66(4)	Front side	0.520	0.126	0.305	0.034	0.646	0.859	/	/
	Back side	0.851	0.303	0.507	0.080	1.154	1.438	/	/
LTE B71	Front side	0.204	0.126	0.305	0.034	0.330	0.543	/	/
	Back side	0.322	0.303	0.507	0.080	0.625	0.909	/	/

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 77 of 83

Hotspot:

Test position		SARmax (W/kg)				Summed SAR		Case NO	SPLSR Results
		Main Ant0	WiFi 2.4G Ant2	WiFi 5G Ant1	BT				
		1	2	3	4	1+2	1+3+4		
GSM850	Front side	0.089	0.126	0.205	0.034	0.215	0.328	/	/
	Back side	0.248	0.303	0.503	0.080	0.551	0.831	/	/
	Left side	0.094	0.000	0.000	0.000	0.094	0.094	/	/
	Right side	0.016	0.588	0.737	0.182	0.604	0.935	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.020	0.000	0.000	0.000	0.020	0.020	/	/
GSM1900	Front side	0.162	0.126	0.205	0.034	0.288	0.401	/	/
	Back side	0.295	0.303	0.503	0.080	0.598	0.878	/	/
	Left side	0.228	0.000	0.000	0.000	0.228	0.228	/	/
	Right side	0.019	0.588	0.737	0.182	0.607	0.938	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.181	0.000	0.000	0.000	0.181	0.181	/	/
WCDMA BII	Front side	0.450	0.126	0.205	0.034	0.576	0.689	/	/
	Back side	0.487	0.303	0.503	0.080	0.790	1.070	/	/
	Left side	0.403	0.000	0.000	0.000	0.403	0.403	/	/
	Right side	0.132	0.588	0.737	0.182	0.720	1.051	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.393	0.000	0.000	0.000	0.393	0.393	/	/
WCDMA BIV	Front side	0.685	0.126	0.205	0.034	0.811	0.924	/	/
	Back side	1.077	0.303	0.503	0.080	1.380	1.660	2#	0.01
	Left side	0.748	0.000	0.000	0.000	0.748	0.748	/	/
	Right side	0.216	0.588	0.737	0.182	0.804	1.135	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.572	0.000	0.000	0.000	0.572	0.572	/	/
WCDMA BV	Front side	0.333	0.126	0.205	0.034	0.459	0.572	/	/
	Back side	0.544	0.303	0.503	0.080	0.847	1.127	/	/
	Left side	0.280	0.000	0.000	0.000	0.280	0.280	/	/
	Right side	0.288	0.588	0.737	0.182	0.876	1.207	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.237	0.000	0.000	0.000	0.237	0.237	/	/
LTE B7	Front side	0.413	0.126	0.205	0.034	0.539	0.652	/	/
	Back side	0.638	0.303	0.503	0.080	0.941	1.221	/	/
	Left side	0.837	0.000	0.000	0.000	0.837	0.837	/	/
	Right side	0.174	0.588	0.737	0.182	0.762	1.093	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.241	0.000	0.000	0.000	0.241	0.241	/	/
LTE B12(17)	Front side	0.188	0.126	0.205	0.034	0.314	0.427	/	/
	Back side	0.296	0.303	0.503	0.080	0.599	0.879	/	/
	Left side	0.191	0.000	0.000	0.000	0.191	0.191	/	/
	Right side	0.165	0.588	0.737	0.182	0.753	1.084	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.110	0.000	0.000	0.000	0.110	0.110	/	/
LTE B13	Front side	0.353	0.126	0.205	0.034	0.479	0.592	/	/
	Back side	0.385	0.303	0.503	0.080	0.688	0.968	/	/
	Left side	0.201	0.000	0.000	0.000	0.201	0.201	/	/
	Right side	0.244	0.588	0.737	0.182	0.832	1.163	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.170	0.000	0.000	0.000	0.170	0.170	/	/
LTE B14	Front side	0.340	0.126	0.205	0.034	0.466	0.579	/	/
	Back side	0.381	0.303	0.503	0.080	0.684	0.964	/	/
	Left side	0.197	0.000	0.000	0.000	0.197	0.197	/	/

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 78 of 83

	Right side	0.253	0.588	0.737	0.182	0.841	1.172	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.182	0.000	0.000	0.000	0.182	0.182	/	/
LTE B25(2)	Front side	0.347	0.126	0.205	0.034	0.473	0.586	/	/
	Back side	0.444	0.303	0.503	0.080	0.747	1.027	/	/
	Left side	0.359	0.000	0.000	0.000	0.359	0.359	/	/
	Right side	0.112	0.588	0.737	0.182	0.700	1.031	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.313	0.000	0.000	0.000	0.313	0.313	/	/
LTE B26(5)	Front side	0.201	0.126	0.205	0.034	0.327	0.440	/	/
	Back side	0.310	0.303	0.503	0.080	0.613	0.893	/	/
	Left side	0.083	0.000	0.000	0.000	0.083	0.083	/	/
	Right side	0.122	0.588	0.737	0.182	0.710	1.041	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.102	0.000	0.000	0.000	0.102	0.102	/	/
LTE B30	Front side	0.645	0.126	0.205	0.034	0.771	0.884	/	/
	Back side	0.492	0.303	0.503	0.080	0.795	1.075	/	/
	Left side	0.556	0.000	0.000	0.000	0.556	0.556	/	/
	Right side	0.219	0.588	0.737	0.182	0.807	1.138	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.493	0.000	0.000	0.000	0.493	0.493	/	/
LTE B40	Front side	0.229	0.126	0.205	0.034	0.355	0.468	/	/
	Back side	0.186	0.303	0.503	0.080	0.489	0.769	/	/
	Left side	0.177	0.000	0.000	0.000	0.177	0.177	/	/
	Right side	0.103	0.588	0.737	0.182	0.691	1.022	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.193	0.000	0.000	0.000	0.193	0.193	/	/
LTE B41(38)	Front side	0.412	0.126	0.205	0.034	0.538	0.651	/	/
	Back side	0.924	0.303	0.503	0.080	1.227	1.507	/	/
	Left side	1.050	0.000	0.000	0.000	1.050	1.050	/	/
	Right side	0.115	0.588	0.737	0.182	0.703	1.034	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.347	0.000	0.000	0.000	0.347	0.347	/	/
LTE B66(4)	Front side	0.520	0.126	0.205	0.034	0.646	0.759	/	/
	Back side	0.851	0.303	0.503	0.080	1.154	1.434	/	/
	Left side	0.597	0.000	0.000	0.000	0.597	0.597	/	/
	Right side	0.120	0.588	0.737	0.182	0.708	1.039	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.508	0.000	0.000	0.000	0.508	0.508	/	/
LTE B71	Front side	0.204	0.126	0.205	0.034	0.330	0.443	/	/
	Back side	0.322	0.303	0.503	0.080	0.625	0.905	/	/
	Left side	0.209	0.000	0.000	0.000	0.209	0.209	/	/
	Right side	0.179	0.588	0.737	0.182	0.767	1.098	/	/
	Top side	0.000	0.173	0.577	0.053	0.173	0.630	/	/
	Bottom side	0.120	0.000	0.000	0.000	0.120	0.120	/	/



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708
Rev.: 01
Page: 79 of 83

Product specific 10g SAR:

Test position	SARmax (W/kg)		Summed SAR
	WiFi 5G Ant1	NFC	
	1	2	
Front side	0.404	0.058	0.462
Back side	1.258	0.064	1.322
Left side	0.000	0.000	0.000
Right side	2.923	0.000	2.923
Top side	0.881	0.000	0.881
Bottom side	0.000	0.000	0.000

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 80 of 83

8.3.3 SPLSR Evaluation Analysis

- 1) When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
- 2) $SPLSR = (SAR_1 + SAR_2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR, or $SPLSR \leq 0.10$ for 10g SAR simultaneously transmission SAR measurement is not necessary.
- 3) Per April 2022 TCB Workshop Notes, WLAN antenna 1 was summed algebraically with the BT Antenna 2 separately for the purposes of hybrid SPLSR combination and they are located at the top of the device.
- 4) Per April 2022 TCB Workshop, instead of doing a small volume scan over a co-located antenna pair, used summing the SAR values of the co-located pair and using that value in SPLSR calculation. In the calculation used the minimum distance between the spatially separated antenna and the closest antenna of the co-located antenna pair to be conservative.

Case No.	Position	Band	SAR (W/kg)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
1#	Back side 10mm	WCDMA BIV Ant4	1.077	-10.8	-83.1	-207	162.443	1.664	0.01	Not Required
		WiFi 5G Ant1	0.507	-55.4	73.1	-207				
		BT Ant2	0.080	-59.5	73.2	-207				
		WCDMA BIV Ant4	1.077	-10.8	-83.1	-207	163.711	1.664	0.01	Not Required
		BT Ant2	0.080	-59.5	73.2	-207				
		WiFi 5G Ant1	0.507	-55.4	73.1	-207				

Case No.	Position	Band	SAR (W/kg)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
2#	Back side 10mm	WCDMA BIV Ant4	1.077	-10.8	-83.1	-207	162.443	1.660	0.01	Not Required
		WiFi 5G Ant1	0.503	-55.4	73.1	-207				
		BT Ant2	0.080	-59.5	73.2	-207				
		WCDMA BIV Ant4	1.077	-10.8	-83.1	-207	163.711	1.660	0.01	Not Required
		BT Ant2	0.080	-59.5	73.2	-207				
		WiFi 5G Ant1	0.503	-55.4	73.1	-207				




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 81 of 83

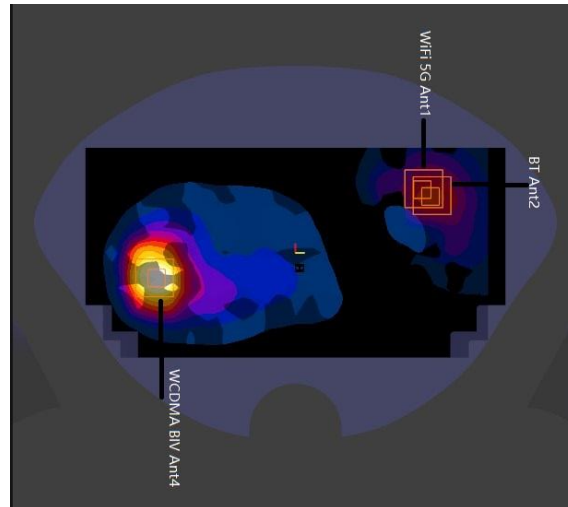



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 82 of 83

9 Equipment list

Test Platform		SPEAG DASY6 Professional				
Description		SAR Test System				
Software Reference		cDASY6 V16.4.0.5005				
Hardware Reference						
Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
☒	Twin Phantom	SPEAG	Twin-SAM V8.0	2031	NCR	NCR
☒	Twin Phantom	SPEAG	ELI V4.0	1123	NCR	NCR
☒	DAE	SPEAG	DAE4	1740	2025-02-17	2026-02-16
☒	E-Field Probe	SPEAG	EX3DV4	7735	2025-01-29	2025-01-28
☒	Validation Kits	SPEAG	CLA13	1032	2023-02-09	2026-02-08
☒	Validation Kits	SPEAG	D750V3	1214	2025-04-01	2028-03-31
☒	Validation Kits	SPEAG	D835V2	4d161	2023-08-25	2026-08-24
☒	Validation Kits	SPEAG	D1800V2	2d170	2025-03-31	2028-03-30
☒	Validation Kits	SPEAG	D1950V3	1218	2023-05-04	2026-05-03
☒	Validation Kits	SPEAG	D2300V2	1096	2025-04-01	2028-03-31
☒	Validation Kits	SPEAG	D2450V2	922	2023-08-28	2026-08-27
☒	Validation Kits	SPEAG	D2600V2	1158	2025-03-31	2028-03-30
☒	Validation Kits	SPEAG	D5GHzV2	1174	2023-08-23	2026-08-22
☒	Dielectric parameter probes	SPEAG	DAKS-3.5	1120	2024-08-20	2025-08-19
☒	Vector Network Analyzer and Vector Reflectometer	SPEAG	DAKS_VNA R140	50920	2024-08-19	2025-08-18
☒	Dielectric parameter probes	SPEAG	DAKS-12	1043	2024-08-20	2025-08-19
☒	Vector Network Analyzer and Vector Reflectometer	SPEAG	DAKS_VNA R60	21423005	2024-08-20	2025-08-19
☒	Universal Radio Communication Tester	R&S	CMW500	111637	2024-09-12	2025-09-11
☒	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
☒	Signal Generator	R&S	SMB100A	182393	2025-02-05	2026-02-04
☒	Preamplifier	Qiji	YX28980933	202104001	NCR	NCR
☒	USB Average Power Sensor	Keysight	U2002H	MY5639004	2024-09-10	2025-09-09
☒	USB Average Power Sensor	Agilent	U2002H	MY48200110	2024-11-21	2025-11-20
☒	Average Power Sensor	R&S	NRP6A	103953	2024-11-20	2025-11-19
☒	Average Power Sensor	R&S	NRP6A	103954	2024-11-20	2025-11-19
☒	Attenuator	SHX	TS2-3dB	30704	NCR	NCR
☒	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
☒	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
☒	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
☒	Speed reading thermometer	LKM	DTM3000	NA	2024-09-14	2025-09-13
☒	Humidity and Temperature Indicator	MingGao	MingGao	NA	2024-09-16	2025-09-15

Note: All the equipments are within the valid period when the tests are performed.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 83 of 83

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D

Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

Appendix E: Conducted RF Output Power

---END---
