



## Industrial Internet Innovation Center (Shanghai) Co.,Ltd.

### SRD TEST REPORT

|             |                                               |
|-------------|-----------------------------------------------|
| PRODUCT     | Handheld Wireless Terminal                    |
| BRAND       | SUNMI                                         |
| MODEL       | T8F1A                                         |
| APPLICANT   | Shanghai Sunmi Technology Co.,Ltd.            |
| FCC ID      | 2AH25T8F1A                                    |
| IC          | 22621-T8F1A                                   |
| ISSUE DATE  | February 19, 2025                             |
| STANDARD(S) | FCC Part15E, RSS-247 Issue 3, RSS-Gen Issue 5 |

Prepared by: Li Haisheng

李海生

Reviewed by: Yang Fan

杨帆

Approved by: Zhang Min

张曼

**CAUTION:**

*This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.*

## CONTENTS

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. SUMMARY OF TEST REPORT .....</b>                      | <b>3</b>  |
| 1.1 TEST STANDARD(S) .....                                  | 3         |
| 1.2 REFERENCE DOCUMENTS.....                                | 3         |
| 1.3 SUMMARY OF TEST RESULTS.....                            | 3         |
| 1.4 DATA PROVIDED BY APPLICANT .....                        | 4         |
| <b>2. GENERAL INFORMATION OF THE LABORATORY .....</b>       | <b>5</b>  |
| 2.1 TESTING LABORATORY .....                                | 5         |
| 2.2 LABORATORY ENVIRONMENTAL REQUIREMENTS.....              | 5         |
| 2.3 PROJECT INFORMATION .....                               | 5         |
| <b>3. GENERAL INFORMATION OF THE CUSTOMER .....</b>         | <b>6</b>  |
| 3.1 APPLICANT .....                                         | 6         |
| 3.2 MANUFACTURER .....                                      | 6         |
| <b>4. GENERAL INFORMATION OF THE PRODUCT.....</b>           | <b>7</b>  |
| 4.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 7         |
| 4.2 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST..... | 7         |
| 4.3 ADDITIONAL INFORMATION .....                            | 7         |
| <b>5. TEST CONFIGURATION INFORMATION .....</b>              | <b>9</b>  |
| 5.1 LABORATORY ENVIRONMENTAL CONDITIONS.....                | 9         |
| 5.2 TEST EQUIPMENTS UTILIZED.....                           | 9         |
| 5.3 MEASUREMENT UNCERTAINTY .....                           | 11        |
| <b>6. MEASUREMENT RESULTS .....</b>                         | <b>13</b> |
| 6.1 DUTY CYCLE .....                                        | 13        |
| 6.2 MAXIMUM AVERAGE OUTPUT POWER .....                      | 18        |
| 6.3 PEAK POWER SPECTRAL DENSITY .....                       | 24        |
| 6.4 6dB & 26dB OCCUPIED BANDWIDTH .....                     | 30        |
| 6.5 99% OCCUPIED BANDWIDTH.....                             | 39        |
| 6.6 FREQUENCY STABILITY .....                               | 44        |
| 6.7 TRANSMITTER SPURIOUS EMISSION.....                      | 45        |
| 6.8 BAND EDGES COMPLIANCE (RADIATED) .....                  | 59        |
| 6.9 AC POWERLINE CONDUCTED EMISSION .....                   | 64        |
| <b>ANNEX A: REVISED HISTORY .....</b>                       | <b>67</b> |
| <b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>              | <b>68</b> |

## 1. Summary of Test Report

### 1.1 Test Standard(s)

| No. | Test Standard   | Title                                                                                                                              | Version |
|-----|-----------------|------------------------------------------------------------------------------------------------------------------------------------|---------|
| 1   | FCC Part15E     | Title 47 of the Code of Federal Regulations; Chapter I<br>Part 15 - Radio frequency devices                                        | --      |
| 2   | RSS-247 Issue 3 | Digital Transmission Systems (DTSS), Frequency<br>Hopping Systems (FHSs) and Licence-Exempt Local<br>Area Network (LE-LAN) Devices | 2023    |
| 3   | RSS-Gen Issue 5 | General Requirements for Compliance of Radio<br>Apparatus                                                                          | 2021    |

### 1.2 Reference Documents

| No. | Test Standard                                                      | Title                                                                                                                                      | Version |
|-----|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 1   | ANSI 63.10                                                         | Methods of Measurement of Radio-Noise Emissions<br>from Low-Voltage Electrical and Electronic Equipment<br>in the Range of 9 kHz to 40 GHz | 2013    |
| 2   | KDB 789033 D02 General<br>UNII Test Procedures New<br>Rules v02r01 | Guidelines For Compliance Testing Of Unlicensed<br>National Information Infrastructure (U-Nii) Devices<br>(Part 15, Subpart E)             | --      |

NOTE: The standard of KDB 789033 D02 General UNII Test Procedures New Rules v02r01 has not been accredited by A2LA

### 1.3 Summary of Test Results

| No. | Measurement Items                           | FCC Rules            | IC Rules                          | Verdict |
|-----|---------------------------------------------|----------------------|-----------------------------------|---------|
| 1   | Duty cycle                                  | 15.407(a)            | RSS-247 6.2.4.2                   | Pass    |
| 2   | Maximum Output Power                        | 15.407(a)            | RSS-247 6.2.4.2                   | Pass    |
| 3   | Power Spectral Density                      | 15.407(a)            | RSS-247 6.2.4.2                   | Pass    |
| 4   | 6dB Occupied Bandwidth                      | 15.407(e)            | RSS-247 6.2.4.2                   | Pass    |
| 5   | 99% Occupied Bandwidth                      | 15.407(e)            | RSS-GEN 6.7                       | Pass    |
| 6   | Band edge compliance                        | 15.407(b)            | RSS-247 6.2.4.3                   | Pass    |
| 7   | Transmitter Spurious Emission -<br>Radiated | 15.407/15.205/15.209 | RSS-247 6.2, RSS-<br>Gen 8.9,8.10 | Pass    |
| 8   | AC Powerline Conducted Emission             | 15.207               | RSS-GEN 8.8                       | Pass    |
| 9   | Frequency Stability                         | 15.407(g)            | RSS-GEN 8.11                      | Pass    |
| 10  | Antenna requirement                         | 15.203               | RSS Gen 6.8, RSS-<br>247 5.4      | Pass    |

**Note 1:**

The T8F1A manufactured by Shanghai Sunmi Technology Co.,Ltd. is a new product for testing. Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 1.3.  
Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested

device specified in section 4 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 1 of this test report.

Note 2:

5.8G RLAN used a Internal antenna with max Gain 1.85 dBi that complied with 15.203 Requirements.

#### 1.4 Data Provided by Applicant

| No. | Item(s)             | Data     |
|-----|---------------------|----------|
| 1   | Antenna gain of EUT | 1.85 dBi |

Note: The data of antenna gain is provided by the Antenna specification may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

## 2. General Information of The Laboratory

### 2.1 Testing Laboratory

|                      |                                                            |
|----------------------|------------------------------------------------------------|
| Lab Name             | Industrial Internet Innovation Center (Shanghai) Co.,Ltd.  |
| Address              | Building 4, No. 766, Jingang Road, Pudong, Shanghai, China |
| Telephone            | 021-68866880                                               |
| FCC Registration No. | 708870                                                     |
| FCC Designation No.  | CN1364                                                     |
| IC Designation No.   | 10766A                                                     |
| CAB identifier       | CN0067                                                     |

### 2.2 Laboratory Environmental Requirements

|                      |              |
|----------------------|--------------|
| Temperature          | 15°C~35°C    |
| Relative Humidity    | 25%RH~75%RH  |
| Atmospheric Pressure | 86kPa~106kPa |

### 2.3 Project Information

|                 |                                       |
|-----------------|---------------------------------------|
| Project Manager | Gao Hongning                          |
| Test Date       | November 29, 2024 to January 17, 2025 |

### 3. General Information of The Customer

#### 3.1 Applicant

|           |                                                              |
|-----------|--------------------------------------------------------------|
| Company   | Shanghai Sunmi Technology Co.,Ltd.                           |
| Address   | Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China |
| Telephone | 8618501703215                                                |

#### 3.2 Manufacturer

|           |                                                              |
|-----------|--------------------------------------------------------------|
| Company   | Shanghai Sunmi Technology Co.,Ltd.                           |
| Address   | Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China |
| Telephone | 8618501703215                                                |

## 4. General Information of The Product

### 4.1 Product Description for Equipment under Test (EUT)

|                                                                                                                                                 |                                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Product Name                                                                                                                                    | Handheld Wireless Terminal                                                                                            |
| Model name                                                                                                                                      | T8F1A                                                                                                                 |
| Date of Receipt                                                                                                                                 | S05aa/S10aa: November 29,2024                                                                                         |
| EUT ID*                                                                                                                                         | S05aa/S10aa                                                                                                           |
| SN/IMEI                                                                                                                                         | S05aa: L303E4BL00005<br>S10aa: L303E4BL00002                                                                          |
| Supported Radio Technology and Bands                                                                                                            | BT 5.2 BR/EDR/BLE<br>WLAN 802.11b,g,n<br>WLAN 802.11a,n,ac<br>Hallow WI-FI 802.11ah<br>GPS/GLONASS/Galileo/BDS<br>NFC |
| Hardware Version                                                                                                                                | V00                                                                                                                   |
| Software Version                                                                                                                                | 1.00.00.20241113_186_userdebug                                                                                        |
| HVIN                                                                                                                                            | T8F1A                                                                                                                 |
| FCC ID                                                                                                                                          | 2AH25T8F1A                                                                                                            |
| IC                                                                                                                                              | 22621-T8F1A                                                                                                           |
| NOTE1: EUT ID is the internal identification code of the laboratory.                                                                            |                                                                                                                       |
| NOTE2: Samples in the test report are provided by the customer. The test results are only applicable to the samples received by the laboratory. |                                                                                                                       |

### 4.2 Internal Identification of AE used during the test

| AE ID*                                                              | Description | Model              | SN/Remark                                               |
|---------------------------------------------------------------------|-------------|--------------------|---------------------------------------------------------|
| CA01                                                                | Adapter     | TPA-141A050200UU01 | SHENZHEN TIANYIN ELECTRONICS CO., LTD.<br>OUTPUT: 5V 2A |
| CB01                                                                | Adapter     | UC13US             | Jiangsu Chenyang Electron Co., Ltd.<br>OUTPUT: 5V 2A    |
| UA01                                                                | AC Cable    | SSM-A033A          | Saibao (Jiangxi) Industry Co., LTD                      |
| BA07                                                                | Battery     | GYPA               | HUNAN GAOYUAN BATTERY CO.,LTD.<br>5000mAh 3.87V         |
| AE1                                                                 | RF cable    | N/A                | Cable loss: 1dB                                         |
| NOTE: *AE ID is the internal identification code of the laboratory. |             |                    |                                                         |

### 4.3 Additional Information

|                            |                                                                                                   |
|----------------------------|---------------------------------------------------------------------------------------------------|
| WLAN Frequency             | UNII 3: 5725MHz-5850MHz                                                                           |
| Occupied Channel Bandwidth | 20 MHz for Wi-Fi (802.11 a/n/ac)<br>40 MHz for Wi-Fi (802.11 n/ac)<br>80 MHz for Wi-Fi(802.11 ac) |
| WLAN type of modulation    | OFDM                                                                                              |

Test frequency list:

UNII-3:

|        |             |      |      |      |      |      |
|--------|-------------|------|------|------|------|------|
| BW_20M | Channel     | 149  | 153  | 157  | 161  | 165  |
|        | Freq. (MHz) | 5745 | 5765 | 5785 | 5805 | 5825 |
| BW_40M | Channel     | 151  |      | 159  |      | /    |
|        | Freq. (MHz) | 5755 |      | 5795 |      |      |
| BW_80M | Channel     | 155  |      |      |      |      |
|        | Freq. (MHz) | 5775 |      |      |      |      |

Note: "/" Represents empty

Note: This report is for WLAN UNII-3 only.

#### Emissions Information:

| TestMode | Frequency Min(MHz) | Frequency Max(MHz) | Max OutPut Power (dBm) | Max OutPut Power (W) | OBW (KHz) | Necessary Bandwidth & Emission Classification |
|----------|--------------------|--------------------|------------------------|----------------------|-----------|-----------------------------------------------|
| 11A      | 5745               | 5825               | 15.54                  | 0.0358               | 17560     | 17M6D1D                                       |
| 11N20    | 5745               | 5825               | 15.26                  | 0.0336               | 18480     | 18M5D1D                                       |
| 11N40    | 5755               | 5795               | 15.12                  | 0.0325               | 37200     | 37M2D1D                                       |
| 11AC20   | 5745               | 5825               | 14.66                  | 0.0292               | 18240     | 18M2D1D                                       |
| 11AC40   | 5755               | 5795               | 13.85                  | 0.0243               | 36560     | 36M6D1D                                       |
| 11AC80   | 5775               | 5775               | 13.19                  | 0.0208               | 75360     | 75M4D1D                                       |

## 5. Test Configuration Information

### 5.1 Laboratory Environmental Conditions

#### 5.1.1 Permanent Facilities

|                        |                          |         |         |
|------------------------|--------------------------|---------|---------|
| Relative Humidity      | Min. = 45 %, Max. = 55 % |         |         |
| Atmospheric Pressure   | 101kPa                   |         |         |
| Temperature            | Normal                   | Minimum | Maximum |
|                        | 25℃                      | -20℃    | 55℃     |
| Working Voltage of EUT | Normal                   | Minimum | Maximum |
|                        | 3.87V                    | 3.4V    | 4.4V    |

### 5.2 Test Equipments Utilized

#### 5.2.1 Conducted Test System

| No. | Name                                        | Model          | S/N               | SW Version           | HW Version | Manuf acturer | Cal. Date                | Cal. Interval |
|-----|---------------------------------------------|----------------|-------------------|----------------------|------------|---------------|--------------------------|---------------|
| 1   | Test Software                               | TS1120         | 10671             | V3.2.22              | N/A        | Tonsce nd     | N/A                      | N/A           |
| 2   | Automatic control unit                      | JS0806 -2      | 221806062 1       | N/A                  | N/A        | Tonsce nd     | 2024-03-25               | 1 Year        |
| 3   | Wireless communication comprehensive tester | CMW2 70        | 100919            | V3.5.137             | N/A        | R&S           | 2024-07-25               | 1 Year        |
| 4   | Spectrum Analyzer                           | FSQ40          | 200063            | V4.75                | N/A        | R&S           | 2024-09-29               | 1 Year        |
| 5   | Vector Signal Generator                     | SMU20 0A       | 104684            | V03.20.2 86.21       | N/A        | R&S           | 2024-07-25               | 1 Year        |
| 6   | Vector Signal Generator                     | SMBV1 00A      | 257904            | V4.15.12 5.49        | N/A        | R&S           | 2023-12-19<br>2024-12-12 | 1 Year        |
| 7   | Programmable Power Supply                   | Keithle y 2303 | 4039070           | N/A                  | N/A        | Keithle y     | 2024-06-07               | 1 Year        |
| 8   | Temperature box                             | B-TF-107C      | BTF107C-201804107 | N/A                  | N/A        | Boyi          | 2024-06-07               | 1 Year        |
| 9   | Network test unit AP                        | GT-AXE11 000   | N2IG0X401 637KWF  | V3.0.0.4. 386_459 40 | N/A        | ASUS          | N/A                      | N/A           |

### 5.2.2 Radiated Emission Test System

| No | Name                                 | Model           | S/N      | SW Version | HW Version   | Manufacturer  | Cal. Date                | Cal. Interval |
|----|--------------------------------------|-----------------|----------|------------|--------------|---------------|--------------------------|---------------|
| 1  | Universal Radio Communication Tester | CMU200          | 123126   | V5.2.1     | B12          | R&S           | 2024-10-09               | 1 Year        |
| 2  | Universal Radio Communication Tester | CMW500          | 104178   | V3.7.20    | 1206.0600.00 | R&S           | 2024-10-09               | 1 Year        |
| 3  | EMI Test Receiver                    | ESU40           | 100307   | V5.1-24-3  | 01           | R&S           | 2023-12-19<br>2024-12-13 | 1 Year        |
| 4  | TRILOG Broadband Antenna             | VULB9163        | 01345    | N/A        | N/A          | Schwarzbeck   | 2024-03-29               | 1 Year        |
| 5  | Double-ridged Waveguide Antenna      | ETS-3117        | 00135890 | N/A        | N/A          | ETS           | 2024-03-16               | 1 Year        |
| 6  | EMI Test Software                    | EMC32 V10.35.02 | N/A      | V10.35.02  | N/A          | R&S           | N/A                      | N/A           |
| 7  | Horn Antenna                         | 3160-09         | LM6321   | N/A        | N/A          | R&S           | 2024-07-15               | 1 Year        |
| 8  | Horn Antenna                         | 3160-10         | LM5942   | N/A        | N/A          | R&S           | 2024-07-15               | 1 Year        |
| 9  | Loop Antenna                         | AL-130R         | 121083   | N/A        | N/A          | COM-POWER     | 2024-08-31               | 1 Year        |
| 10 | Preamplifier                         | SCU08F1         | 8320024  | N/A        | N/A          | R&S           | 2024-10-09               | 1 Year        |
| 11 | Preamplifier                         | SCU18           | 10155    | N/A        | N/A          | R&S           | 2024-10-09               | 1 Year        |
| 12 | Preamplifier                         | SCU26           | 10025    | N/A        | N/A          | R&S           | 2024-10-09               | 1 Year        |
| 13 | Preamplifier                         | SCU40           | 10020    | N/A        | N/A          | R&S           | 2024-10-09               | 1 Year        |
| 14 | 2-Line V-Network                     | ENV216          | 101380   | N/A        | N/A          | R&S           | 2023-12-19<br>2024-12-13 | 1 Year        |
| 15 | EMI Test Software                    | EMC32 V10.35.02 | N/A      | N/A        | N/A          | R&S           | N/A                      | N/A           |
| 16 | Test Receiver                        | ESCI            | 101235   | V5.1-24-3  | 0            | R&S           | 2023-12-19<br>2024-12-13 | 1 Year        |
| 17 | Antenna Tower                        | TPMDC-LF        | N/A      | N/A        | N/A          | Top Precision | N/A                      | N/A           |
| 18 | Antenna Tower                        | TPMDC-HF        | N/A      | N/A        | N/A          | Top Precision | N/A                      | N/A           |

### 5.2.3 Test Environment

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

|                          |                            |
|--------------------------|----------------------------|
| Temperature              | Min. = 15 °C, Max. = 35 °C |
| Relative humidity        | Min. = 20 %, Max. = 75 %   |
| Shielding effectiveness  | > 100 dB                   |
| Ground system resistance | < 0.5 Ω                    |
| Temperature              | Min. = 15 °C, Max. = 35 °C |

**Control room** did not exceed following limits along the EMC testing:

|                          |                            |
|--------------------------|----------------------------|
| Temperature              | Min. = 15 °C, Max. = 35 °C |
| Relative humidity        | Min. = 30 %, Max. = 60 %   |
| Shielding effectiveness  | > 100 dB                   |
| Electrical insulation    | > 10 kΩ                    |
| Ground system resistance | < 0.5 Ω                    |

**Fully-anechoic chamber1** (9.8 meters×6.7 meters×6.7 meters) did not exceed following limits along the EMC testing:

|                            |                                        |
|----------------------------|----------------------------------------|
| Temperature                | Min. = 15 °C, Max. = 35 °C             |
| Relative humidity          | Min. = 25 %, Max. = 75 %               |
| Shielding effectiveness    | > 100 dB                               |
| Electrical insulation      | > 10 kΩ                                |
| Ground system resistance   | < 0.5 Ω                                |
| VSWR                       | Between 0 and 6 dB, from 1GHz to 18GHz |
| Site Attenuation Deviation | Between -4 and 4 dB, 30MHz to 1GHz     |

### 5.3 Measurement Uncertainty

Measurement Uncertainty of Conduction test

| Measurement Items              | Range        | Confidence Level | Calculated Uncertainty                   |
|--------------------------------|--------------|------------------|------------------------------------------|
| Emission Bandwidth             | 5150-5850MHz | 95%              | ±1.9%                                    |
| Maximum Conduct Output Power   | 5150-5850MHz | 95%              | ± 1.18 dB                                |
| Power Spectral Density         | 5150-5850MHz | 95%              | ±0.98 dB                                 |
| Band Edge Measurements         | 5150-5850MHz | 95%              | ±1.21dB                                  |
| Unwanted Emissions Measurement | 9kHz-40GHz   | 95%              | 9kHz-7GHz:±1.21dB<br>7GHz-40GHz: ±3.31dB |

|                     |              |     |       |
|---------------------|--------------|-----|-------|
| Frequency Stability | 5150-5850MHz | 95% | ±1.9% |
|---------------------|--------------|-----|-------|

**Measurement Uncertainty of Radiation test**

| Measurement Items                   | Uncertainty(dB) |
|-------------------------------------|-----------------|
| Radiated Emission 30MHz-1000MHz     | ±5.10           |
| Radiated Emission 1000MHz-18000MHz  | ±5.66           |
| Radiated Emission 18000MHz-40000MHz | ±5.22           |
| AC Powerline Conducted Emission     | ±4.38           |

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 6. Measurement Results

### 6.1 Duty cycle

#### 6.1.1 Measurement Limit and Method

| Standard               | Limit (dBm) |
|------------------------|-------------|
| FCC CRF Part 15.407(a) | NA          |
| RSS-247 6.2.4.2        | N/A         |

#### 6.1.2 Test Procedure

The measurement method is made according to KDB 789033 B


Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:


- A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on and off times of the transmitted signal.
- The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission, Set  $RBW > EBW$  if possible; otherwise, set  $RBW$  to the largest available value. Set  $VBW > RBW$ . Set detector = peak or average. The zero-span measurement method shall not be used unless both  $RBW$  and  $VBW$  are  $> 50/T$ , where  $T$  is defined in II.B.1.a), and the number of sweep points across duration  $T$  exceeds 100. (For example, if  $VBW$  and/or  $RBW$  are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T < 16.7$  microseconds.)

#### 6.1.3 Measurement Results


| Test Mode  | Antenna | Frequency [MHz] | Transmission Duration [ms] | Transmission Period [ms] | Duty Cycle [%] |
|------------|---------|-----------------|----------------------------|--------------------------|----------------|
| 11A        | Ant1    | 5745            | 1.39                       | 1.43                     | 97.20          |
| 11A        | Ant1    | 5785            | 1.39                       | 1.43                     | 97.20          |
| 11A        | Ant1    | 5825            | 1.39                       | 1.43                     | 97.20          |
| 11N20SISO  | Ant1    | 5745            | 1.30                       | 1.34                     | 97.01          |
| 11N20SISO  | Ant1    | 5785            | 1.30                       | 1.33                     | 97.74          |
| 11N20SISO  | Ant1    | 5825            | 1.30                       | 1.33                     | 97.74          |
| 11N40SISO  | Ant1    | 5755            | 0.64                       | 0.68                     | 94.12          |
| 11N40SISO  | Ant1    | 5795            | 0.65                       | 0.69                     | 94.20          |
| 11AC20SISO | Ant1    | 5745            | 1.31                       | 1.35                     | 97.04          |
| 11AC20SISO | Ant1    | 5785            | 1.31                       | 1.35                     | 97.04          |
| 11AC20SISO | Ant1    | 5825            | 1.31                       | 1.34                     | 97.76          |
| 11AC40SISO | Ant1    | 5755            | 0.65                       | 0.68                     | 95.59          |
| 11AC40SISO | Ant1    | 5795            | 0.65                       | 0.69                     | 94.20          |
| 11AC80SISO | Ant1    | 5775            | 0.33                       | 0.36                     | 91.67          |

Test Graphs

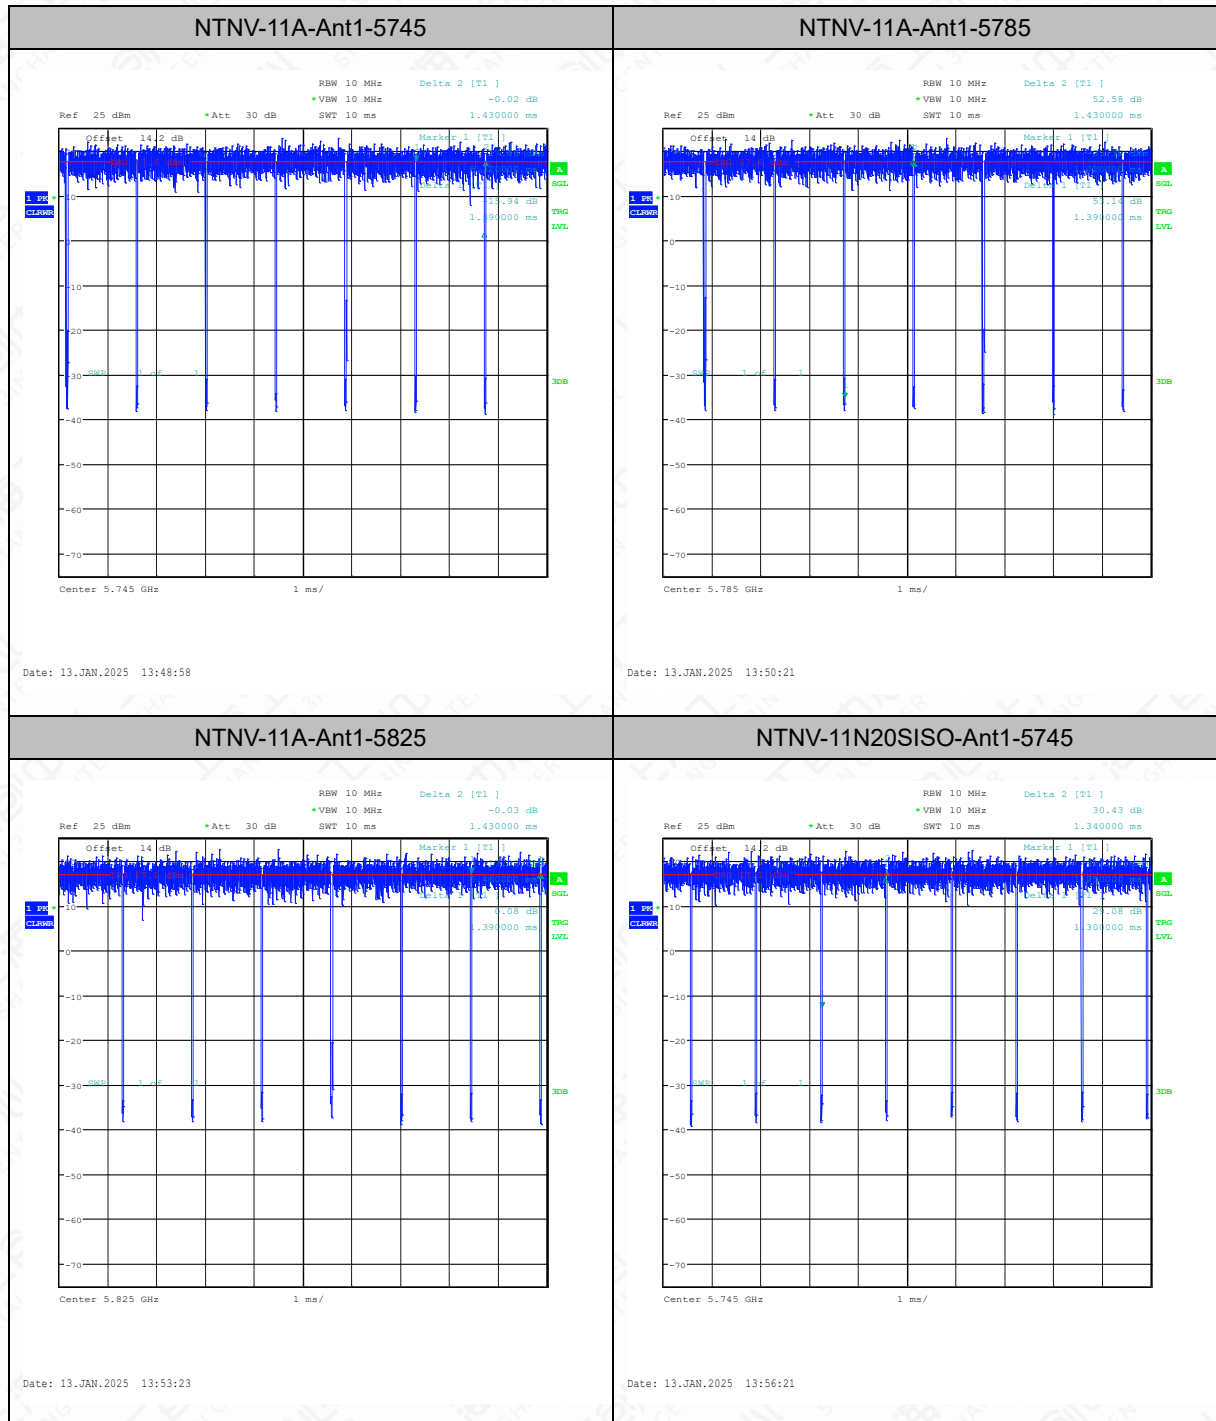


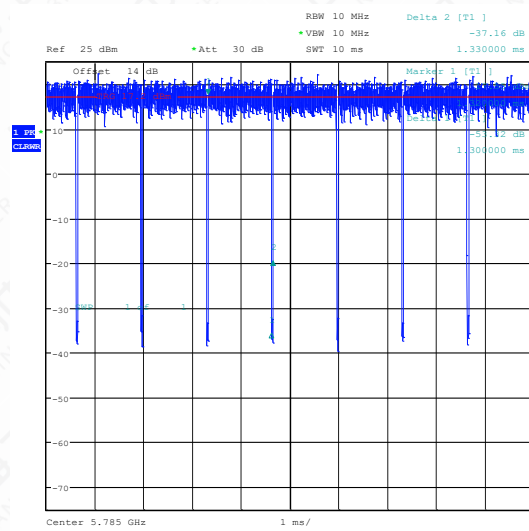**NTNV-11N20SISO-Ant1-5785**


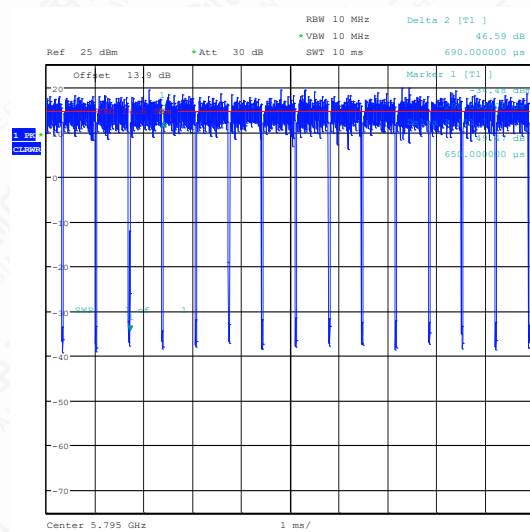
Date: 13.JAN.2025 13:59:31

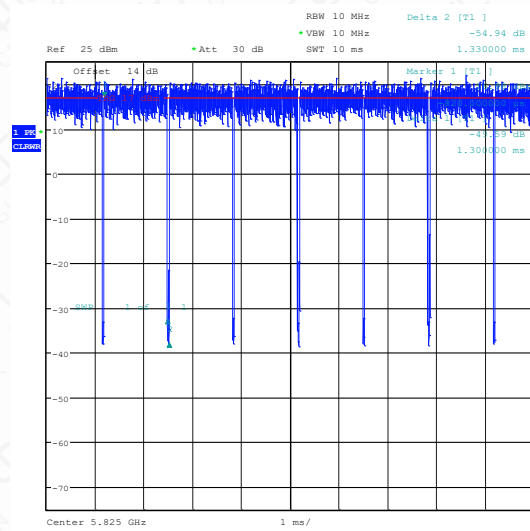**NTNV-11N20SISO-Ant1-5825**


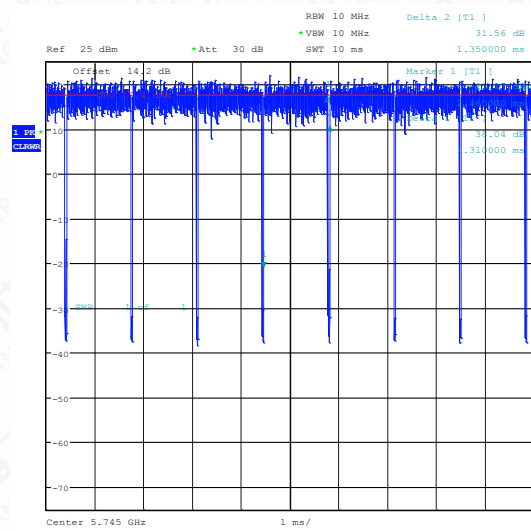
Date: 13.JAN.2025 14:00:52

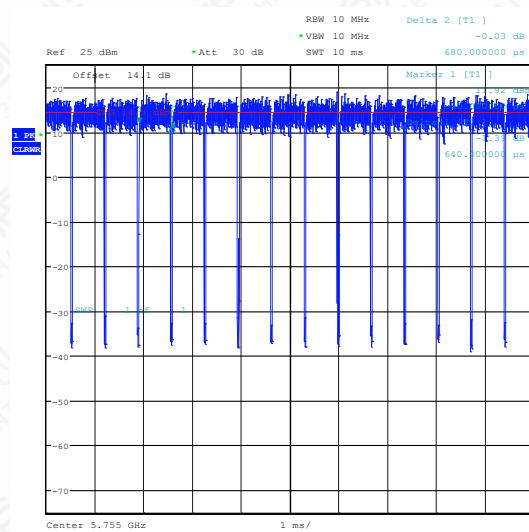**NTNV-11N40SISO-Ant1-5755**


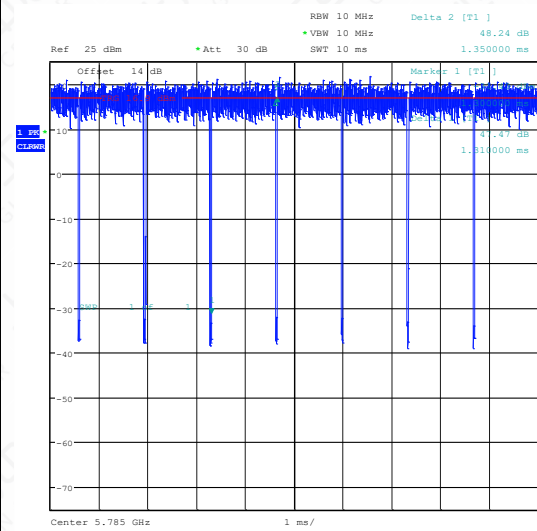
Date: 13.JAN.2025 14:08:47

**NTNV-11N40SISO-Ant1-5795**


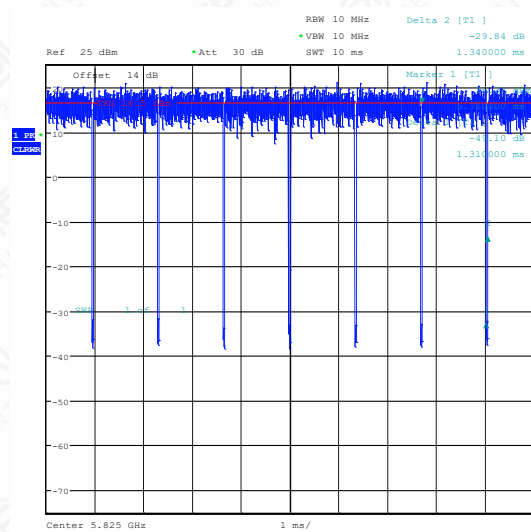
Date: 13.JAN.2025 14:12:39

**NTNV-11AC20SISO-Ant1-5745**


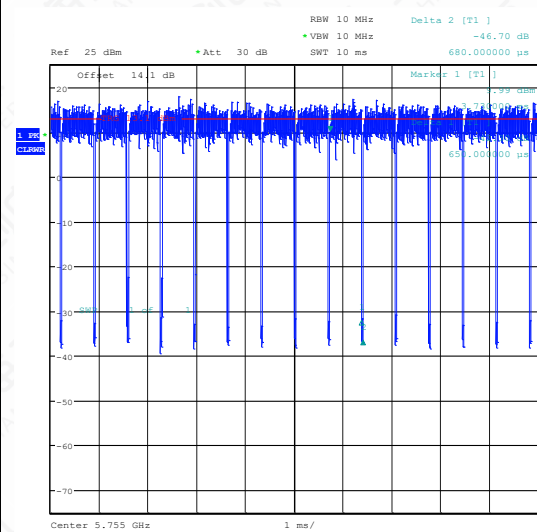
Date: 13.JAN.2025 14:24:47

**NTNV-11AC20SISO-Ant1-5785**


Date: 13.JAN.2025 14:27:36


**NTNV-11AC20SISO-Ant1-5825**


Date: 13.JAN.2025 14:28:50


**NTNV-11AC40SISO-Ant1-5755**


Date: 13.JAN.2025 14:33:57

NTNV-11AC40SISO-Ant1-5795

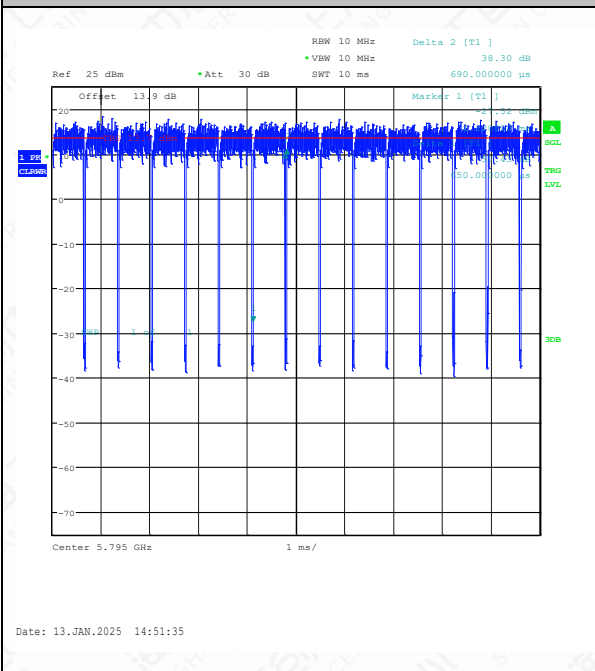

NTNV-11AC80SISO-Ant1-5775

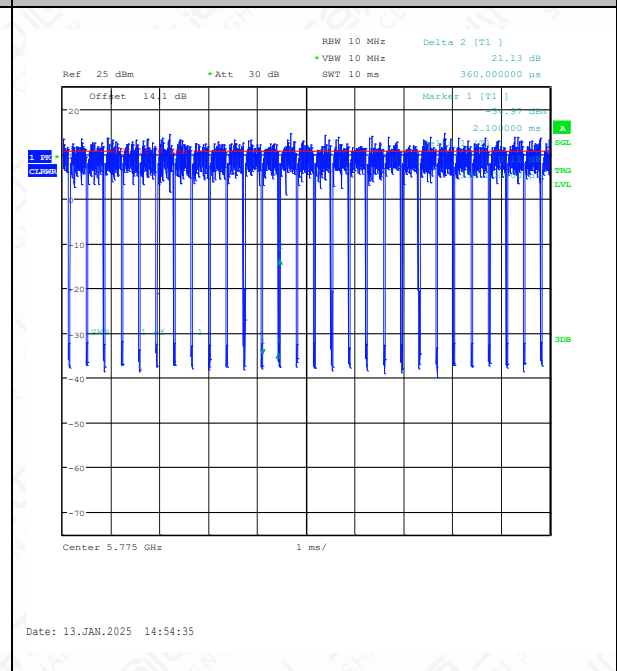

## 6.2 Maximum Average Output Power

### 6.2.1 Measurement Limit and Method

| Standard               | Limit (dBm) |
|------------------------|-------------|
| FCC CRF Part 15.407(a) | < 30        |
| RSS-247 6.2.4.2        | < 30        |


### 6.2.2 Test Procedure

The measurement method SA-2 is made according to KDB 789033 E

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. Measure the duty cycle,  $x$ , of the transmitter output signal as described in II.B.
2. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
3. Set RBW = 1 MHz. (iv) Set VBW  $\geq$  3 MHz.
4. Number of points in sweep  $\geq 2 \times \text{span} / \text{RBW}$ . (This ensures that bin-to-bin spacing is  $\leq \text{RBW}/2$ , so that narrowband signals are not lost between frequency bins.)
5. Sweep time = auto.
6. Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run.”
8. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
9. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
10. Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add  $10 \log (1/0.25) = 6 \text{ dB}$  if the duty cycle is 25%

### 6.2.3 Test setup

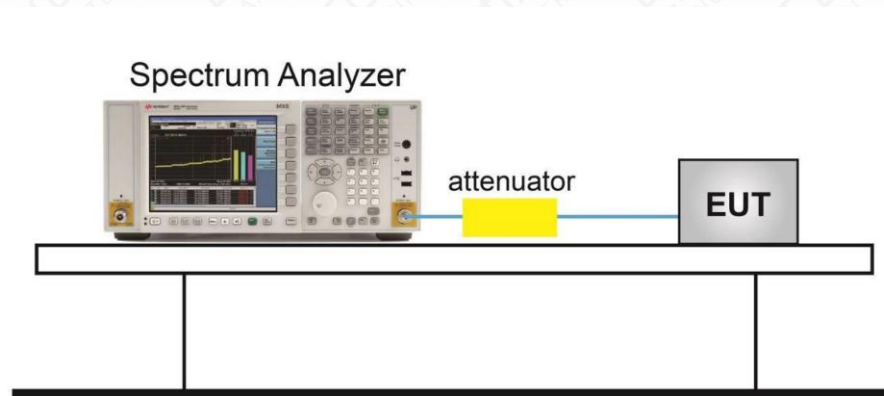


#### 6.2.4 Measurement Results

| Test Mode  | Frequency [MHz] | Set Power | Channel Power [dBm] | Duty Cycle [%] | DC Factor [dBm] | Result [dBm] | Limit [dBm] | Gain [dBi] | EIRP [dBm] | EIRP Limit [dBm] | Verdict |
|------------|-----------------|-----------|---------------------|----------------|-----------------|--------------|-------------|------------|------------|------------------|---------|
| 11A        | 5745            | 18        | 15.21               | 97.20          | 0.12            | 15.33        | ≤30.00      | 1.85       | 17.18      | ---              | PASS    |
| 11A        | 5785            | 18        | 15.42               | 97.20          | 0.12            | 15.54        | ≤30.00      | 1.85       | 17.39      | ---              | PASS    |
| 11A        | 5825            | 18        | 14.81               | 97.20          | 0.12            | 14.93        | ≤30.00      | 1.85       | 16.78      | ---              | PASS    |
| 11N20SISO  | 5745            | 18        | 15.02               | 97.01          | 0.13            | 15.15        | ≤30.00      | 1.85       | 17.00      | ---              | PASS    |
| 11N20SISO  | 5785            | 18        | 15.16               | 97.74          | 0.10            | 15.26        | ≤30.00      | 1.85       | 17.11      | ---              | PASS    |
| 11N20SISO  | 5825            | 18        | 14.56               | 97.74          | 0.10            | 14.66        | ≤30.00      | 1.85       | 16.51      | ---              | PASS    |
| 11N40SISO  | 5755            | 18        | 14.73               | 94.12          | 0.26            | 14.99        | ≤30.00      | 1.85       | 16.84      | ---              | PASS    |
| 11N40SISO  | 5795            | 18        | 14.86               | 94.20          | 0.26            | 15.12        | ≤30.00      | 1.85       | 16.97      | ---              | PASS    |
| 11AC20SISO | 5745            | 17        | 14.53               | 97.04          | 0.13            | 14.66        | ≤30.00      | 1.85       | 16.51      | ---              | PASS    |
| 11AC20SISO | 5785            | 17        | 14.51               | 97.04          | 0.13            | 14.64        | ≤30.00      | 1.85       | 16.49      | ---              | PASS    |
| 11AC20SISO | 5825            | 17        | 13.93               | 97.76          | 0.10            | 14.03        | ≤30.00      | 1.85       | 15.88      | ---              | PASS    |
| 11AC40SISO | 5755            | 16        | 12.80               | 95.59          | 0.20            | 13.00        | ≤30.00      | 1.85       | 14.85      | ---              | PASS    |
| 11AC40SISO | 5795            | 16        | 13.59               | 94.20          | 0.26            | 13.85        | ≤30.00      | 1.85       | 15.70      | ---              | PASS    |
| 11AC80SISO | 5775            | 15.5      | 12.81               | 91.67          | 0.38            | 13.19        | ≤30.00      | 1.85       | 15.04      | ---              | PASS    |


Note:

- 1.The Duty Cycle Factor is compensated in the graph.
2. In the graph, the Center frequency = (Low frequency of 26dB OBW + High frequency of 26dB OBW) /2.
- 3.The 11a data rate 6Mbps is selected as worse condition, 11n/11ac data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Test Graphs channel power

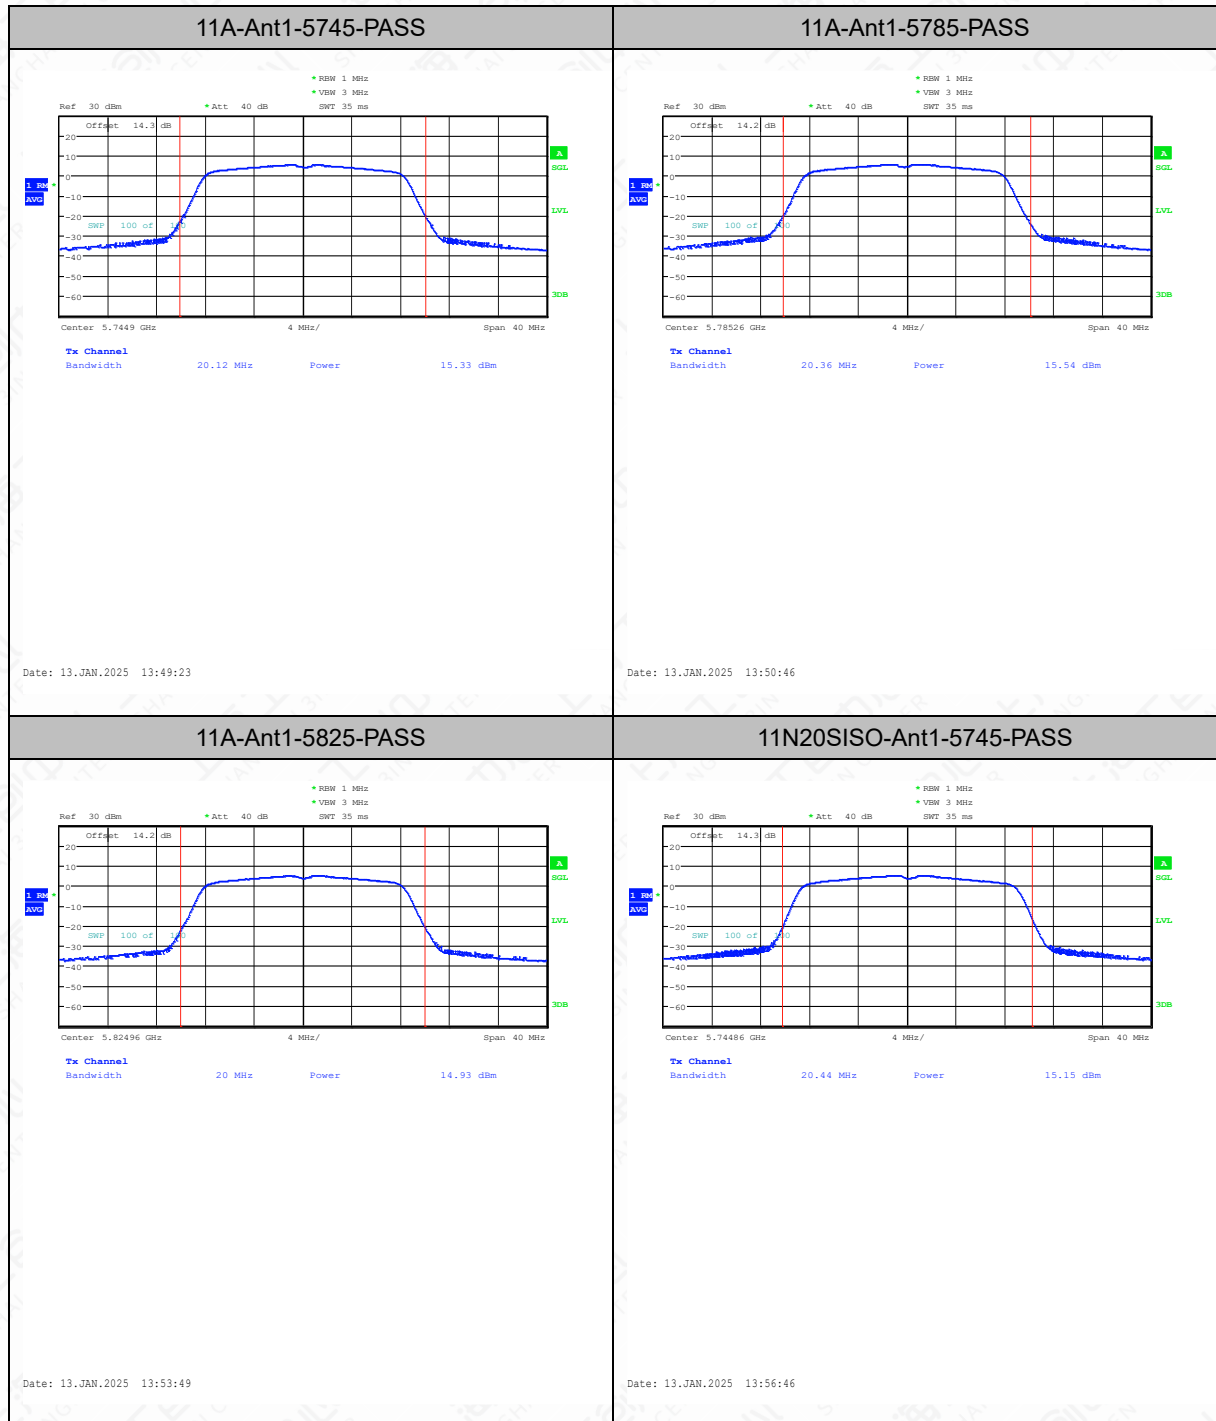


11N20SISO-Ant1-5785-PASS

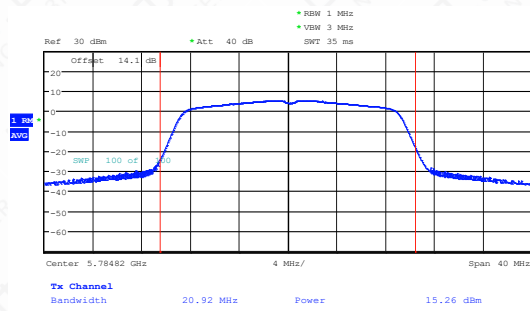


Date: 13.JAN.2025 13:59:57

11N20SISO-Ant1-5825-PASS

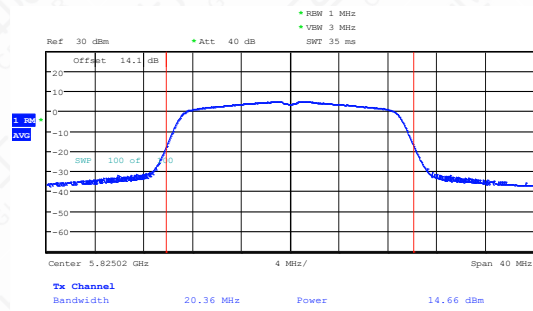


Date: 13.JAN.2025 14:01:18

11N40SISO-Ant1-5755-PASS

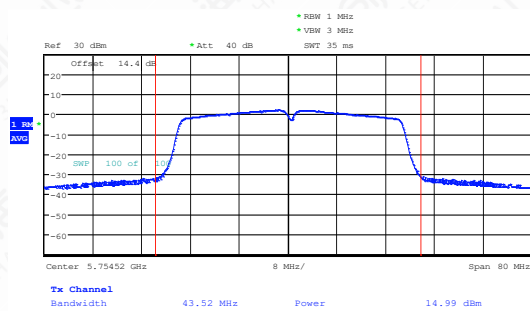


Date: 13.JAN.2025 14:09:13

11N40SISO-Ant1-5795-PASS

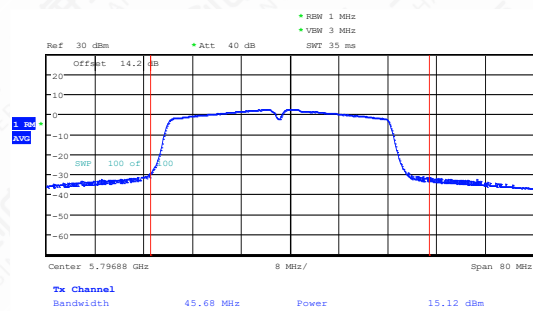


Date: 13.JAN.2025 14:13:05

11AC20SISO-Ant1-5745-PASS

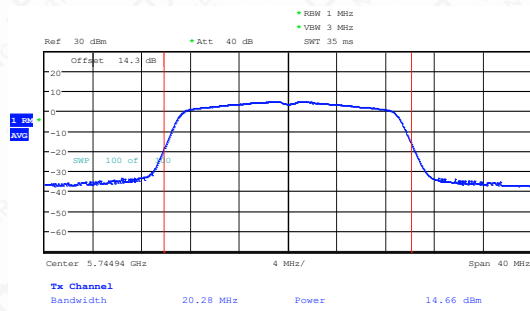


Date: 13.JAN.2025 14:25:12

11AC20SISO-Ant1-5785-PASS

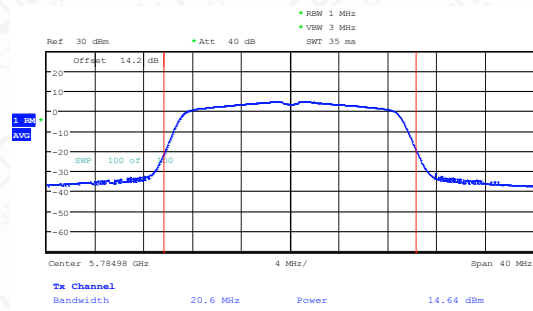


Date: 13.JAN.2025 14:28:02

11AC20SISO-Ant1-5825-PASS

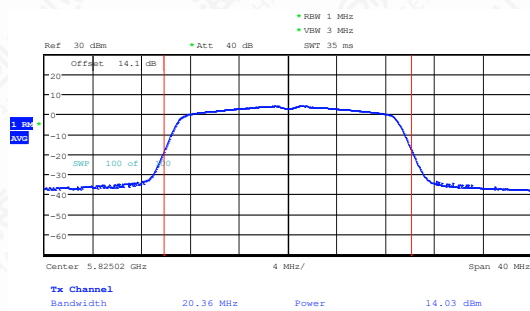


Date: 13.JAN.2025 14:29:16

11AC40SISO-Ant1-5755-PASS

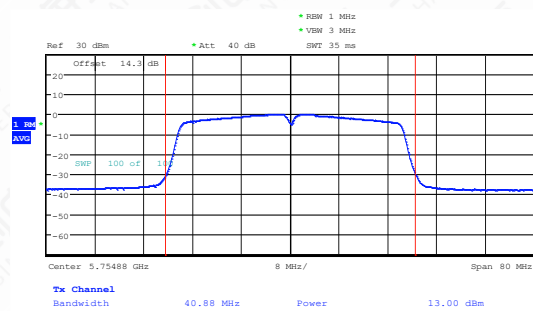


Date: 13.JAN.2025 14:34:23

11AC40SISO-Ant1-5795-PASS

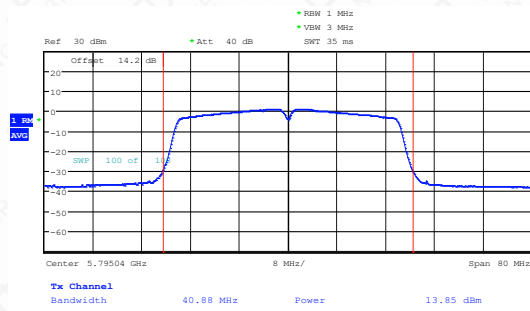

Date: 13.JAN.2025 14:52:01

11AC80SISO-Ant1-5775-PASS

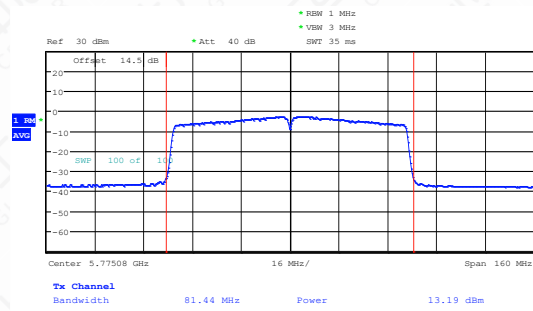

Date: 13.JAN.2025 14:55:08

### 6.3 Peak Power Spectral Density

#### 6.2.1 Measurement Limit

| Standard                  | Limit           |
|---------------------------|-----------------|
| FCC 47 CFR Part 15.407(a) | < 30 dBm/500kHz |
| RSS-247 6.2.4.2           | < 30dBm/500kHz  |


#### 6.2.2 Test Procedure

The measurement method is made according to KDB 789033 F

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...." (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable:
  - a) If Method SA-2 or SA-2 Alternative was used, add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the peak of the spectrum.
  - b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth.
5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
  - a) Set  $RBW \geq 1/T$ , where  $T$  is defined in II.B.I.a).
  - b) Set  $VBW \geq 3 \text{ RBW}$ .
  - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log (500 \text{ kHz}/RBW)$  to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
  - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10 \log (1\text{MHz}/RBW)$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
  - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for steps 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

### 6.2.3 Test setup

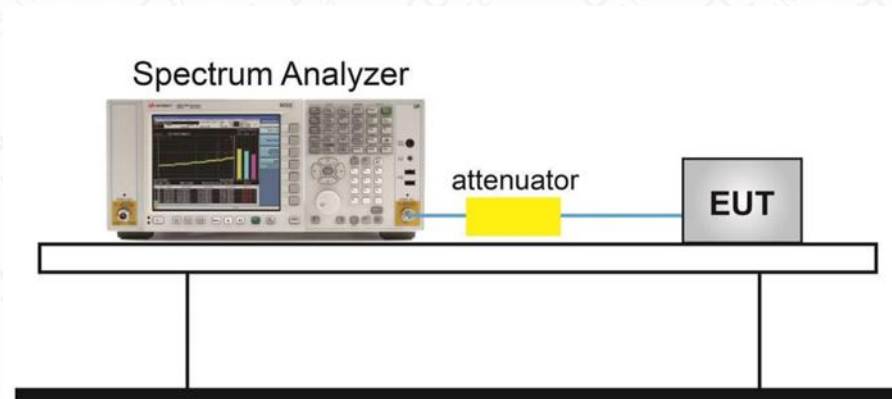


### 6.2.4 Measurement Results


| TestMode   | Antenna | Frequency[MHz] | Result [dBm/MHz] | Limit[dBm/MHz] | Verdict |
|------------|---------|----------------|------------------|----------------|---------|
| 11A        | Ant1    | 5745           | -0.01            | ≤30.00         | PASS    |
| 11A        | Ant1    | 5785           | -0.10            | ≤30.00         | PASS    |
| 11A        | Ant1    | 5825           | -0.65            | ≤30.00         | PASS    |
| 11N20SISO  | Ant1    | 5745           | -0.63            | ≤30.00         | PASS    |
| 11N20SISO  | Ant1    | 5785           | -0.55            | ≤30.00         | PASS    |
| 11N20SISO  | Ant1    | 5825           | -1.09            | ≤30.00         | PASS    |
| 11N40SISO  | Ant1    | 5755           | -3.81            | ≤30.00         | PASS    |
| 11N40SISO  | Ant1    | 5795           | -3.75            | ≤30.00         | PASS    |
| 11AC20SISO | Ant1    | 5745           | -1.78            | ≤30.00         | PASS    |
| 11AC20SISO | Ant1    | 5785           | -1.85            | ≤30.00         | PASS    |
| 11AC20SISO | Ant1    | 5825           | -2.15            | ≤30.00         | PASS    |
| 11AC40SISO | Ant1    | 5755           | -6.10            | ≤30.00         | PASS    |
| 11AC40SISO | Ant1    | 5795           | -5.94            | ≤30.00         | PASS    |
| 11AC80SISO | Ant1    | 5775           | -9.31            | ≤30.00         | PASS    |

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.


2.The Duty Cycle Factor is compensated in the graph.

Test graphs as below:

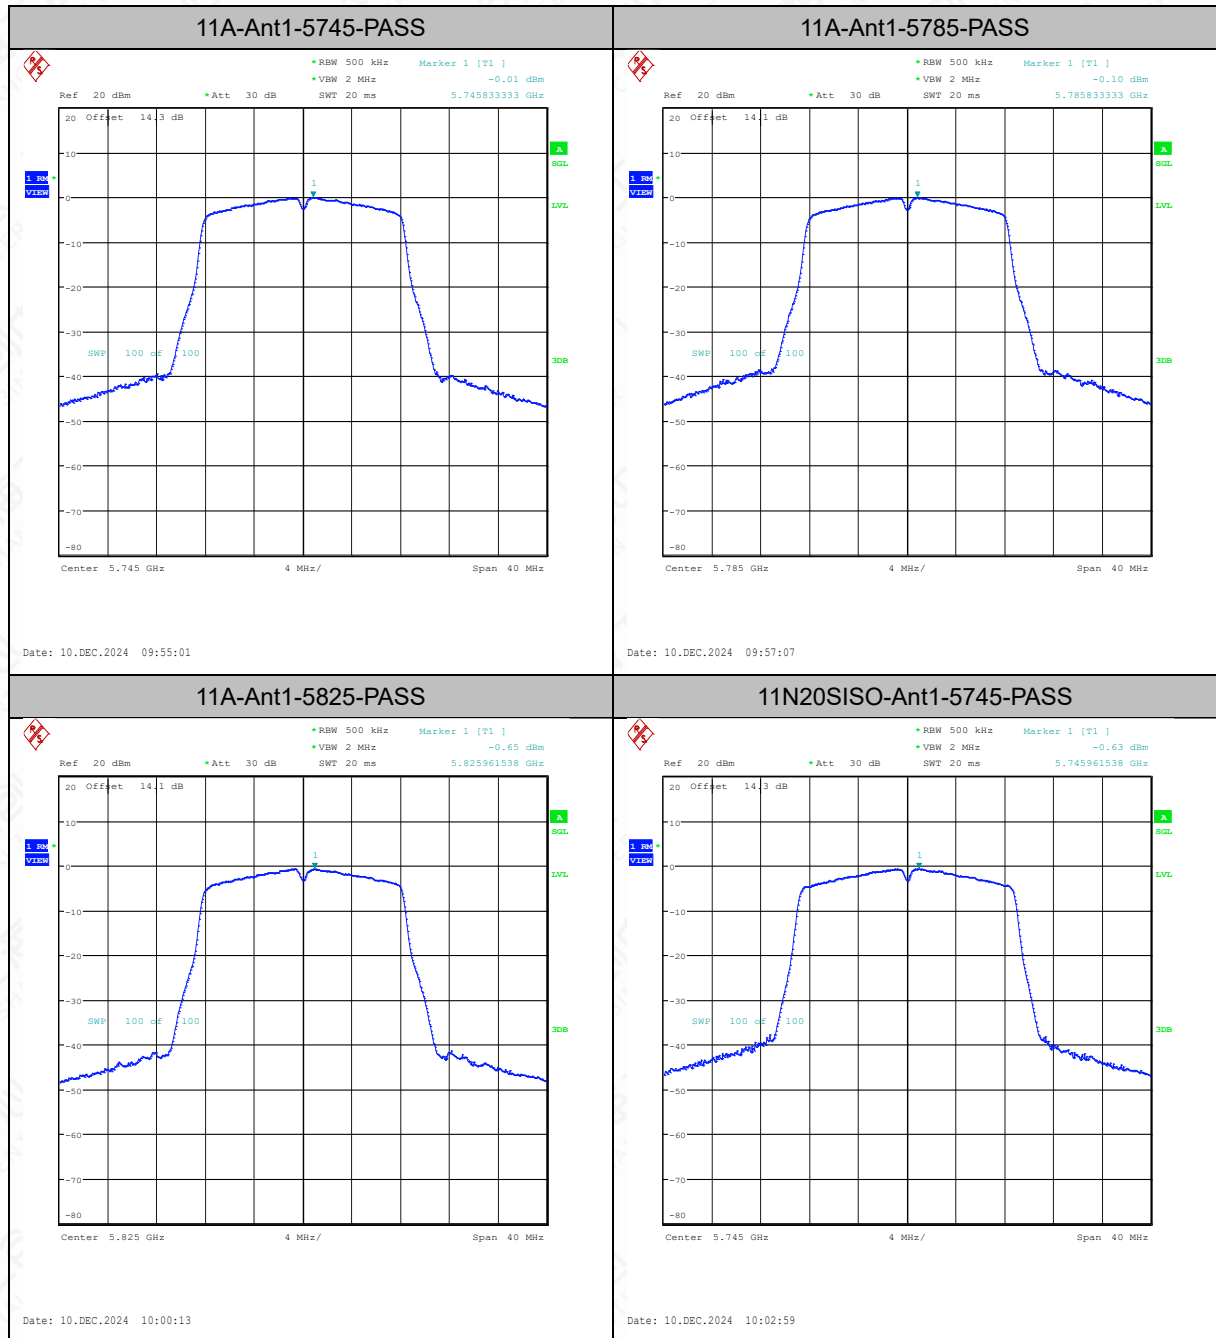


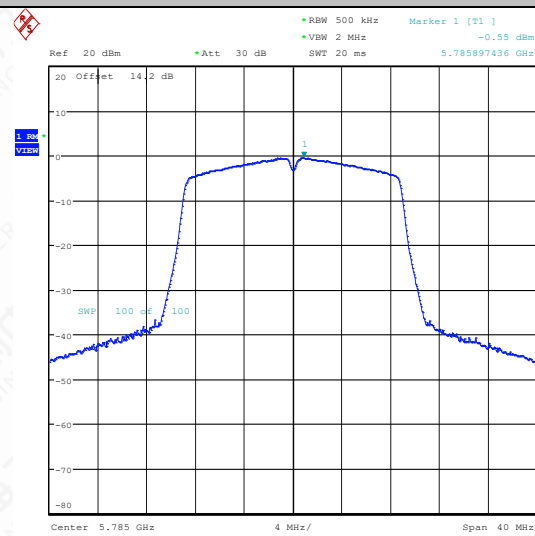**11N20SISO-Ant1-5785-PASS**


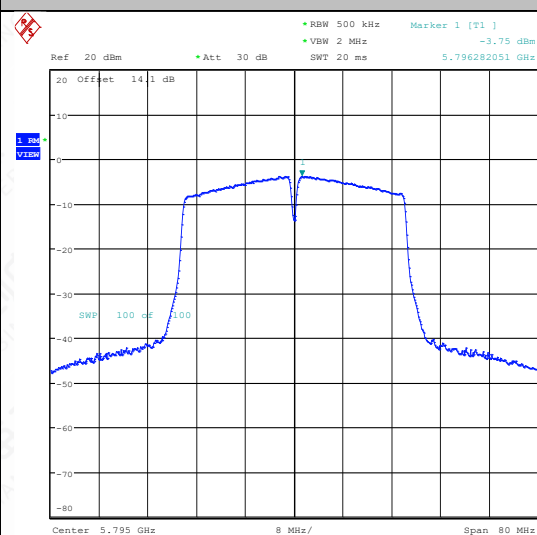
Date: 10.DEC.2024 10:04:43

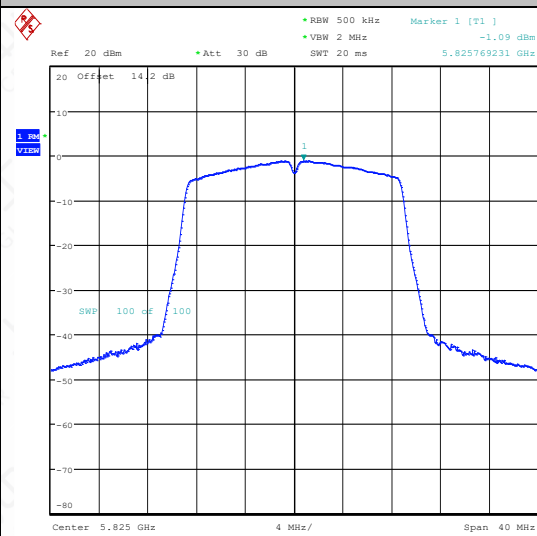**11N20SISO-Ant1-5825-PASS**


Date: 10.DEC.2024 10:07:52

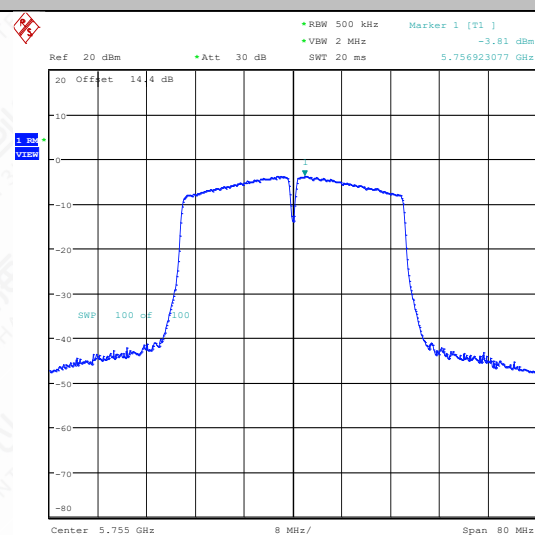
**11N40SISO-Ant1-5755-PASS**


Date: 10.DEC.2024 10:15:06

**11N40SISO-Ant1-5795-PASS**


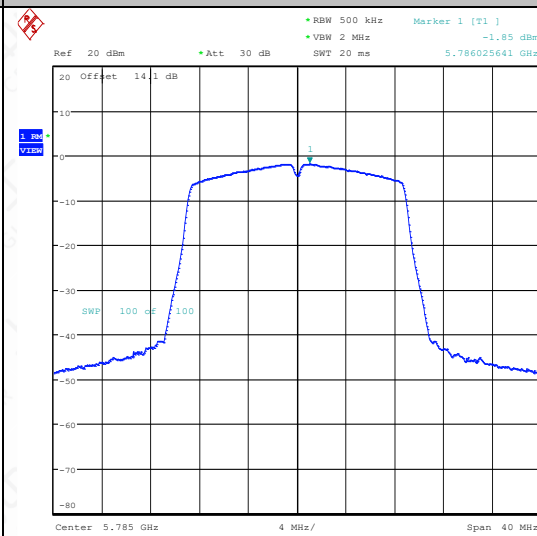
Date: 10.DEC.2024 10:17:02

11AC20SISO-Ant1-5745-PASS

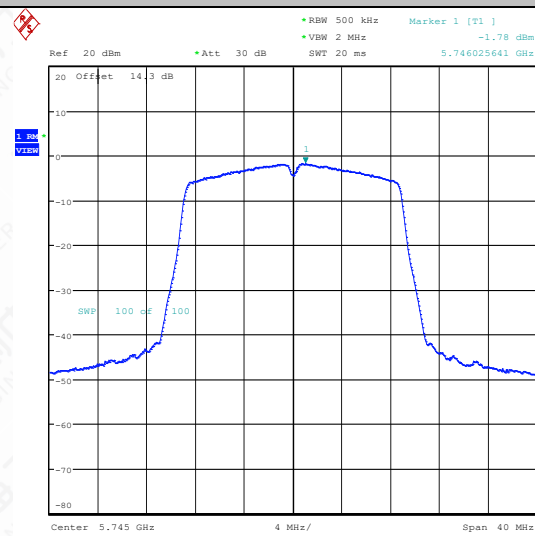


Date: 10.DEC.2024 10:23:46

11AC20SISO-Ant1-5785-PASS




Date: 10.DEC.2024 10:27:02

11AC20SISO-Ant1-5825-PASS

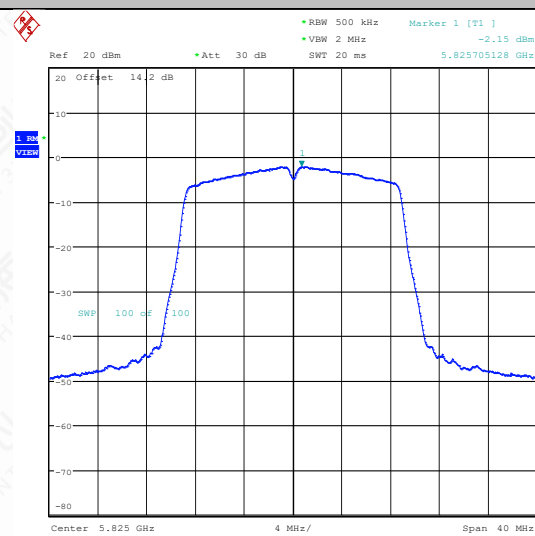


Date: 10.DEC.2024 11:00:19

11AC40SISO-Ant1-5755-PASS

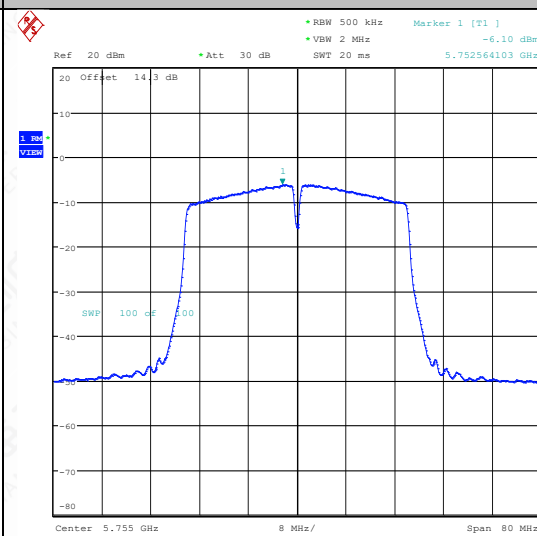

Date: 10.DEC.2024 13:08:09

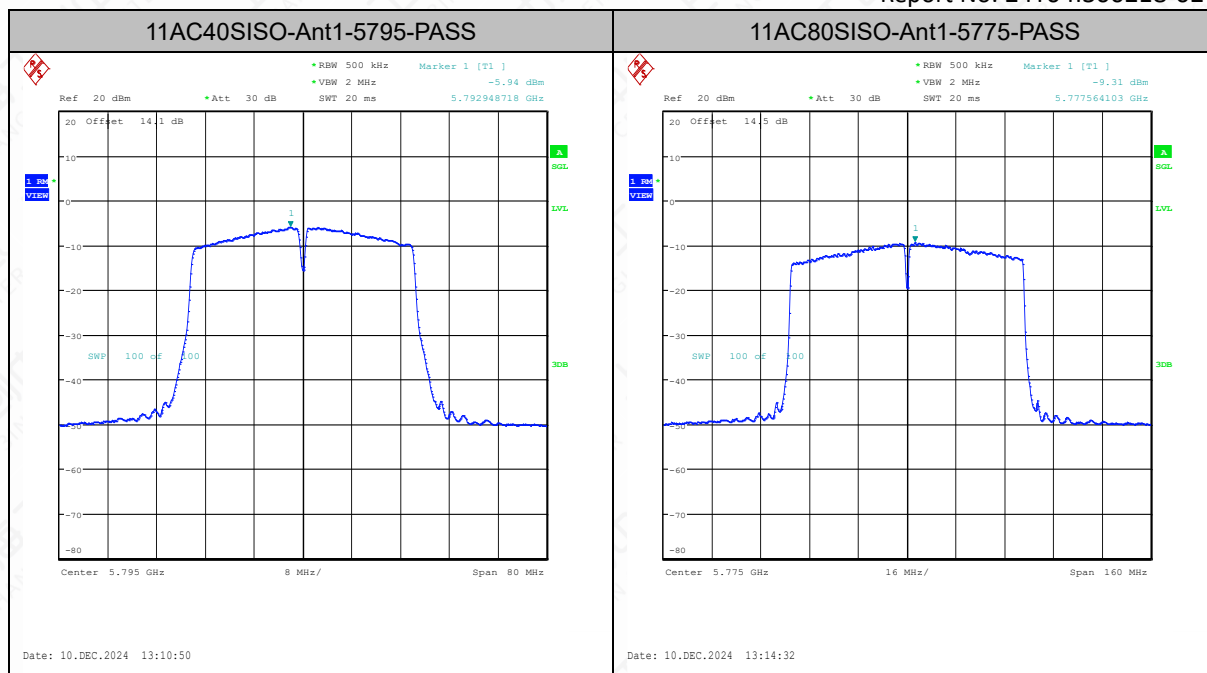

## 6.4 6dB & 26dB Occupied Bandwidth

### 6.4.1 Measurement Limit

| Standard                  | Limit(KHz) |
|---------------------------|------------|
| FCC 47 CFR Part 15.407(e) | ≥500       |
| RSS-247 6.2.4.2           | ≥500       |


### 6.4.2 Test Procedure

The measurement is made according to KDB 789033 C

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725-5.85GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW= 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 26dB relative to the maximum level measured in the fundamental emission.

### 6.4.3 Test Setup

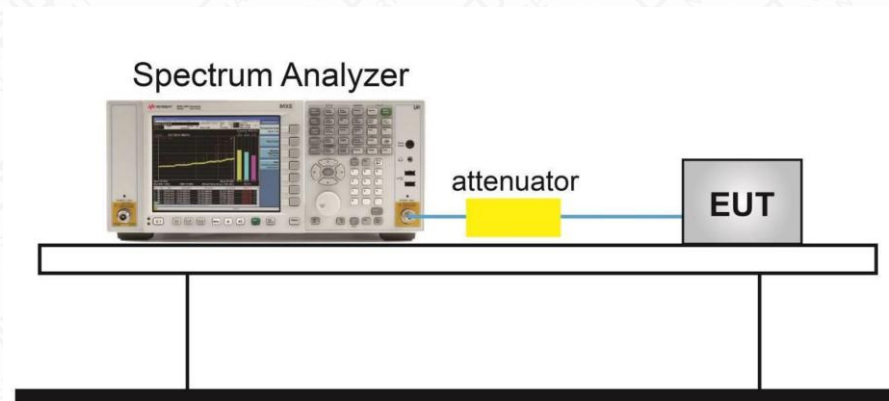



#### 6.4.4 Measurement Result


### 6dB Occupied Bandwidth Measurement Results:

| TestMode   | Antenna | Frequency[MHz] | 6db EBW<br>[MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|------------|---------|----------------|------------------|---------|---------|------------|---------|
| 11A        | Ant1    | 5745           | 15.08            | 5737.44 | 5752.52 | 0.5        | PASS    |
| 11A        | Ant1    | 5785           | 15.36            | 5777.40 | 5792.76 | 0.5        | PASS    |
| 11A        | Ant1    | 5825           | 15.08            | 5817.48 | 5832.56 | 0.5        | PASS    |
| 11N20SISO  | Ant1    | 5745           | 15.28            | 5737.44 | 5752.72 | 0.5        | PASS    |
| 11N20SISO  | Ant1    | 5785           | 15.08            | 5777.44 | 5792.52 | 0.5        | PASS    |
| 11N20SISO  | Ant1    | 5825           | 15.08            | 5817.44 | 5832.52 | 0.5        | PASS    |
| 11N40SISO  | Ant1    | 5755           | 35.12            | 5737.40 | 5772.52 | 0.5        | PASS    |
| 11N40SISO  | Ant1    | 5795           | 33.84            | 5778.68 | 5812.52 | 0.5        | PASS    |
| 11AC20SISO | Ant1    | 5745           | 15.08            | 5737.44 | 5752.52 | 0.5        | PASS    |
| 11AC20SISO | Ant1    | 5785           | 15.04            | 5777.44 | 5792.48 | 0.5        | PASS    |
| 11AC20SISO | Ant1    | 5825           | 15.12            | 5817.44 | 5832.56 | 0.5        | PASS    |
| 11AC40SISO | Ant1    | 5755           | 35.12            | 5737.40 | 5772.52 | 0.5        | PASS    |
| 11AC40SISO | Ant1    | 5795           | 35.04            | 5777.48 | 5812.52 | 0.5        | PASS    |
| 11AC80SISO | Ant1    | 5775           | 75.20            | 5737.40 | 5812.60 | 0.5        | PASS    |


Test graphs as below:

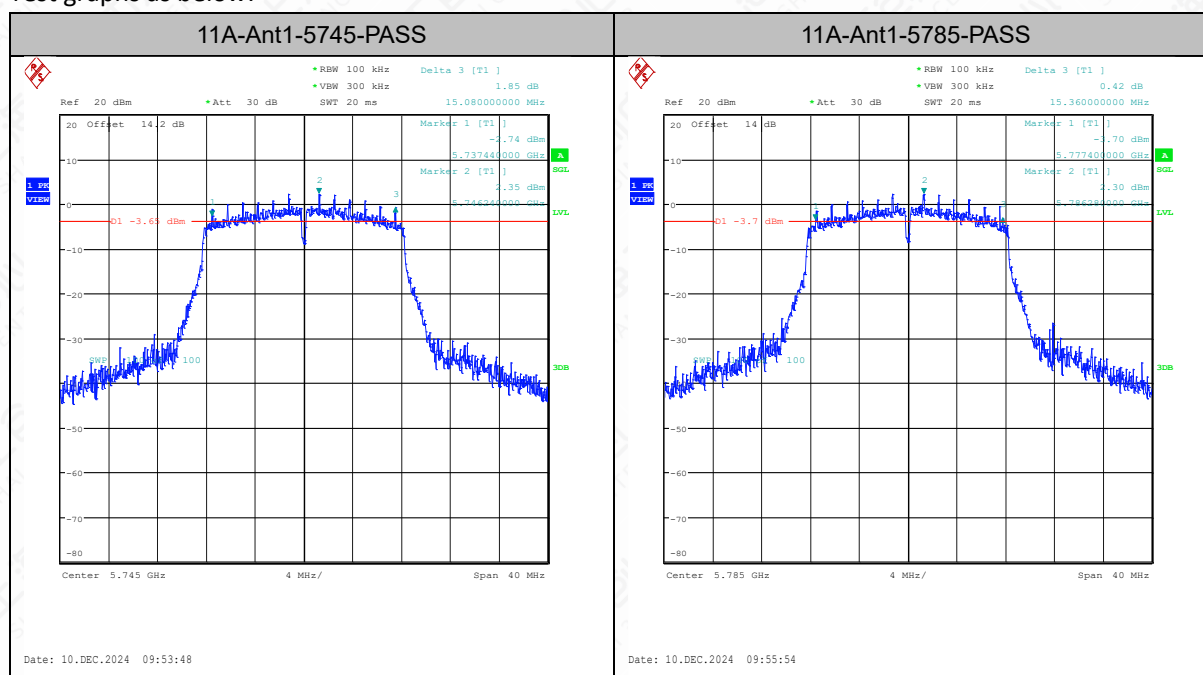

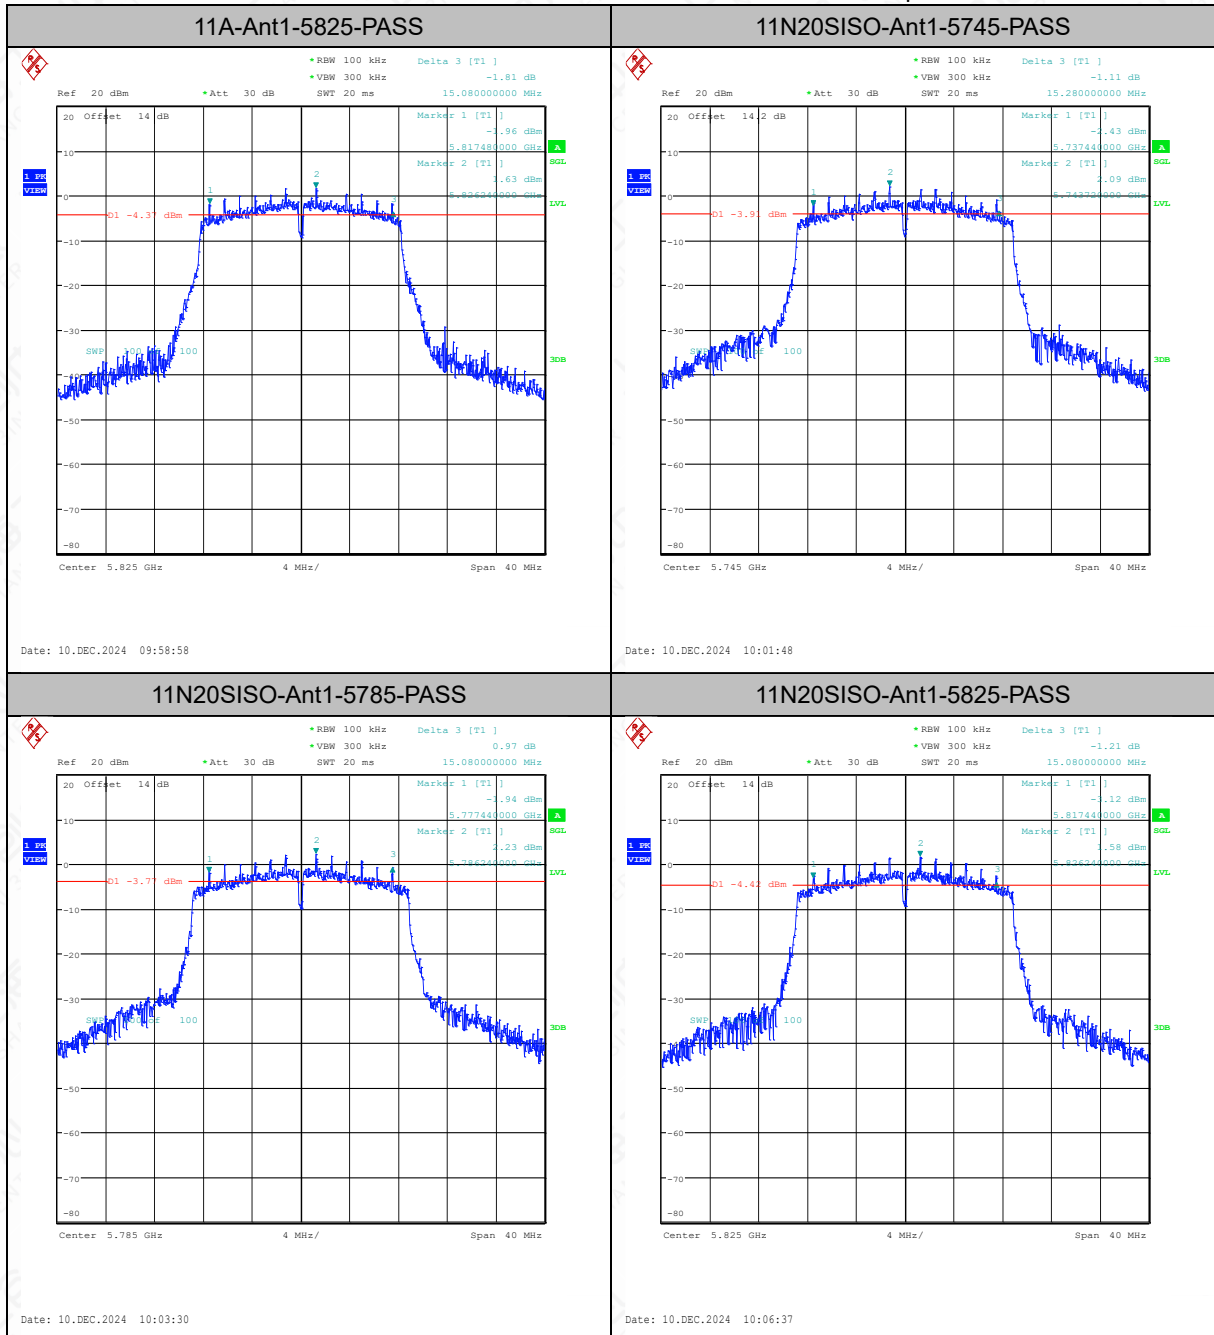

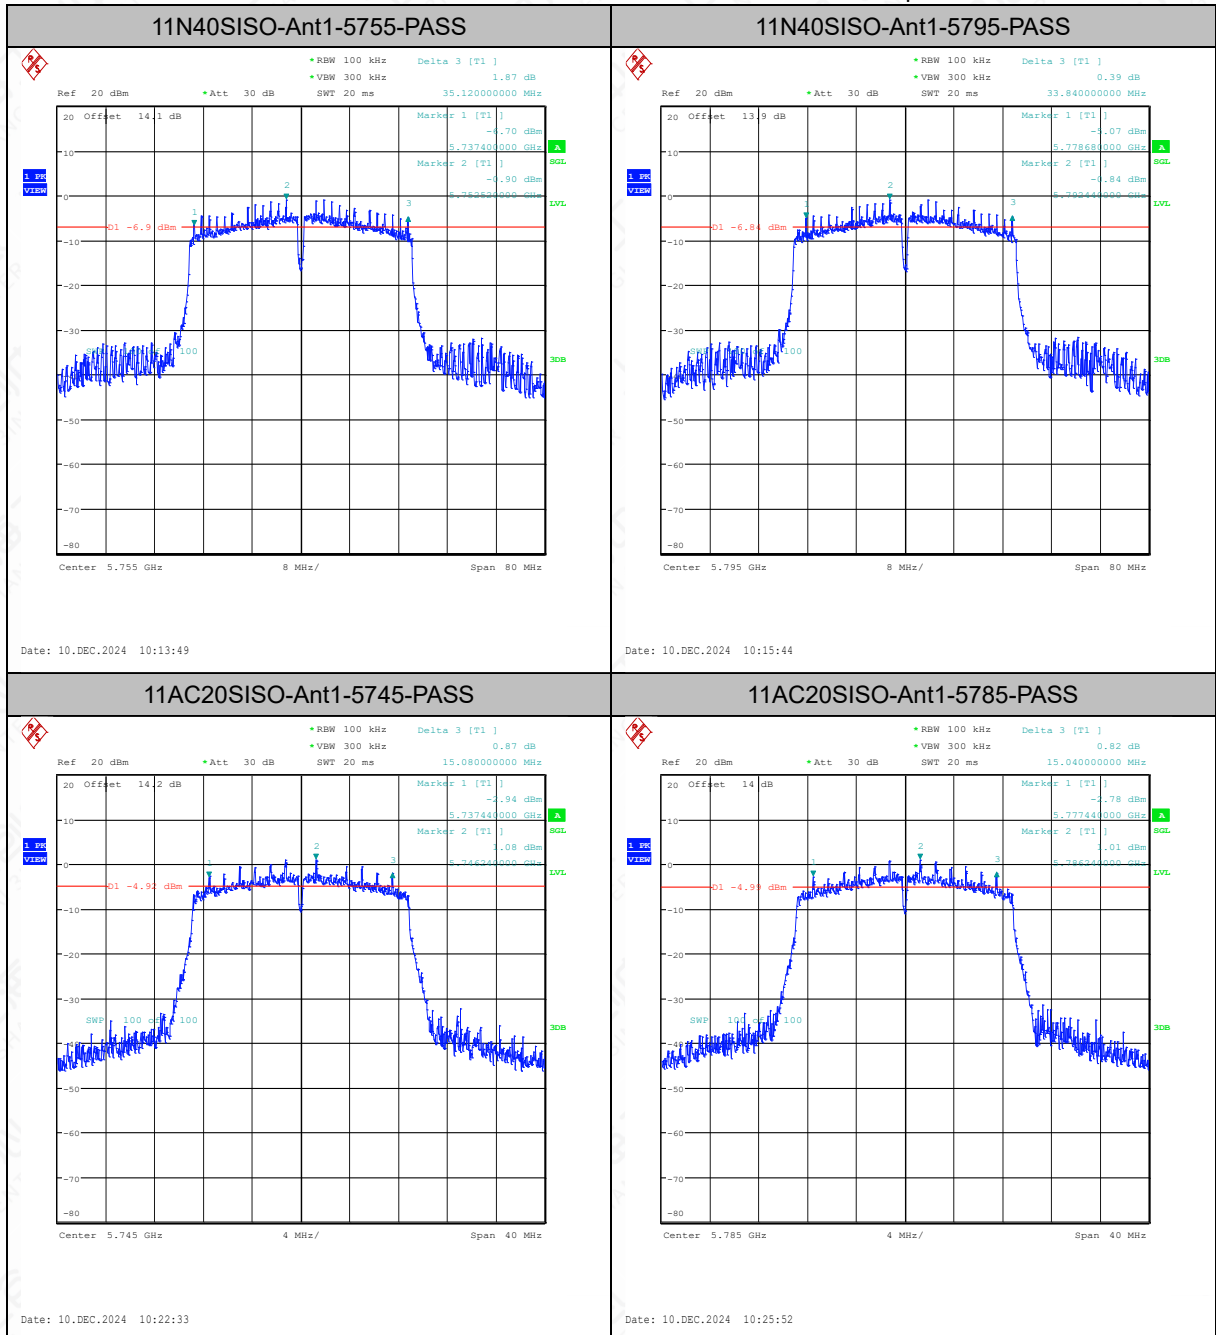


11AC20SISO-Ant1-5825-PASS

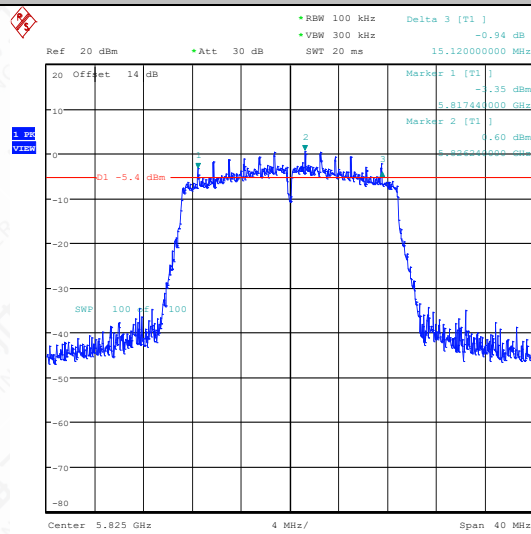


Date: 10.DEC.2024 10:59:03

11AC40SISO-Ant1-5755-PASS

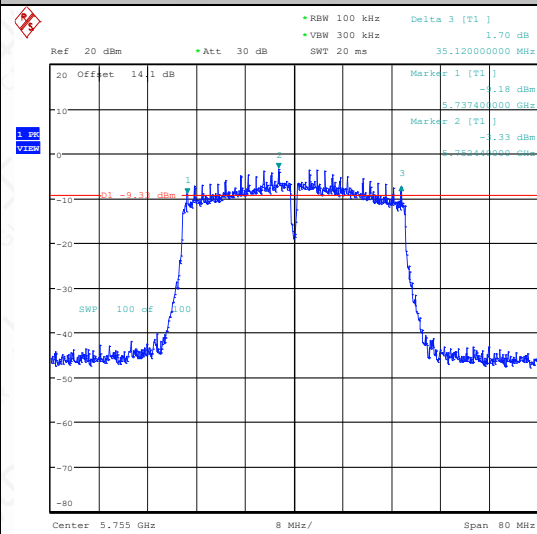


Date: 10.DEC.2024 13:06:51

11AC40SISO-Ant1-5795-PASS

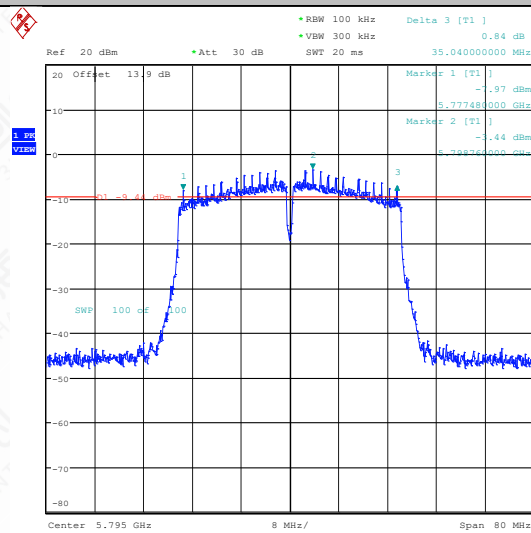

Date: 10.DEC.2024 13:09:29

11AC80SISO-Ant1-5775-PASS

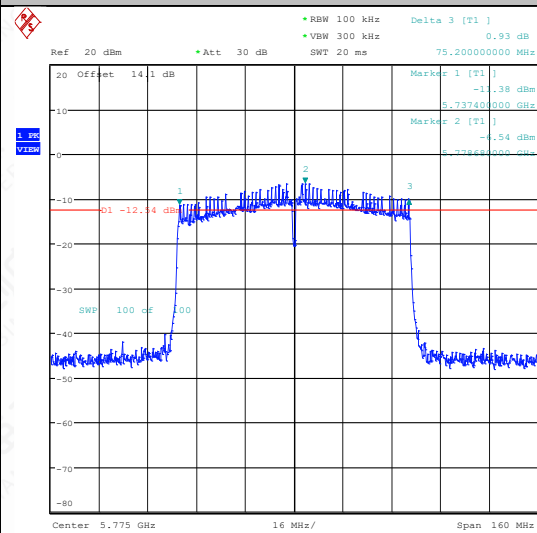


Date: 10.DEC.2024 13:12:05


## 26dB Occupied Bandwidth Measurement Results:

| TestMode   | Antenna | Frequency[MHz] | 26db EBW [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|------------|---------|----------------|----------------|---------|---------|------------|---------|
| 11A        | Ant1    | 5745           | 20.12          | 5734.84 | 5754.96 | ---        | ---     |
| 11A        | Ant1    | 5785           | 20.36          | 5775.08 | 5795.44 | ---        | ---     |
| 11A        | Ant1    | 5825           | 20.00          | 5814.96 | 5834.96 | ---        | ---     |
| 11N20SISO  | Ant1    | 5745           | 20.44          | 5734.64 | 5755.08 | ---        | ---     |
| 11N20SISO  | Ant1    | 5785           | 20.92          | 5774.36 | 5795.28 | ---        | ---     |
| 11N20SISO  | Ant1    | 5825           | 20.36          | 5814.84 | 5835.20 | ---        | ---     |
| 11N40SISO  | Ant1    | 5755           | 43.52          | 5732.76 | 5776.28 | ---        | ---     |
| 11N40SISO  | Ant1    | 5795           | 45.68          | 5774.04 | 5819.72 | ---        | ---     |
| 11AC20SISO | Ant1    | 5745           | 20.28          | 5734.80 | 5755.08 | ---        | ---     |
| 11AC20SISO | Ant1    | 5785           | 20.60          | 5774.68 | 5795.28 | ---        | ---     |
| 11AC20SISO | Ant1    | 5825           | 20.36          | 5814.84 | 5835.20 | ---        | ---     |
| 11AC40SISO | Ant1    | 5755           | 40.88          | 5734.44 | 5775.32 | ---        | ---     |
| 11AC40SISO | Ant1    | 5795           | 40.88          | 5774.60 | 5815.48 | ---        | ---     |
| 11AC80SISO | Ant1    | 5775           | 81.44          | 5734.36 | 5815.80 | ---        | ---     |


## Test Graphs

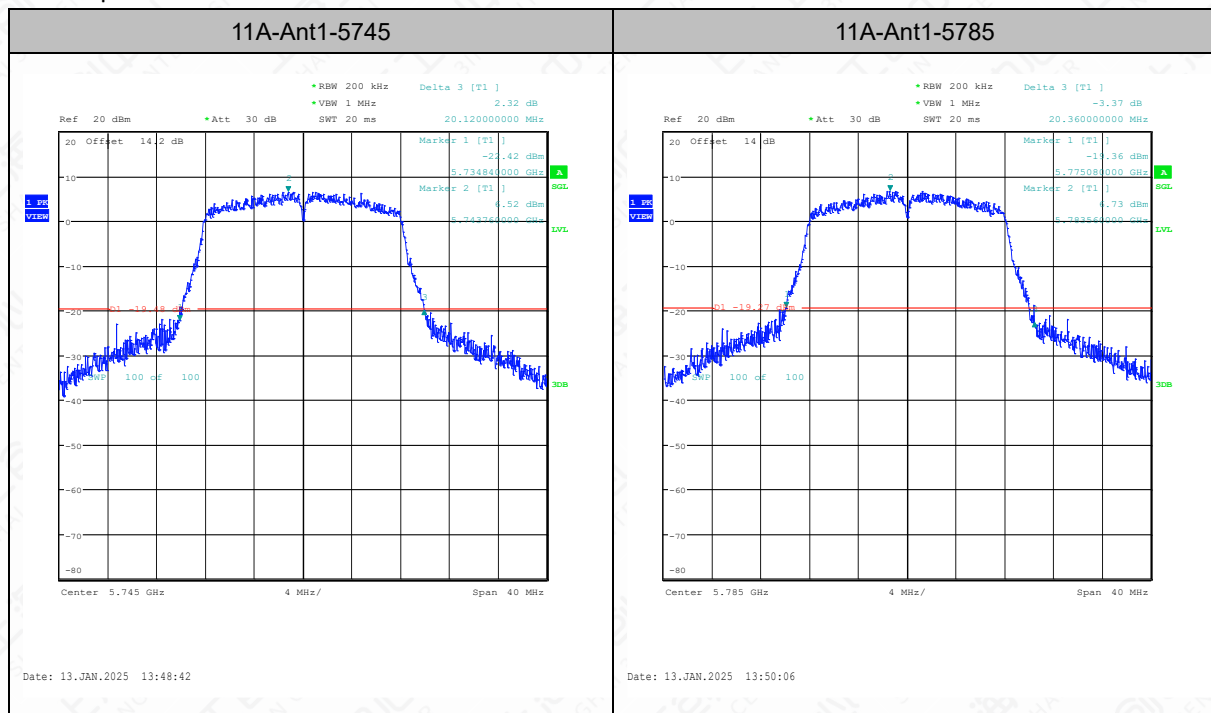


11A-Ant1-5825

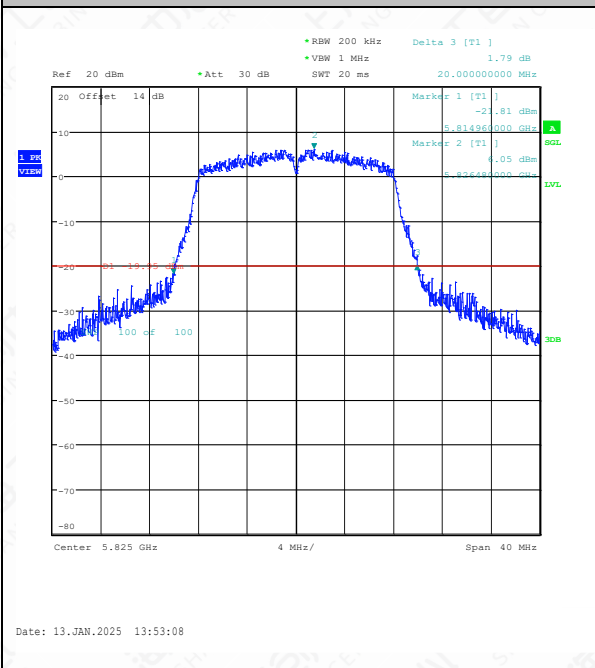


11N20SISO-Ant1-5745




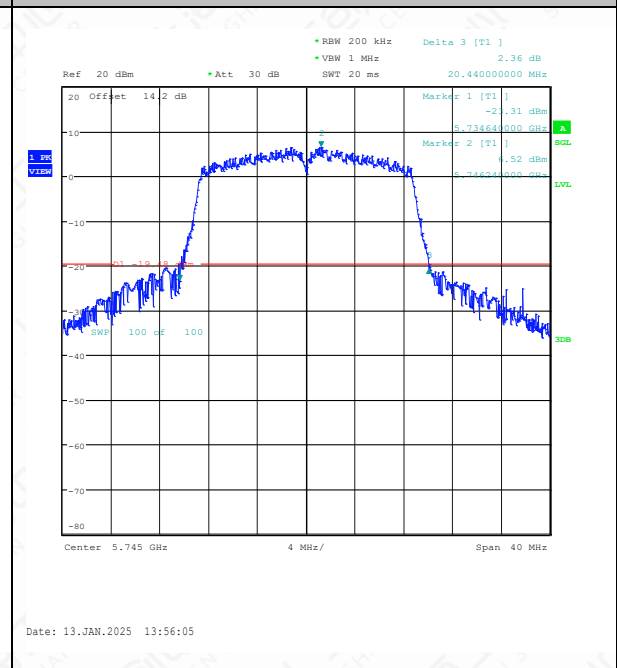


11N20SISO-Ant1-5785

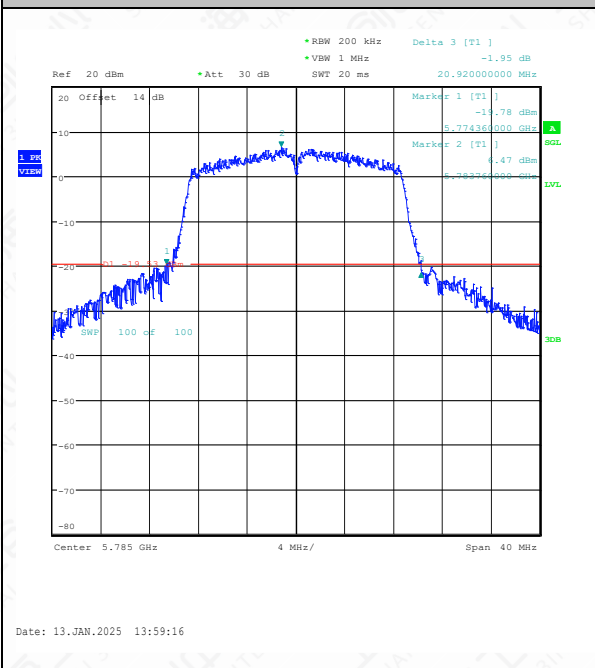


11N20SISO-Ant1-5825

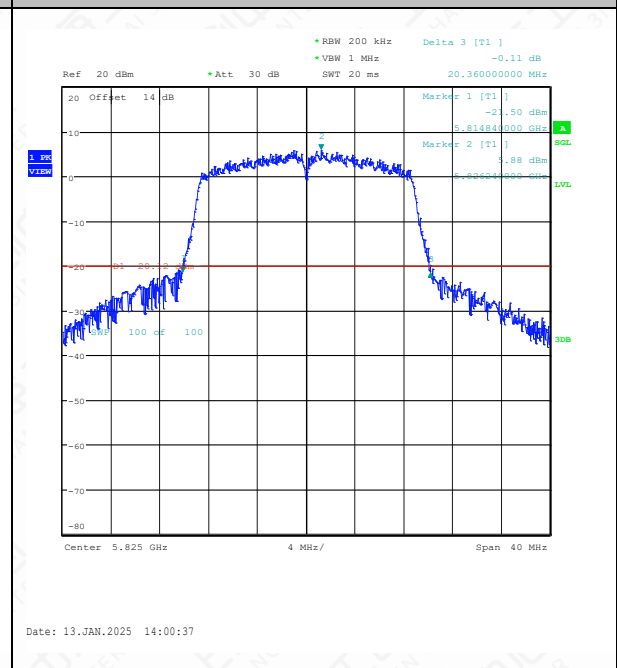

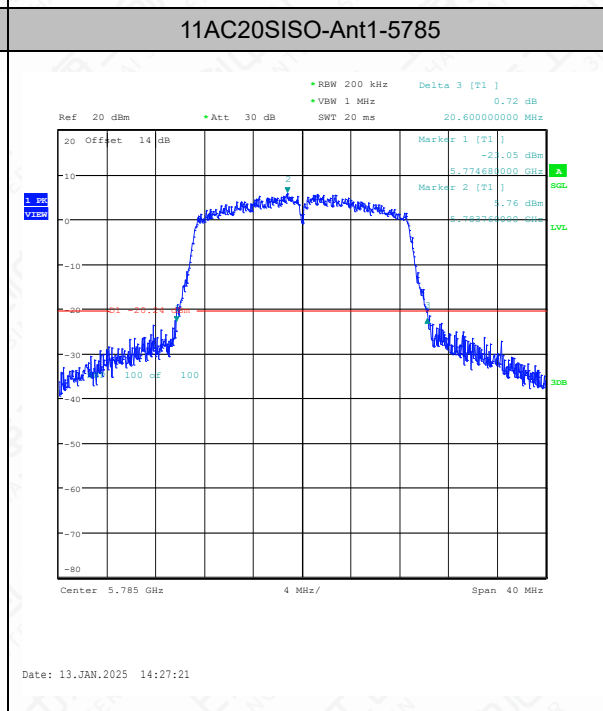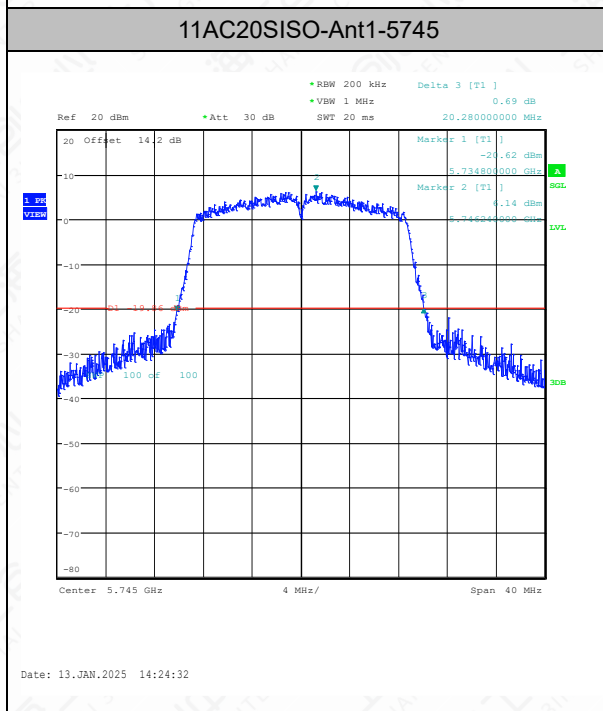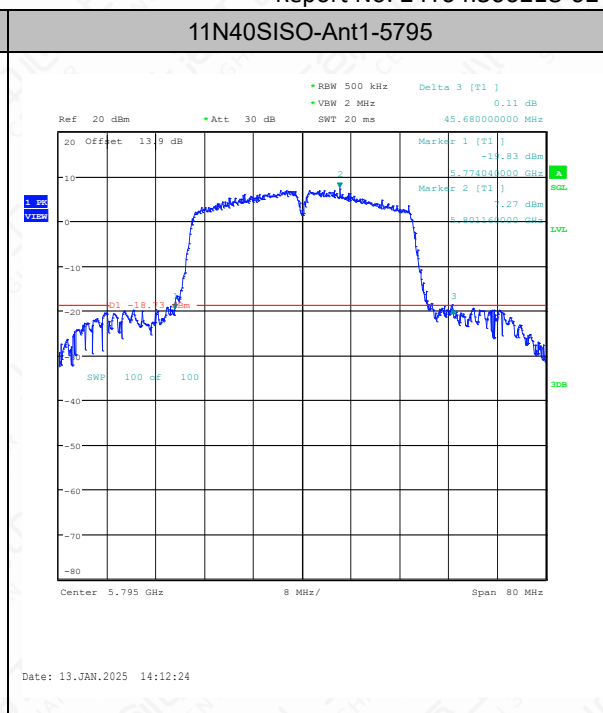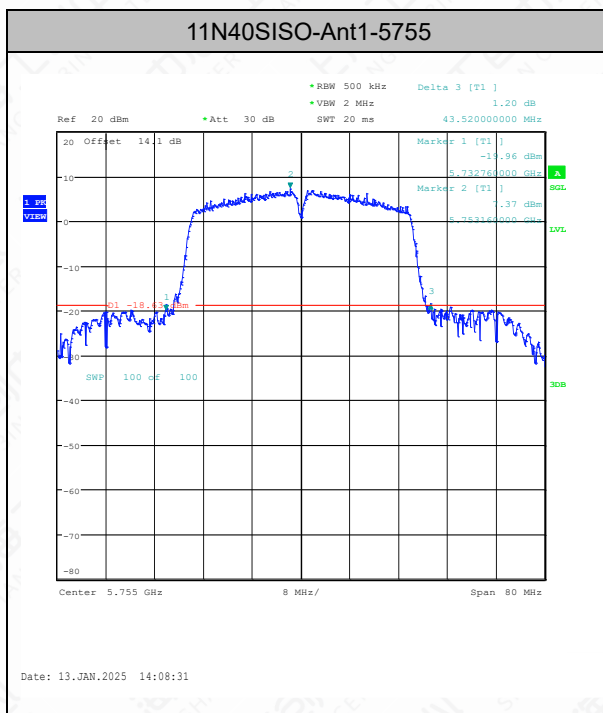


11AC20SISO-Ant1-5825

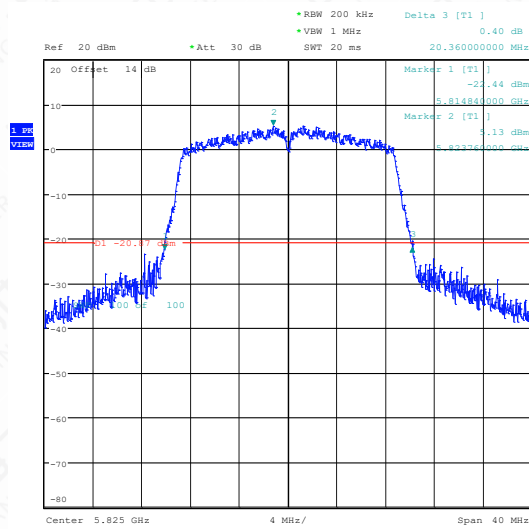


Date: 13.JAN.2025 14:28:35

11AC40SISO-Ant1-5755

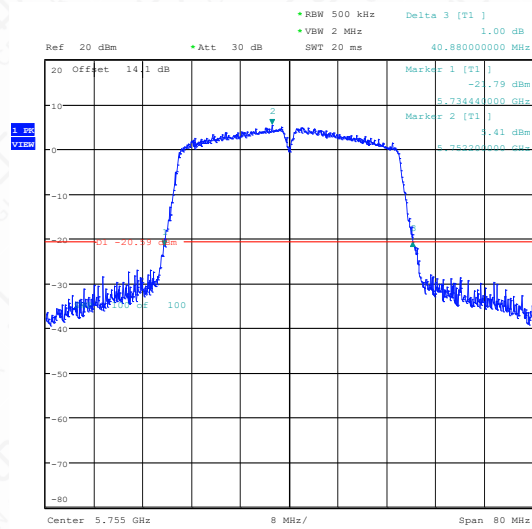


Date: 13.JAN.2025 14:33:42

11AC40SISO-Ant1-5795

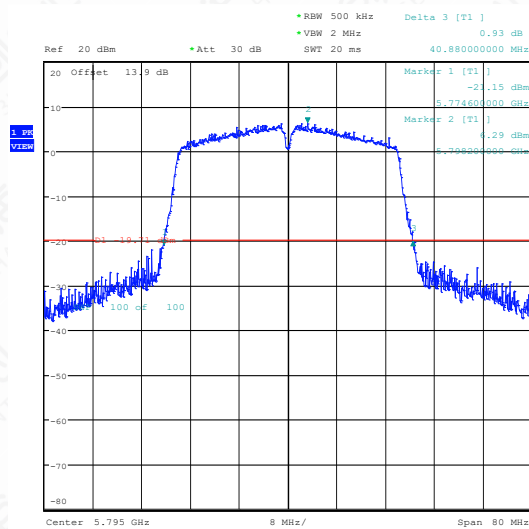

Date: 13.JAN.2025 14:51:20

11AC80SISO-Ant1-5775

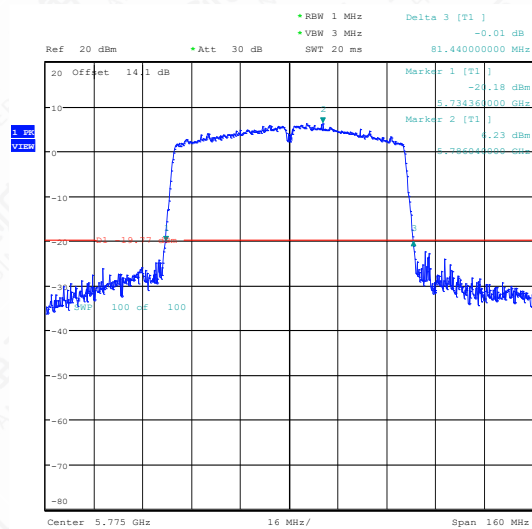

Date: 13.JAN.2025 14:54:20

## 6.5 99% Occupied Bandwidth

### 6.5.1 Measurement Limit


| Standard              | Limit(KHz) |
|-----------------------|------------|
| FCC 47 Part 15.247(e) | N/A        |
| RSS-GEN 6.7           | N/A        |

### 6.5.2 The measurement is made according to KDB 789033

The measurement method is made according to KDB 789033 D

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 \cdot$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

### 6.5.3 Test Setup

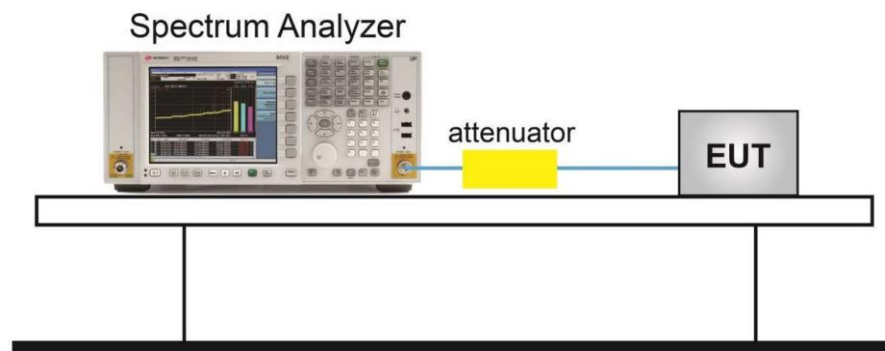



### 6.5.4 Measurement Result

| TestMode  | Antenna | Frequency[MHz] | OCB [MHz] | FL[MHz]   | FH[MHz]   | Limit[MHz] | Verdict |
|-----------|---------|----------------|-----------|-----------|-----------|------------|---------|
| 11A       | Ant1    | 5745           | 17.52     | 5736.2400 | 5753.7600 | ---        | ---     |
| 11A       | Ant1    | 5785           | 17.56     | 5776.2000 | 5793.7600 | ---        | ---     |
| 11A       | Ant1    | 5825           | 17.44     | 5816.2800 | 5833.7200 | ---        | ---     |
| 11N20SISO | Ant1    | 5745           | 18.48     | 5735.7200 | 5754.2000 | ---        | ---     |
| 11N20SISO | Ant1    | 5785           | 18.44     | 5775.7600 | 5794.2000 | ---        | ---     |
| 11N20SISO | Ant1    | 5825           | 18.36     | 5815.8000 | 5834.1600 | ---        | ---     |


|            |      |      |       |           |           |     |     |
|------------|------|------|-------|-----------|-----------|-----|-----|
| 11N40SISO  | Ant1 | 5755 | 37.2  | 5736.3600 | 5773.5600 | --- | --- |
| 11N40SISO  | Ant1 | 5795 | 37.12 | 5776.5200 | 5813.6400 | --- | --- |
| 11AC20SISO | Ant1 | 5745 | 18.2  | 5735.9200 | 5754.1200 | --- | --- |
| 11AC20SISO | Ant1 | 5785 | 18.24 | 5775.8800 | 5794.1200 | --- | --- |
| 11AC20SISO | Ant1 | 5825 | 18.2  | 5815.9200 | 5834.1200 | --- | --- |
| 11AC40SISO | Ant1 | 5755 | 36.56 | 5736.7600 | 5773.3200 | --- | --- |
| 11AC40SISO | Ant1 | 5795 | 36.56 | 5776.7600 | 5813.3200 | --- | --- |
| 11AC80SISO | Ant1 | 5775 | 75.36 | 5737.4000 | 5812.7600 | --- | --- |

Test graphs as below

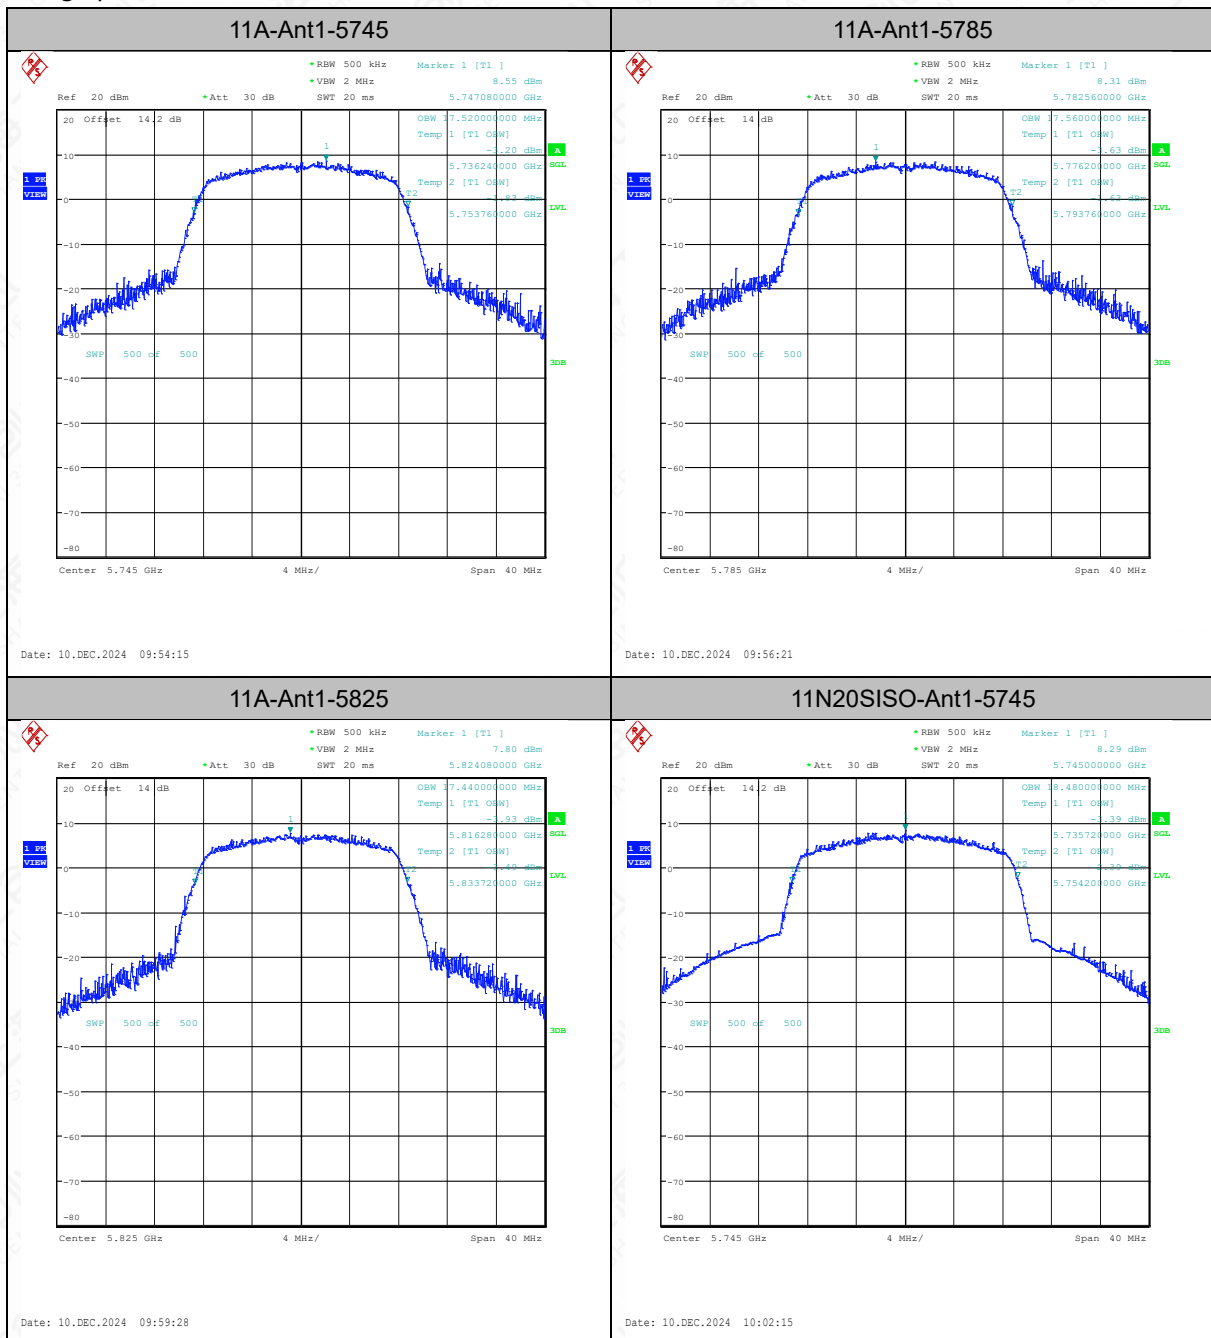

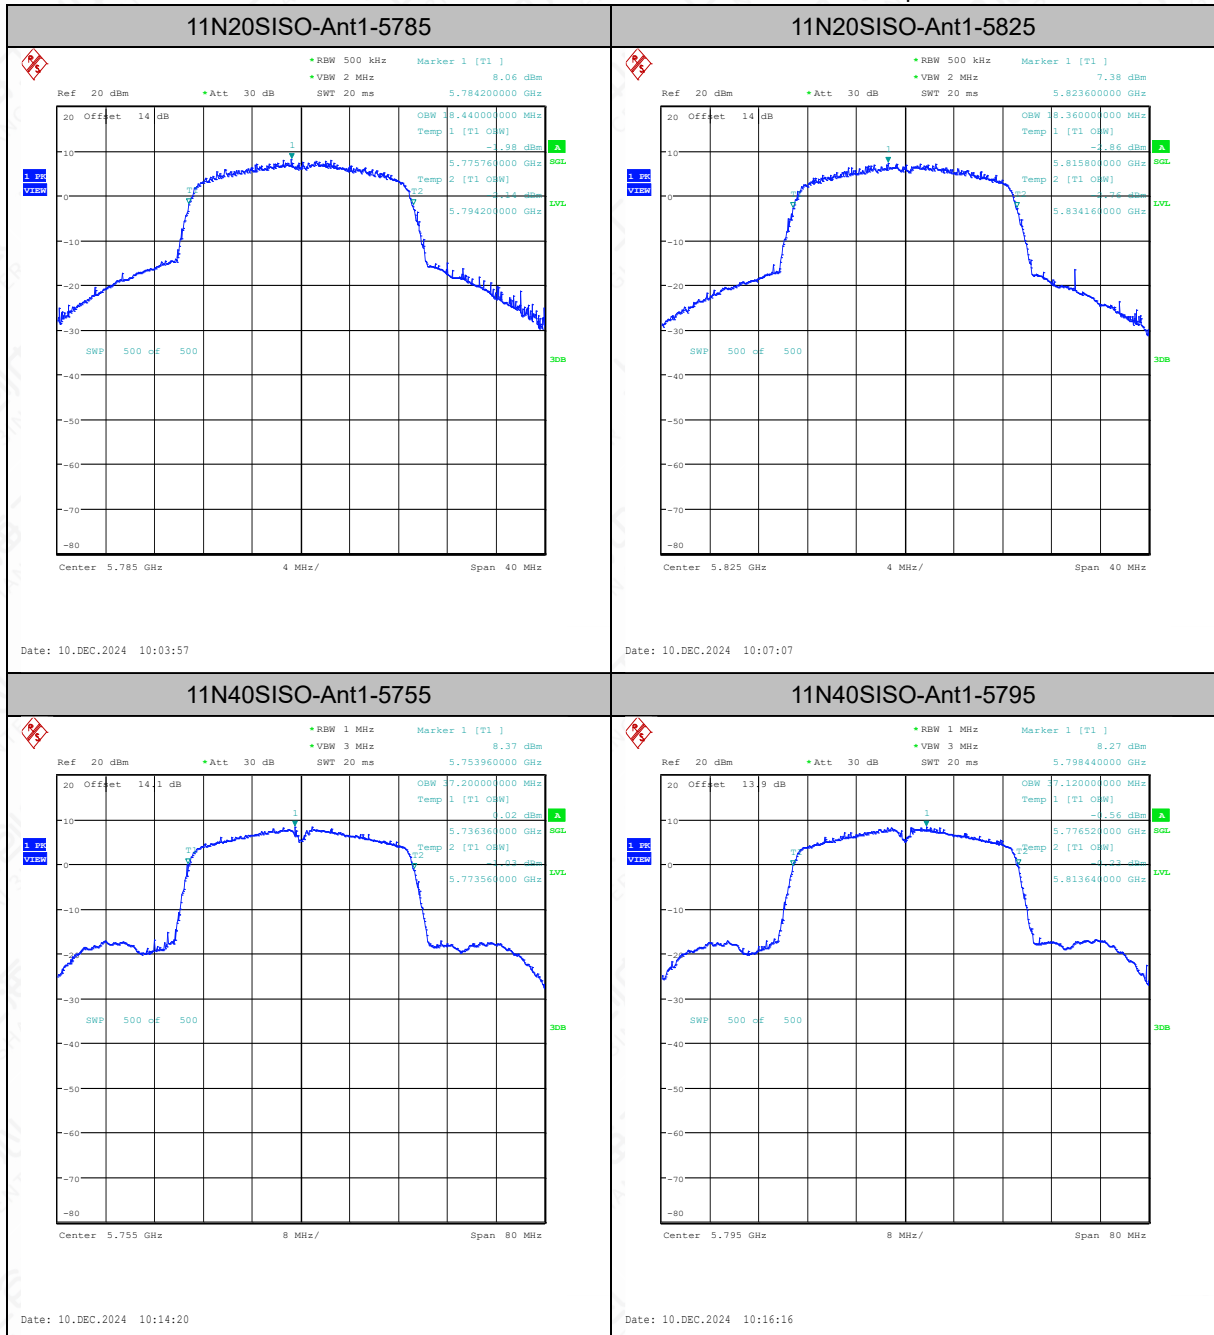


11AC20SISO-Ant1-5745

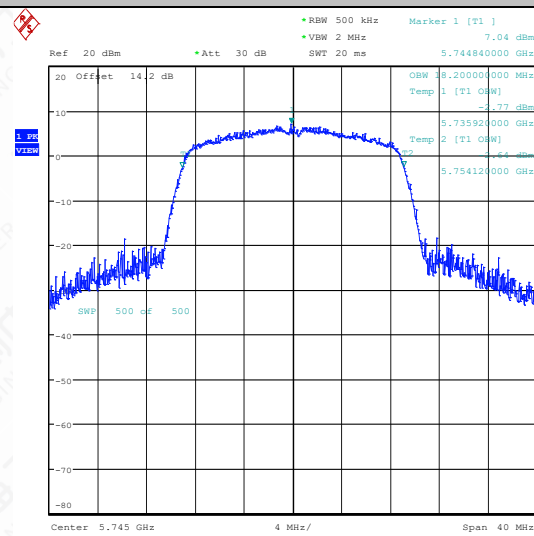


Date: 10.DEC.2024 10:23:00

11AC20SISO-Ant1-5785

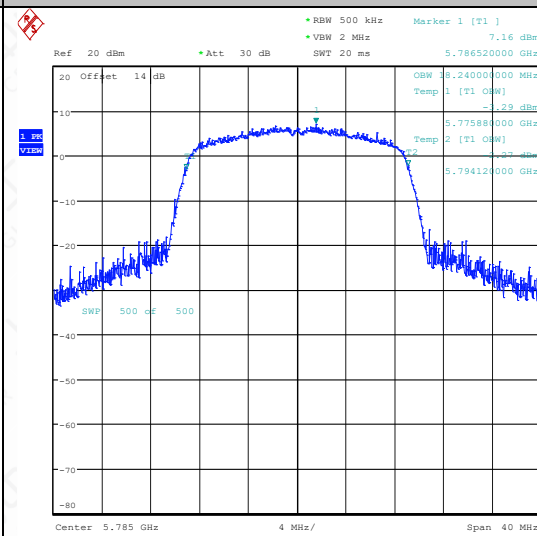


Date: 10.DEC.2024 10:26:19

11AC20SISO-Ant1-5825

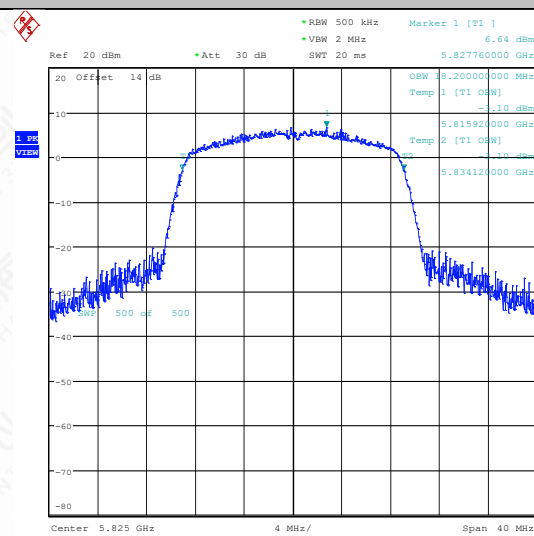


Date: 10.DEC.2024 10:59:33

11AC40SISO-Ant1-5755

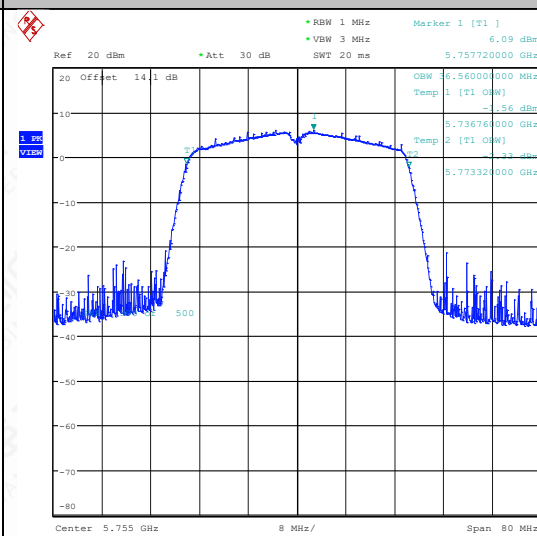

Date: 10.DEC.2024 13:07:22

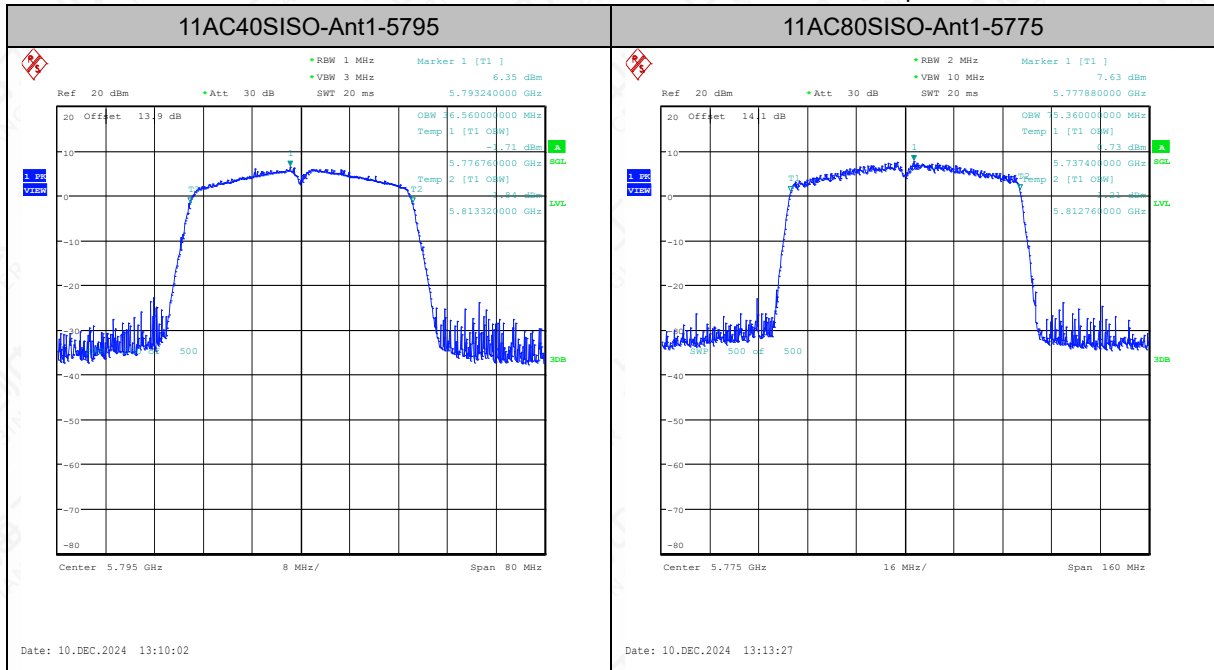

## 6.6 Frequency Stability

Manufacturers ensured the EUT meet the requirement of frequency stability, such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.(According to 15.407(g) and RSS-Gen 8.11)

## 6.7 Transmitter Spurious Emission

### 6.7.1 Measurement Limit

The measurement is made according to ANSI C63.10.

#### Below 1G:

| Frequency of emission (MHz) | Field strength(dBμV/m) | Measurement distance(m) |
|-----------------------------|------------------------|-------------------------|
| 0.009-0.490                 | 129-94                 | 3                       |
| 0.490-1.705                 | 74-63                  | 3                       |
| 1.705-30                    | 70                     | 3                       |
| 30-88                       | 40.0                   | 3                       |
| 88-216                      | 43.5                   | 3                       |
| 216-960                     | 46.0                   | 3                       |
| Above 960                   | 54.0                   | 3                       |

Note: for frequency range below 960MHz, the limit in 15.209 is defined in 10m test distance. The limit used above is calculated from 10m to 3m

#### Above 1G, non-restricted band:

| Standard    | Limit             |
|-------------|-------------------|
| 15.407(b)   | EIRP < -27dBm/MHz |
| RSS-247 6.2 | EIRP < -27dBm/MHz |

#### Above 1G, Restricted band:

| Standard    | Limit             |          |
|-------------|-------------------|----------|
| 15.407(b)   | EIRP < -27dBm/MHz |          |
| 15.209      | Peak              | 74dBμV/m |
|             | Average           | 54dBμV/m |
| RSS-247 6.2 | EIRP < -27dBm/MHz |          |
| RSS-Gen 8.9 | Peak              | 74dBμV/m |
|             | Average           | 54dBμV/m |

$$\text{EIRP[dBm]} = \text{E[dB}\mu\text{V/m]} + 20 \log(d[\text{m}]) - 104.7$$

$$\text{E[dB}\mu\text{V/m]} = \text{EIRP[dBm]} - 20 \log(d[\text{m}]) + 104.7$$

$$\text{E[dB}\mu\text{V/m]} = \text{EIRP[dBm]} + 95.2 = 68.2, \text{ for } d = 3\text{m}$$

### 6.7.2 Test procedures

The measurement is made according to KDB 789033

Set the spectrum analyzer in the following:

#### Procedure for Unwanted Emissions Measurements below 1000 MHz:

- Follow the requirements in II.G.3. "General Requirements for Unwanted Emissions"

Measurements.”

- b) Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Detector: Peak and Quasi-Peak

RBW=100kHz / VBW=300kHz / Sweep=AUTO

**Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz:**

a) Follow the requirements in II.G.3, “General Requirements for Unwanted Emissions Measurements.”

b) Maximum emission levels are measured by setting the analyzer as follows:

- (i) RBW = 1 MHz.
- (ii) VBW  $\geq$  3 MHz.
- (iii) Detector = Peak.
- (iv) Sweep time = auto.
- (v) Trace mode = max hold.
- (vi) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle. For example, at 50% duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

**Procedures for Average Unwanted Emissions Measurements above 1000 MHz:**

a) Follow the requirements in section II.G.3., “General Requirements for Unwanted Emissions Measurements.”

b) Average emission levels shall be measured using one of the following two methods.

c) Method AD (Average Detection): Primary method

(i) RBW = 1 MHz.

(ii) VBW  $\geq$  3 MHz.

(iii) Detector = power averaging (rms), if  $\text{span}/(\# \text{ of points in sweep}) \leq \text{RBW}/2$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.

(iv) Averaging type = power averaging (rms)

As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.

(v) Sweep time = auto.

(vi) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of  $1/x$ , where  $x$  is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—rather than turning on and off with the transmit cycle, at least 100 traces shall be averaged.)

(vii) If tests are performed with the EUT transmitting at a duty cycle less than 98%, a correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

If power averaging (rms) mode was used in step (iv) above, the correction factor is  $10 \log (1/x)$ , where  $x$  is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB must be added to the measured emission levels.

If linear voltage averaging mode was used in step (iv) above, the correction factor is  $20 \log (1/x)$ , where  $x$  is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB must be added to the measured emission levels.

If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.10-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.


The EUT was placed on a non-conductive table. Below 18GHz , the measurement antenna was placed at a distance of 3 meters from the EUT. Above 18GHz , the measurement antenna was placed at a distance of 1 meter from the EUT. During the tests, the antenna height varied from 1m to 4m and the EUT azimuth were varied from 0° to 360° in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Remark:


1. Factor= Antenna Factor + Cable Loss (-Amplifier, is employed)
2. Measured level= Original Receiver Reading + Factor
3. Margin = Limit – Measured level
4. If the PK measured level is lower than AV limit, the AV test can be elided

#### 6.7.3 Test Setup


##### Below 30MHz Test Setup

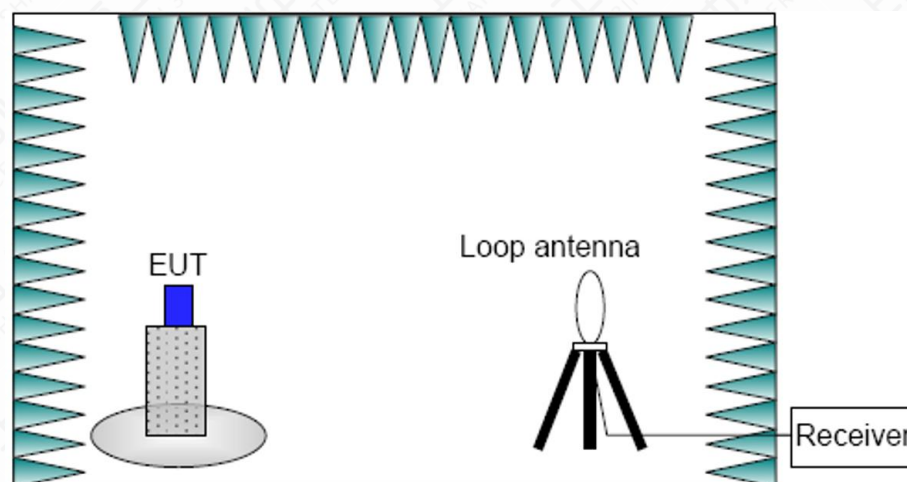

#### Below 1GHz Test Setup

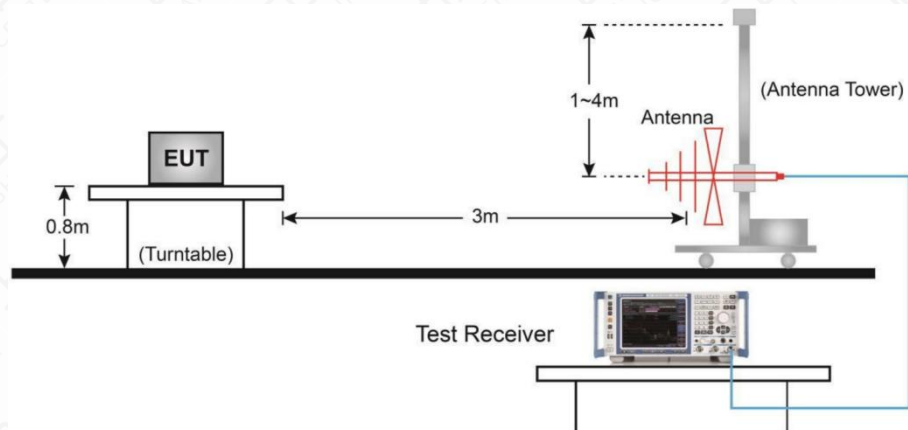

#### Above 1GHz Test Setup

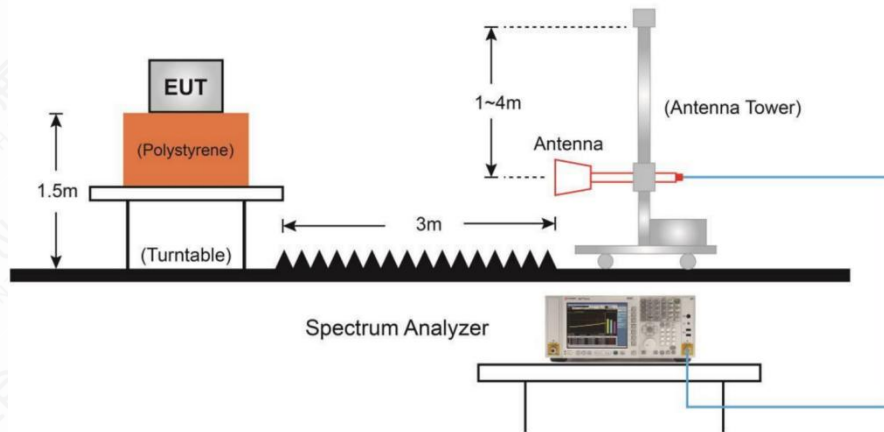


#### 6.7.4 Measurement Results


| Mode       | Channel      | Frequency Range   | Conclusion |
|------------|--------------|-------------------|------------|
| 11A        | 165(5825MHz) | 30 MHz ~1 GHz     | P          |
|            |              | 1 GHz ~ 8 GHz     | P          |
|            |              | 8 GHz ~ 18 GHz    | P          |
|            |              | 18 GHz ~ 26.5 GHz | P          |
|            |              | 26.5 GHz~ 40 GHz  | P          |
| 11N20 SISO | 157(5785MHz) | 30 MHz ~1 GHz     | P          |
|            |              | 1 GHz ~ 8 GHz     | P          |
|            |              | 8 GHz ~ 18 GHz    | P          |
|            |              | 18 GHz ~ 26.5 GHz | P          |
|            |              | 26.5 GHz~ 40 GHz  | P          |
| 11N40 SISO | 159(5795MHz) | 30 MHz ~1 GHz     | P          |

|             |              |                   |   |
|-------------|--------------|-------------------|---|
|             |              | 1 GHz ~ 8 GHz     | P |
|             |              | 8 GHz ~ 18 GHz    | P |
|             |              | 18 GHz ~ 26.5 GHz | P |
|             |              | 26.5 GHz~ 40 GHz  | P |
| 11AC20 SISO | 165(5825MHz) | 30 MHz ~1 GHz     | P |
|             |              | 1 GHz ~ 8 GHz     | P |
|             |              | 8 GHz ~ 18 GHz    | P |
|             |              | 18 GHz ~ 26.5 GHz | P |
|             |              | 26.5 GHz~ 40 GHz  | P |
| 11AC40 SISO | 159(5795MHz) | 30 MHz ~1 GHz     | P |
|             |              | 1 GHz ~ 8 GHz     | P |
|             |              | 8 GHz ~ 18 GHz    | P |
|             |              | 18 GHz ~ 26.5 GHz | P |
|             |              | 26.5 GHz~ 40 GHz  | P |
| 11AC80 SISO | 155(5775MHz) | 30 MHz ~1 GHz     | P |
|             |              | 1 GHz ~ 8 GHz     | P |
|             |              | 8 GHz ~ 18 GHz    | P |
|             |              | 18 GHz ~ 26.5 GHz | P |
|             |              | 26.5 GHz~ 40 GHz  | P |


Test graphs as below

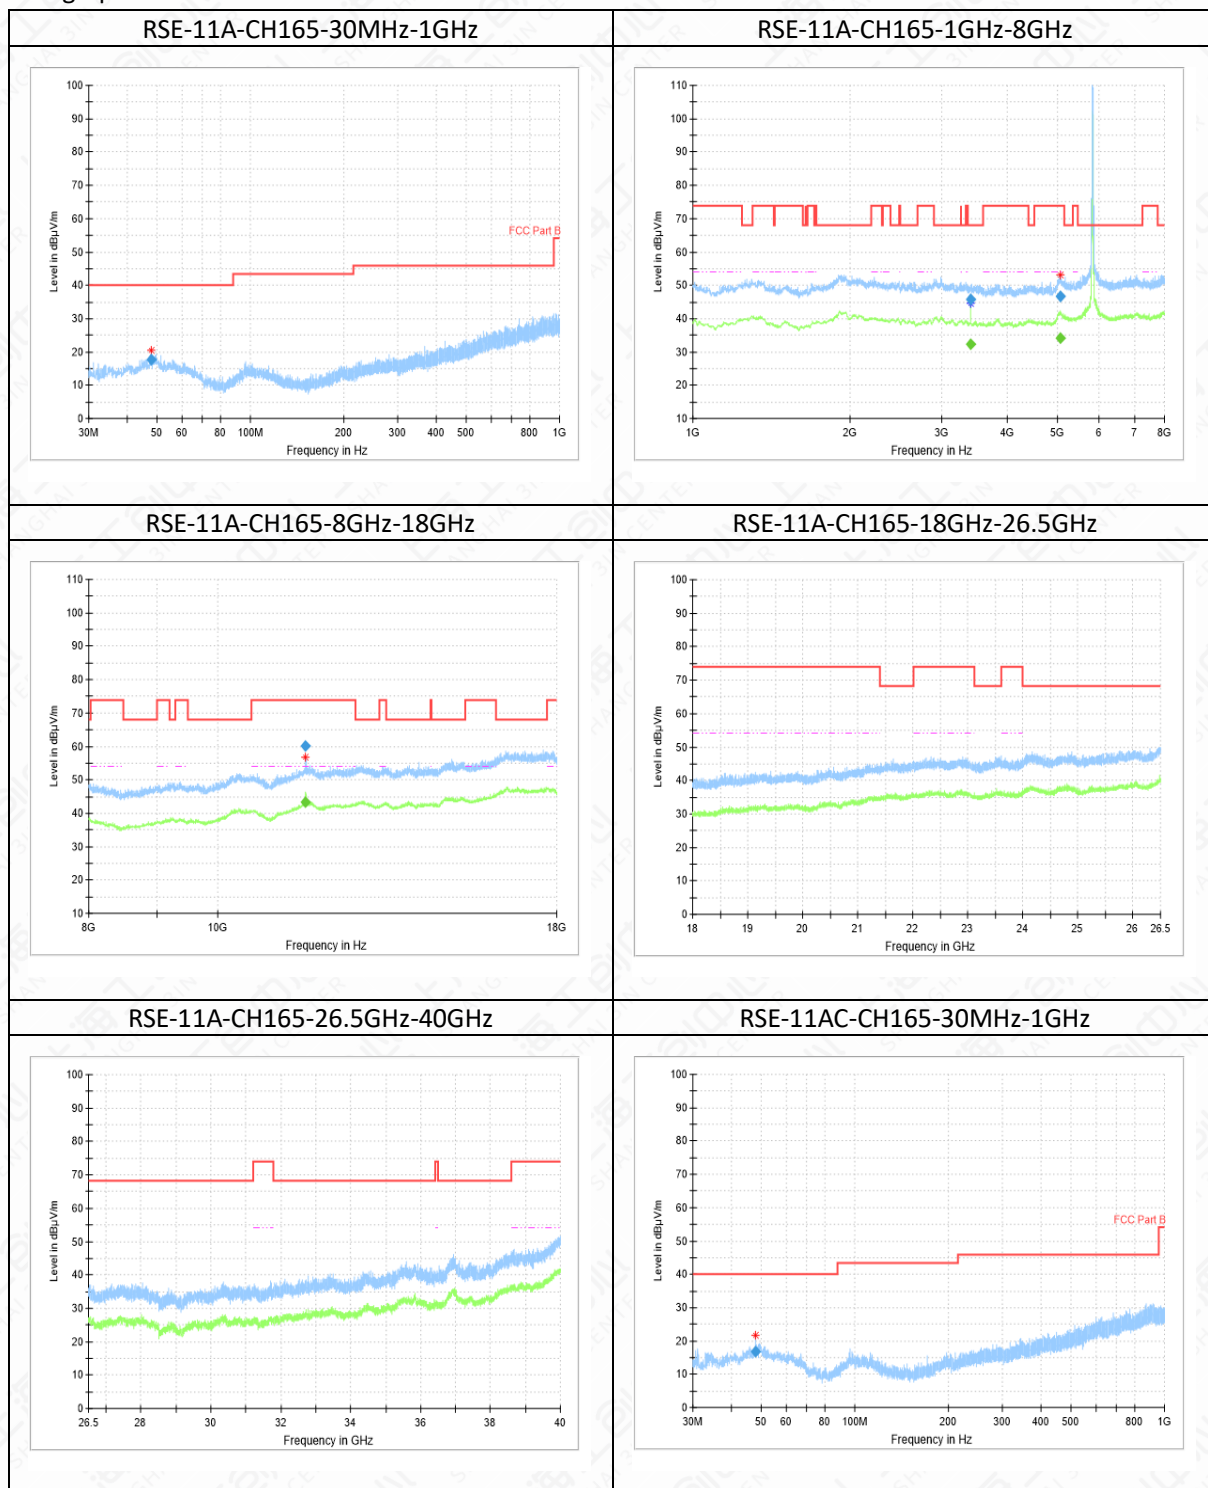


RSE-11AC-CH165-1GHz-8GHz

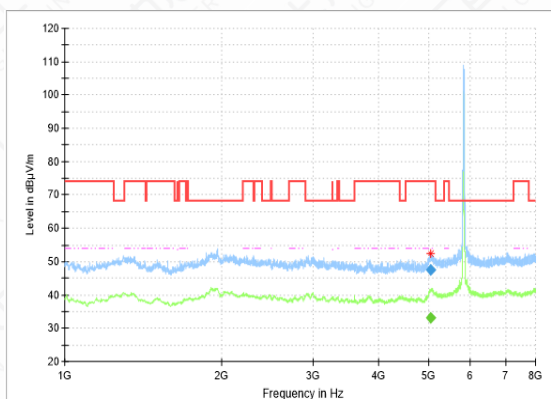


RSE-11AC-CH165-8GHz-18GHz

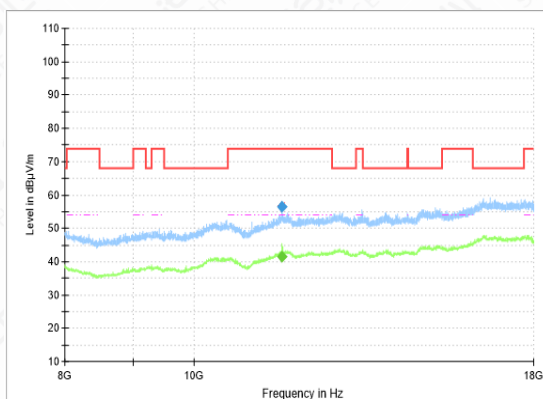


RSE-11AC-CH165-18GHz-26.5GHz

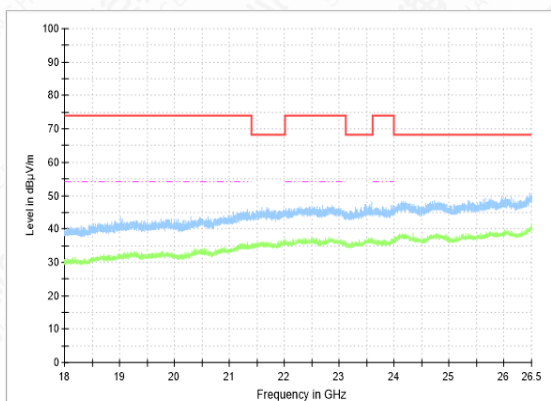


RSE-11AC-CH165-26.5GHz-40GHz

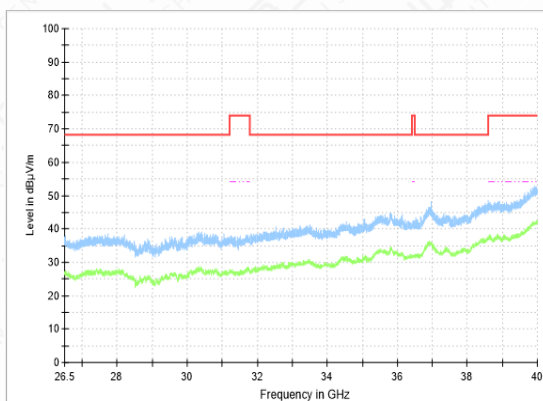


RSE-11AC(40M)-CH159-30MHz-1GHz

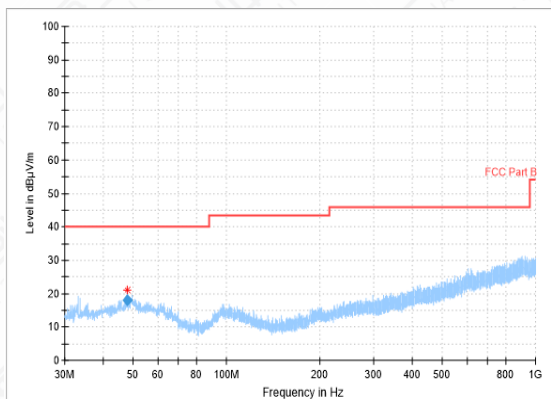


RSE-11AC(40M)-CH159-1GHz-8GHz

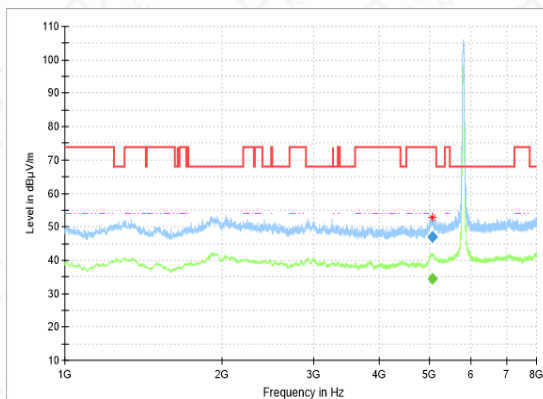


RSE-11AC(40M)-CH159-8GHz-18GHz

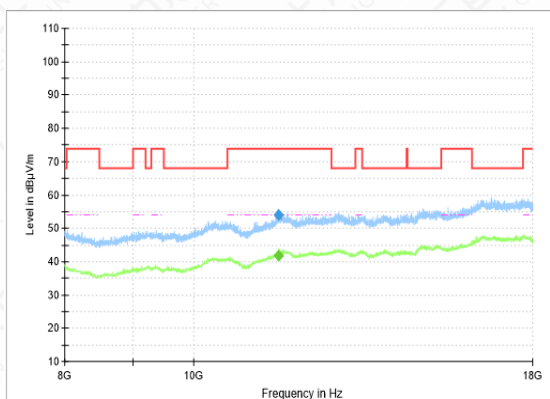


RSE-11AC(40M)-CH159-18GHz-26.5GHz

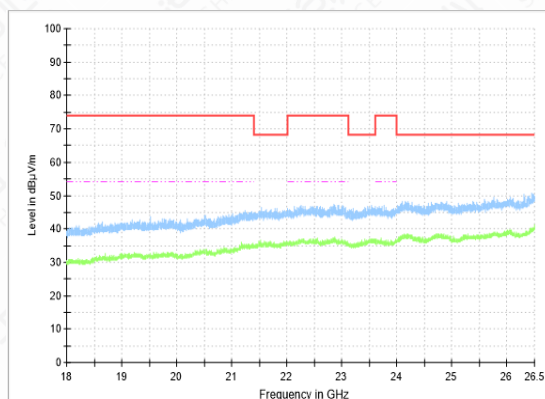


RSE-11AC(40M)-CH159-26.5GHz-40GHz

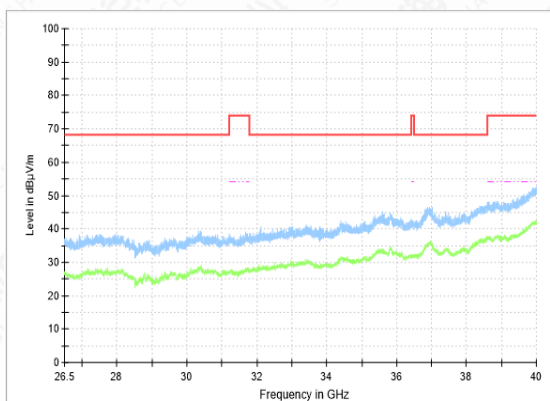


RSE-11AC(80M)-CH155-30MHz-1GHz

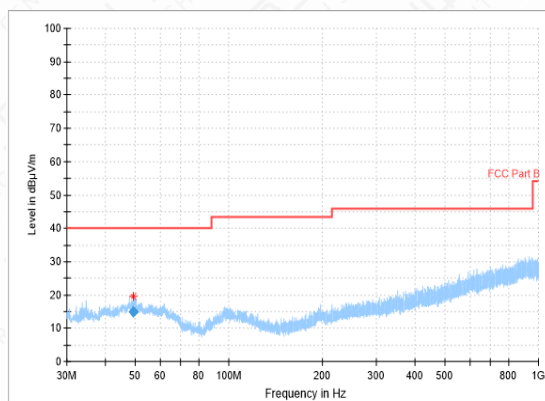


RSE-11AC(80M)-CH155-1GHz-8GHz

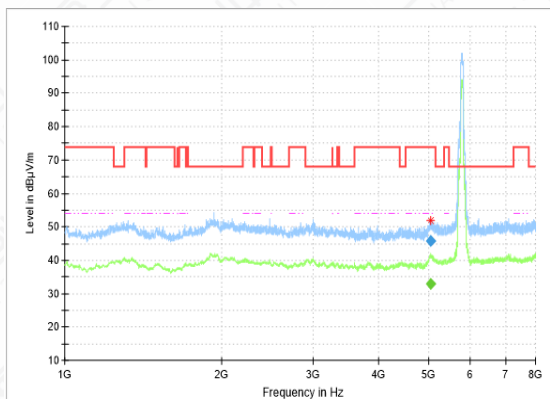


RSE-11AC(80M)-CH155-8GHz-18GHz

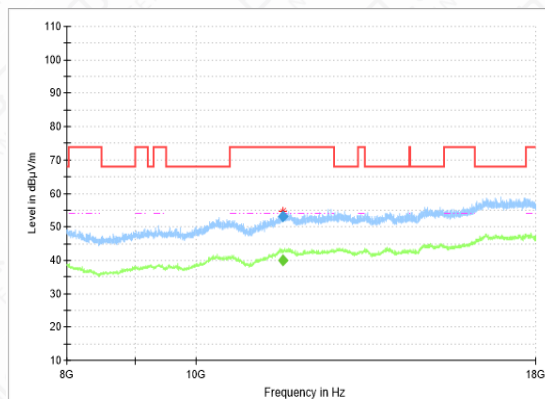


RSE-11AC(80M)-CH155-18GHz-26.5GHz

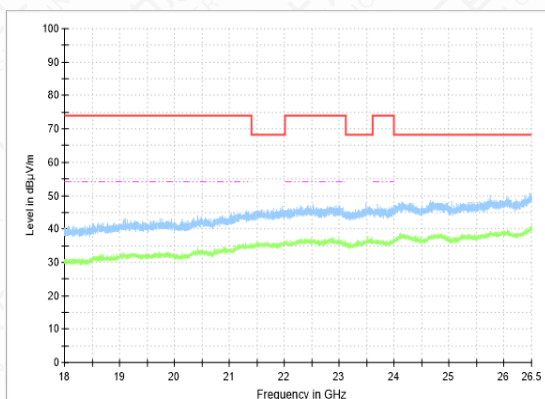


RSE-11AC(80M)-CH155-26.5GHz-40GHz

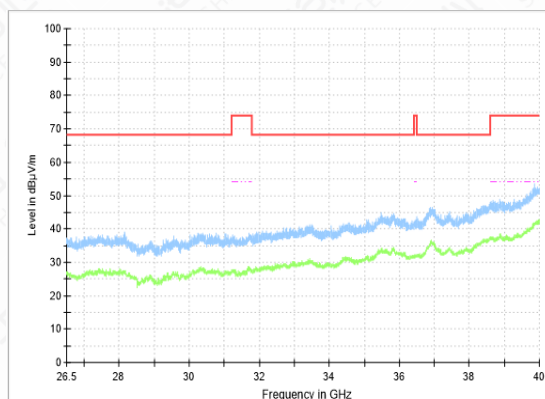


RSE-11N-CH157-30MHz-1GHz

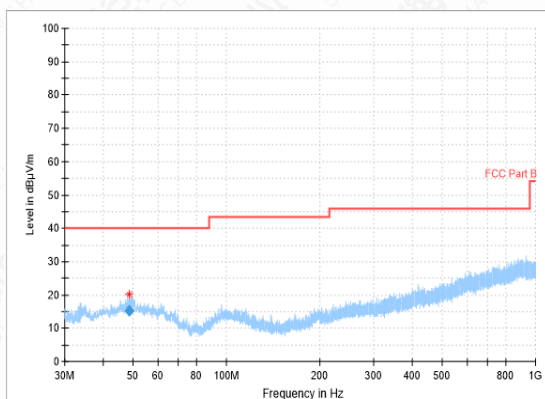


RSE-11N-CH157-1GHz-8GHz

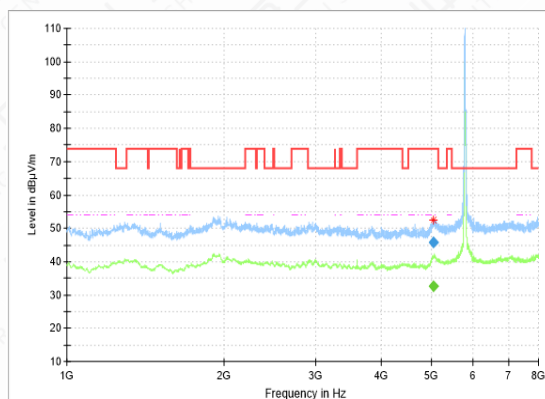


RSE-11N-CH157-8GHz-18GHz

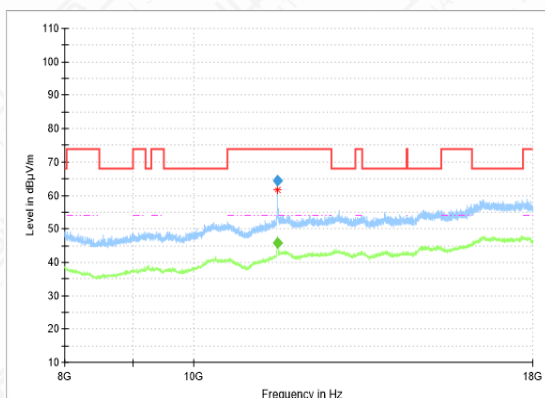

RSE-11N-CH157-18GHz-26.5GHz

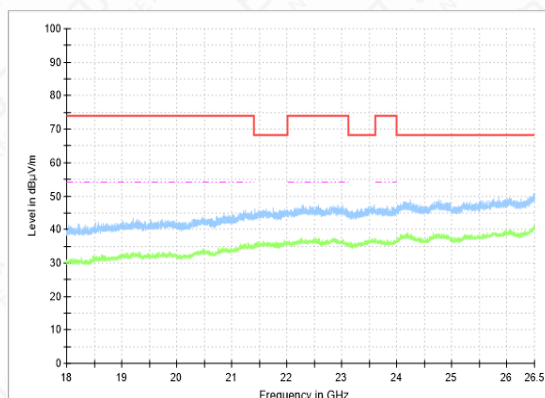

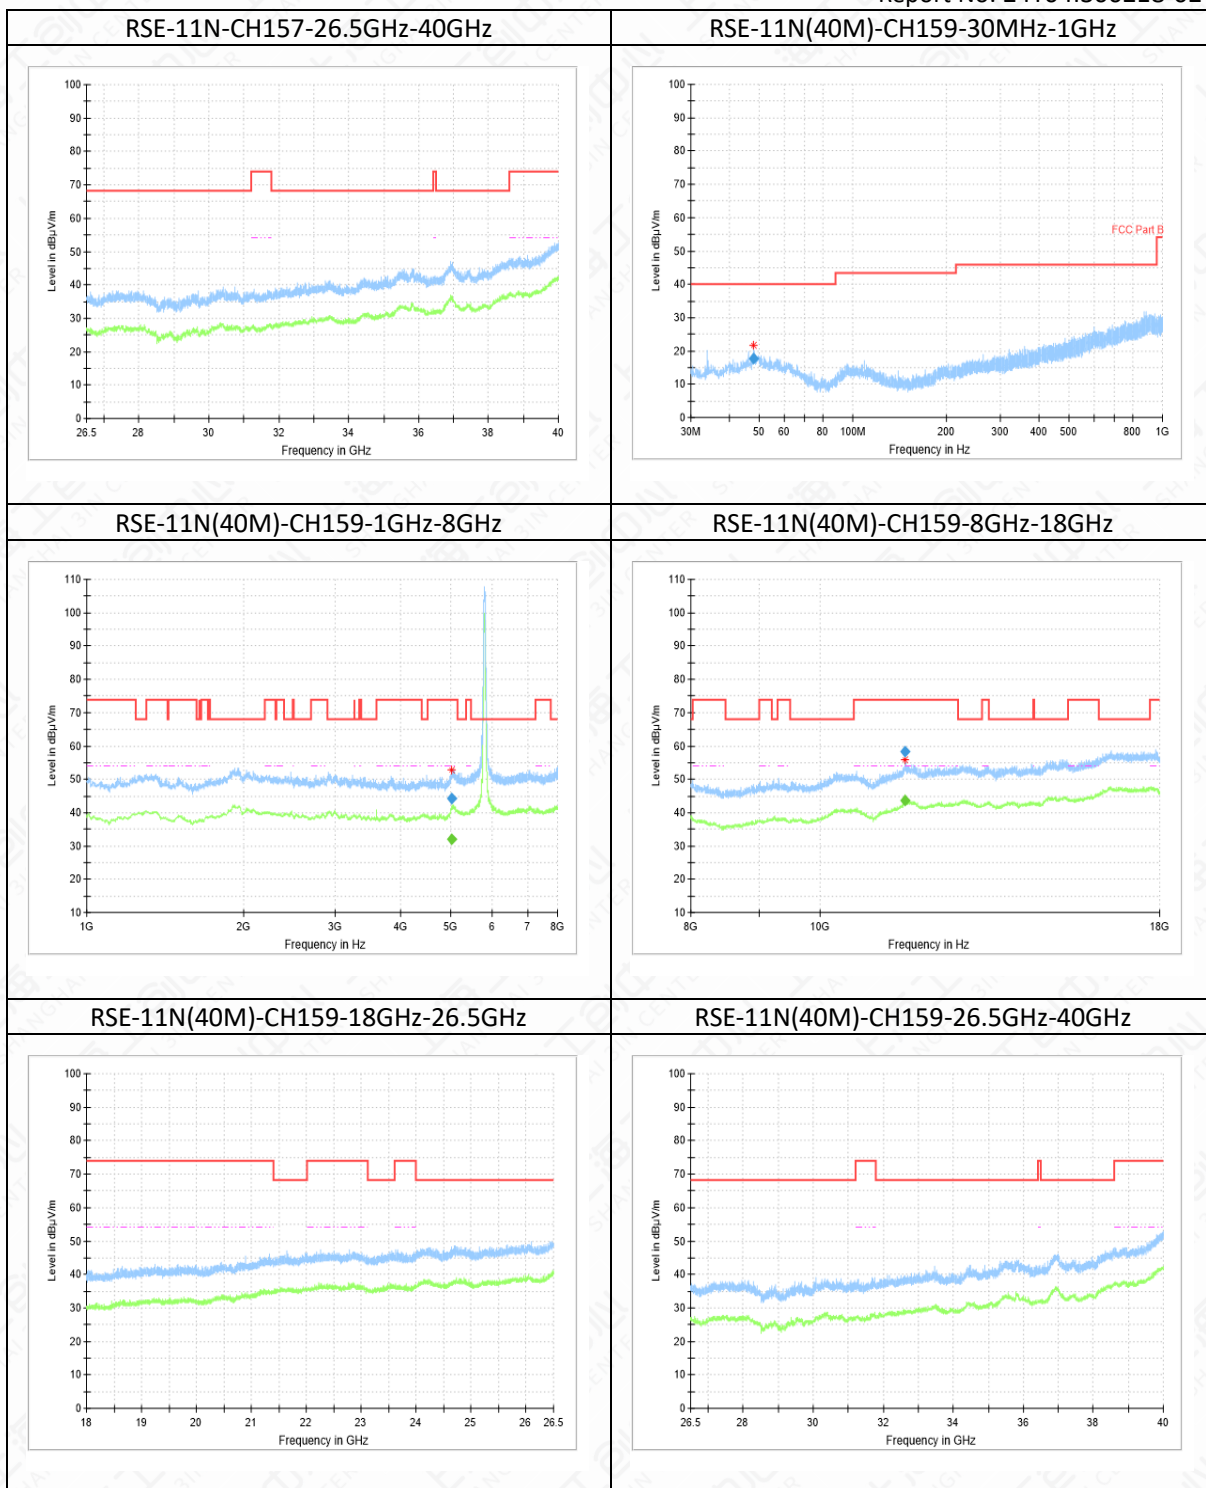

Note:

1. The out-of-limit signal in the picture is the main frequency signal.
2. Only data in worst mode is provided.
3. The test data below 30MHz is more than 20dB lower than the limit value, so it is not provided in the report.
4. Horizontal and vertical polarity is all have been tested, the result of them is synthesized in the above data diagram.

**RSE-11A-CH165-30MHz-1GHz**

| Frequency (MHz) | QuasiPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-------------------|-----------|---------------|------------|---------------|----------|
| 47.8            | 17.64             | -12       | 29.64         | 22.36      | 40.00         | H        |

**RSE-11A-CH165-1GHz-8GHz**

| Frequency (MHz) | MaxPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 3402.2          | 45.78           | 1         | 44.78         | 22.42      | 68.20         | V        |
| 5050.2          | 46.79           | 5         | 41.79         | 27.21      | 74.00         | V        |

**RSE-11A-CH165-1GHz-8GHz**

| Frequency (MHz) | Average(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 3402.2          | 32.45           | 1         | 31.45         | ---        | ---           | V        |
| 5050.2          | 34.31           | 5         | 29.31         | 19.69      | 54.00         | V        |

**RSE-11A-CH165-8GHz-18GHz**

| Frequency (MHz) | MaxPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 11648.0         | 60.26           | 11        | 49.26         | 13.74      | 74.00         | H        |

**RSE-11A-CH165-8GHz-18GHz**

| Frequency (MHz) | Average(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 11648.0         | 43.33           | 11        | 32.33         | 10.67      | 54.00         | H        |

**RSE-11N-CH157-30MHz-1GHz**

| Frequency (MHz) | QuasiPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-------------------|-----------|---------------|------------|---------------|----------|
| 48.5            | 15.36             | -12       | 27.36         | 24.64      | 40.00         | H        |

**RSE-11N-CH157-1GHz-8GHz**

| Frequency (MHz) | MaxPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 5042.9          | 45.67           | 5         | 40.67         | 28.33      | 74.00         | H        |

**RSE-11N-CH157-1GHz-8GHz**

| Frequency (MHz) | Average(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 5042.9          | 32.49           | 5         | 27.49         | 21.51      | 54.00         | H        |

**RSE-11N-CH157-8GHz-18GHz**

| Frequency (MHz) | MaxPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 11565.8         | 64.42           | 10        | 54.42         | 9.58       | 74.00         | H        |

**RSE-11N-CH157-8GHz-18GHz**

| Frequency (MHz) | Average(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 11565.8         | 45.69           | 10        | 35.69         | 8.31       | 54.00         | H        |

**RSE-11N(40M)-CH159-30MHz-1GHz**

| Frequency (MHz) | QuasiPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-------------------|-----------|---------------|------------|---------------|----------|
| 47.8            | 17.73             | -12       | 29.73         | 22.27      | 40.00         | H        |

**RSE-11N(40M)-CH159-1GHz-8GHz**

| Frequency (MHz) | MaxPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 5007.5          | 44.38           | 5         | 39.38         | 29.62      | 74.00         | H        |

**RSE-11N(40M)-CH159-1GHz-8GHz**

| Frequency (MHz) | Average(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 5007.5          | 31.92           | 5         | 26.92         | 22.08      | 54.00         | H        |

**RSE-11N(40M)-CH159-8GHz-18GHz**

| Frequency (MHz) | MaxPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 11586.8         | 58.34           | 10        | 48.34         | 15.66      | 74.00         | H        |

**RSE-11N(40M)-CH159-8GHz-18GHz**

| Frequency (MHz) | Average(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 11586.8         | 43.68           | 10        | 33.68         | 10.32      | 54.00         | H        |

**RSE-11AC-CH165-30MHz-1GHz**

| Frequency (MHz) | QuasiPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-------------------|-----------|---------------|------------|---------------|----------|
| 47.8            | 16.87             | -12       | 28.87         | 23.13      | 40.00         | H        |

**RSE-11AC-CH165-1GHz-8GHz**

| Frequency (MHz) | MaxPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 5026.4          | 47.51           | 5         | 42.51         | 26.49      | 74.00         | V        |

**RSE-11AC-CH165-1GHz-8GHz**

| Frequency (MHz) | Average(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 5026.4          | 33.24           | 5         | 28.24         | 20.76      | 54.00         | V        |

**RSE-11AC-CH165-8GHz-18GHz**

| Frequency (MHz) | MaxPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 11646.0         | 56.6            | 11        | 45.6          | 17.40      | 74.00         | V        |

**RSE-11AC-CH165-8GHz-18GHz**

| Frequency (MHz) | Average(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 11646.0         | 41.52           | 11        | 30.52         | 12.48      | 54.00         | V        |

**RSE-11AC(40M)-CH159-30MHz-1GHz**

| Frequency (MHz) | QuasiPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-------------------|-----------|---------------|------------|---------------|----------|
| 47.8            | 18.09             | -12       | 30.09         | 21.91      | 40.00         | H        |

**RSE-11AC(40M)-CH159-1GHz-8GHz**

| Frequency (MHz) | MaxPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 5043.5          | 46.92           | 5         | 41.92         | 27.08      | 74.00         | V        |

**RSE-11AC(40M)-CH159-1GHz-8GHz**

| Frequency (MHz) | Average(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 5043.5          | 34.34           | 5         | 29.34         | 19.66      | 54.00         | V        |

**RSE-11AC(40M)-CH159-8GHz-18GHz**

| Frequency (MHz) | MaxPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 11592.8         | 54.14           | 10        | 44.14         | 19.86      | 74.00         | H        |

**RSE-11AC(40M)-CH159-8GHz-18GHz**

| Frequency (MHz) | Average(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 11592.8         | 41.7            | 10        | 31.7          | 12.30      | 54.00         | H        |

**RSE-11AC(80M)-CH155-30MHz-1GHz**

| Frequency (MHz) | QuasiPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-------------------|-----------|---------------|------------|---------------|----------|
| 49.3            | 15                | -12       | 27            | 25.00      | 40.00         | H        |

**RSE-11AC(80M)-CH155-1GHz-8GHz**

| Frequency (MHz) | MaxPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 5029.4          | 45.8            | 5         | 40.8          | 28.20      | 74.00         | H        |

**RSE-11AC(80M)-CH155-1GHz-8GHz**

| Frequency (MHz) | Average(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 5029.4          | 33.07           | 5         | 28.07         | 20.93      | 54.00         | H        |

**RSE-11AC(80M)-CH155-8GHz-18GHz**

| Frequency (MHz) | MaxPeak(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 11620.5         | 53.03           | 11        | 42.03         | 20.97      | 74.00         | V        |

**RSE-11AC(80M)-CH155-8GHz-18GHz**

| Frequency (MHz) | Average(dBμV/m) | ARpl (dB) | PMea (dBμV/m) | Margin(dB) | Limit(dBμV/m) | Polarity |
|-----------------|-----------------|-----------|---------------|------------|---------------|----------|
| 11620.5         | 40.09           | 11        | 29.09         | 13.91      | 54.00         | V        |

## 6.8 Band Edges Compliance (Radiated)

### 6.8.1 Measurement Limit

#### Above 1G, non-restricted band

| Standard    | Limit             |
|-------------|-------------------|
| 15.407(b)   | EIRP < -27dBm/MHz |
| RSS-247 6.2 | EIRP < -27dBm/MHz |

#### Above 1G, Restricted band

| Standard    | Limit             |          |
|-------------|-------------------|----------|
| 15.407(b)   | EIRP < -27dBm/MHz |          |
| 15.209      | Peak              | 74dBμV/m |
|             | Average           | 54dBμV/m |
| RSS-247 6.2 | EIRP < -27dBm/MHz |          |
| RSS-Gen 8.9 | Peak              | 74dBμV/m |
|             | Average           | 54dBμV/m |

$$\text{EIRP[dBm]} = \text{E[dB}\mu\text{V/m]} + 20 \log(d[\text{m}]) - 104.7$$

$$\text{E[dB}\mu\text{V/m]} = \text{EIRP[dBm]} - 20 \log(d[\text{m}]) + 104.7$$

$$\text{E[dB}\mu\text{V/m]} = \text{EIRP[dBm]} + 95.2 = 68.2, \text{ for } d = 3\text{m}$$

### 6.8.2 Test Procedure

The measurement is made according to KDB 789033.

Marker-Delta Method: The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

#### Procedure for peak unwanted emissions measurements above 1000 MHz

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:


- a) Follow the requirements in 12.7.4.
- b) Peak emission levels are measured by setting the instrument as follows:
  - 1) RBW = 1 MHz.
  - 2) VBW ≥ [3 × RBW].
  - 3) Detector = peak.
  - 4) Sweep time = auto.
  - 5) Trace mode = max hold.
  - 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately 1 / D, where D is the duty cycle. For example, at 50% duty cycle, the measurement time will increase by a factor of two, relative to measurement time for continuous transmission.

#### Procedures for average unwanted emissions measurements above 1000 MHz

- a) RBW = 1 MHz.
- b) Video bandwidth:

- 1) If the EUT is configured to transmit with  $D \geq 98\%$ , then set  $VBW \leq RBW / 100$  (i.e., 10 kHz), but not less than 10 Hz.
  - 2) If the EUT  $D$  is  $< 98\%$ , then set  $VBW \geq 1 / T$ , where  $T$  is defined in item a1) of 12.2.
- c) Video bandwidth mode or display mode:
- 1) The instrument shall be set with video filtering applied in the power domain. Typically, this requires setting the detector mode to RMS (power averaging) and setting the average-VBW type to power (rms).
  - 2) As an alternative, the instrument may be set to linear detector mode. Video filtering shall be applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode to accomplish this. Others have a setting for average-VBW type, which can be set to "voltage" regardless of the display mode.
- d) Detector = peak.
- e) Sweep time = auto.
- f) Trace mode = max hold.
- g) Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $D$  is the duty cycle. For example, use at least 200 traces if the duty cycle is 25%. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 50 traces should be averaged.)
- The measurement was applied in a fully anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna. Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. During the tests, the antenna height varied from 1m to 4m and the EUT azimuth were varied from  $0^\circ$  to  $360^\circ$  in order to identify the maximum level of emissions from the EUT. In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.


### 6.8.3 Test Setup

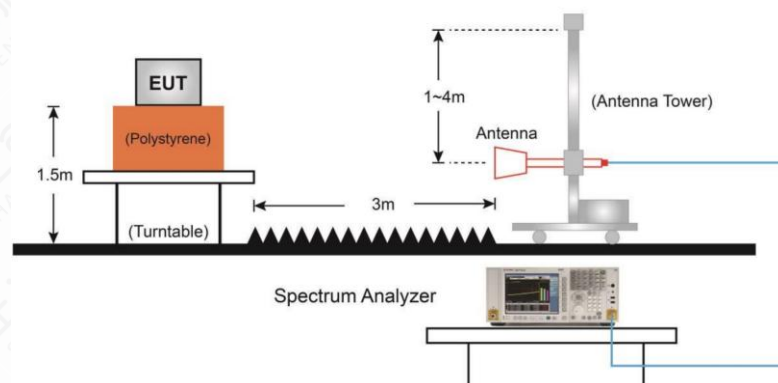


#### 6.8.4 Measurement Result

| Mode              | Channel | Conclusion |
|-------------------|---------|------------|
| 802.11a           | 149     | P          |
|                   | 157     | P          |
|                   | 165     | P          |
| 802.11n<br>HT20   | 149     | P          |
|                   | 157     | P          |
|                   | 165     | P          |
| 802.11n<br>HT40   | 151     | P          |
|                   | 159     | P          |
| 802.11ac<br>VHT20 | 149     | P          |
|                   | 157     | P          |
|                   | 165     | P          |
| 802.11ac<br>VHT40 | 151     | P          |
|                   | 159     | P          |
| 802.11ac<br>VHT80 | 155     | P          |


Test graphs as below:

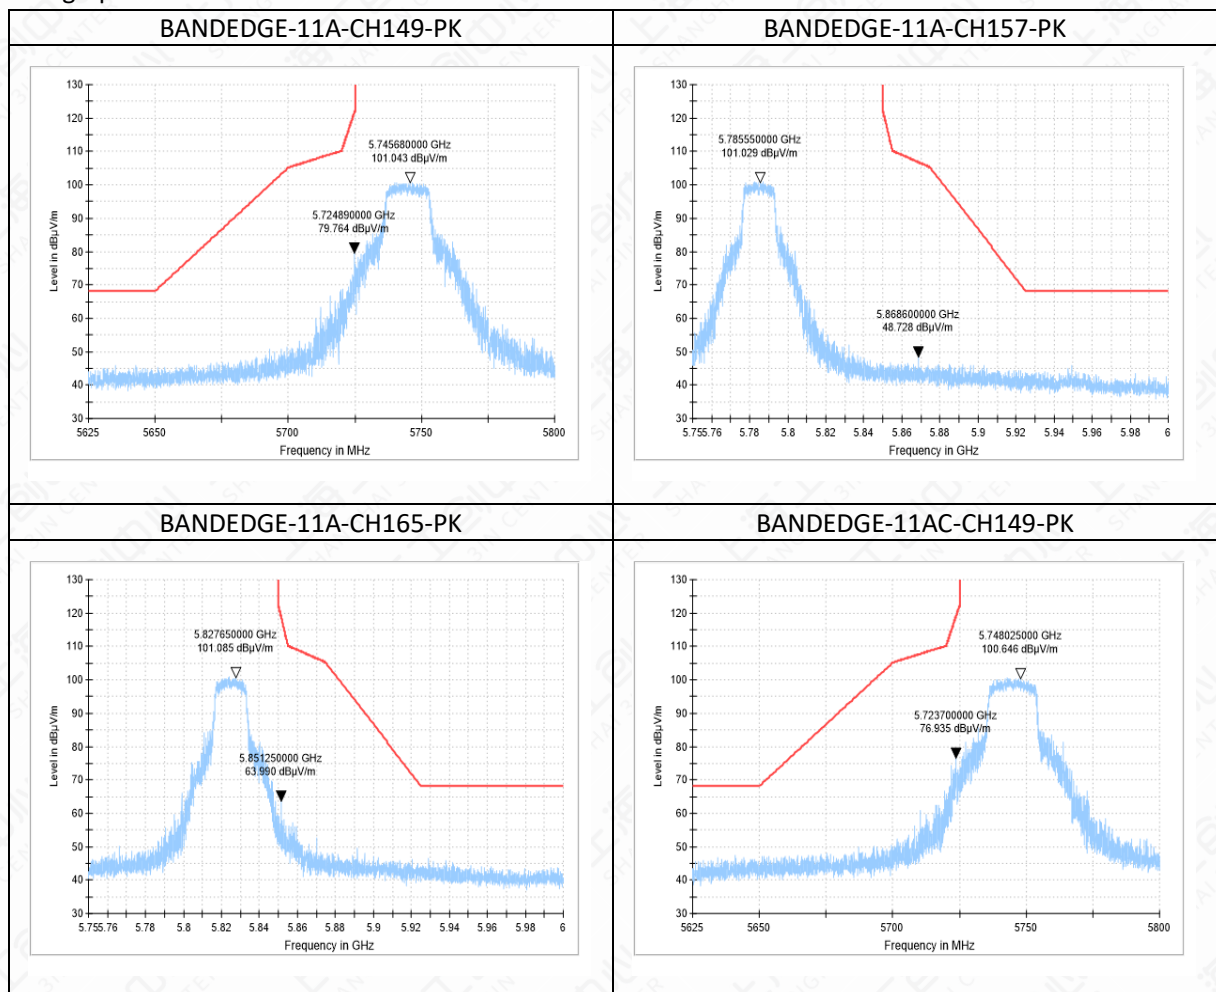


BANDEGE-11AC-CH157-PK

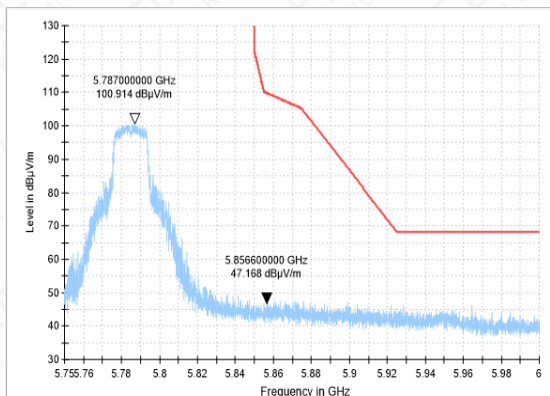


BANDEGE-11AC-CH165-PK

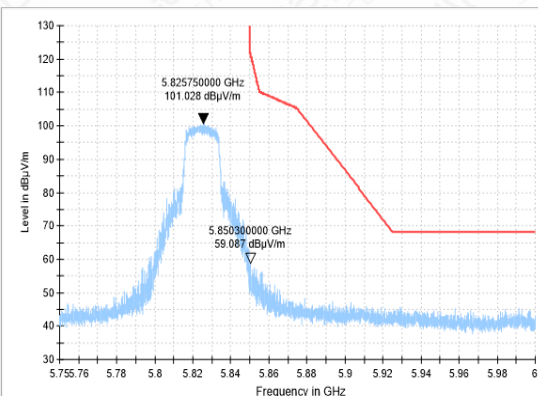


BANDEGE-11AC(40M)-CH151-PK

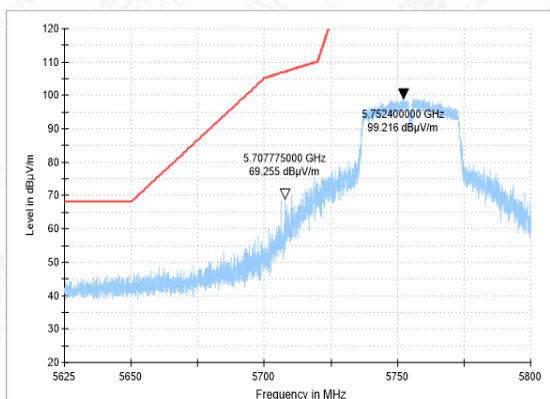


BANDEGE-11AC(40M)-CH159-PK

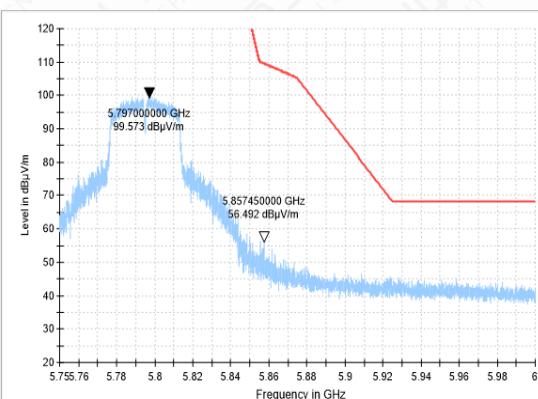


BANDEGE-11AC(80M)-CH155-PK

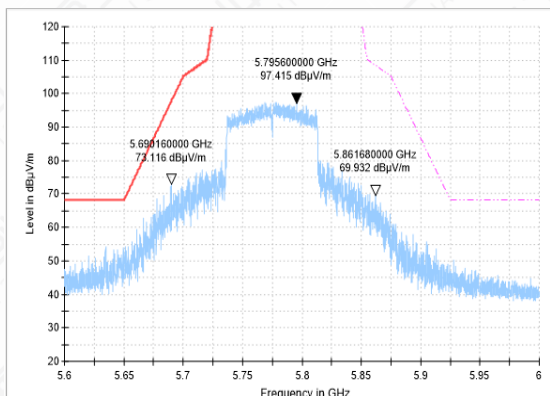

BANDEGE-11N-CH149-PK

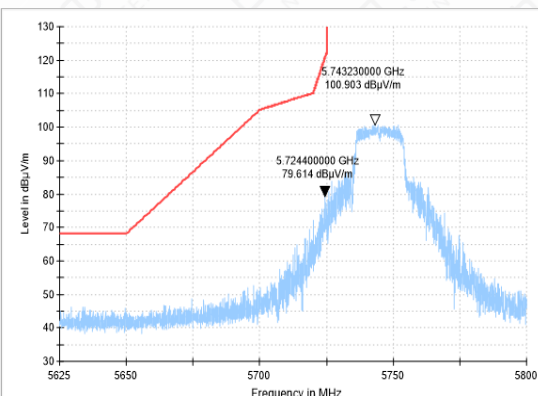

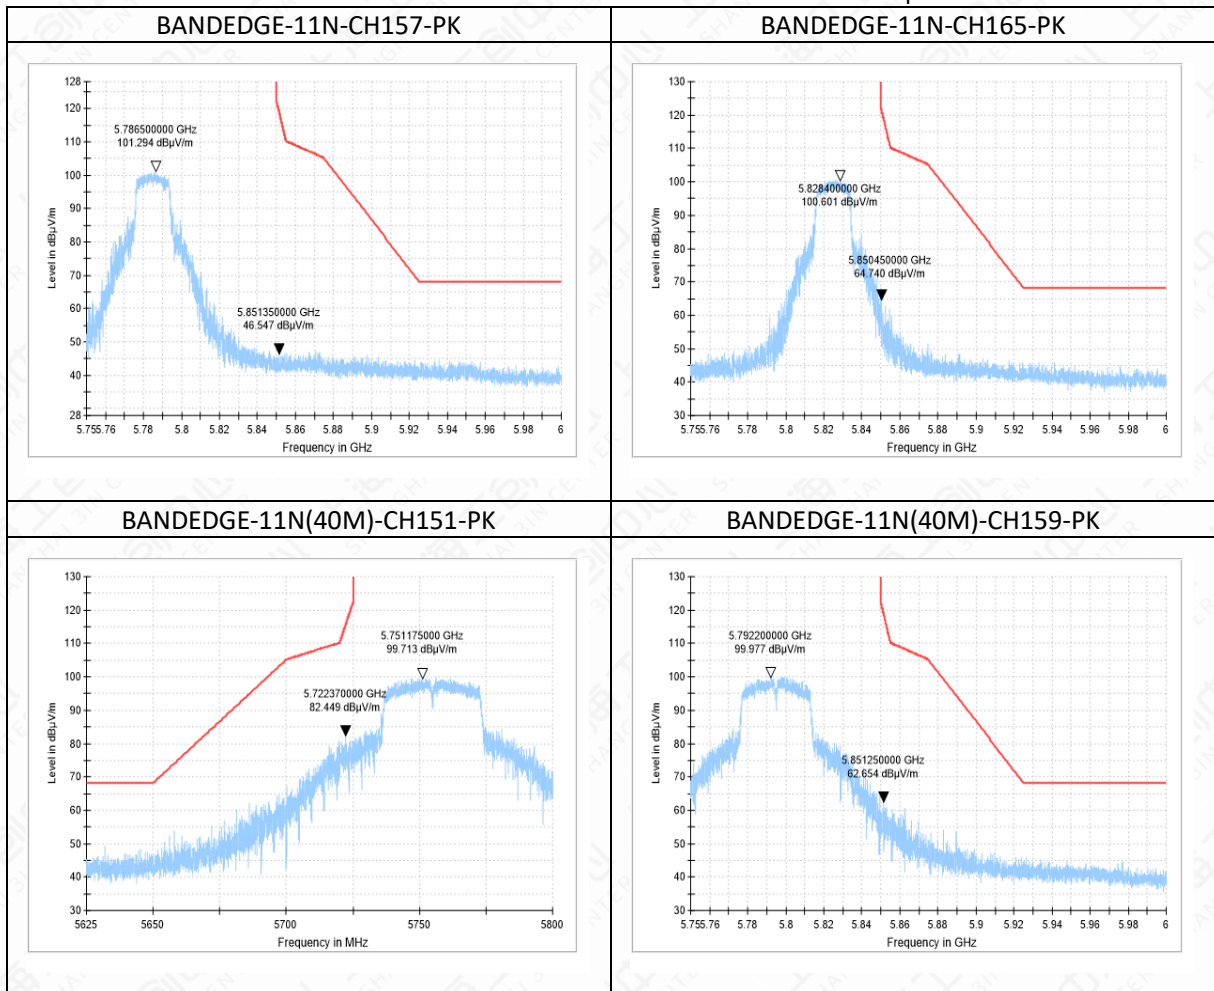

Note: Only data in worst mode is provided.


## 6.9 AC Powerline Conducted Emission

### 6.9.1 Method of Measurement: ANSI C63.10-2013-clause 6.2

1. The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

## 6.9.2 Test Setup

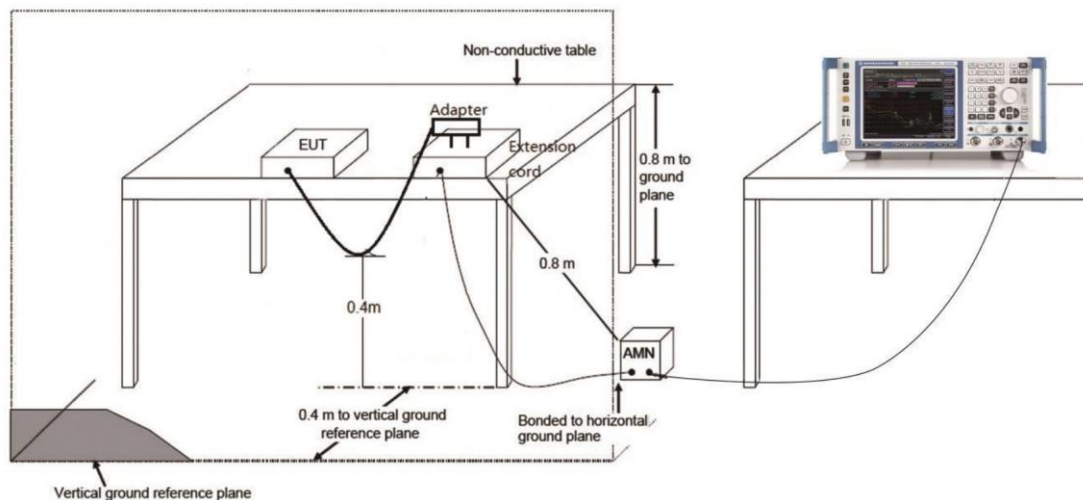

## 6.9.3 Test Condition

| Voltage (V) | Frequency (Hz) |
|-------------|----------------|
| 120         | 60             |


## 6.9.4 Measurement limit

(Quasi-peak-average Limit)

| Frequency range (MHz) | Quasi-peak Limit (dBμV) | Average Limit (dBμV) | Conclusion |
|-----------------------|-------------------------|----------------------|------------|
| 0.15 to 0.5           | 66 to 56                | 56 to 46             | P          |
| 0.5 to 5              | 56                      | 46                   |            |
| 5 to 30               | 60                      | 50                   |            |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## 6.9.5 Measurement Result

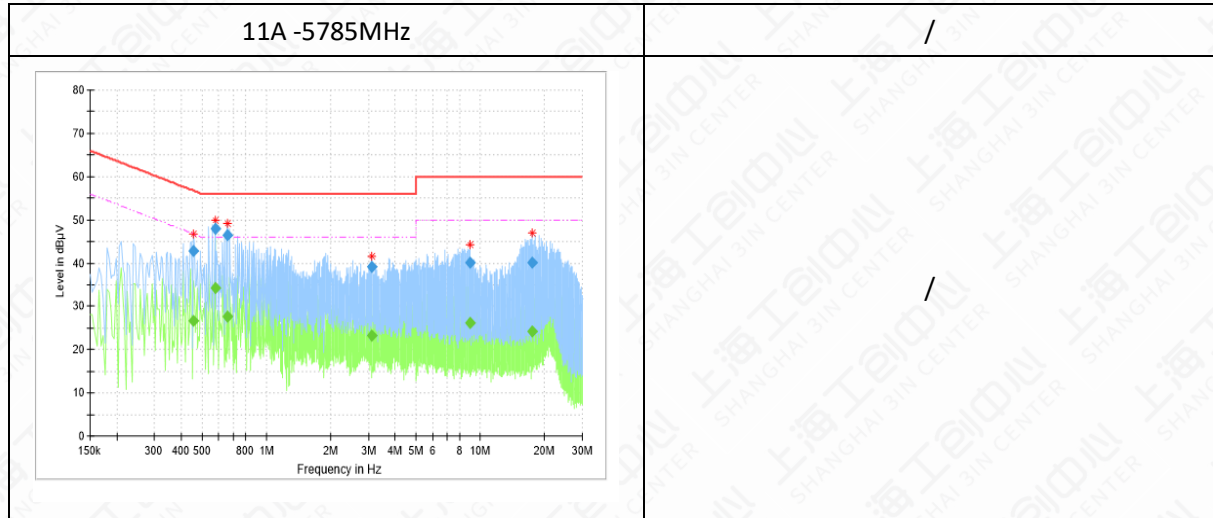

| Frequency (MHz) | QuasiPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.455963        | ---              | 26.70          | 46.77        | 20.07       | 15000.0         | 9.000           | N    | ON     | 9.9        |
| 0.455963        | 42.69            | ---            | 56.77        | 14.07       | 15000.0         | 9.000           | N    | ON     | 9.9        |
| 0.575363        | ---              | 34.14          | 46.00        | 11.86       | 15000.0         | 9.000           | N    | ON     | 9.9        |
| 0.575363        | 48.01            | ---            | 56.00        | 7.99        | 15000.0         | 9.000           | N    | ON     | 9.9        |
| 0.657450        | ---              | 27.63          | 46.00        | 18.37       | 15000.0         | 9.000           | N    | ON     | 9.9        |
| 0.657450        | 46.40            | ---            | 56.00        | 9.60        | 15000.0         | 9.000           | N    | ON     | 9.9        |
| 3.108881        | ---              | 23.19          | 46.00        | 22.81       | 15000.0         | 9.000           | N    | ON     | 9.8        |
| 3.108881        | 39.17            | ---            | 56.00        | 16.83       | 15000.0         | 9.000           | N    | ON     | 9.8        |
| 8.918438        | ---              | 26.29          | 50.00        | 23.71       | 15000.0         | 9.000           | N    | ON     | 9.6        |
| 8.918438        | 40.10            | ---            | 60.00        | 19.90       | 15000.0         | 9.000           | N    | ON     | 9.6        |
| 17.518969       | ---              | 24.13          | 50.00        | 25.87       | 15000.0         | 9.000           | N    | ON     | 9.5        |
| 17.518969       | 40.11            | ---            | 60.00        | 19.89       | 15000.0         | 9.000           | N    | ON     | 9.5        |

Note:

- 1.All modes have been tested and only the worst mode is recorded in the report.
- 2.L1 and N is all have been tested, the result of them is synthesized in the above data diagram.

## Annex A: Revised History

| Version | Revised Content |
|---------|-----------------|
| V0      | Initial         |

## Annex B: Accreditation Certificate



**END OF REPORT**