




Industrial Internet Innovation Center (Shanghai) Co.,Ltd.


NFC TEST REPORT

PRODUCT	Handheld Wireless Terminal
BRAND	SUNMI
MODEL	T8F1B
APPLICANT	Shanghai Sunmi Technology Co.,Ltd.
FCC ID	2AH25T8F1B
IC	22621-T8F1B
ISSUE DATE	February 14, 2025
STANDARD(S)	FCC CFR47 Part 2, FCC CFR47 Part 15C, ANSI C63.10-2013, RSS-210 Issue 11, RSS-Gen Issue 5


Prepared by: Li Liukai



Reviewed by: Qin Yabin



Approved by: Zhang Min

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

CONTENTS

1 SUMMARY OF TEST REPORT	3
1.1 TEST STANDARD (S)	3
1.2 SUMMARY OF TEST RESULTS	3
2 GENERAL INFORMATION OF THE LABORATORY	4
2.1 TESTING LABORATORY	4
2.2 LABORATORY ENVIRONMENTAL REQUIREMENTS	4
2.3 PROJECT INFORMATION	4
3 GENERAL INFORMATION OF THE CUSTOMER.....	5
3.1 APPLICANT	5
3.2 MANUFACTURER	5
3.3 FACTORY	5
4 GENERAL INFORMATION OF THE PRODUCT	6
4.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
4.2 DESCRIPTION FOR AUXILIARY EQUIPMENT (AE)	6
5 TEST CONFIGURATION INFORMATION	8
5.1 LABORATORY ENVIRONMENTAL CONDITIONS	8
5.2 DECISION OF FINAL TEST MODE	9
5.3 EUT SYSTEM OPERATION	9
5.4 EUT CONNECTION DIAGRAM OF TEST SYSTEM	9
5.5 TEST EQUIPMENT UTILIZED	10
5.6 MEASUREMENT UNCERTAINTY	10
6 TEST RESULTS.....	11
6.1 20DB BANDWIDTH	11
6.2 FREQUENCY STABILITY	13
6.3 RADIATED EMISSION.....	15
6.4 CONDUCTED EMISSIONS.....	22
6.5 OCCUPIED BANDWIDTH	24
ANNEX A: MEASUREMENT DATA.....	25
ANNEX B: REVISED HISTORY	32
ANNEX C: ACCREDITATION CERTIFICATE.....	33

1 Summary of Test Report

1.1 Test Standard (s)

No.	Test Standard(s)	Title
1	FCC CFR47 Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC CFR47 Part 15C	Radio Frequency Devices-Intentional Radiators
3	ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
4	RSS-210	License-Exempt Radio Apparatus: Category I Equipment
5	RSS-Gen	General Requirements for Compliance of Radio Apparatus

NOTE: According to customer requirements, test and report using the latest version of the standard.

1.2 Summary of Test Results

No.	Item(s)	Sub-clause of FCC Standard	Sub-clause of IC Standard	Verdicts for Single Item	Detaied Results
1	20 dB bandwidth	2.1049	RSS Gen 6.7	Pass	See section 6.1
2	Frequency Stability	15.225(e)	RSS 210 B.6.b	Pass	See section 6.2
3	Radiated Emission	15.225 (a) (b) (c) (d) and 15.209	RSS 210 B.6.a (i , ii , iii , iv)	Pass	See section 6.3
4	Conducted Emissions	15.207	RSS Gen 8.8	Pass	See section 6.4
5	Occupied bandwidth	N/A	RSS Gen 6.7	Pass	See section 6.5
6	Antenna Requirement	15.203	RSS GEN 6.8	Pass	See Note 2

NOTE:

The T8F1B, manufactured by Shanghai Sunmi Technology Co.,Ltd. is a new product for testing. Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 1.3.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 4 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 1 of this test report.

Note 2:

The EUT has an internal loop antenna for NFC (13.56MHz) function, so this EUT complies with the 15.203/ RSS Gen 6.8 antenna requirements, please refer to the internal photos.

Note 3:

Both the front and back of the EUT have NFC antenna. After laboratory verification, the test results of the NFC antenna on the back of the EUT are worse, and only the test results of the worst antenna are reflected in the report.

2 General Information of The Laboratory

2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	708870
FCC Designation No.	CN1364
IC designation No.	10766A
CAB identifier	CN0067

2.2 Laboratory Environmental Requirements

Temperature	15℃~35℃
Relative Humidity	25%RH~75%RH
Atmospheric Pressure	86kPa~106kPa
Supply Voltage	120V/60Hz

2.3 Project Information

Project Manager	Gao Hongning
Test Date	December 12, 2024 to December 13, 2024

3 General Information of The Customer

3.1 Applicant

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Telephone	8618501703215

3.2 Manufacturer

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Telephone	8618501703215

3.3 Factory

Company	N/A
Address	N/A

4 General Information of The Product

4.1 Product Description for Equipment under Test (EUT)

Product	Handheld Wireless Terminal
Model	T8F1B
Date of Receipt	December 04, 2024
EUT ID*	S13aa
SN/IMEI	862072070026592/862072070026600
Supported Radio Technology and Bands	GSM 850/900/1800/1900 WCDMA Band I/II/IV/V/VI/VIII/XIX LTE Band 1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/30/34/38/39/40/41/66/71 BT 5.2 BR/EDR/BLE WLAN 802.11b,g,n WLAN 802.11a,n,ac GPS/GLONASS/BDS/Galileo NFC
Hardware Version	V00
Software Version	1.00.00.20241113_186_userdebug
Operating Frequency	13.56MHz
Antenna Information	Loop Antenna
Modulation information	ASK
Product Class	1
NOTE1: EUT ID is the internal identification code of the laboratory. NOTE2: Photographs of EUT are shown in ANNEX A of this test report. NOTE3: Samples in the test report are provided by the customer. The test results are only applicable to the samples received by the laboratory.	

4.2 Description for Auxiliary Equipment (AE)

AE ID*	Description	Model	SN/Remark
CG01	Adapter	TPA-141A050200UU01	SHENZHEN TIANYIN ELECTRONICS CO., LTD. OUTPUT: 5V 2A
CH01	Adapter	UC13US	Jiangsu Chenyang Electron Co., Ltd. OUTPUT: 5V 2A
CI01	Adapter	TPA-10120150UU	SHENZHEN TIANYIN ELECTRONICS CO., LTD. OUTPUT: 9V 2A
UA10	AC Cable	SSM-A033A	Saibao (Jiangxi) Industry Co., LTD

BA10	Battery	GYP A	HUNAN GAOYUAN BATTERY CO.,LTD. 5000mAh 3.87V
AE1	Type-A Card	N/A	N/A
NOTE: *AE ID is the internal identification code of the laboratory.			

5 Test Configuration Information

5.1 Laboratory Environmental Conditions

5.1.1 Permanent Facilities

Semi-anechoic chamber SAC3-1 (9 m*8m*6.2m) & SAC3-2 (9.8m*6.7m*6.7m)	
Shielding effectiveness	0.014MHz ~1MHz, >60dB; 1MHz~1000MHz, >90dB.
Electrical insulation	> 2MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (SVSWR)	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

Shielded room	
Shielding effectiveness	0.014MHz~1MHz, >60dB; 1MHz~1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω

5.2 Decision of final test mode

The EUT was tested in conjunction with the accessories in Section 4.2. We tested all of the following test modes and selected the worst mode from the test results and recorded them in the report.


The test configuration modes are as the following:

Test Item	Test setup and operating modes
20 dB bandwidth	Mode 1: TX Mode+ BA10+ AE1
Frequency Stability	Mode 1: TX Mode+ BA10+ AE1
Radiated emission	Mode 1: TX Mode+ BA10+ AE1
Conducted Emissions	Mode 2: TX Mode+ CI01+ UA10+ BA10+ AE1
Occupied bandwidth	Mode 1: TX Mode+ BA10+ AE1
Note: After the verification of Part 15B, CI01 is the worst adapter for testing Conducted Emissions.	


5.3 EUT System Operation

1. Connect the EUT with AE.
2. Setup the EUT according to the standard.
3. Start testing and monitoring the function.
4. TX mode: Enter the NFC card reading mode, place the Type A card on the EUT. The EUT will transmit the NFC command continuously during the test, and will read the information from the Type A Card continuously.

5.4 EUT Connection Diagram of Test System



<Figure 5.4-1> Mode 1

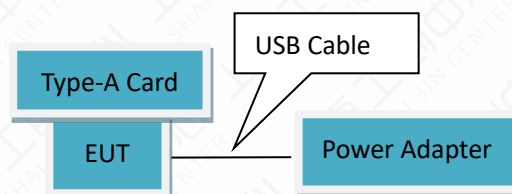

<Figure 5.4-2> Mode 2

5.5 Test Equipment Utilized

No.	Name	Model	S/N	SW Version	HW Version	Manufacturer	Cal. Date	Cal. Interval
1	Test Receiver	ESCI	101235	V5.1-24-3	00	R&S	2023-12-19	1 year
							2024-12-13	1 year
2	Test Receiver	ESU40	100307	00	01	R&S	2023-12-19	1 year
							2024-12-13	1 year
3	Trilog Antenna	VULB9163	01345	N/A	N/A	Schwarzbeck	2024-03-29	1 year
4	2-Line V-Network	ENV216	101380	N/A	N/A	R&S	2023-12-19	1 year
							2024-12-13	1 year
5	EMI Test Software	EMC32 V10.35.02	N/A	N/A	N/A	R&S	N/A	N/A
6	Loop Antenna	AL-130R	121083	N/A	N/A	COM-POWER	2024-08-31	1 year
7	Temperature Box	B-TF-107C	201804107	N/A	N/A	Boyi	2024-06-07	1 year

5.6 Measurement Uncertainty

Item (s)	Uncertainty
20 dB bandwidth	$\pm 1.9\%$
Frequency Stability	$\pm 1.9\%$
Electric Field Strength of Fundamental Emissions	4.92 dB
Electric Field Radiated Emissions (Below 30MHz)	4.92 dB
Electric Field Radiated Emissions (Above 30MHz)	5.66 dB
Conducted Emissions	3.52 dB
Occupied bandwidth	$\pm 1.9\%$
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.	

6 Test Results

6.1 20dB Bandwidth

6.1.1 Measurement Methods

- The transmitter output signal was picked up by coil antenna to the spectrum analyzer.
- The transmitter output signal was picked up by coil antenna connected to the spectrum analyzer.
- The bandwidth of the center frequency was measured with 200Hz RBW, 500Hz VBW and 14kHz span.

6.1.2 EUT Connection Diagram of Test System

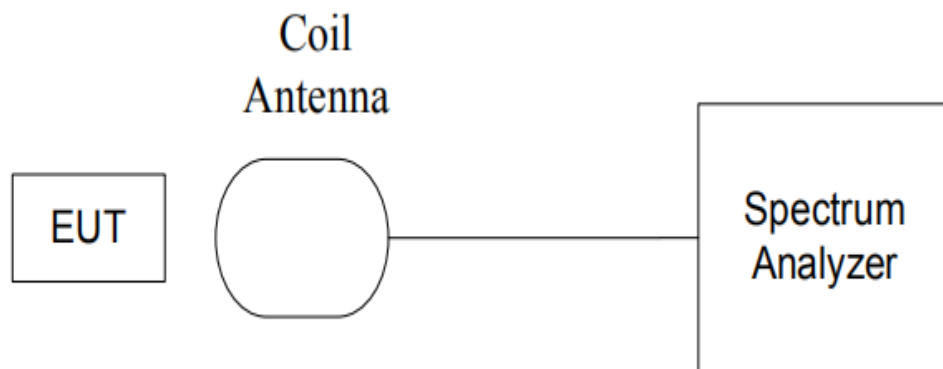


Figure 6.1.2-1 20dB Bandwidth Connection Diagram

6.1.3 Test Condition

The measurement of EUT is carried out under the transmit state of NFC and without modulation.

EUT had been not connected to a travel adapter.

During the measurements, the ambient temperature is in the range of 15~25℃.

6.1.4 Test environmental conditions

Temperature	21.3℃
Relative Humidity	42.6 %RH
Atmospheric Pressure	101.5 kPa

6.1.5 Test Results

Carrier frequency (MHz)	20dB Bandwidth (kHz)	Test Results	Conclusion
13.56	1.122	See Annex A.1-1	Pass

6.2 Frequency Stability

6.2.1 Measurement Methods

The transmitter output signal was picked up by coil antenna connected to the frequency counter. The center frequency was measured with 30Hz RBW and 1kHz span.

During the test, the EUT was placed in a thermal chamber until thermal balance and lasting appropriate time.

6.2.2 EUT Connection Diagram of Test System

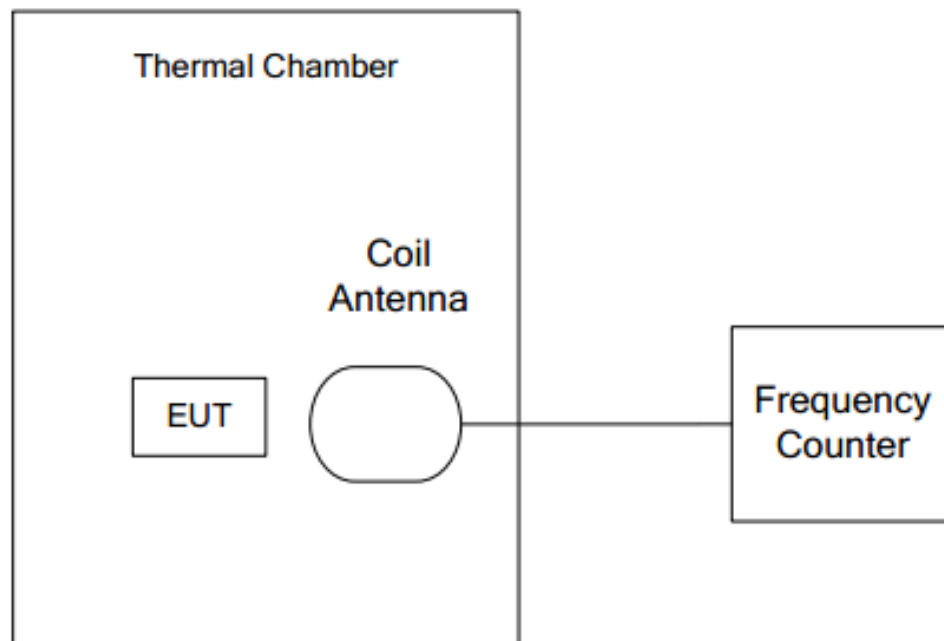


Figure 6.2.2-1 Frequency Stability Connection Diagram

6.2.3 Test Condition

The measurement of EUT is carried out under the transmit state of without modulation, EUT had been not connected to a travel adapter.

Operation Temperature: -20°C、-10°C、0°C、10°C、20°C、25°C、30°C、40°C、50°C

Operation Voltage: $V_{min}=114V$, $V_{max}=126V$, and $T_{nom}=120V$.

6.2.4 Limit/Criterion

15.225(e): The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

RSS-210 B.6.b: The frequency tolerance of the carrier signal shall be maintained within ± 100 ppm of the operating frequency.

6.2.5 Test environmental conditions

Temperature	21.3°C
Relative Humidity	42.6 %RH
Atmospheric Pressure	101.5 kPa

6.2.6 Test Results

See Annex A.2-1

6.3 Radiated Emission

6.3.1 Electric Field Strength of Fundamental Emissions

6.3.1.1 Method of Measurement

a. The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The transmitter carrier output levels (E-Field) from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1 meter above the ground. The E-field is measured with a shielded loop antenna connected to a measurement receiver. Detected E-field was maximized by rotating the EUT through 360° and adjusting the receiving antenna polarizations. Both horizontal and vertical polarizations of the antenna were set during the measurement. The maximization processes were repeated with the EUT positioned respectively in its three orthogonal axes. The measurements were performed with the peak detector and if required, the quasi-peak detector.

b. The EUT was placed on the axis of X, Y and Z respectively for testing. Only the worst direction data is represented in the report.

c. The measurement bandwidth:

Frequency (MHz)	RBW / VBW
12.56-14.56	10 / 30kHz

6.3.1.2 EUT Connection Diagram of Test System

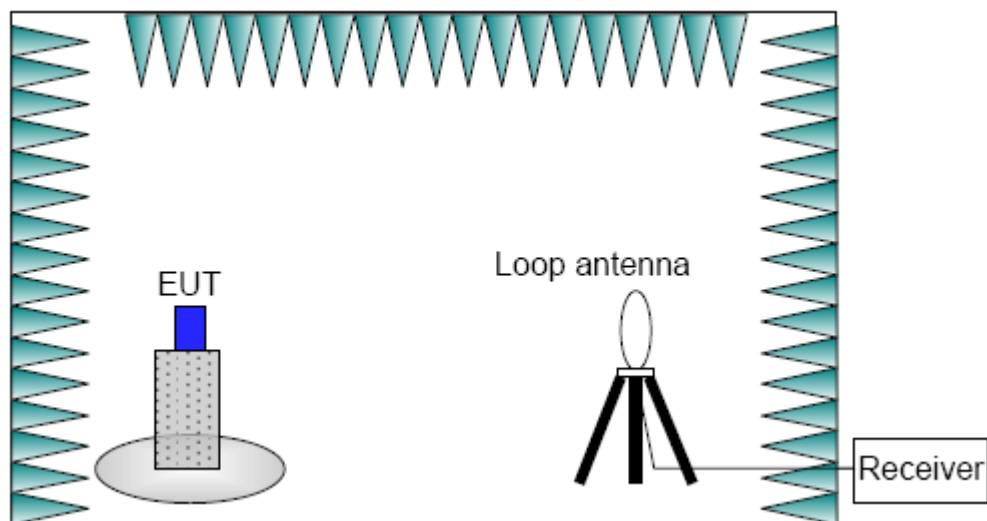


Figure 6.3.1.2-1 Electric Field Strength of Fundamental Emissions Connection Diagram

6.3.1.3 Test Condition

Frequency Range (MHz)	RBW/VBW	Sweep Time (s)
12.56-14.56	10kHz/30kHz	AUTO

6.3.1.4 Limit/Criterion

Clause 15.225(a) the field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Clause 15.225(b) within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Clause 15.225(c) within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Frequency Range (MHz)	E-field Strength Limit @30m ($\mu\text{V/m}$)	E-field Strength Limit @3m (dB $\mu\text{V/m}$)
13.560 $\pm$ 0.007	+15,848	124
13.410 to 13.553 13.567 to 13.710	+334	90
13.110 to 13.410 13.710 to 14.010	+106	81

Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula:

Extrapolation (dB) = $40\log_{10}(\text{Measurement Distance} / \text{Specification Distance})$

6.3.1.5 Test environmental conditions

Temperature	21.3°C
Relative Humidity	42.6 %RH
Atmospheric Pressure	101.5 kPa

6.3.1.6 Test Results

Mode	Frequency (MHz)	Test Results	Verdicts
Mode 1: TX Mode+ BA10+ AE1	13.2-13.9	See Annex A.3-1-1	Pass
NOTE: a. Abbreviations used in this clause: Pass—P; Fail—F; Not applicable—N/A b. The result displayed take into account applicable antenna factors and cable losses.			

6.3.2 Electric Field Radiated Emissions (Below 30MHz)

6.3.2.1 Method of Measurement

a. The electric field radiated emissions from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1 meter above the ground. The E-field is measured with a shielded loop antenna connected to a measurement receiver. Detected E-field was maximized by rotating the EUT through 360° and adjusting the receiving antenna polarizations. Both horizontal and vertical polarizations of the antenna were set during the measurement. The maximization processes were repeated with the EUT positioned respectively in its three orthogonal axes. The measurements were performed with the peak detector and if required, the quasi-peak detector.

b. The EUT was placed on the axis of X, Y and Z respectively for testing. Only the worst direction data is represented in the report.

c. The measurement bandwidth:

Frequency (MHz)	RBW / VBW
0.009-30	10 / 30kHz

6.3.2.2 EUT Connection Diagram of Test System

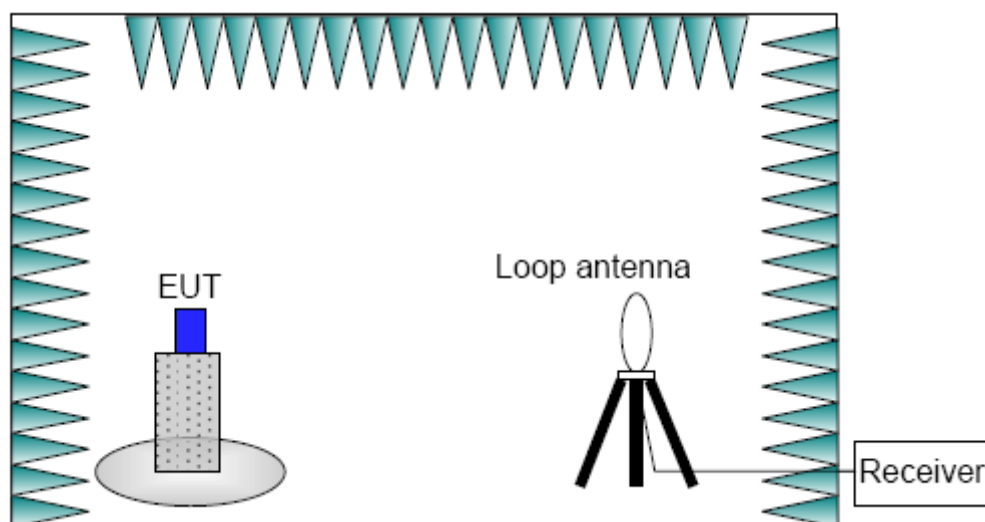


Figure 6.3.2.2-1 Electric Field Radiated Emissions (Below 30MHz) Connection Diagram

6.3.2.3 Test Condition

Frequency Range (MHz)	RBW/VBW	Sweep Time (s)
0.009-30	10kHz/30kHz	AUTO

6.3.2.4 Limit/Criterion

Frequency Range (MHz)	E-field Strength Limit @30m (mV/m)	E-field Strength Limit @3m (dBuV/m)
0.009-0490	2400/F (kHz)	129-94
0.490-1.705	24000/F (kHz)	74-63
1.705-30	30	70

Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula:

Extrapolation (dB) = 40log10(Measurement Distance / Specification Distance)

dBuA/m=dBuV/m / 120π

6.3.2.5 Test environmental conditions

Temperature	21.3℃
Relative Humidity	42.6 %RH
Atmospheric Pressure	101.5 kPa

6.3.2.6 Test Results

Mode	Frequency (MHz)	Test Results	Verdicts
Mode 1: TX Mode+ BA10+ AE1	0.009-30	See Annex A.3-2-1	Pass

NOTE:

a. Abbreviations used in this clause: Pass—P; Fail—F; Not applicable—N/A

b. The result displayed take into account applicable antenna factors and cable losses

c. dBuV/m and dBuA/m can be converted to each other, so the test data of dBuV/m are reflected in the report

6.3.3 Electric Field Radiated Emissions (Above 30MHz)

6.3.3.1 Method of Measurement

a. The electric field radiated emissions from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1 meter above the ground. The E-field is measured with a shielded loop antenna connected to a measurement receiver. Detected E-field was maximized by rotating the EUT through 360° and adjusting the receiving antenna polarizations. Both horizontal and vertical polarizations of the antenna were set during the measurement. The maximization processes were repeated with the EUT positioned respectively in its three orthogonal axes. The measurements were performed with the peak detector and if required, the quasi-peak detector.

b. The EUT was placed on the axis of X, Y and Z respectively for testing. Only the worst direction data is represented in the report.

c. The measurement bandwidth:

Frequency (MHz)	RBW / VBW
30-1000	120 kHz / 300kHz

6.3.3.2 EUT Connection Diagram of Test System

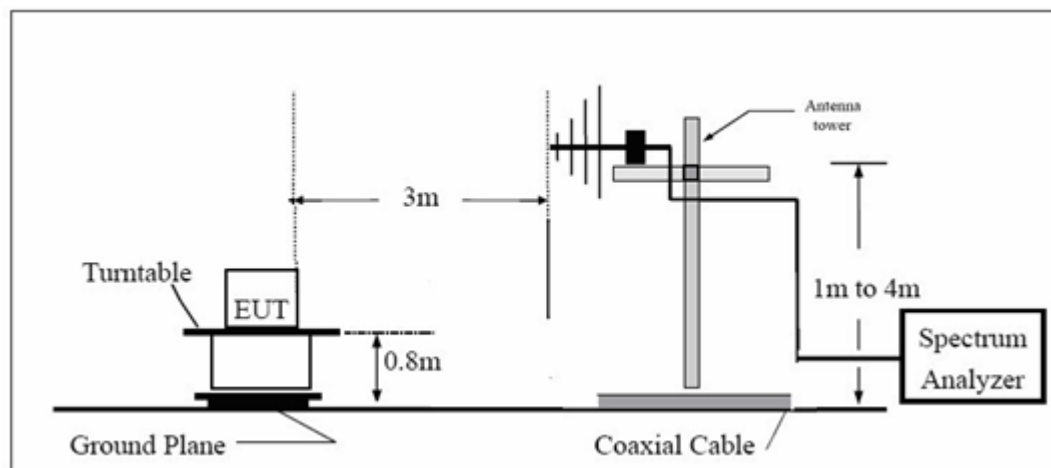


Figure 6.3.3.2-1 Electric Field Radiated Emissions (Above 30MHz) Connection Diagram

6.3.3.3 Test Condition

Frequency Range (MHz)	RBW/VBW	Sweep Time (s)
30-1000	120kHz/300kHz	AUTO

6.3.3.4 Limit/Criterion

Frequency Range (MHz)	Quasi-Peak (dBμV/m)	Peak (dBμV/m)	Average (dBμV/m)
30-88	40	N/A	N/A
88-216	43.5	N/A	N/A
216-960	46	N/A	N/A
Above 960	54	N/A	N/A
Above 1000	N/A	74	54

6.3.3.5 Test environmental conditions

Temperature	21.3℃
Relative Humidity	42.6 %RH
Atmospheric Pressure	101.5 kPa

6.3.3.6 Test Results

Mode	Frequency (MHz)	Test Results	Verdicts
Mode 1: TX Mode+ BA10+ AE1	30-1000	See Annex A.3-3-1	Pass
NOTE: a. Abbreviations used in this clause: Pass—P; Fail—F; Not applicable—N/A b. The result displayed take into account applicable antenna factors and cable losses c. QP detection is used in radiated emissions test, and the Duty Cycle of NFC main frequency signal is 100%.			

6.4 Conducted Emissions

6.4.1 Reference

See Clause 6.2 of ANSI C63.10-2013

6.4.2 Measurement Methods

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector. Tested in accordance with the procedures of ANSI C63.10-2013

6.4.3 Test Setup

The measurement bandwidth and Test Condition

Frequency Range (MHz)	RBW	Sweep Time (s)	Test Voltage
0.15-30	9 kHz	AUTO	120V/60Hz

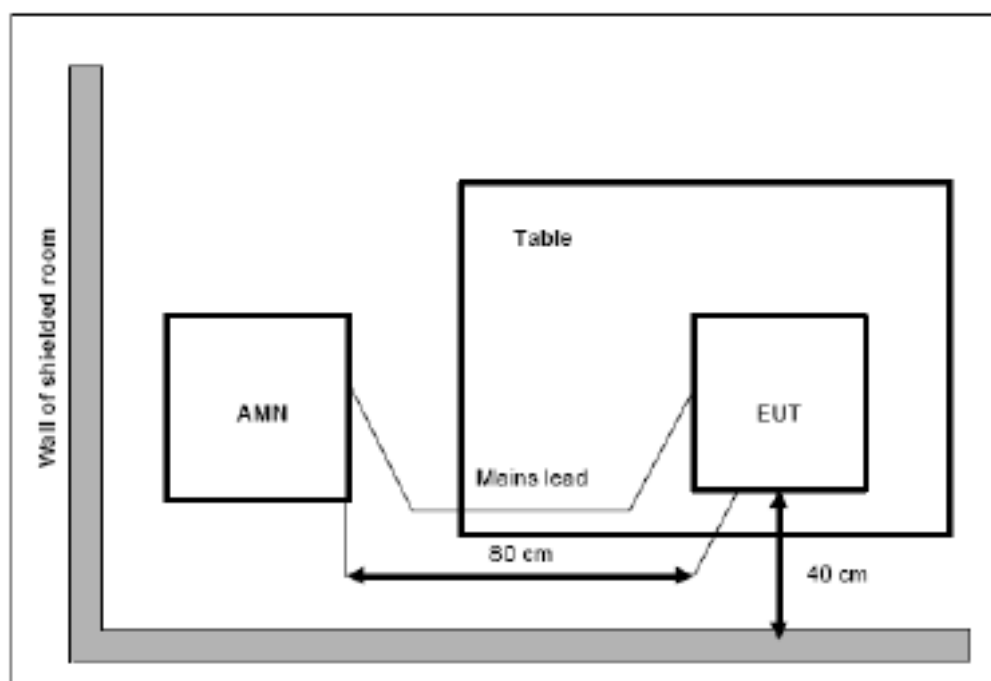


Figure 6.4.3-1 Conducted Emissions Connection Diagram

6.4.4 Limits

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

6.4.5 Test environmental conditions

Temperature	21.4°C
Relative Humidity	42.3 %RH
Atmospheric Pressure	100.3 kPa

6.4.6 Measurement Results

Mode	Frequency (MHz)	Test Results	Verdicts
Mode 2: TX Mode+ CI01+ UA10+ BA10+ AE1	0.009-30	See Annex A.4-1	Pass

NOTE:

- Emission level (quasi-peak or Average peak) =Raw value by receiver + Corr (Insertion loss+ cable loss)
- The raw value is used to calculate by software which is not shown in the sheet.
- Margin=limit value – emission level.
- L1 and N line is all have been tested, the result of them is synthesized in the above data diagram.
- The frequency over the limits is the NFC main signal frequency.

6.5 Occupied bandwidth

6.5.1 Reference

See Clause 6.7 of RSS-Gen.

6.5.2 Measurement Methods

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

The following conditions shall be observed for measuring the occupied bandwidth:


- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

6.5.3 Measurement Results

See Annex A.5-1

Annex A: Measurement Data

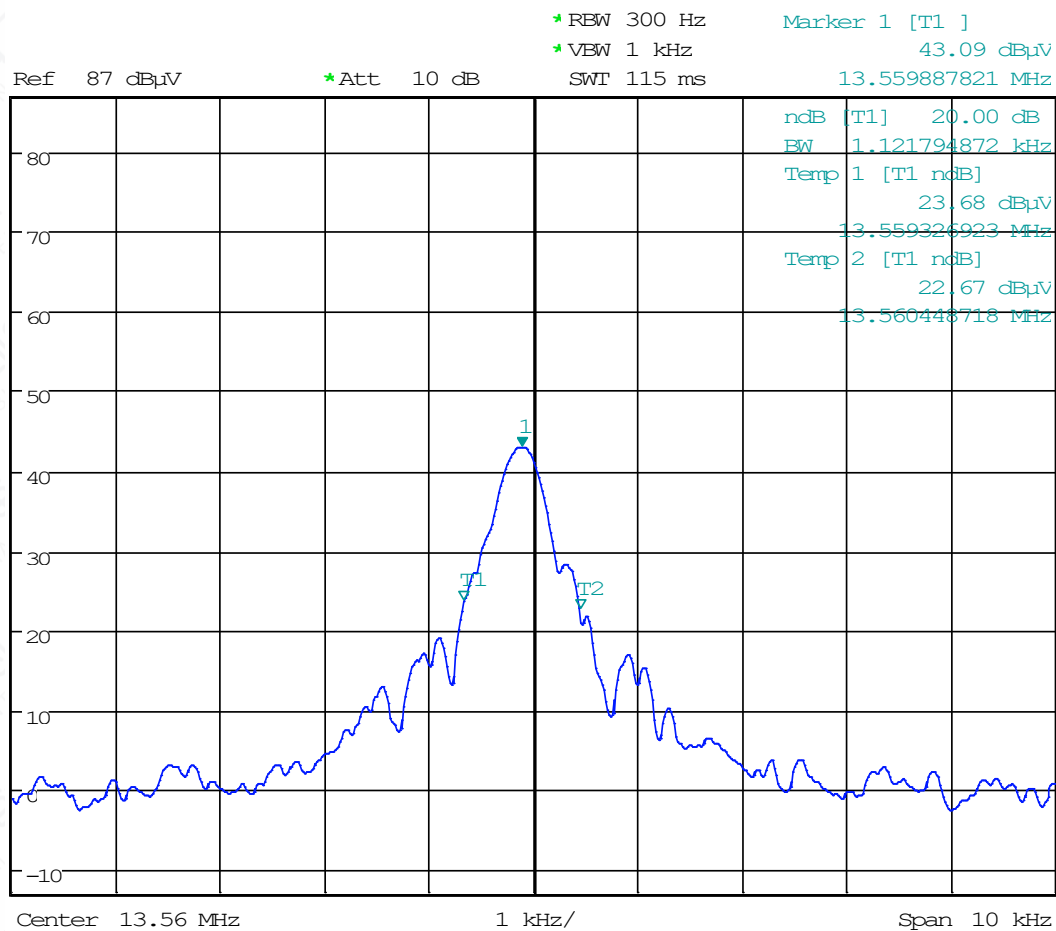

A.1-1 Mode 1 20dB Bandwidth

Temperature	Voltage	Frequency Error (MHz)			
		Startup	2Min Later	5Min Later	10Min Later
-20℃	120V	13.559821	13.559765	13.559478	13.559439
-10℃		13.559834	13.559698	13.559529	13.559634
0℃		13.559815	13.559624	13.559492	13.559800
10℃		13.559846	13.559751	13.559631	13.559578
20℃		13.559769	13.559920	13.560270	13.559569
30℃		13.559821	13.559946	13.559629	13.559721
40℃		13.559856	13.559899	13.559817	13.559446
50℃		13.559890	13.559639	13.559679	13.559498
25℃	114V	13.559891	13.559567	13.559597	13.559674
25℃	126V	13.559674	13.559683	13.559898	13.559579
Temperature	Voltage	Frequency Error (%)			
-20℃	120V	0.000376	0.000789	0.002906	0.003193
-10℃		0.000280	0.001283	0.002530	0.001755
0℃		0.000420	0.001829	0.002802	0.000531
10℃		0.000192	0.000892	0.001777	0.002168
20℃		0.000760	0.000354	0.002935	0.002235
30℃		0.000376	0.000546	0.001792	0.001114
40℃		0.000118	0.000199	0.000406	0.003142
50℃		0.000133	0.001718	0.001423	0.002758
25℃	114V	0.000140	0.002249	0.002028	0.001460
25℃	126V	0.001460	0.001394	0.000192	0.002161
Temperature	Voltage	Frequency Error (ppm)			
-20℃	120V	3.761097	7.890930	29.056321	31.932455
-10℃		2.802386	12.831980	25.295224	17.551788

0℃		4.203580	18.289258	28.023863	5.309785
10℃		1.917422	8.923388	17.773029	21.681621
20℃		7.595942	3.539856	29.351310	22.345344
30℃		3.761097	5.457279	17.920523	11.135798
40℃		1.179952	1.991169	4.056085	31.416226
50℃		1.327446	17.183053	14.233173	27.581381
25℃	114V	1.401193	22.492838	20.280427	14.601908
25℃	126V	14.601908	13.938185	1.917422	21.607874

A.2-1 Mode 1 Frequency Stability

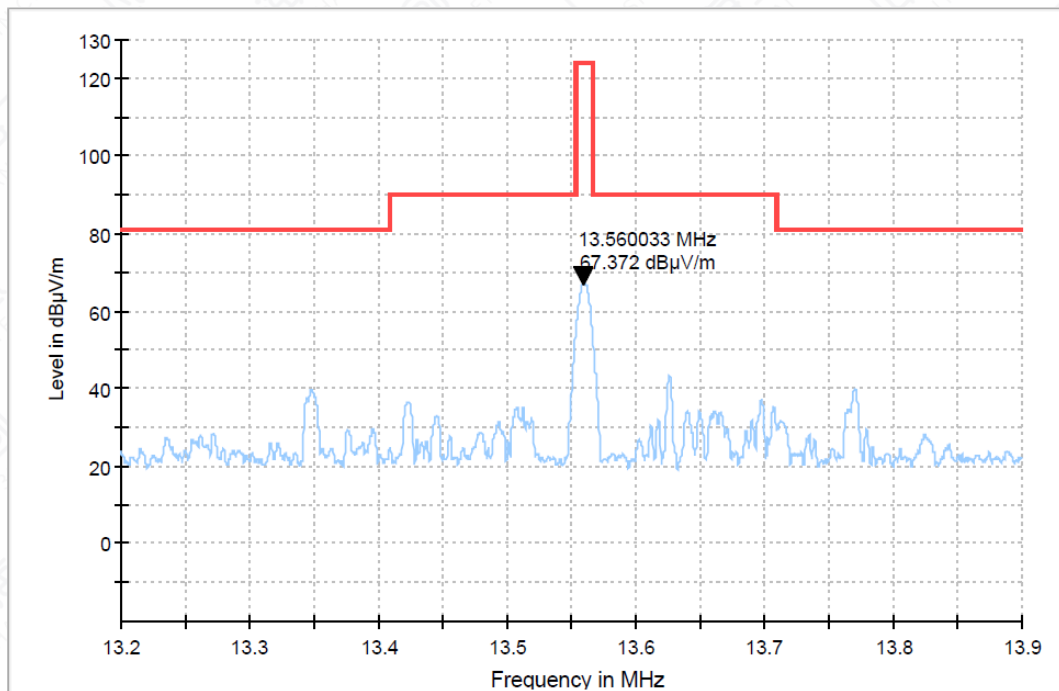


Figure A.3-1-1 Mode 1 Electric Field Strength of Fundamental Emissions

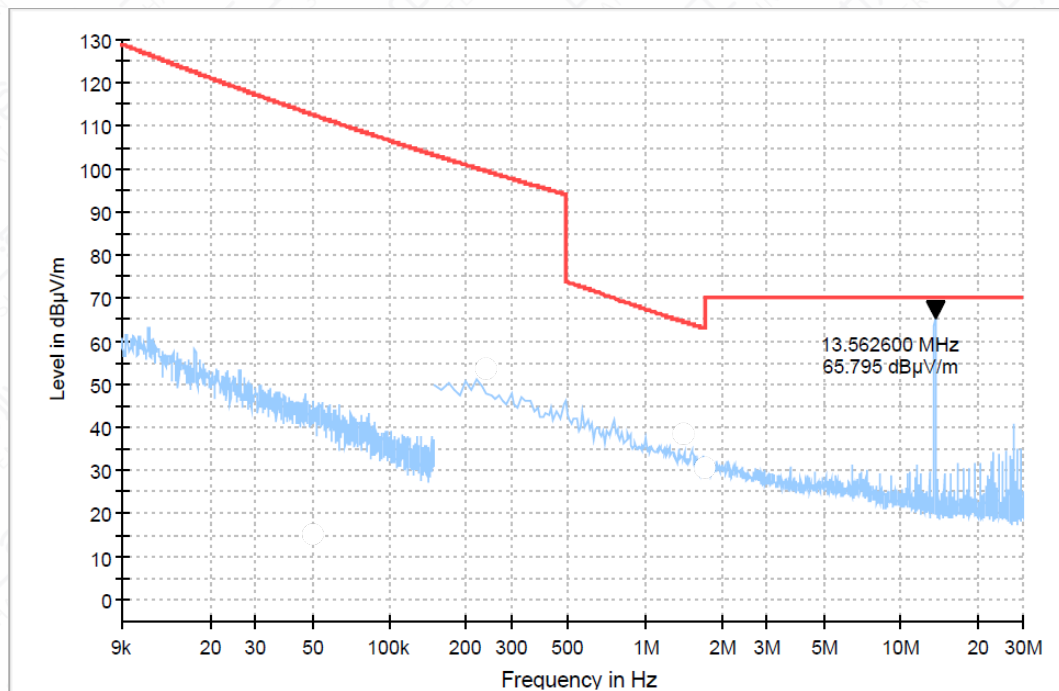


Figure A.3-2-1 Mode 1 Electric Field Radiated Emissions (Below 30MHz)

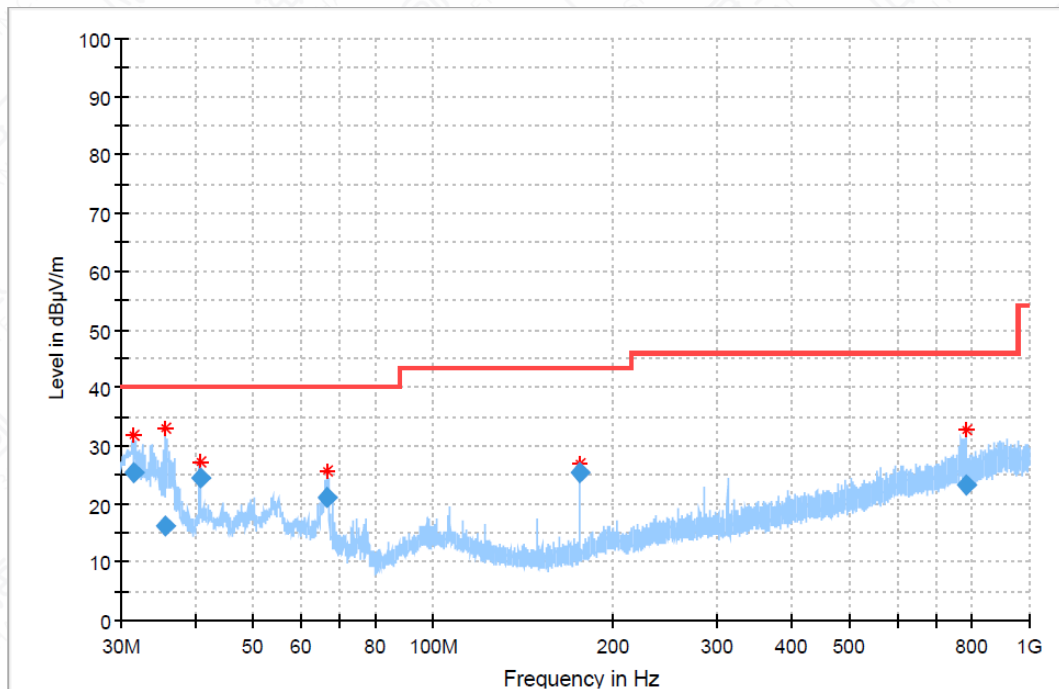


Figure A.3-3-1 Mode 1 Electric Field Radiated Emissions (Above 30MHz)

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.566640	25.50	40.00	14.50	100.0	V	317.0	-16
35.657864	16.23	40.00	23.77	100.0	V	23.0	-14
40.689896	24.45	40.00	15.55	175.0	V	227.0	-13
66.489091	21.24	40.00	18.76	175.0	V	181.0	-14
176.239971	25.31	43.50	18.19	125.0	H	172.0	-15
783.864920	23.29	46.00	22.71	225.0	V	-16.0	-1

Note: Horizontal and vertical polarity is all have been tested, the result of them is synthesized in the above data diagram.

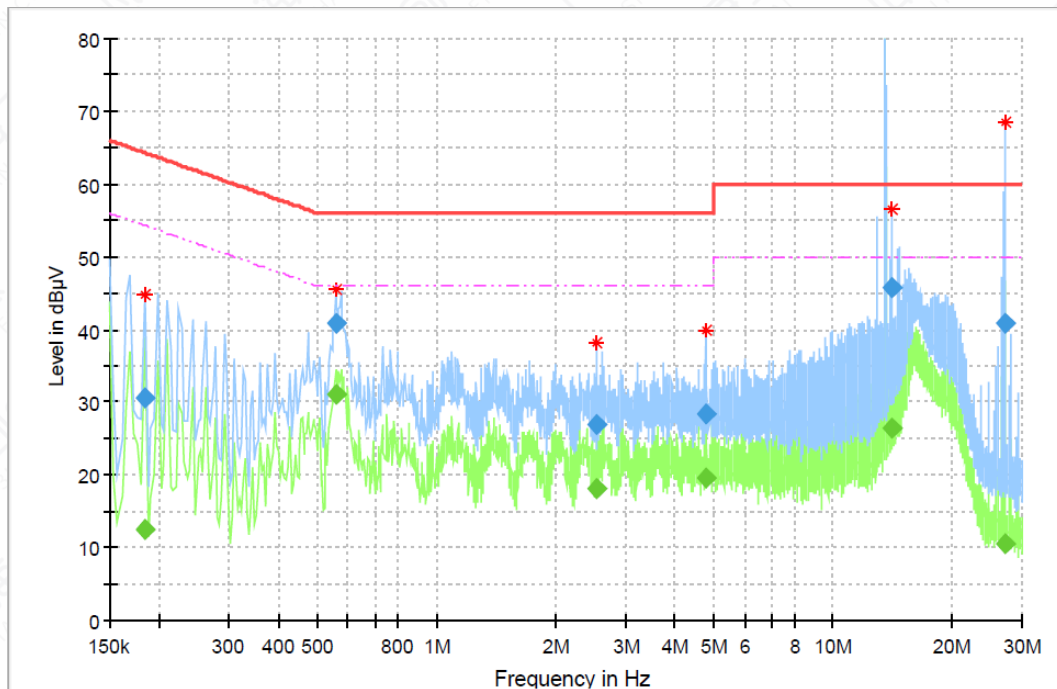


Figure A.4-1 Mode 2 Conducted Emissions

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.183581	30.59	---	64.32	33.73	15000.0	9.000	N	ON	10.0
0.183581	---	12.45	54.32	41.87	15000.0	9.000	N	ON	10.0
0.556706	40.80	---	56.00	15.20	15000.0	9.000	N	ON	9.9
0.556706	---	31.02	46.00	14.98	15000.0	9.000	N	ON	9.9
2.534269	26.82	---	56.00	29.18	15000.0	9.000	N	ON	9.9
2.534269	---	18.19	46.00	27.81	15000.0	9.000	N	ON	9.9
4.765556	28.37	---	56.00	27.63	15000.0	9.000	N	ON	9.8
4.765556	---	19.69	46.00	26.31	15000.0	9.000	N	ON	9.8
14.119800	45.67	---	60.00	14.33	15000.0	9.000	N	ON	9.5
14.119800	---	26.48	50.00	23.52	15000.0	9.000	N	ON	9.5
27.085894	---	10.60	50.00	39.40	15000.0	9.000	N	ON	9.5
27.085894	40.76	---	60.00	19.24	15000.0	9.000	N	ON	9.5

Note:

1. L1 and N line is all have been tested, the result of them is synthesized in the above data diagram.
2. The frequency over the limits is the NFC main signal frequency.

Center Freq. (MHz)	f_L (MHz)	f_H (MHz)	OBW
13.56	13.5593	13.5605	1.170 kHz

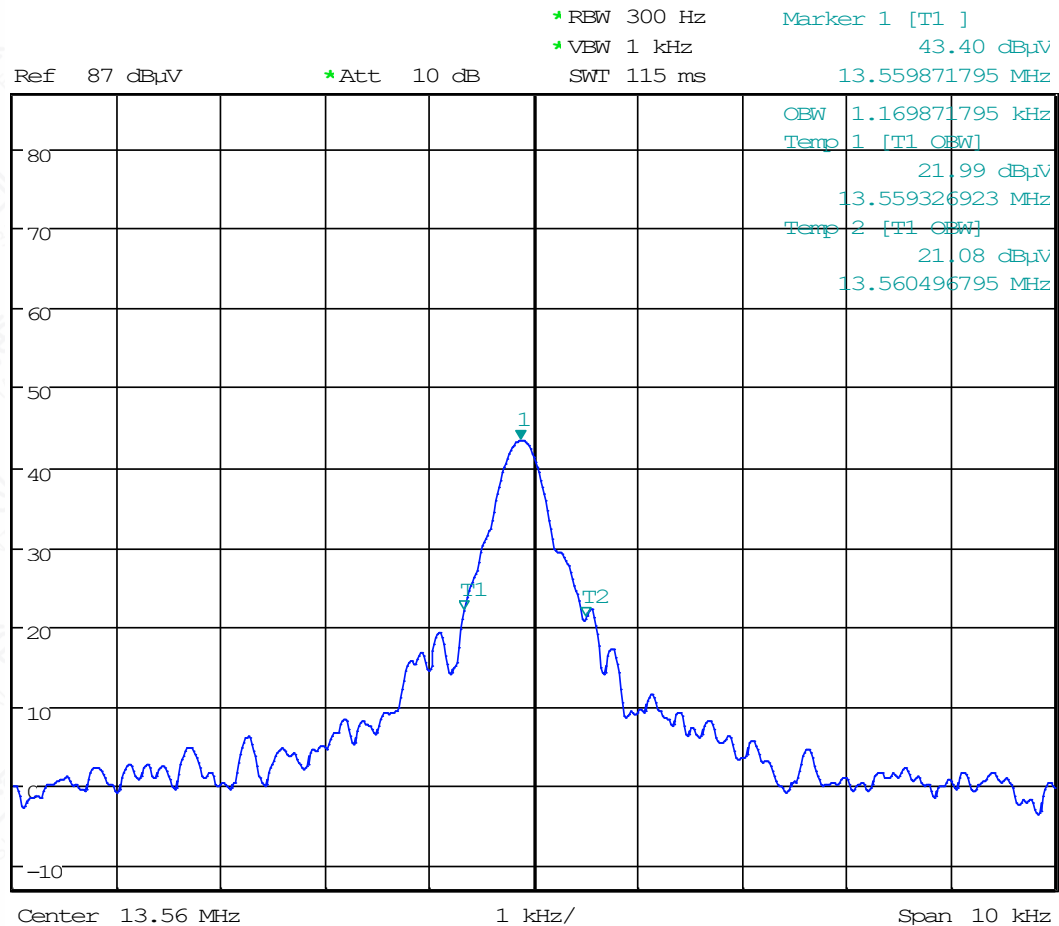


Figure A.5-1 Mode 1 Occupied bandwidth

Annex B: Revised History

Version	Revised Content
V0	Initial

Annex C: Accreditation Certificate

