



TEST REPORT

REPORT NUMBER: 25B02W000010-005

ON

Type of Equipment: Handheld Wireless Terminal

Type of Designation: T8F1C

Brand Name: SUNMI

Manufacturer: Shanghai Sunmi Technology Co.,Ltd.

FCC ID: 2AH25T8F1C

IC: 22621-T8F1C

ACCORDING TO

FCC Part 15C, FCC Part 2, ANSI C63.10-2013, RSS-Gen Issue 5, RSS-247 Issue 3

Chongqing Academy of Information and Communications Technology

Month date, year

August 14, 2025

Signature



Zhou Jin

Director

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of Chongqing Academy of Information and Communications Technology.



Report No.: 25B02W000010-005

Revision Version

Report Number	Revision	Date
25B02W000010-005	00	2025-08-14

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

CONTENTS

1. Test Laboratory	5
1.1. Testing Location.....	5
1.2. Testing Environment	5
1.3. Project data	5
1.4. Signature	5
2. Client Information.....	6
2.1. Applicant Information.....	6
2.2. Manufacturer Information.....	6
3. Equipment under Test (EUT) and Ancillary Equipment (AE)	7
3.1. About EUT	7
3.2. Internal Identification of EUT used during the test.....	7
3.3. Outline of Equipment under Test	7
3.4. Internal Identification of AE used during the test	8
3.5. EUT Test RF Configuration	8
4. Reference Documents	10
4.1. Documents supplied by applicant	10
4.2. Reference Documents for testing	10
5. Test Equipments Utilized	11
5.1. RF Test System	11
5.3. Climate Chamber	12
5.4. Anechoic chamber Vibration table	12
5.5. Test software	12
6. Test Results	12
6.1. Summary of Test Results	13
6.2. Peak Output Power-Conducted.....	15
6.3. Transmitter Spurious Emission-Radiated.....	18
6.4. AC Powerline Conducted Emission.....	33

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777



Report No.: 25B02W000010-005

ANNEX A EUT Photos	36
ANNEX B Deviations from Prescribed Test Methods.....	37

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

1. Test Laboratory

1.1. Testing Location

Name:	Chongqing Academy of Information and Communications Technology
Designation Number:	CN1239
IC Registration Number:	29397
Address:	No.19 EastRoad,Xiantao Big-data Valley,Yubei District,Chongqing,People's Republic of China
Postal Code:	401336
Telephone:	0086-23-88069965
Fax:	0086-23-88608777


1.2. Testing Environment

Normal Temperature:	15-35°C
Relative Humidity:	30-60%RH

1.3. Project data

Testing Start Date:	2025-06-03
Testing End Date:	2025-06-21

1.4. Signature



2025-08-14

Dong Junxin
(Prepared this test report)

Date



2025-08-14

Wang Lili
(Reviewed this test report)

Date



2025-08-14

Zhou Jin
Director of the laboratory
(Approved this test report)

Date

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

2. Client Information

2.1. Applicant Information

Company Name:	Shanghai Sunmi Technology Co.,Ltd.
Address /Post:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
City:	Shanghai
Country:	China
Telephone:	8618501703215
Fax:	N/A
Email:	fang.lu@sunmi.com
Contact Person:	Fang Lu

2.2. Manufacturer Information

Company Name:	Shanghai Sunmi Technology Co.,Ltd.
Address /Post:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
City:	Shanghai
Country:	China
Telephone:	8618501703215
Fax:	N/A
Email:	fang.lu@sunmi.com
Contact Person:	Fang Lu

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	Handheld Wireless Terminal
Model name	T8F1C
Brand name	SUNMI
BLUETOOTH Frequency Band	2402MHz-2480MHz
Type of BT modulation	GFSK
Extreme Temperature	-20/+55°C
Nominal Test Voltage	3.87V
Extreme Test High Voltage	4.45V
Extreme Test Low Voltage	3.6V

Note1: Photographs of EUT are shown in ANNEX A of this test report.

Note2: High and low voltage values in extreme condition test are given by manufacturer.

Note3: The Extreme Temperature is provided by the manufacturer and has not been verified by the laboratory.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
25B02W000010#S1	IMEI:862072070057563;862072070057571	V00	4.0.0	2025-05-23
25B02W000010#S4	IMEI:862072070057688;862072070057696	V00	4.0.0	2025-05-23

*EUT ID: is used to identify the test sample in the lab internally.

No.	Item(s)	Data
1	Antenna gain of EUT	-0.42 dBi

Note: The data of antenna gain is provided by the Antenna specification may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

3.3. Outline of Equipment under Test

Technology	Band	UL Freq.(MHz)	DL Freq.(MHz)	Channel Separation
------------	------	---------------	---------------	--------------------

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

BLE	CH0-39	2402-2480	2MHz
-----	--------	-----------	------

Test frequency list:

Test Mode	Channel	0	19	39
1M	Freq. (MHz)	2402	2440	2480
2M				
125K				
500K				

3.4. Internal Identification of AE used during the test


AE ID*	Description	Note	dB*
C1	USB Cable	SSM-A033A	--
A1	Adapter	TPA-141A050200UU01	--
A2	Adapter	UC13US	--
A3	Adapter	TPA-10120150UU	--
B1	Battery	GYPA	--
AE1	RF cable	--	0.8

AE ID*: is used to identify the test sample in the lab internally.

dB*: is provided customer.

3.5. EUT Test RF Configuration

EUT uses engineering mode to control RF emissions, changing power levels, channels, rates, and HT.

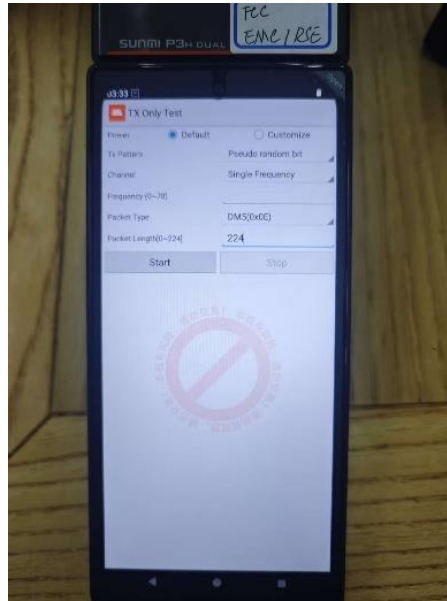

4. Reference Documents

4.1. Documents supplied by applicant

PICS/PIXIT, referring to Annex B for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15C	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz	--
FCC Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations	--
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
KDB 558074 D01	Guidance for Performing Compliance Measurements on Frequency Hopping Spread Spectrum systems (DSS) Operating Under §15.247	v05r02
RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus	2021
RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2023
Note: FCC Part 2 and KDB 558074 D01 is not A2LA certified.		

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

5. Test Equipments Utilized

5.1. RF Test System

No.	Equipment	Model	SN	HW Version	SW Version	Manufacture	Cal. Interval	Cal.Due Date
1	Spectrum analyzer	FSQ 26	201137	--	--	R&S	1 Year	2026-06-15

5.2. RSE Test System

No.	Equipment	Model	SN	HW Version	SW Version	Manufacture	Cal. Interval	Cal.Due Date
1	EMI Test Receiver	ESU40	100307	--	--	R&S	1 Year	2025-06-28
2	TRILOG Broadband Antenna	VULB9163	9163-586	--	--	Schwarzbeck	2 Years	2026-10-28
3	Horn antenna	9120D	1083	--	--	Schwarzbeck	2 Years	2026-11-08
4	Horn antenna	DATE 1152	LM7127	--	--	ETS	2 Years	2026-09-30
5	Horn antenna	DATE 1012	LM5945	--	--	ETS	2 Years	2026-09-30
6	Loop Antenna	6502	00143163	--	--	ETS	2 Year	2026-09-04
7	Amplifier 1	SCU-08F1	8320027	--	--	R&S	--	--
8	Amplifier 2	SCU-18F	180093	--	--	R&S	--	--
9	2-Line V-Network	ENV216	102368	--	--	R&S	1 Year	2026-05-23
10	Test Receiver	ESR 3	101382	03	3.48 SP2	R&S	1 Year	2025-06-28
11	Test Receiver	ESW 26	101382	00	1.50 SP1	R&S	1 Year	2025-06-28

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

5.3. Climate Chamber

No.	Name	Type	SN	Manufacture	Cal. Interval	Cal.Due Date
--	--	--	--	--	--	--

5.4. Anechoic chamber Vibration table

No.	Name	Type	SN	Manufacture	Cal. Interval	Cal.Due Date
1	Fully-Anechoic Chamber	FAC 5	--	TDK	3 Years	2027-11-04
2	Anechoic Chamber	SAC 10	--	TDK	3 Years	2027-11-05

5.5. Test software

No.	Name	version	SN	Manufacture
1	EMC32 (Transmitter Spurious Emission- Radiated Above 1GHz)	V9.26.01	--	R&S
2	EMC32 (Transmitter Spurious Emission- Radiated Below 1GHz)	V 10.20.01	--	R&S
3	EMC32 (AC Powerline Conducted Emission)	V 10.40.10	--	R&S
4	WIFI/BT CE/FCC/ICautomated testing software	V1.0.0.0	--	Beijing Zhiwang Xince Technology Co., Ltd

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

6. Test Results

6.1. Summary of Test Results

FCC Rules	IC Rules	Name of Test	Result
15.247(b)	RSS-247 5.4	Maximum Peak Output Power	Pass ^{Note4}
15.247(e)	RSS-247 5.2	Peak Power Spectral Density	Pass ^{Note3}
15.247(a)	RSS-247 5.2	6dB Occupied Bandwidth	Pass ^{Note3}
2.1049	RSS-GEN 6.7	99% Occupied Bandwidth	Pass ^{Note3}
15.247(d)	RSS-247 5.5	Band Edges Compliance	Pass ^{Note3}
15.247(d)	RSS-247 5.5	Transmitter Spurious Emission-Conducted	Pass ^{Note3}
15.247/15.205/15.209	RSS-GEN 8.9, 8.10	Transmitter Spurious Emission-Radiated	Pass
15.207	RSS-GEN 8.8	AC Powerline Conducted Emission	Pass
15.203/15.247(c)	RSS Gen 6.8, RSS-247 5.4	Antenna requirement	Pass ^{Note 2}

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

NOTE 1:

The T8F1C, manufactured by Shanghai Sunmi Technology Co.,Ltd. is a variant product for testing.

This project is a variant project based on the original report 24T04I300217-063 issued by 3in with below changes:

- Added RFID function.
- Modified 2/3/4G Div Antenna and WIFI Antenna. Remove 1 NFC, Add RFID Antenna.
- PCB Changes,
- Removed: 8 Pin in behind.
- Mechanical shell changes.

Type of Service	Model Name	Super capacitor	pogopin	NFC	RFID
Original	T8F1B	Yes	8 Pin in behind & 6 pin in bottom	Two-sided	No
Variant	T8F1C	No	6 Pin in bottom	Under screen	Yes

According to the Product Change Description, we tested radiated spurious emission and the worst mode of Output Power in the original report, and the test data was recorded in the report.

NOTE 2:

Bluetooth used an Internal antenna with max Gain -0.42 dBi that complied with 15.203/15.247(c) Requirements.

NOTE 3:

The test verdict of this item come from the original report.

NOTE 4:

The test data in this report is validation data for the worst mode.

6.2. Peak Output Power-Conducted

Specifications:	FCC Part 15.247(b), RSS-247 5.4
DUT Serial Number:	IMEI:862072070057563;862072070057571
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60%RH Air pressure: 86-106kPa
Test Results:	Pass

Limit Level Construction:

Standard	Conducted Limit(dBm)	EIRP Limit(dBm)
FCC Part 15.247(b)(3)	<30	N/A
RSS-247 5.4	<30	<36

Measurement Uncertainty:


Measurement Uncertainty	0.36dB
-------------------------	--------

Test Procedure:

The measurement is according to ANSI C63.10 clause 11.9.1,

1. Set the RBW $\geq$ DTS bandwidth.
2. Set VBW $\geq [3 \times \text{RBW}]$.
3. Set span $\geq [3 \times \text{RBW}]$.
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

Test setup:

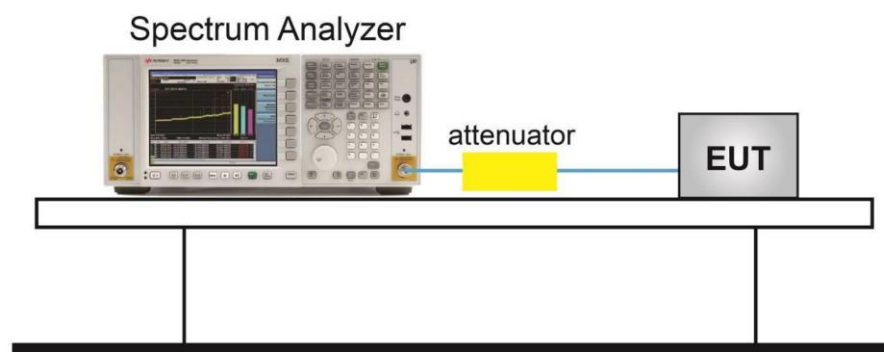

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

Antenna gain of EUT:

No.	Item(s)	Data
1	Antenna gain of EUT	-0.42 dBi

Note: The data is provided by the customer may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

Measurement Results:


TestMode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE_500K	Ant1	2402	-3.30	≤30	-3.72	≤36	PASS
BLE_500K	Ant1	2440	-2.56	≤30	-2.98	≤36	PASS
BLE_500K	Ant1	2480	-3.65	≤30	-4.07	≤36	PASS

Note: Only data in worst mode is provided.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Test graphs as below

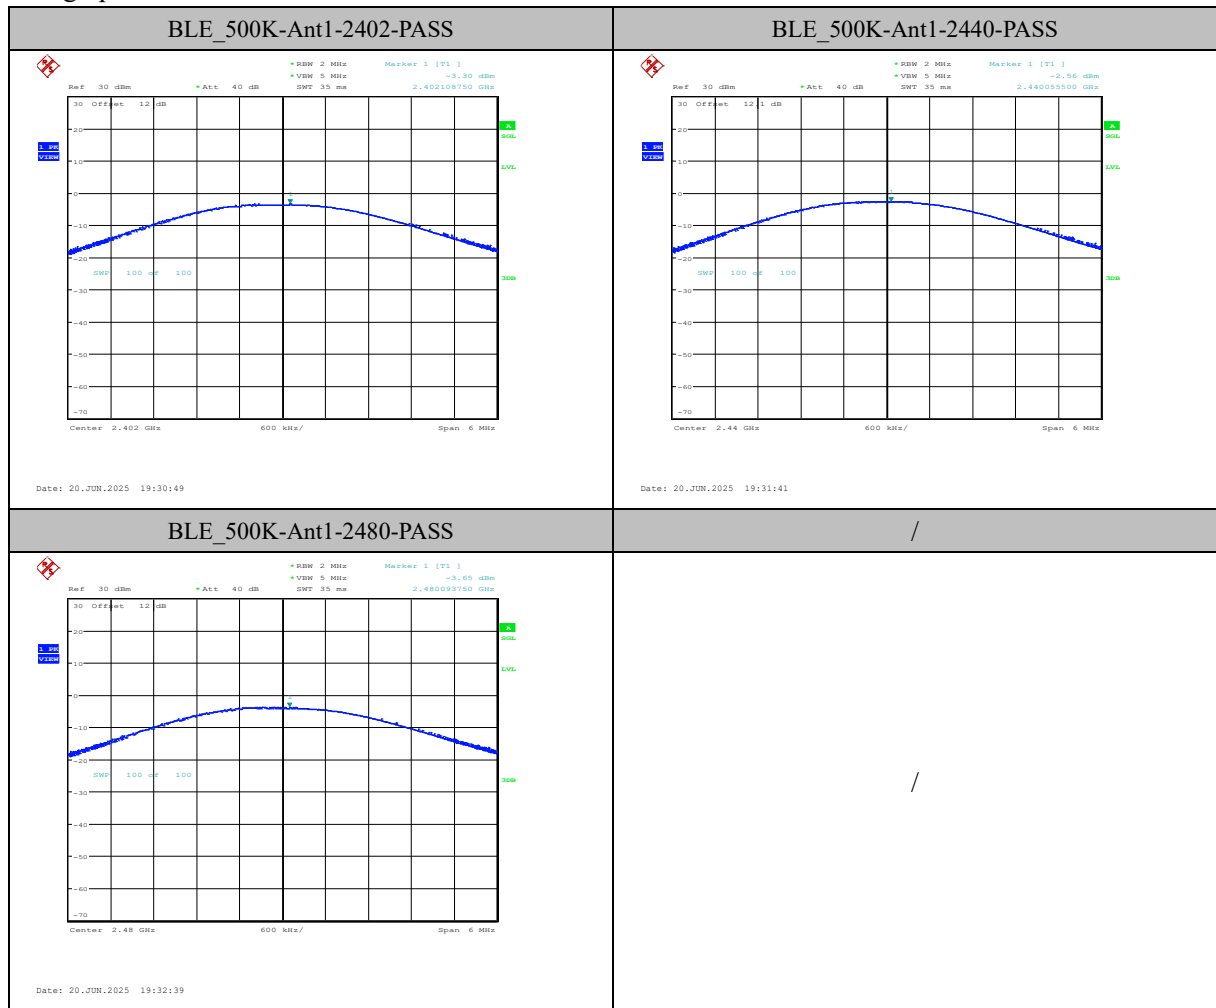

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.3. Transmitter Spurious Emission-Radiated

Specifications:	FCC 47 Part 15.247(d),15.205(a),15.209(a) ,RSS-GEN 8.9, 8.10
DUT Serial Number:	IMEI:862072070057688;862072070057696
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60%RH Air pressure: 86-106kPa
Test Results:	Pass

Limit Level Construction:

Limit in restricted band

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBuV/m)
0.009~0.49	2400/F (kHz)	129-94
0.49~1.705	24000/F (kHz)	74-63
1.705~30	30	70
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

Measurement Uncertainty:

Measurement Uncertainty	30MHz-150MHz 3.38 dB (k=2) 150MHz-1000MHz 4.09dB (k=2) 1000MHz-6000MHz 4.84 dB (k=2) 6000MHz-18000MHz 4.52 dB (k=2) 18000MHz-26500MHz 6.19 dB (k=2) 26500MHz-40000MHz 6.03 dB (k=2)
-------------------------	--

Test procedures:

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.10-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

Report No.: 25B02W000010-005

on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height varied from 1m to 4m and the EUT azimuth were varied from 0° to 360° in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Test Settings – Below 1GHz (Quasi-Peak Field Strength Measurements)

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 kHz.
4. Detector = quasi-peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Trace was allowed to stabilize.

Test Settings – Above 1GHz (Peak Field Strength Measurements)

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 1MHz.
3. Set the VBW = 3MHz.
4. Detector = peak
5. Trace mode = max hold
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

Test Settings – Above 1GHz (Average Field Strength Measurements)

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 1MHz.
3. Set the VBW = 3MHz.
4. Detector = power average (RMS).
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span} \backslash \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.


Frequency of emission (MHz)	RBW/VBW	Sweep Time (s)
0.009~30	9KHz/30KHz	Auto
30~1000	100KHz/300KHz	5
1000~4000	1MHz/3MHz	15
4000~18000	1MHz/3MHz	40
18000~26500	1MHz/3MHz	20

Test Setup:


Below 30MHz Test Setup

Chongqing Academy of Information and Communications Technology


Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

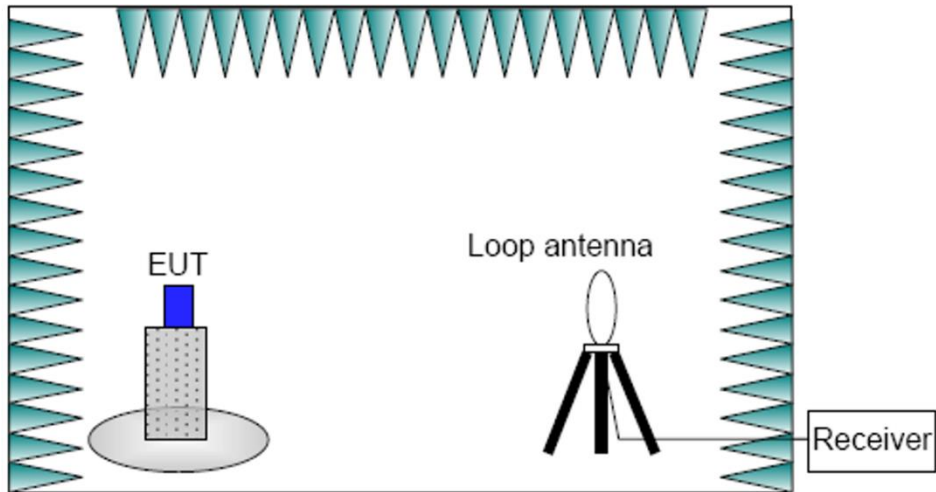

Below 1GHz Test Setup

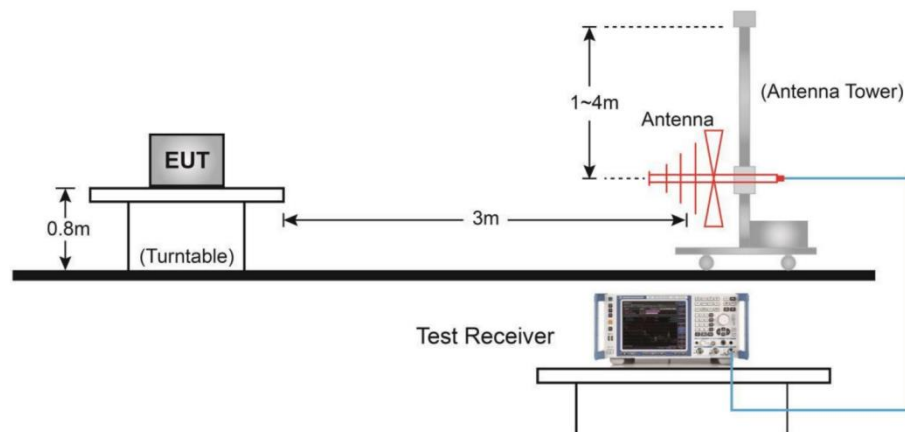

Above 1GHz Test Setup

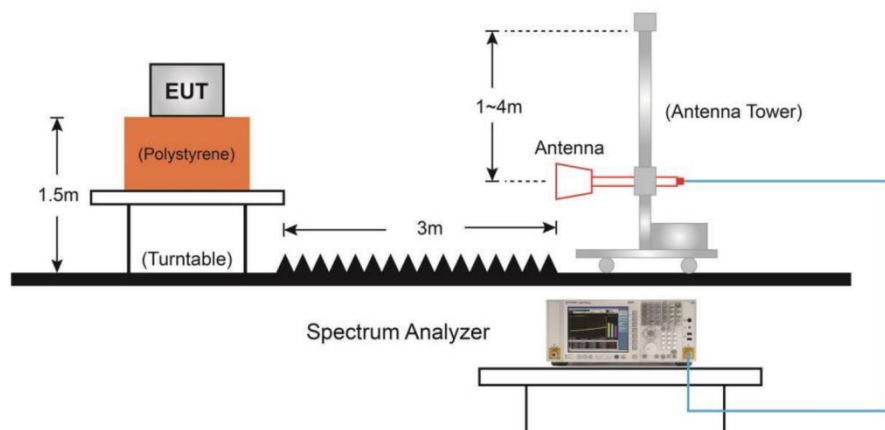

Measurement Results:

A “reference path loss” is established and A_{Rpi} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.


The measurement results are obtained as described below:

$$A_{Rpi} = \text{Cable loss} + \text{Antenna Factor} - \text{Preamplifier gain}$$

$$\text{Result} = P_{\text{Mea}} + A_{Rpi}$$

Note:


1. The out-of- limit signal in the picture is the main frequency signal.
2. Only data in worst mode is provided.
3. Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the Emissions in the frequency band 18GHz-26.5GHz is more than 20dB below the limit are not report.
4. The test data below 30MHz is more than 20dB lower than the limit value, so it is not provided in the report.
5. Horizontal and vertical polarity is all have been tested, the result of them is synthesized in the above data diagram.

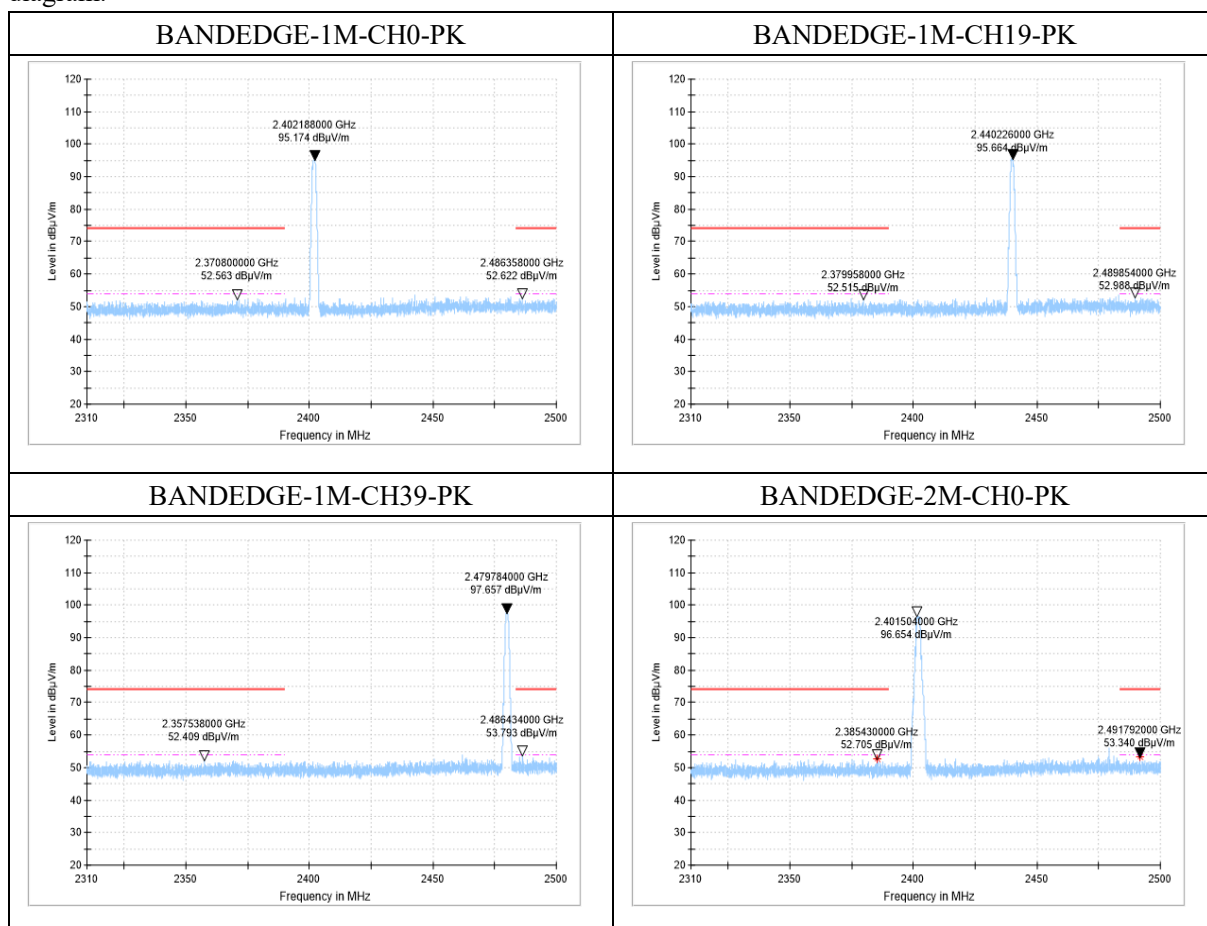

Chongqing Academy of Information and Communications Technology


Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965

FAX:0086-23-88608777

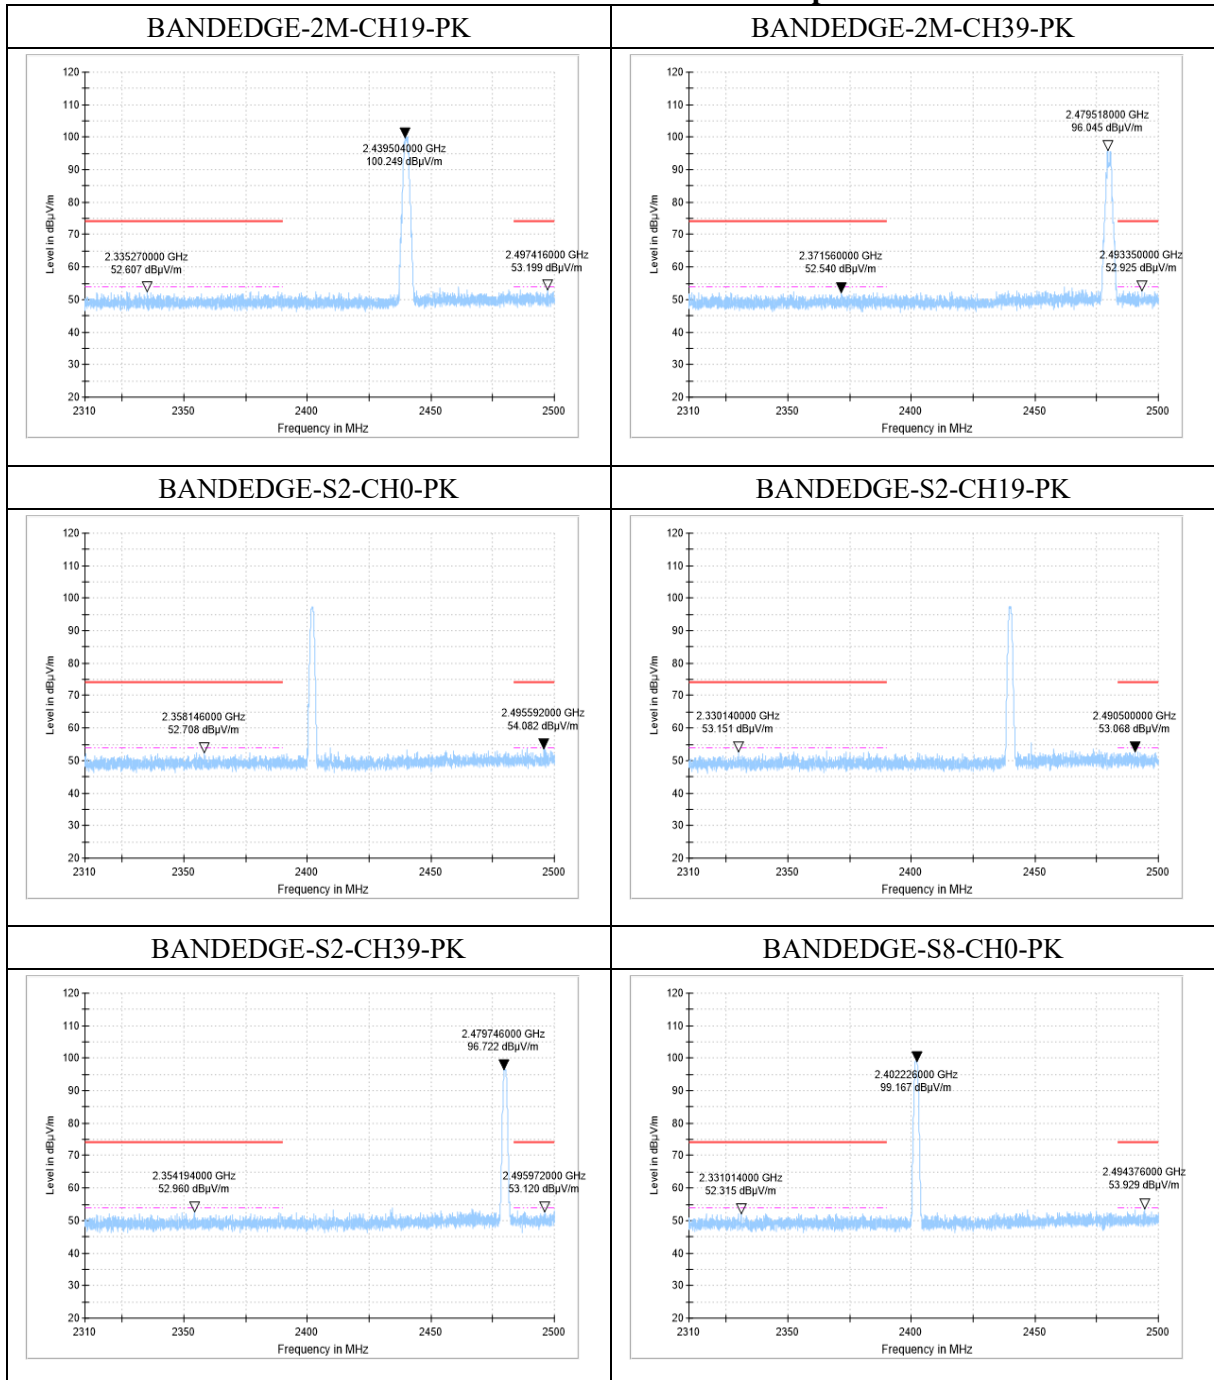

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
 Tel: 0086-23-88069965 FAX:0086-23-88608777

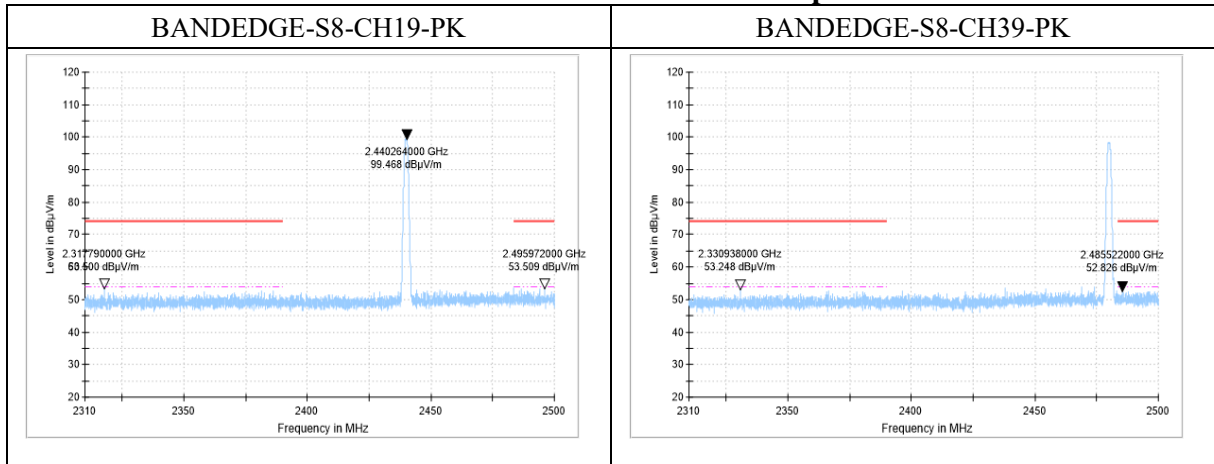
RSE-1M-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	28.07	-12	40.07	11.93	40.00	V
769.1	23.91	0	23.91	22.09	46.00	V

RSE-1M-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2675.7	54.99	18	36.99	19.01	74.00	H
2935.7	54.73	18	36.73	19.27	74.00	V

RSE-1M-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2675.7	42.2	18	24.2	11.80	54.00	H
2935.7	42.38	18	24.38	11.62	54.00	V

RSE-1M-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3427.0	38.69	-7	45.69	35.31	74.00	V
16467.6	47.33	10	37.33	26.67	74.00	H

RSE-1M-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3427.0	25.96	-7	32.96	28.04	54.00	V

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

16467.6	34.5	10	24.5	19.50	54.00	H
---------	------	----	------	-------	-------	---

RSE-1M-CH19-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	27.85	-12	39.85	12.15	40.00	V
762.6	24.54	0	24.54	21.46	46.00	V

RSE-1M-CH19-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2601.6	53.35	17	36.35	20.65	74.00	V
2857.4	54.38	18	36.38	19.62	74.00	V

RSE-1M-CH19-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2601.6	40.89	17	23.89	13.11	54.00	V
2857.4	42.2	18	24.2	11.80	54.00	V

RSE-1M-CH19-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4507.5	41.23	-4	45.23	32.77	74.00	H
11649.4	44.77	3	41.77	29.23	74.00	H

RSE-1M-CH19-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4507.5	28.31	-4	32.31	25.69	54.00	H
11649.4	32.5	3	29.5	21.50	54.00	H

SE-1M-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	28.02	-12	40.02	11.98	40.00	V
775.9	25.49	0	25.49	20.51	46.00	V

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

RSE-1M-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2636.8	54.82	17	37.82	19.18	74.00	H
2847.2	54.62	18	36.62	19.38	74.00	H

RSE-1M-CH39-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2636.8	41.63	17	24.63	12.37	54.00	H
2847.2	42.27	18	24.27	11.73	54.00	H

RSE-1M-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4618.6	40.06	-4	44.06	33.94	74.00	V
11581.4	45.75	3	42.75	28.25	74.00	V

RSE-1M-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4618.6	27.58	-4	31.58	26.43	54.00	V
11581.4	32.84	3	29.84	21.16	54.00	V

RSE-2M-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	26.31	-12	38.31	13.69	40.00	V
774.5	22.72	0	22.72	23.28	46.00	V

RSE-2M-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2640.1	55.36	17	38.36	18.64	74.00	V
2838.3	54.98	18	36.98	19.02	74.00	V

RSE-2M-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2640.1	41.77	17	24.77	12.23	54.00	V

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

2838.3	42.05	18	24.05	11.95	54.00	V
--------	-------	----	-------	-------	-------	---

RSE-2M-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3497.4	37.89	-7	44.89	36.11	74.00	H
6426.6	41.65	-2	43.65	32.35	74.00	V
16692.6	47.76	10	37.76	26.24	74.00	V

RSE-2M-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3497.4	25.76	-7	32.76	28.24	54.00	H
6426.6	29.33	-2	31.33	24.67	54.00	V
16692.6	34.83	10	24.83	19.17	54.00	V

RSE-2M-CH19-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	27.47	-12	39.47	12.53	40.00	V
796.2	22.9	0	22.9	23.10	46.00	V

RSE-2M-CH19-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2552.2	54.56	16	38.56	19.44	74.00	V
2871.3	54.84	18	36.84	19.16	74.00	V

RSE-2M-CH19-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2552.2	40.97	16	24.97	13.03	54.00	V
2871.3	41.88	18	23.88	12.12	54.00	V

RSE-2M-CH19-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4438.1	40.48	-4	44.48	33.52	74.00	V
7959.9	42.13	-1	43.13	31.87	74.00	H

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

11532.6	45.58	3	42.58	28.42	74.00	H
---------	-------	---	-------	-------	-------	---

RSE-2M-CH19-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4438.1	27.89	-4	31.89	26.11	54.00	V
7959.9	29.9	-1	30.9	24.10	54.00	H
11532.6	33.08	3	30.08	20.92	54.00	H

RSE-2M-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	26.81	-12	38.81	13.19	40.00	V
775.6	22.61	0	22.61	23.39	46.00	V

RSE-2M-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2648.0	54.07	17	37.07	19.93	74.00	H
2842.4	54.79	18	36.79	19.21	74.00	H

RSE-2M-CH39-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2648.0	41.6	17	24.6	12.40	54.00	H
2842.4	42.13	18	24.13	11.87	54.00	H

RSE-2M-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
5439.9	41.9	-3	44.9	32.10	74.00	V
10227.1	43.45	1	42.45	30.55	74.00	H
16736.2	47.82	11	36.82	26.18	74.00	H

RSE-2M-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
5439.9	29.42	-3	32.42	24.58	54.00	V
10227.1	30.68	1	29.68	23.32	54.00	H

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

16736.2	34.91	11	23.91	19.09	54.00	H
---------	-------	----	-------	-------	-------	---

RSE-S2-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	27.14	-12	39.14	12.86	40.00	V
772.2	22.85	0	22.85	23.15	46.00	V

RSE-S2-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2685.1	55.97	18	37.97	18.03	74.00	V
2944.3	55.41	18	37.41	18.59	74.00	V

RSE-S2-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2685.1	42.09	18	24.09	11.91	54.00	V
2944.3	42.75	18	24.75	11.25	54.00	V

RSE-S2-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4390.4	41.2	-4	45.2	32.80	74.00	H
16798.1	47.36	11	36.36	26.64	74.00	H

RSE-S2-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4390.4	28.19	-4	32.19	25.81	54.00	H
16798.1	35.06	11	24.06	18.94	54.00	H

RSE-S2-CH19-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	26.27	-12	38.27	13.73	40.00	V
775.9	24.14	0	24.14	21.86	46.00	V

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

RSE-S2-CH19-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2678.5	55.55	18	37.55	18.45	74.00	V
2901.2	55.52	18	37.52	18.48	74.00	V

RSE-S2-CH19-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2678.5	42.29	18	24.29	11.71	54.00	V
2901.2	42.3	18	24.3	11.70	54.00	V

RSE-S2-CH19-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3507.2	39.12	-7	46.12	34.88	74.00	H
10372.0	44.09	2	42.09	29.91	74.00	H

RSE-S2-CH19-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3507.2	26.26	-7	33.26	27.74	54.00	H
10372.0	31.65	2	29.65	22.35	54.00	H

RSE-S2-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	27.37	-12	39.37	12.63	40.00	V
601.7	20.68	-2	22.68	25.32	46.00	H

RSE-S2-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2679.1	54.65	18	36.65	19.35	74.00	H
2891.2	54.36	18	36.36	19.64	74.00	V

RSE-S2-CH39-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2679.1	42.29	18	24.29	11.71	54.00	H

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

2891.2	41.91	18	23.91	12.09	54.00	V
--------	-------	----	-------	-------	-------	---

RSE-S2-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
5831.2	40.73	-4	44.73	33.27	74.00	H
11589.9	45.38	3	42.38	28.62	74.00	H

RSE-S2-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
5831.2	27.71	-4	31.71	26.29	54.00	H
11589.9	32.87	3	29.87	21.13	54.00	H

RSE-S8-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	27.49	-12	39.49	12.51	40.00	V
768.5	24.64	0	24.64	21.36	46.00	V

RSE-S8-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2569.9	53.69	16	37.69	20.31	74.00	H
2824.7	55.19	18	37.19	18.81	74.00	H

RSE-S8-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2569.9	40.99	16	24.99	13.01	54.00	H
2824.7	41.84	18	23.84	12.16	54.00	H

RSE-S8-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3418.6	38.82	-7	45.82	35.18	74.00	H
11729.5	44.69	3	41.69	29.31	74.00	H

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

RSE-S8-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3418.6	26	-7	33	28.00	54.00	H
11729.5	31.81	3	28.81	22.19	54.00	H

RSE-S8-CH19-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	27.13	-12	39.13	12.87	40.00	V
768.8	23.16	0	23.16	22.84	46.00	V

RSE-S8-CH19-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2568.5	54.04	16	38.04	19.96	74.00	V
2835.8	54.72	18	36.72	19.28	74.00	V

RSE-S8-CH19-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2568.5	40.92	16	24.92	13.08	54.00	V
2835.8	42.12	18	24.12	11.88	54.00	V

RSE-S8-CH19-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6223.1	41.66	-2	43.66	32.34	74.00	H
11627.8	46.13	3	43.13	27.87	74.00	H

RSE-S8-CH19-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6223.1	29.09	-2	31.09	24.91	54.00	H
11627.8	32.5	3	29.5	21.50	54.00	H

RSE-S8-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	27.2	-12	39.2	12.80	40.00	V

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

769.0	28.79	0	28.79	17.21	46.00	V
-------	-------	---	-------	-------	-------	---

RSE-S8-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2671.7	54.57	17	37.57	19.43	74.00	H
2907.7	54.91	18	36.91	19.09	74.00	V

RSE-S8-CH39-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2671.7	42.01	17	25.01	11.99	54.00	H
2907.7	42.37	18	24.37	11.63	54.00	V

RSE-S8-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3414.9	39.13	-7	46.13	34.87	74.00	H
11643.2	45.37	3	42.37	28.63	74.00	H

RSE-S8-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3414.9	26.06	-7	33.06	27.94	54.00	H
11643.2	32.59	3	29.59	21.41	54.00	H

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.4. AC Powerline Conducted Emission

Specifications:	FCC 47 Part 15.207, RSS-GEN 8.8
DUT Serial Number:	IMEI:862072070057688;862072070057696
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60%RH Air pressure: 86-106kPa
Test Results:	Pass

Method of Measurement: ANSI C63.10-2013-clause 6.2

1.The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.

2.If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.

3.The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.

4.If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.


Measurement Uncertainty:

Measurement Uncertainty	1.97dB (k=2)
-------------------------	--------------

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

Test Setup

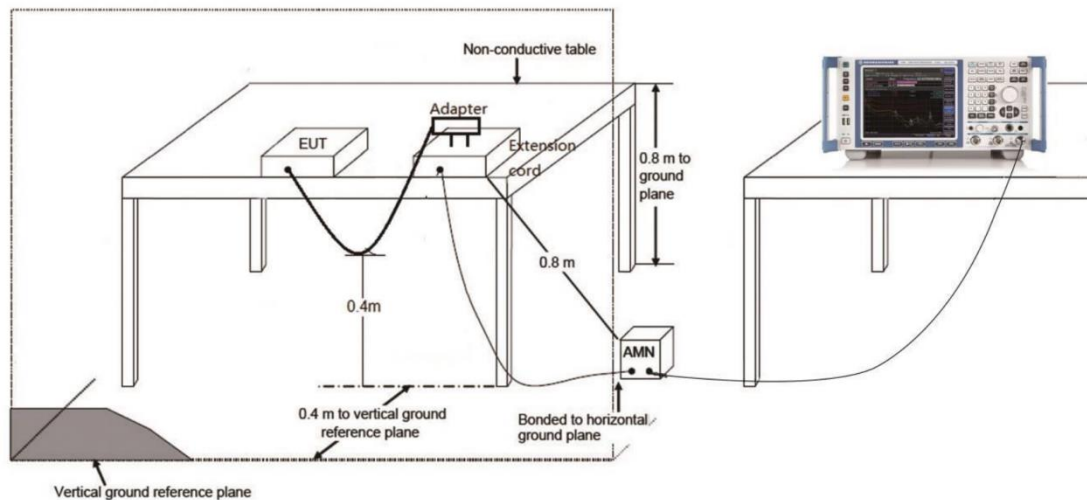

Test Condition

Voltage (V)	Frequency (Hz)
120	60

Measurement Results and limit:


(Quasi-peak-average Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Average Limit (dBμV)	Conclusion
0.15 to 0.5	66 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

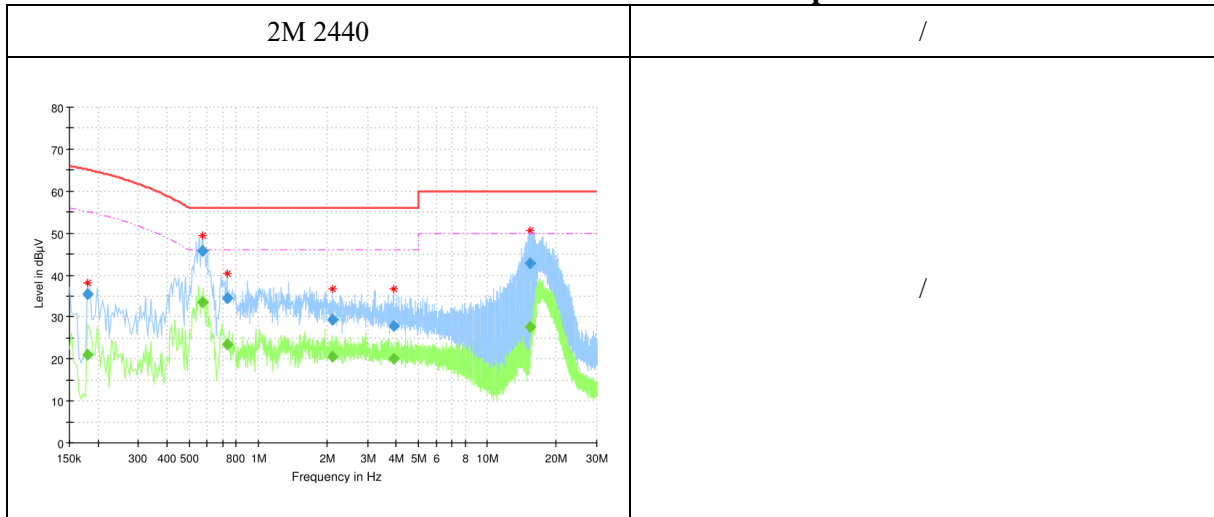

Frequency (MHz)	QuasiPeak (dBμV)	Average (dμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.179850	35.59	---	65.15	29.56	15000.0	9.000	N	ON	10.1
0.179850	---	20.98	55.15	34.17	15000.0	9.000	N	ON	10.1
0.571631	45.71	---	56.00	10.29	15000.0	9.000	L1	ON	10.0
0.571631	---	33.54	46.00	12.46	15000.0	9.000	L1	ON	10.0
0.732075	---	23.39	46.00	22.61	15000.0	9.000	N	ON	10.1
0.732075	34.62	---	56.00	21.38	15000.0	9.000	N	ON	10.1
2.105175	---	20.54	46.00	25.46	15000.0	9.000	N	ON	9.9
2.105175	29.35	---	56.00	26.65	15000.0	9.000	N	ON	9.9
3.884981	---	20.18	46.00	25.82	15000.0	9.000	N	ON	9.7
3.884981	27.91	---	56.00	28.09	15000.0	9.000	N	ON	9.7
15.347381	---	27.71	50.00	22.29	15000.0	9.000	N	ON	9.8
15.347381	42.86	---	60.00	17.14	15000.0	9.000	N	ON	9.8

Note:

1. All modes have been tested and only the worst mode is recorded in the report.
2. L1 and N is all have been tested, the result of them is synthesized in the above data diagram.

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777



Report No.: 25B02W000010-005

ANNEX A EUT Photos

See the document "25B02W000010-External Photos".

See the document "25B02W000010-Internal Photos".

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777



Report No.: 25B02W000010-005

ANNEX B Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

*****END OF REPORT*****

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777