

FCC/ISED RF TEST REPORT



Test Report Number.....	GLS-19062721-LC-FCC-IC
Applicant.....	Mobilogix, Inc.
Applicant Address.....	5500 Trabuco Road, Suite 150, Irvine, CA 92620
Product Name.....	ATD300B
Product Brand.....	Mobilogix
Model Number.....	ATD300B
Family Product/Model.....	N/A
FCC ID.....	2AH4HATD300B
ISED ID.....	21385-ATD300B
Date of EUT received.....	07/01/2019
Date of Test.....	07/01/2019 – 07/12/2019
Report Issue Date.....	07/19/2019
Test Standards.....	47CFR Part 15 Subpart B ICES-003 Issue 6: April 2019 47CFR Part 22 47CFR Part 24 47CFR Part 27 RSS-132 Issue 3: Jan 2013 RSS-133 Issue 6: Jan 2018 RSS-139 Issue 3: Jul 2015 RSS-199 Issue 3: Dec 2016
Test Result.....	Pass

Issued By:

Vista Laboratories

1261 Puerta Del Sol, San Clemente, CA 92673 USA

www.vista-compliance.com

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This report is not to be reproduced by any means except in full and in any case not without the written approval of Vista Laboratories.

Tested by:

Bruce Li/Test Engineer

Approved By:

David Zhang/Engineering Reviewer

Laboratory Introduction

Vista Labs is an A2LA accredited 17025 compliant regulatory compliance testing laboratories (Cert. number: 4848-01) strategically located in Orange County, providing services in the electrical and telecommunication industries. Vista labs is also recognized testing facility for Australia (ACMA), Chinese Taipei (BSMI), Chinese Taipei (NCC), Hong Kong (OFCA), Israel (MOC), Korea (RRA), Singapore (IMDA), Vietnam (MIC), etc.

Our comprehensive testing services include safety testing, EMC emission and susceptibility testing, RF and wireless testing (including DFS).

As your partner, Vista investigates appropriate test standards, develops test plans, performs troubleshooting & failure analysis, reviews documentation, and provides test reports for a complete compliance testing and certification package.



17025 Product Testing Accreditation Certificate



17065 Product Certification Accreditation Certificate

TABLE OF CONTENTS

1 GENERAL INFORMATION	5
1.1 Applicant	5
1.2 Product information	5
1.3 Test standard and method	6
1.4 Test Purpose and statement	6
2 TEST SITE INFORMATION	7
3 MODIFICATION OF EUT	7
4 TEST CONFIGURATION AND OPERATION	7
4.1 EUT test configuration	7
4.2 Supporting Equipment	7
4.3 EUT setup diagram	8
4.4 EUT operation	8
4.5 Test software	8
5 TEST SUMMARY	9
6 UNCERTAINTY OF MEASUREMENT	10
7 TEST SUMMARY AND RESULT	11
7.1 Radiated Emission (unintentional)	11
7.2 Radiated Spurious Emissions into Restricted Frequency Bands	15
7.3 Field Strength of Spurious Radiation	31
8 TEST INSTRUMENT LIST	49

Report Number: GLS-19062721-LC-FCC-IC
Product: ATD300B
Model Number: ATD300B



Page 4 of 49

REVISION HISTORY

Revision	Issue Date	Description	Note
Original	07/19/2019	Original release	N/A

1 General Information

1.1 Applicant

Applicant:	Mobilogix, Inc.
Applicant address:	5500 Trabuco Road, Suite 150, Irvine, CA 92620
Manufacturer:	Mobilogix, Inc.
Manufacturer Address:	5500 Trabuco Road, Suite 150, Irvine, CA 92620

1.2 Product information

Product Name	ATD300B
Model Number	ATD300B
Family Model Number	N/A
Serial Number	N/A
Frequency Band	BLE: 2402-2480MHz GSM850: 824.2 – 848.8 MHz GSM1900: 1850.2 – 1909.8 MHz WCDMA Band II: 1852.4 – 1907.6 MHz WCDMA Band V: 826.4 – 846.6 MHz LTE Cat-1 Band 2: 1850.7-1909.3MHz LTE Cat-1 Band 4: 1710.7-1754.3MHz LTE Cat-1 Band 5: 824.7-848.3MHz LTE Cat-1 Band 7: 2502.5 – 2567.5MHz
Type of modulation	GFSK (BLE), GMSK/8PSK (GSM), QPSK (WCDMA), QPSK/16QAM (LTE Cat-1)
Equipment Class/ Category	DTS (BLE), PCB (GSM/WCDMA/LTE Cat-1)
Maximum output power	BLE: 3.35 dBm GSM850: 32.91 dBm GSM1900: 23.71 dBm WCDMA Band II: 23.78 dBm WCDMA Band V: 23.78 dBm LTE Cat-1 Band 2: 23.72 dBm LTE Cat-1 Band 4: 24.00 dBm LTE Cat-1 Band 5: 23.85 dBm LTE Cat-1 Band 7: 24.04 dBm
Antenna Information	BLE: Internal PCB antenna, -2.5 dBi Gain. WCDMA/LTE: PCB antenna, 0.77 dBi for 824-894 MHz; 3.05 dBi for 1710-1880 MHz; 2.92 dBi for 1850-1990MHz; 3.72 dBi for 2500-2690MHz
Clock Frequencies	N/A
Port/Connectors	N/A
Input Power	3.7VDC (battery powered)
Power Adapter Manu/Model	N/A
Power Adapter SN	N/A
Hardware version	1.0
Software version	1.0
Simultaneous Transmission	BLE and GSM/WCDMA/LTE can transmit simultaneously
Additional Info	N/A

1.3 Test standard and method

Test standard	47CFR Part 15 Subpart B ICES-003 Issue 6: April 2019 47CFR Part 22 47CFR Part 24 47CFR Part 27 RSS-132 Issue 3: Jan 2013 RSS-133 Issue 6: Jan 2018 RSS-139 Issue 3: Jul 2015 RSS-199 Issue3: Dec 2016 SRSP-510 Issue 5: Feb 2009 RSS-Gen Issue 5: Mar 2019
Test method	ANSI C63.26: 2015 KDB 971168 D01 Power Meas License Digital Systems v03r01 KDB 412172 D01 Determining ERP and EIRP v01r01

1.4 Test Purpose and statement

The purpose of this test report is intended to demonstrate the compliance of product listed in section 1.2, received from company listed in section 1.1, to the requirements of standard and method listed in section 1.3. Based on our test results, we conclude that the product tested complies with the requirements of the standards indicated.

2 Test site information

Lab performing tests	Vista Laboratories		
Lab Address	1261 Puerta Del Sol, San Clemente, CA 92673 USA		
Phone Number	+1 (949) 393-1123		
Website	www.Vista-compliance.com		

Test condition	Test Engineer	Test Environment	Test Date
Radiated	Bruce Li	21.5°C / 58.2%/996 mbar	07/01/2019 – 07/12/2019

3 Modification of EUT

N/A

4 Test configuration and operation


4.1 EUT test configuration

The cellular radio of EUT is connected to and controlled by CMW500, the base station emulator, communicate continuously in different modulation, test channel and data rate. The radio of BLE is set to transmit continuously by using mobile application.

4.2 Supporting Equipment

Index	Description	Model	S/N	Brand	Remark
-	-	-	-	-	-

4.3 EUT setup diagram

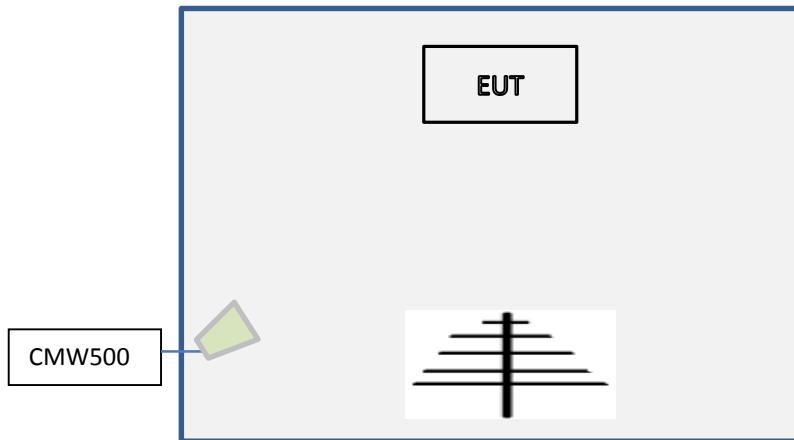

4.4 EUT operation

The radio can be set to transmit continuously in different modulation, test channel and data rate.

4.5 Test software

Index	Description	Remark
1	EMISoft Vasona 6.0049	EMC/Spurious emission test software used during testing
2	Nordic nRF Toolbox	Enable BLE continuous transmission

5 Test Summary

FCC Rules	ISED Rules	Test Item	Section	Verdict
15.109	ICES-003	Radiated Emission (unintentional)	8.1	Pass
15.247, 15.209	RSS-247, RSS-Gen	Radiated Spurious Emissions into Restricted Frequency Bands (intentional)	8.2	Pass
2.1046 22.917 (a), 24.238 (a), 27.53 (f), (g), (h), (m) (c)(2) and (5)	RSS-130(4.7.1) and (4.7.2) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.6) RSS-199 (4.5) SRSP-510(5.1.2)	Field Strength of Spurious Radiation (licensed band)	8.3	Pass

Report Number: GLS-19062721-LC-FCC-IC
Product: ATD300B
Model Number: ATD300B



Page 10 of 49

6 Uncertainty of Measurement

Test item	Measurement Uncertainty (dB)
Radiated Emission (9KHz-30MHz)	±3.5 dB
Radiated Emission (30MHz-1GHz)	±4.6 dB
Radiated Emission (1-18GHz)	±4.9 dB
Radiated Emission (18-40GHz)	±3.5 dB

7 Test summary and result

7.1 Radiated Emission (unintentional)


7.1.1 Requirement

Per § 15.109 (a), except for Class A digital device, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency range (MHz)	Field Strength (μ V/m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

7.1.2 Test setup

Radiated emissions test setup 30 MHz - 1 GHz

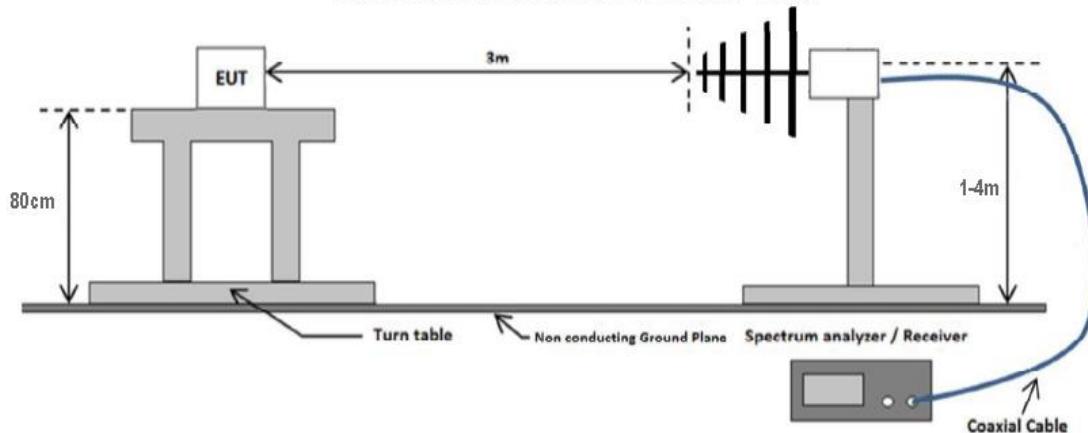

Radiated emissions test setup above 1 GHz

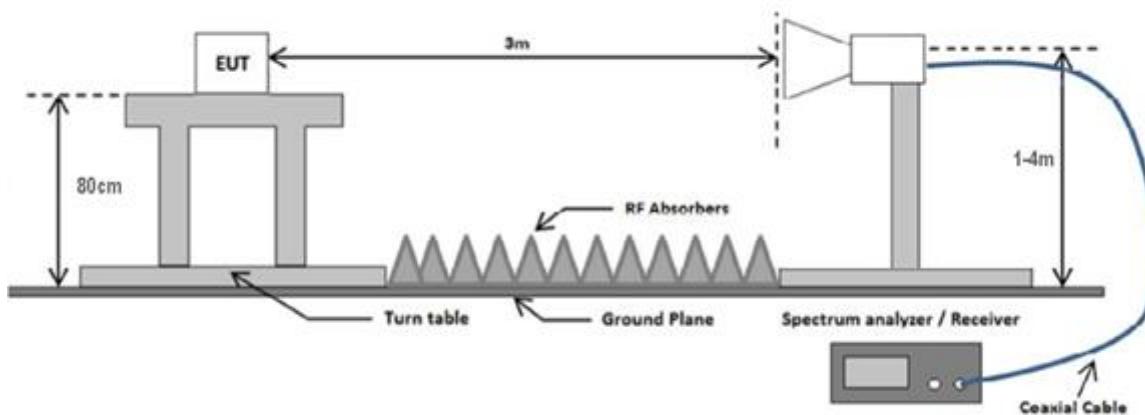

Report Number:	GLS-19062721-LC-FCC-IC
Product:	ATD300B
Model Number:	ATD300B



7.1.3 Test Procedure


The procedure is according to ANSI C63.4: 2014. The following are the steps.

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-Peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.
The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.
5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

7.1.4 Test Result

30-1000MHz test result under FCC Part 15B / ICES-003

Test Standard:	47CFR 15.109	Mode:	N/A
Frequency Range:	30-1000MHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

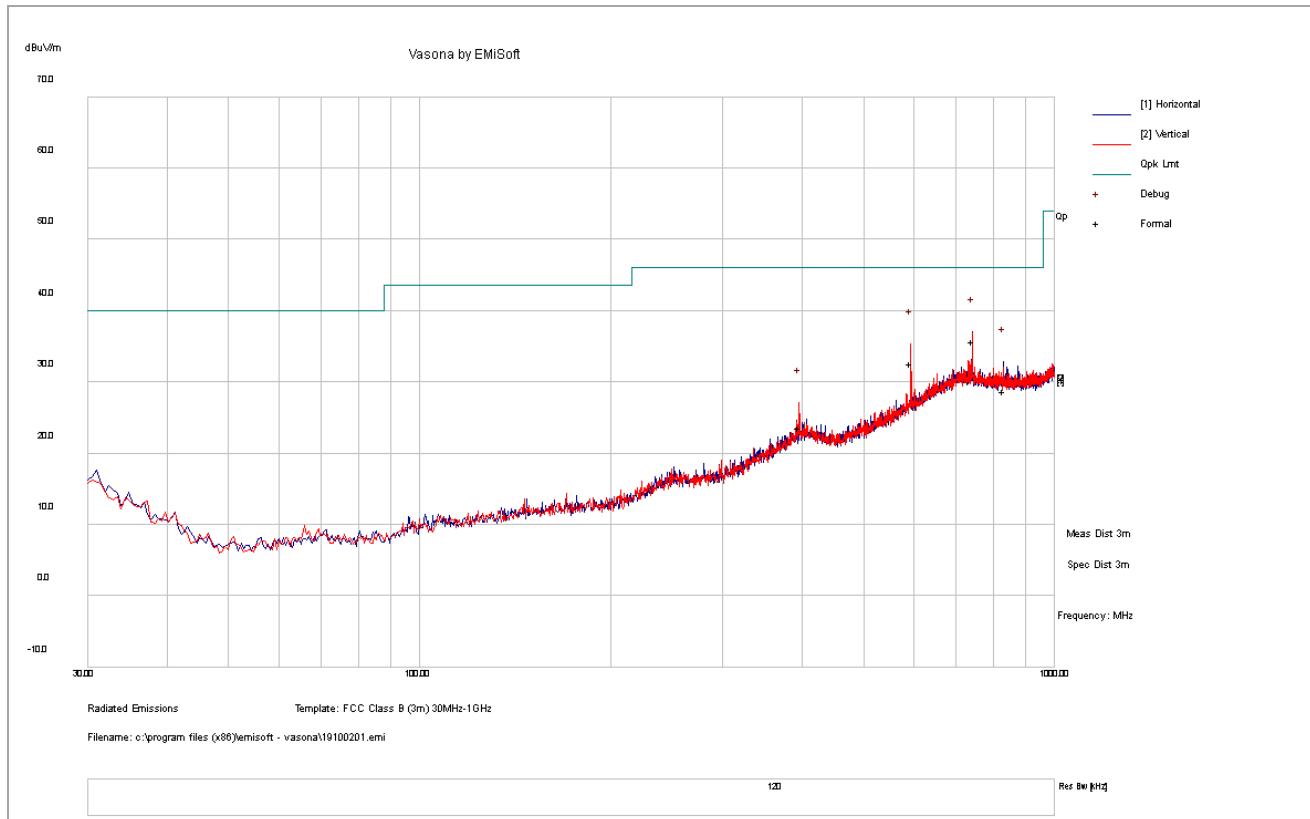

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
395.59	30.98	6.34	-13.65	23.67	QP	V	125	183	46.00	-22.33
593.42	35.65	7.10	-10.08	32.67	QP	V	140	185	46.00	-13.33
741.76	34.99	7.28	-6.58	35.70	QP	H	137	264	46.00	-10.30
830.77	28.37	7.36	-6.91	28.82	QP	H	240	188	46.00	-17.18

Report Number: GLS-19062721-LC-FCC-IC
Product: ATD300B
Model Number: ATD300B




Page 14 of 49

Testing Cert #4848-01

Above 1GHz Test Result under FCC Part 15B / ICES-003

Test Standard:	47CFR 15.109	Mode:	N/A
Frequency Range:	1000-18000MHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

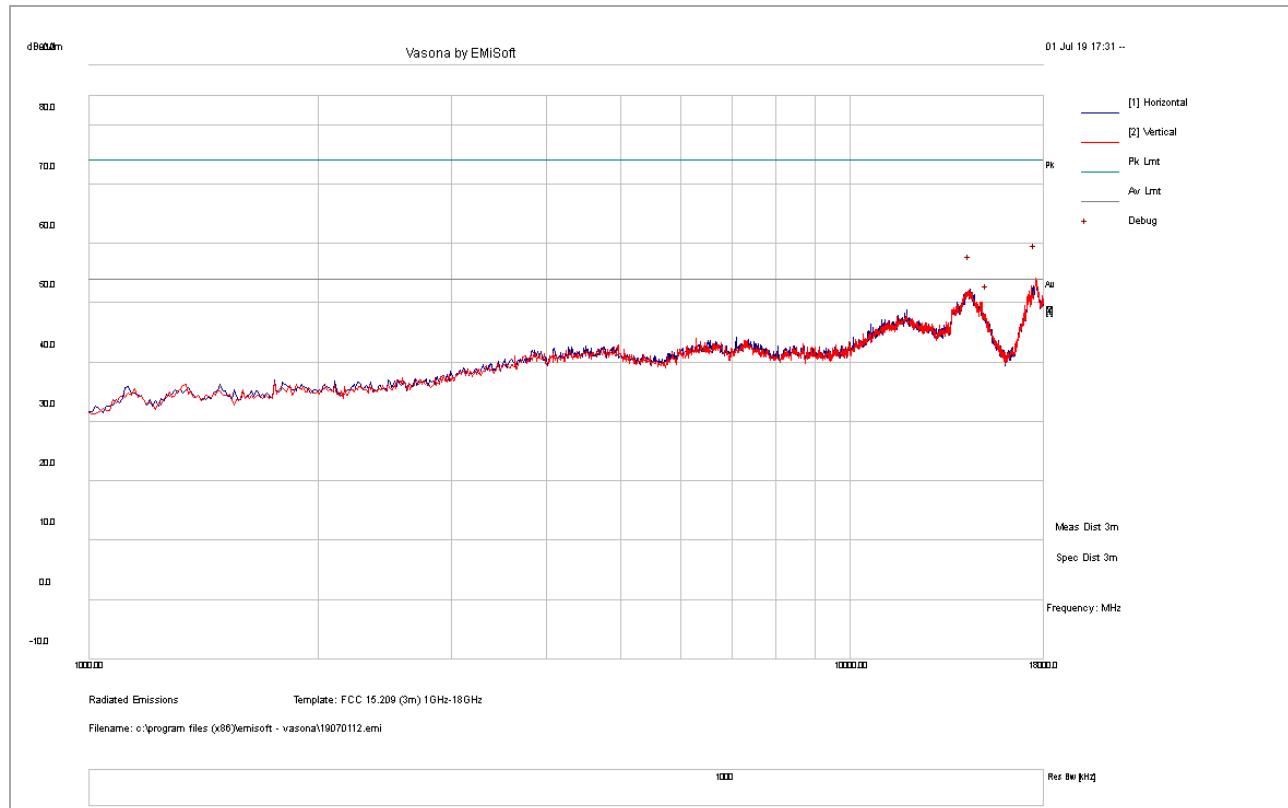

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
17553.75	14.48	25.22	14.45	54.16	PK	H	271	98	74	-19.84
14387.50	15.02	22.70	14.50	52.21	PK	V	162	192	74	-21.79
15141.88	13.54	24.40	9.41	47.35	PK	V	220	98	74	-26.65
17553.75	7.24	25.22	14.45	46.92	AV	H	271	98	54	-7.08
14387.50	7.41	22.7	14.5	44.60	AV	V	162	192	54	-9.40
15141.88	5.56	24.4	9.41	39.37	AV	V	220	98	54	-14.63



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval

1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

7.2 Radiated Spurious Emissions into Restricted Frequency Bands

7.2.1 Requirement


§ 15.247 (d)



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in §15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency range (MHz)	Field Strength (μ V/m)
0.009~0.490	2400/F(KHz)
0.490~1.705	24000/F(KHz)
1.705~30.0	30
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

7.2.2 Test setup

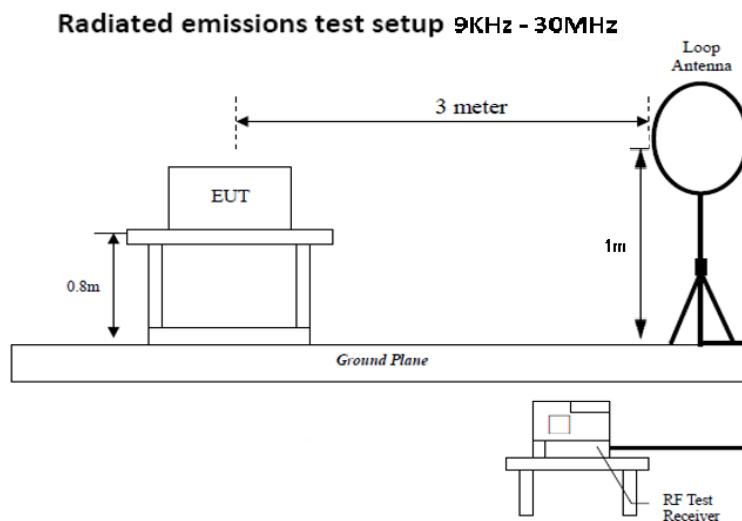

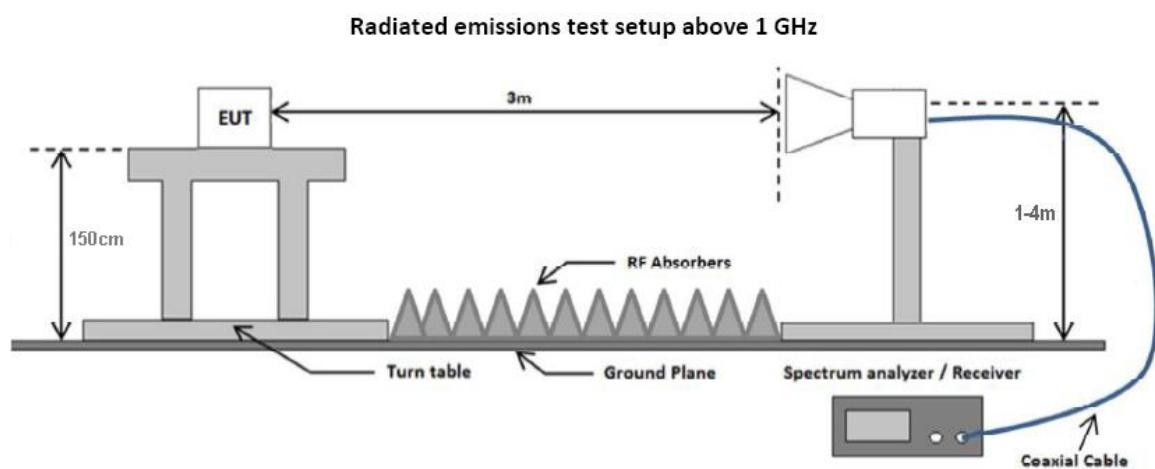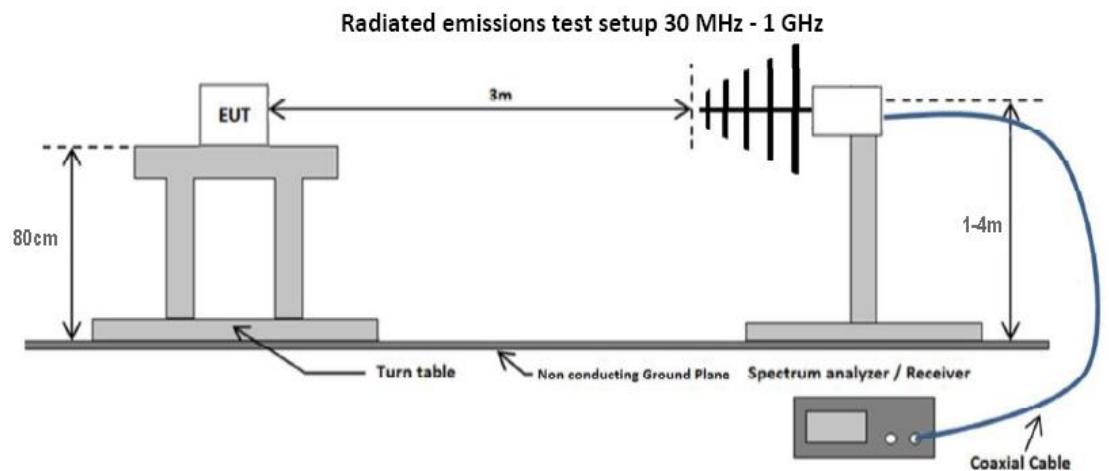

7.2.3 Test Procedure


According to section 8.6 in KDB 558074 D01 DTS Meas Guidance v05r01 and subclause 11.12.2.7 Radiated spurious emission measurements in ANSI C62.10-2013 as well as the procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 was followed. Boresight antenna mast was used during the scanning to point to EUT to maximize the emission. The process will be repeated in 3 EUT orientations.

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 300 Hz for frequency below 150KHz.
4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for frequency between 150KHz – 30MHz.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-Peak detection at frequency between 30MHz - 1GHz.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak and average measurement at frequency above 1GHz.
7. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

7.2.4 Test Result

30-1000MHz test result under FCC Part 15C / RSS-247

Test Standard:	15.209 / RSS-247	Mode:	BLE 2440MHz+GSM 1900
Frequency Range:	30-1000MHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

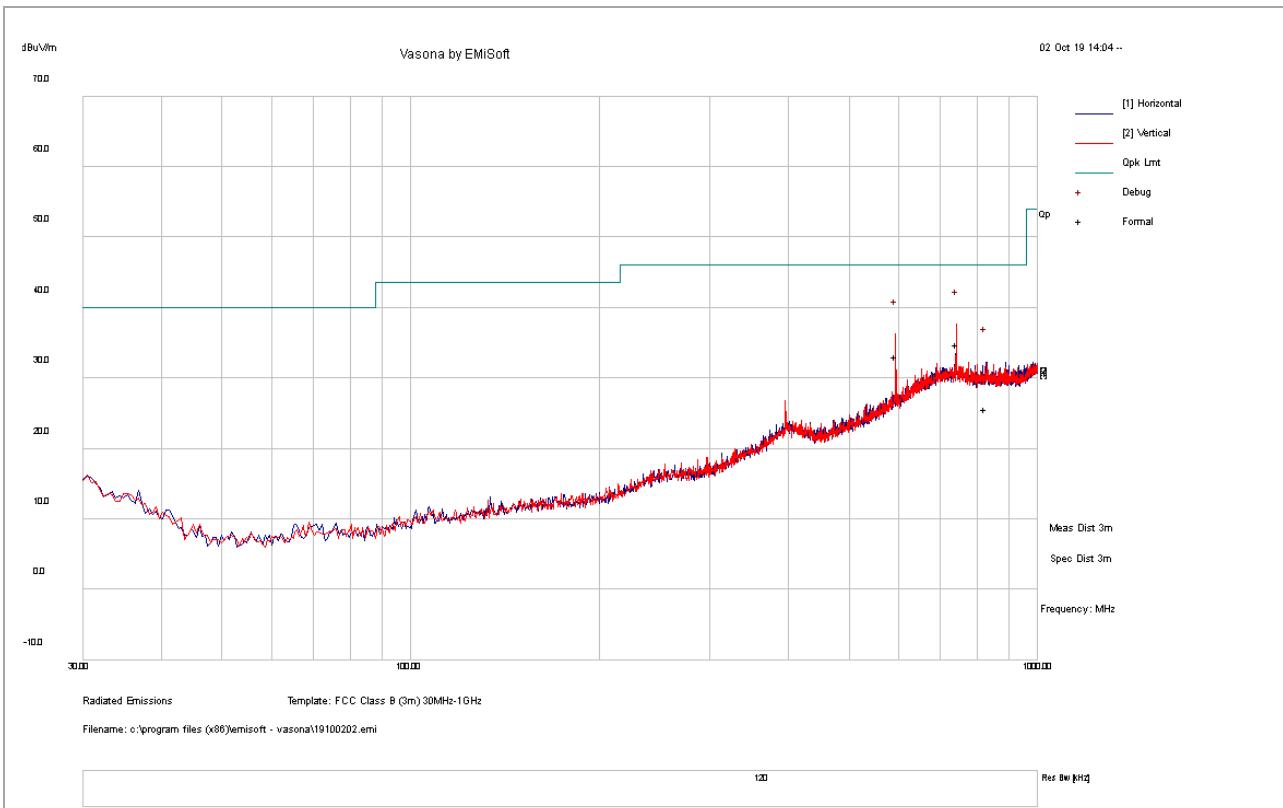


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
741.77	34.09	7.28	-6.58	34.80	QP	V	295	14	46.00	-11.20
593.41	36.10	7.10	-10.08	33.12	QP	V	324	42	46.00	-12.88
826.03	25.12	7.34	-6.89	25.57	QP	H	338	281	46.00	-20.43

Note:

- 1) For below 1GHz, all different channel and modes were verified but only the worst case result is shown here.
- 2) No outstanding result was found for below 30MHz other than ambient noise floor.
- 3) EUT was tested in 3 orientations.

30-1000MHz test result under FCC Part 15C / RSS-247

Test Standard:	15.209 / RSS-247	Mode:	BLE 2440MHz+WCDMA B5
Frequency Range:	30-1000MHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

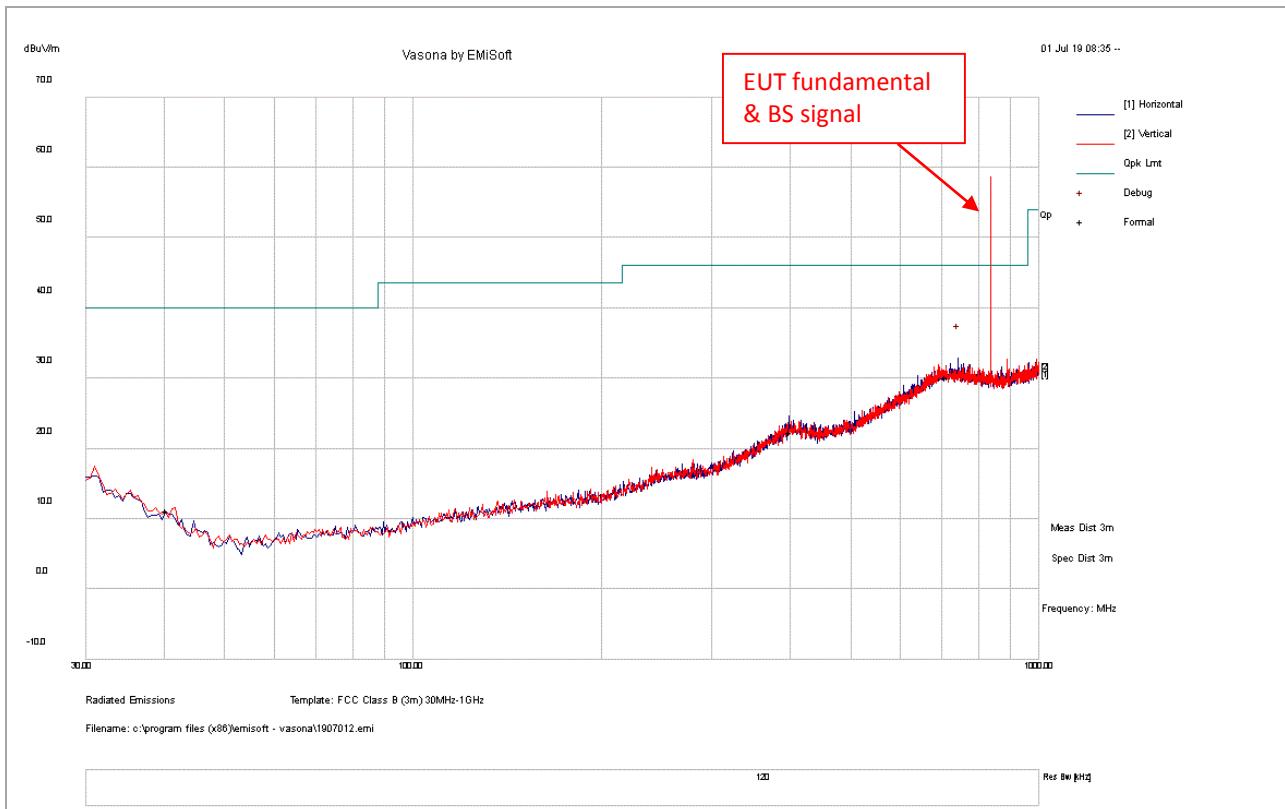


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
806.51	29.97	7.27	-6.80	30.45	QP	H	184	233	46.50	-16.05
741.74	30.46	7.28	-6.58	31.16	QP	H	215	204	46.50	-15.34
400.65	29.38	6.37	-13.44	22.31	QP	V	186	0	46.50	-24.19
168.20	29.37	4.44	-22.23	11.57	QP	H	375	15	43.50	-31.93

Note:

- 1) For below 1GHz, all different channel and modes were verified but only the worst case result is shown here.
- 2) No outstanding result was found for below 30MHz other than ambient noise floor.
- 3) EUT was tested in 3 orientations.

30-1000MHz test result under FCC Part 15C / RSS-247

Test Standard:	15.209 / RSS-247	Mode:	BLE 2440MHz+LTE B4
Frequency Range:	30-1000MHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

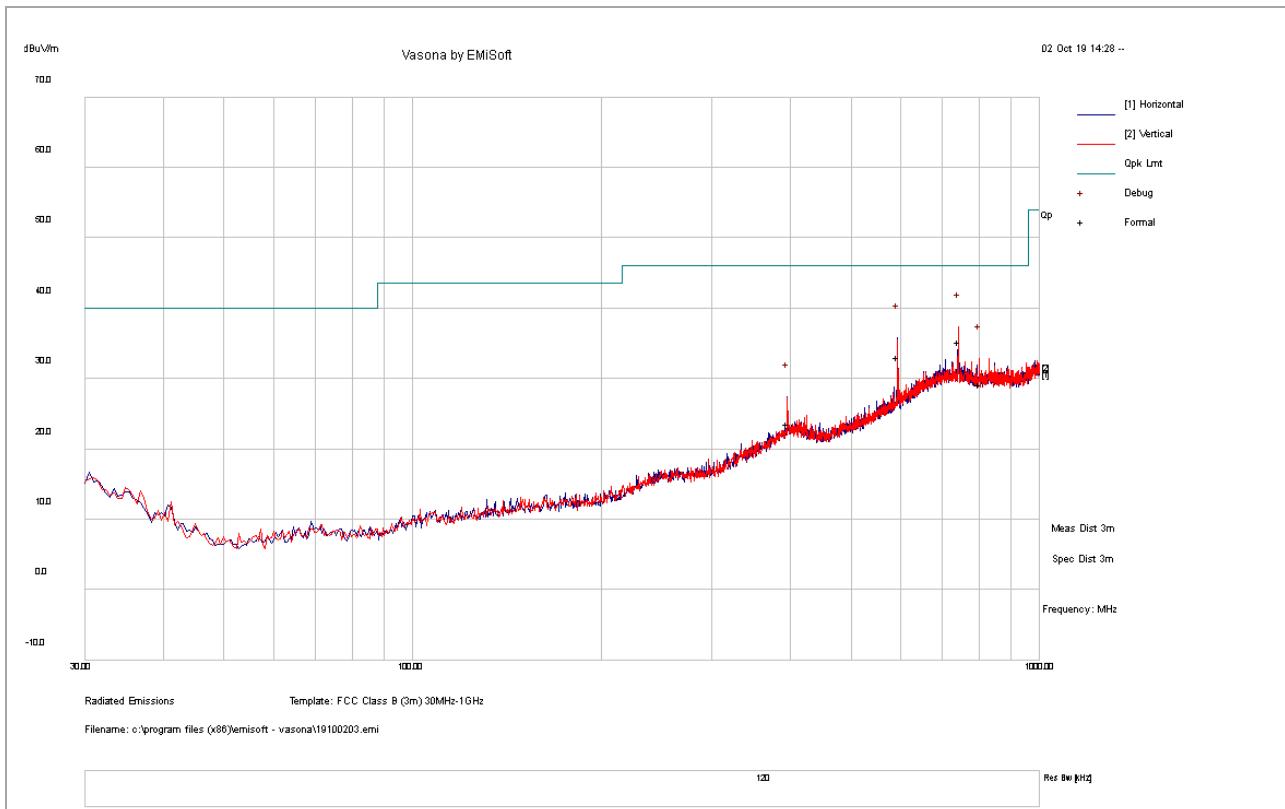


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
741.76	34.54	7.28	-6.58	35.25	QP	V	308	46	46.00	-10.75
593.40	36.14	7.10	-10.08	33.15	QP	H	100	360	46.00	-12.85
801.09	28.69	7.25	-6.77	29.17	QP	V	294	195	46.00	-16.83
395.59	30.98	6.34	-13.65	23.67	QP	H	105	106	46.00	-22.33

Note:

- 1) For below 1GHz, all different channel and modes were verified but only the worst case result is shown here.
- 2) No outstanding result was found for below 30MHz other than ambient noise floor.
- 3) EUT was tested in 3 orientations.

30-1000MHz test result under FCC Part 15C / RSS-247

Test Standard:	15.209 / RSS-247	Mode:	BLE 2440MHz+LTE B7
Frequency Range:	30-1000MHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

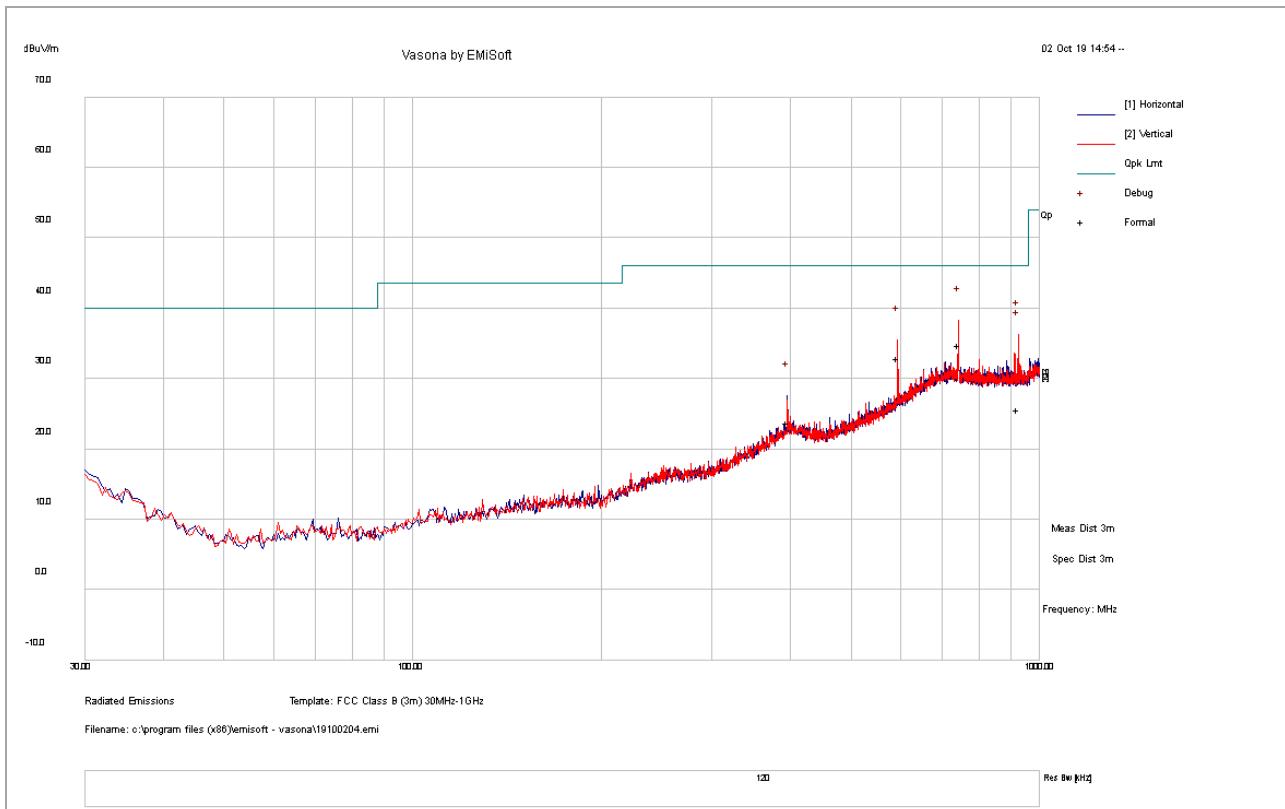


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
741.78	34.05	7.28	-6.58	34.75	QP	V	200	207	46.00	-11.25
923.33	24.93	7.70	-6.98	25.65	QP	V	100	5	46.00	-20.35
593.39	35.87	7.10	-10.08	32.89	QP	V	214	78	46.00	-13.11
924.55	24.87	7.71	-6.96	25.62	QP	V	391	38	46.00	-20.38
395.62	31.12	6.34	-13.65	23.81	QP	H	100	274	46.00	-22.19

Note:

- 1) For below 1GHz, all different channel and modes were verified but only the worst case result is shown here.
- 2) No outstanding result was found for below 30MHz other than ambient noise floor.
- 3) EUT was tested in 3 orientations.

1GHz – 18GHz test result under FCC Part 15C / RSS-247

Test Standard:	15.209 / RSS-247	Mode:	BLE 2440MHz+GSM850
Frequency Range:	1GHz-18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

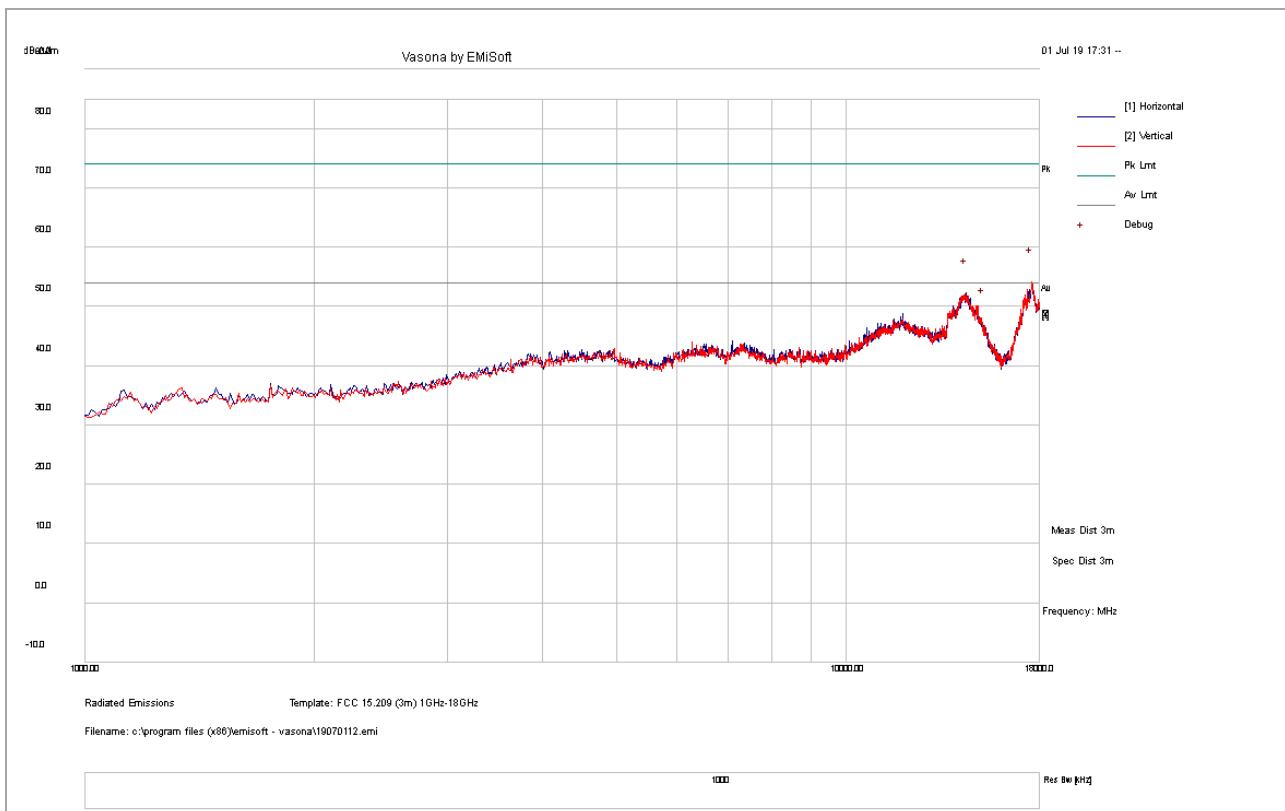


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
17553.75	12.48	25.22	14.45	52.16	PK	V	152	61	54	-1.84
14387.50	15.02	22.70	14.50	52.21	PK	H	198	188	54	-1.79
15141.88	13.54	24.40	9.41	47.35	PK	V	228	190	54	-6.65

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) EUT was tested in 3 orientations.
- 3) If peak result is below average limit of 54 dBuV/m, then final Average measurement is not necessary.

1GHz – 18GHz test result under FCC Part 15C / RSS-247

Test Standard:	15.209 / RSS-247	Mode:	BLE 2440MHz+GSM1900
Frequency Range:	1GHz-18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

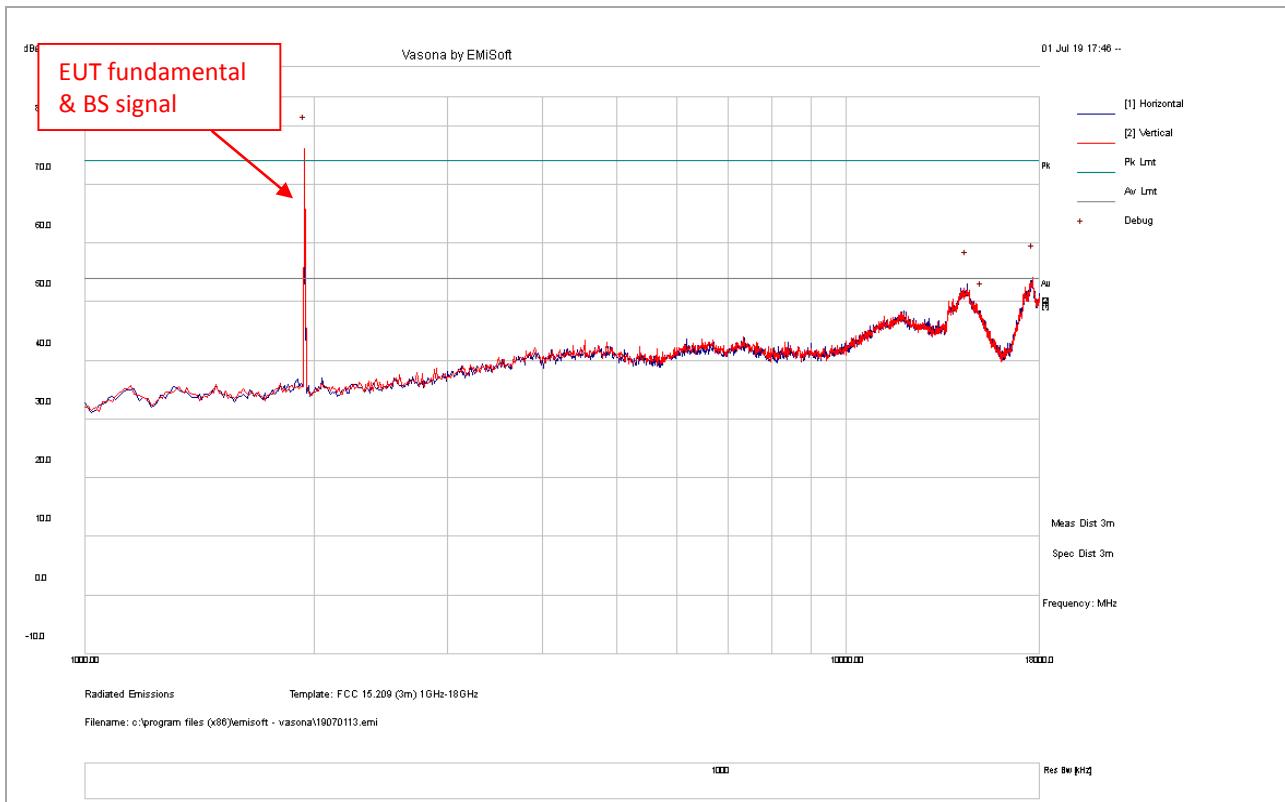


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
17617.50	12.11	25.31	14.69	52.11	PK	V	182	172	54	-1.89
14430.00	15.03	22.82	14.18	52.03	PK	H	118	17	54	-1.97
15099.38	13.52	24.43	9.65	47.60	PK	V	261	98	54	-6.40

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) EUT was tested in 3 orientations.
- 3) If peak result is below average limit of 54 dBuV/m, then final Average measurement is not necessary.

1GHz – 18GHz test result under FCC Part 15C / RSS-247

Test Standard:	15.209 / RSS-247	Mode:	BLE 2440MHz+WCDMA B2
Frequency Range:	1GHz-18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

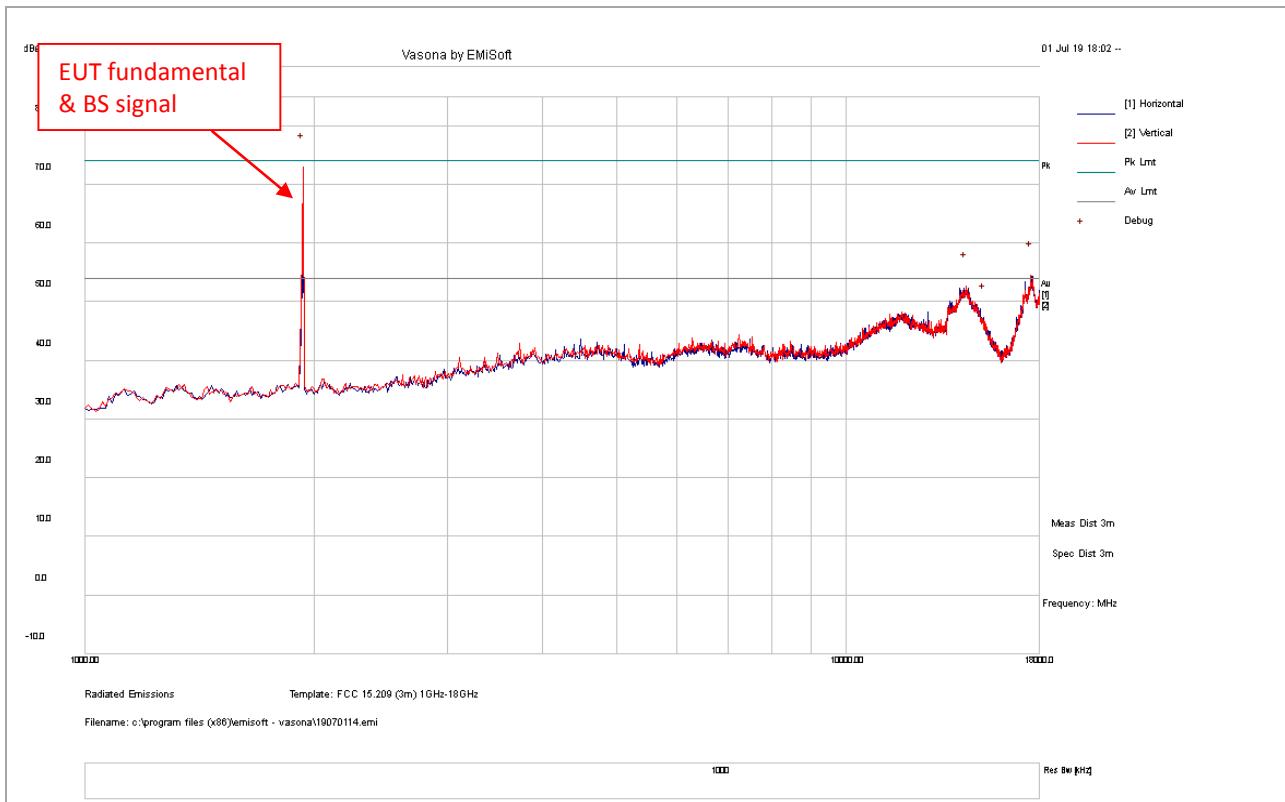


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
17521.88	11.96	25.18	14.32	51.46	PK	V	179	66	54	-2.54
14387.50	14.37	22.70	14.50	51.56	PK	V	281	82	54	-2.44
15195.00	13.78	24.36	9.12	47.26	PK	H	115	255	54	-6.74

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) EUT was tested in 3 orientations.
- 3) If peak result is below average limit of 54 dBuV/m, then final Average measurement is not necessary.

1GHz – 18GHz test result under FCC Part 15C / RSS-247

Test Standard:	15.209 / RSS-247	Mode:	BLE 2440MHz+WCDMA B5
Frequency Range:	1GHz-18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

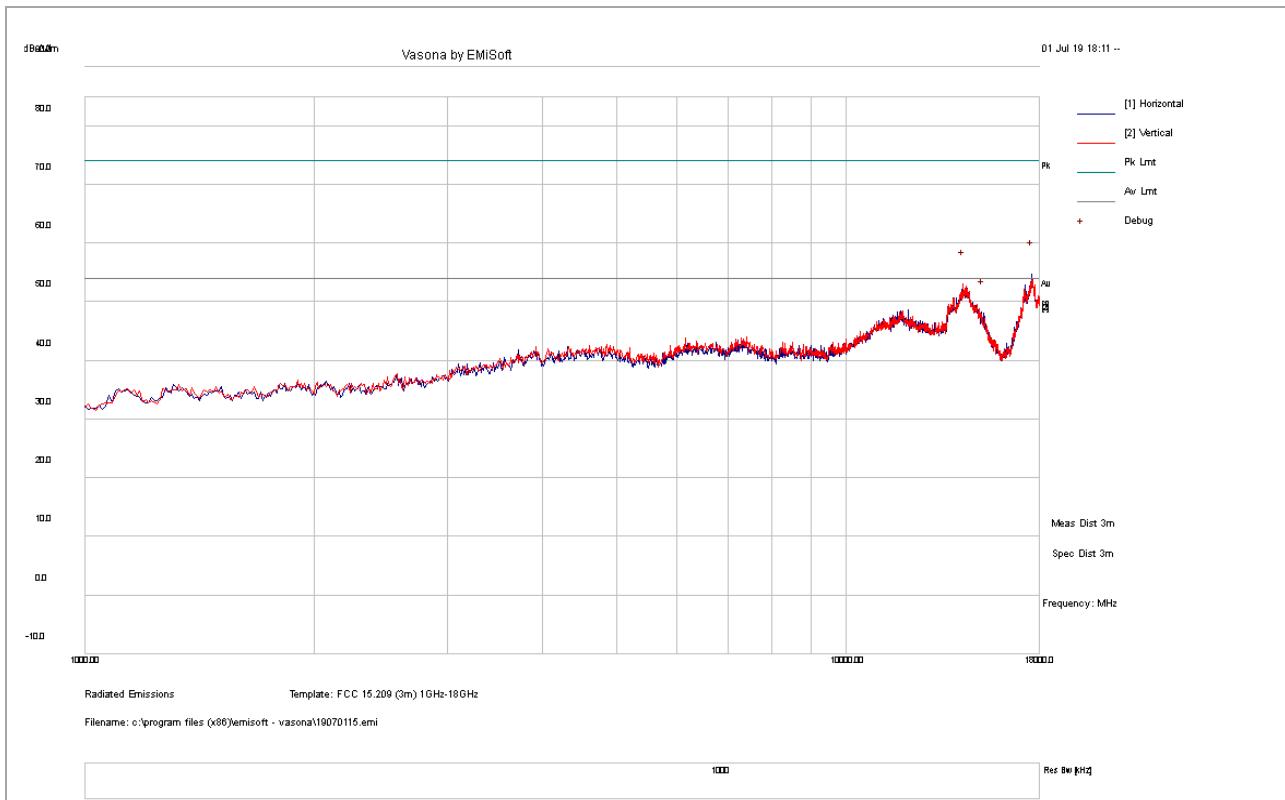


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
17585.63	11.61	25.27	14.87	51.75	PK	H	166	72	54	-2.25
14260.00	16.01	22.31	14.63	52.96	PK	V	102	182	54	-1.04
15163.13	14.31	24.38	9.30	47.98	PK	H	163	87	54	-6.02

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) EUT was tested in 3 orientations.
- 3) If peak result is below average limit of 54 dBuV/m, then final Average measurement is not necessary.

1GHz – 18GHz test result under FCC Part 15C / RSS-247

Test Standard:	15.209 / RSS-247	Mode:	BLE 2440MHz+LTE B2
Frequency Range:	1GHz-18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

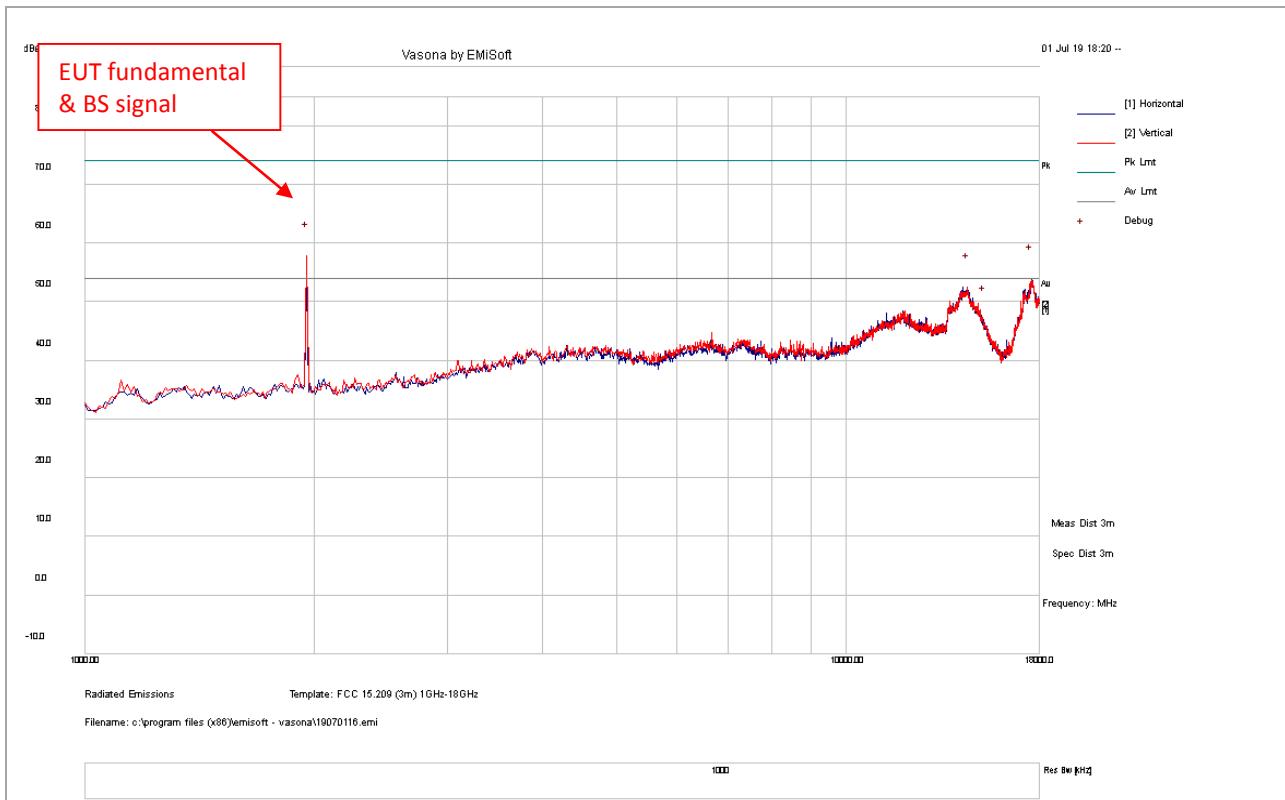


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
17543.13	11.40	25.21	14.38	51.00	PK	H	226	87	54	-3.00
14472.50	15.77	22.95	13.81	52.53	PK	V	172	182	54	-1.47
15184.38	13.40	24.36	9.18	46.94	PK	H	118	98	54	-7.06

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) EUT was tested in 3 orientations.
- 3) If peak result is below average limit of 54 dBuV/m, then final Average measurement is not necessary.

1GHz – 18GHz test result under FCC Part 15C / RSS-247

Test Standard:	15.209 / RSS-247	Mode:	BLE 2440MHz+LTE B4
Frequency Range:	1GHz-18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

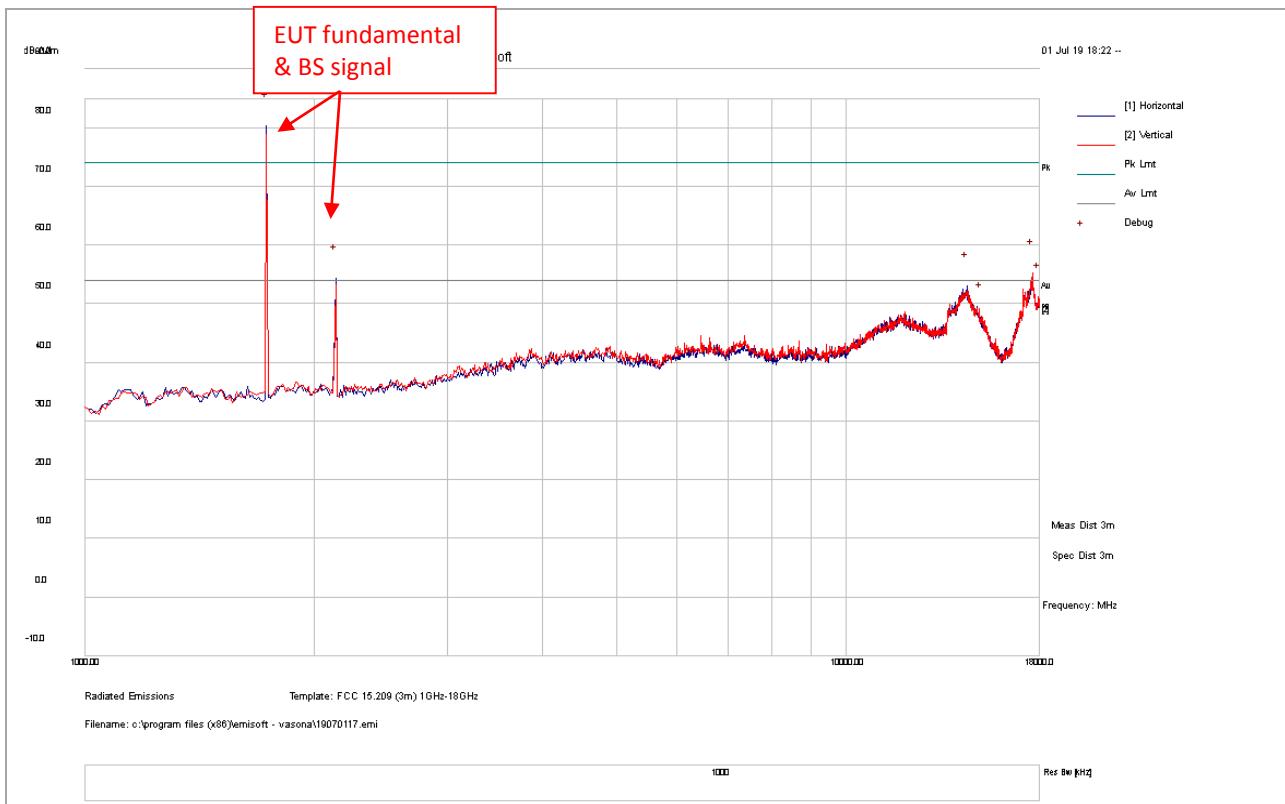


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
17596.25	11.88	25.28	15.01	52.17	PK	V	142	42	54	-1.83
14430.00	15.93	22.82	14.18	52.94	PK	H	298	190	54	-1.06
17925.63	12.79	25.72	12.72	51.23	PK	V	281	88	54	-2.77
15067.50	13.55	24.45	9.83	47.83	PK	V	141	111	54	-6.17

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) EUT was tested in 3 orientations.
- 3) If peak result is below average limit of 54 dBuV/m, then final Average measurement is not necessary.

1GHz – 18GHz test result under FCC Part 15C / RSS-247

Test Standard:	15.209 / RSS-247	Mode:	BLE 2440MHz+LTE B5
Frequency Range:	1GHz-18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

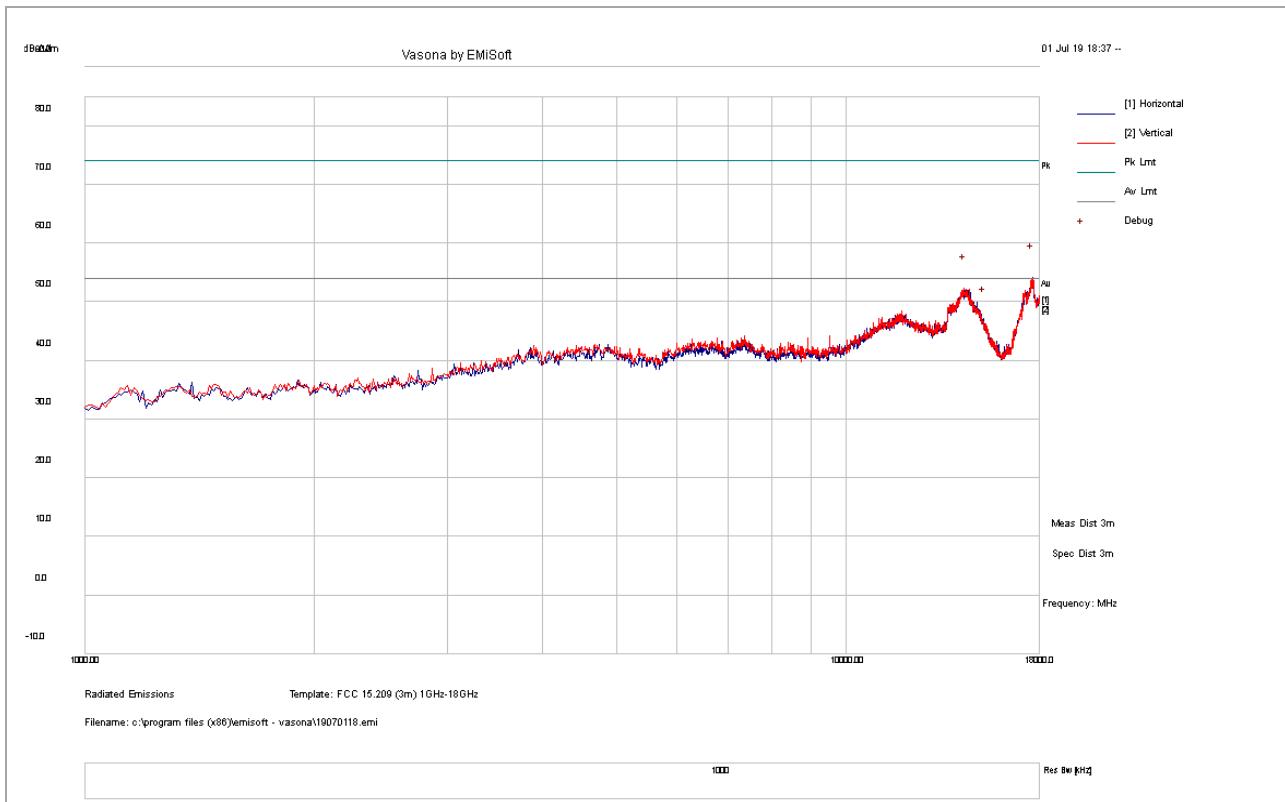


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
17606.88	11.83	25.30	14.92	52.04	PK	H	371	91	54	-1.96
14313.13	15.06	22.47	14.69	52.23	PK	V	287	77	54	-1.78
15205.63	13.31	24.35	9.07	46.72	PK	H	172	199	54	-7.28

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) EUT was tested in 3 orientations.
- 3) If peak result is below average limit of 54 dBuV/m, then final Average measurement is not necessary.

1GHz – 18GHz test result under FCC Part 15C / RSS-247

Test Standard:	15.209 / RSS-247	Mode:	BLE 2440MHz+LTE B7
Frequency Range:	1GHz-18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

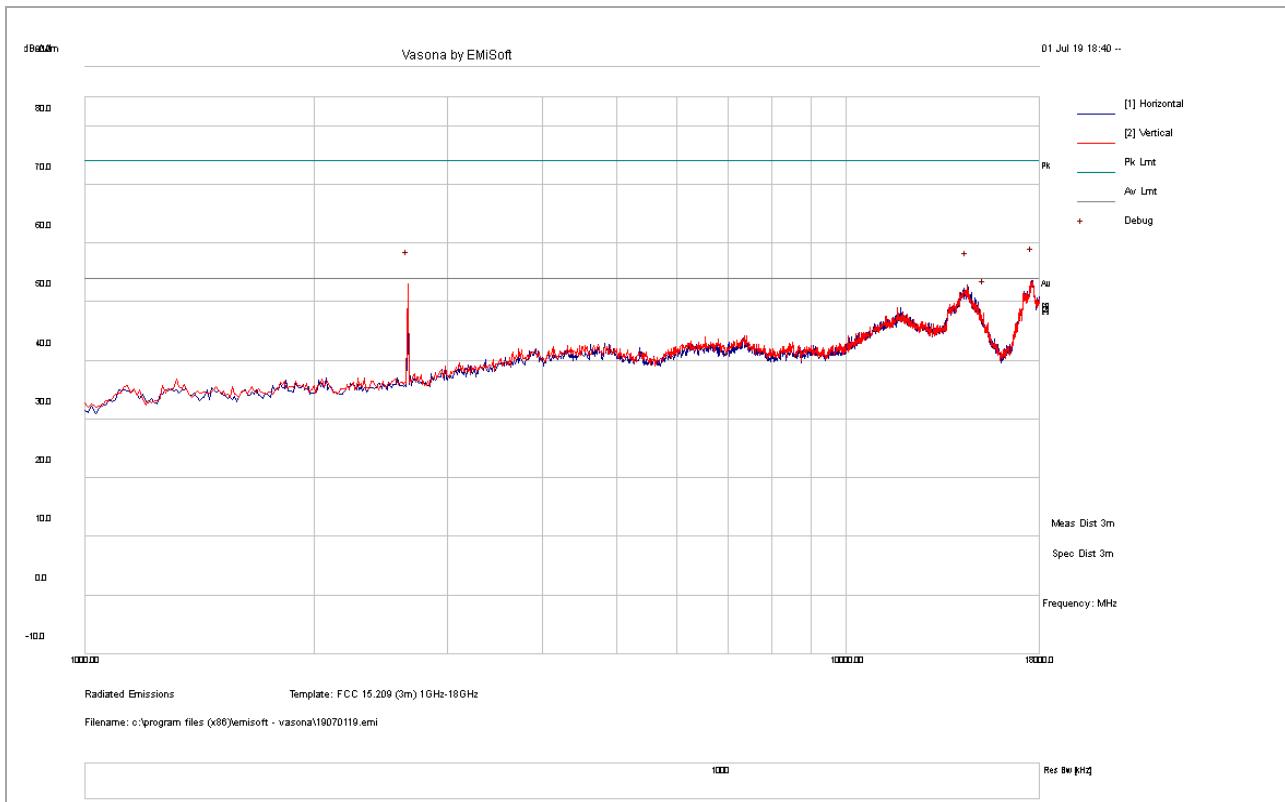

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
17575.00	12.59	25.25	14.73	52.58	PK	H	115	82	54	-1.42
14440.63	15.83	22.86	14.09	52.78	PK	H	226	182	54	-1.22
15195.00	14.49	24.36	9.12	47.98	PK	V	309	124	54	-6.02

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) EUT was tested in 3 orientations.
- 3) If peak result is below average limit of 54 dBuV/m, then final Average measurement is not necessary.

Report Number: GLS-19062721-LC-FCC-IC
Product: ATD300B
Model Number: ATD300B



Page 30 of 49

18GHz – 25GHz test result

Note: no substantial emission is found other than the noise floor.
Different modes have been verified.



Electromagnetic Compatibility
Radio Frequency
Product Certification
International Approval

1261 Puerta Del Sol
San Clemente, CA, 92673
+1 (949) 393-1123
www.vista-compliance.com

7.3 Field Strength of Spurious Radiation

7.3.1 Requirement

§ 2.1051, 22.917(a), 24.238(a), 27.53 (f), (g), (h) and (c)(2) and (5)
RSS-130(4.7.1) and (4.7.2), RSS-132(5.5), RSS-133(6.5), RSS-139(6.6)

FCC 47 CFR Part 22, Clause 22.917 (a) and FCC 47 CFR Part 24, Clause 24.238 (a)

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FCC 47 CFR Part 27, Clause 27.53 (c)(2) and (5)

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

FCC 47 CFR Part 27, Clause 27.53 (f)

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC 47 CFR Part 27, Clause 27.53 (g)

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC 47 CFR Part 27, Clause 27.53 (h)

(h) AWS emission limits — (1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(3) Measurement procedure. (i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RSS-132, Clause 5.5

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

RSS-133, Clause 6.5.1

Equipment shall comply with the limits in (i) and (ii) below.

(i) In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

RSS-139, Clause 6.6

(i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

(ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

Report Number:	GLS-19062721-LC-FCC-IC
Product:	ATD300B
Model Number:	ATD300B




RSS-199, Clause 4.5

Equipment shall comply with the following unwanted emission limits:

- (a) for base station and fixed subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least $43 + 10 \log_{10} p$.
- (b) for mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least:
 - (i) $40 + 10 \log_{10} p$ from the channel edges to 5 MHz away
 - (ii) $43 + 10 \log_{10} p$ between 5 MHz and X MHz from the channel edges, and
 - (iii) $55 + 10 \log_{10} p$ at X MHz and beyond from the channel edges. In addition, the attenuation shall not be less than $43 + 10 \log_{10} p$ on all frequencies between 2490.5 MHz and 2496 MHz, and $55 + 10 \log_{10} p$ at or below 2490.5 MHz.

In (a) and (b), p is the transmitter power measured in watts and X is 6 MHz or the equipment occupied bandwidth, whichever is greater.

7.3.2 Test setup

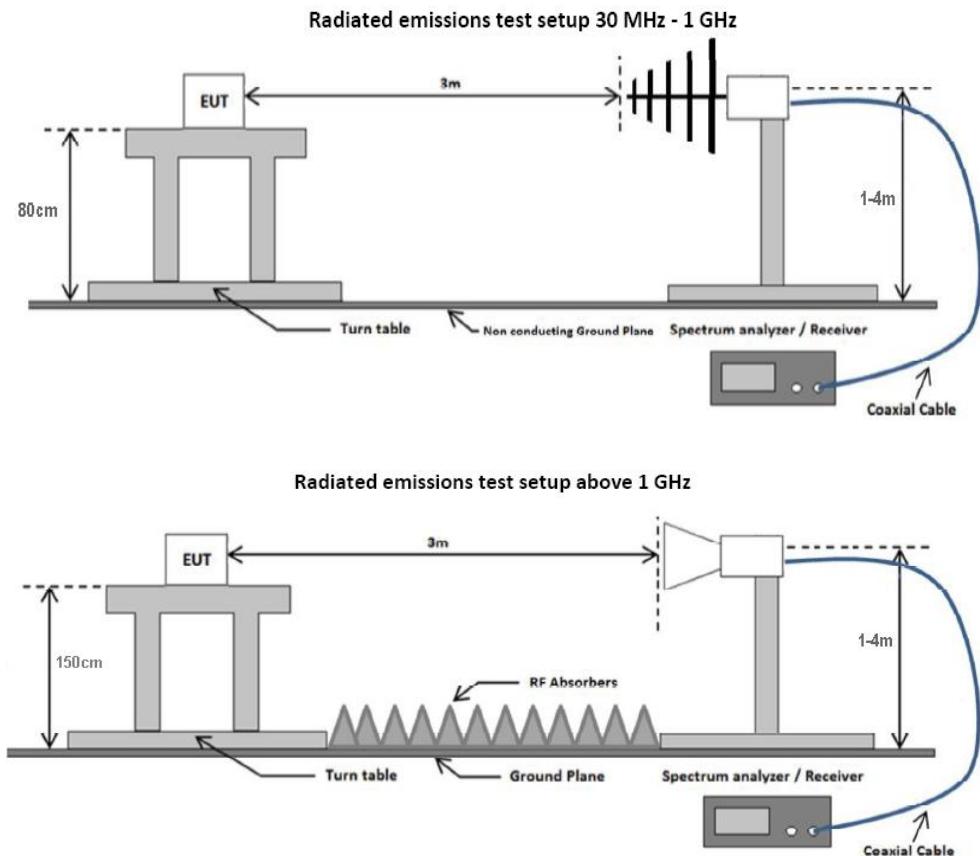

7.3.3 Test Procedure

ANSI C63.26: 2015 section 5.5

KDB 971168 D01 Power Meas License Digital Systems v03r01 section 7

Boresight antenna mast was used during the scanning to point to EUT to maximize the emission. The process will be repeated in 3 EUT orientations.

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 300 Hz for frequency below 150KHz.


Report Number:	GLS-19062721-LC-FCC-IC
Product:	ATD300B
Model Number:	ATD300B



4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for frequency between 150KHz – 30MHz.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-Peak detection at frequency between 30MHz - 1GHz.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak and average measurement at frequency above 1GHz.
7. Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter.
8. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained.
9. Steps 2 - 8 were repeated for the next frequency point, until all selected frequency points were measured

7.3.4 Test Result

Test Standard:	Part 24E & RSS 133	Mode:	BLE 2440MHz+GSM 1900
Frequency Range:	30-1000MHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

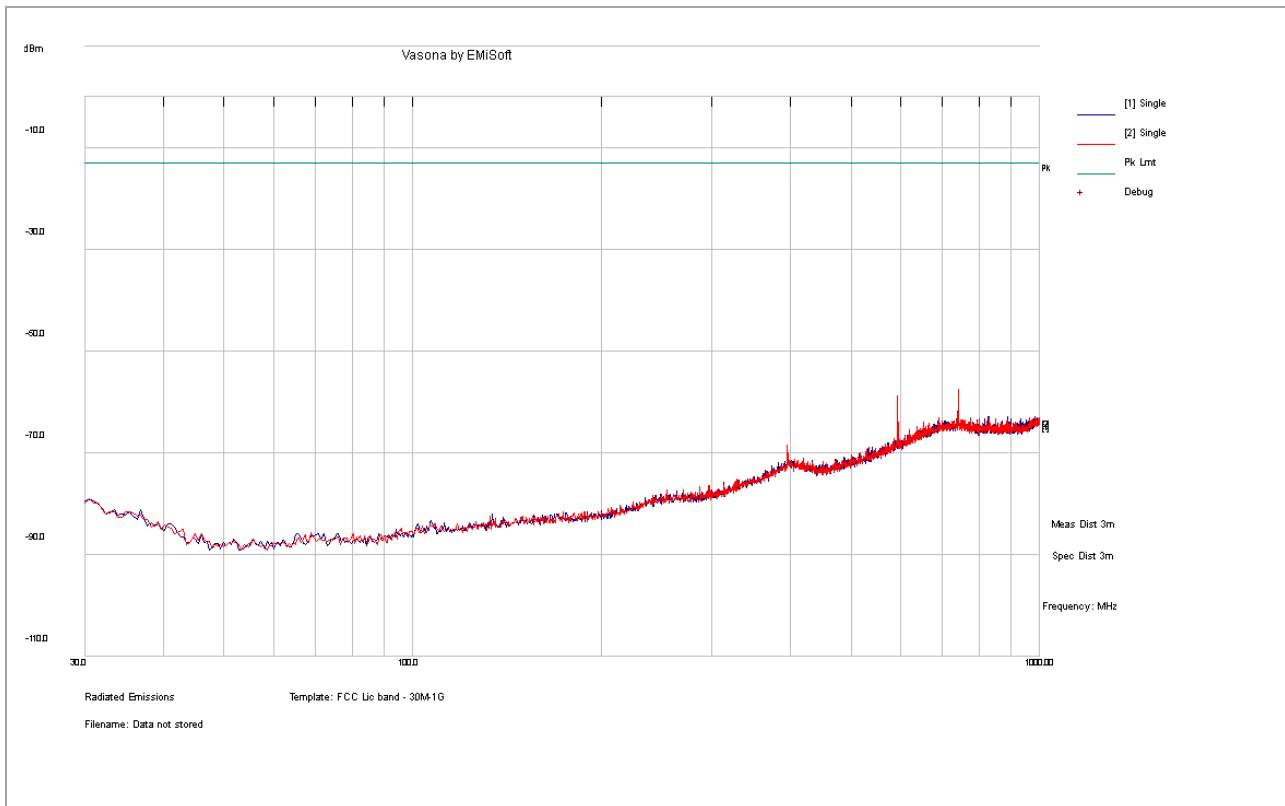

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
741.77	-61.14	7.28	-6.58	-60.43	RMS	V	295	14	-13	-47.43
593.41	-59.13	7.10	-10.08	-62.11	RMS	V	324	42	-13	-49.11
826.03	-70.11	7.34	-6.89	-69.66	RMS	H	338	281	-13	-56.66

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.


Report Number: GLS-19062721-LC-FCC-IC
Product: ATD300B
Model Number: ATD300B



Page 37 of 49

Testing Cert #4848-01

Test Standard:	Part 24 & RSS 132	Mode:	BLE 2440MHz+WCDMA B5
Frequency Range:	30-1000MHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

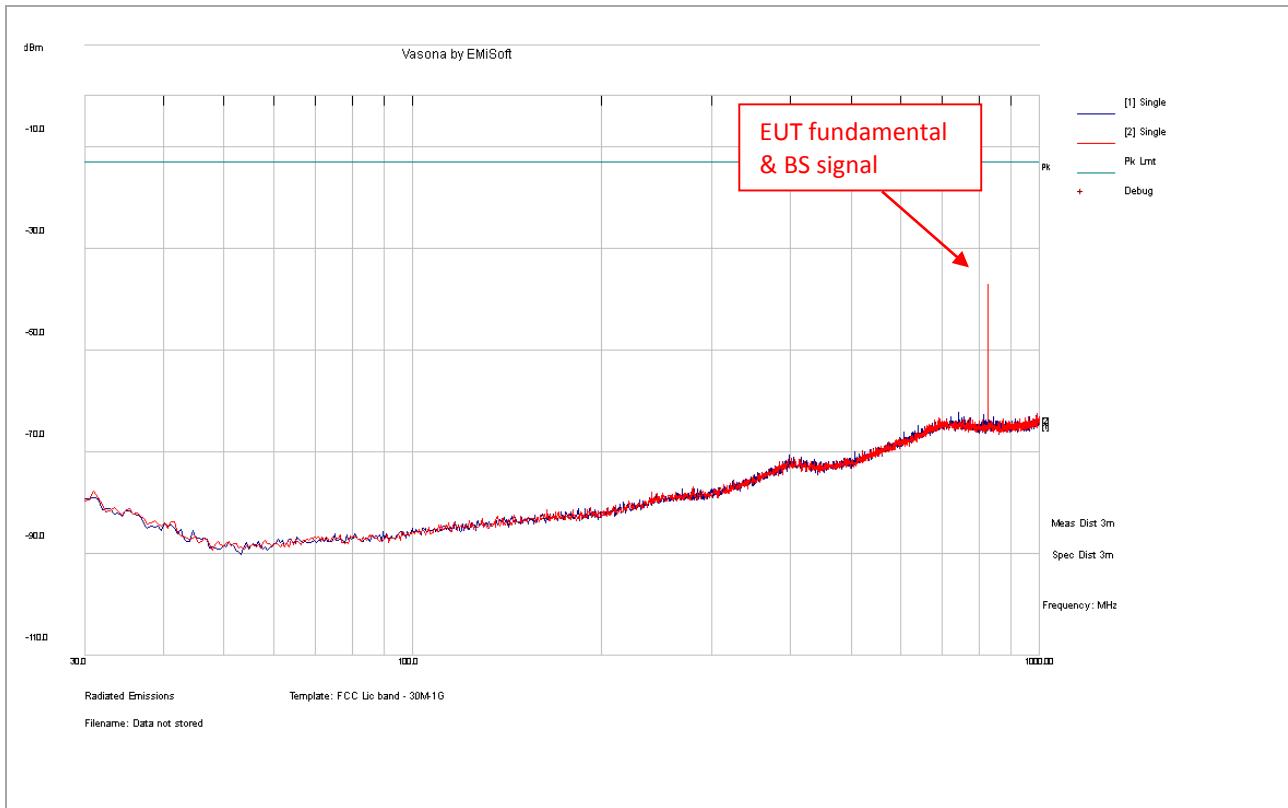

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
806.51	-65.26	7.27	-6.80	-64.78	RMS	H	184	233	-13	-51.78
741.74	-64.77	7.28	-6.58	-64.07	RMS	H	215	204	-13	-51.07
400.65	-65.85	6.37	-13.44	-72.92	RMS	V	186	0	-13	-59.92
168.20	-65.86	4.44	-22.23	-83.66	RMS	H	375	15	-13	-70.66

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval

1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com


Report Number: GLS-19062721-LC-FCC-IC
Product: ATD300B
Model Number: ATD300B



Page 38 of 49

Testing Cert #4848-01

Test Standard:	Part 27 & RSS 139	Mode:	BLE 2440MHz+LTE B4
Frequency Range:	30-1000MHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

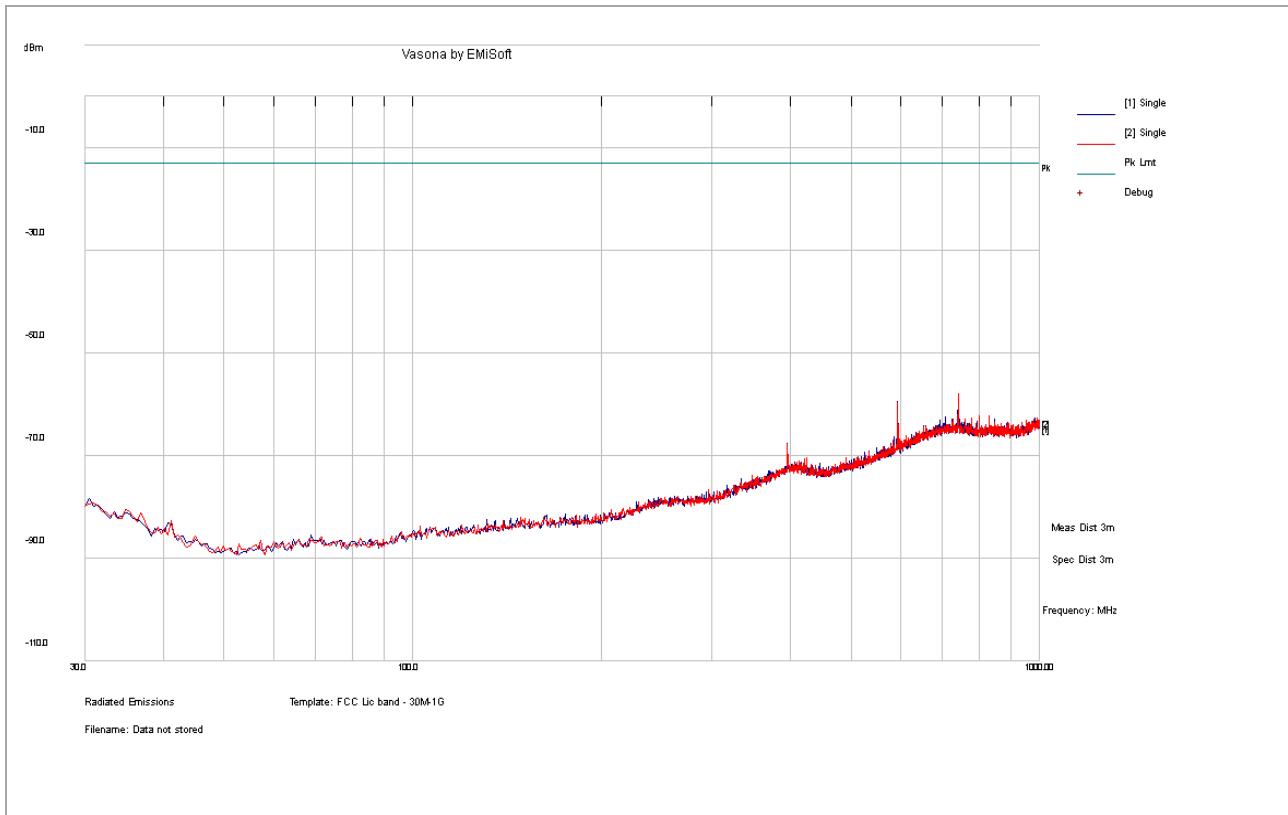

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
741.76	-60.69	7.28	-6.58	-59.98	RMS	V	308	46	-13	-46.98
593.40	-59.09	7.10	-10.08	-62.08	RMS	H	100	360	-13	-49.08
801.09	-66.54	7.25	-6.77	-66.06	RMS	V	294	195	-13	-53.06
395.59	-64.25	6.34	-13.65	-71.56	RMS	H	105	106	-13	-58.56

Note:


- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval

1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Test Standard:	Part 27 & RSS 199	Mode:	BLE 2440MHz+LTE B7
Frequency Range:	30-1000MHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

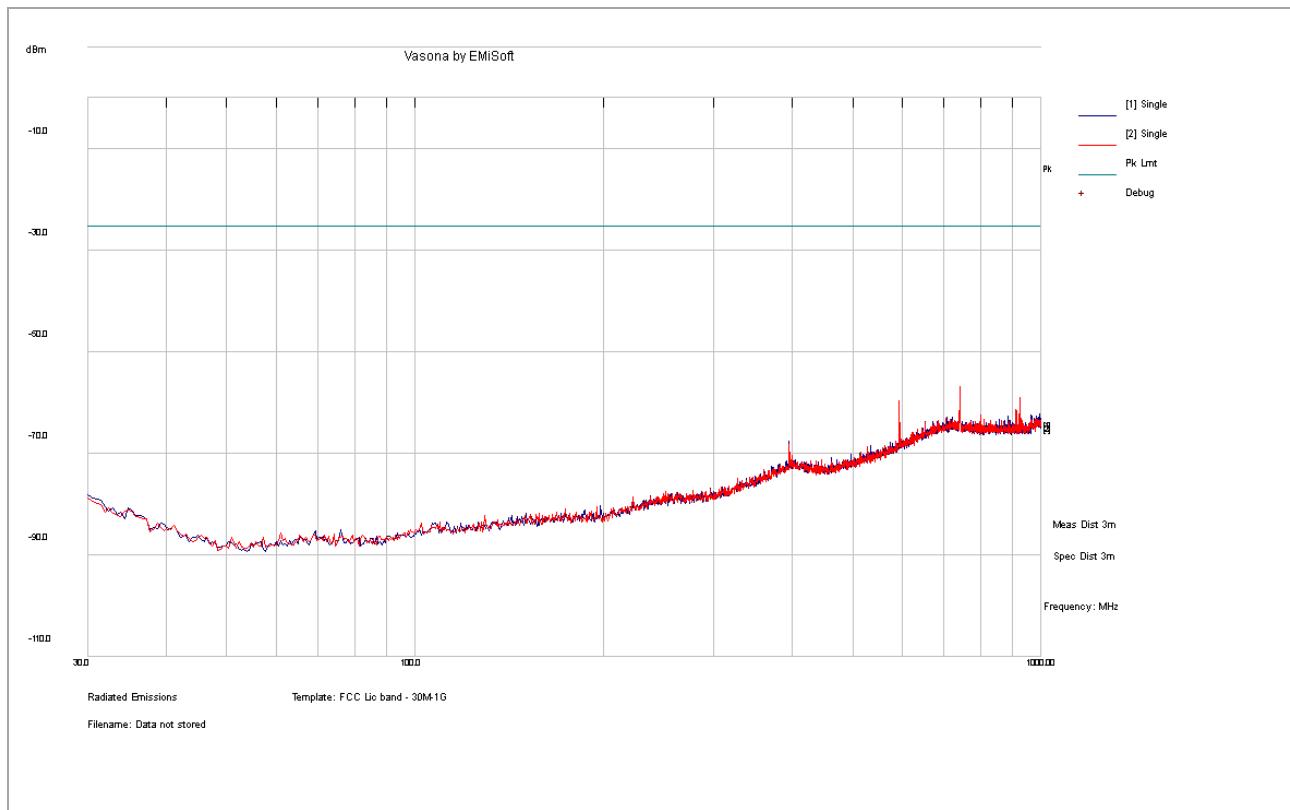


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
741.78	-61.18	7.28	-6.58	-60.48	RMS	V	200	207	-25	-35.48
923.33	-70.30	7.70	-6.98	-69.58	RMS	V	100	5	-25	-44.58
593.39	-59.36	7.10	-10.08	-62.34	RMS	V	214	78	-25	-37.34
924.55	-70.36	7.71	-6.96	-69.61	RMS	V	391	38	-25	-44.61
395.62	-64.11	6.34	-13.65	-71.42	RMS	H	100	274	-25	-46.42

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 24E & RSS 133	Mode:	BLE 2440MHz+GSM1900
Frequency Range:	1GHz -18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

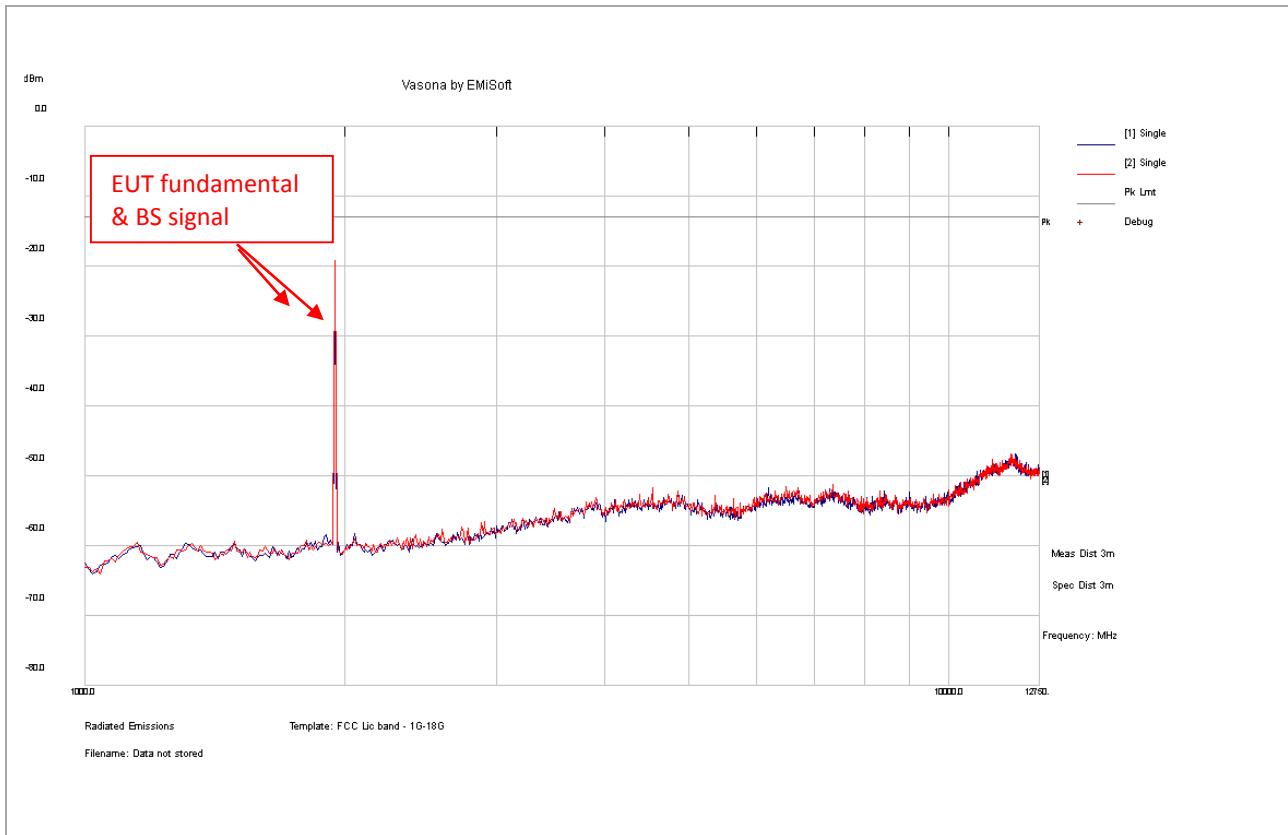

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
17617.5	-83.12	25.31	14.69	-43.12	RMS	V	182	172	-13	-30.12
14430.00	-80.20	22.82	14.18	-43.20	RMS	H	118	17	-13	-30.20
15099.38	-81.71	24.43	9.65	-47.63	RMS	V	261	98	-13	-34.63

Note:


- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Report Number: GLS-19062721-LC-FCC-IC
Product: ATD300B
Model Number: ATD300B



Page 41 of 49

Test Standard:	Part 22 & RSS 132	Mode:	BLE 2440MHz+GSM850
Frequency Range:	1GHz -18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

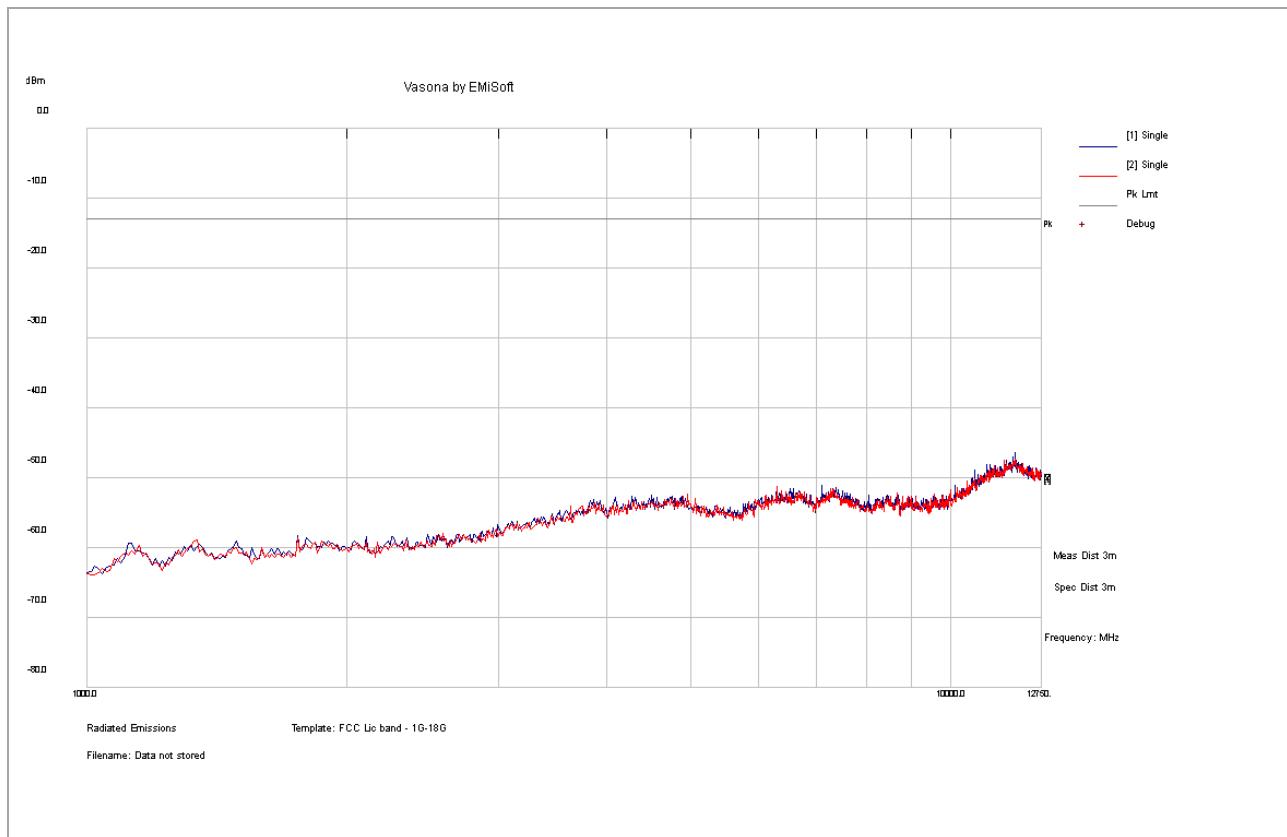


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
17553.75	-82.75	25.22	14.45	-43.07	RMS	V	152	61	-13	-30.07
14387.50	-80.21	22.70	14.5	-43.02	RMS	H	198	188	-13	-30.02
15141.88	-81.69	24.40	9.41	-47.88	RMS	V	228	190	-13	-34.88

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 24E & RSS 133	Mode:	BLE 2440MHz+WCDMA B2
Frequency Range:	1GHz -18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

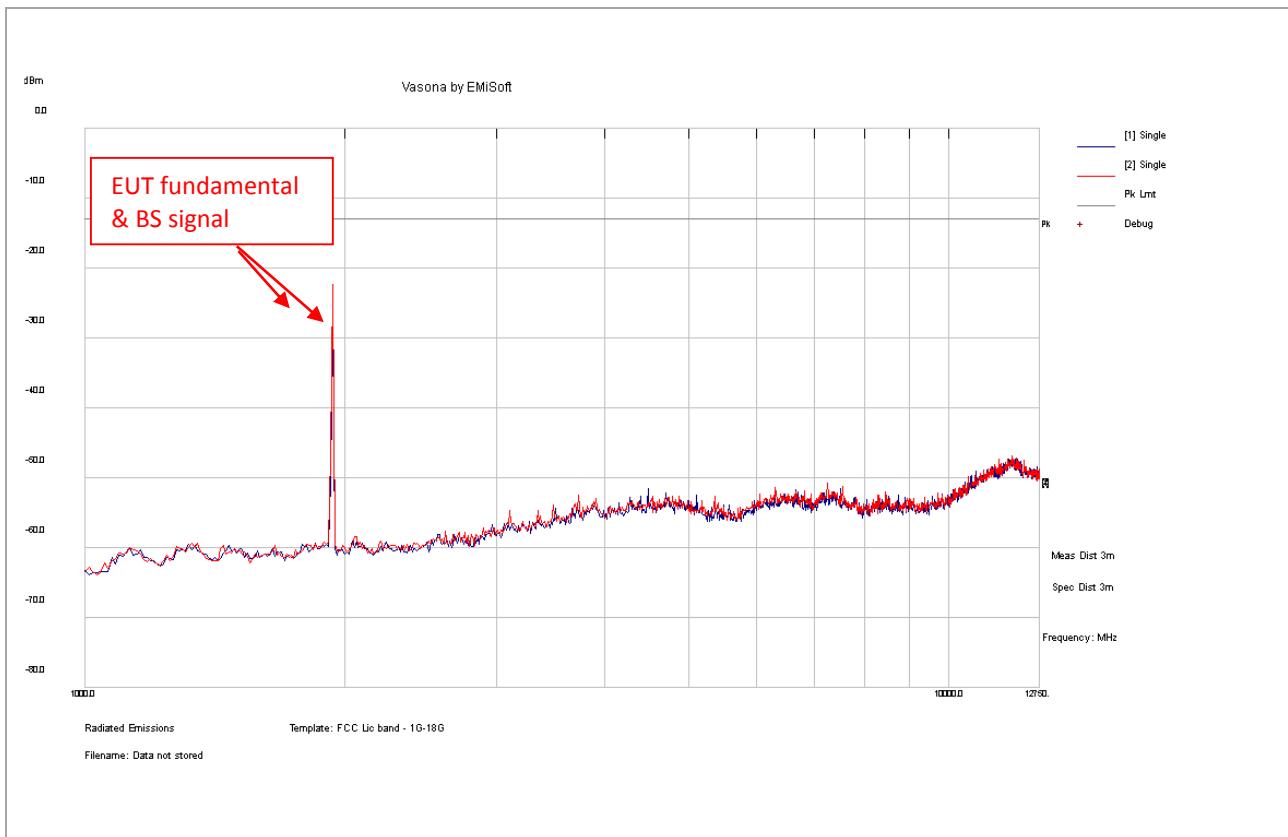

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
17521.88	-83.27	25.18	14.32	-43.77	RMS	V	179	66	-13	-30.77
14387.50	-80.86	22.70	14.50	-43.67	RMS	V	281	82	-13	-30.67
15195.00	-81.45	24.36	9.12	-47.97	RMS	H	115	255	-13	-34.97

Note:


- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Report Number: GLS-19062721-LC-FCC-IC
Product: ATD300B
Model Number: ATD300B



Page 43 of 49

Test Standard:	Part 222 & RSS 132	Mode:	BLE 2440MHz+WCDMA B5
Frequency Range:	1GHz -18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

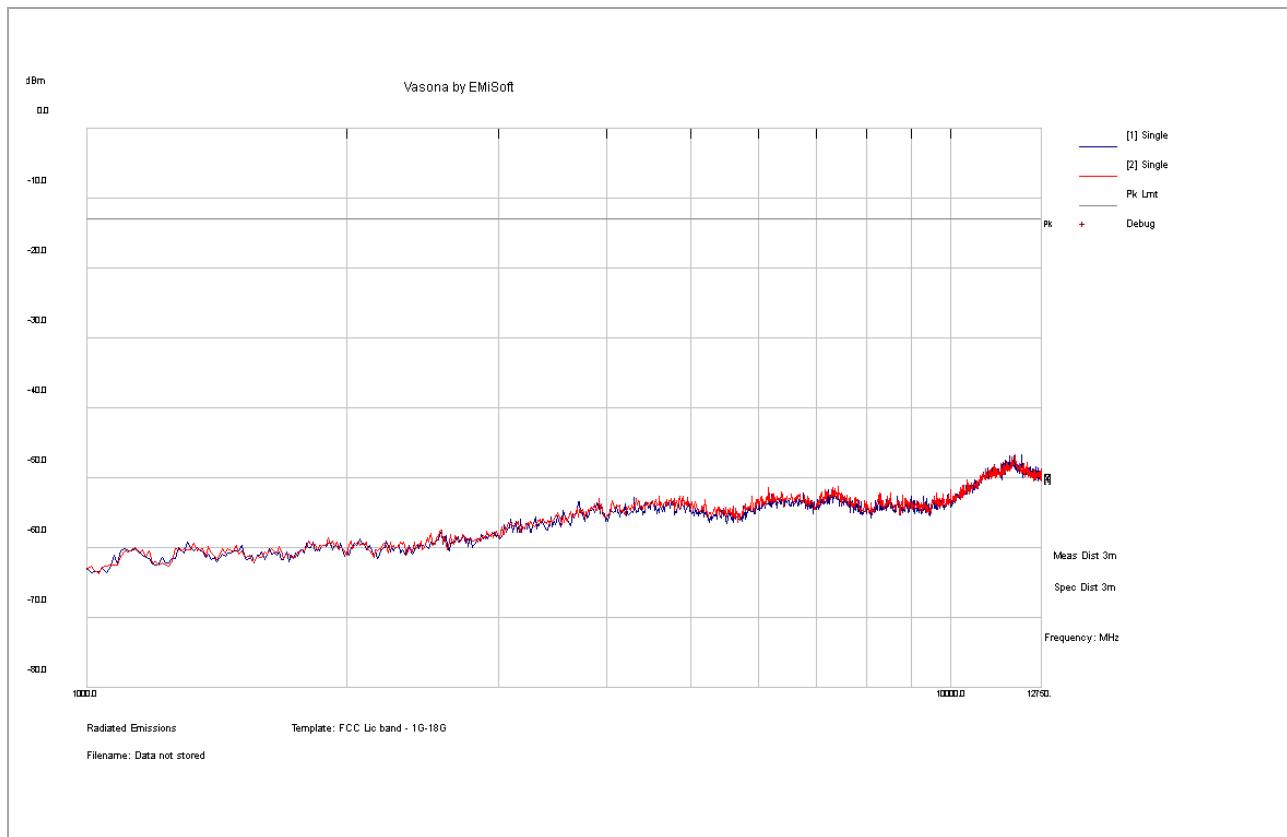


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
17585.63	-83.62	25.27	14.87	-43.48	RMS	H	166	72	-13	-30.48
14260.00	-79.22	22.31	14.63	-42.27	RMS	V	102	182	-13	-29.27
15163.13	-80.92	24.38	9.3	-47.25	RMS	H	163	87	-13	-34.25

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 24E & RSS 133	Mode:	BLE 2440MHz + LTE B2
Frequency Range:	1GHz -18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

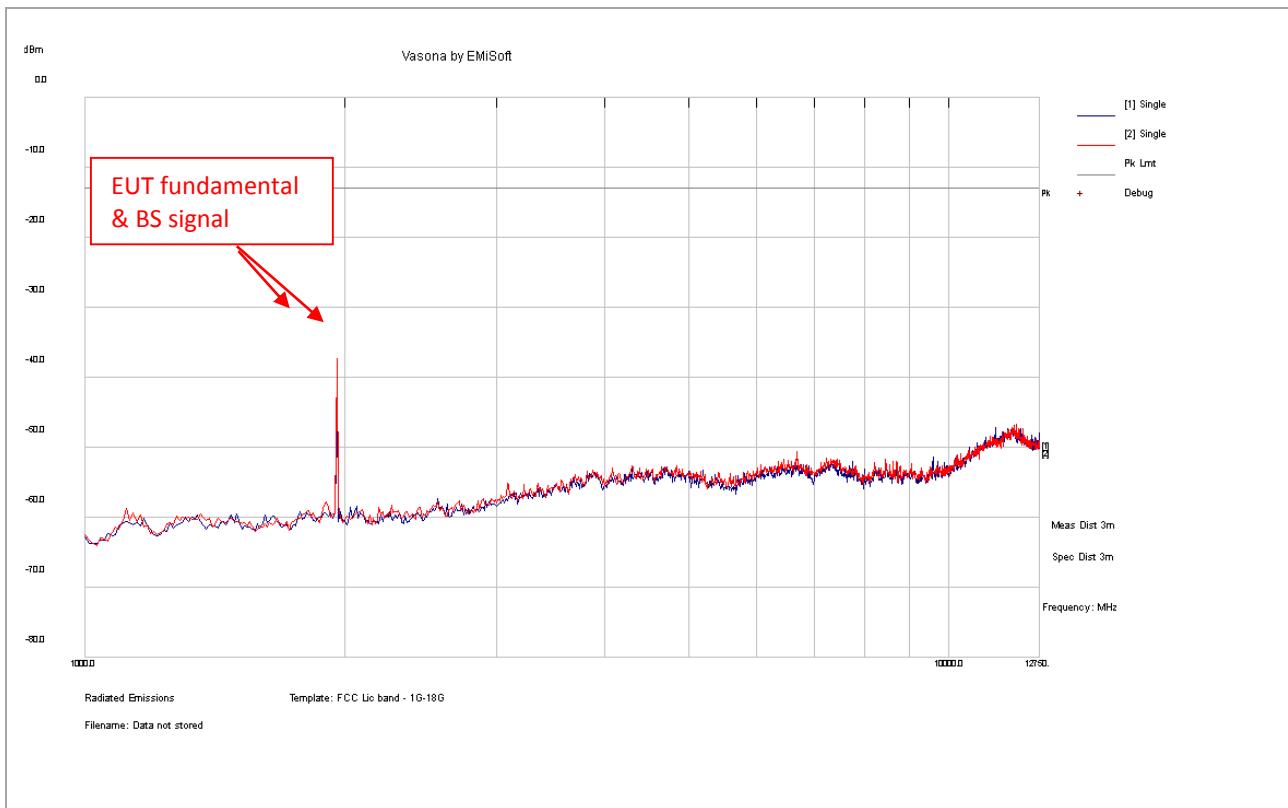


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
17543.13	-83.83	25.21	14.38	-44.23	RMS	H	226	87	-13	-31.23
14472.50	-79.46	22.95	13.81	-42.70	RMS	V	172	182	-13	-29.70
15184.38	-81.83	24.36	9.18	-48.29	RMS	H	118	98	-13	-35.29

Note:

- 5) All different channel and modes were verified but only the worst case result is shown here.
- 6) All different modes have been verified and the worst case result is presented here.
- 7) EUT was tested in 3 orientations.
- 8) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 27 & RSS 139	Mode:	BLE 2440MHz + LTE B4
Frequency Range:	1GHz -18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

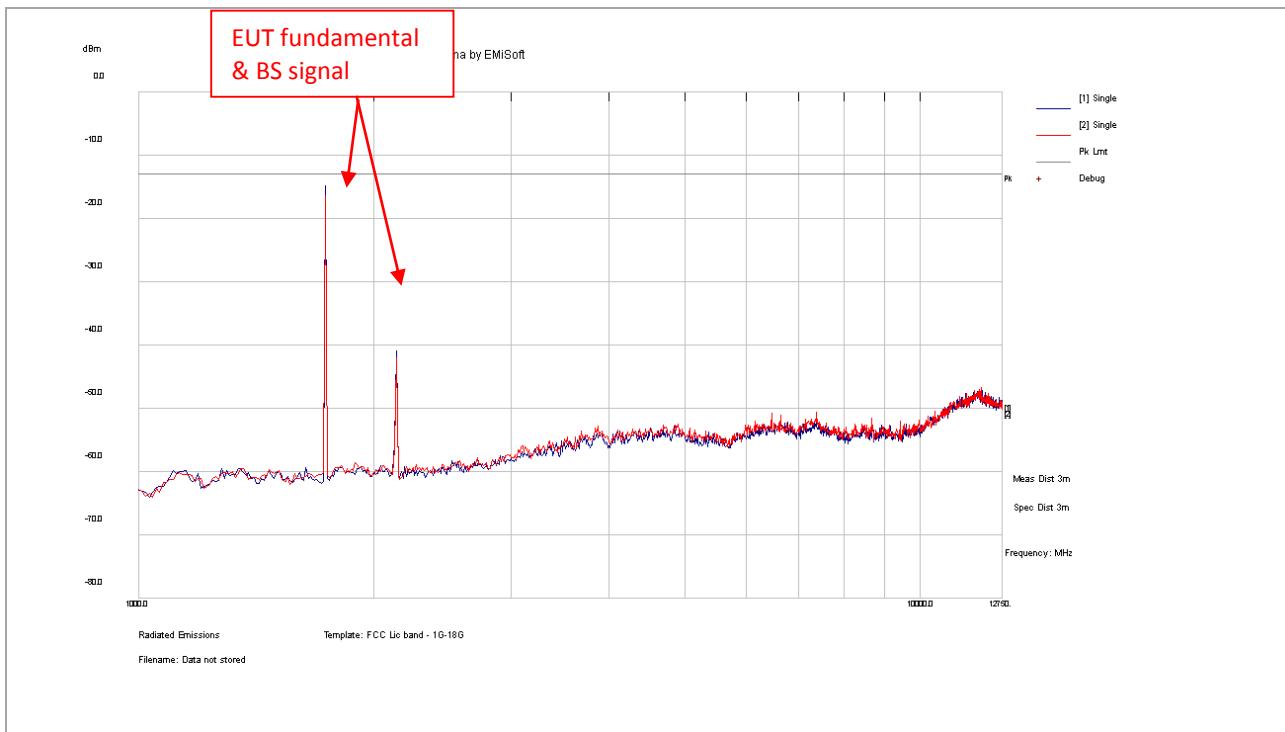

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
17596.25	-83.35	25.28	15.01	-43.06	RMS	V	142	42	-13	-30.06
14430.00	-79.30	22.82	14.18	-42.29	RMS	H	298	190	-13	-29.29
17925.63	-82.44	25.72	12.72	-44.00	RMS	V	281	88	-13	-31.00
15067.50	-81.68	24.45	9.83	-47.40	RMS	V	141	111	-13	-34.4

Note:


- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Report Number: GLS-19062721-LC-FCC-IC
Product: ATD300B
Model Number: ATD300B



Page 46 of 49

Test Standard:	Part 22 & RSS 132	Mode:	BLE 2440MHz + LTE B5
Frequency Range:	1GHz -18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

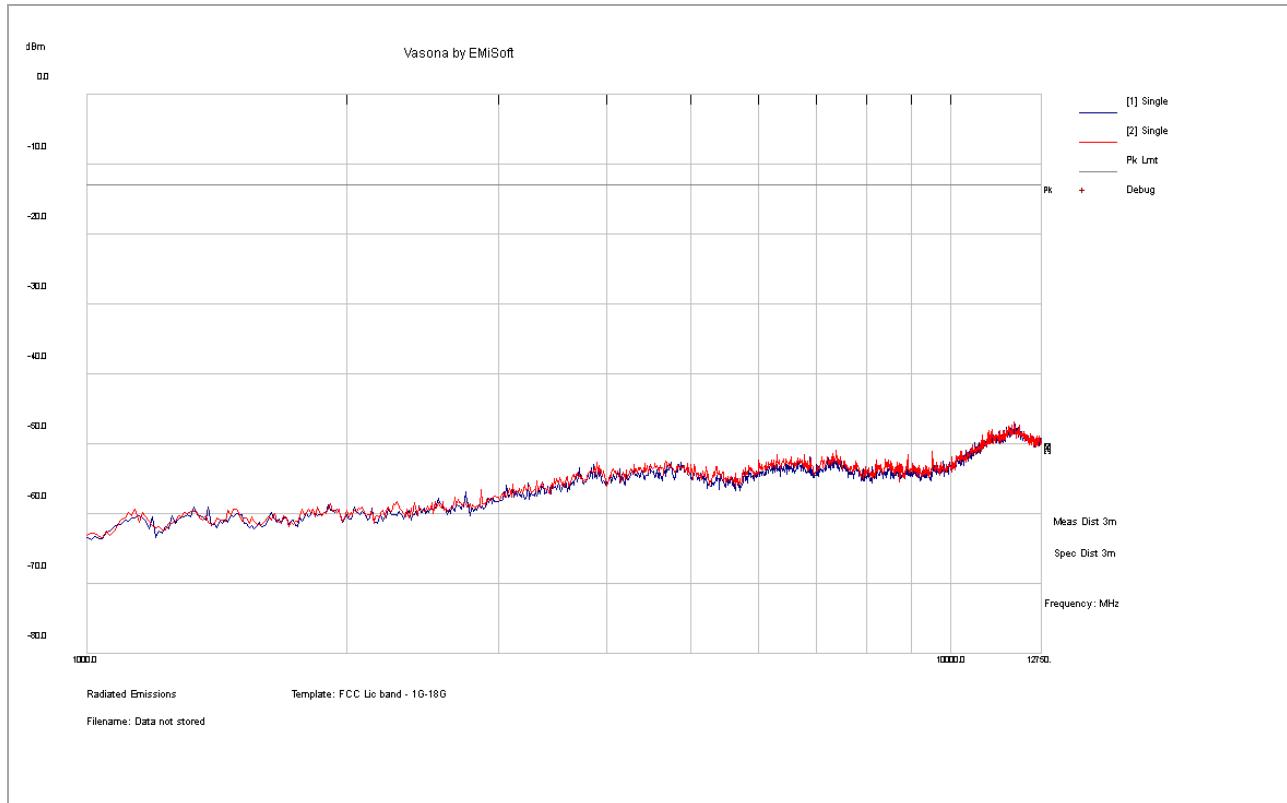


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
17606.88	-83.4	25.3	14.92	-43.19	RMS	H	371	91	-13	-30.19
14313.13	-80.17	22.47	14.69	-43.00	RMS	V	287	77	-13	-30.00
15205.63	-81.92	24.35	9.07	-48.51	RMS	H	172	199	-13	-35.51

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 27 & RSS 199	Mode:	BLE 2440MHz + LTE B7
Frequency Range:	1GHz -18GHz	Test Date:	07/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

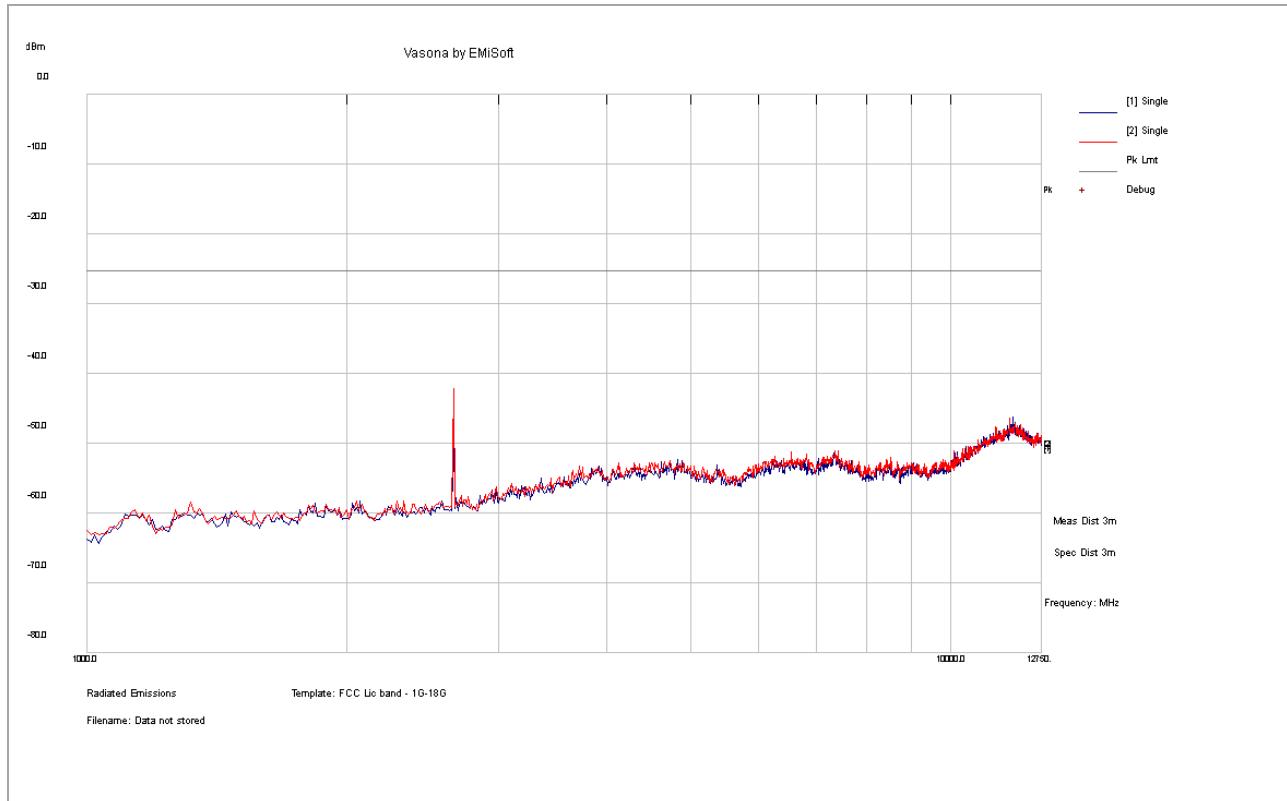

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
17575	-82.64	25.25	14.73	-42.65	RMS	H	115	82	-25	-17.65
14440.63	-79.40	22.86	14.09	-42.45	RMS	H	226	182	-25	-17.45
15195	-80.74	24.36	9.12	-47.25	RMS	V	309	124	-25	-22.25

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Report Number: GLS-19062721-LC-FCC-IC
Product: ATD300B
Model Number: ATD300B



Page 48 of 49

18GHz – 40GHz test result

Note: no substantial emission is found other than the noise floor.
Different modes have been verified.



Electromagnetic Compatibility
Radio Frequency
Product Certification
International Approval

1261 Puerta Del Sol
San Clemente, CA, 92673
+1 (949) 393-1123
www.vista-compliance.com

8 Test instrument list

Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
Semi-Anechoic Chamber	ETS-Lindgren	10M	VL001	5/11/2019	5/11/2020
Shielding Control Room	ETS-Lindgren	Series 81	VL006	N/A	N/A
Spectrum Analyzer	Keysight	N9020A	MY50110074	5/4/2019	5/4/2020
EMC Test Receiver	R&S	ESL6	100230	5/7/2019	5/7/2020
LISN (9KHz – 30MHz)	EMCO	3816/2	9705-1066	5/4/2019	5/4/2020
Bi-Log Antenna	ETS-Lindgren	3142E	217921	11/15/2018	11/15/2019
Horn Antenna (1-18GHz)	Electro-Metrics	EM-6961	6292	5/2/2019	5/2/2020
Horn Antenna (18-40GHz)	Com-Power	AH-840	101109	5/2/2019	5/2/2020
Preamplifier	RF Bay, Inc.	LPA-10-20	11180621	5/10/2019	5/10/2020
True RMS Multi-meter	UNI-T	UT181A	C173014829	5/10/2019	5/10/2020
Temp / Humidity / Pressure Meter	PCE Instruments	PCE-THB 40	R062028	5/9/2019	5/9/2020
RF Attenuator	Pasternack	PE7005-3	VL061	5/10/2019	5/10/2020
Preamplifier 100KHz - 40GHz	Aeroflex	33711-392-77150-11	064	5/10/2019	5/10/2020
EM Center Control	ETS-Lindgren	7006-001	160136	N/A	N/A
Turn Table	ETS-Lindgren	2181-3.03	VL002	N/A	N/A
Boresight Antenna Tower	ETS-Lindgren	2171B	VL003	N/A	N/A
Loop Antenna (9k-30MHz)	Com-Power	AL-130	121012	5/9/2019	5/9/2020
RE test cable(below 6GHz)	Vista	RE-6GHz-01	RE-6GHz-01	5/10/2019	5/10/2020
RE test cable (1-18GHz)	PhaseTrack	II-240	RE-18GHz-01	5/10/2019	5/10/2020
RE test cable (>18GHz)	Sucoflex	104	344903/4	5/10/2019	5/10/2020
Pulse limiter	Com-Power	LIT-930A	531727	5/15/2019	5/15/2020
CE test cable #1	FIRST RF	FRF-C-1002-001	CE-6GHz-01	5/10/2019	5/10/2020
CE test cable#2	FIRST RF	FRF-C-1002-001	CE-6GHz-02	5/9/2019	5/9/2020
Wideband Communication	R&S	CMW500	147508	5/8/2019	5/8/2020