



FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: GTSR16070031-WLAN

FCC ID..... : 2AH68-PIVOTHUB

Compiled by

(position+printed name+signature)..: File administrators Jimmy Wang

Supervised by

(position+printed name+signature)..: Test Engineer Peter Xiao

Approved by

(position+printed name+signature)..: Manager Sam Wang

Date of issue.....: Jul. 16, 2016

Representative Laboratory Name.: Shenzhen Global Test Service Co.,Ltd.

Address: 1F, Building No. 13A, Zhonghaixin Science and Technology City,
No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District,
Shenzhen, Guangdong

Applicant's name.....: TuringSense, Inc

Address: 4675 Stevens Creek Blvd. #101,Santa Clara,CA 95051,U.S.A.

Test specification

Standard: **FCC Part 15.247: Operation within the bands 902-928 MHz,
2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator: Shenzhen Global Test Service Co.,Ltd.

Master TRF.....: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Wireless 9-axis motion sensors to capture

Trade Mark: /

Manufacturer: **TuringSense,Inc**

Model/Type reference.....: PIVOT Hub1.0

Listed Models: /

Operation Frequency.....: From 2412MHz to 2462MHz

Hardware Version: PIVOTHUB_Rev D

Software Version: Hub_ V1.0

Rating: DC 3.7V

Result.....: **PASS**

TEST REPORT

Test Report No. :	GTSR16070031-WLAN	Jul. 16, 2016
		Date of issue

Equipment under Test : Wireless 9-axis motion sensors to capture

Model /Type : PIVOT Hub1.0

Listed Models : /

Applicant : **TuringSense, Inc**

Address : 4675 Stevens Creek Blvd. #101,Santa Clara,CA 95051,U.S.A.

Manufacturer : **TuringSense, Inc**

Address : 4675 Stevens Creek Blvd. #101,Santa Clara,CA 95051,U.S.A.

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment Under Test	5
2.4.	Short description of the Equipment under Test (EUT)	5
2.5.	EUT operation mode	5
2.6.	Block Diagram of Test Setup	6
2.7.	Related Submittal(s) / Grant (s)	6
2.8.	Modifications	6
2.9.	NOTE	6
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Test Description	8
3.5.	Statement of the measurement uncertainty	9
3.6.	Equipments Used during the Test	9
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>10</u>
4.1.	AC Power Conducted Emission	10
4.2.	Radiated Emission.....	13
4.3.	Maximum Peak Output Power.....	21
4.4.	Power Spectral Density	22
4.5.	6dB Bandwidth	25
4.6.	Band Edge Compliance of RF Emission	28
4.7.	Spurious RF Conducted Emission	33
4.8.	Antenna Requirement.....	58
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>59</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>61</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03r05](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Jul. 06, 2016
Testing commenced on	:	Jul. 06, 2016
Testing concluded on	:	Jul. 16, 2016

2.2. Product Description

Name of EUT	Wireless 9-axis motion sensors to capture
Model Number	PIVOT Hub1.0
Listed Models	/
FCC ID	2AH68-PIVOTHUB
Power Supply	Battery DC 3.7V
Supported type:	802.11b/802.11g/802.11n HT20/802.11n HT40
Modulation:	802.11b: DSSS(CCK,DQPSK,DBPSK) 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Operation frequency:	802.11b:2412-2462MHz 802.11g:2412-2462MHz 802.11n HT20:2412-2462MHz 802.11n HT40:2422-2452MHz
Antenna Type	Internal Antenna

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 3.7V

2.4. Short description of the Equipment under Test (EUT)

This is a Wireless 9-axis motion sensors to capture.

For more details, refer to the user's manual of the EUT.


2.5. EUT operation mode

The application provider specific test software to control sample in continuous TX and RX (Duty Cycle >98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n HT20/n HT40:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

2.6. Block Diagram of Test Setup



2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AH68-PIVOTHUB filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8. Modifications

No modifications were implemented to meet testing criteria.

2.9. NOTE

	Test Standards	Reference Report
WLAN	FCC Part 15 Subpart C	GTSR16070031-WLAN
EMF	FCC Per 47 CFR 2.1093(d)	GTSR16060031-MPE

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District, Shenzhen, Guangdong

Shenzhen CTL Testing Technology Co.,Ltd.

1/F.-A, Baisha Technology Park, No.3011, Shaheixi Road, Nanshan District, Shenzhen, Guangdong, China

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 964637

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 964637, Jul 24, 2015.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2018.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Test Description

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	802.11b	☒ Lowest ☒ Middle ☒ Highest	802.11b	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.247(e)	Power spectral density	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.247(a)(1)	Spectrum bandwidth – 6 dB bandwidth	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(b)(1)	Maximum output power	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒ ☒ ☒	☐	☐	☐	complies
§15.247(d)	Band edge compliance conducted	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.205	Band edge compliance radiated	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Highest	☒	☐	☐	☐	complies
§15.247(d)	TX spurious emissions conducted	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(d)	TX spurious emissions radiated	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	☒	☐	☐	☐	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	802.11b	-/-	802.11b	-/-	☒	☐	☐	☐	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	802.11b	-/-	802.11b	-/-	☒	☐	☐	☐	complies

Remark:

1. The measurement uncertainty is not included in the test result.

2. NA = Not Applicable; NP = Not Performed

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power	11b/DSSS	1 Mbps	1/6/11
Power Spectral Density	11g/OFDM	6 Mbps	1/6/11
6dB Bandwidth	11n(20MHz)/OFDM	6.5Mbps	1/6/11
Spurious RF conducted emission	11n(40MHz)/OFDM	6.5Mbps	3/6/9
Radiated Emission 9kHz~1GHz&	11b/DSSS	1 Mbps	1/11
Radiated Emission 1GHz~10 th Harmonic	11g/OFDM	6 Mbps	1/11
Band Edge	11n(20MHz)/OFDM	6.5Mbps	1/11
	11n(40MHz)/OFDM	6.5Mbps	3/9

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2016/05/28	2017/05/27
LISN	R&S	ESH2-Z5	893606/008	2016/05/27	2017/05/26
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2016/06/02	2017/06/01
EMI Test Receiver	R&S	ESCI	101102	2016/06/26	2017/06/25
Spectrum Analyzer	Agilent	N9020A	MY48010425	2016/06/17	2017/06/16
Controller	EM Electronics	Controller EM 1000	N/A	2016/05/21	2017/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2016/05/19	2017/05/18
Active Loop Antenna	SCHWARZBEC K	FMZB1519	1519-037	2016/05/19	2017/05/18
Amplifier	Agilent	8349B	3008A02306	2016/05/19	2017/05/18
Amplifier	Agilent	8447D	2944A10176	2016/05/19	2017/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2016/05/20	2017/05/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2016/05/20	2017/05/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2016/05/20	2017/05/19
Data acquisition card	Agilent	U2531A	TW53323507	2016/05/20	2017/05/19
Power Sensor	Agilent	U2021XA	MY5365004	2016/05/20	2017/05/19
RF Cable	HUBER+SUHNER	RG214	N/A	2016/05/20	2017/05/19

Note: The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

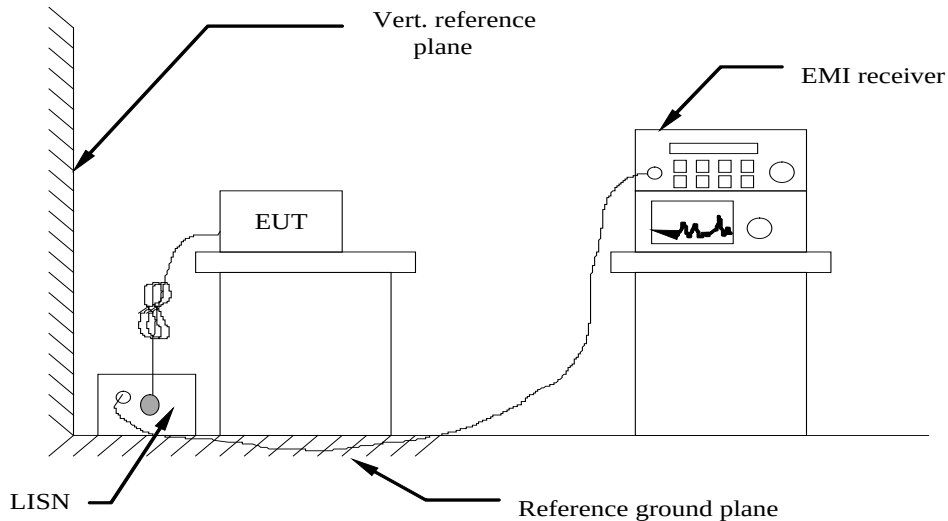

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 5V power, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.


AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

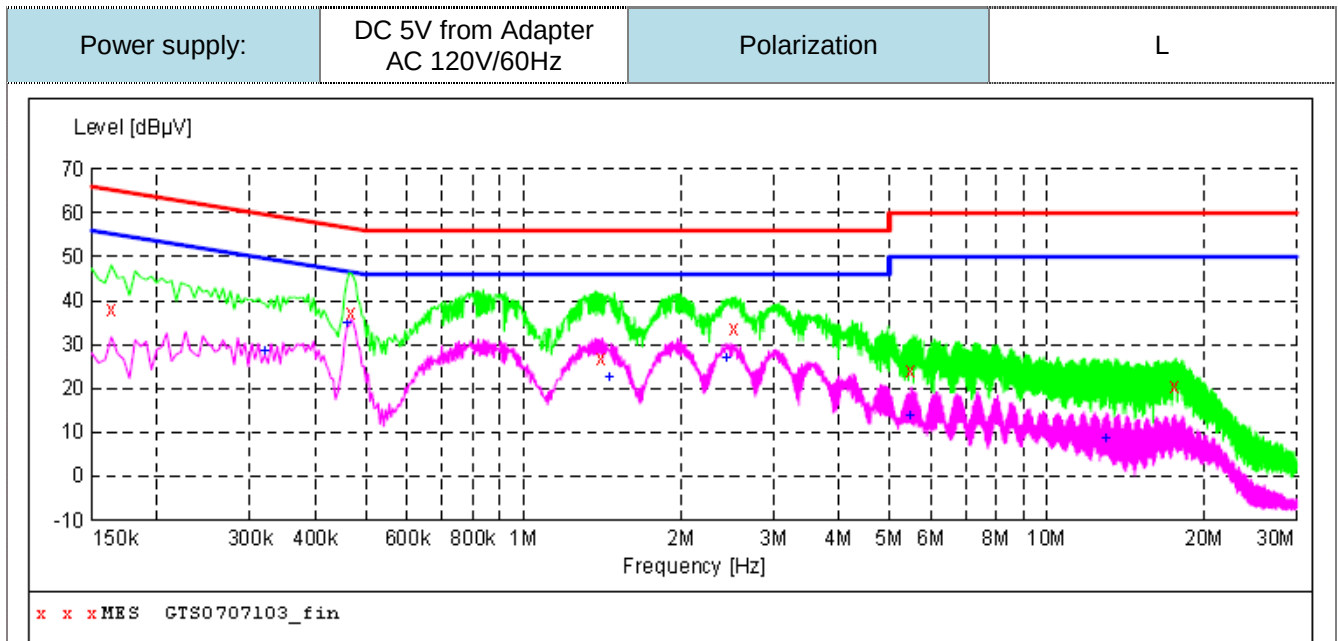
MEASUREMENT RESULT: "GTS0707103_fin"

7/7/2016 10:15AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.163500	38.00	10.0	65	27.3	QP	L1	GND
0.469500	37.40	9.8	57	19.1	QP	L1	GND
1.405500	26.70	9.6	56	29.3	QP	L1	GND
2.535000	33.80	9.5	56	22.2	QP	L1	GND
5.518500	24.00	9.2	60	36.0	QP	L1	GND
17.610000	20.60	7.5	60	39.4	QP	L1	GND

MEASUREMENT RESULT: "GTS0707103_fin2"

7/7/2016 10:15AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.321000	28.40	9.9	50	21.3	AV	L1	GND
0.460500	34.80	9.8	47	11.9	AV	L1	GND
1.459500	22.40	9.6	46	23.6	AV	L1	GND
2.445000	27.00	9.5	46	19.0	AV	L1	GND
5.473500	13.80	9.3	50	36.2	AV	L1	GND
12.975000	8.50	8.4	50	41.5	AV	L1	GND

Power supply:

DC 5V from Adapter
AC 120V/60Hz

Polarization

N

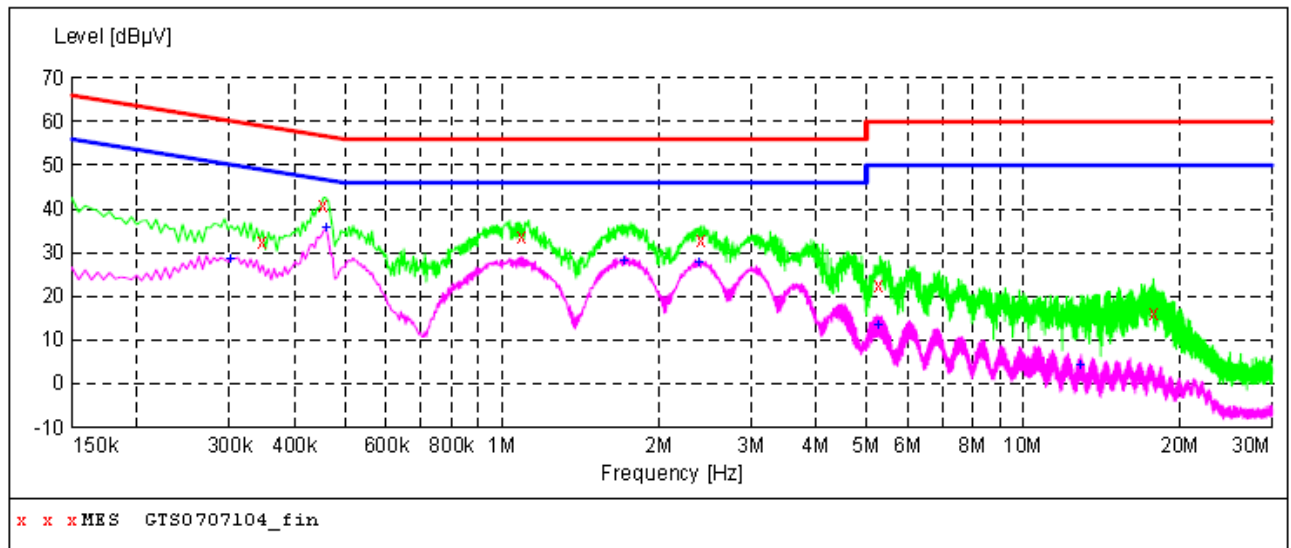**MEASUREMENT RESULT: "GTS0707104_fin"**

7/7/2016 10:18AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.348000	32.40	9.9	59	26.6	QP	N	GND
0.456000	40.90	9.8	57	15.9	QP	N	GND
1.095000	33.60	9.6	56	22.4	QP	N	GND
2.413500	32.90	9.5	56	23.1	QP	N	GND
5.284500	22.50	9.3	60	37.5	QP	N	GND
17.776500	16.10	7.5	60	43.9	QP	N	GND

MEASUREMENT RESULT: "GTS0707104_fin2"


7/7/2016 10:18AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.303000	28.50	9.9	50	21.7	AV	N	GND
0.460500	35.60	9.8	47	11.1	AV	N	GND
1.711500	28.10	9.5	46	17.9	AV	N	GND
2.395500	27.50	9.5	46	18.5	AV	N	GND
5.275500	13.30	9.3	50	36.7	AV	N	GND
12.876000	4.20	8.5	50	45.8	AV	N	GND


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

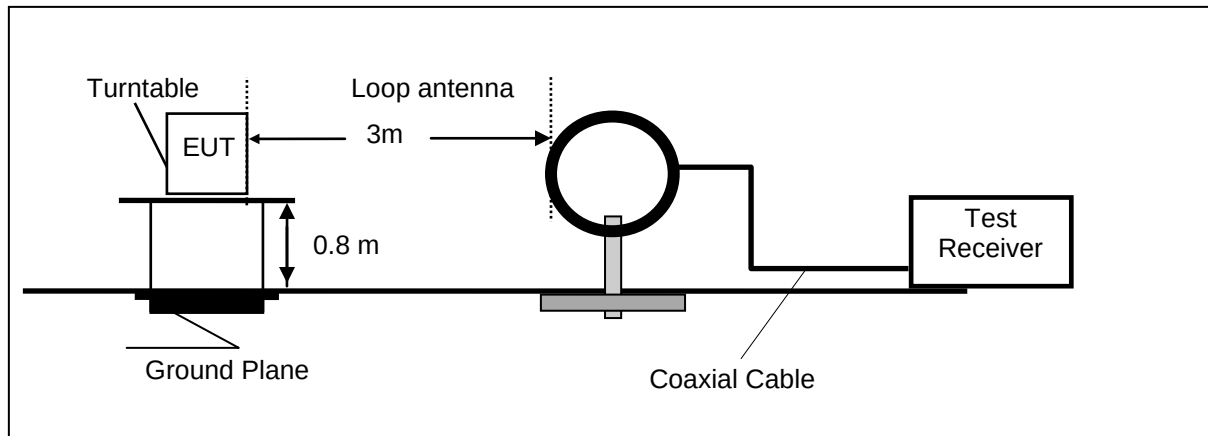

Frequency range 30MHz – 1000MHz

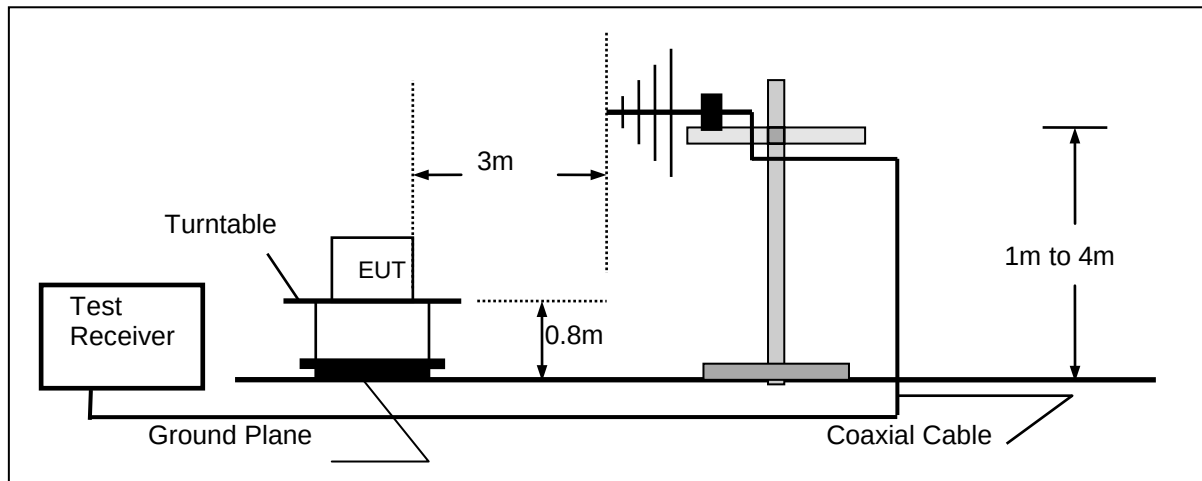

Frequency range above 1GHz-25GHz

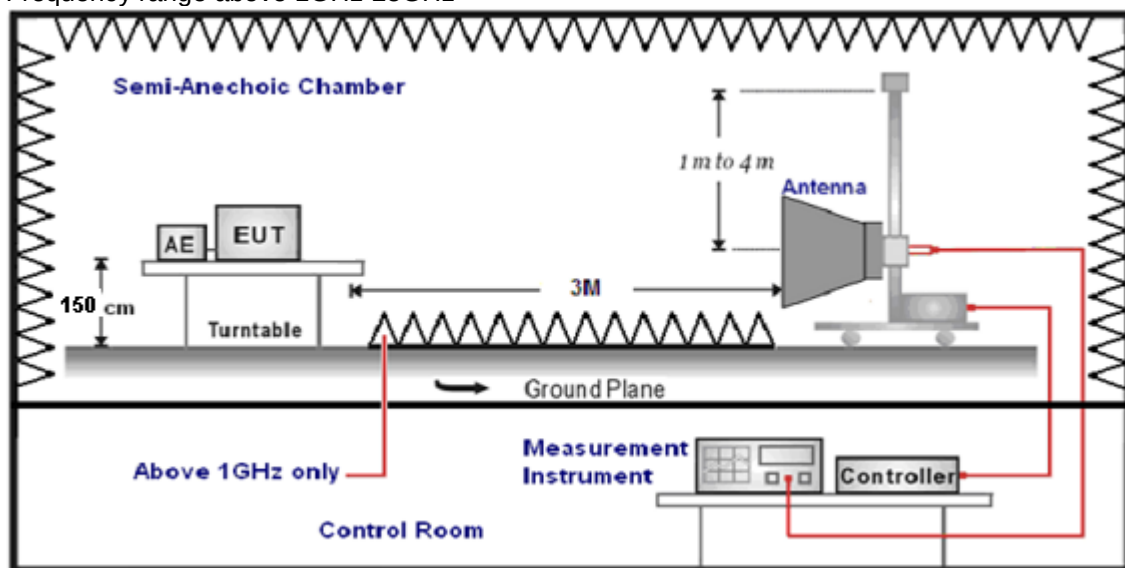

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd}=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.


Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark: Test site: Shenzhen CTL Testing Technology Co., Ltd.

For 9 KHz-30MHz

Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.36	47.28	96.48	49.20	QP	PASS
1.65	46.31	63.25	16.94	QP	PASS
20.51	46.24	69.54	23.30	QP	PASS
25.77	46.58	69.54	22.96	QP	PASS

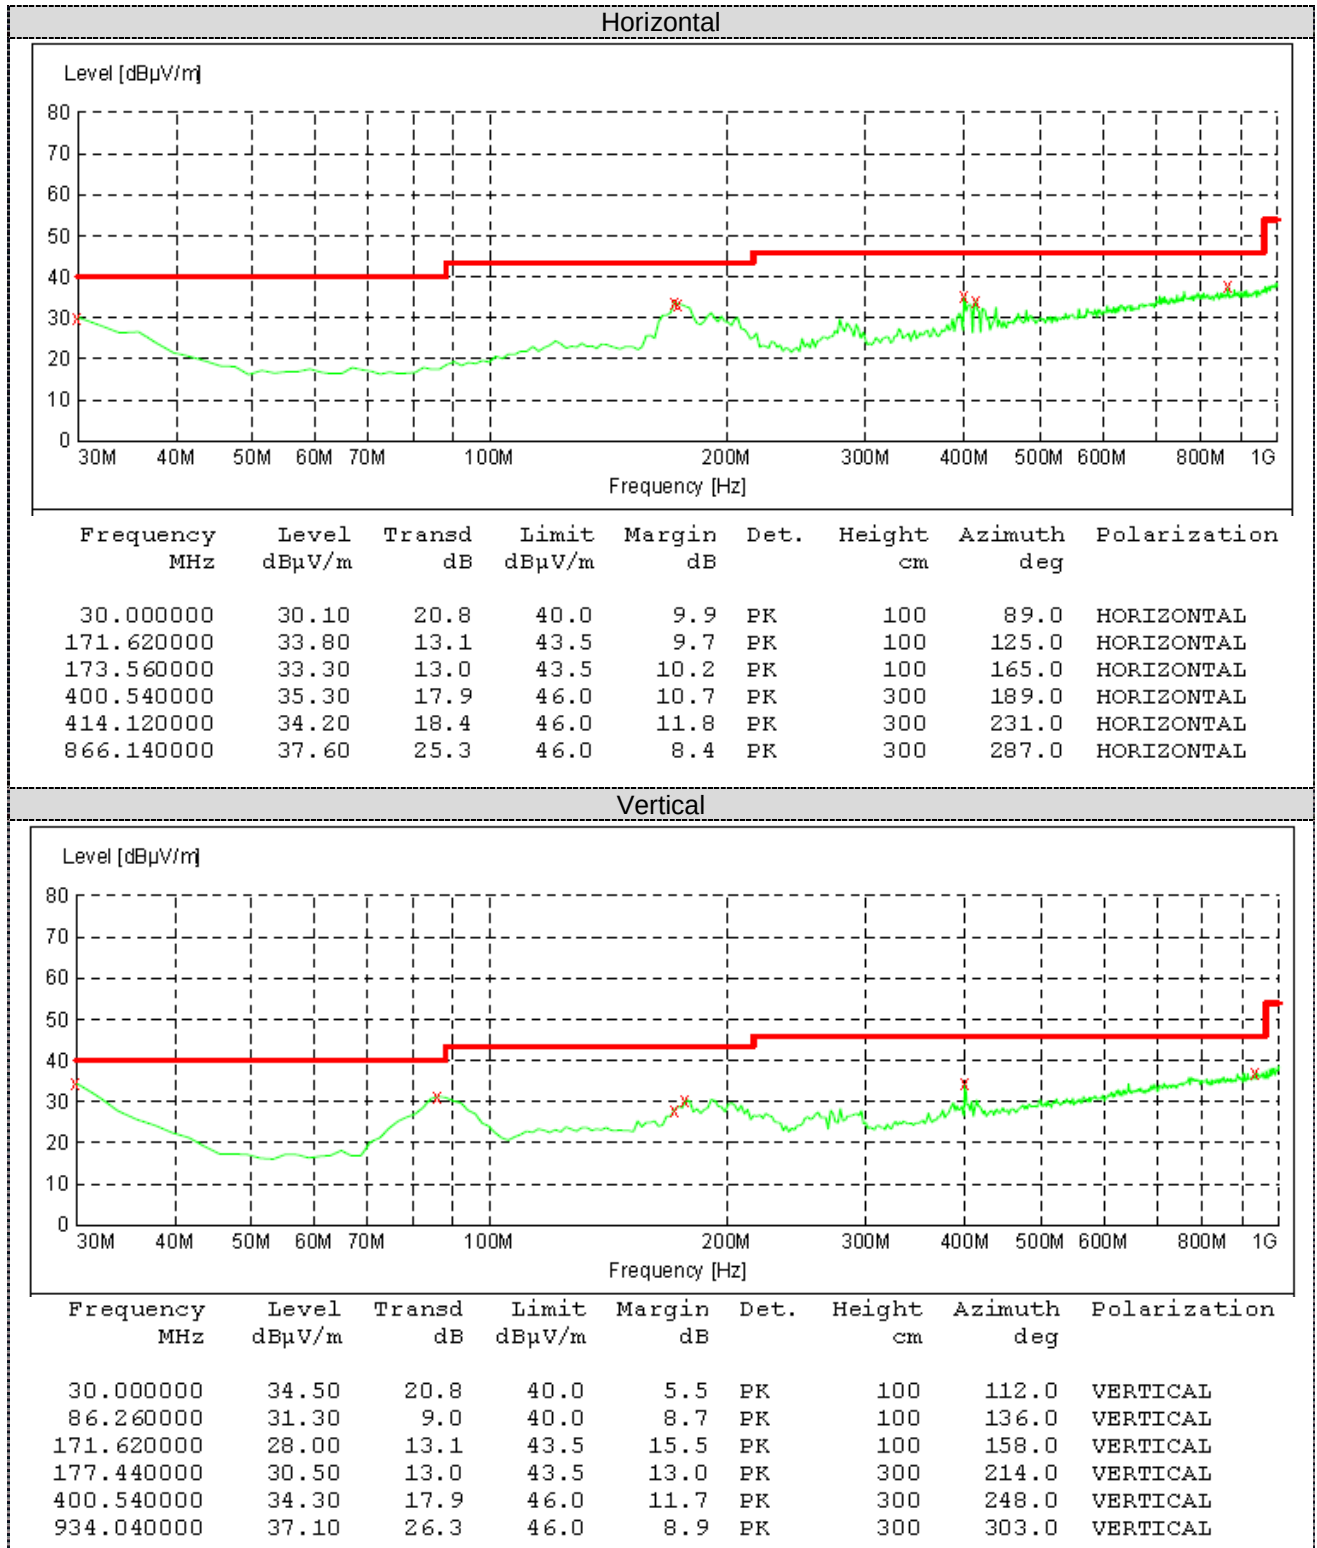For 30MHz-1GHz

For 1GHz to 25GHz

802.11b Mode (above 1GHz)

Frequency(MHz):				2412			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	58.42	PK	74	15.58	1.00	122	56.32	31.6	7.00	36.5	2.10
1	4824	45.21	AV	54	9.79	1.00	122	43.11	31.6	7.00	36.5	2.10
2	7236	54.54	PK	74	19.46	1.00	223	43.61	37.33	8.90	35.3	10.93
2	7236	42.55	AV	54	11.45	1.00	223	31.62	37.33	8.90	35.3	10.93

Frequency(MHz):				2412			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	58.42	PK	74	15.58	1.00	160	56.32	31.60	7.00	36.50	2.10
1	4824	46.21	AV	54	7.79	1.00	160	44.11	31.60	7.00	36.50	2.10
2	7236	55.21	PK	74	18.79	1.00	290	44.28	37.33	8.90	35.30	10.93
2	7236	42.89	AV	54	11.11	1.00	290	31.96	37.33	8.90	35.30	10.93

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	54.62	PK	74.00	19.38	1.00	180	52.50	31.02	7.60	36.5	2.12
1	4874.00	46.21	AV	54.00	7.79	1.00	180	44.09	31.02	7.60	36.5	2.12
2	7311.00	58.12	PK	74.00	15.88	1.00	250	47.04	37.28	8.60	34.8	11.08
2	7311.00	43.68	AV	54.00	10.32	1.00	250	32.60	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	57.21	PK	74.00	16.79	1.00	152	55.09	31.02	7.60	36.5	2.12
1	4874.00	45.12	AV	54.00	8.88	1.00	152	43.00	31.02	7.60	36.5	2.12
2	7311.00	58.15	PK	74.00	15.85	1.00	256	47.07	37.28	8.60	34.8	11.08
2	7311.00	46.31	AV	54.00	7.69	1.00	256	35.23	37.28	8.60	34.8	11.08

Frequency(MHz):				2462			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	58.13	PK	74.00	15.87	1.00	154	54.93	31.58	7.82	36.2	3.20
1	4924.00	42.41	AV	54.00	11.59	1.00	154	39.21	31.58	7.82	36.2	3.20
2	7386.00	56.89	PK	74.00	17.11	1.00	298	44.95	38.51	8.73	35.3	11.94
2	7386.00	45.29	AV	54.00	8.71	1.00	298	33.35	38.51	8.73	35.3	11.94

Frequency(MHz):				2462			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	59.21	PK	74.00	14.79	1.00	157	56.01	31.58	7.82	36.2	3.20
1	4924.00	46.89	AV	54.00	7.11	1.00	157	43.69	31.58	7.82	36.2	3.20
2	7386.00	59.21	PK	74.00	14.79	1.00	258	47.27	38.51	8.73	35.3	11.94
2	7386.00	46.81	AV	54.00	7.19	1.00	258	34.87	38.51	8.73	35.3	11.94

802.11g Mode (above 1GHz)

Frequency(MHz):				2412			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	54.21	PK	74	19.79	1.00	172	52.11	31.6	7.00	36.5	2.10
1	4824	46.18	AV	54	7.82	1.00	172	44.08	31.6	7.00	36.5	2.10
2	7236	59.41	PK	74	14.59	1.00	294	48.48	37.33	8.90	35.3	10.93
2	7236	42.17	AV	54	11.83	1.00	294	31.24	37.33	8.90	35.3	10.93

Frequency(MHz):				2412			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	58.12	PK	74	15.88	1.00	192	56.02	31.60	7.00	36.50	2.10
1	4824	49.15	AV	54	4.85	1.00	192	47.05	31.60	7.00	36.50	2.10
2	7236	59.71	PK	74	14.29	1.00	264	48.78	37.33	8.90	35.30	10.93
2	7236	49.20	AV	54	4.80	1.00	264	38.27	37.33	8.90	35.30	10.93

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	58.41	PK	74.00	15.59	1.00	98	56.29	31.02	7.60	36.5	2.12
1	4874.00	48.21	AV	54.00	5.79	1.00	98	46.09	31.02	7.60	36.5	2.12
2	7311.00	59.62	PK	74.00	14.38	1.00	320	48.54	37.28	8.60	34.8	11.08
2	7311.00	48.21	AV	54.00	5.79	1.00	320	37.13	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	58.15	PK	74.00	15.85	1.00	93	56.03	31.02	7.60	36.5	2.12
1	4874.00	49.17	AV	54.00	4.83	1.00	93	47.05	31.02	7.60	36.5	2.12
2	7311.00	56.54	PK	74.00	17.46	1.00	198	45.46	37.28	8.60	34.8	11.08
2	7311.00	43.18	AV	54.00	10.82	1.00	198	32.07	37.28	8.60	34.8	11.08

Frequency(MHz):				2462			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	52.14	PK	74.00	21.86	1.00	132	48.94	31.58	7.82	36.2	3.20
1	4924.00	46.81	AV	54.00	7.19	1.00	132	43.61	31.58	7.82	36.2	3.20
2	7386.00	53.19	PK	74.00	20.81	1.00	295	20.81	38.51	8.73	35.3	11.94
2	7386.00	42.83	AV	54.00	11.62	1.00	295	11.17	38.51	8.73	35.3	11.94

Frequency(MHz):				2462			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	54.05	PK	74.00	19.95	1.00	183	50.85	31.58	7.82	36.2	3.20
1	4924.00	49.05	AV	54.00	4.95	1.00	183	45.85	31.58	7.82	36.2	3.20
2	7386.00	52.40	PK	74.00	21.60	1.00	324	40.46	38.51	8.73	35.3	11.94
2	7386.00	41.97	AV	54.00	12.03	1.00	324	30.03	38.51	8.73	35.3	11.94

802.11n HT20 Mode (above 1GHz)

Frequency(MHz):				2412			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	56.18	PK	74	17.82	1.00	95	54.08	31.6	7.00	36.5	2.10
1	4824	43.55	AV	54	10.45	1.00	95	41.45	31.6	7.00	36.5	2.10
2	7236	51.61	PK	74	22.39	1.00	341	40.68	37.33	8.90	35.3	10.93
2	7236	41.65	AV	54	12.35	1.00	341	30.72	37.33	8.90	35.3	10.93

Frequency(MHz):				2412			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	54.21	PK	74	19.79	1.00	154	53.11	31.60	7.00	36.50	2.10
1	4824	42.13	AV	54	11.87	1.00	154	40.03	31.60	7.00	36.50	2.10
2	7236	56.34	PK	74	17.66	1.00	261	45.41	37.33	8.90	35.30	10.93
2	7236	42.98	AV	54	11.02	1.00	261	32.05	37.33	8.90	35.30	10.93

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	54.21	PK	74.00	28.79	1.00	139	52.09	31.02	7.60	36.5	2.12
1	4874.00	46.12	AV	54.00	7.88	1.00	139	44.00	31.02	7.60	36.5	2.12
2	7311.00	53.19	PK	74.00	20.81	1.00	265	42.11	37.28	8.60	34.8	11.08
2	7311.00	41.98	AV	54.00	12.02	1.00	265	30.9	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	54.32	PK	74.00	19.68	1.00	164	52.20	31.02	7.60	36.5	2.12
1	4874.00	43.19	AV	54.00	10.81	1.00	164	41.07	31.02	7.60	36.5	2.12
2	7311.00	56.42	PK	74.00	17.58	1.00	295	45.34	37.28	8.60	34.8	11.08
2	7311.00	42.19	AV	54.00	11.81	1.00	295	31.11	37.28	8.60	34.8	11.08

Frequency(MHz):				2462			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	54.21	PK	74.00	19.79	1.00	159	51.01	31.58	7.82	36.2	3.20
1	4924.00	42.98	AV	54.00	11.02	1.00	159	39.78	31.58	7.82	36.2	3.20
2	7386.00	56.12	PK	74.00	17.88	1.00	264	44.18	38.51	8.73	35.3	11.94
2	7386.00	42.59	AV	54.00	11.41	1.00	264	30.65	38.51	8.73	35.3	11.94

Frequency(MHz):				2462			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	56.21	PK	74.00	17.79	1.00	168	53.01	31.58	7.82	36.2	3.20
1	4924.00	42.19	AV	54.00	11.81	1.00	168	38.99	31.58	7.82	36.2	3.20
2	7386.00	58.16	PK	74.00	15.84	1.00	239	45.22	38.51	8.73	35.3	11.94
2	7386.00	46.16	AV	54.00	7.84	1.00	239	34.22	38.51	8.73	35.3	11.94

802.11n HT40 Mode (above 1GHz)

Frequency(MHz):				2422			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4844	52.52	PK	74	21.48	1.00	97	50.38	31.62	7.02	36.5	2.14
1	4844	41.21	AV	54	12.79	1.00	97	39.07	31.62	7.02	36.5	2.14
2	7266	53.26	PK	74	20.74	1.00	138	42.31	37.35	8.93	35.3	10.98
2	7266	41.75	AV	54	12.25	1.00	138	30.77	37.35	8.93	35.3	10.98

Frequency(MHz):				2422			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4844	57.36	PK	74	16.64	1.00	116	55.22	31.62	7.02	36.5	2.14
1	4844	42.51	AV	54	11.49	1.00	116	40.37	31.62	7.02	36.5	2.14
2	7266	49.66	PK	74	24.34	1.00	185	38.68	37.35	8.93	35.3	10.98
2	7266	41.33	AV	54	12.67	1.00	185	30.35	37.35	8.93	35.3	10.98

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	52.61	PK	74.00	21.39	1.00	72	50.49	31.02	7.60	36.5	2.12
1	4874.00	42.36	AV	54.00	11.64	1.00	72	40.24	31.02	7.60	36.5	2.12
2	7311.00	51.26	PK	74.00	22.74	1.00	166	40.18	37.28	8.60	34.8	11.08
2	7311.00	41.20	AV	54.00	12.80	1.00	166	30.12	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	55.24	PK	74.00	18.76	1.00	169	53.12	31.02	7.60	36.5	2.12
1	4874.00	43.67	AV	54.00	10.33	1.00	169	41.55	31.02	7.60	36.5	2.12
2	7311.00	51.29	PK	74.00	22.71	1.00	234	40.21	37.28	8.60	34.8	11.08
2	7311.00	42.37	AV	54.00	11.63	1.00	234	31.29	37.28	8.60	34.8	11.08

Frequency(MHz):				2452			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4904.00	54.66	PK	74.00	19.34	1.00	121	51.51	31.55	7.80	36.2	3.15
1	4904.00	43.41	AV	54.00	10.59	1.00	121	40.26	31.55	7.80	36.2	3.15
2	7356.00	52.32	PK	74.00	21.68	1.00	223	40.46	38.47	8.69	35.3	11.86
2	7356.00	41.87	AV	54.00	12.13	1.00	223	30.01	38.47	8.69	35.3	11.86


Frequency(MHz):				2452			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4904.00	56.61	PK	74.00	17.39	1.00	169	53.46	31.55	7.80	36.2	3.15
1	4904.00	43.17	AV	54.00	10.83	1.00	169	40.02	31.55	7.80	36.2	3.15
2	7356.00	51.78	PK	74.00	22.22	1.00	265	39.92	38.47	8.69	35.3	11.86
2	7356.00	42.62	AV	54.00	11.38	1.00	265	30.76	38.47	8.69	35.3	11.86

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power, 9.1.1. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

LIMIT


The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS

Type	Channel	Output power PK (dBm)	Output power AV (dBm)	Limit (dBm)	Result
802.11b	01	9.14	7.21	30.00	Pass
	06	9.43	7.51		
	11	9.59	7.77		
802.11g	01	9.21	6.67	30.00	Pass
	06	9.86	6.35		
	11	9.62	6.92		
802.11n(HT20)	01	9.06	5.17	30.00	Pass
	06	9.24	5.58		
	11	9.40	5.01		
802.11n(HT40)	03	5.55	2.11	30.00	Pass
	06	5.92	2.46		
	09	5.47	2.17		


Note: 1. The test results including the cable lose.

Duty cycle used in all test items: 100%

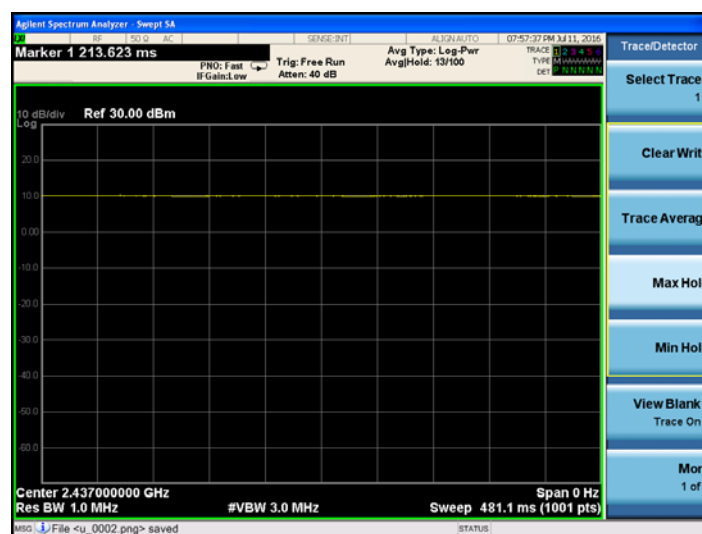

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 V03 Method PKPSD (peak PSD) This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST RESULTS

Type	Channel	Power Spectral Density (dBm/100KHz)	Limit (dBm/3KHz)	Result
802.11b	01	4.32	8.00	Pass
	06	4.82		
	11	5.02		
802.11g	01	-1.26	8.00	Pass
	06	-0.86		
	11	-0.60		
802.11n(HT20)	01	-1.10	8.00	Pass
	06	-1.14		
	11	-0.63		
802.11n(HT40)	03	-5.83	8.00	Pass
	06	-5.71		
	09	-5.56		


802.11b

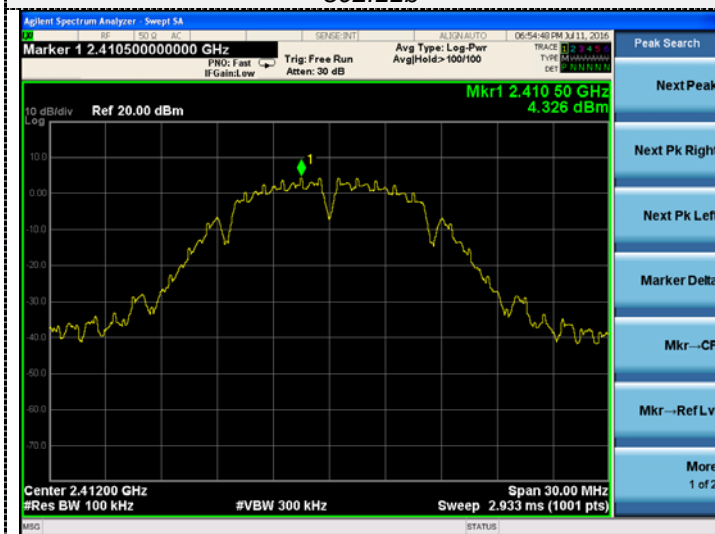


802.11g

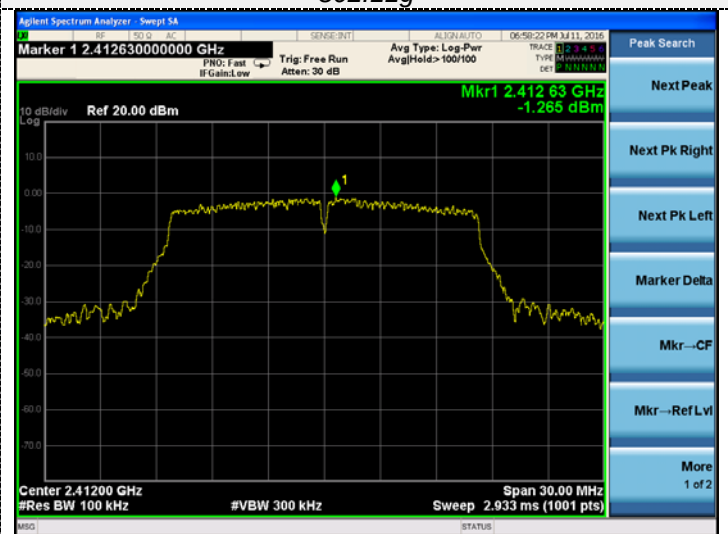

CH01

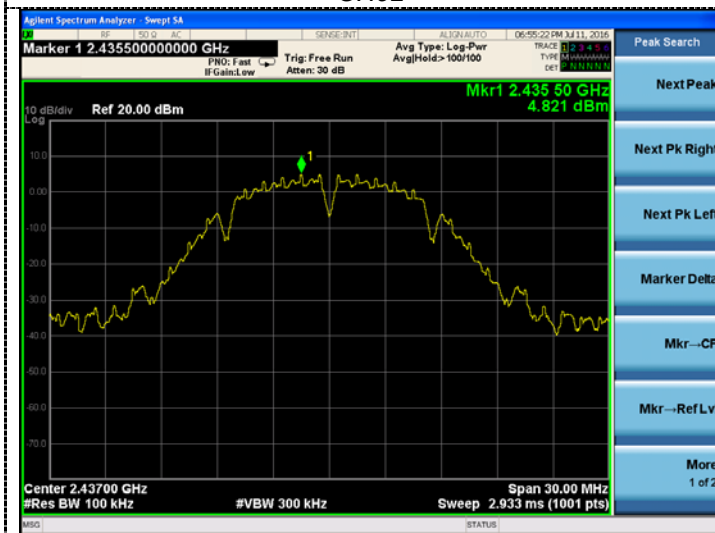


CH01

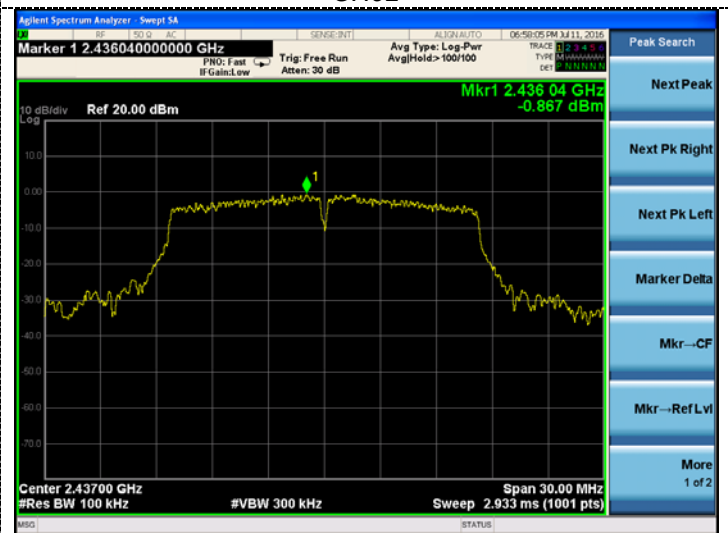

CH06



CH06

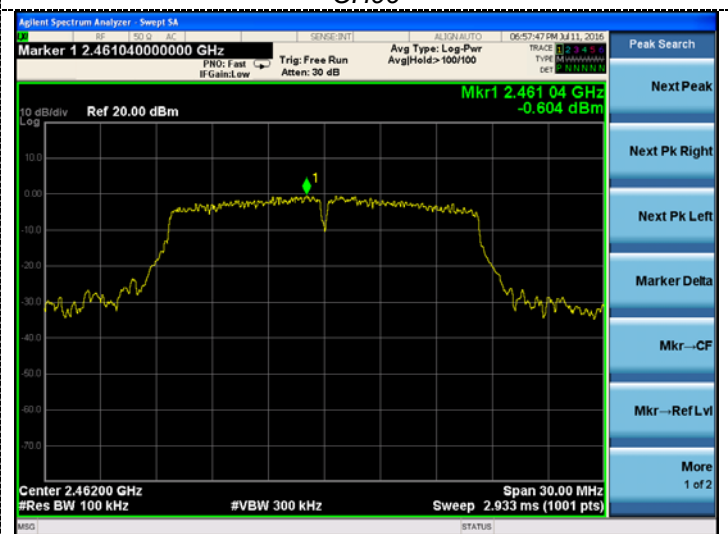


CH11




CH11




802.11nHT20

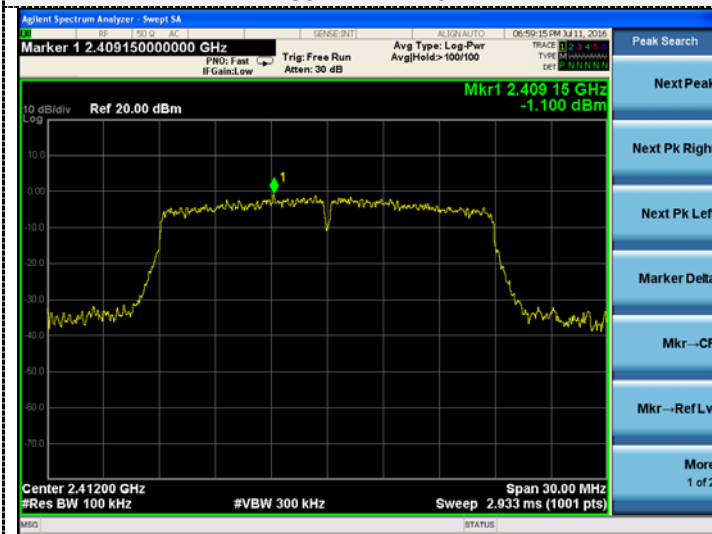


802.11nHT40

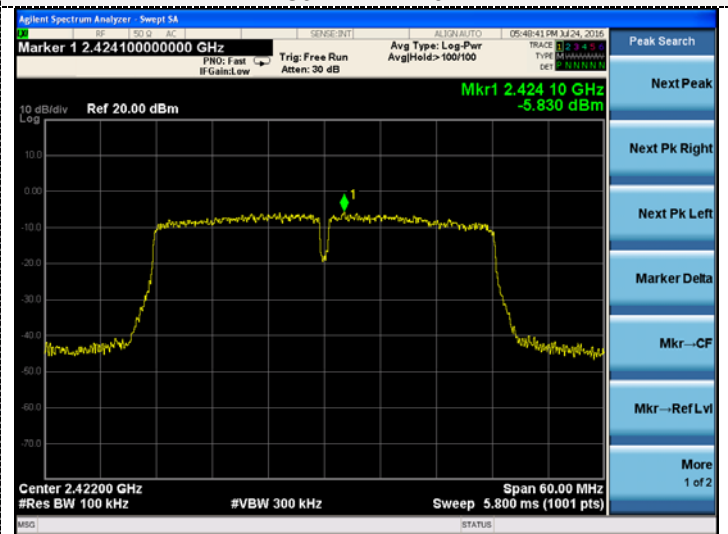


CH01

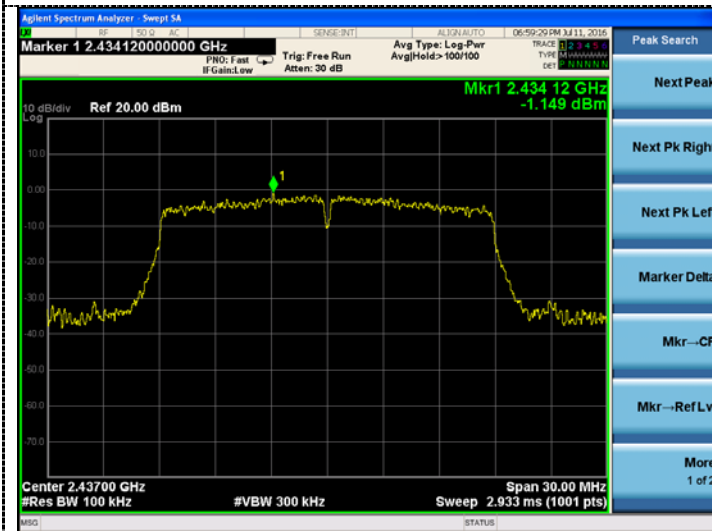


CH03

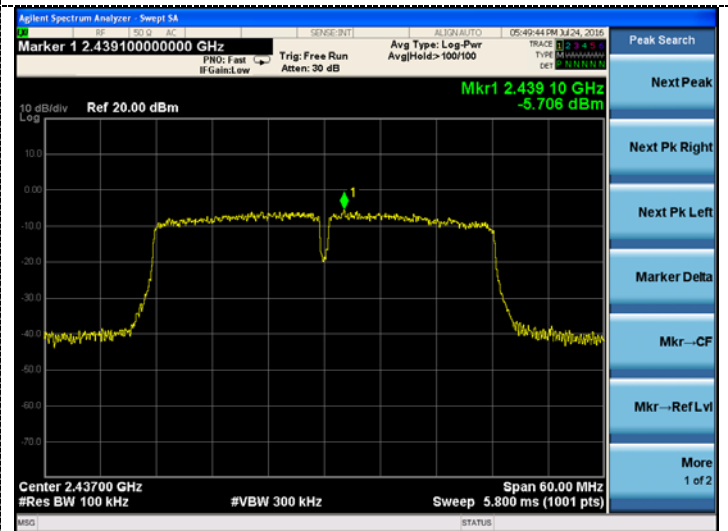

CH06

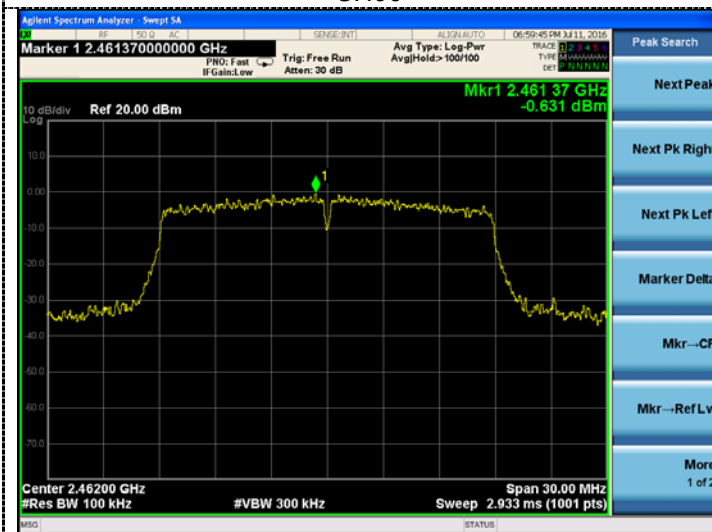

CH06

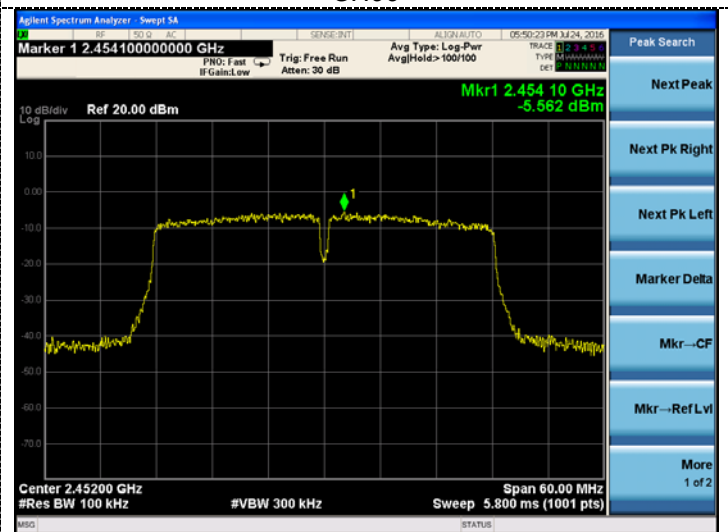


CH11

CH09

4.5. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz


TEST RESULTS

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	9.15	≥ 500	Pass
	06	9.46		
	11	9.47		
802.11g	01	16.39	≥ 500	Pass
	06	16.38		
	11	16.41		
802.11nHT20	01	17.60	≥ 500	Pass
	06	17.60		
	11	17.60		
802.11nHT40	03	36.35	≥ 500	Pass
	06	36.34		
	09	36.33		


802.11b

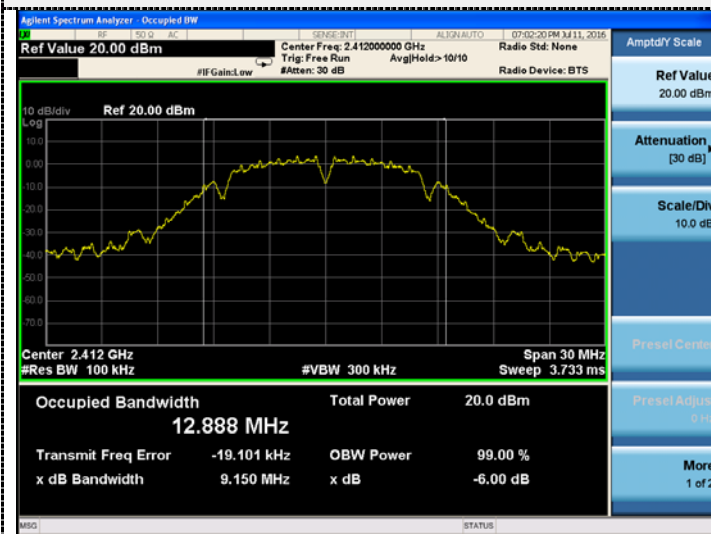


802.11g

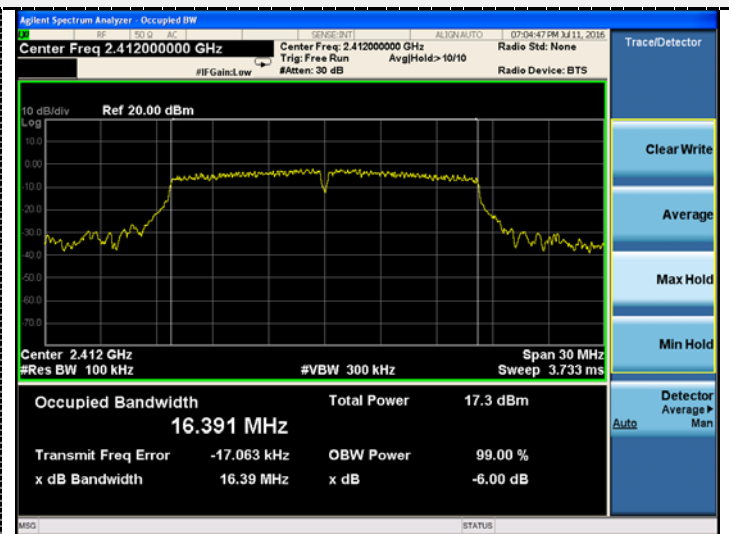


CH01

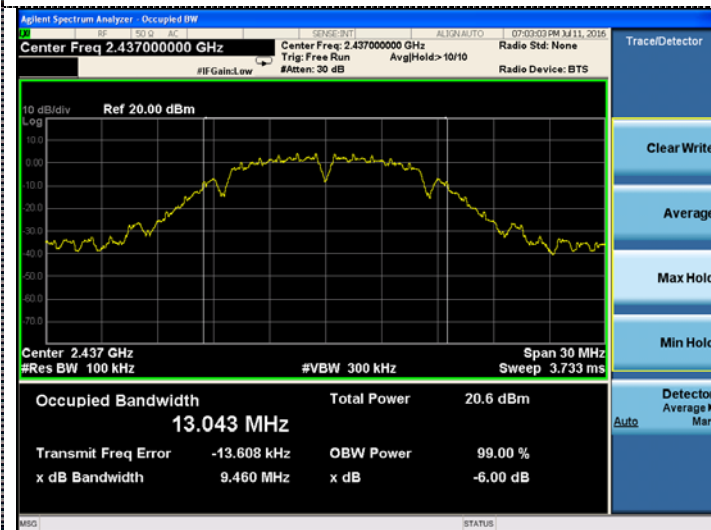


CH01

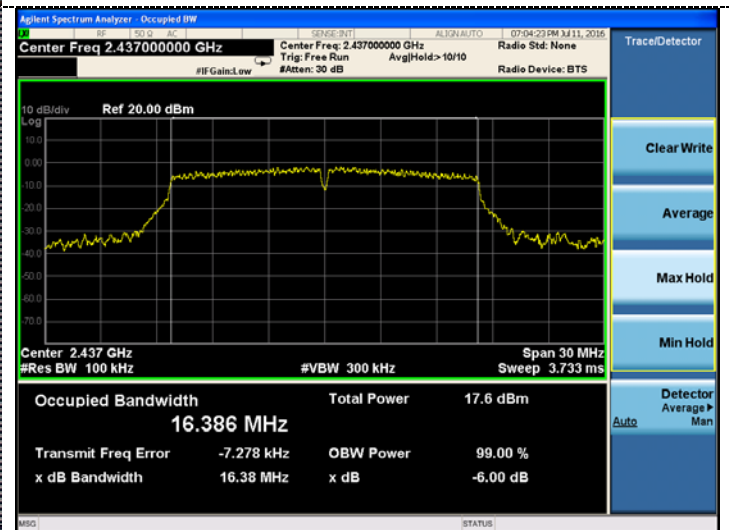

CH06

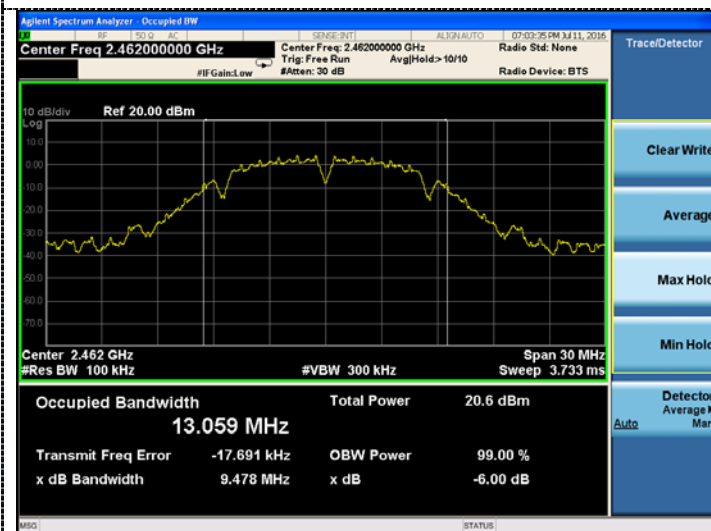


CH06

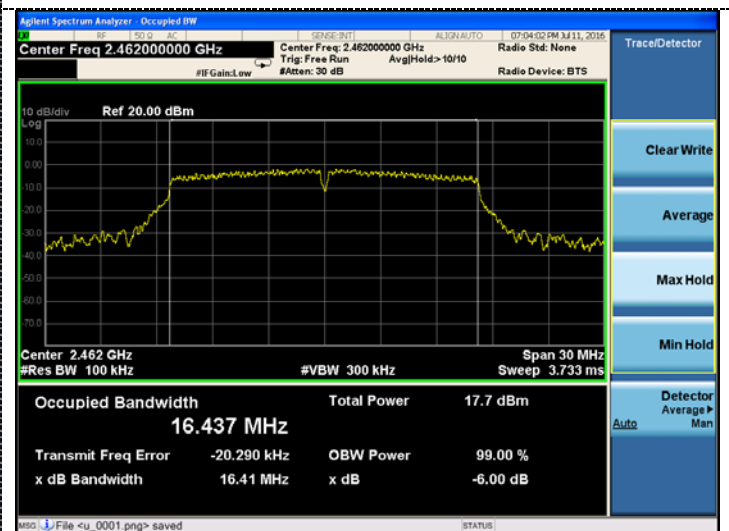


CH11

CH11


802.11n HT20

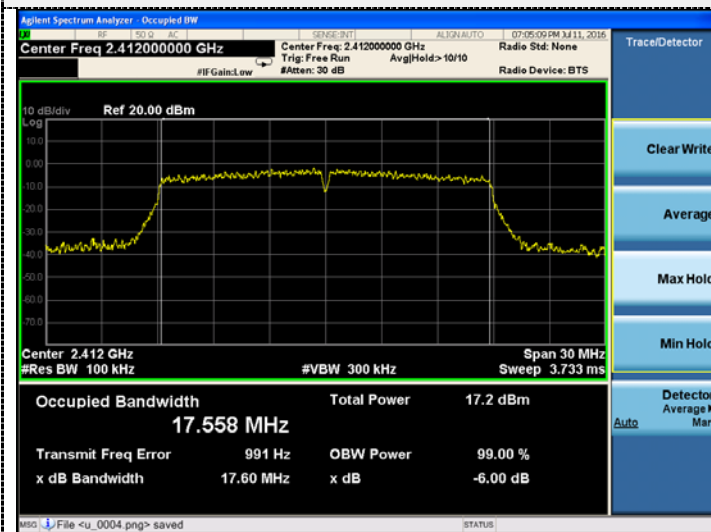


802.11n HT40

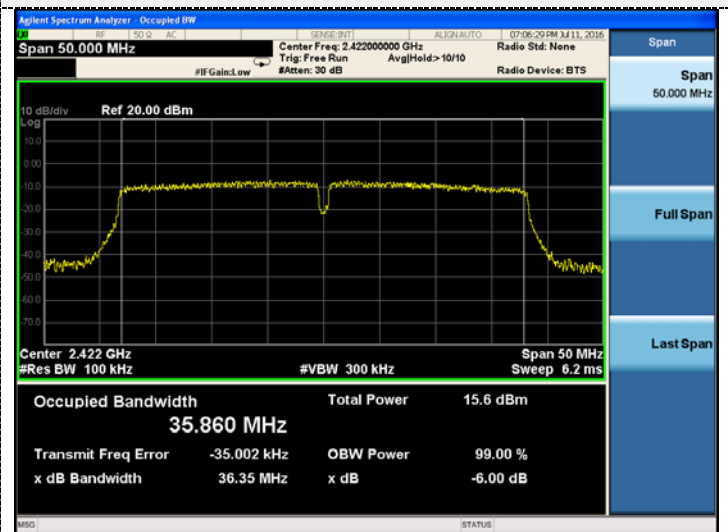


CH01

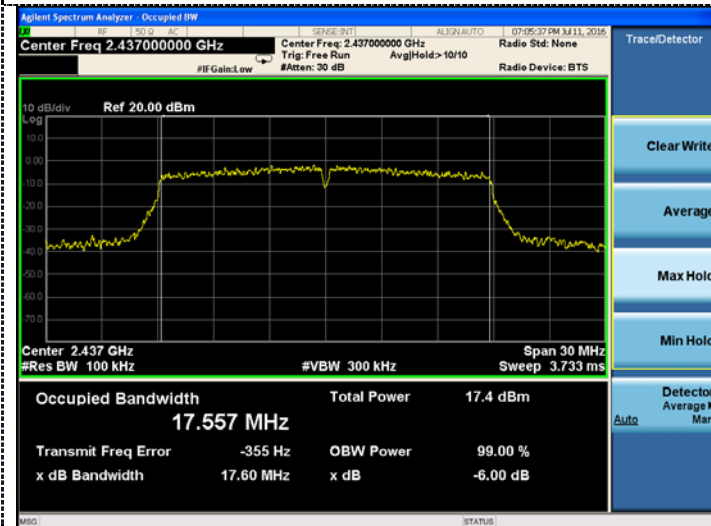


CH03

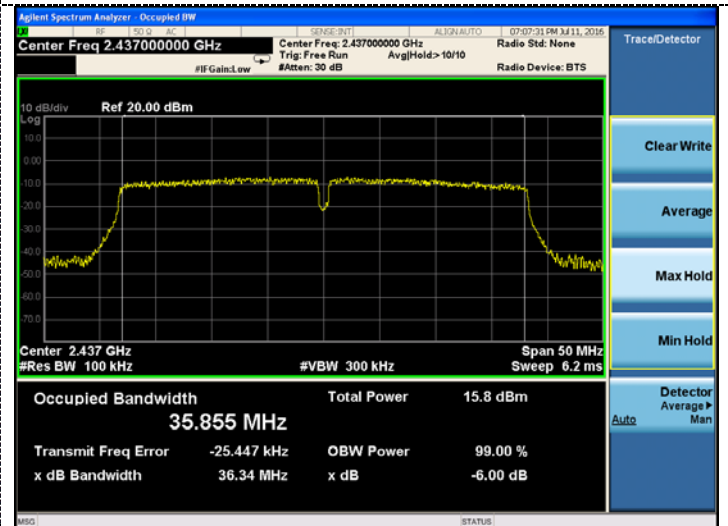

CH06

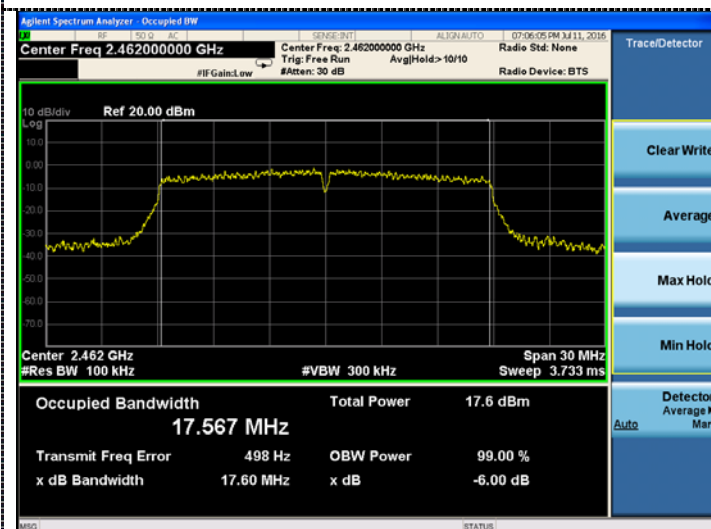

CH06

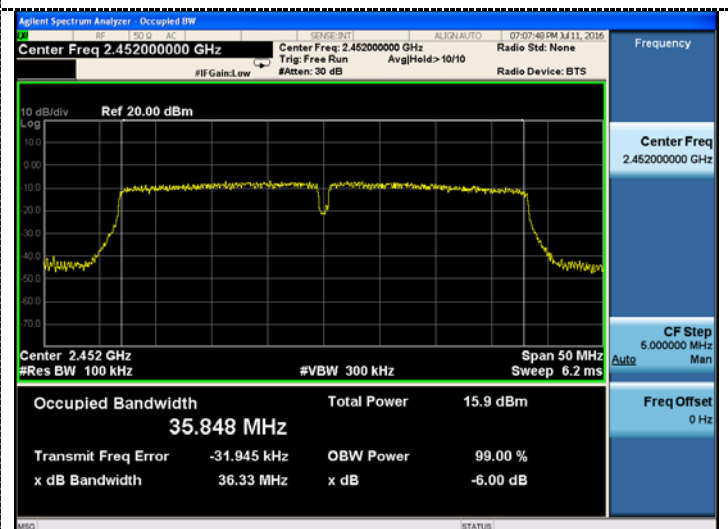

CH11

CH09

4.6. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

According to KDB 558074 D01 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test duress until all measured frequencies were complete.

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

TEST RESULTS

Remark: Test site: Shenzhen CTL Testing Technology Co., Ltd.

4.6.1 For Radiated Bandedge Measurement**802.11b**

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	53.19	PK	74.00	20.81	1.00	185	58.50	27.49	3.32	36.12	-5.31
2390.00	43.21	AV	54.00	10.79	1.00	185	48.52	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	54.98	PK	74.00	19.02	1.00	156	60.29	27.49	3.32	36.12	-5.31
2390.00	46.28	AV	54.00	7.72	1.00	156	51.59	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	56.27	PK	74.00	17.73	1.00	153	61.99	27.45	3.38	36.55	-5.72
2483.50	46.29	AV	54.00	7.71	1.00	153	52.01	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	53.19	PK	74.00	20.18	1.00	138	58.91	27.45	3.38	36.55	-5.72
2483.50	44.28	AV	54.00	9.72	1.00	138	50.00	27.45	3.38	36.55	-5.72

802.11g

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	56.18	PK	74.00	17.82	1.00	264	61.49	27.49	3.32	36.12	-5.31
2390.00	41.68	AV	54.00	12.32	1.00	264	46.99	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	56.17	PK	74.00	17.83	1.00	261	61.48	27.49	3.32	36.12	-5.31
2390.00	43.68	AV	54.00	10.32	1.00	261	48.99	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	53.21	PK	74.00	20.79	1.00	249	58.93	27.45	3.38	36.55	-5.72
2483.50	46.13	AV	54.00	7.87	1.00	249	51.85	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	51.68	PK	74.00	22.32	1.00	328	57.40	27.45	3.38	36.55	-5.72
2483.50	42.15	AV	54.00	11.85	1.00	328	47.87	27.45	3.38	36.55	-5.72



802.11n HT20

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	53.61	PK	74.00	20.39	1.00	349	58.92	27.49	3.32	36.12	-5.31
2390.00	42.67	AV	54.00	11.33	1.00	349	47.98	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	53.48	PK	74.00	20.52	1.00	138	58.79	27.49	3.32	36.12	-5.31
2390.00	43.21	AV	54.00	10.79	1.00	138	48.52	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	53.18	PK	74.00	20.82	1.00	264	58.90	27.45	3.38	36.55	-5.72
2483.50	42.19	AV	54.00	11.81	1.00	264	47.91	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	53.16	PK	74.00	20.84	1.00	138	58.88	27.45	3.38	36.55	-5.72
2483.50	46.28	AV	54.00	7.72	1.00	138	52.00	27.45	3.38	36.55	-5.72

802.11n HT40

Frequency(MHz):			2422			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	51.22	PK	74.00	22.78	1.00	78	56.53	27.49	3.32	36.12	-5.31
2390.00	41.62	AV	54.00	12.38	1.00	78	46.93	27.49	3.32	36.12	-5.31
Frequency(MHz):			2422			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	52.47	PK	74.00	21.53	1.00	164	57.78	27.49	3.32	36.12	-5.31
2390.00	42.36	AV	54.00	11.64	1.00	164	47.67	27.49	3.32	36.12	-5.31
Frequency(MHz):			2452			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	53.47	PK	74.00	20.53	1.00	221	59.19	27.45	3.38	36.55	-5.72
2483.50	43.19	AV	54.00	10.81	1.00	221	48.91	27.45	3.38	36.55	-5.72
Frequency(MHz):			2452			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	51.92	PK	74.00	22.08	1.00	152	57.64	27.45	3.38	36.55	-5.72
2483.50	42.56	AV	54.00	11.44	1.00	152	48.28	27.45	3.38	36.55	-5.72

4.6.2 For Conducted Bandedge Measurement

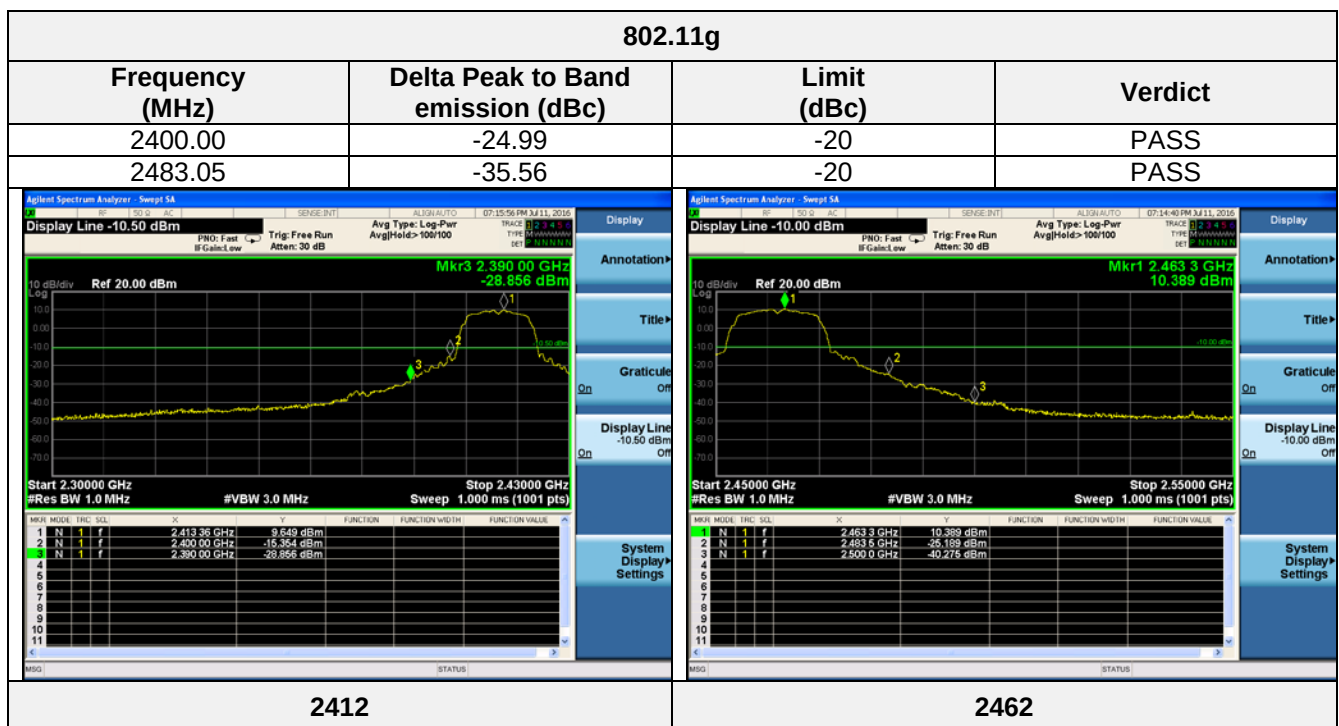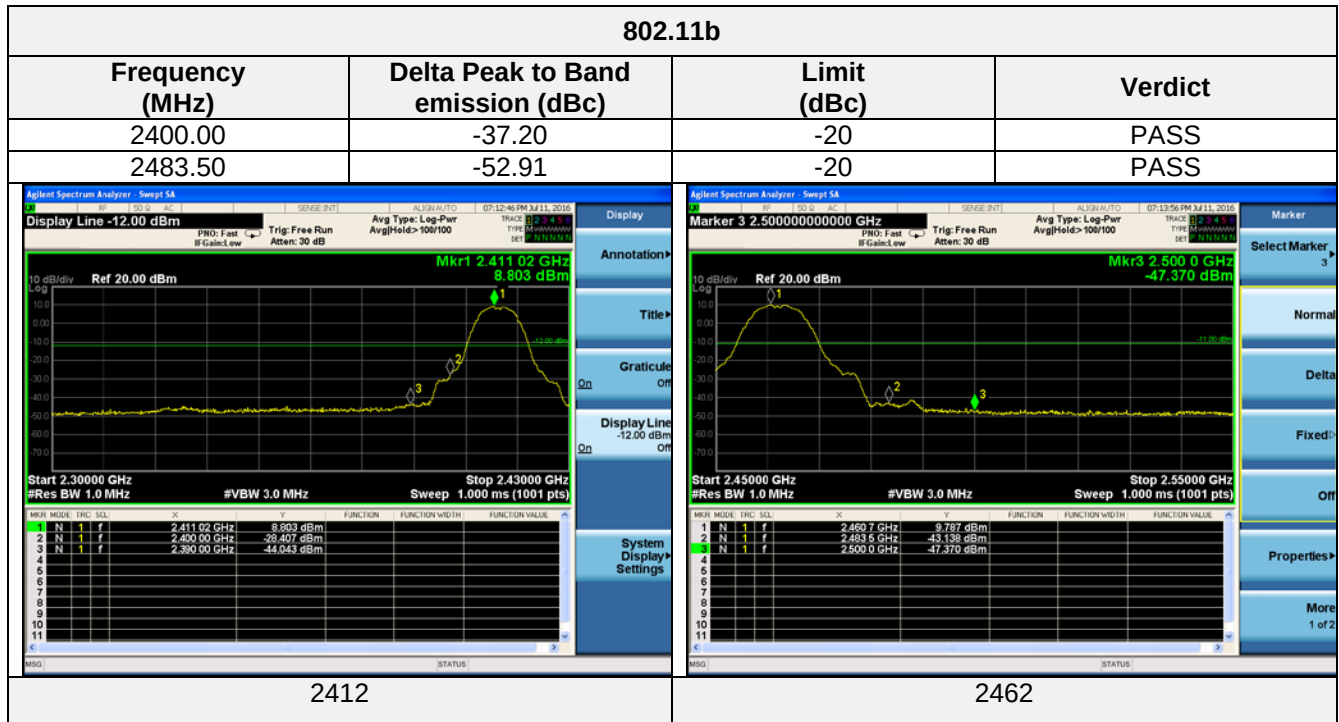

802.11n HT20

Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2400.00	-25.72	-20	PASS
2483.50	-34.39	-20	PASS

Marker	Freq (GHz)	Power (dBm)
1	2412.63	9.101
2	2400.00	-16.629
3	2390.00	-26.599

2412

Marker	Freq (GHz)	Power (dBm)
1	2460.7	9.736
2	2483.5	-24.663
3	2500.0	-38.735

2462

802.11n HT40

Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2400.00	-31.53	-20	PASS
2483.50	-33.81	-20	PASS

Marker	Freq (GHz)	Power (dBm)
1	2419.85	5.004
2	2400.00	-26.537
3	2390.00	-29.016


2422

Marker	Freq (GHz)	Power (dBm)
1	2446.68	4.965
2	2483.50	-28.852
3	2500.00	-32.815

2452

4.7. Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 9KHz to 25GHz.

LIMIT











1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

TEST RESULTS

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

Test Mode:	802.11b	Test channel :	01								
Agilent Spectrum Analyzer - Swept SA Marker 1 2.411490000000 GHz PRF: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 07:25:04 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 2.411 49 GHz 4.770 dBm Center 2.41200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms (1001 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 Channel 01 <tr><td colspan="4"> Agilent Spectrum Analyzer - Swept SA Marker 1 608.820000 kHz PRF: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 07:26:02 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 609 kHz -45.733 dBm Start 9 kHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.867 ms (1001 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 9KHz~30MHz <tr><td colspan="4"> Agilent Spectrum Analyzer - Swept SA Marker 1 233.700000000 MHz PRF: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 22/100 07:26:10 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 233.70 MHz -59.292 dBm Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.73 ms (1001 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 30M Hz~1GHz </td></tr></td></tr>				Agilent Spectrum Analyzer - Swept SA Marker 1 608.820000 kHz PRF: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 07:26:02 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 609 kHz -45.733 dBm Start 9 kHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.867 ms (1001 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 9KHz~30MHz <tr><td colspan="4"> Agilent Spectrum Analyzer - Swept SA Marker 1 233.700000000 MHz PRF: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 22/100 07:26:10 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 233.70 MHz -59.292 dBm Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.73 ms (1001 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 30M Hz~1GHz </td></tr>				Agilent Spectrum Analyzer - Swept SA Marker 1 233.700000000 MHz PRF: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 22/100 07:26:10 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 233.70 MHz -59.292 dBm Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.73 ms (1001 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 30M Hz~1GHz			
Agilent Spectrum Analyzer - Swept SA Marker 1 608.820000 kHz PRF: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 07:26:02 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 609 kHz -45.733 dBm Start 9 kHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.867 ms (1001 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 9KHz~30MHz <tr><td colspan="4"> Agilent Spectrum Analyzer - Swept SA Marker 1 233.700000000 MHz PRF: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 22/100 07:26:10 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 233.70 MHz -59.292 dBm Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.73 ms (1001 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 30M Hz~1GHz </td></tr>				Agilent Spectrum Analyzer - Swept SA Marker 1 233.700000000 MHz PRF: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 22/100 07:26:10 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 233.70 MHz -59.292 dBm Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.73 ms (1001 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 30M Hz~1GHz							
Agilent Spectrum Analyzer - Swept SA Marker 1 233.700000000 MHz PRF: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 22/100 07:26:10 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 233.70 MHz -59.292 dBm Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.73 ms (1001 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 30M Hz~1GHz											

Test Mode:	802.11b	Test channel :	01
Agilent Spectrum Analyzer - Swept SA Marker 1 2.414000000000 GHz PRO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 4/100 07:26:18 PM Jul 11, 2016 TRACE 1 2 3 4 5 6 TYPE M Vectorscope DET P NORM LVL 10 dB/div Log Ref 20.00 dBm Mkr1 2.414 GHz 4.649 dBm Start 1.000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 8.000 GHz Sweep 669.0 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2			
1G Hz~8GHz			
Agilent Spectrum Analyzer - Swept SA Marker 1 12.792000000000 GHz PRO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 3/100 07:26:22 PM Jul 11, 2016 TRACE 1 2 3 4 5 6 TYPE M Vectorscope DET P NORM LVL 10 dB/div Log Ref 20.00 dBm Mkr1 12.792 GHz -54.251 dBm Start 8.000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 16.000 GHz Sweep 764.6 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2			
8GHz~16GHz			
Agilent Spectrum Analyzer - Swept SA Marker 1 24.505000000000 GHz PRO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 3/100 07:26:36 PM Jul 11, 2016 TRACE 1 2 3 4 5 6 TYPE M Vectorscope DET P NORM LVL 10 dB/div Log Ref 20.00 dBm Mkr1 24.505 GHz -47.153 dBm Start 16.000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 25.000 GHz Sweep 860.1 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2			
16Gz~25GHz			

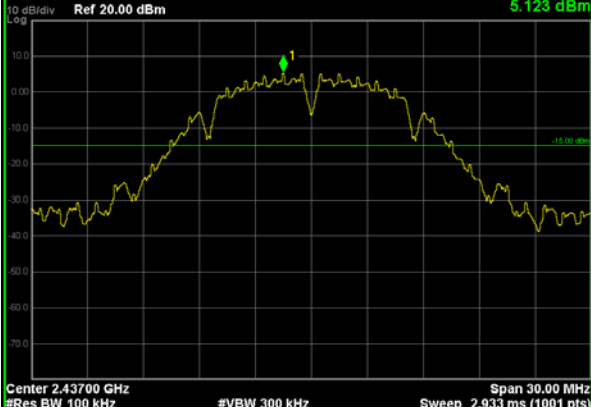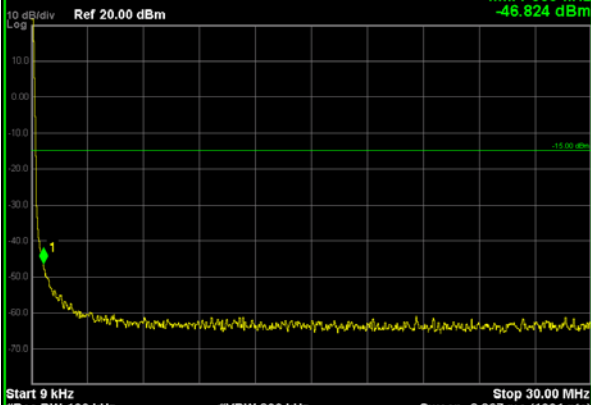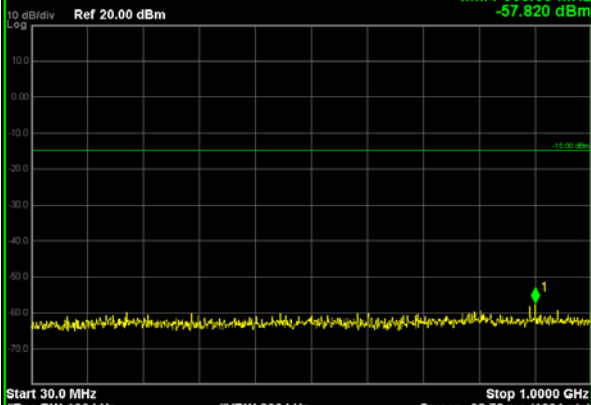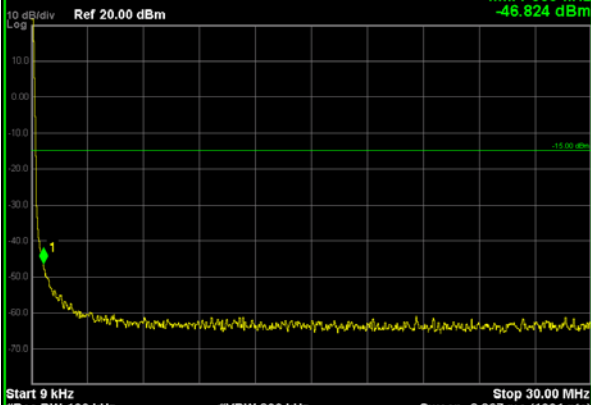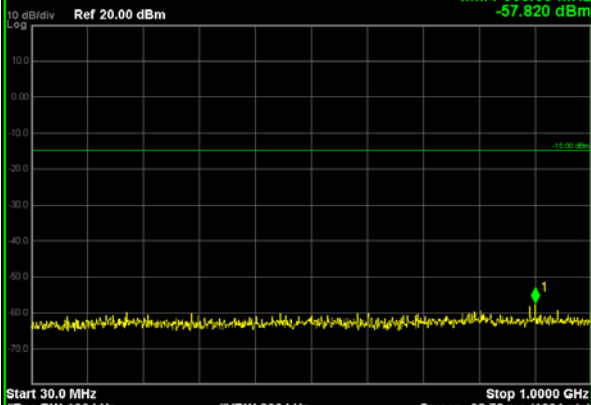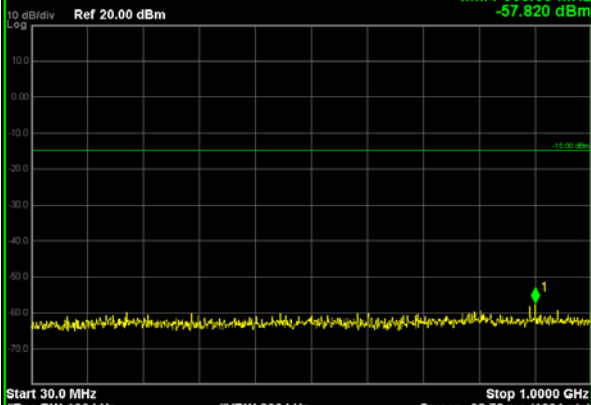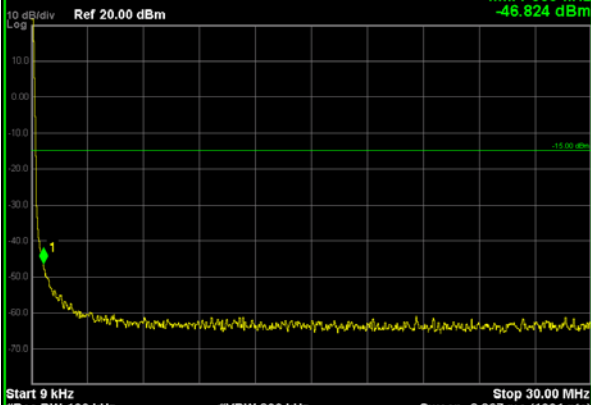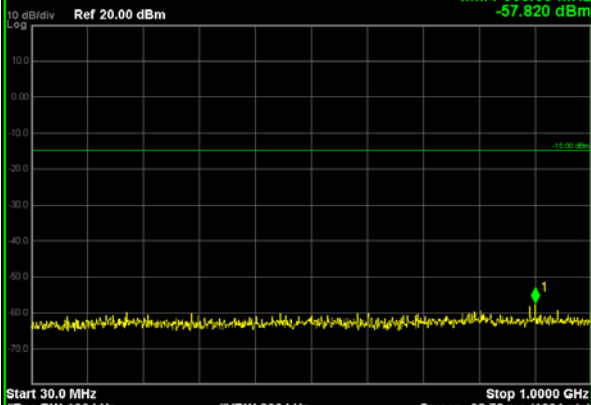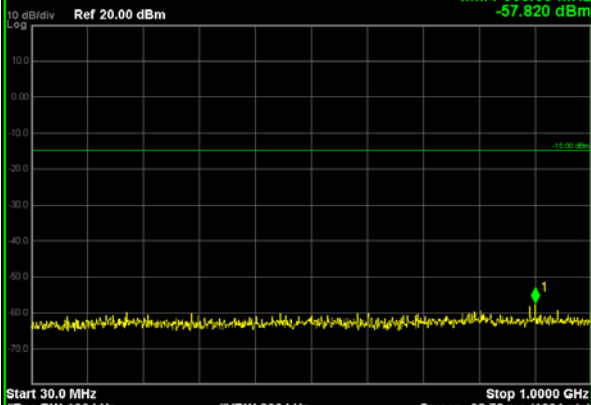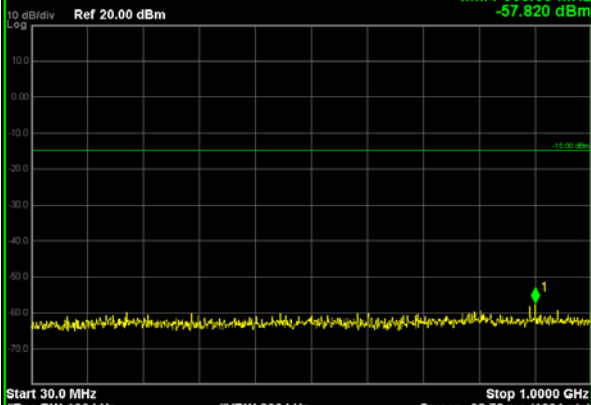Test Mode:	802.11b	Test channel :	06																				
Agilent Spectrum Analyzer - Swept SA Display Line -15.00 dBm PRN: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 07:27:10 PM Jul 11, 2016 TRACE 1 3 4 5 6 TYPE M VAWWWWWWW DET P NENNNNN 10 dB/div Log Ref 20.00 dBm Mkr1 2.435 50 GHz 5.123 dBm  Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms (1001 pts) STATUS Display Annotation▶ Title▶ Graticule On Off Display Line -15.00 dBm On Off System Display▶ Settings <tr><td colspan="4">Channel 06</td></tr><tr><td colspan="4"> Agilent Spectrum Analyzer - Swept SA Marker 1 668.802000 kHz PRN: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 07:27:23 PM Jul 11, 2016 TRACE 1 3 4 5 6 TYPE M VAWWWWWWW DET P NENNNNN 10 dB/div Log Ref 20.00 dBm Mkr1 668 kHz -46.824 dBm  Start 9 kHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.867 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 <tr><td colspan="4">9KHz~30MHz</td></tr><tr><td colspan="4"> Agilent Spectrum Analyzer - Swept SA Marker 1 903.000000000 MHz PRN: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 23/100 07:27:31 PM Jul 11, 2016 TRACE 1 3 4 5 6 TYPE M VAWWWWWWW DET P NENNNNN 10 dB/div Log Ref 20.00 dBm Mkr1 903.00 MHz -57.820 dBm  Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.73 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 <tr><td colspan="4">30M Hz~1GHz</td></tr> </td></tr> </td></tr>				Channel 06				Agilent Spectrum Analyzer - Swept SA Marker 1 668.802000 kHz PRN: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 07:27:23 PM Jul 11, 2016 TRACE 1 3 4 5 6 TYPE M VAWWWWWWW DET P NENNNNN 10 dB/div Log Ref 20.00 dBm Mkr1 668 kHz -46.824 dBm  Start 9 kHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.867 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 <tr><td colspan="4">9KHz~30MHz</td></tr><tr><td colspan="4"> Agilent Spectrum Analyzer - Swept SA Marker 1 903.000000000 MHz PRN: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 23/100 07:27:31 PM Jul 11, 2016 TRACE 1 3 4 5 6 TYPE M VAWWWWWWW DET P NENNNNN 10 dB/div Log Ref 20.00 dBm Mkr1 903.00 MHz -57.820 dBm  Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.73 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 <tr><td colspan="4">30M Hz~1GHz</td></tr> </td></tr>				9KHz~30MHz				Agilent Spectrum Analyzer - Swept SA Marker 1 903.000000000 MHz PRN: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 23/100 07:27:31 PM Jul 11, 2016 TRACE 1 3 4 5 6 TYPE M VAWWWWWWW DET P NENNNNN 10 dB/div Log Ref 20.00 dBm Mkr1 903.00 MHz -57.820 dBm  Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.73 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 <tr><td colspan="4">30M Hz~1GHz</td></tr>				30M Hz~1GHz			
Channel 06																							
Agilent Spectrum Analyzer - Swept SA Marker 1 668.802000 kHz PRN: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 07:27:23 PM Jul 11, 2016 TRACE 1 3 4 5 6 TYPE M VAWWWWWWW DET P NENNNNN 10 dB/div Log Ref 20.00 dBm Mkr1 668 kHz -46.824 dBm  Start 9 kHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.867 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 <tr><td colspan="4">9KHz~30MHz</td></tr><tr><td colspan="4"> Agilent Spectrum Analyzer - Swept SA Marker 1 903.000000000 MHz PRN: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 23/100 07:27:31 PM Jul 11, 2016 TRACE 1 3 4 5 6 TYPE M VAWWWWWWW DET P NENNNNN 10 dB/div Log Ref 20.00 dBm Mkr1 903.00 MHz -57.820 dBm  Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.73 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 <tr><td colspan="4">30M Hz~1GHz</td></tr> </td></tr>				9KHz~30MHz				Agilent Spectrum Analyzer - Swept SA Marker 1 903.000000000 MHz PRN: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 23/100 07:27:31 PM Jul 11, 2016 TRACE 1 3 4 5 6 TYPE M VAWWWWWWW DET P NENNNNN 10 dB/div Log Ref 20.00 dBm Mkr1 903.00 MHz -57.820 dBm  Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.73 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 <tr><td colspan="4">30M Hz~1GHz</td></tr>				30M Hz~1GHz											
9KHz~30MHz																							
Agilent Spectrum Analyzer - Swept SA Marker 1 903.000000000 MHz PRN: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 23/100 07:27:31 PM Jul 11, 2016 TRACE 1 3 4 5 6 TYPE M VAWWWWWWW DET P NENNNNN 10 dB/div Log Ref 20.00 dBm Mkr1 903.00 MHz -57.820 dBm  Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.73 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 <tr><td colspan="4">30M Hz~1GHz</td></tr>				30M Hz~1GHz																			
30M Hz~1GHz																							

Test Mode:	802.11b	Test channel :	06
Agilent Spectrum Analyzer - Swept SA Marker 1 2.435000000000 GHz PRO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 5/100 07:27:45 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 2.435 GHz 4.705 dBm Start 1.000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 8.000 GHz Sweep 669.0 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 1G Hz~8GHz Agilent Spectrum Analyzer - Swept SA Marker 1 13.560000000000 GHz PRO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 4/100 07:27:54 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 13.560 GHz -54.622 dBm Start 8.000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 16.000 GHz Sweep 764.6 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 8GHz~16GHz Agilent Spectrum Analyzer - Swept SA Marker 1 24.523000000000 GHz PRO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 3/100 07:28:16 PM Jul 11, 2016 10 dB/div Log Ref 20.00 dBm Mkr1 24.523 GHz -47.370 dBm Start 16.000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 25.000 GHz Sweep 860.1 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 16Gz~25GHz			

Test Mode:	802.11b	Test channel :	11
Agilent Spectrum Analyzer - Swept SA Marker 1 2.460500000000 GHz PRO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 07:29:09 PM Jul 11, 2016 TRACE 1 2 3 4 5 6 TYPE M Vectorscope DET P NORM 10 dB/div Ref 20.00 dBm Mkr1 2.460 50 GHz 5.193 dBm Center 2.46200 GHz #Res BW 100 kHz #VBW 300 kHz Span 30.00 MHz Sweep 2.933 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2			
Channel 11			
Agilent Spectrum Analyzer - Swept SA Marker 1 608.820000 kHz PRO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: >100/100 07:29:18 PM Jul 11, 2016 TRACE 1 2 3 4 5 6 TYPE M Vectorscope DET P NORM 10 dB/div Ref 20.00 dBm Mkr1 609 kHz -47.134 dBm Start 9 kHz #Res BW 100 kHz #VBW 300 kHz Stop 30.00 MHz Sweep 2.867 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2			
9KHz~30MHz			
Agilent Spectrum Analyzer - Swept SA Marker 1 709.000000000 MHz PRO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 25/100 07:29:27 PM Jul 11, 2016 TRACE 1 2 3 4 5 6 TYPE M Vectorscope DET P NORM 10 dB/div Ref 20.00 dBm Mkr1 709.00 MHz -59.262 dBm Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Stop 1.0000 GHz Sweep 92.73 ms (1001 pts) STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2			
30M Hz~1GHz			

Test Mode:	802.11b	Test channel :	11
Agilent Spectrum Analyzer - Swept SA Marker 1 2.463000000000 GHz PRO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 3/100 07-29-25 PM JUL 11, 2016 TRACE 1 2 3 4 5 6 TYPE M Vectorscope DET P NORM LVL Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 10 dB/div Log Ref 20.00 dBm Mkr1 2.463 GHz 5.042 dBm -15.00 dBm Start 1.000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 8.000 GHz Sweep 669.0 ms (1001 pts) STATUS			
1G Hz~8GHz			
Agilent Spectrum Analyzer - Swept SA Marker 1 15.232000000000 GHz PRO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 3/100 07-29-24 PM JUL 11, 2016 TRACE 1 2 3 4 5 6 TYPE M Vectorscope DET P NORM LVL Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 10 dB/div Log Ref 20.00 dBm Mkr1 15.232 GHz -52.948 dBm -15.00 dBm Start 8.000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 16.000 GHz Sweep 764.6 ms (1001 pts) STATUS			
8GHz~16GHz			
Agilent Spectrum Analyzer - Swept SA Marker 1 24.541000000000 GHz PRO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 4/100 07-29-24 PM JUL 11, 2016 TRACE 1 2 3 4 5 6 TYPE M Vectorscope DET P NORM LVL Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 10 dB/div Log Ref 20.00 dBm Mkr1 24.541 GHz -48.530 dBm -15.00 dBm Start 16.000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 25.000 GHz Sweep 860.1 ms (1001 pts) STATUS			
16Gz~25GHz			