



Report No: FCC 1607061 File reference No: 2016-07-19

Applicant: Techcool Industry Development Co., Ltd.

Product: bluetooth headset

Model No: BH519, BH529, BH539, BH559, BH569

Trademark: techcool

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10,FCC Part 15 Subpart C,

Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: July 19, 2016

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

## SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1607061 Page 2 of 48

Date: 2016-07-19



## **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

### **CNAL-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

### FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

### IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Page 3 of 48

Report No.: FCC1607061

Date: 2016-07-19



### **Test Report Conclusion** Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample.	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
5.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT.	12
6.3	EUT Operation Condition.	12
5.4	Radiated Emission Limit.	13
7.0	6dB Bandwidth Measurement Bandwidth	22
8.0	Maximum Peak Output Power.	27
9.0	Power Spectral Density Measurement.	29
10.0	Out of Band Measurement.	34
11.0	Antenna Requirement.	37
12.0	FCC ID Label	38
13.0	Photo of Test Setup and EUT View.	39

Report No.: FCC1607061 Page 4 of 48

Date: 2016-07-19



#### 1.0 General Details

### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian

District, Shenzhen, Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

### 1.2 Applicant Details

Applicant: Techcool Industry Development Co., Ltd.

Address: 3F,1ST Bldg Dawei Shahe industrial park, Jiangshi village, Gongming town, Shenzhen

city, China.

Telephone: 0755-29090562

Fax: --

### 1.3 Description of EUT

Product: bluetooth headset

Manufacturer: Techcool Industry Development Co., Ltd.

Address: 3F ,1ST Bldg Dawei Shahe industrial park, Jiangshi village, Gongming town,

Shenzhen city, China.

Brand Name: techcool Model Number: BH519

Additional Model Number: BH529, BH539, BH559, BH569

Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz Frequency Selection By software

Channel Number 40

#### 1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1607061 Page 5 of 48

Date: 2016-07-19



1.5 Test Duration 2016-07-08 to 2016-07-18

Test Uncertainty 1.6 Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

Test Engineer 1.7

The sample tested by

Print Name: Terry Tang

Page 6 of 48

Report No.: FCC1607061

Date: 2016-07-19



2.0 Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2015-08-22	2016-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2015-08-22	2016-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2015-08-22	2016-08-21
Ultra Broadband ANT	R&S	HL562	100157	2015-08-23	2016-08-22
ESDV Test Receiver	R&S	ESDV	100008	2015-08-22	2016-08-21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2015-08-22	2016-08-21
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2015-08-23	2016-08-22
ESPI Test Receiver	R&S	ESI26	838786/013	2015-08-22	2016-08-21
3m OATS			N/A	2015-08-24	2016-08-23
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2015-08-24	2016-08-23
Horn Antenna	R&S	BBHA 9120D	9120D-631	2015-08-24	2016-08-23
Power meter	Anritsu	ML2487A	6K00003613	2015-08-22	2016-08-21
Power sensor	Anritsu	MA2491A	32263	2015-08-22	2016-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2015-08-23	2016-08-21
LISN	AFJ	LS16C	10010947251	2015-08-22	2016-08-21
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2015-08-23	2016-08-22
9*6*6 Anechoic			N/A	2015-08-24	2016-08-23
EMI Test Receiver	RS	ESCS30	100139	2015-08-22	2016-08-21

Page 7 of 48

Report No.: FCC1607061

Date: 2016-07-19



#### 3.0 **Technical Details**

#### 3.1 Summary of test results

Standard	Toot Type	Result	Notes
	Test Type		
FCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
	Spectrum bandwidth of a		Complies
FCC Part 15 Subpart C	Orthogonal Frequency		
•	Division Multiplex System	PASS	
Paragraph 15.247(a)(2) Limit	Limit: 6dB		
	bandwidth>500kHz		
ECC P. 415 P	Maximum peak output		
FCC Part 15, Paragraph	power	PASS	Complies
15.247(b)	Limit: max. 30dBm		
FCC Part 15, Paragraph	Transmitter Radiated	PASS	Complies
15.109,15.205 & 15.209	Emission		
	Limit: Table 15.209		
FCC Part 15, Paragraph	<b>Power Spectral Density</b>	PASS	Complies
15.247(e)	Limit: max. 8dBm		
FCC Part 15, Paragraph	Out of Band Emission and	PASS	Complies
15.247(d)	Restricted Band		
	Radiation		
	Limit: 20dB less than		
	peak value of fundamental		
	frequency		
	Restricted band limit:		
	<b>Table 15.209</b>		

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247, ANSI 63.4:2014 and ANSI 63.10:2013

#### 4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES


Report No.: FCC1607061

Date: 2016-07-19



### 5. Power Line Conducted Emission Test

### 5.1 Schematics of the test




**EUT: Equipment Under Test** 

### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2014.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

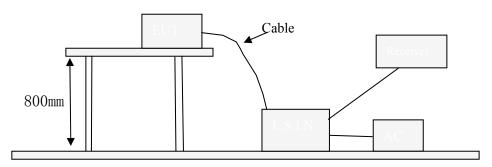

## 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

#### A. EUT

Device	Manufacturer	Model	FCC ID
bluetooth headset	Techcool Industry Development	BH519, BH529, BH539,	2AH69BH519BTC
biuetootii ileauset	Co., Ltd.	BH559, BH569	2AH09DH319D1C

#### B. Internal Device

Device	Manufacturer	Model	Rating

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1607061 Page 9 of 48

Date: 2016-07-19



### C. Peripherals

Device	Manufacturer	Model	Rating
Power	DUNNS	JY05100	Input: 100-240V~, 50/60Hz, 0.2A;
Supply	Mobiles		Output: DC5V, 1A

### 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

### 5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1607061 Page 10 of 48

Date: 2016-07-19



#### A: Conducted Emission on Live Terminal (150kHz to 30MHz)

**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa


**EUT set Condition: Charging and Keep Bluetooth Transmitting** 

**Equipment Level: Class B** 

**Results: PASS** 

Please refer to following diagram for individual

# 80.0 dBuV

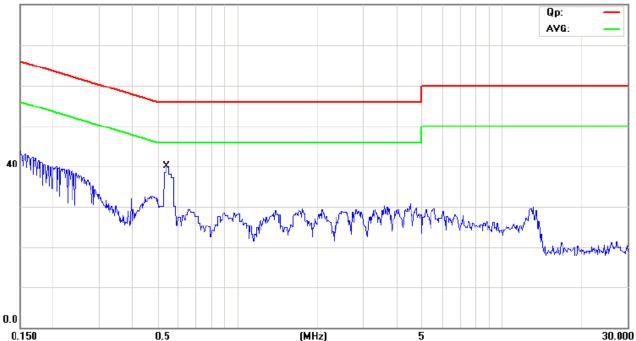

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBu∨	dB	dBuV	dBuV	dB	Detector	Comment
1	0.5428	24.10	11.42	35.52	56.00	-20.48	QP	
2 *	0.5428	18.90	11.42	30.32	46.00	-15.68	AVG	

Report No.: FCC1607061 Page 11 of 48

Date: 2016-07-19



### B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa


**EUT set Condition: Charging and Keep Bluetooth Transmitting** 

**Equipment Level: Class B** 

**Results: Pass** 

0.0

Please refer to following diagram for individual

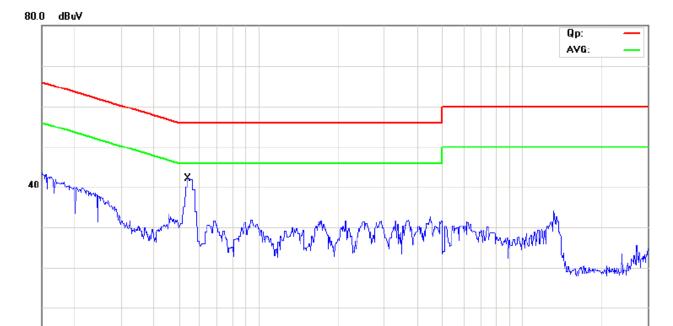

No. Mk.	Freq.	Reading Level		Measure- ment	Limit	Over		
	MHz	dBu∨	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.5410	24.00	11.41	35.41	56.00	-20.59	QP	
2	0.5410	12.50	11.41	23.91	46.00	-22.09	AVG	

(MHz)

5

30.000

0.5

Report No.: FCC1607061 Page 12 of 48


Date: 2016-07-19



#### **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10–2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

### **Block diagram of Test setup**

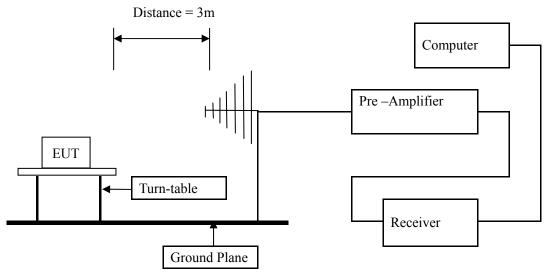

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1607061 Page 13 of 48

Date: 2016-07-19



#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

### Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No.: FCC1607061 Page 14 of 48

Date: 2016-07-19



#### Test result

### General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

**EUT set Condition: Charging and Keep Bluetooth Transmitting** 

**Results:** Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
158.960	32.19	Н	43.50
128.760	39.55	Н	43.50
268.000	29.42	V	46.00
133.360	26.90	V	43.50


Page 15 of 48

Report No.: FCC1607061

Date: 2016-07-19



### Test Figure:

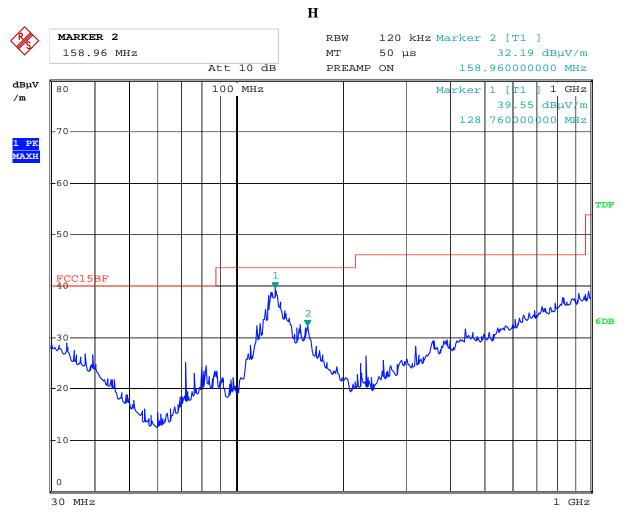

11.JUL.2016 14:32:25 Date:


Page 16 of 48

Report No.: FCC1607061

Date: 2016-07-19



### Test Figure:

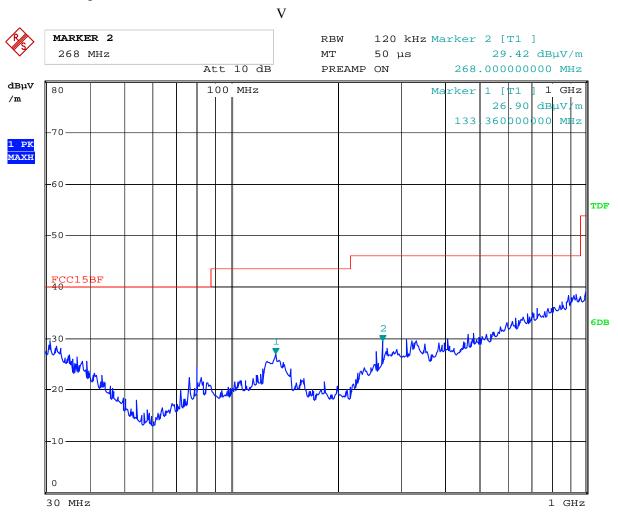

11.JUL.2016 14:36:33 Date:

Report No.: FCC1607061 Page 17 of 48

Date: 2016-07-19



### Operation Mode: Transmitting under Low Channel (2402MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4804	1	H/V	74(Peak)/ 54(AV)
7206	1	H/V	74(Peak)/ 54(AV)
9608	-	H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412	1	H/V	74(Peak)/ 54(AV)
16814	-	H/V	74(Peak)/ 54(AV)
19216	-	H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020	-	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

### **Operation Mode: Transmitting g under Middle Channel (2440MHz)**

	0.0		-
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4880		H/V	74(Peak)/ 54(AV)
7320		H/V	74(Peak)/ 54(AV)
9760		H/V	74(Peak)/ 54(AV)
12200		H/V	74(Peak)/ 54(AV)
14640		H/V	74(Peak)/ 54(AV)
17080		H/V	74(Peak)/ 54(AV)
19520		H/V	74(Peak)/ 54(AV)
21960		H/V	74(Peak)/ 54(AV)
24400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: FCC1607061 Page 18 of 48

Date: 2016-07-19



### Operation Mode: Transmitting under High Channel (2480MHz)

	8 8	· · · · · · · · · · · · · · · · · · ·	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4960	-	H/V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

<sup>2.</sup> Remark "---" means that the emissions level is too low to be measured


Report No.: FCC1607061

Date: 2016-07-19




Please refer to the following test plots for details:

### Low Channel: Horizontal

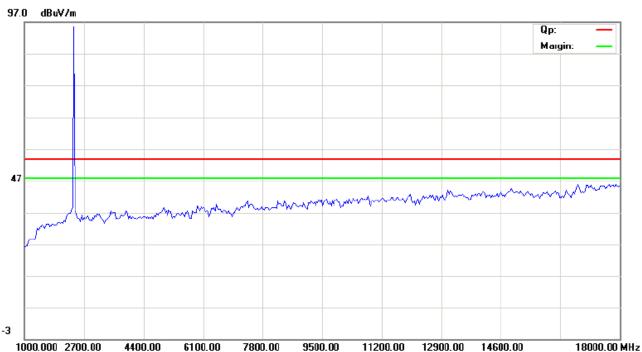

### **Low Channel: Vertical**

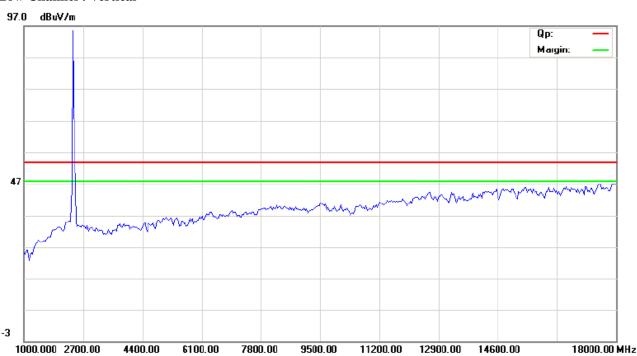

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 20 of 48

Report No.: FCC1607061


Date: 2016-07-19



### **Middle Channel: Horizontal**



#### Middle Channel: Vertical

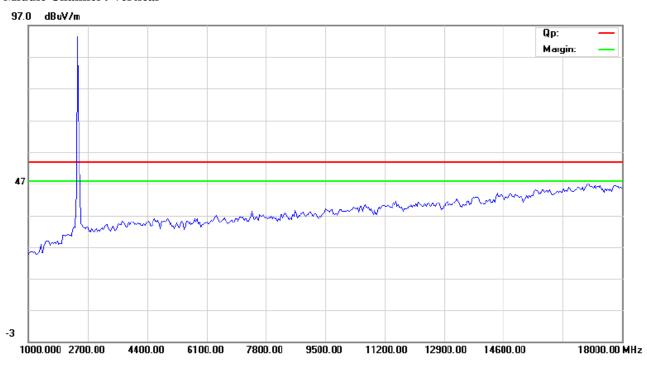

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Report No.: FCC1607061


Date: 2016-07-19



### **High Channel: Horizontal**

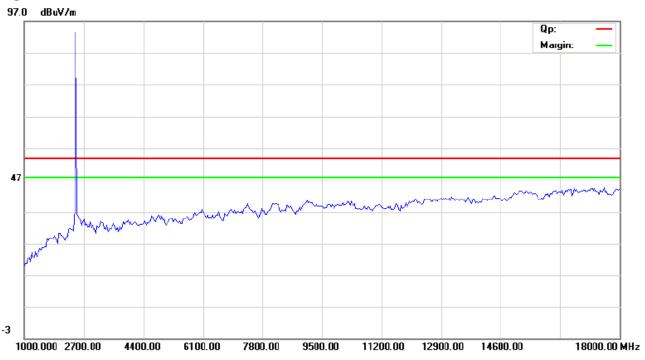

### **High Channel: Vertical**

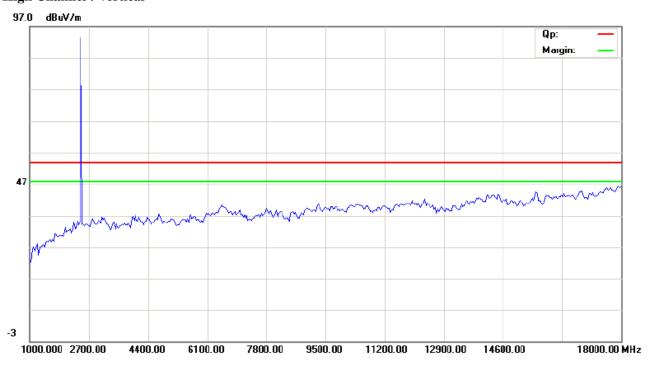

### Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No.: FCC1607061 Page 22 of 48

Date: 2016-07-19



## 7.0 6dB Bandwidth Measurement

### 7.1 Test Setup



#### 7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

### 7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW)  $\geq$  3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.4 Test Result

Page 23 of 48 Report No.: FCC1607061

Date: 2016-07-19



EUT		bluetooth headset		Model		BH519		
Mode		Keep Transmitting		Input Voltage		DC3.7V		
Temperat	ure	are 24 deg. C,		Humi	Humidity		56% RH	
Channel			6 dB Bandwi (kHz)	dth	Maximum Limit (kHz)		Pass/ Fail	
Low		2402 745			0.5		Pass	
Middle		2440	745	·	0.5		Pass	
High		2480 739			0.5		Pass	


Report No.: FCC1607061 Page 24 of 48

Date: 2016-07-19



### Test Figure:

### 1. Condition: Low Channel

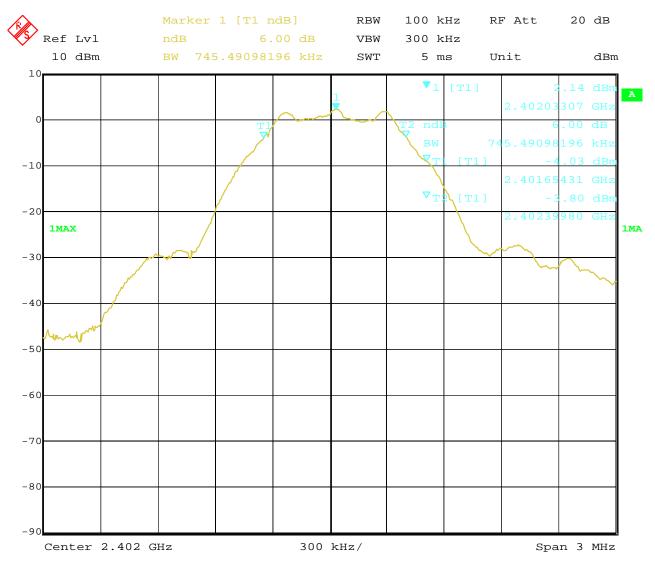


Date: 16.JUL.2016 12:12:00

Report No.: FCC1607061 Page 25 of 48

Date: 2016-07-19



### 2. Condition: Middle Channel

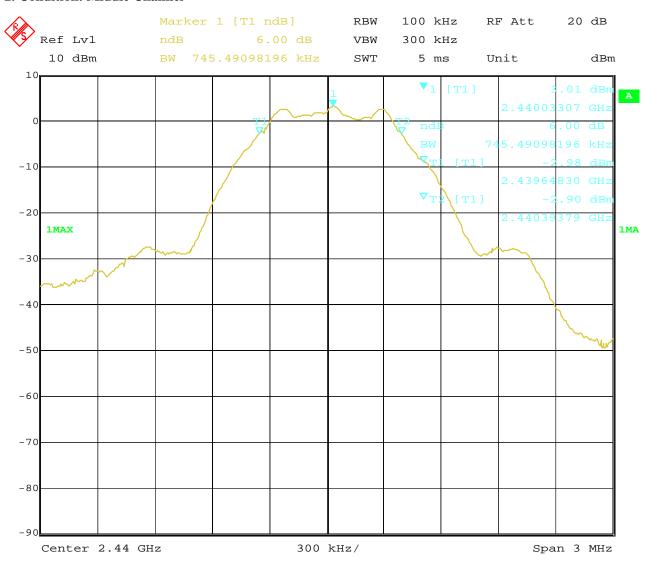


Date: 16.JUL.2016 12:13:31

Report No.: FCC1607061 Page 26 of 48

Date: 2016-07-19



### 3. High Channel

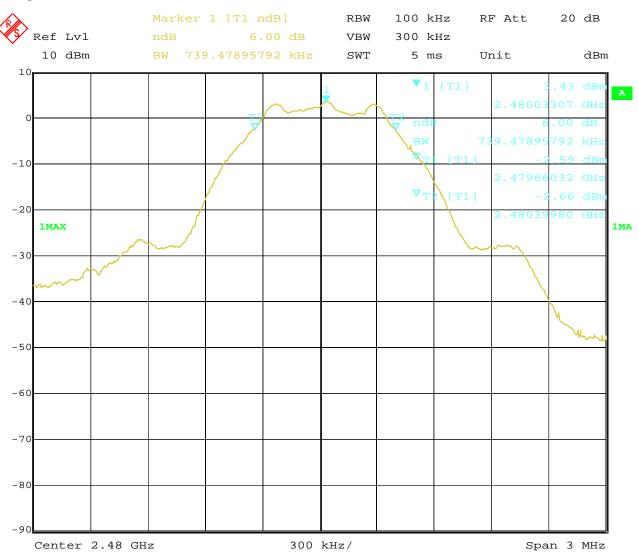

Date: 16.JUL.2016 12:14:02

Report No.: FCC1607061


Date: 2016-07-19



Page 27 of 48

### 8. Maximum Output Power

### 8.1 Test Setup



### 8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

#### **8.3 Test Procedure**

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power was measured.

Report No.: FCC1607061 Page 28 of 48

Date: 2016-07-19



### **8.4Test Results**

EUT	bluetooth h	Model		BH519		
Mode	Keep Transi	Input Voltage			DC3.7V	
Temperature	24 deg.	Hum	idity	ty 56% RH		
Channel	Channel Frequency (MHz)	Peak Power Output (dBm)		Power Limit (dBm)		Pass/ Fail
Low	2402	2.51		30		Pass
Middle	2440	3.42		30		Pass
High	2480	3.82		30		Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator


Report No.: FCC1607061 Page 29 of 48

Date: 2016-07-19



## 9. Power Spectral Density Measurement

### 9.1 Test Setup



### 9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

#### 9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW  $\geq$  30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be  $\leq 8$  dBm.

Report No.: FCC1607061 Page 30 of 48

Date: 2016-07-19



### 9.4Test Result

EUT		bluetooth headset		Model	]	BH519		
Mode		Keep	Keep Transmitting		Input Voltage	Γ	OC3.7V	
Temperat	ure	2	24 deg. C,	.C, Humidity		5	56% RH	
Channel	Re	Power ading (Bm)	Cable Loss (dB)	Final Power Spectral Density (dBm)		Maximum Limit (dBm)	Pass/ Fail	
Low	Ϊ	5.36	0.2	-5.16		8	Pass	
Middle	-4	4.64	0.2	-4.44		8	Pass	
High	-4	4.03	0.2		-3.83	8	Pass	

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss


Report No.: FCC1607061 Page 31 of 48

Date: 2016-07-19



### Test Figure:

### 1. Condition: Low Channel

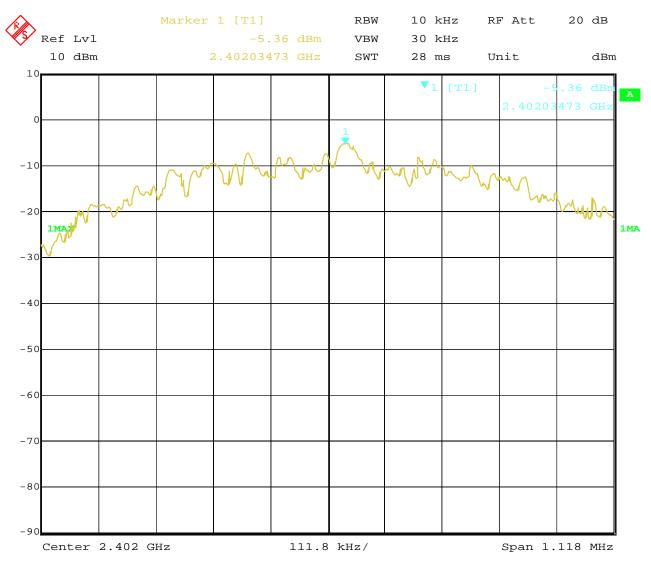


Date: 16.JUL.2016 12:18:56

Report No.: FCC1607061 Page 32 of 48

Date: 2016-07-19



### 2. Condition: Middle Channel

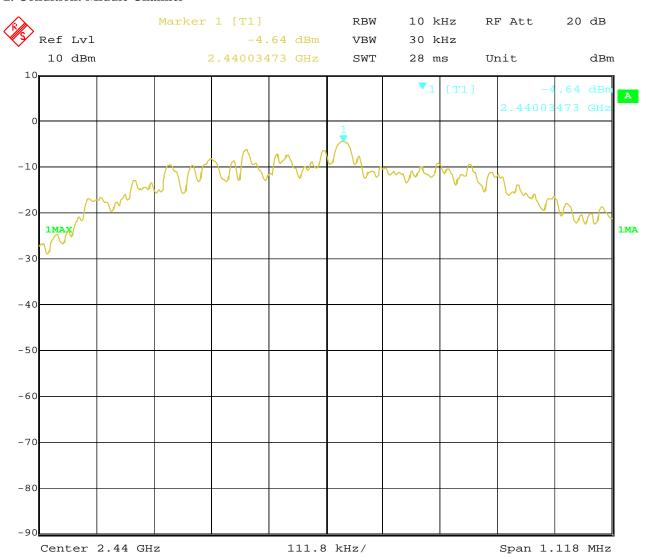


Date: 16.JUL.2016 12:19:29

Report No.: FCC1607061 Page 33 of 48

Date: 2016-07-19



### 3. High Channel

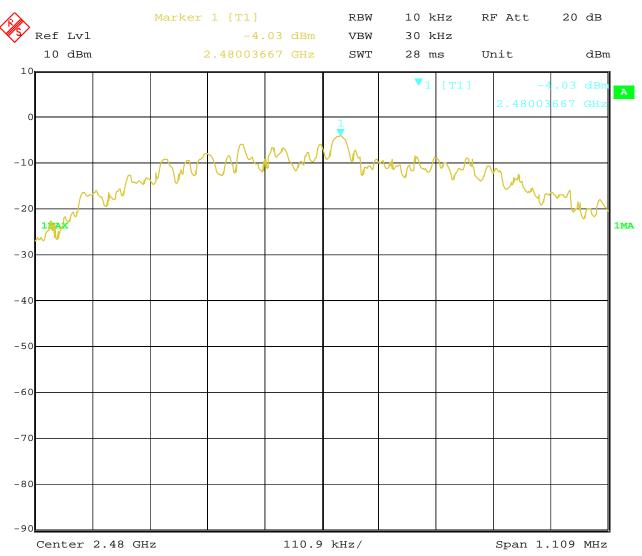


Date: 16.JUL.2016 12:20:22 Report No.: FCC1607061 Page 34 of 48

Date: 2016-07-19



## 10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

#### 10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### **10.3 Test Procedure**

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

#### 10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 35 of 48

Report No.: FCC1607061


Date: 2016-07-19



### 10.4 Band-edge and Restricted band Measurement

EUT	bluetooth headset		Model	BH519		
Mode	Keep Transmitting		Keep Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:	Pass		Detector	PK		
2400	PK (dBµV/m)	48.6	Limit	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$		
2390	PK (dBμV/m)	41.3	Limit	$74(dB\mu V/m)$		
	AV (dBμV/m)		Lillit	$54(dB\mu V/m)$		

### **Test Figure:**

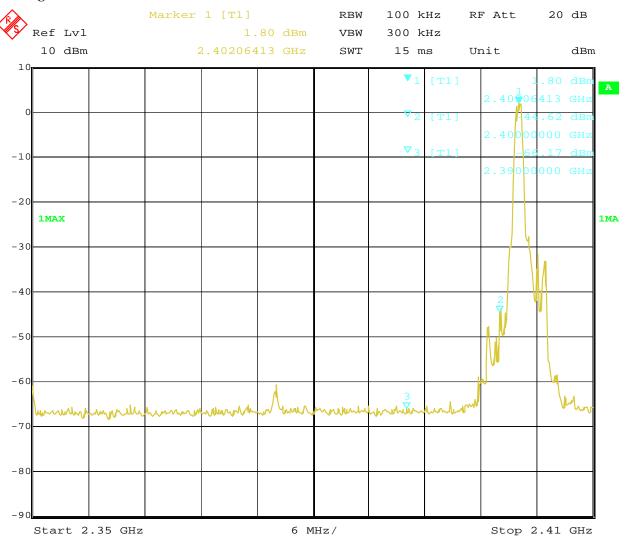

Date: 16.JUL.2016 12:21:36

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 36 of 48

Report No.: FCC1607061


Date: 2016-07-19



### 10.4 Band-edge and Restricted band Measurement

EUT	bluet	ooth headset	Model	BH519
Mode	Keepin	g Transmitting	Input Voltage	DC3.7V
Temperature	24	4 deg. C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	43.7	I imit	$74(dB\mu V/m)$
	AV ( $dB\mu V/m$ )		Limit	54(dBμV/m)

### **Test Figure:**

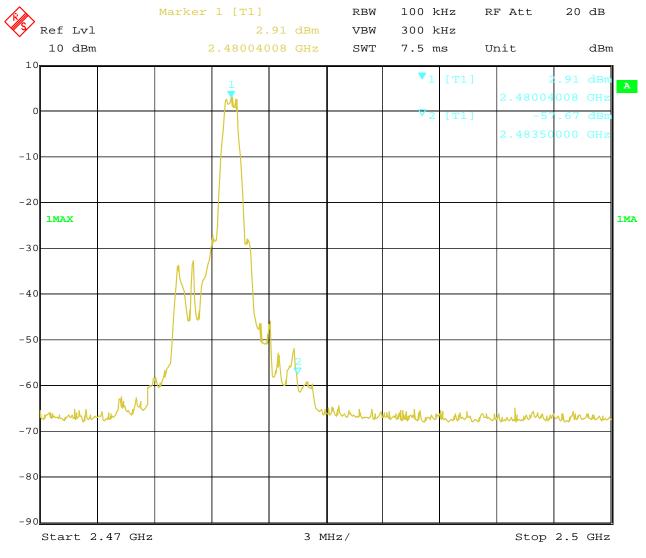

Date: 16.JUL.2016 12:20:59

Note: The Max. FS in Restrict Band are measured in conventional method.

Report No.: FCC1607061

Date: 2016-07-19



Page 37 of 48

# 11.0 Antenna Requirement

# 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

# 11.2 Antenna Connected construction

PCB antenna used. The maximum Gain of the antennas is 0dBi.

Report No.: FCC1607061 Page 38 of 48

Date: 2016-07-19



# 12.0 FCC ID Label

# FCC ID: 2AH69BH519BTC

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

### **Mark Location:**




Report No.: FCC1607061 Page 39 of 48

Date: 2016-07-19



#### 13.0 Photo of testing

Conducted Emission Test Setup:

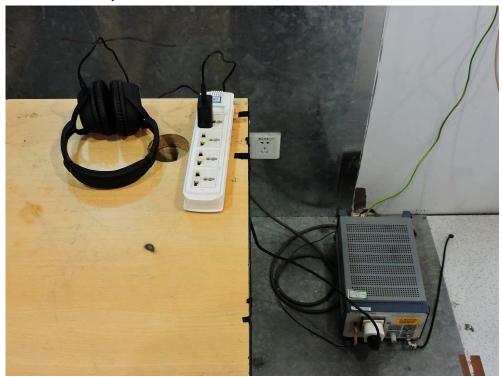


Report No.: FCC1607061

Date: 2016-07-19



# Radiated Emission Test Setup:



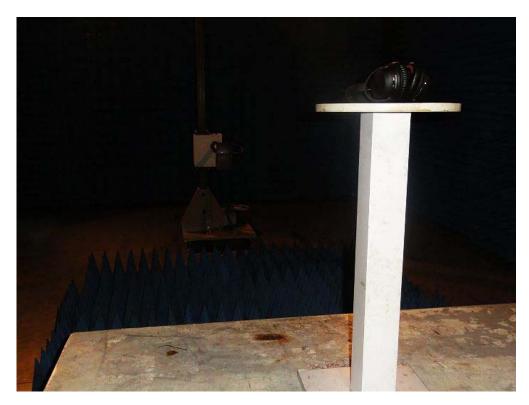

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Report No.: FCC1607061

Date: 2016-07-19



# **Photographs - EUT**

# Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Page 42 of 48

Report No.: FCC1607061

Date: 2016-07-19



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: FCC1607061 Page 43 of 48

Date: 2016-07-19



Outside View



Page 44 of 48

Report No.: FCC1607061

Date: 2016-07-19



Inside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 45 of 48

Report No.: FCC1607061

Date: 2016-07-19



Inside View

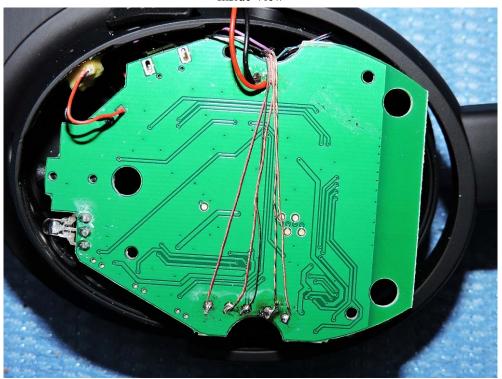



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Page 46 of 48

Report No.: FCC1607061

Date: 2016-07-19



Inside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Page 47 of 48

Report No.: FCC1607061

Date: 2016-07-19



Inside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Report No.: FCC1607061 Page 48 of 48

Date: 2016-07-19



Inside View



End of the report