

Issued Date: 2016-09-14

FCC Test Report

Part 15 subpart C

Client Information:

Applicant: Shenzhen Global E-Commerce Co., Ltd.

Applicant add.:

Room 203, Building C, Getailong Industrial Park, No.445 Bulong Road,

Bantian Street, Longgang District, Shenzhen

Product Information:

Product Name: Electric Skateboard Remote

Model No.: RNG

Derivative model No.: N/A

Brand Name: SWAGBOARD

FCC ID: 2AH6K-RNG

Standards: CFR 47 FCC PART 15 SUBPART C:2016 section 15.249

Prepared By:

UL-CCIC Company Limited

Add.: Electronic Building, Parage Electronic Industrial Park, No. 8 Nanyun Er Road,

Guangzhou Science Park, Guangzhou, 510663 China

Date of Receipt: Aug. 15, 2016 Date of Test: Aug. 15~ Sep. 14, 2016

Date of Issue: Sep. 14, 2016 Test Result: Pass

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

*This test report must not be used by the client to claim product endorsement by any agency of the U.S. government.


Reviewed by: Lambure Tang

Approved by: Richardsi



1 Contents

			Page
	COVI	ER PAGE	
1	C	ONTENTS	2
2	TE	ST SUMMARY	3
	2.1	COMPLIANCE WITH FCC PART 15 SUBPART C	
	2.2	MEASUREMENT UNCERTAINTY	
3	TE	ST FACILITY	4
	3.1	DEVIATION FROM STANDARD	4
	3.2	ABNORMALITIES FROM STANDARD CONDITIONS	
4	GI	ENERAL INFORMATION	5
	4.1	GENERAL DESCRIPTION OF EUT	5
	4.2	TEST LOCATION	5
5	DE	ESCRIPTION OF TEST CONDITIONS	7
	5.1	E.U.T. OPERATION	7
	5.2	EUT PERIPHERAL LIST	8
	5.3	TEST PERIPHERAL LIST	8
6	E	QUIPMENTS LIST FOR ALL TEST ITEMS	9
7	TE	EST RESULT	10
	7.1	Antenna Requirement	10
	7.2	FIELD STRENGTH OF FUNDAMENTAL& FIELD STRENGTH OF UNWANTED EMISSIONS& BAND EDGE	11
	7.2	2.1 Duty cycle measurement:	17
	7.2	2.2 Radiated Emissions Test Data	18
	7.3	OCCUPIED BANDWIDTH	
	7.4	CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHZ TO 30 MHZ	27
	7.2	2.3 Measurement Data	29
8	Pŀ	HOTOGRAPHS	31
	8.1	RADIATED EMISSION TEST SETUP	31
	8.2	CONDUCTED EMISSIONS TEST SETUP	32
	8.3	EUT CONSTRUCTIONAL DETAILS	33





2 Test Summary

2.1 Compliance with FCC Part 15 subpart C

Test	Test Requirement	Standard Paragraph	Result	
Field Strength of	FCC PART 15 C	ANSI C63.10:	PASS	
Fundamental	section 15.249 (a)	Clause 6.6	FASS	
Field Otres with a f	FCC PART 15 C	ANSI C63.10:		
Field Strength of Unwanted Emissions	section 15.249 (a)	Clause 6.4, 6.6 and 6.7	PASS	
Silvanted Emissions	section 15.249 (d)	Clause 0.4, 0.0 and 0.7		
Dand Edges	FCC PART 15 C	ANSI C63.10:	PASS	
Band Edges	section 15.249 (d)	Clause 6.9.2	PASS	
Occupied Denduidth	FCC PART 15 C	ANSI C63.10:	DACC	
Occupied Bandwidth	section 15.215(c)	Clause 6.9.1	PASS	
Conducted Emissions	FCC PART 15 C	ANSI C63.10:	PASS	
at Mains Terminals	section 15.207	Clause 6.2	1 700	

Remark:

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2013 in the whole report.

2.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, the maximum value of the uncertainty as below:

No.	Item	Uncertainty
1	Conducted Emission Test	1.20dB
2	Radiated Emission Test	3.30dB
3	RF power,conducted	0.16dB
4 RF power density,conducted		0.24dB
5	Spurious emissions,conducted	0.21dB
6	All emissions,radiated(<1G)	4.68dB
7	All emissions,radiated(>1G)	4.89dB



Issued Date: 2016-09-14

3 Test Facility

The test facility is recognized, certified or accredited by the following organizations:

.CNAS- Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2005 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Apr. 18, 2013

.FCC- Registration No: 248337

The 3m Semi-Anechoic Chamber, 3m/10m Open Area Test Site and Shielding Room of Dongguan Yaxu (AiT) Technology Limited have been registered by Federal Communications Commission (FCC) on Aug.29, 2014.

.Industry Canada(IC)-Registration No: IC6819A-1

The 3m Semi-Anechoic Chamber and 3m of Dongguan Yaxu (AiT) Technology Limited have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing on Oct. 01, 2014.

.VCCI- Registration No: 2705

The 3m/10m Open Area Test Site, Shielding Room and 3m Chamber of Dongguan Yaxu (AiT) Technology Limited have been registered by Voluntary Control Council for Interference on Nov. 21, 2012. The Telecommunication Ports Conducted Disturbance Measurement of Dongguan Yaxu (AiT) Technology Limited have been registered by Voluntary Control Council for Interference on May. 13, 2013.

3.1 Deviation from standard None

3.2 Abnormalities from standard conditions

None



Issued Date: 2016-09-14

4 General Information

4.1 General Description of EUT

Manufacturer:	Shenzhen knight lung technology co.,LTD		
Manufacturer Address:	The 3rd Floor,No.D Building,WeiKangDe Industry Zone,Shang Xue Technology Park,Bantian Town,Long Gang District,Shenzhen City,Guang Dong		
EUT Name:	Electric Skateboard Remote		
Model No.:	RNG		
Operation frequency:	2405 MHz to 2477 MHz		
Number of channel:	3 channels		
Modulation Type and Antenna Type:	GFSK Integral antenna		
Data rate:	1Mbps		
H/W No.:	V1.0		
S/W No.:	V1.0		
Antenna Gain:	0 dBi		
Brand Name:	SWAGBOARD		
Derivative model No.:	N/A		
Power Supply Range:	DC 5.0V from micro-USB port or DC 3.7V from battery		
Test Power Supply:	The same as above.		
Power Cord:	N/A		
Signal Cable:	N/A		

4.2 Test Location

All tests were performed at:

Dongguan Yaxu (AiT) Technology Limited

No.22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan, Guangdong, China

Tel.: +86.769.82020499 Fax.: +86.769.82020495



Channel	Frequency (MHz)
01	2405
02	2443
03	2477



Report No. 4787526840-2 Issued Date: 2016-09-14

5 Description of Test conditions

5.1 E.U.T. Operation

Test Voltage:	DC 5.0V from adapter,AC120V/60Hz for adapter or
	DC 3.7V from battery (fully-charged battery)
Temperature:	20.0 -25.0 °C
Humidity:	38-50 % RH
Atmospheric Pressure:	1000 -1010 mbar
Test frequencies and frequency range:	According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table: According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated
	in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	2	1 near top, 1 near middle and 1
More than 10 MHz	S	near bottom

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement			
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower			
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower			
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified			



Issued Date: 2016-09-14

5.2 EUT Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Power cord	signal cable
1	N/A	N/A	N/A	N/A	N/A	N/A

5.3 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	signal cable
1	Adapter	нтс	N/A	TC 900-US	N/A	N/A	Provided by lab





6 Equipments List for All Test Items

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	101470	2016.06.29	2017.06.28
2	EMI Measuring Receiver	R&S	ESR	101660	2016.06.29	2017.06.28
3	Low Noise Pre Amplifier	Tsj	MLA-10K01-B01-2 7	1205323	2016.06.29	2017.06.28
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2016.06.29	2017.06.28
5	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2016.06.29	2017.06.28
6	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2016.06.29	2017.06.28
7	SHF-EHF Horn	SCHWARZBECK	BBHA9170	BBHA 9170367	2016.06.29	2017.06.28
8	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.29	2017.06.28
9	EMI Test Receiver	R&S	ESCI	100124	2016.06.29	2017.06.28
10	LISN	Kyoritsu	KNW-242	8-837-4	2016.06.29	2017.06.28
11	LISN	Kyoritsu	KNW-407	8-1789-3	2016.06.29	2017.06.28
12	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.29	2017.06.28
13	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.29	2017.06.28
14	Radiated Cable 1# (30MHz-1GHz)	FUJIKURA	5D-2W	01	2015.12.25	2016.12.24
15	Radiated Cable 2# (1GHz -40GHz)	FUJIKURA	10D2W	02	2015.12.25	2016.12.24
16	Conducted Cable 1#(9KHz-30MHz)	FUJIKURA	1D-2W	01	2015.12.25	2016.12.24
17	SMA Antenna connector	Dosin	Dosin-SMA	N/A	N/A	N/A

Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list.



Issued Date: 2016-09-14

7 Test Result

7.1 Antenna Requirement

Standard requirement

EUT Antenna

The antenna is PCB antenna and no consideration of replacement. The maximum gain of the antenna is 0 dBi.

Test result: The unit does meet the FCC requirements.



Issued Date: 2016-09-14

7.2 Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge

Test Requirement: FCC Part15 C section 15.249

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBμV/m @ 3m)	Field Strength of Harmonics (dBμV/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0
24000 to 24250	108.0	68.0

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Limits: The fundamental frequency rang is in the frequency band of the EUT is 2405

MHz ~ 2477 MHz

The limit for AVG field strength $dB\mu V/m$ for the fundamental frequency = 94.0

dBμV/m.

The limit for Peak field strength $dB\mu V/m$ for the fundamental frequency =

114.0 dBµV/m.

No fundamental is allowed in the restricted bands.

The limit for AVG field strength $dB_{\mu}V/m$ for the harmonics and other above

1G frequencies = $54.0 \text{ dB}_{\mu}\text{V/m}$.

The limit for Peak field strength dB_µV/m for the harmonics and other above

1G frequencies = $74.0 \text{ dB}_{\mu}\text{V/m}$.

Test Method: ANSI C63.10: Clause 6.4, 6.6 and 6.7 for Field Strength of Fundamental&

Field Strength of Unwanted Emissions

ANSI C63.10: Clause 6.9.2 for Band Edge

Status Pre-test the EUT in continuous transmitting mode with setup as stand-alone

in X, Y, Z threes axes, found the worst case is X axes and report the data.

Measurement Distance:

3m (Semi-Anechoic Chamber)

Frequency range 9 kHz – 25 GHz for transmitting mode.

Test instrumentation resolution bandwidth

9 kHz (9 kHz - 30 MHz), 120 kHz (30 MHz - 1000 MHz), 1 MHz (1000 MHz -

25 GHz)



Issued Date: 2016-09-14

Detector: For PK and QP value:

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz

 $\mathsf{VBW} \geq \mathsf{RBW}$

Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

RBW = 1 MHz for $f \ge 1$ GHz,

VBW =10 Hz

Sweep = auto

Detector function = peak

Trace = max hold



Issued Date: 2016-09-14

Test Procedure:

1)9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT, During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2)30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3)1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scan between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

For the radiated emission test above 1GHz:


Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.






Test Configuration:

1) 9 kHz to 30 MHz emissions:

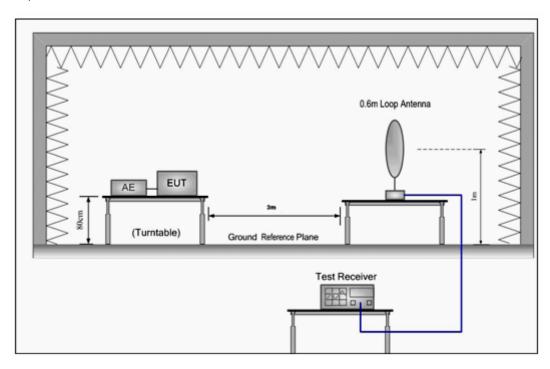


2) 30 MHz to 1 GHz emissions:

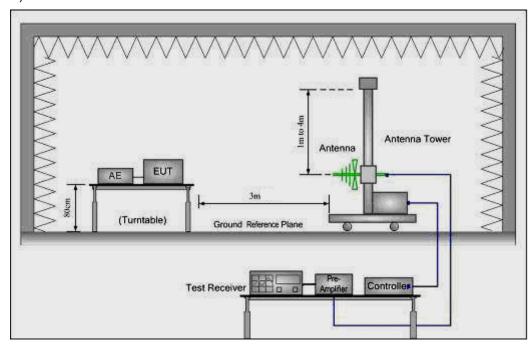





3) 1 GHz to 25 GHz emissions:

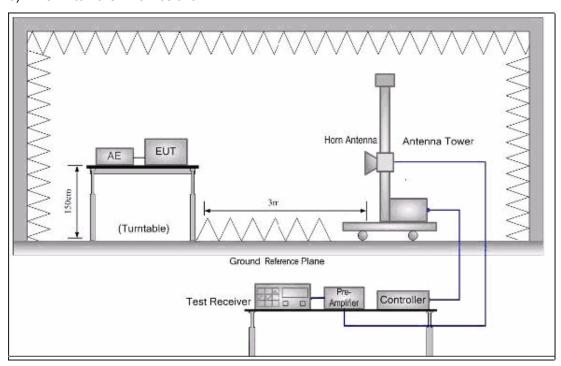

The field strength is calculated by adding the Antenna Factor, Cable Loss & Per-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna, Factor + Cable Loss - Preamplifier Factor



Issued Date: 2016-09-14

And according 15.35(a)

15.35(a) On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified. The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Interference (CISPR) of the International Electrotechnical Commission. As an alternative to CISPR quasi-peak measurements, the responsible party, at its option, may demonstrate compliance with the emission limits using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, as long as the same bandwidths as indicated for CISPR quasi-peak measurements are employed.


Note: For pulse modulated devices with a pulse-repetition frequency of 20 Hz or less and for which CISPR quasi-peak measurements are specified, compliance with the regulations shall be demonstrated using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, using the same measurement bandwidths that are indicated for CISPR quasi-peak measurements.

According to 15.35 (b) Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.255, and 15.509-15.519 of this part, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.





7.2.1 Duty cycle measurement:

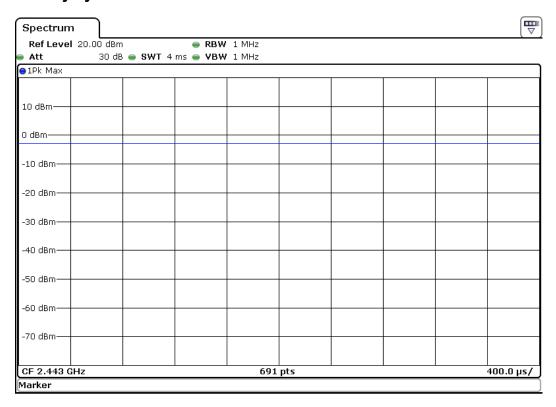



Issued Date: 2016-09-14

7.2.2 Radiated Emissions Test Data

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

EUT:	Electric Skateboard Remote	Model Name:	RNG		
Temperature:	25 ℃	Test Data	2016-09-08		
Pressure:	1010 hPa	Relative Humidity:	50%		
Test Mode:	TX mode(worse-case: 2405MHz)	Test Voltage:	DC 3.7V from battery		
Measurement Distance	3 m	Frenqucy Range	30MHz to 1GHz		
RBW/VBW	100KHz / 300KHz for spectrum, RBW=120KHz for receiver.				

(a) Antenna polarization: Horizontal

Frequency	Reading	Correct	Measure	Limit	Margin	Detector Type
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	
	(dBuV)	(dB)	(dBuV/m)			
43.0505	28.93	-14.62	14.31	40.00	-25.69	QUASIPEAK
122.8340	29.84	-15.04	14.80	43.50	-28.70	QUASIPEAK
183.2005	29.68	-11.34	18.34	43.50	-25.16	QUASIPEAK
295.1469	30.36	-10.27	20.09	46.00	-25.91	QUASIPEAK
431.0316	29.91	-6.57	23.34	46.00	-22.66	QUASIPEAK
*699.3046	29.45	0.44	29.89	46.00	-16.11	QUASIPEAK

(b) Antenna polarization: Vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector Type
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	
	(dBuV)	(dB)	(dBuV/m)			
37.6798	29.99	-16.70	13.29	40.00	-26.71	QUASIPEAK
76.5121	36.77	-19.17	17.60	40.00	-22.40	QUASIPEAK
101.6443	31.76	-13.86	17.90	43.50	-25.60	QUASIPEAK
366.8231	31.86	-7.57	24.29	46.00	-21.71	QUASIPEAK
601.4265	33.91	-0.89	33.02	46.00	-12.98	QUASIPEAK
*958.7943	32.10	4.00	36.10	46.00	-9.90	QUASIPEAK

Note: '*' means the worst case

Measurement Level = Reading Level + Factor, Factor=Ant Factor + Cable Loss- Pre-amplifier.






1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions. Peak & Average Measurement.

EUT:	Electric Skateboard Remote	Model Name:	RNG		
Temperature:	25 ℃	Test Data	2016-09-08		
Pressure:	1010 hPa	Relative Humidity:	50%		
Test Mode :	TX mode	Test Voltage:	DC 3.7V from battery		
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz		
RBW/VBW	1MHz/1MHz for Peak, 1MHz/10Hz for Average.				
LDAM ADAA	non-restricted band: 100KHz/300KH	z for Peak.			

Test at L	ow Channel i	n transmitting	status			
Peak Measu	rement:					
Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Emission Level (dB _µ V/m)	Limits (dBμV/m)	Margin (dB)	Antenna polarization
2405.000	88.35	-5.65	82.70	114.00	-31.30	V
4810.000	61.47	5.07	66.54	74.00	-7.46	V
7215.000	43.10	7.07	50.17	74.00	-23.83	V
9620.000	35.24	10.69	45.93	74.00	-28.07	V
2405.000	81.69	-5.65	76.04	114.00	-37.96	Н
4810.000	54.45	5.07	59.52	74.00	-14.48	Н
7215.000	42.66	7.07	49.73	74.00	-24.27	Н
9620.000	34.80	10.69	45.49	74.00	-28.51	Н
Average Meas	surement:					
2405.000	82.52	-5.65	76.87	94.00	-17.13	V
4810.000	43.70	5.07	48.77	54.00	-5.23	V
7215.000	32.16	7.07	39.23	54.00	-14.77	V
9620.000	26.64	10.69	37.33	54.00	-16.67	V
2405.000	73.52	-5.65	67.87	94.00	-26.13	Н
4810.000	35.88	5.07	40.95	54.00	-13.05	Н
7215.000	27.96	7.07	35.03	54.00	-18.97	Н
9620.000	25.51	10.69	36.20	54.00	-17.80	Н






Band Edge:

Peak Measur	Peak Measurement:								
Frequency (MHz)	Reading Level (dB _µ V)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Antenna polarization			
2400.00	40.17	-5.79	34.38	74.00	-39.62	V			
2483.50	39.86	-4.98	34.88	74.00	-39.12	V			
2400.00	40.20	-5.79	34.41	74.00	-39.59	Н			
2483.50	39.53	-4.98	34.55	74.00	-39.45	Н			

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Emission Level (dB _µ V/m)	Limits (dBμV/m)	Margin (dB)	Antenna polarization
2400.00	35.42	-5.79	29.63	54.00	-24.37	V
2483.50	31.75	-4.98	26.77	54.00	-27.23	V
2400.00	33.86	-5.79	28.07	54.00	-25.93	Н
2483.50	32.49	-4.98	27.51	54.00	-26.49	Н





Test at N	liddle Channe	el in transmitt	ing status			
Peak Measu	rement:					
Frequency (MHz)	Reading Level (dB _µ V)	Factor (dB)	Emission Level (dB _µ V/m)	Limits (dBμV/m)	Margin (dB)	Antenna polarization
2443.000	89.40	-5.34	84.06	114.00	-29.94	V
4886.000	60.34	5.14	65.48	74.00	-8.52	V
7329.000	42.85	7.56	50.41	74.00	-23.59	V
9772.000	33.71	11.42	45.13	74.00	-28.87	V
2443.000	84.62	-5.34	79.28	114.00	-34.72	Н
4886.000	61.03	5.14	66.17	74.00	-7.83	Н
7329.000	42.85	7.56	50.41	74.00	-23.59	Н
9772.000	33.67	11.42	45.09	74.00	-28.91	Н
Average Meas	urement:					•
2443.000	82.36	-5.34	77.02	94.00	-16.98	V
4886.000	43.98	5.14	49.12	54.00	-4.88	V
7329.000	32.47	7.56	40.03	54.00	-13.97	V
9772.000	26.24	11.42	37.66	54.00	-16.34	V
2443.000	72.35	-5.34	67.01	94.00	-26.99	Н
4886.000	41.66	5.14	46.80	54.00	-7.20	Н
7329.000	32.43	7.56	39.99	54.00	-14.01	Н
9772.000	25.87	11.42	37.29	54.00	-16.71	Н





Band Edge:

Peak Measur	Peak Measurement:								
Frequency (MHz)	Reading Level (dBµV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Antenna polarization			
2400.00	41.05	-5.79	35.26	74.00	-38.74	V			
2483.50	42.37	-4.98	37.39	74.00	-36.61	V			
2400.00	41.92	-5.79	36.13	74.00	-37.87	Н			
2483.50	40.68	-4.98	35.70	74.00	-38.30	Н			

Average Measurement:

5	<u> </u>							
Frequency (MHz)	Reading Level (dB _µ V)	Factor (dB)	Emission Level (dB _µ V/m)	Limits (dBμV/m)	Margin (dB)	Antenna polarization		
2400.00	30.23	-5.79	24.44	54.00	-29.56	V		
2483.50	30.10	-4.98	25.12	54.00	-28.88	V		
2400.00	30.72	-5.79	24.93	54.00	-29.07	Н		
2483.50	30.55	-4.98	25.57	54.00	-28.43	Н		





Peak Measu	rement:					
Frequency (MHz)	Reading Level (dB _µ V)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBμV/m)	Margin (dB)	Antenna polarization
2477.000	88.21	-5.04	83.17	114.00	-30.83	V
4954.000	58.72	5.21	63.93	74.00	-10.07	V
7431.000	42.10	8.02	50.12	74.00	-23.88	V
9908.000	35.64	12.06	47.70	74.00	-26.30	V
2477.000	83.97	-5.04	78.93	114.00	-35.07	Н
4954.000	54.34	5.21	59.55	74.00	-14.45	Н
7431.000	42.59	8.02	50.61	74.00	-23.39	Н
9908.000	31.48	12.06	43.54	74.00	-30.46	Н
Average Meas	surement:					
2477.000	80.25	-5.04	75.21	94.00	-18.79	V
4954.000	43.76	5.21	48.97	54.00	-5.03	V
7431.000	32.54	8.02	40.56	54.00	-13.44	V
9908.000	26.38	12.06	38.44	54.00	-15.56	V
2477.000	72.60	-5.04	67.56	94.00	-26.44	Н
4954.000	39.92	5.21	45.13	54.00	-8.87	Н
7431.000	32.46	8.02	40.48	54.00	-13.52	Н
9908.000	27.35	12.06	39.41	54.00	-14.59	Н





Band Edge:

Peak Measur	Peak Measurement:								
Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Emission Level (dB _µ V/m)	Limits (dBμV/m)	Margin (dB)	Antenna polarization			
2400.00	41.35	-5.79	35.56	74.00	-38.44	V			
2483.50	40.96	-4.98	35.98	74.00	-38.02	V			
2400.00	41.31	-5.79	35.52	74.00	-38.48	Н			
2483.50	40.49	-4.98	35.51	74.00	-38.49	Н			

Average Measurement:

Frequency (MHz)	Reading Level (dB _µ V)	Factor (dB)	Emission Level (dB _µ V/m)	Limits (dBμV/m)	Margin (dB)	Antenna polarization
2400.00	30.57	-5.79	24.78	54.00	-29.22	V
2483.50	30.43	-4.98	25.45	54.00	-28.55	V
2400.00	31.18	-5.79	25.39	54.00	-28.61	Н
2483.50	30.95	-4.98	25.97	54.00	-28.03	Н

Remark:


1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor.

- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.
- 4). For Radiated Emissions fall in the restricted bands (2400MHz is worse case than 2390MHz and report it as above), which set out in Section 15.205 Restricted bands.

Also there is not any other emission which falls in restricted bands can be detected and reported.

Test result: The unit does meet the FCC requirements.





7.3 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.215

(c)Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under

which the equipment is operated.


Test Method: ANSI C63.10: Clause 6.9.1

Operation within the band 2405 MHz to 2477 MHz

Method of A small sample of the transmitter output was fed into the Spectrum

measurement: Analyzer and the attached plot was taken.


Test in the frequency 2405MHz (20 dB bandwidth)

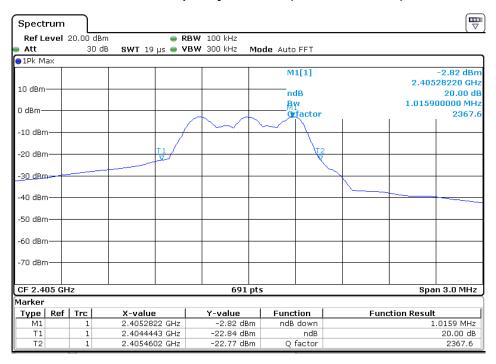






Test in the frequency 2443MHz (20 dB bandwidth)

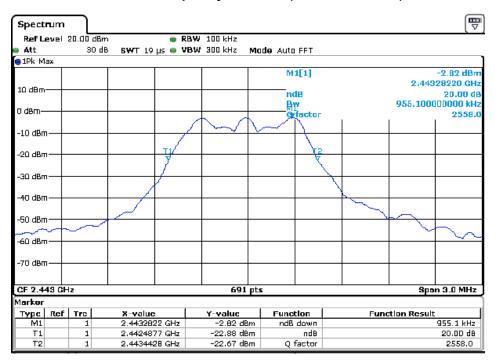

Test in the frequency 2477MHz (20 dB bandwidth)

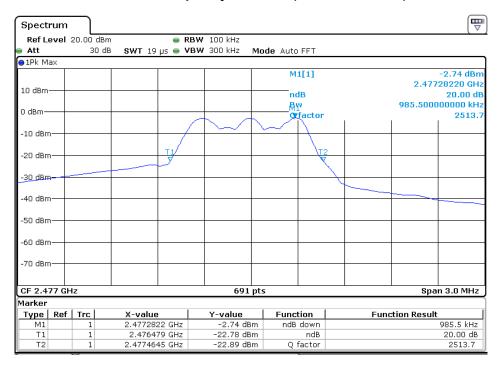



Issued Date: 2016-09-14

7.4 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz

Test Requirement: FCC Part 15 C section 15.207

Test Method: ANSI C63.10: Clause 6.2

Frequency Range: 150 kHz to 30 MHz

Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)

Test Limit

Limits for conducted disturbance at the mains ports of class B


Frequency Range	Class B Limit dB(μV)		
(MHz)	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

EUT Operation:


Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).





Test Configuration:

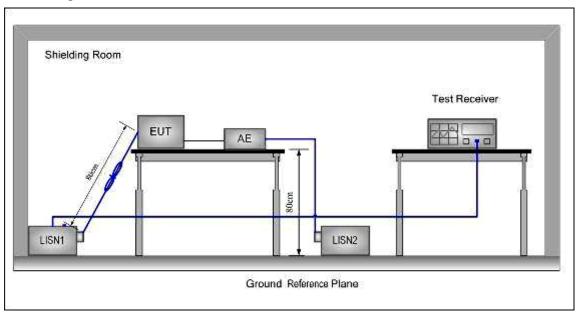

Test procedure:

- 1. The mains terminal disturbance voltage test was conducted in a shielded room.
- 2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu H + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
- 4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.







7.2.3 Measurement Data

EUT:	Electric Skateboard Remote	Model Name. :	RNG	
Temperature:	26 ℃	Relative Humidity:	54%	
Pressure:	1010hPa	Test Date :	2016-09-08	
Test Mode:	TX(1Mbps) CH01 (worst) Phase : Line			
Test Voltage : DC 5.0V from adapter, AC 120V/60Hz for adapter				

Frequency (MHz)	Meter Reading (dBµV)	Factor(dB)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Detector
0.1580	48.54	11.75	60.29	65.56	-5.27	Quasi-Peak
0.1539	35.15	11.84	46.99	55.78	-8.79	Average
0.5740	35.02	10.00	45.02	56.00	-10.98	Quasi-Peak
0.5740	30.30	10.00	40.30	46.00	-5.70	Average
20.2860	41.22	2.04	43.26	60.00	-16.74	Quasi-Peak
20.1740	30.63	2.04	32.67	50.00	-17.33	Average

Remark: Factor = LISN factor + Cable Loss + Pulse limiter factor.

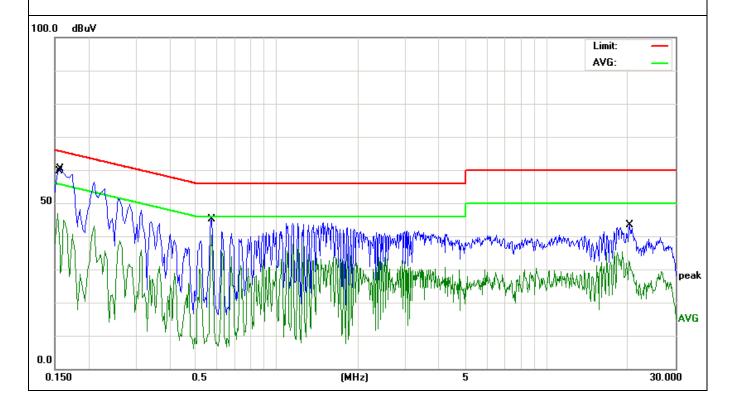







EUT:	Electric Skateboard Remote	Model Name. :	RNG	
Temperature:	26 ℃	Relative Humidity:	54%	
Pressure:	1010hPa	Test Date :	2016-09-08	
Test Mode:	TX(1Mbps) CH01 (worst)	Phase :	Neutral	
Test Voltage : DC 5.0V from adapter, AC 120V/60Hz for adapter				

Frequency (MHz)	Meter Reading (dBµV)	Factor(dB)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Detector
0.1580	47.39	11.75	59.14	65.56	-6.42	Quasi-Peak
0.1580	35.70	11.75	47.45	55.56	-8.11	Average
0.5700	35.88	10.00	45.88	56.00	-10.12	Quasi-Peak
0.5740	27.70	10.00	37.70	46.00	-8.30	Average
18.2979	38.52	1.82	40.34	60.00	-19.66	Quasi-Peak
17.7658	30.63	1.75	32.38	50.00	-17.62	Average

Remark: Factor = LISN factor + Cable Loss + Pulse limiter factor.

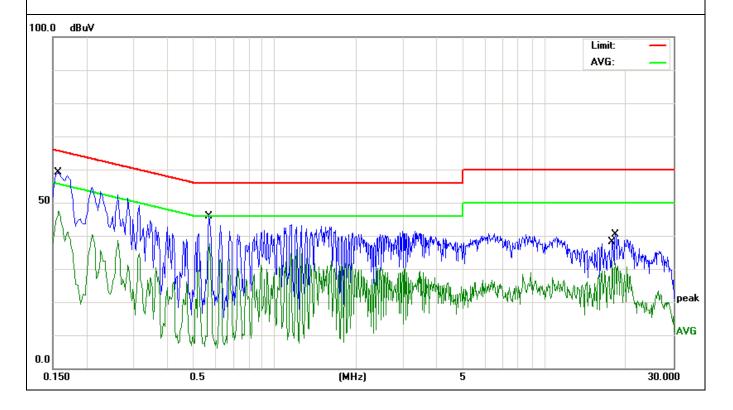





8 Photographs

8.1 Radiated Emission Test Setup

Below 1G



Above 1G







8.2 Conducted Emissions Test Setup







8.3 EUT Constructional Details






























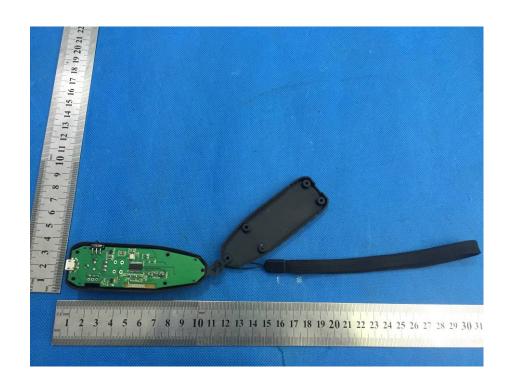


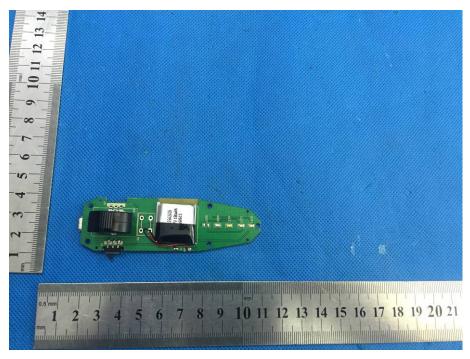






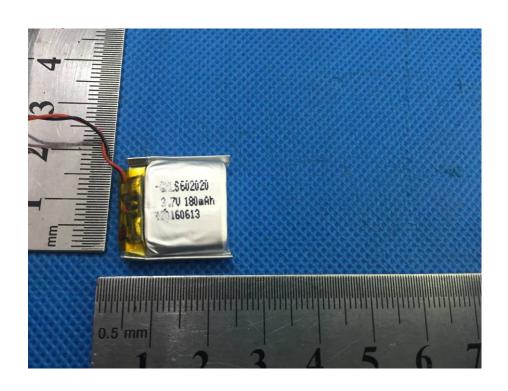

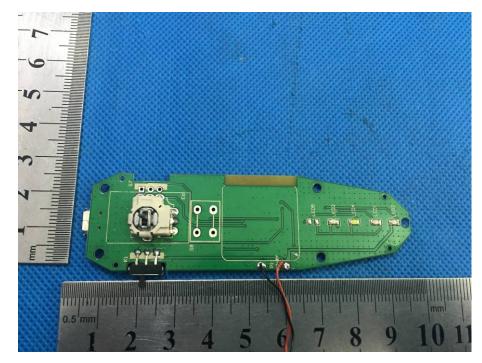





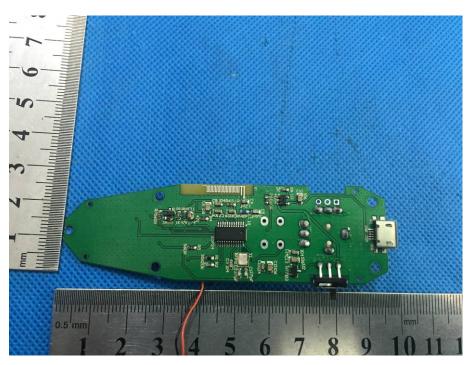

End of report