



**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-247 ISSUE 2**

CERTIFICATION TEST REPORT

For

**SWAGCYCLE FOLDING ELECTRIC SCOOTER
MODEL NUMBER: SC-1**

**FCC ID: 2AH6K-SC1
IC: 21497-SC1**

REPORT NUMBER: 4787901916-6

ISSUE DATE: July 21, 2017

Prepared for

**Shenzhen Global E-Commerce Co., Ltd
Room203, Building C, Getailong Industrial Park, No.445 Bulong Road, Bantian
Street Longgang District, Shenzhen, 518129 CHINA**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 10, Innovation Technology Park,
Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China**
Tel: +86 769 33817100
Fax: +86 769 33244054
Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
--	07/21/2017	Initial Issue	

Summary of Test Results			
Clause	Test Items	FCC/IC Rules	Test Results
1	6db DTS Bandwidth	FCC 15.247 (a) (2) IC RSS-247 Clause 5.1 (1)	Complied
2	Peak Conducted Power	FCC 15.247 (b) (3) IC RSS-247 Clause 5.4 (4)	Complied
3	Power Spectral Density	FCC 15.247 (3) IC RSS-247 Clause 5.2 (2)	Complied
4	Conducted Band edge And Spurious emission	FCC 15.247 (d) IC RSS-247 Clause 5.5	Complied
5	Radiated Band edges and Spurious emission	FCC 15.247 (d) FCC 15.209 FCC 15.205 IC RSS-247 Clause 5.5 IC RSS-GEN Clause 8.9	Complied
6	Conducted Emission Test For AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	Complied
7	Antenna Requirement	FCC 15.203 RSS-GEN Clause 8.3	Complied

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	8
4.2. <i>MEASUREMENT UNCERTAINTY</i>	8
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	9
5.2. <i>MAXIMUM OUTPUT POWER</i>	9
5.3. <i>CHANNEL LIST</i>	9
5.4. <i>TEST CHANNEL CONFIGURATION</i>	9
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	10
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	10
5.7. <i>WORST-CASE CONFIGURATIONS</i>	10
5.8. <i>TEST ENVIRONMENT</i>	10
5.9. <i>DESCRIPTION OF TEST SETUP</i>	11
5.10. <i>MEASURING INSTRUMENT AND SOFTWARE USED</i>	12
6. MEASUREMENT METHODS	13
7. ANTENNA PORT TEST RESULTS	14
7.1. <i>ON TIME AND DUTY CYCLE</i>	14
7.2. <i>6 dB BANDWIDTH & 99% BANDWIDTH</i>	15
7.3. <i>PEAK CONDUCTED OUTPUT POWER</i>	18
7.4. <i>POWER SPECTRAL DENSITY</i>	19
7.5. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS</i>	22
8. RADIATED TEST RESULTS.....	31
8.1. <i>LIMITS AND PROCEDURE</i>	31
8.2. <i>RESTRICTED BANDEDGE</i>	35
8.3. <i>SPURIOUS EMISSIONS (1~25GHz)</i>	39
8.4. <i>SPURIOUS EMISSIONS 30M ~ 1 GHz</i>	51
8.5. <i>SPURIOUS EMISSIONS BELOW 30M</i>	53
9. AC POWER LINE CONDUCTED EMISSIONS	55

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Shenzhen Global E-Commerce Co., Ltd
Address: Room203, Building C, Getailong Industrial Park, No.445 Bulong Road, Bantian Street Longgang District, Shenzhen, 518129 CHINA

Manufacturer Information

Company Name: Shenzhen Global E-Commerce Co., Ltd
Address: Room203, Building C, Getailong Industrial Park, No.445 Bulong Road, Bantian Street Longgang District, Shenzhen, 518129 CHINA


EUT Description

Product Name SWAGCYCLE FOLDING ELECTRIC SCOOTER
Brand Name N/A
Model Name SC-1
Serial Number N/A
Model Difference N/A
Date Tested April 10, 2017 ~ June 28, 2017

APPLICABLE STANDARDS

STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	PASS
INDUSTRY CANADA RSS-247 Issue 2	PASS
INDUSTRY CANADA RSS-GEN Issue 4	PASS

Tested By:

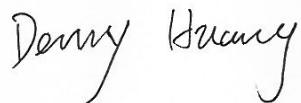

Denny Huang
Engineer Project Associate
Approved By:



Stephen Guo
Laboratory Manager

Check By:



Shawn Wen
Laboratory Leader

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with 558074 D01 DTS Meas Guidance v04, 414788 D01 Radiated Test Site v01, ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 4, and RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

Test Location	Dongguan Dongdian Testing Service Co., Ltd
Address	No. 17, Zongbu Road 2, Songshan Lake Sci&Tech Park, Dongguan City, Guangdong Province, 523808, China
Accreditation Certificate	<p>Dongguan Dongdian Testing Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until January 31, 2018.</p> <p>Dongguan Dongdian Testing Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 270092, Renewal date March 11, 2015, valid time is until March 11, 2018.</p> <p>The 3m Alternate Test Site of Dongguan Dongdian Testing Service Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 10288A on April 23, 2015, valid time is until April 23, 2018.</p>

Note: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Uncertainty for Conduction emission test	3.32dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	4.10dB(1-6GHz)
	4.40dB (6GHz-18Gz)
	3.54dB (18GHz-26Gz)
Bandwidth	1.1%
Stop Transmitting Time Test	0.6%

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Equipment	SWAGCYCLE FOLDING ELECTRIC SCOOTER		
Model Name	SC-1		
Product Description (Bluetooth)	Operation Frequency		2402 MHz ~ 2480 MHz
	Modulation Type		Data Rate
	GFSK		1Mbps
Adapter	Input: AC 100~240V, 2.5A, 50/60Hz Output: DC 42V, 2A		
Battery	36V/4.4Ah		
Bluetooth Version	BT V4.1		
Hardware Version	B1		
Software Version	2.0.2		

5.2. MAXIMUM OUTPUT POWER

Frequency Range (MHz)	Number of Transmit Chains (NTX)	Bluetooth Mode	Frequency (MHz)	Channel Number	Max PK Conducted Power (dBm)	EIRP (dBm)
2400-2483.5	1	BLE	2402-2480	0-39[40]	-6.620	-6.620

5.3. CHANNEL LIST

Channel	Frequency (MHz)						
00	2402	11	2424	22	2446	33	2468
01	2404	12	2426	23	2448	34	2470
02	2406	13	2428	24	2450	35	2472
03	2408	14	2430	25	2452	36	2474
04	2410	15	2432	26	2454	37	2476
05	2412	16	2434	27	2456	38	2478
06	2414	17	2436	28	2458	39	2480
07	2416	18	2438	29	2460		
08	2418	19	2440	30	2462		
09	2420	20	2442	31	2464		
10	2422	21	2444	32	2466		

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK	CH 00, CH 19, CH 39	2402MHz, 2440MHz, 2480MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software Version		SmartRF Studio 7		
Modulation Type	Transmit Antenna Number	Test Channel		
		CH 0	CH 19	CH 39
GFSK	1	Max	Max	Max

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2402-2480	PCB Antenna	0

Test Mode	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

5.7. WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)
BLE	DTS	GFSK	1Mbit/s

5.8. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	23 ~ 28°C
Voltage :	VL	N/A
	VN	DC 36V
	VH	N/A

Note: VL= Lower Extreme Test Voltage

VN= Nominal Voltage

VH= Upper Extreme Test Voltage

TN= Normal Temperature

5.9. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	FCC ID
1	Laptop	ThinkPad	T410	N/A
2	TI Control board	N/A	N/A	N/A

I/O PORT

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	DC In	DC	Unshielded	N/A	DC 42V, 2A


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	DC Cable	N/A	N/A	N/A

TEST SETUP

The EUT can work in an engineer mode with a software through a table PC.

SETUP DIAGRAM FOR TESTS

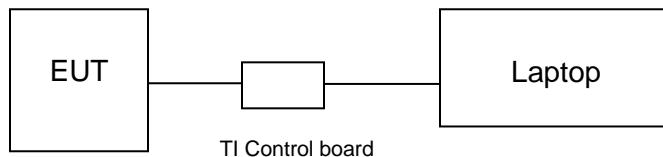

5.10. MEASURING INSTRUMENT AND SOFTWARE USED

Instrument (Conducted for RF Port)						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input checked="" type="checkbox"/>	Spectrum Analyzer	R&S	FSU26	1166.1660.26	2016/10/16	1 Year
<input checked="" type="checkbox"/>	Power Meter	Keysight	N1911A	MY55416024	2017/08/20	1 Year
<input checked="" type="checkbox"/>	Power Sensor	Keysight	N1921A	MY51100041	2017/02/13	1 Year
Instrument (Radiated Tests)						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Expired date
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESU8	100316	2016/10/16	1 Year
<input checked="" type="checkbox"/>	Spectrum analyzer	R&S	FSU26	1166.1660.26	2016/10/16	1 Year
<input checked="" type="checkbox"/>	Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	2016/10/27	1 Year
<input checked="" type="checkbox"/>	Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	2016/10/27	1 Year
<input checked="" type="checkbox"/>	Double Ridged Horn Antenna	R&S	HF907	100276	2016/10/12	1 Year
<input checked="" type="checkbox"/>	High Gain Horn Antenna	ETS-LINDGERN	3160-09	SEL0076	2016/10/16	1 Year
<input checked="" type="checkbox"/>	Pre-amplifier	A.H.	PAM-0118	360	2016/10/16	1 Year
<input checked="" type="checkbox"/>	Pre-amplifier	Compliance Directions Systems Inc.	PAP-1G26-48	6279.628	2016/01/06	1 Year
<input checked="" type="checkbox"/>	RF Cable	HUBSER	CP-X2	W11.03	2016/10/16	1 Year
<input checked="" type="checkbox"/>	RF Cable	HUBSER	CP-X1	W12.02	2016/10/16	1 Year
<input checked="" type="checkbox"/>	MI Cable	HUBSER	C10-01-01-1M	1091629	2016/10/16	1 Year
<input checked="" type="checkbox"/>	Test software	Audix	E3	V 6.11111b	N/A	N/A
Instrument (Line Conducted Emission (AC Main))						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Expired date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESU8	100316	2016/10/16	1 Year
<input checked="" type="checkbox"/>	LISN 1	R&S	ENV216	101109	2016/10/16	1 Year
<input checked="" type="checkbox"/>	LISN 2	R&S	ESH2-Z5	100309	2016/10/16	1 Year
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	101242	2016/10/16	1 Year
<input checked="" type="checkbox"/>	CE Cable 1	HUBSER	ESU8/RF2	W10.01	2016/10/16	1 Year
<input checked="" type="checkbox"/>	Test software	Audix	E3	V 6.11111b	N/A	N/A

6. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6dB Bandwidth and 99% Bandwidth	KDB 558074 D01 DTS Meas Guidance v04	8.0
2	Peak Output Power	KDB 558074 D01 DTS Meas Guidance v04	9.1.3
3	Power Spectral Density	KDB 558074 D01 DTS Meas Guidance v04	10.2
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 DTS Meas Guidance v04	11.0
5	Out-of-band emissions in restricted bands	KDB 558074 D01 DTS Meas Guidance v04	12.1
6	Band-edge	KDB 558074 D01 DTS Meas Guidance v04	13.3.2
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	7.3

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP

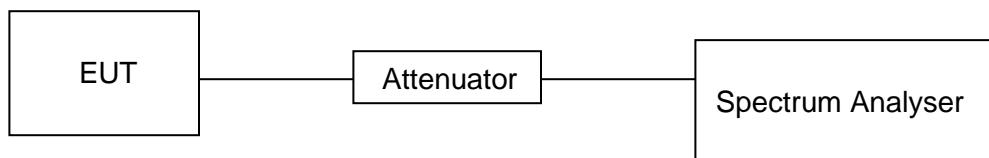


RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/B Minimum VBW (KHz)
GFSK	50	50	1	100	0	0.01

Note: Duty Cycle Correction Factor=10log(1/x).

Where: x is Duty Cycle(Linear)

ON TIME AND DUTY CYCLE MID CH

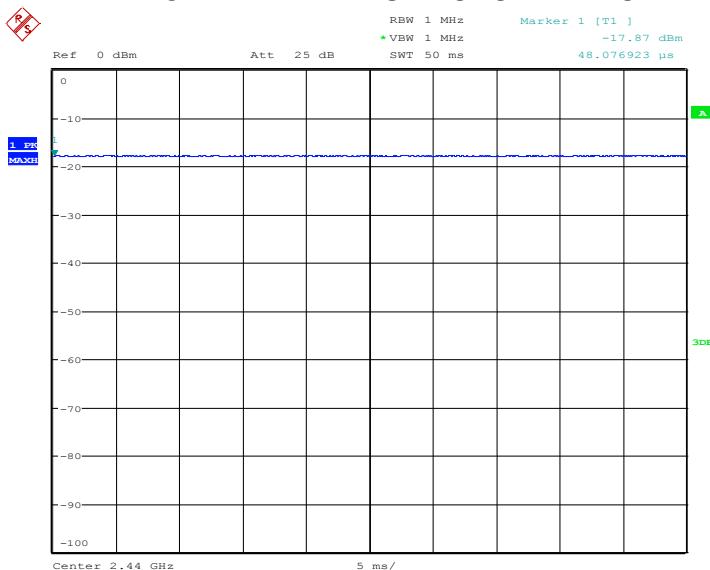

Date: 18.JUL.2017 14:25:44

7.2. 6 dB BANDWIDTH & 99% BANDWIDTH

LIMITS

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247 (a) (1)	6dB Bandwidth	>= 500KHz	2400-2483.5


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


TEST SETUP

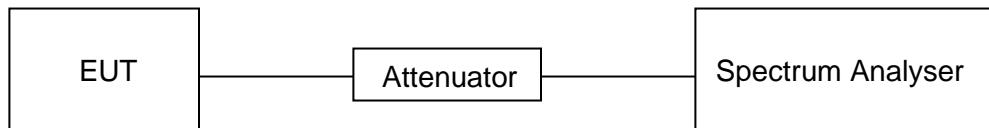


RESULTS

Channel	Frequency (MHz)	6dB bandwidth (MHz)	99% Bandwidth (MHz)	Result
Low	2402	0.688	1.200	Pass
Middle	2441	0.704	1.292	Pass
High	2480	0.680	1.160	Pass

Test Graphs

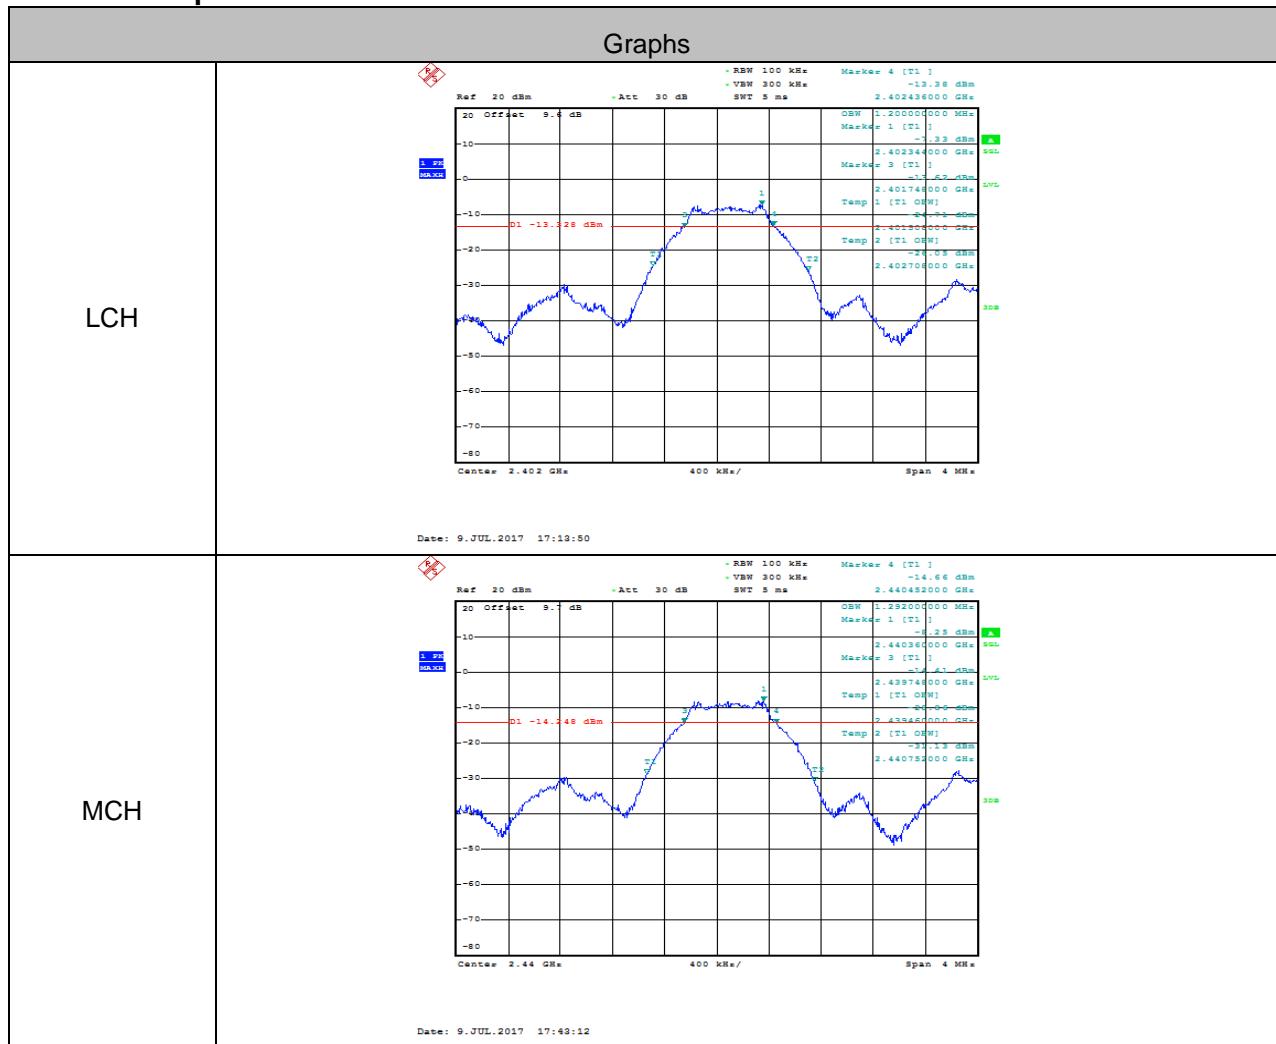

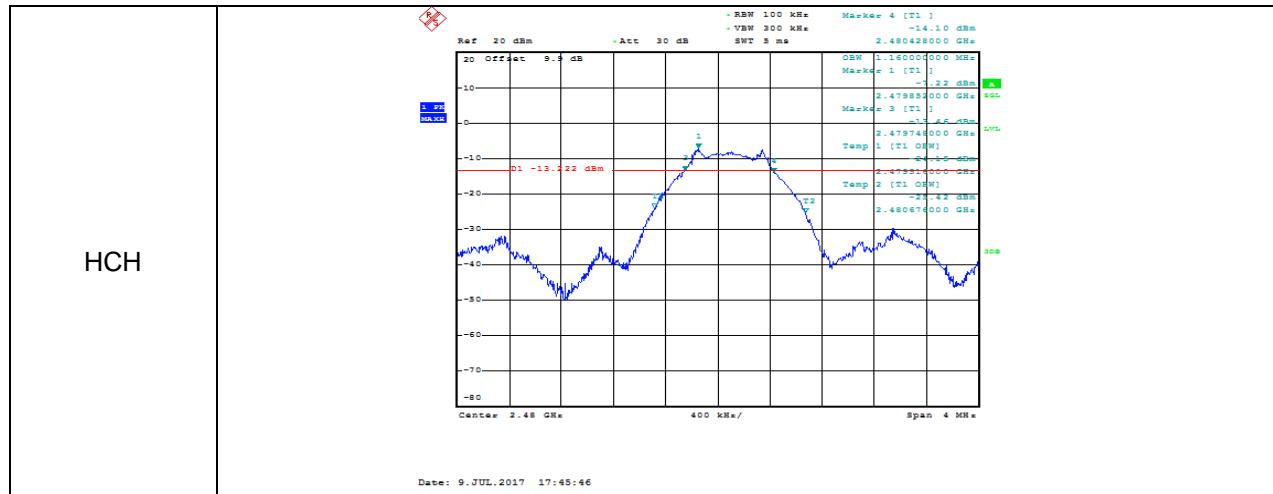

7.3. PEAK CONDUCTED OUTPUT POWER


LIMITS

FCC Part15 (15.247) , Subpart C IC RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(b)(3) IC RSS-247 5.4 (4)	Peak Output Power	1 watt or 30dBm	2400-2483.5

TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.
Measure peak power each channel.

TEST SETUP

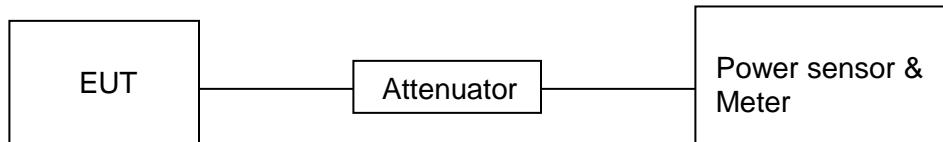

RESULTS

Test Channel	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
CH00	2402	-6.572	30
CH19	2440	-7.130	30
CH39	2480	-6.821	30

7.4. POWER SPECTRAL DENSITY

LIMITS

FCC Part15 (15.247) , Subpart C IC RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
FCC §15.247 (e) IC RSS-247 5.2 (2)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.


If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

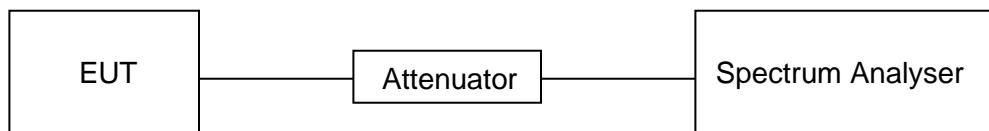

Frequency	Power Spectral Density (dBm)	Limit (dBm)	Result
2402 MHz	-7.020	8	PASS
2440 MHz	-7.650	8	PASS
2480 MHz	-7.060	8	PASS

Test Graphs

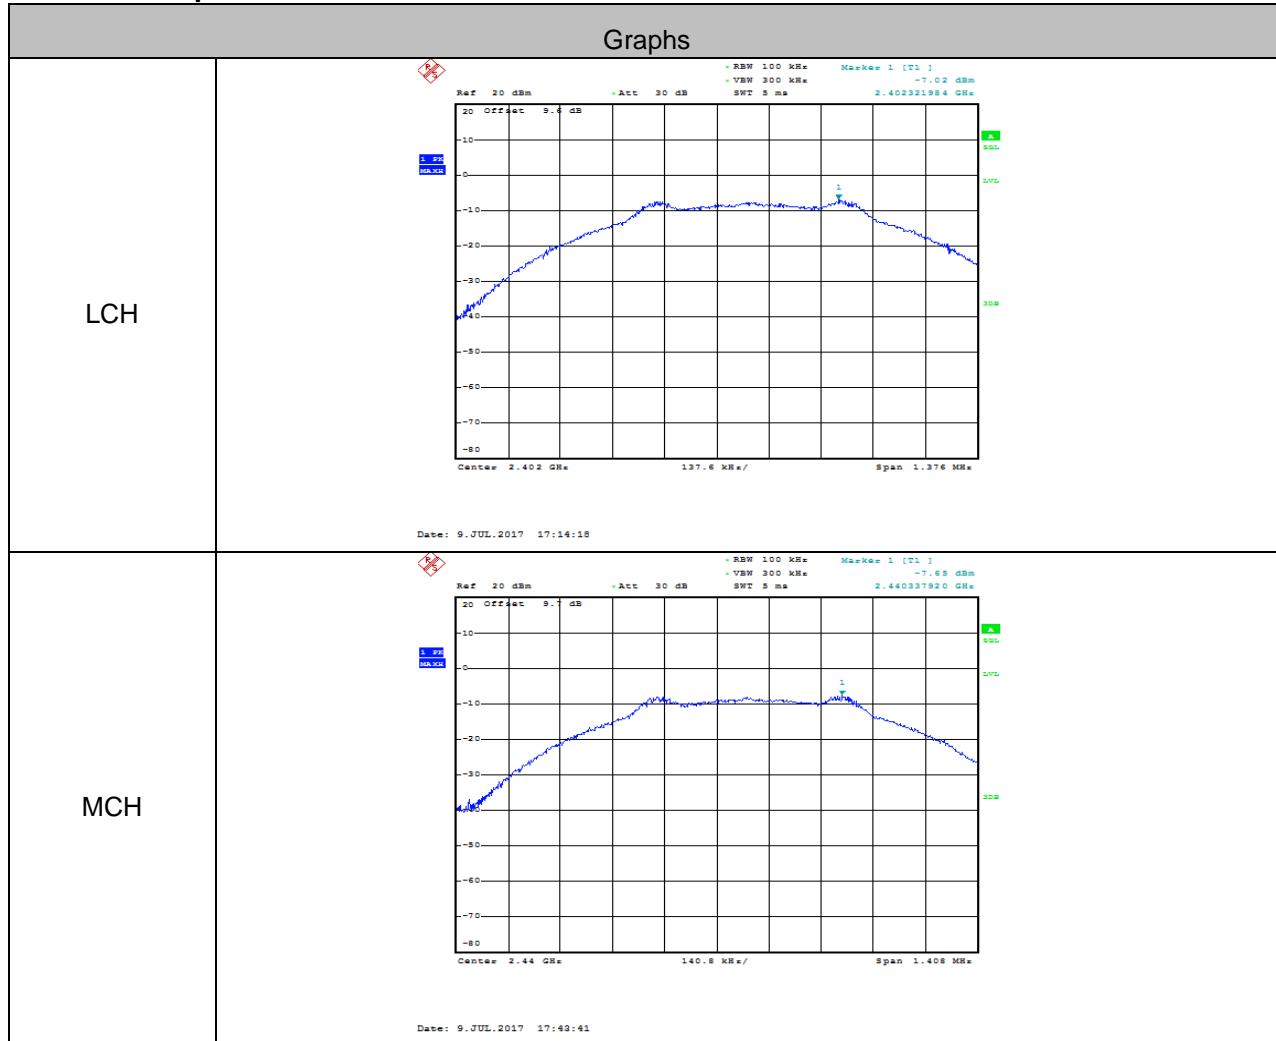



7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

LIMITS

FCC Part15 (15.247) , Subpart C IC RSS-247 ISSUE 2		
Section	Test Item	Limit
FCC §15.247 (d) IC RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:


Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100K
VBW	$\geq 3 \times$ RBW
measurement points	\geq span/RBW
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.

TEST SETUP

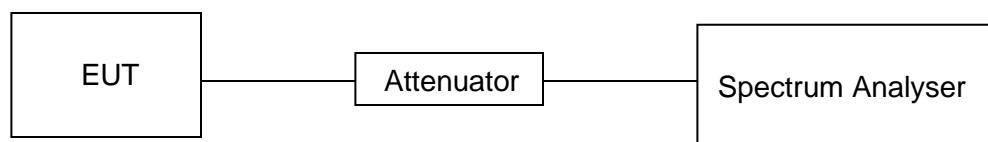


RESULTS

Conducted Bandedge

Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Max Spurious Level [dBm]	Limit [dBm]	Results
LCH	2402	-7.970	-47.972	-27.97	PASS
HCH	2480	-7.940	-46.314	-27.94	PASS

Test Graphs

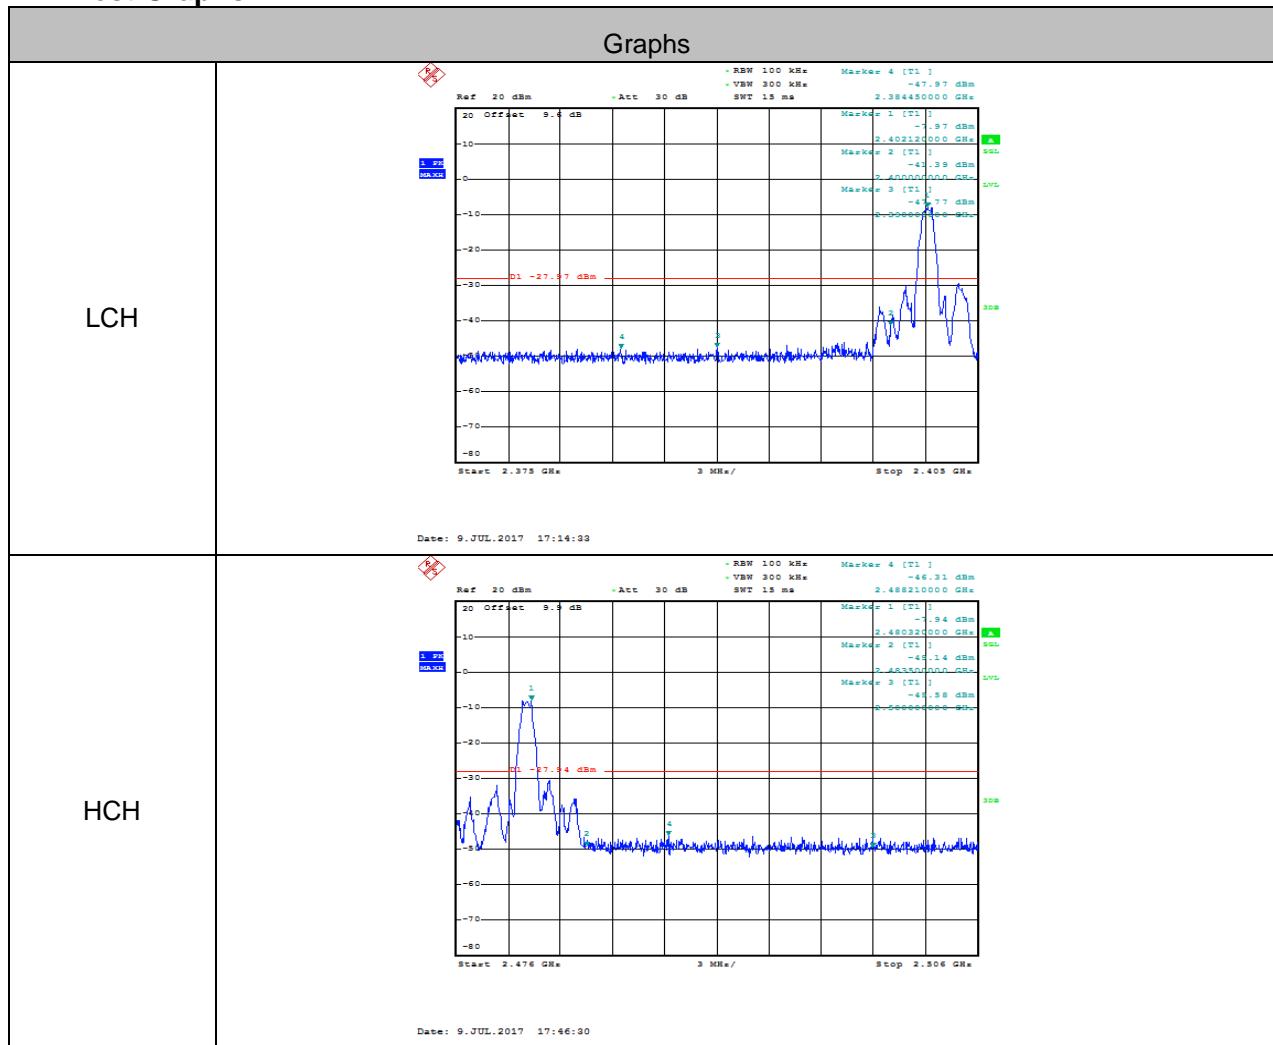



Conducted Spurious Emissions



Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
BLE	LCH	-7.12	<Limit	PASS
BLE	MCH	-7.53	<Limit	PASS
BLE	HCH	-7.60	<Limit	PASS



Test Graphs

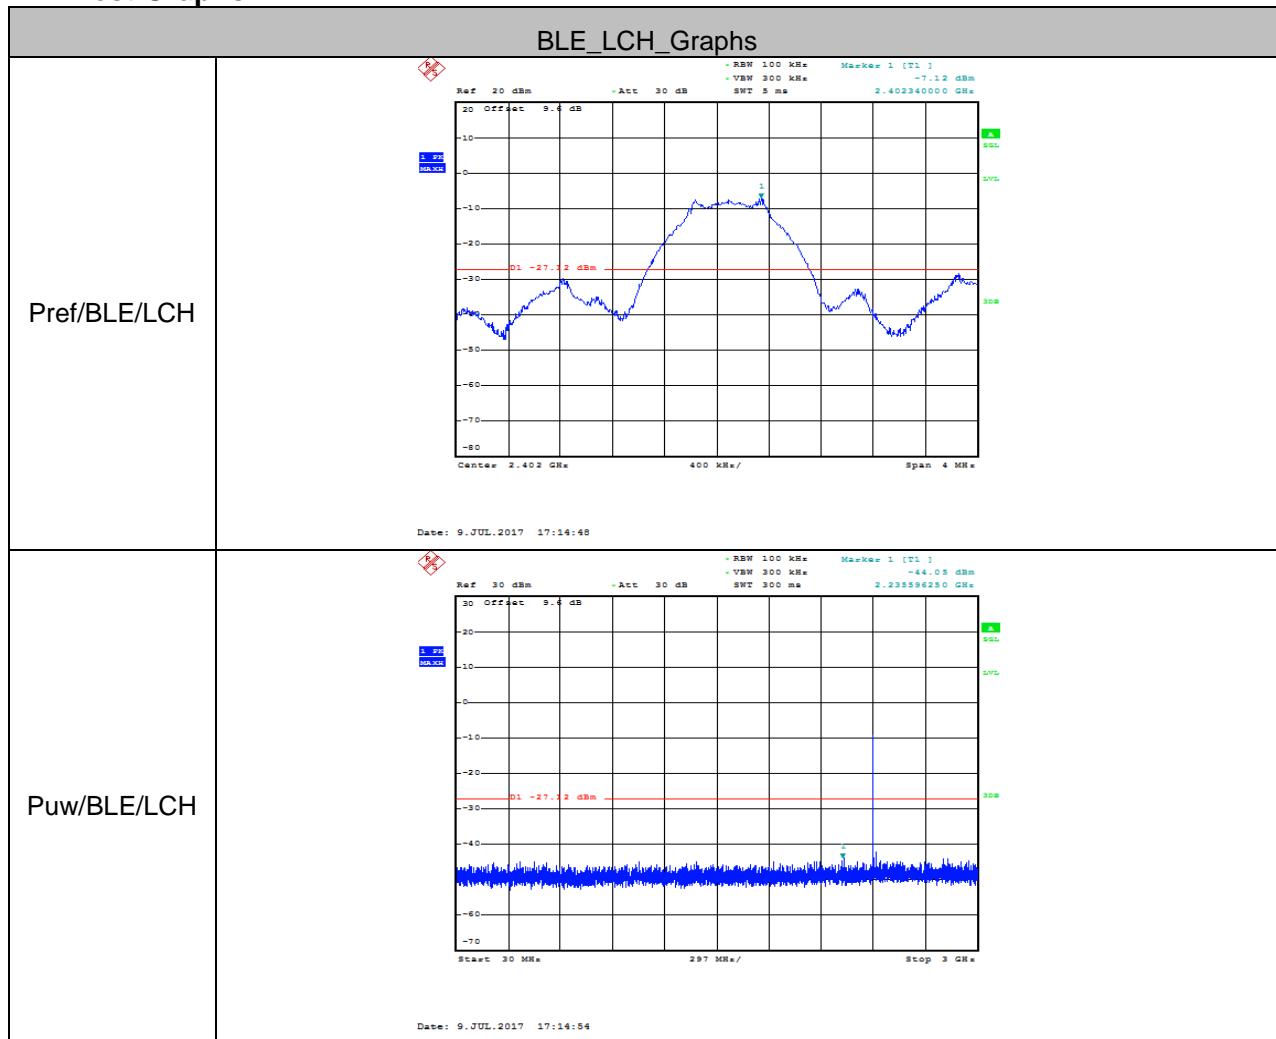

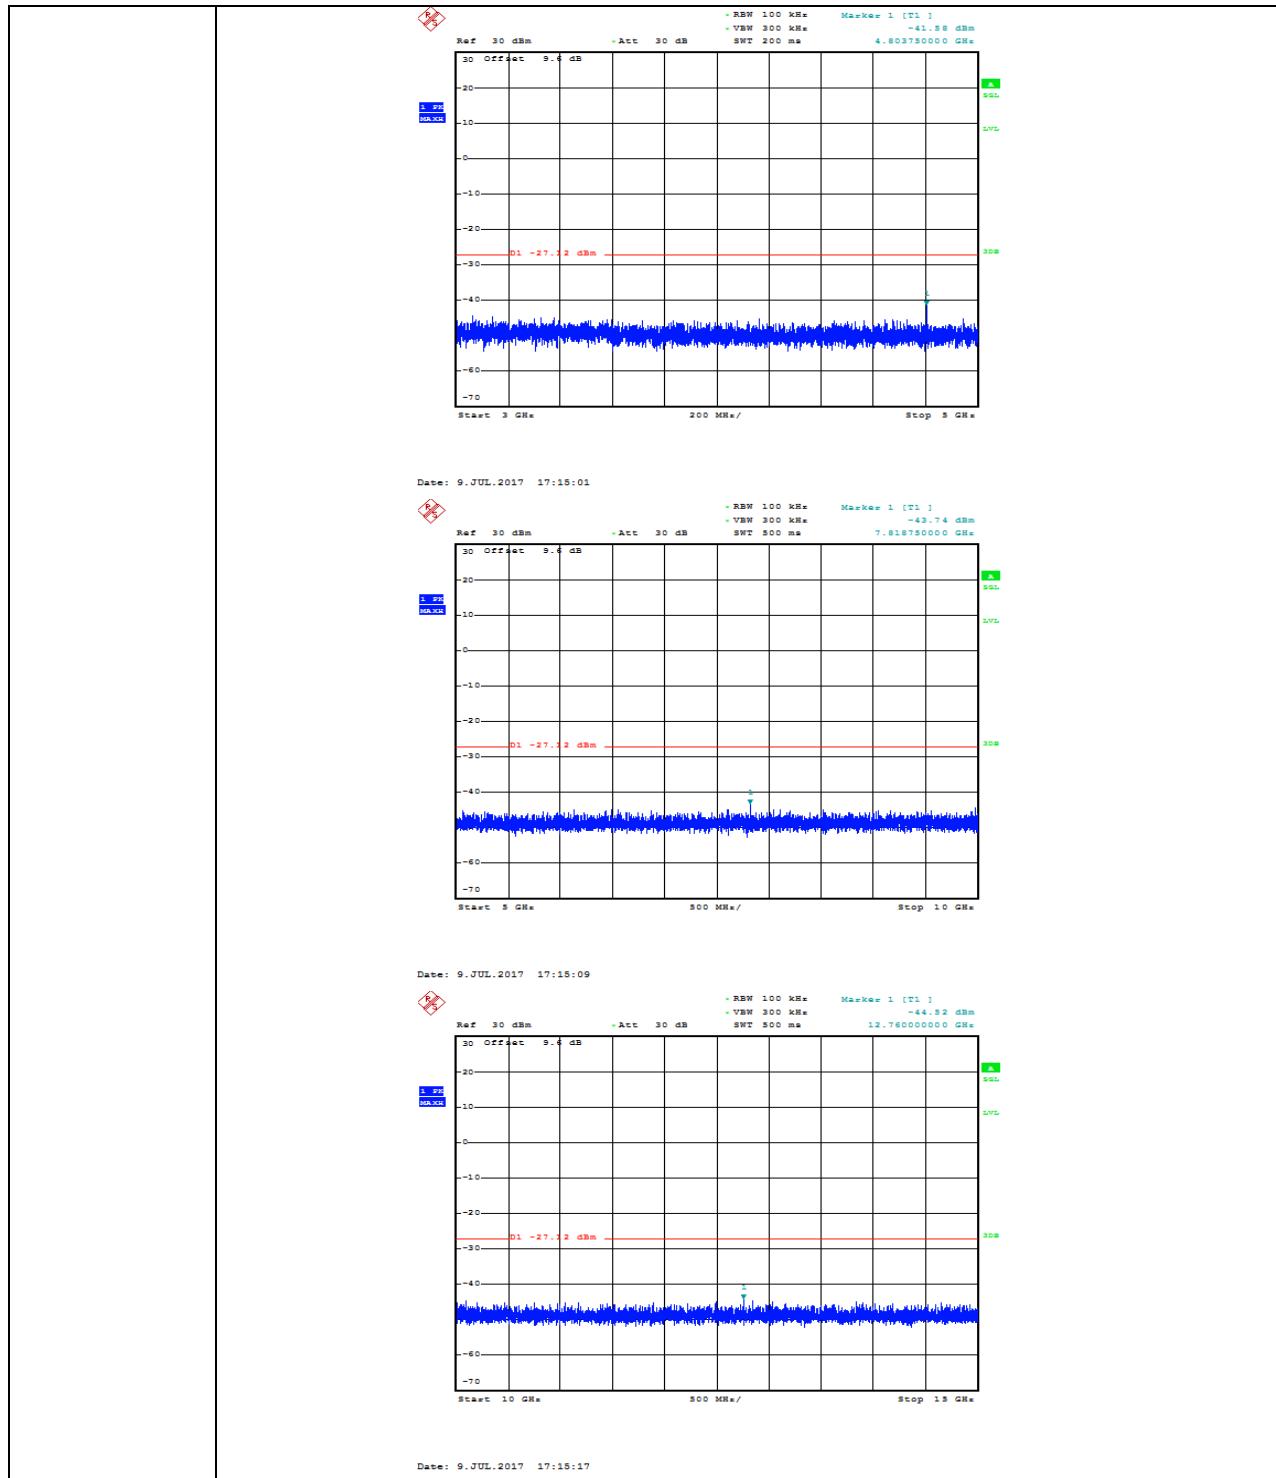


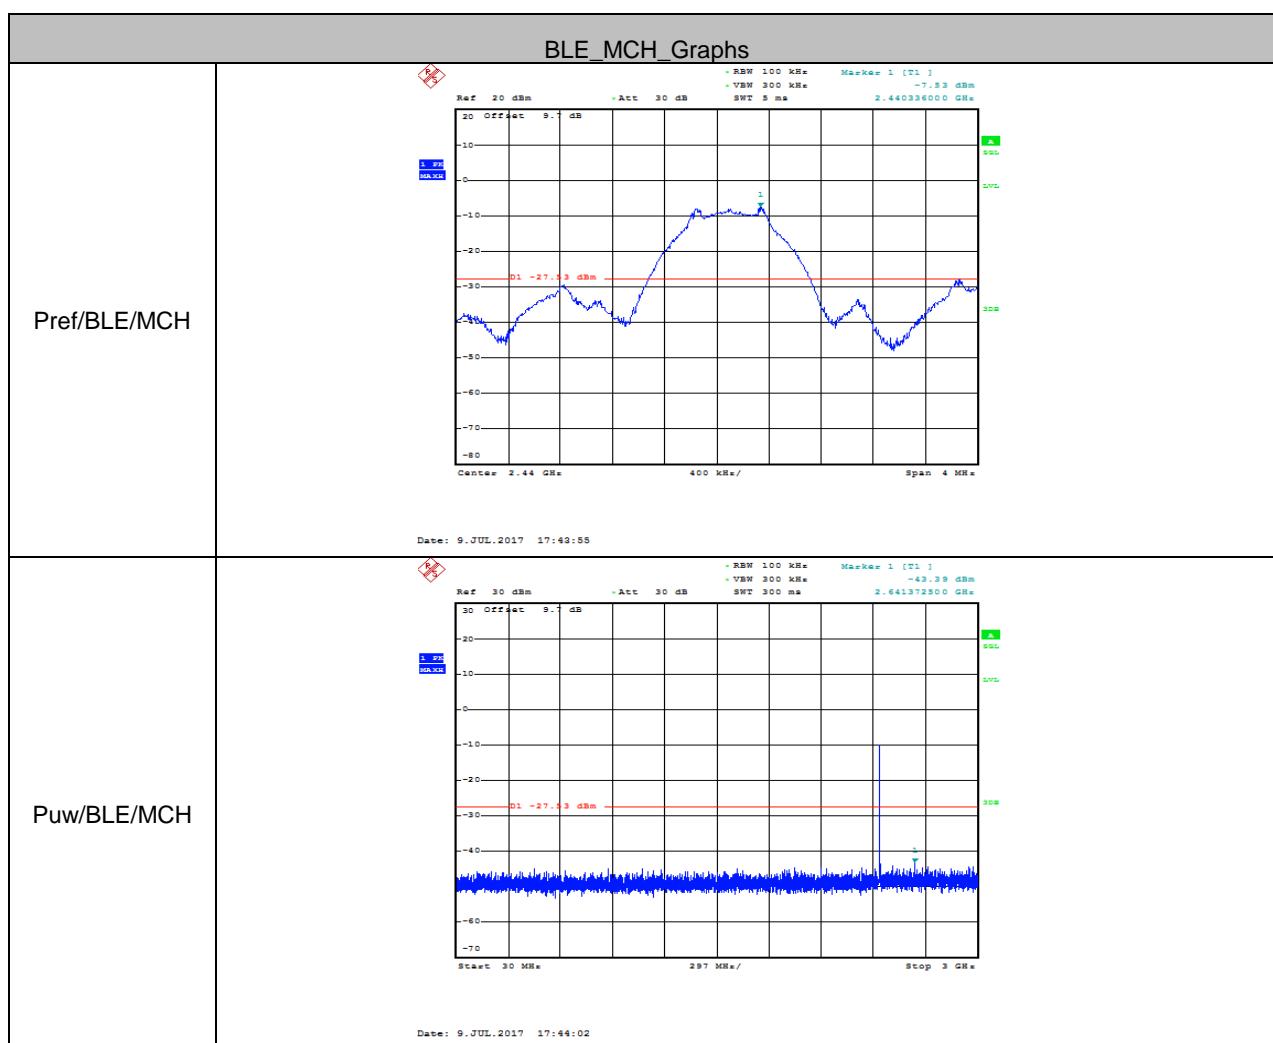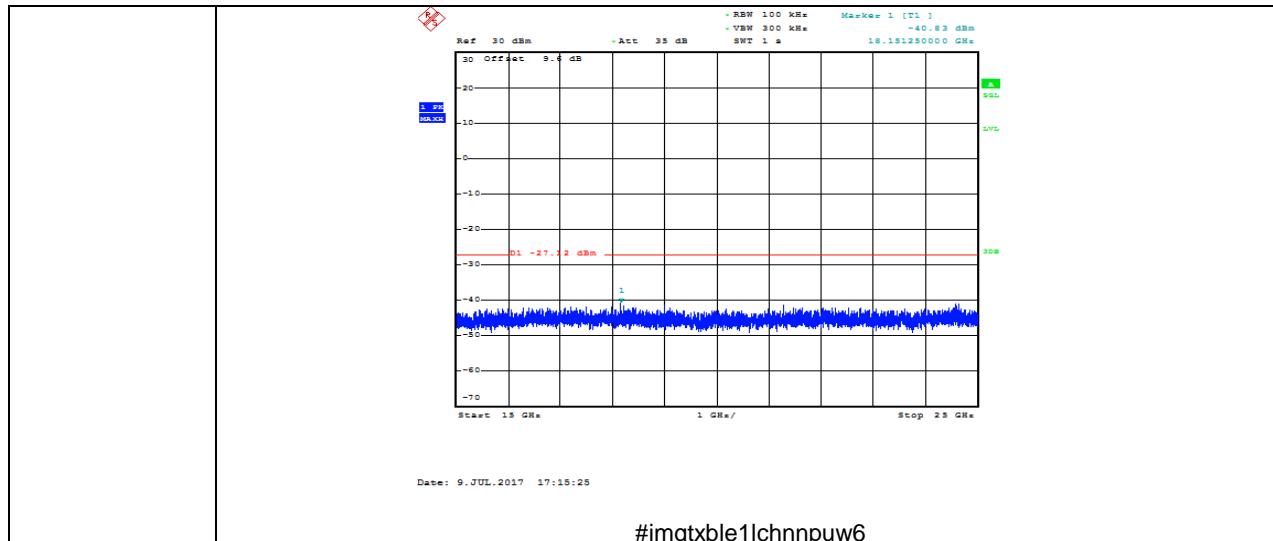



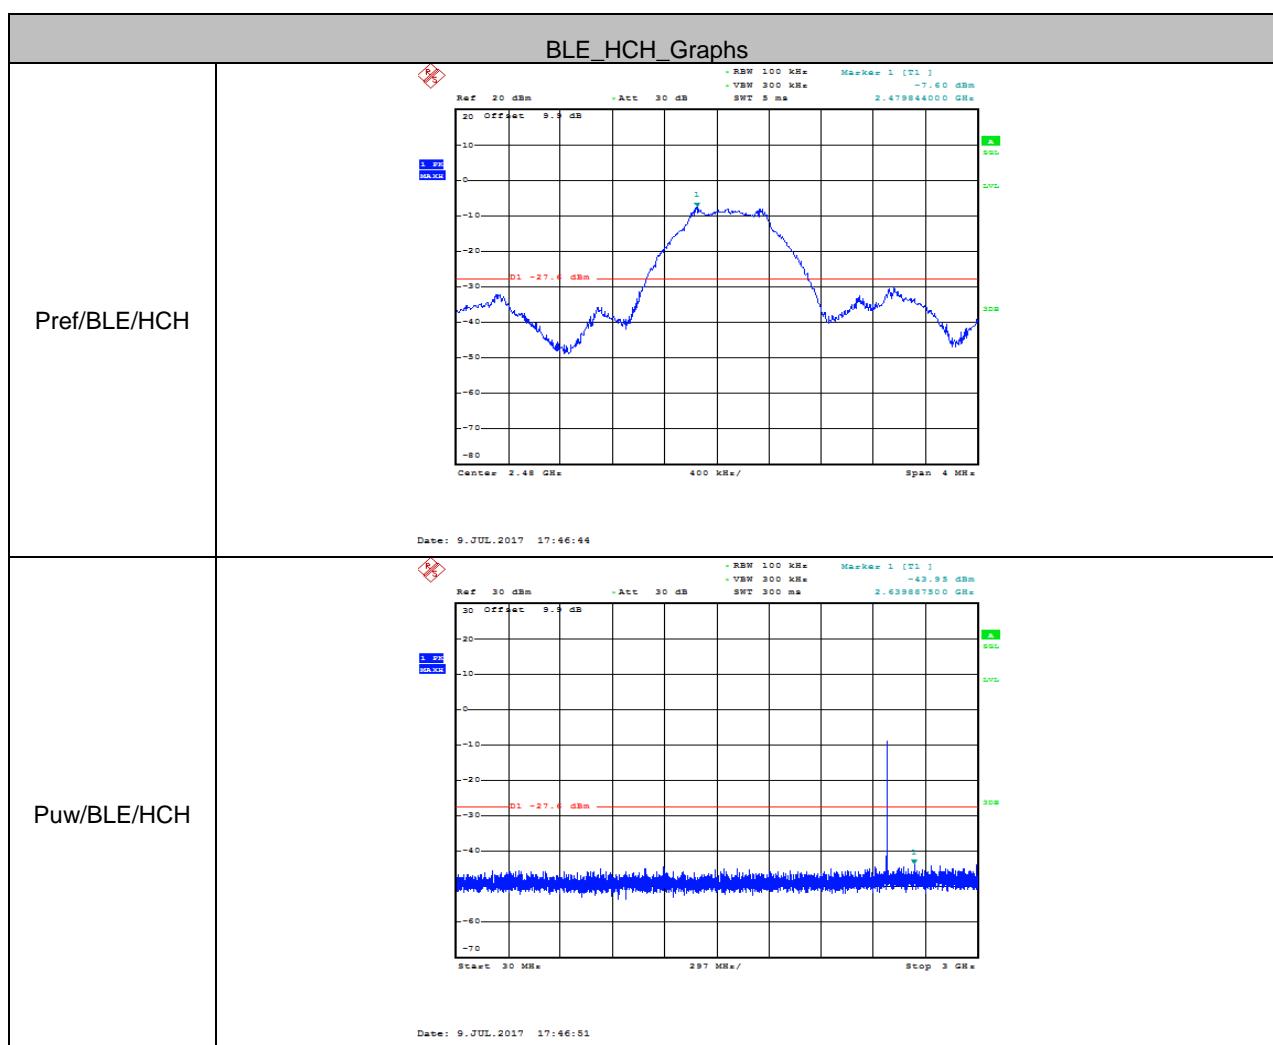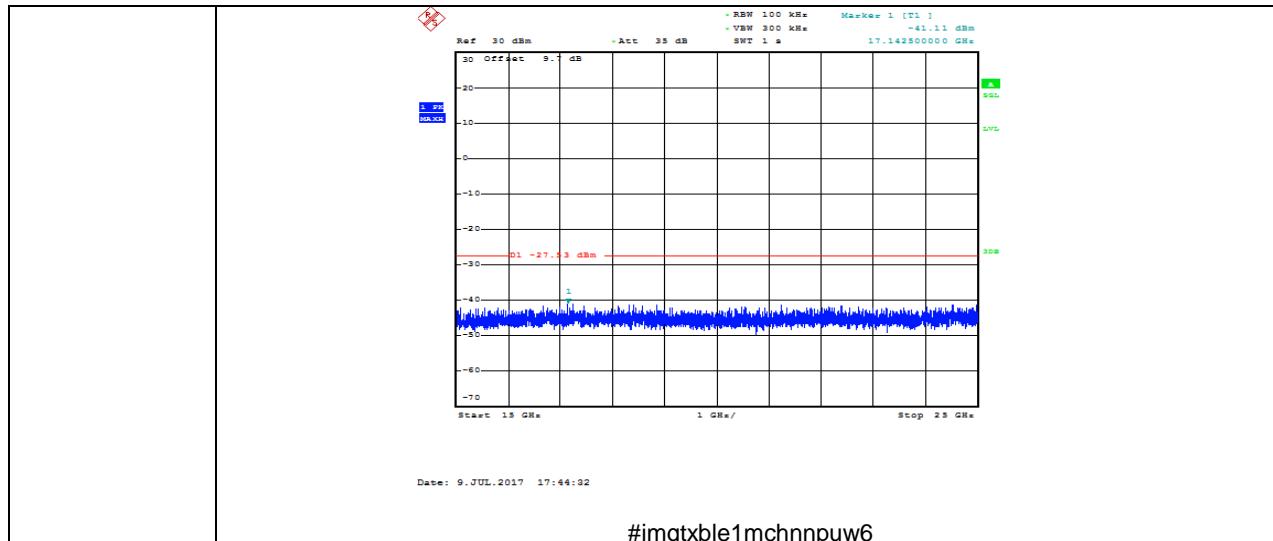



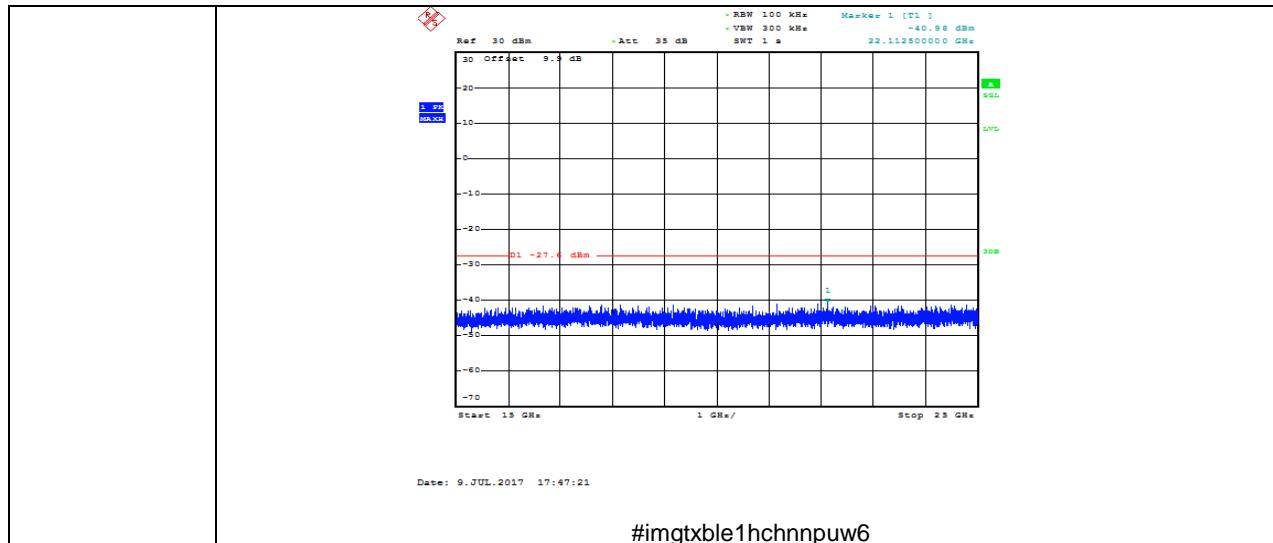

#imgtxble1hchnnpuw6

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to IC RSS-GEN Clause 8.9 (Transmitter)

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

TEST SETUP AND PROCEDURE

Below 30MHz

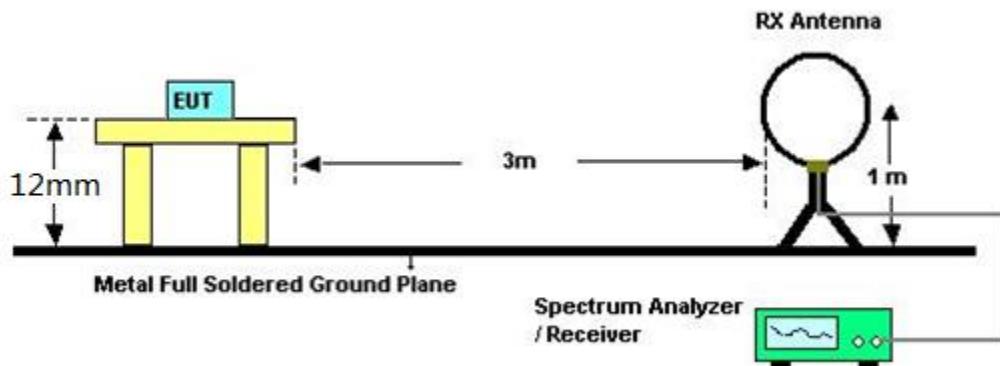


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 12mm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

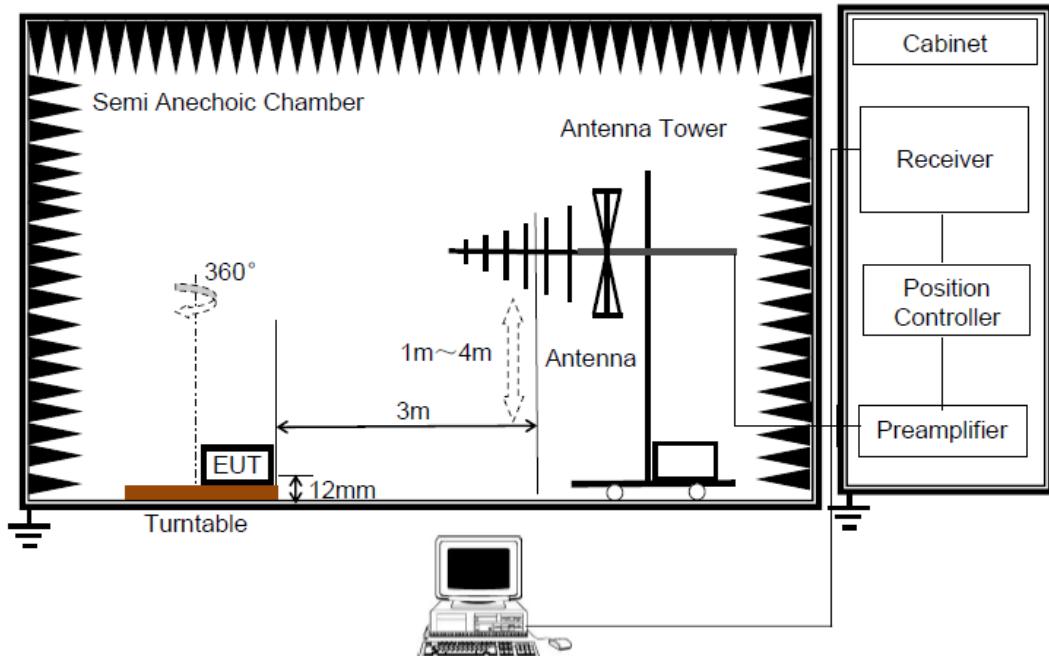


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 12mm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

ABOVE 1G

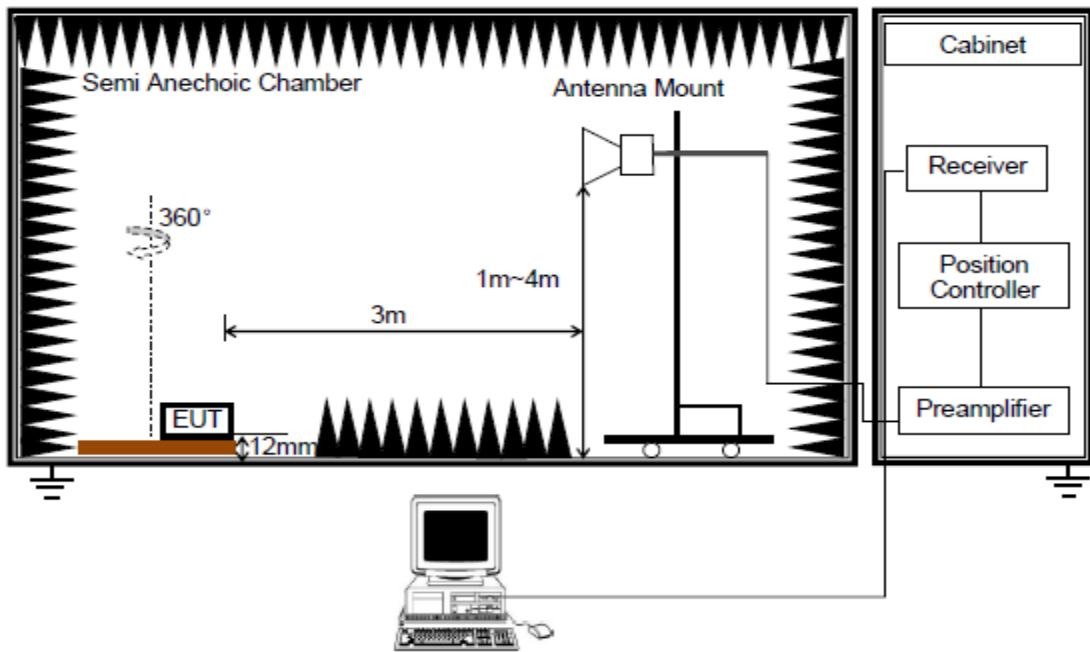


The setting of the spectrum analyser

RBW	1M
VBW	3M
Sweep	Auto
Detector	Peak and CISPR Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 12mm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For average power measurement, set the VBW to 10 Hz, while maintaining all of the other instrument settings, if the duty cycle of the EUT is less than 98%, the Duty Cycle Correction Factor shall be added to the measured emission levels. For the Duty Cycle and Correction Factor please refer to clause 7.1.ON TIME AND DUTY CYCLE.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

8.2. RESTRICTED BANDEDGE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

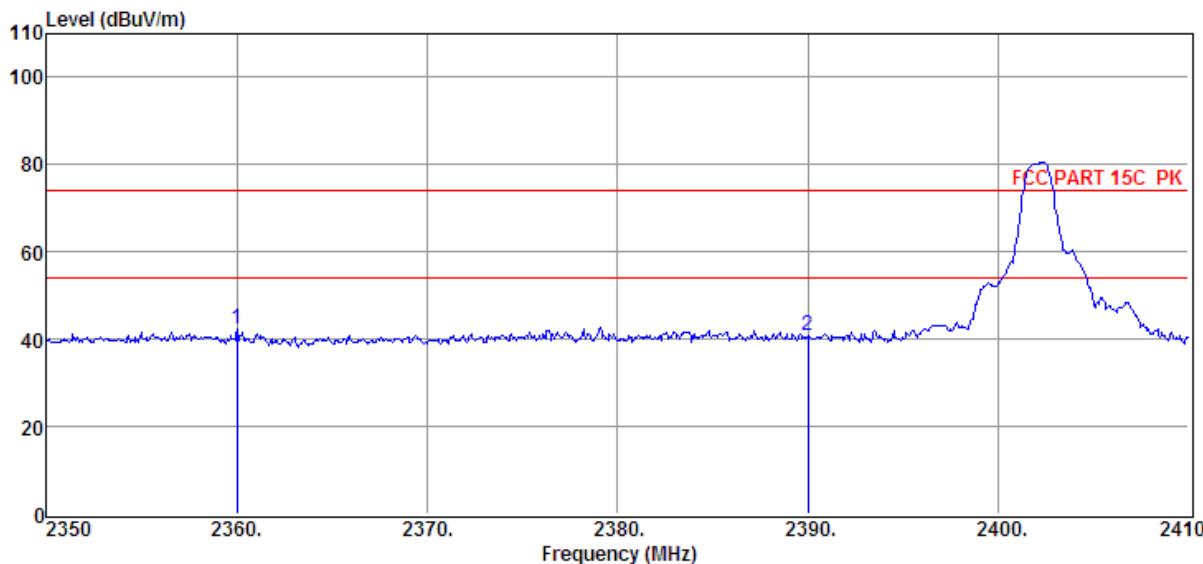

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	2360.02	36.14	29.66	29.35	5.96	42.41	74.00	-31.59	Peak
2	2390.00	34.49	29.78	29.42	6.03	40.88	74.00	-33.12	Peak

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

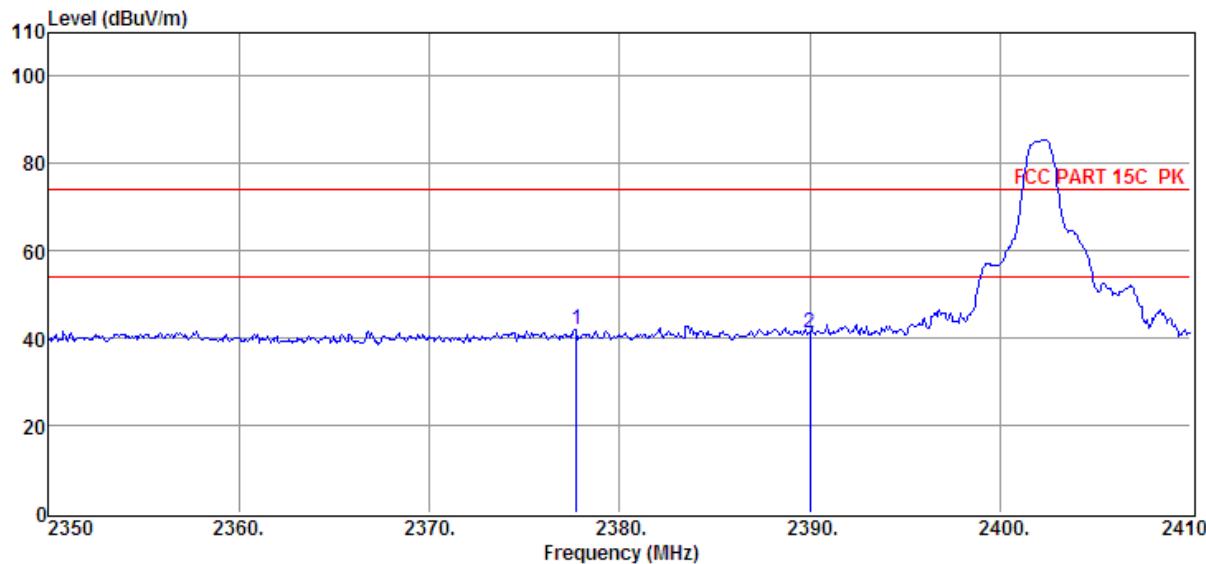

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	2377.72	35.59	29.73	29.39	6.01	41.94	74.00	-32.06	Peak
2	2390.00	34.86	29.78	29.42	6.03	41.25	74.00	-32.75	Peak

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

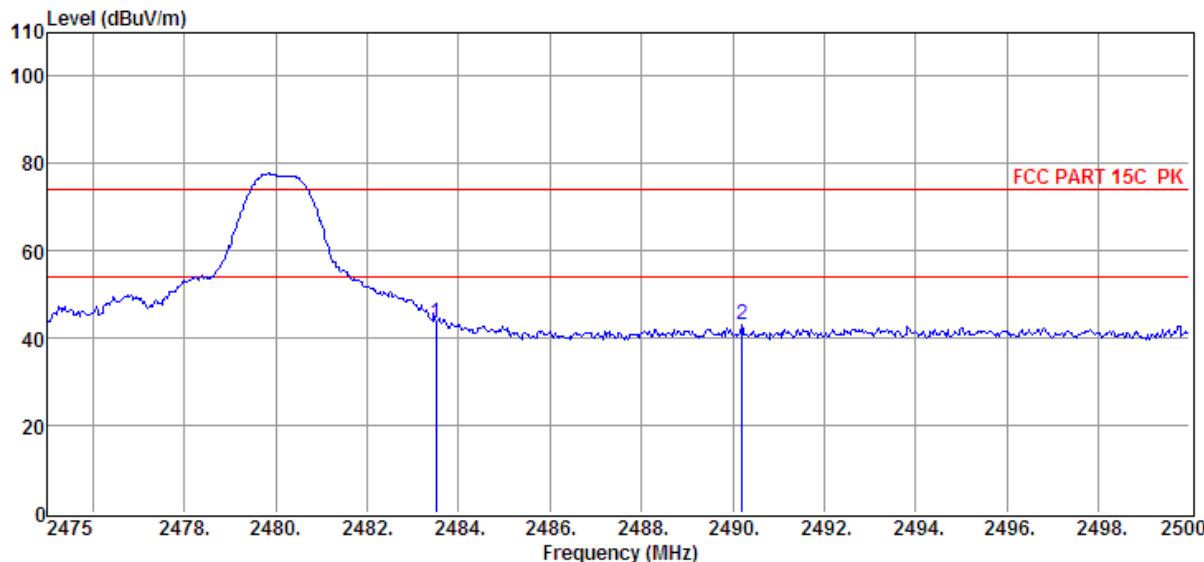

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	2483.50	37.02	30.14	29.71	6.13	43.58	74.00	-30.42	Peak
2	2490.20	36.31	30.16	29.71	6.17	42.93	74.00	-31.07	Peak

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

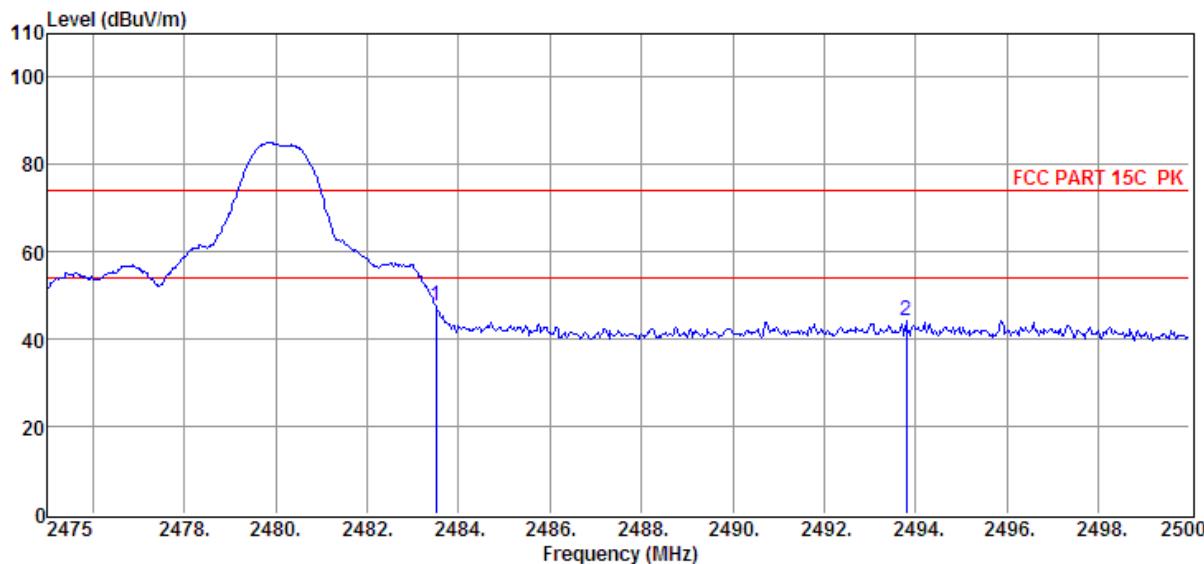


Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	2483.50	40.96	30.14	29.71	6.13	47.52	74.00	-26.48	Peak
2	2493.80	37.52	30.18	29.73	6.17	44.14	74.00	-29.86	Peak

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

8.3. SPURIOUS EMISSIONS (1~25GHz)


HARMONICS AND SPURIOUS EMISSIONS

EUT:	SWAGCYCLE FOLDING ELECTRIC SCOOTER	Polarization:	Horizontal
Test Mode:	Low Chanel		

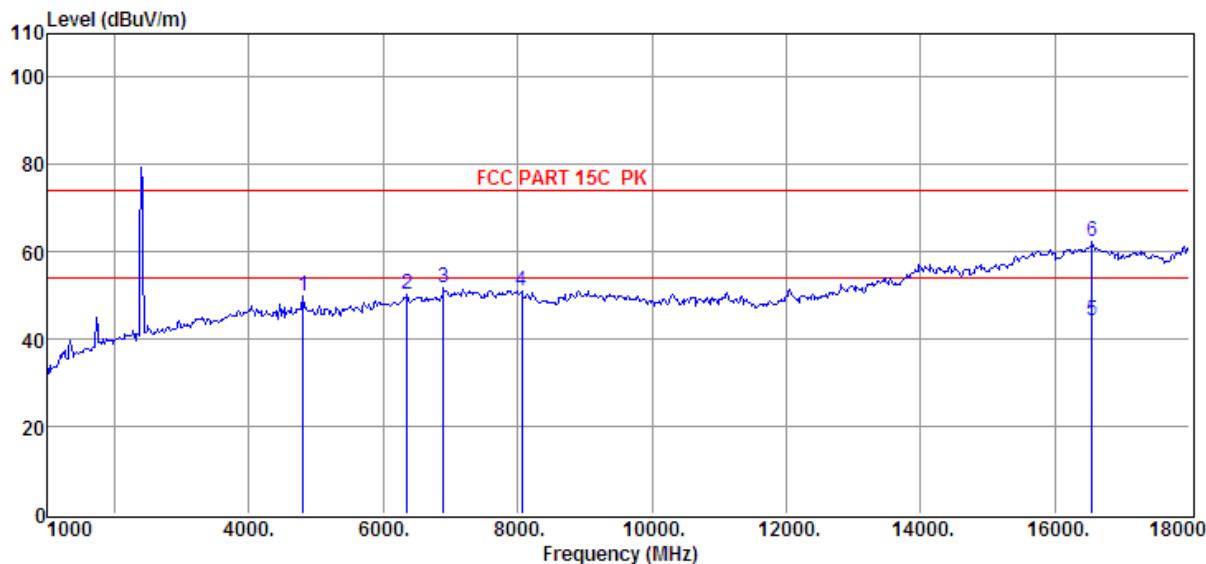

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	4804.00	37.13	33.74	29.32	8.46	50.01	74.00	-23.99	Peak
2	6355.00	34.45	35.57	29.54	9.87	50.35	74.00	-23.65	Peak
3	6899.00	35.59	36.12	30.31	10.33	51.73	74.00	-22.27	Peak
4	8055.00	34.65	36.54	31.18	11.18	51.19	74.00	-22.81	Peak
5	16555.00	18.16	44.61	36.14	17.61	44.24	54.00	-9.76	Average
6	16555.00	36.22	44.61	36.14	17.61	62.30	74.00	-11.70	Peak


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

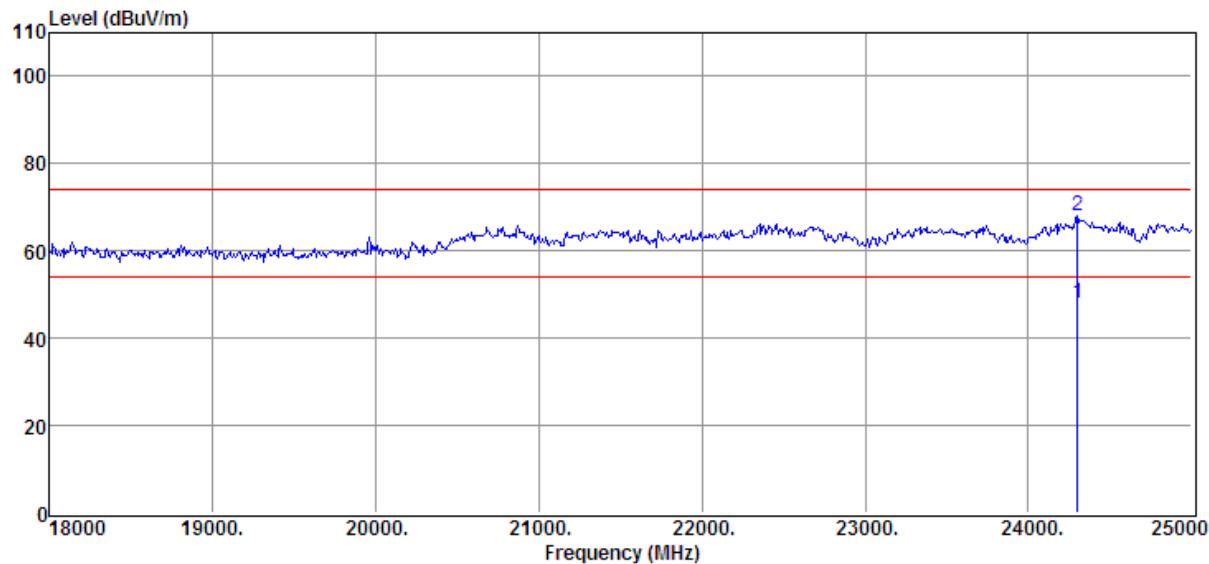

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	24300.00	21.48	44.70	37.71	19.72	48.19	54.00	-5.81	Average
2	24300.00	41.35	44.70	37.71	19.72	68.06	74.00	-5.94	Peak


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

EUT:	SWAGCYCLE FOLDING ELECTRIC SCOOTER	Polarization:	Vertical
Test Mode:	Low Chanel		

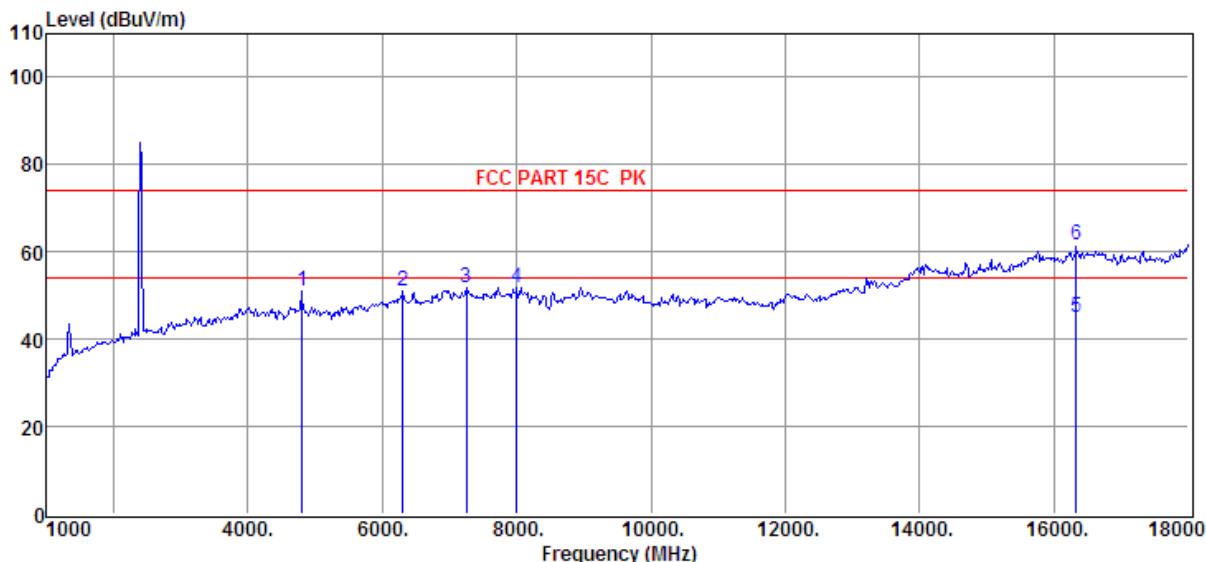

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	4804.00	37.97	33.74	29.32	8.46	50.85	74.00	-23.15	Peak
2	6304.00	35.02	35.49	29.49	9.84	50.86	74.00	-23.14	Peak
3	7256.00	35.19	36.41	30.54	10.65	51.71	74.00	-22.29	Peak
4	8004.00	35.02	36.69	31.13	11.13	51.71	74.00	-22.29	Peak
5	16334.00	19.06	44.44	35.86	17.35	44.99	54.00	-9.01	Average
6	16334.00	35.69	44.44	35.86	17.35	61.62	74.00	-12.38	Peak


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

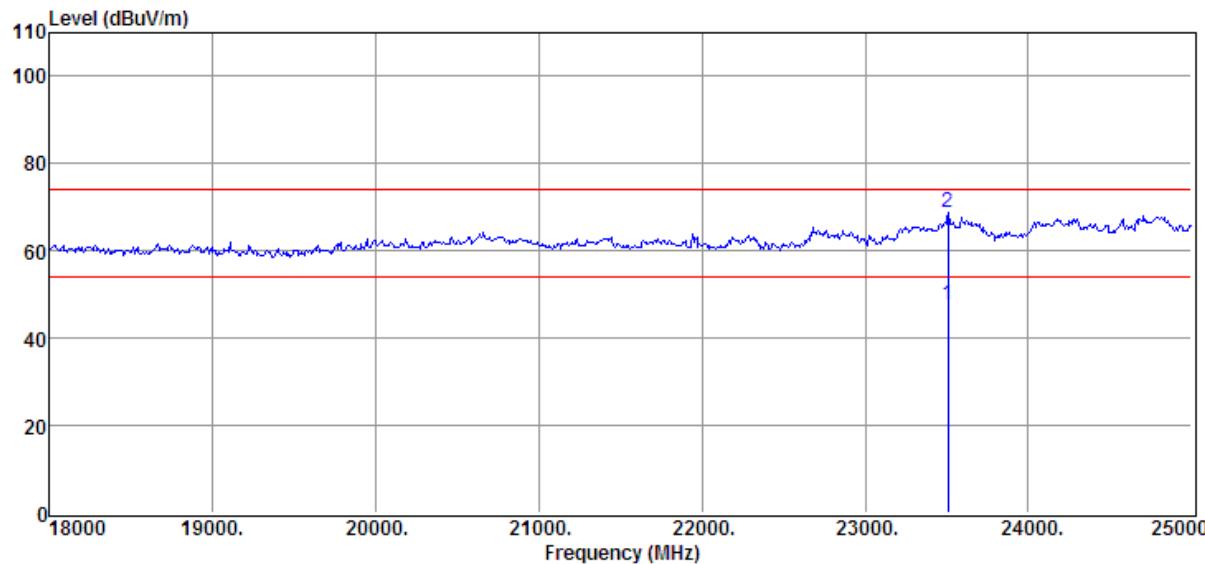

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	23509.00	20.85	44.70	37.71	19.72	47.56	54.00	-6.44	Average
2	23509.00	42.17	44.70	37.71	19.72	68.88	74.00	-5.12	Peak


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

EUT:	SWAGCYCLE FOLDING ELECTRIC SCOOTER	Polarization:	Horizontal
Test Mode:	Middle Chanel		

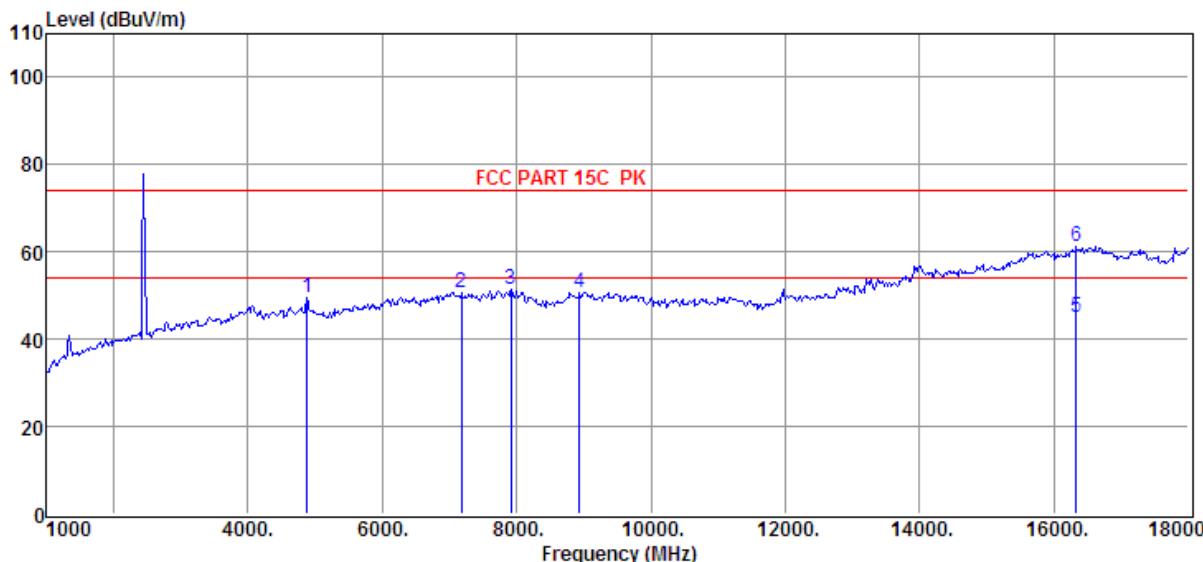

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	4880.00	36.60	33.72	29.33	8.56	49.55	74.00	-24.45	Peak
2	7171.00	34.26	36.34	30.48	10.57	50.69	74.00	-23.31	Peak
3	7919.00	34.60	36.68	31.10	11.09	51.27	74.00	-22.73	Peak
4	8939.00	33.94	37.24	32.26	11.79	50.71	74.00	-23.29	Peak
5	16334.00	19.00	44.44	35.86	17.35	44.93	54.00	-9.07	Average
6	16334.00	35.24	44.44	35.86	17.35	61.17	74.00	-12.83	Peak


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

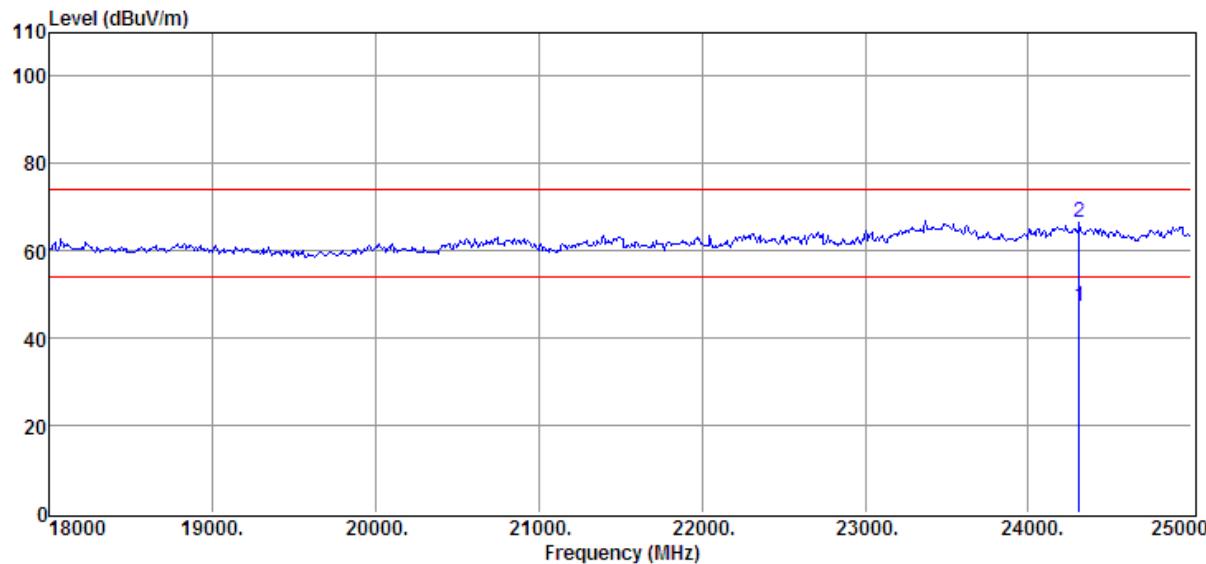

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	24314.00	20.47	44.70	37.71	19.72	47.18	54.00	-6.82	Average
2	24314.00	39.81	44.70	37.71	19.72	66.52	74.00	-7.48	Peak


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

EUT:	SWAGCYCLE FOLDING ELECTRIC SCOOTER	Polarization:	Vertical
Test Mode:	Middle Chanel		

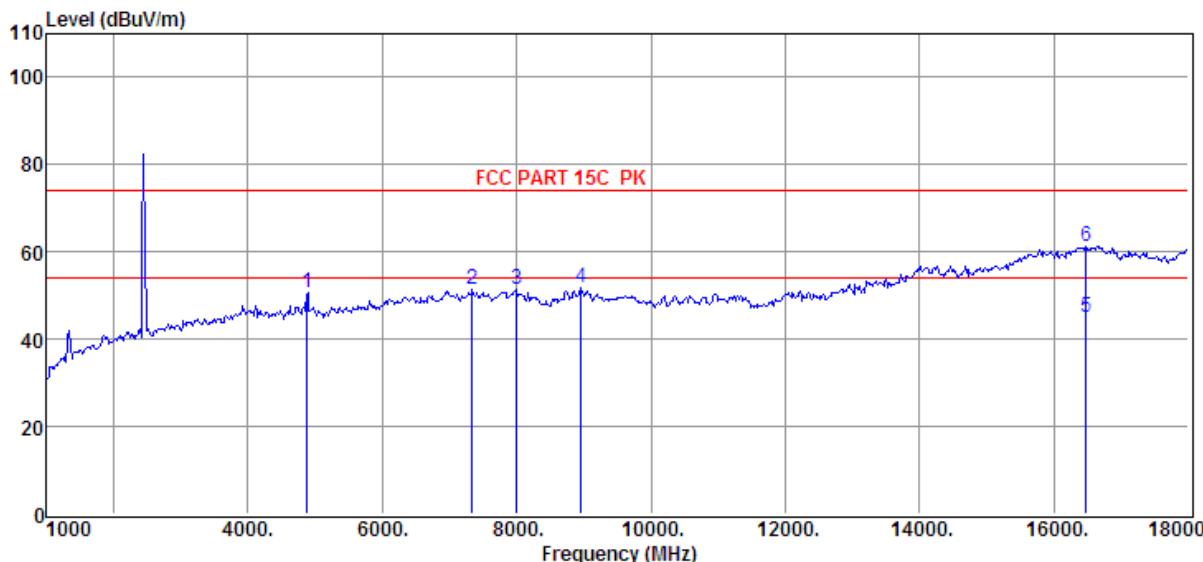

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	4880.00	37.84	33.72	29.33	8.56	50.79	74.00	-23.21	Peak
2	7341.00	34.72	36.48	30.59	10.72	51.33	74.00	-22.67	Peak
3	8004.00	34.63	36.69	31.13	11.13	51.32	74.00	-22.68	Peak
4	8956.00	35.03	37.31	32.28	11.79	51.85	74.00	-22.15	Peak
5	16470.00	18.69	44.65	35.99	17.46	44.81	54.00	-9.19	Average
6	16470.00	35.22	44.65	35.99	17.46	61.34	74.00	-12.66	Peak


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

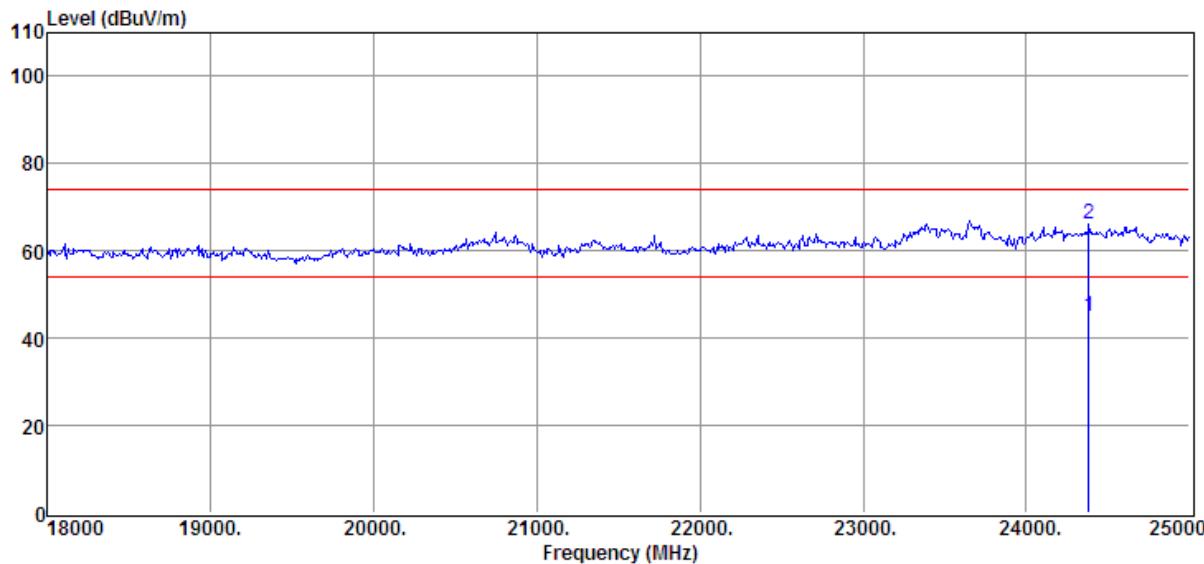

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	24384.00	18.15	44.70	37.71	19.72	44.86	54.00	-9.14	Average
2	24384.00	39.43	44.70	37.71	19.72	66.14	74.00	-7.86	Peak


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

EUT:	SWAGCYCLE FOLDING ELECTRIC SCOOTER	Polarization:	Horizontal
Test Mode:	High Chanel		

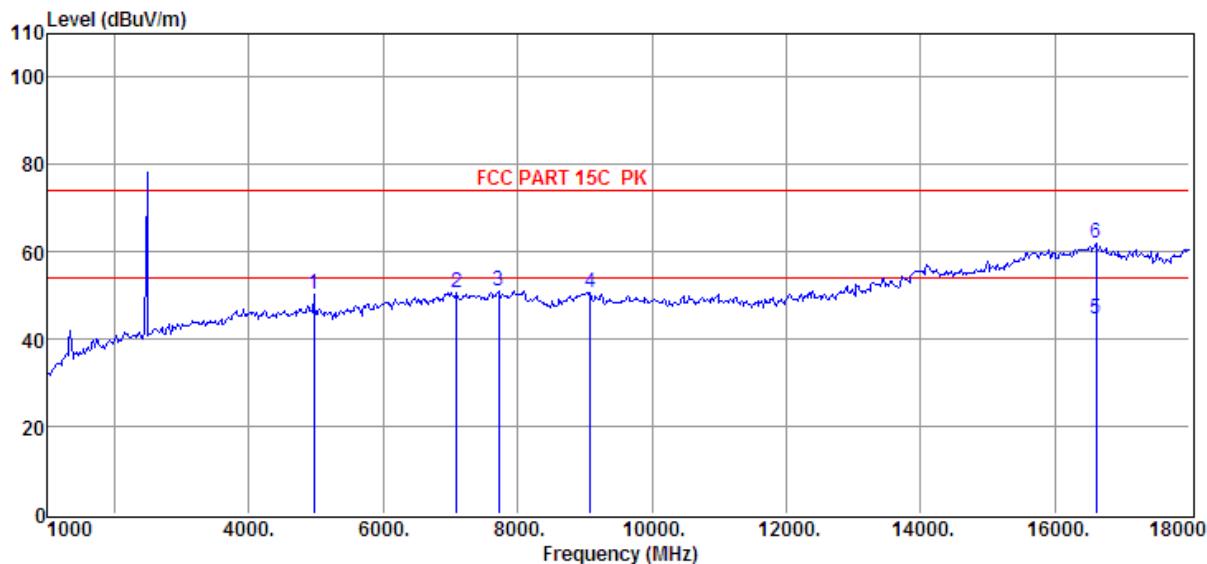

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	4960.00	37.31	33.71	29.35	8.63	50.30	74.00	-23.70	Peak
2	7086.00	34.25	36.27	30.42	10.51	50.61	74.00	-23.39	Peak
3	7715.00	34.57	36.64	30.99	10.98	51.20	74.00	-22.80	Peak
4	9075.00	33.78	37.33	32.35	11.89	50.65	74.00	-23.35	Peak
5	16606.00	18.60	44.53	36.21	17.71	44.63	54.00	-9.37	Average
6	16606.00	36.09	44.53	36.21	17.71	62.12	74.00	-11.88	Peak


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

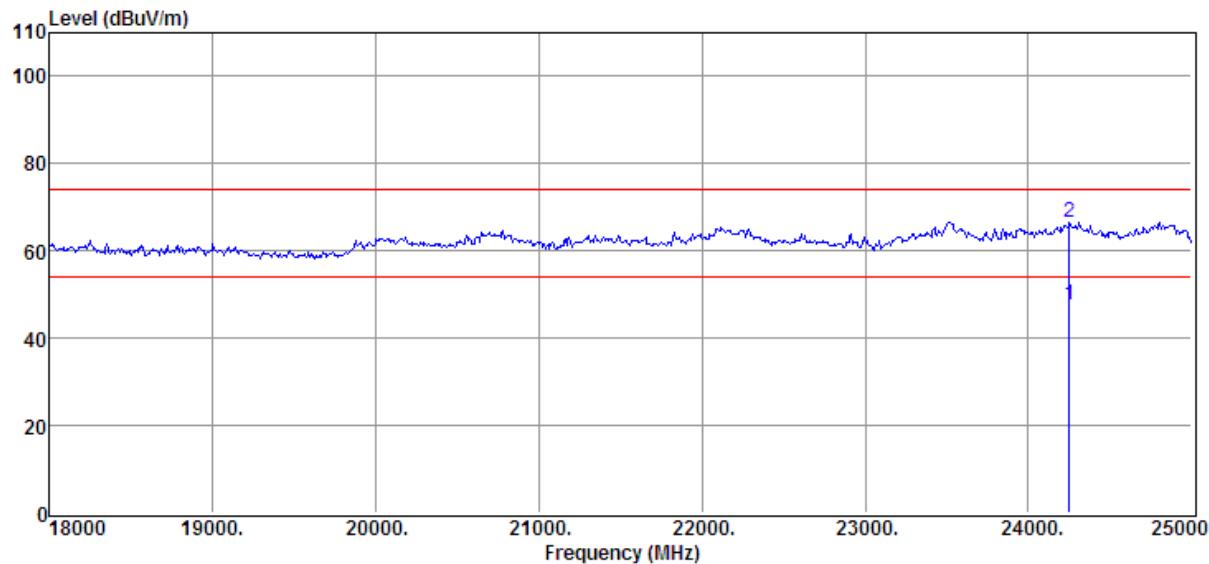

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	24251.00	21.00	44.70	37.71	19.72	47.71	54.00	-6.29	Average
2	24251.00	39.92	44.70	37.71	19.72	66.63	74.00	-7.37	Peak


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

EUT:	SWAGCYCLE FOLDING ELECTRIC SCOOTER	Polarization:	Vertical
Test Mode:	High Chanel		

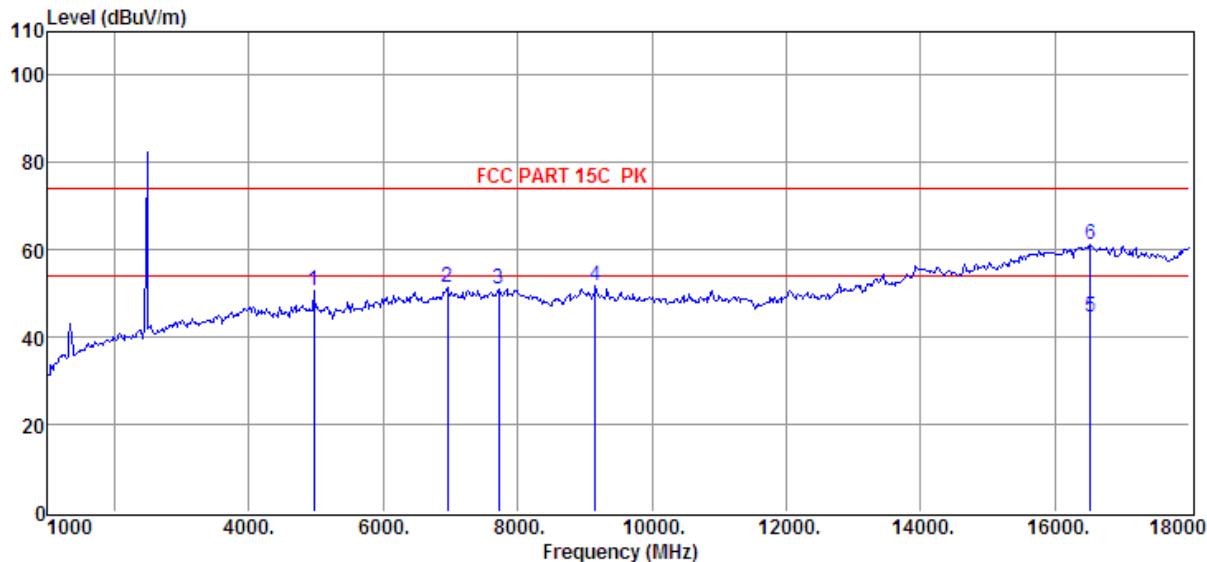

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	4960.00	37.48	33.71	29.35	8.63	50.47	74.00	-23.53	Peak
2	6950.00	35.16	36.16	30.34	10.39	51.37	74.00	-22.63	Peak
3	7715.00	34.48	36.64	30.99	10.98	51.11	74.00	-22.89	Peak
4	9160.00	34.85	37.14	32.39	12.01	51.61	74.00	-22.39	Peak
5	16521.00	18.40	44.67	36.06	17.51	44.52	54.00	-9.48	Average
6	16521.00	35.09	44.67	36.06	17.51	61.21	74.00	-12.79	Peak

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

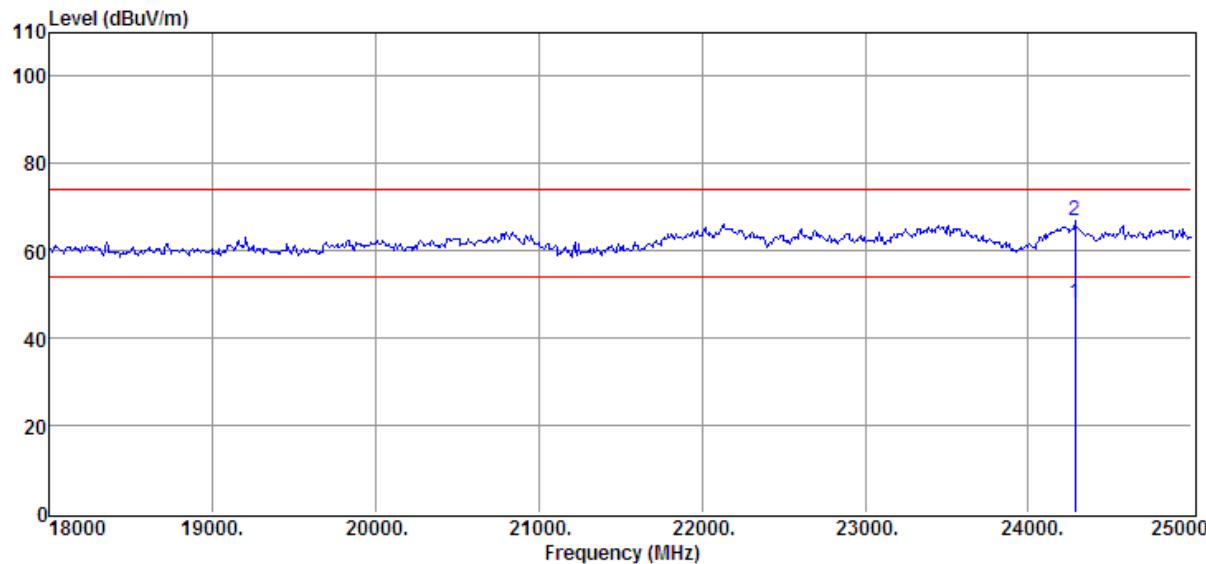


Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	24286.00	21.20	44.70	37.71	19.72	47.91	54.00	-6.09	Average
2	24286.00	40.04	44.70	37.71	19.72	66.75	74.00	-7.25	Peak

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

8.4. SPURIOUS EMISSIONS 30M ~ 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)


EUT:	SWAGCYCLE FOLDING ELECTRIC SCOOTER	Polarization:	Horizontal
Test Mode:	Middle Channel		

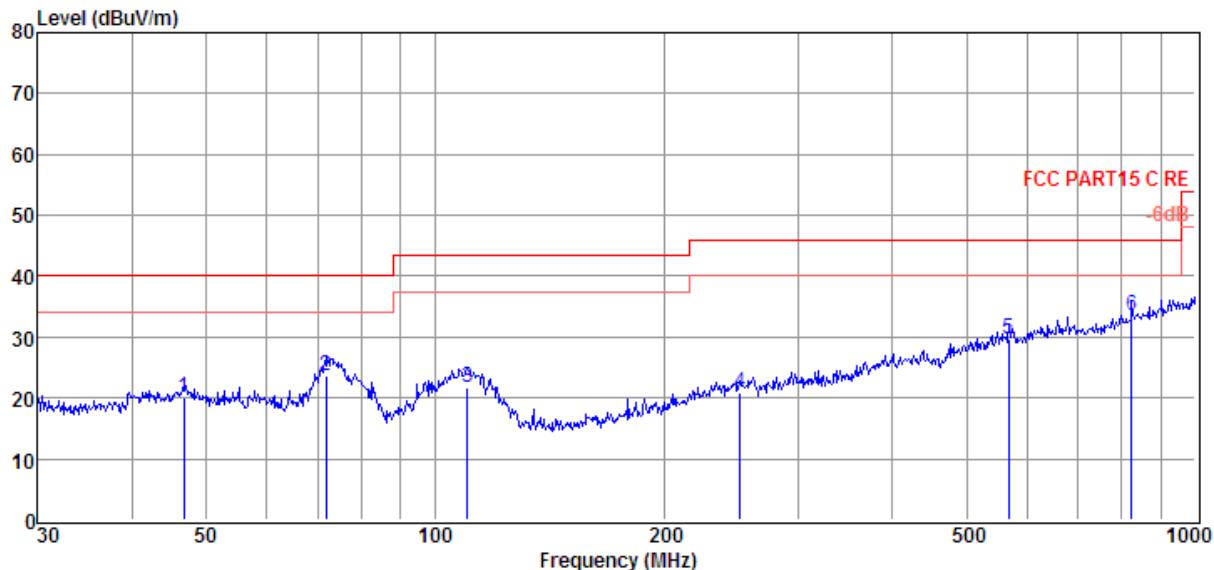

Item	Freq.	Read Level	Antenna Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dB μ V)	(dB/m)	dB	(dB μ V/m)	(dB μ V/m)	(dB)	
1	46.67	3.86	12.23	3.86	19.95	40.00	-20.05	QP
2	71.83	12.56	7.13	4.08	23.77	40.00	-16.23	QP
3	110.18	6.44	10.98	4.36	21.78	43.50	-21.72	QP
4	252.06	3.39	12.30	5.15	20.84	46.00	-25.16	QP
5	568.61	4.56	18.80	6.40	29.76	46.00	-16.24	QP
6	824.60	5.03	21.45	7.19	33.67	46.00	-12.33	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

EUT:	SWAGCYCLE FOLDING ELECTRIC SCOOTER	Polarization:	Vertical
Test Mode:	Middle Channel		

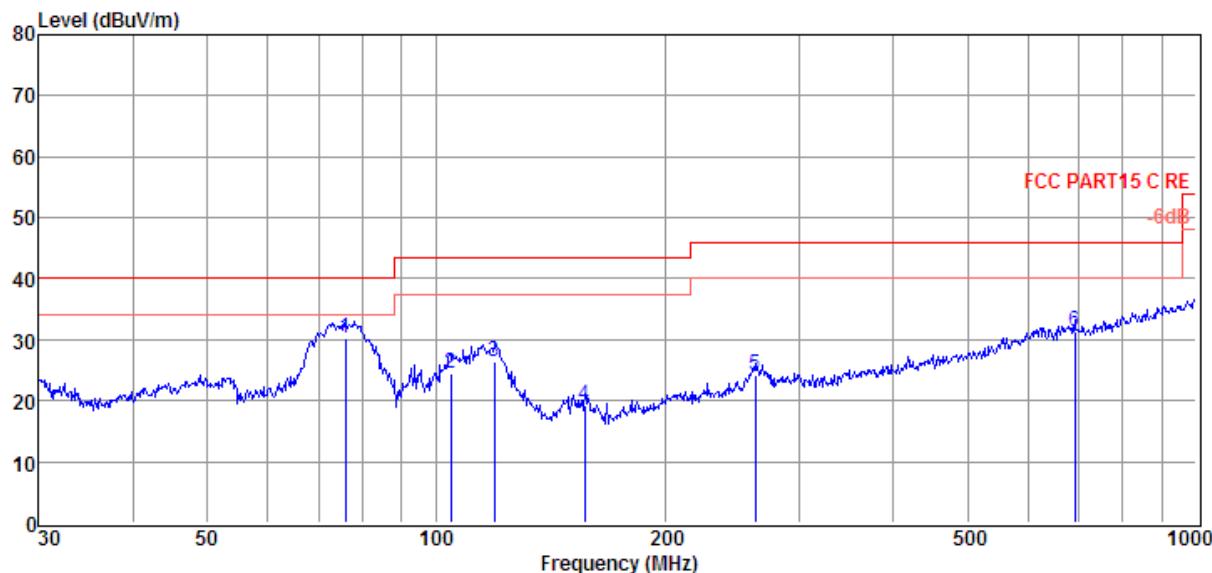

Item	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
(Mark)								
1	75.98	19.38	6.64	4.11	30.13	40.00	-9.87	QP
2	104.54	8.49	11.64	4.33	24.46	43.50	-19.04	QP
3	119.44	12.62	9.42	4.41	26.45	43.50	-17.05	QP
4	157.01	6.75	7.92	4.64	19.31	43.50	-24.19	QP
5	262.90	6.45	12.52	5.20	24.17	46.00	-21.83	QP
6	691.99	4.59	19.82	6.80	31.21	46.00	-14.79	QP


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All the channels had been tested, but only the worst data recorded in the report.

8.5. SPURIOUS EMISSIONS BELOW 30M


SPURIOUS EMISSIONS Below 30MHz (WORST-CASE CONFIGURATION)

EUT:	SWAGCYCLE FOLDING ELECTRIC SCOOTER	Polarization:	Horizontal
Test Mode:	Middle Channel		

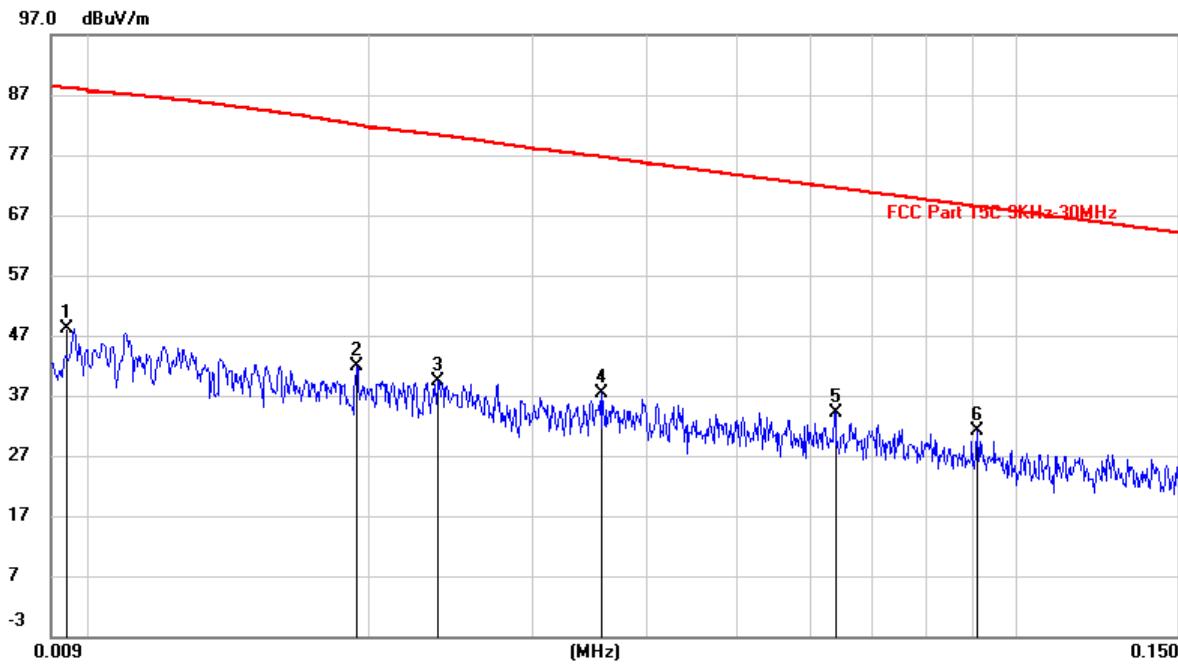

No.	Frequency (KHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0094	27.90	20.26	48.16	88.10	-39.94	QP
2	0.0193	21.46	20.30	41.76	82.00	-40.24	QP
3	0.0236	19.18	20.31	39.49	80.31	-40.82	QP
4	0.0356	16.97	20.31	37.28	76.66	-39.38	QP
5	0.0639	13.88	20.31	34.19	71.52	-37.33	QP
6	0.0909	10.85	20.26	31.11	68.44	-37.33	QP

EUT:	SWAGCYCLE FOLDING ELECTRIC SCOOTER	Polarization:	Horizontal
Test Mode:	Middle Channel		

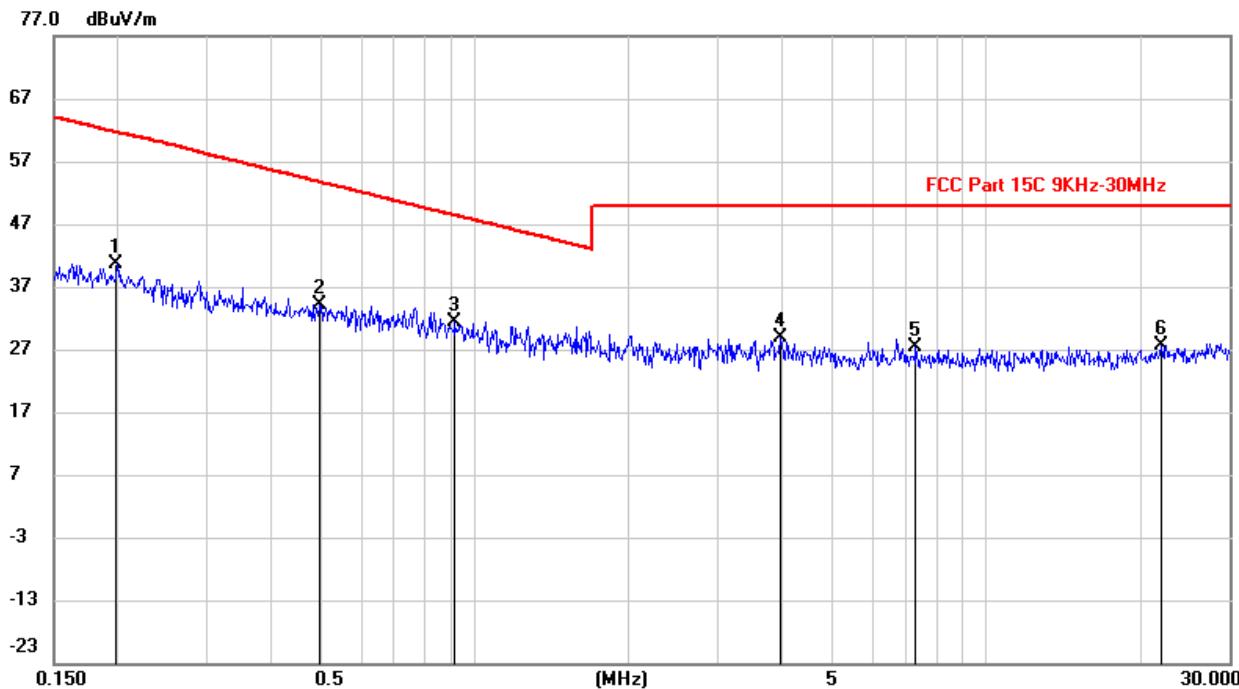

No.	Frequency (MHz)	Reading (dB _{UV} /m)	Correct dB/m	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	0.1995	20.35	20.37	40.72	61.60	-20.88	QP
2	0.4966	13.90	20.24	34.14	53.69	-19.55	QP
3	0.9134	11.09	20.37	31.46	48.40	-16.94	QP
4	3.9639	7.90	21.06	28.96	50.00	-21.04	QP
5	7.2903	6.53	20.93	27.46	50.00	-22.54	QP
6	22.0627	6.41	21.25	27.66	50.00	-22.34	QP

Note: All the channels and polarization had been tested, but only the worst data recorded in the report.


9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a) and RSS-Gen Clause 8.8

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

TEST SETUP AND PROCEDURE

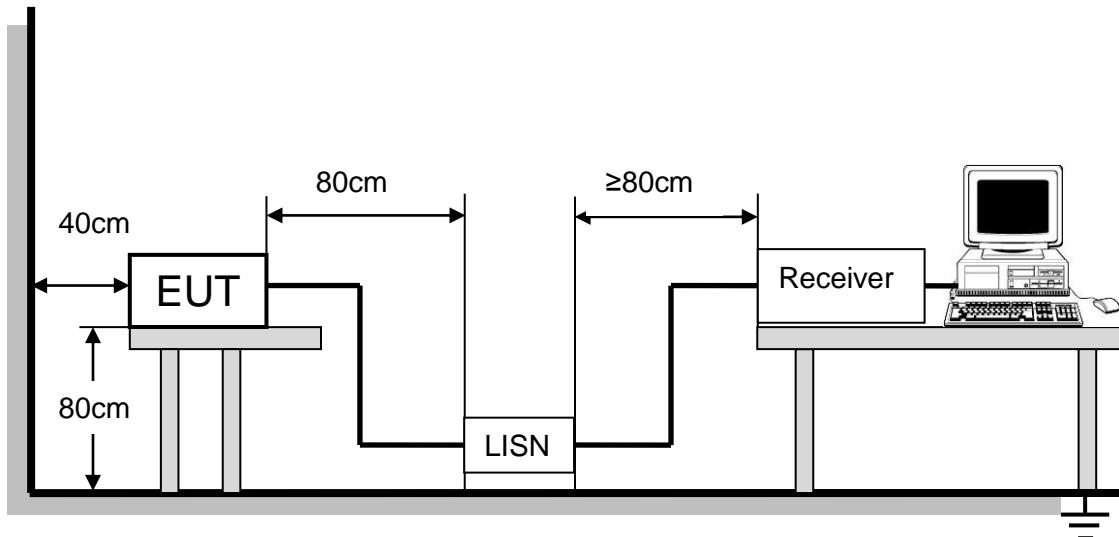


The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 7 and 13 of ANSI C63.4-2014. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST RESULTS (WORST-CASE CONFIGURATION)


EUT:	SWAGCYCLE FOLDING ELECTRIC SCOOTER	Phase:	L
Test Mode:	Middle Channel		

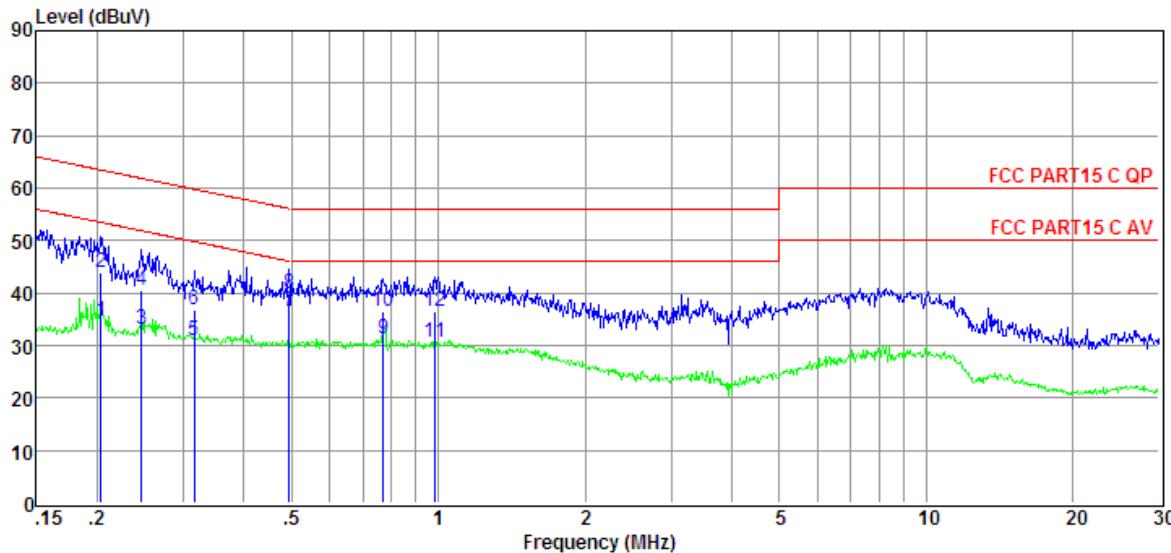

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dB μ V)	(dB)	(dB)	(dB)	(dB μ V)	(dB μ V)	(dB)	
1	0.20	15.15	9.61	0.02	9.86	34.64	53.45	-18.81	Average
2	0.20	24.41	9.61	0.02	9.86	43.90	63.45	-19.55	QP
3	0.25	13.49	9.61	0.02	9.86	32.98	51.86	-18.88	Average
4	0.25	21.05	9.61	0.02	9.86	40.54	61.86	-21.32	QP
5	0.32	11.44	9.61	0.02	9.86	30.93	49.80	-18.87	Average
6	0.32	17.22	9.61	0.02	9.86	36.71	59.80	-23.09	QP
7	0.49	17.02	9.61	0.02	9.86	36.51	46.10	-9.59	Average
8	0.49	20.54	9.61	0.02	9.86	40.03	56.10	-16.07	QP
9	0.77	11.75	9.61	0.03	9.86	31.25	46.00	-14.75	Average
10	0.77	17.08	9.61	0.03	9.86	36.58	56.00	-19.42	QP
11	0.98	11.24	9.61	0.03	9.86	30.74	46.00	-15.26	Average
12	0.98	17.09	9.61	0.03	9.86	36.59	56.00	-19.41	QP

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

EUT:	SWAGCYCLE FOLDING ELECTRIC SCOOTER	Phase:	N
Test Mode:	Middle Channel		

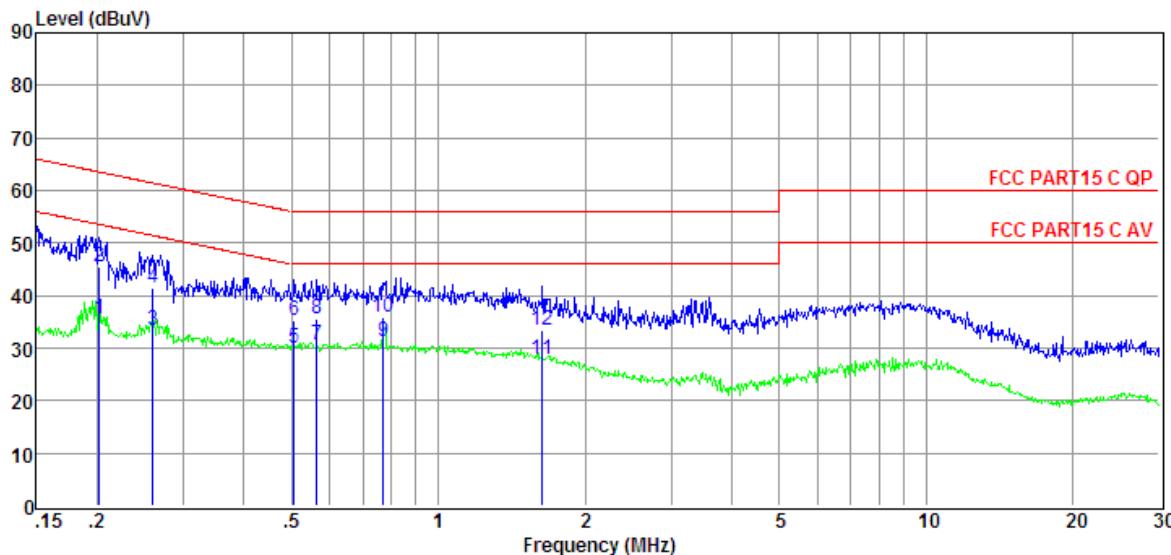

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dB μ V)	(dB)	(dB)	(dB)	(dB μ V)	(dB μ V)	(dB)	
1	0.20	15.95	9.61	0.02	9.86	35.44	53.54	-18.10	Average
2	0.20	25.84	9.61	0.02	9.86	45.33	63.54	-18.21	QP
3	0.26	13.83	9.61	0.02	9.86	33.32	51.42	-18.10	Average
4	0.26	22.07	9.61	0.02	9.86	41.56	61.42	-19.86	QP
5	0.51	10.61	9.61	0.02	9.86	30.10	46.00	-15.90	Average
6	0.51	15.87	9.61	0.02	9.86	35.36	56.00	-20.64	QP
7	0.56	11.04	9.61	0.03	9.86	30.54	46.00	-15.46	Average
8	0.56	16.17	9.61	0.03	9.86	35.67	56.00	-20.33	QP
9	0.77	11.79	9.61	0.03	9.86	31.29	46.00	-14.71	Average
10	0.77	16.35	9.61	0.03	9.86	35.85	56.00	-20.15	QP
11	1.64	8.47	9.62	0.04	9.86	27.99	46.00	-18.01	Average
12	1.64	14.02	9.62	0.04	9.86	33.54	56.00	-22.46	QP

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All the modulation and channels had been tested, but only the worst data recorded in the report.

10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

ANTENNA CONNECTOR

EUT has a PCB antenna without antenna connector.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi.

END OF REPORT