FCC Test Report

Report No.: AGC06563160401FE03

FCC ID : 2AH75TTA-S77BT

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Bluetooth Speaker

BRAND NAME : WESDAR

MODEL NAME : TTA-S77BT,K-304S

CLIENT : Guangzhou Wesdar Electronic Co., Ltd.

DATE OF ISSUE : Apr.22,2016

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Rules

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 53

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Apr.22,2016	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
5. SYSTEM TEST CONFIGURATION	7
5.1. CONFIGURATION OF EUT SYSTEM	7
5.2. EQUIPMENT USED IN EUT SYSTEM	7
5.3. SUMMARY OF TEST RESULTS	7
6. TEST FACILITY	8
7 TEST METHODOLOGY	
8. ALL TEST EQUIPMENT LIST	
9. RADIATED EMISSION	
9.1TEST LIMIT	10
9.2. MEASUREMENT PROCEDURE	11
9.3. TEST SETUP	13
9.4. TEST RESULT	
10. BAND EDGE EMISSION	30
10.1. MEASUREMENT PROCEDURE	
10.2 TEST SETUP	30
10.3 RADIATED TEST RESULT	31
11. 20DB BANDWIDTH	35
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SET-UP	35
11.3. LIMITS AND MEASUREMENT RESULTS	
12. FCC LINE CONDUCTED EMISSION TEST	42
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	42
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	42
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	43
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	43
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	43
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	46

Page 4 of 53

1. VERIFICATION OF CONFORMITY

Applicant	Guangzhou Wesdar Electronic Co., Ltd.		
Address	NO.6 XiaoQian East Road XinWei Village XinTang Town Zengcheng District Guangzhou, China		
Manufacturer	Guangzhou Wesdar Electronic Co., Ltd.		
Address	NO.6 XiaoQian East Road XinWei Village XinTang Town Zengcheng District Guangzhou, China		
Product Designation	Bluetooth Speaker		
Brand Name	WESDAR		
Test Model	TTA-S77BT		
Series Model	K-304S		
Difference description	All the same except for model name and appearance color.		
Date of test	Apr.11,2016 to Apr.13,2016		
Deviation	None		
Condition of Test Sample	Normal		
Report Template	AGCRT-US-BR/RF		

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Tested By	Vince Usang	
	Time Huang(Huang Nanhui)	Apr.22,2016
Reviewed By	Foresto ei	
	Forrest Lei(Lei Yonggang)	Apr.22,2016
Approved By	golga slang	
•	Solger Zhang(Zhang Hongyi)	Apr.22,2016

Page 5 of 53

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency 2.402 GHz to 2.480GHz	
RF Output Power	-2.21dBm(Max)
Bluetooth Version	V2.1+EDR
Modulation GFSK ,π /4-DQPSK, 8DPSK	
Number of channels 79	
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	PCB Antenna
Antenna Gain	2dBi
Power Supply	Normal Voltage: DC 3.7V

Note: The mini USB port can be used for charging and exchange data with PC

The Standard USB ports can be used for charging other device

The EUT also Support FM function(Only Receive)

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

Frequency Band	Channel Number	Frequency
	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
2400~2483.5MHZ	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

Page 6 of 53

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 % \circ

No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions,radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

4.DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	
1	Low channel TX	
2	Middle channel TX	
3	High channel TX	
4	BT Link with charging	


- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.

Page 7 of 53


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth Speaker	Bluetooth Speaker N/A TTA-S7		EUT
2	PC	SONY	E1412AYCW	A.E
3	Control box	N/A	N/A	A.E
4	Adapter	ETPCA-050100U3W	N/A	A.E
5	Temporary antenna connector	N/A	N/A	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	BANDWIDTH	Compliant

Page 8 of 53

6. TEST FACILITY

Site Dongguan Precise Testing Service Co., Ltd.		
Location Building D,Baoding Technology Park,Guangming Road2,Dongcheng Dist Dongguan, Guangdong, China,		
FCC Registration No.	371540	
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013.	

7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013.

8. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site							
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration		
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016		
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016		
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016		
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016		
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016		
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A		
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016		
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016		
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016		
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016		

Page 9 of 53

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

	Radiat	ed Emission Tes	t Site		
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	BV 9718 9718-269		July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

	Conducted Emission Test Site										
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration						
EMI Test Receiver	- Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016						
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016						
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016						
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016						
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016						
Conduction Cable	MXT	SE1	S003	June 6,2015	June 5,2016						

Page 10 of 53

9. RADIATED EMISSION

9.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics		
	(millivolts/meter)	(microvolts/meter)		
900-928MHz	50	500		
2400-2483.5MHz	50	500		
5725-5875MHz	50	500		
24.0-24.25GHz	250	2500		

Standard FCC 15.209

Frequency	Distance	Field Stre	engths Limit
(MHz) Meters		μ V/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(µV)/m (Pea	ak) 54.0 dB(µV)/m (Average)

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Report No.: AGC06563160401FE03 Page 11 of 53

9.2. MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Report No.: AGC06563160401FE03 Page 12 of 53

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting				
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP				
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP				
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average				

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Report No.: AGC06563160401FE03 Page 13 of 53

9.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

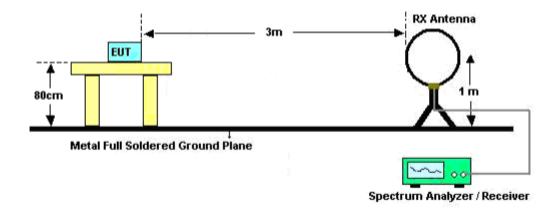


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

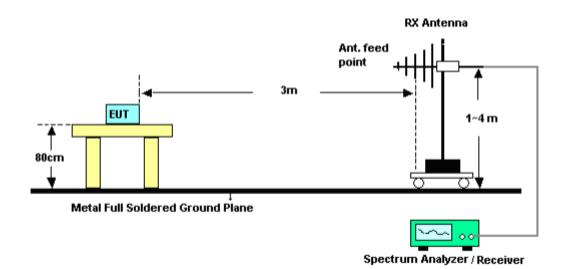

Page 14 of 53

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

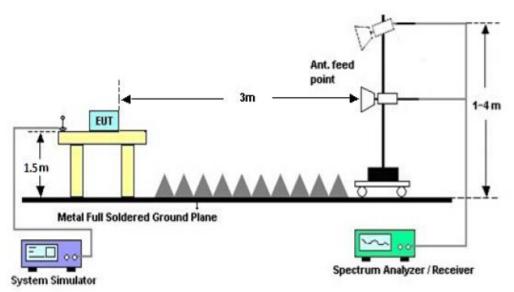

Page 15 of 53

9.4. TEST RESULT


(Worst modulation: GFSK)

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

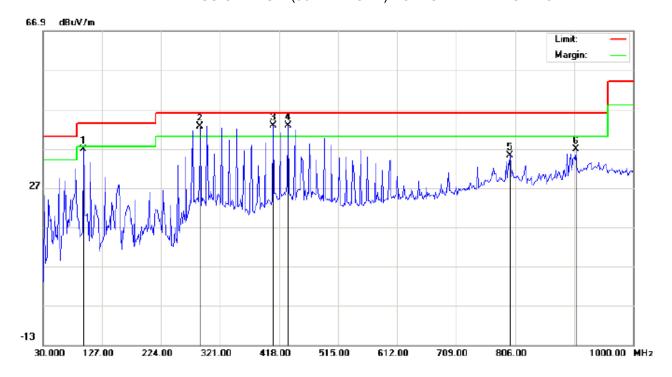

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Bluetooth Speaker

M/N:TTA-S77BT Mode:Low Channel TX

Note:

Polarization: Horizontal Temperature: 22.3
Power: Humidity: 52.3 %


Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		96.2831	29.95	6.77	36.72	43.50	-6.78	peak			
2	İ	288.6666	29.04	13.48	42.52	46.00	-3.48	peak			
3	*	408.3000	23.48	19.32	42.80	46.00	-3.20	peak			
4	İ	432.5500	22.73	20.06	42.79	46.00	-3.21	peak			
5		797.9166	7.91	27.29	35.20	46.00	-10.80	peak		·	
6		906.2332	7.94	28.78	36.72	46.00	-9.28	peak		·	

Humidity: 52.3 %

Page 16 of 53

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

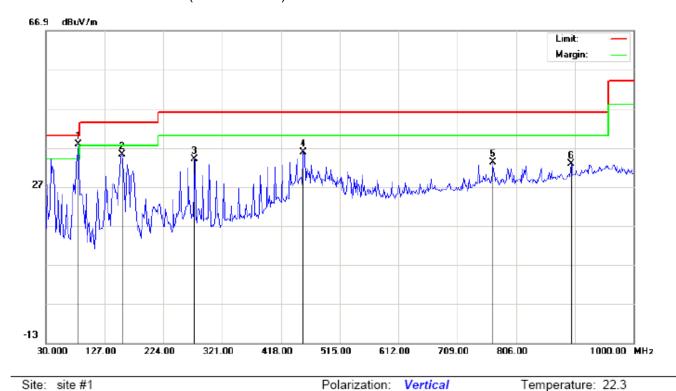

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Speaker

M/N:TTA-S77BT

Mode:Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	n dBu∀/m dB		cm	degree		
1	*	83.3499	34.81	3.00	37.81	40.00	-2.19	peak			
2		156.0997	20.00	15.30	35.30	43.50	-8.20	peak			
3		275.7332	19.42	14.68	34.10	46.00	-11.90	peak			
4		455.1831	15.17	20.65	35.82	46.00	-10.18	peak			
5		767.2000	6.27	26.87	33.14	46.00	-12.86	peak			
6		896.5333	4.33	28.52	32.85	46.00	-13.15	peak			

Power:

Distance:


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 17 of 53

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

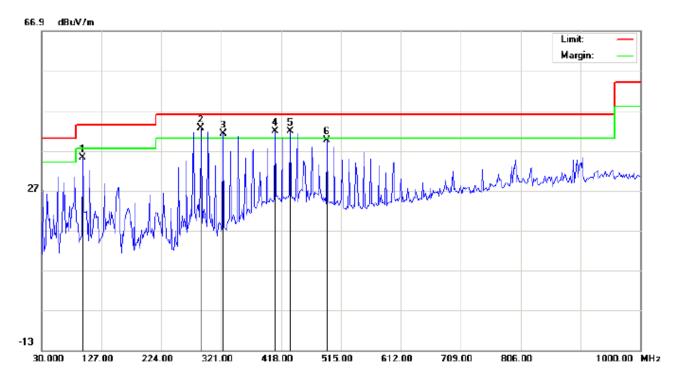

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Speaker

M/N:TTA-S77BT

Mode:Middle Channel TX

Note:

Polarization: Horizontal Temperature: 22.3
Power: Humidity: 52.3 %

Distance:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		96.2831	28.45	6.77	35.22	43.50	-8.28	peak			
2	*	288.6666	29.04	13.48	42.52	46.00	-3.48	peak			
3	ļ	324.2332	24.18	17.02	41.20	46.00	-4.80	peak			
4	İ	408.3000	22.48	19.32	41.80	46.00	-4.20	peak			
5	İ	432.5500	21.73	20.06	41.79	46.00	-4.21	peak			
6		492.3666	18.50	21.05	39.55	46.00	-6.45	peak			

Temperature: 22.3

Humidity: 52.3 %

Page 18 of 53

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

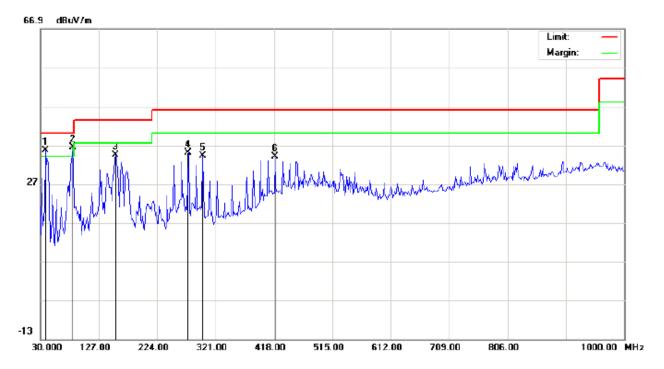

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Speaker

M/N:TTA-S77BT

Mode:Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	į	38.0833	29.20	6.39	35.59	40.00	-4.41	peak			
2	*	83.3499	33.31	3.00	36.31	40.00	-3.69	peak			
3		154.4832	19.13	15.29	34.42	43.50	-9.08	peak			
4		275.7332	20.42	14.68	35.10	46.00	-10.90	peak			
5		299.9832	18.75	15.41	34.16	46.00	-11.84	peak			
6		419.6166	14.25	19.67	33.92	46.00	-12.08	peak			

Power:

Distance:

Polarization: Vertical


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 19 of 53

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

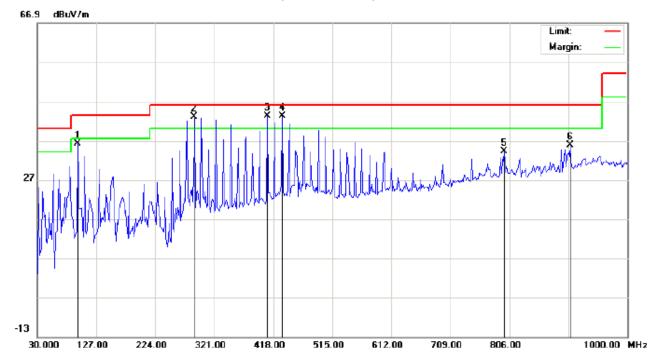

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Bluetooth Speaker

M/N:TTA-S77BT

Mode:High Channel TX

Note:

Polarization:	Horizontal	Temperature:	22.3
Power:		Humidity: 52	.3 %

Distance:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		96.2831	29.45	6.77	36.22	43.50	-7.28	peak			
2	ļ	288.6666	29.54	13.48	43.02	46.00	-2.98	peak			
3	*	408.3000	23.98	19.32	43.30	46.00	-2.70	peak			
4	ļ	432.5500	23.23	20.06	43.29	46.00	-2.71	peak			
5		797.9166	6.91	27.29	34.20	46.00	-11.80	peak			
6		906.2332	6.94	28.78	35.72	46.00	-10.28	peak			

Temperature: 22.3

Humidity: 52.3 %

Page 20 of 53

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

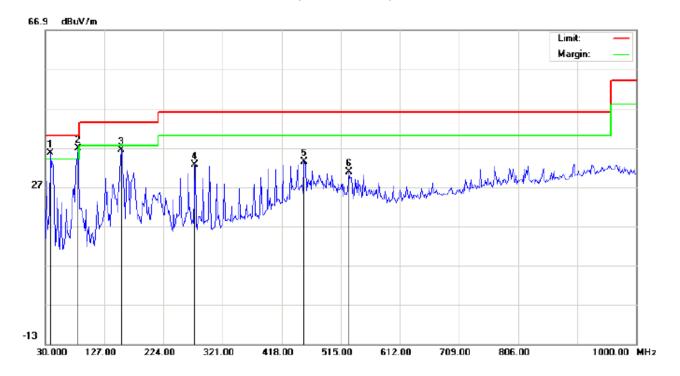

Polarization:

Power:

Distance:

Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Speaker

M/N:TTA-S77BT

Mode:High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu√/m	dBu∀/m	dB		cm	degree	
1	İ	38.0833	29.20	6.39	35.59	40.00	-4.41	peak			
2	*	83.3499	33.81	3.00	36.81	40.00	-3.19	peak			
3		154.4832	21.13	15.29	36.42	43.50	-7.08	peak			
4		275.7332	17.92	14.68	32.60	46.00	-13.40	peak			
5		455.1831	12.67	20.65	33.32	46.00	-12.68	peak			
6		527.9333	8.85	21.88	30.73	46.00	-15.27	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


Page 21 of 53

RADIATED EMISSION ABOVE 1GHZ

(Worst modulation: GFSK)

FOR BR/EDR

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

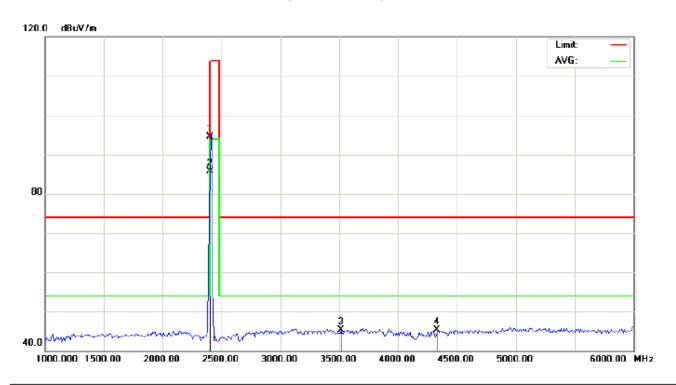

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

Distance: 3m

EUT:Bluetooth Speaker

M/N:TTA-S77BT


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	104.23	-9.68	94.55	114.00	-19.45	peak			
2	*	2402.000	95.35	-9.68	85.67	94.00	-8.33	AVG	100	152	
3		3516.667	53.01	-7.79	45.22	74.00	-28.78	peak			
4		4333.333	49.04	-3.68	45.36	74.00	-28.64	peak			

Page 22 of 53

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

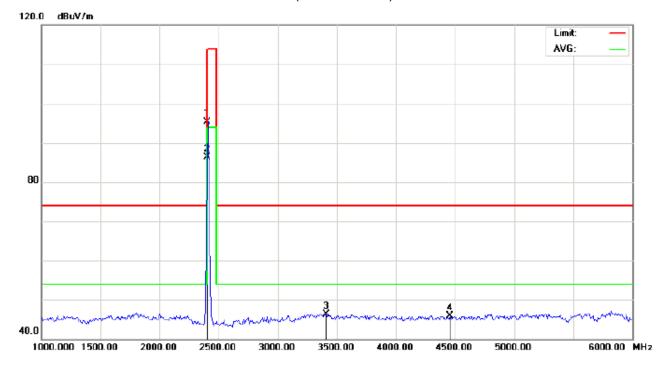

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT:Bluetooth Speaker Distance: 3m

M/N:TTA-S77BT


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	105.03	-9.68	95.35	114.00	-18.65	peak			
2	*	2402.000	96.07	-9.68	86.39	94.00	-7.61	AVG	100	217	
3		3408.333	54.38	-7.98	46.40	74.00	-27.60	peak			
4		4458.333	49.10	-3.25	45.85	74.00	-28.15	peak			

Page 23 of 53

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

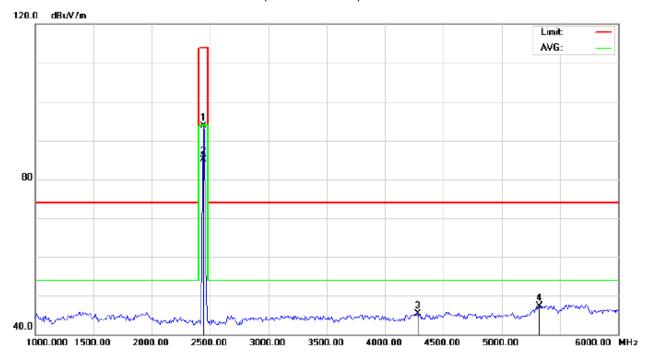

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT:Bluetooth Speaker Distance: 3m

M/N:TTA-S77BT


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	103.29	-9.63	93.66	114.00	-20.34	peak			
2	*	2441.000	94.70	-9.63	85.07	94.00	-8.93	AVG	150	98	
3		4283.333	49.24	-3.85	45.39	74.00	-28.61	peak			
4		5325.000	49.18	-1.81	47.37	74.00	-26.63	peak			

Page 24 of 53

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

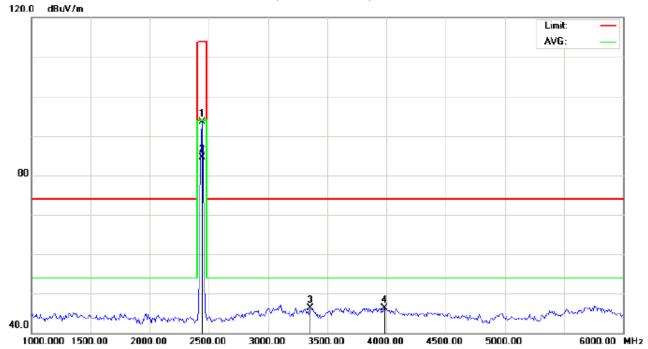

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT:Bluetooth Speaker Distance: 3m

M/N:TTA-S77BT


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	103.23	-9.63	93.60	114.00	-20.40	peak			
2	*	2441.000	94.20	-9.63	84.57	94.00	-9.43	AVG	100	212	
3		3358.333	54.36	-8.02	46.34	74.00	-27.66	peak			
4		3983.333	51.16	-4.91	46.25	74.00	-27.75	peak			

Page 25 of 53

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

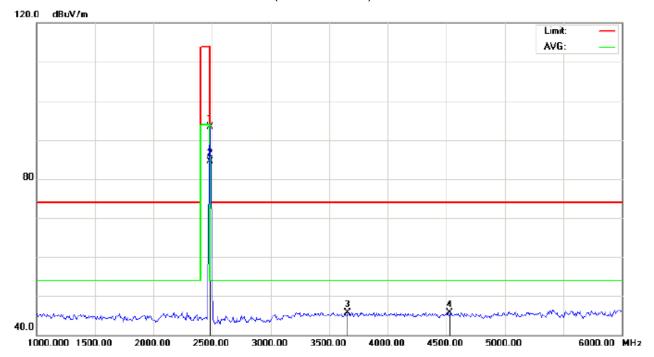

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT:Bluetooth Speaker Distance: 3m

M/N:TTA-S77BT

Mode: High Channel TX

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	102.87	-9.59	93.28	114.00	-20.72	peak			
2	*	2480.000	94.16	-9.59	84.57	94.00	-9.43	AVG	150	321	
3		3658.333	52.60	-6.91	45.69	74.00	-28.31	peak			
4		4533.333	48.67	-3.02	45.65	74.00	-28.35	peak			

Temperature: 26

Humidity: 60 %

Page 26 of 53

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

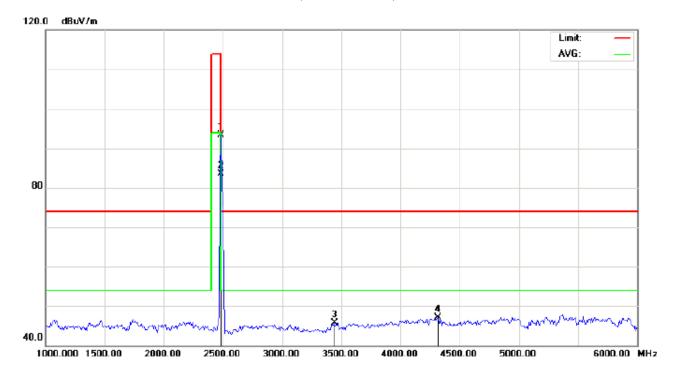

Site: site #1 Polarization:
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power:

EUT:Bluetooth Speaker Distance: 3m

M/N:TTA-S77BT

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2480.000	102.81	-9.59	93.22	114.00	-20.78	peak			
2	*	2480.000	93.06	-9.59	83.47	94.00	-10.53	AVG	150	32	
3		3441.667	53.59	-7.94	45.65	74.00	-28.35	peak			
4		4316.667	50.77	-3.73	47.04	74.00	-26.96	peak			

Vertical

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 27 of 53

Field strength of the fundamental signal(GFSK):

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	104.23	-9.68	94.55	114.00	-19.45	Horizontal
2402	102.03	-9.68	95.35	114.00	-18.65	Vertical
2441	103.29	-9.63	93.66	114.00	-20.34	Horizontal
2441	103.23	-9.63	93.60	114.00	-20.40	Vertical
2480	102.87	-9.59	93.28	114.00	-20.72	Horizontal
2480	102.81	-9.59	93.22	114.00	-20.78	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	95.35	-9.68	85.67	94.00	-8.33	Horizontal
2402	96.07	-9.68	86.39	94.00	-7.61	Vertical
2441	94.70	-9.63	85.07	94.00	-8.93	Horizontal
2441	94.20	-9.63	84.57	94.00	-9.43	Vertical
2480	94.16	-9.59	84.57	94.00	-9.43	Horizontal
2480	93.06	-9.59	83.47	94.00	-10.53	Vertical

Page 28 of 53

Field strength of the fundamental signal (π /4DQPSK):

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	104.20	-9.68	94.52	114.00	-19.48	Horizontal
2402	104.15	-9.68	94.47	114.00	-19.53	Vertical
2441	102.00	-9.63	92.37	114.00	-21.63	Horizontal
2441	102.05	-9.63	92.42	114.00	-21.58	Vertical
2480	102.10	-9.59	92.51	114.00	-21.49	Horizontal
2480	101.95	-9.59	92.36	114.00	-21.64	Vertical

Average value

Average value						
Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	92.84	-9.68	83.16	94.00	-10.84	Horizontal
2402	92.97	-9.68	83.29	94.00	-10.71	Vertical
2441	90.48	-9.63	80.85	94.00	-13.15	Horizontal
2441	92.65	-9.63	83.02	94.00	-10.98	Vertical
2480	90.93	-9.59	81.34	94.00	-12.66	Horizontal
2480	92.00	-9.59	82.41	94.00	-11.59	Vertical

Report No.: AGC06563160401FE03 Page 29 of 53

Field strength of the fundamental signal(8DPSK):

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	103.17	-9.68	93.49	114.00	-20.51	Horizontal
2402	103.19	-9.68	93.51	114.00	-20.49	Vertical
2441	101.66	-9.63	92.03	114.00	-21.97	Horizontal
2441	101.95	-9.63	92.32	114.00	-21.68	Vertical
2480	101.48	-9.59	91.89	114.00	-22.11	Horizontal
2480	101.40	-9.59	91.81	114.00	-22.19	Vertical

Average value

Average value						
Frequency	Reading Level Factor Measurement Limit		Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	92.89	-9.68	83.21	94.00	-10.79	Horizontal
2402	93.93	-9.68	84.25	94.00	-9.75	Vertical
2441	90.83	-9.63	81.20	94.00	-12.8	Horizontal
2441	93.77	-9.63	84.14	94.00	-9.86	Vertical
2480	93.87	-9.59	84.28	94.00	-9.72	Horizontal
2480	93.90	-9.59	84.31	94.00	-9.69	Vertical

Report No.: AGC06563160401FE03 Page 30 of 53

10. BAND EDGE EMISSION

10.1. MEASUREMENT PROCEDURE


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

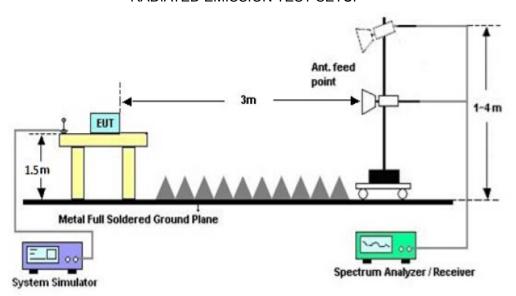


Page 31 of 53

10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

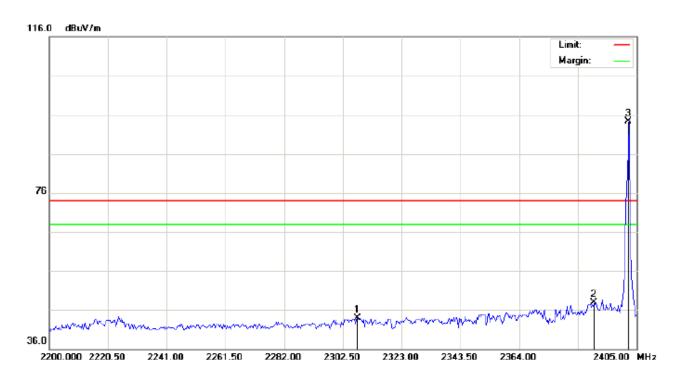

Temperature: 26 Site: site #1 Polarization: Horizontal Limit: FCC Class B 3M Radiation above 1GHZ(PK) Humidity: 60 % Power:

EUT:Bluetooth Speaker

Distance:


M/N:TTA-S77BT

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2307.625	33.69	10.22	43.91	74.00	-30.09	peak			
2		2390.000	37.62	10.31	47.93	74.00	-26.07	peak			
3	*	2402.000	83.91	10.32	94.23	74.00	20.23	peak			

Page 32 of 53

TEST PLOT OF BAND EDGE FOR LOW CHANNEL - Vertical

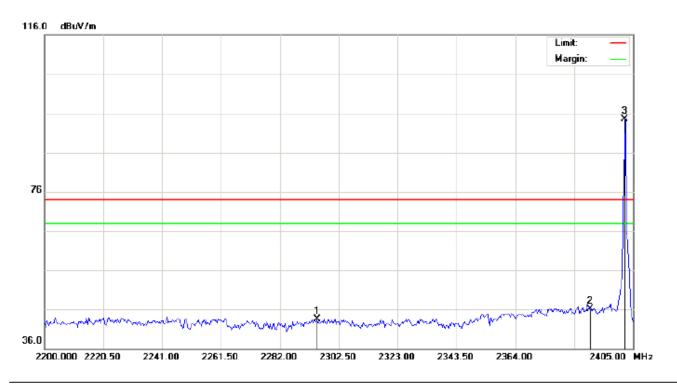

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Speaker Distance:


M/N: TTA-S77BT

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2294.983	33.28	10.20	43.48	74.00	-30.52	peak			
2		2390.000	35.85	10.31	46.16	74.00	-27.84	peak			
3	*	2402.000	84.26	10.32	94.58	74.00	20.58	peak			

Page 33 of 53

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

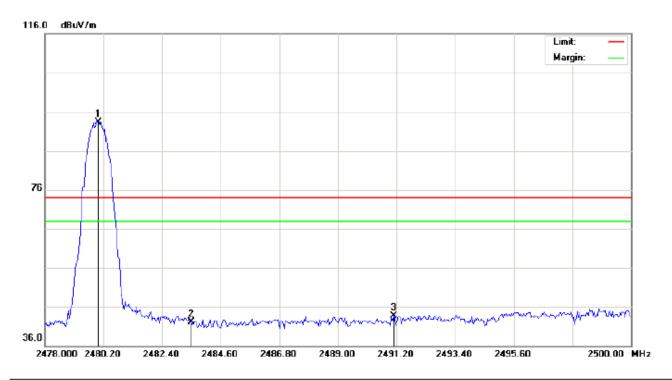

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Speaker Distance:


M/N:TTA-S77BT

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	82.96	10.41	93.37	74.00	19.37	peak			
2		2483.500	31.75	10.41	42.16	74.00	-31.84	peak			
3		2491.090	33.20	10.42	43.62	74.00	-30.38	peak			

Page 34 of 53

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

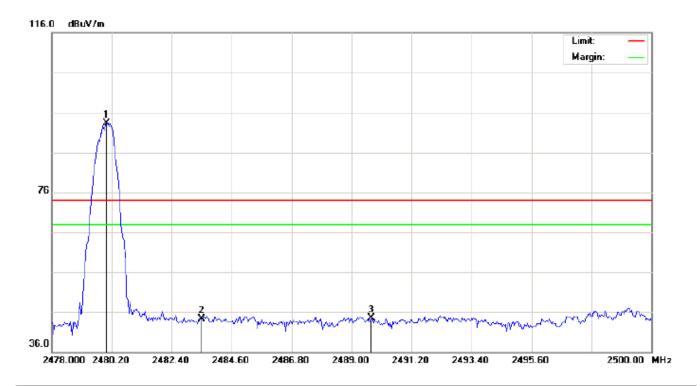

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Speaker Distance:

M/N:TTA-S77BT

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	82.85	10.41	93.26	74.00	19.26	peak			
2		2483.500	33.87	10.41	44.28	74.00	-29.72	peak			
3		2489.733	34.14	10.42	44.56	74.00	-29.44	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 35 of 53


11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

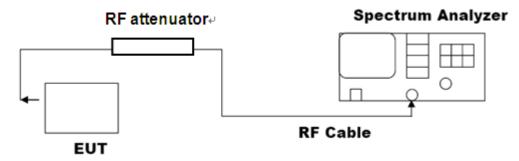

Note: The EUT has been used temporary antenna connector for testing.

11.3. LIMITS AND MEASUREMENT RESULTS

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT								
Applicable Limite	Measurement Result							
Applicable Limits	Test Da	Criteria						
	Low Channel	1.113	PASS					
N/A	Middle Channel	1.115	PASS					
	High Channel	1.110	PASS					

Page 36 of 53

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



Page 37 of 53

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

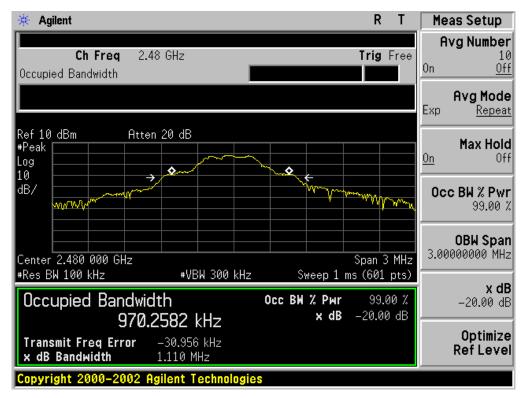

Report No.: AGC06563160401FE03 Page 38 of 53

BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT									
Amplicable Limite		Measurement Resu	lt						
Applicable Limits	Test Da	Criteria							
	Low Channel	1.296	PASS						
N/A	Middle Channel	1.315	PASS						
	High Channel	1.287	PASS						

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



Page 39 of 53

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Report No.: AGC06563160401FE03 Page 40 of 53


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT									
Annliagh Ia Limita		Measurement Resu	lt						
Applicable Limits	Test Da	Criteria							
	Low Channel	1.314	PASS						
N/A	Middle Channel	1.310	PASS						
	High Channel	1.323	PASS						

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

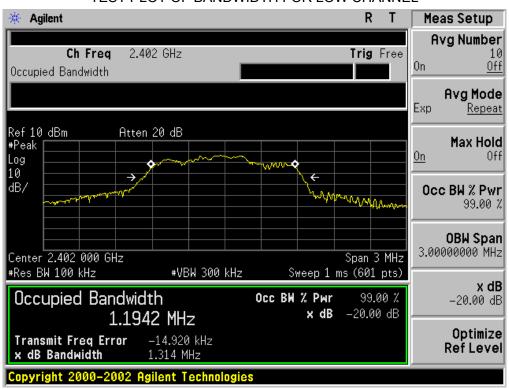


Page 41 of 53

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

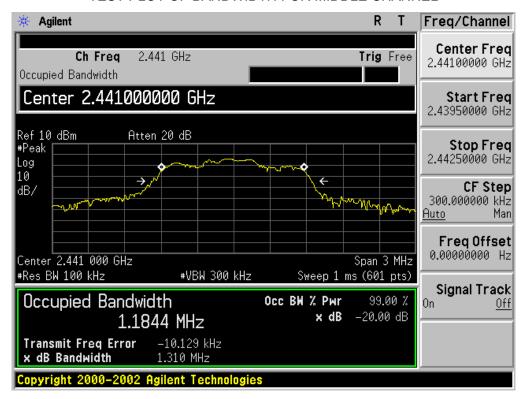

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

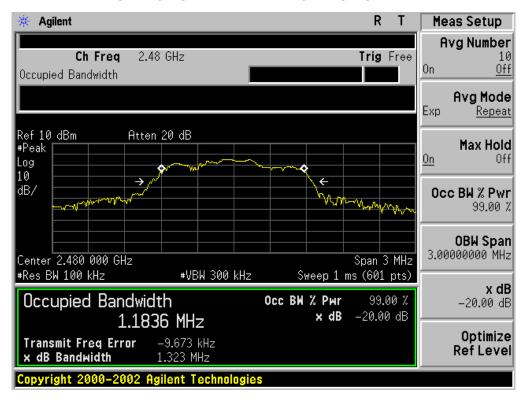

Page 42 of 53

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

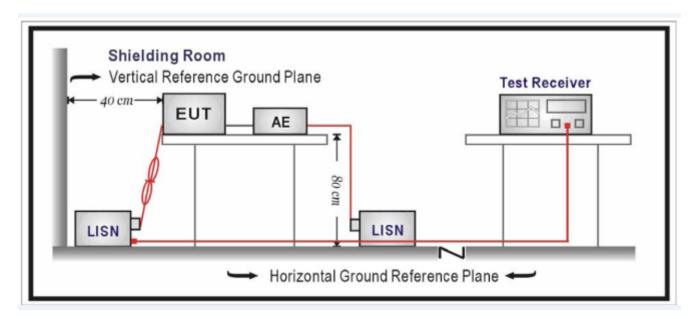

Page 43 of 53

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by PC or Adapter
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported.

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Note: The below data was tested by adapter (worst case)

Humidity: 55.2 %

Page 44 of 53

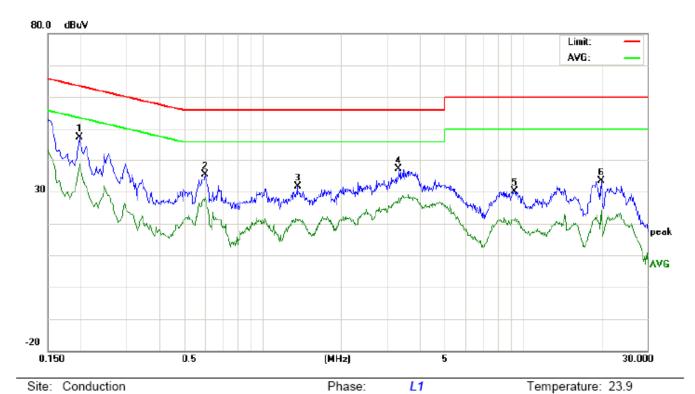

Limit: FCC Class B Conduction(QP)

EUT:Bluetooth Speaker


M/N:TTA-S77BT

Mode:BT Link with charging

Note:

No.	No. Freq.				Correct Measurement Factor (dBuV)				Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1980	37.19		28.48	10.21	47.40		38.69	63.69	53.69	-16.29	-15.00	Р	
2	0.6018	25.19		17.72	10.31	35.50		28.03	56.00	46.00	-20.50	-17.97	Р	
3	1.3619	21.21		11.07	10.38	31.59		21.45	56.00	46.00	-24.41	-24.55	Р	
4	3.3380	26.48		17.15	10.52	37.00		27.67	56.00	46.00	-19.00	-18.33	Р	
5	9.2659	19.95		10.66	10.30	30.25		20.96	60.00	50.00	-29.75	-29.04	Р	
6	20.0180	23.28		14.06	10.11	33.39		24.17	60.00	50.00	-26.61	-25.83	Р	

Power:

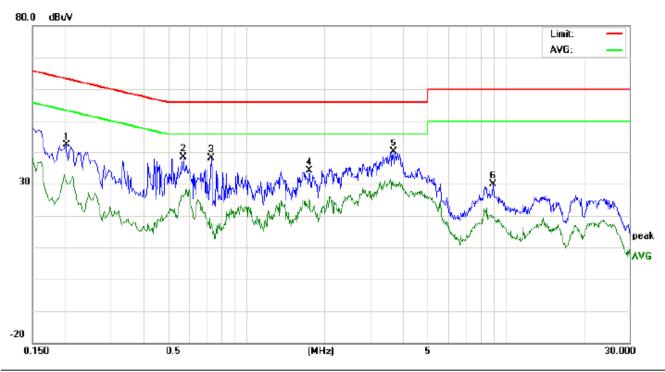

Site: Conduction Phase: N Temperature: 23.9
Limit: FCC Class B Conduction(QP) Power: Humidity: 55.2 %

EUT:Bluetooth Speaker

M/N:TTA-S77BT

Mode:BT Link with charging

Note:

No. Freq.				Correct Measurem				Limit (dBuV)		Margin (dB)		P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2020	32.20		20.67	10.22	42.42		30.89	63.52	53.52	-21.10	-22.63	Р	
2	0.5737	28.11		15.23	10.33	38.44		25.56	56.00	46.00	-17.56	-20.44	Р	
3	0.7338	27.82		7.09	10.33	38.15		17.42	56.00	46.00	-17.85	-28.58	Р	
4	1.7500	23.83		14.96	10.30	34.13		25.26	56.00	46.00	-21.87	-20.74	Р	
5	3.6939	29.73		20.42	10.48	40.21		30.90	56.00	46.00	-15.79	-15.10	Р	
6	8.9298	19.56		9.57	10.23	29.79		19.80	60.00	50.00	-30.21	-30.20	Р	


Page 46 of 53


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

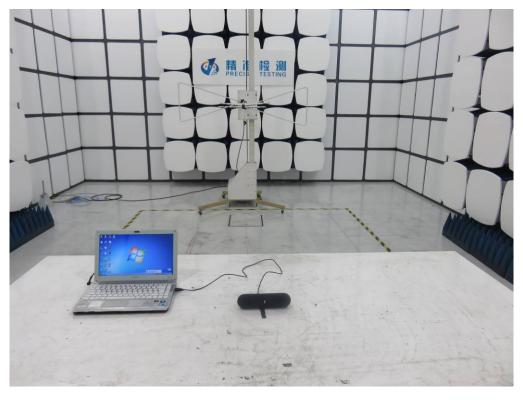

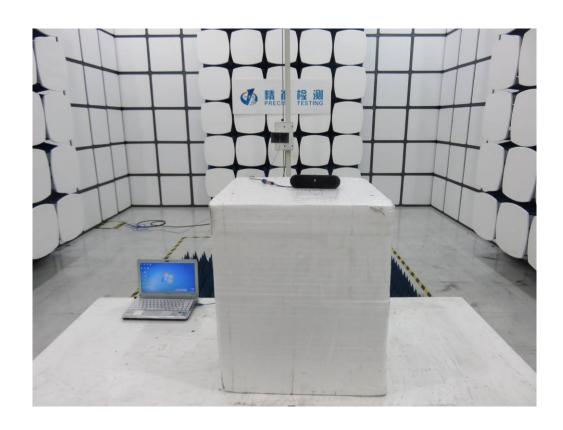

Page 48 of 53

APPENDIX B: PHOTOGRAPHS OF EUT TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT




VIEW OF EUT (PORT)




OPEN VIEW OF EUT



INTERNAL VIEW OF EUT-1

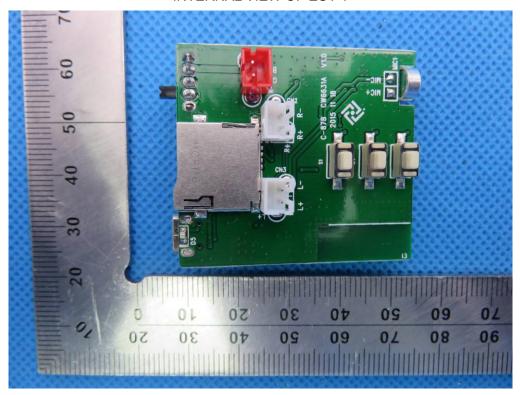


INTERNAL VIEW OF EUT-2

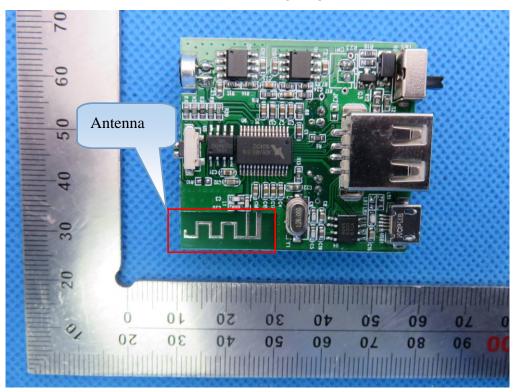

Page 53 of 53

INTERNAL VIEW OF EUT-3

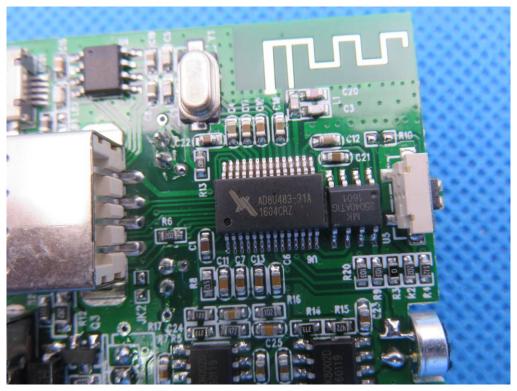

----END OF REPORT----