

FCC PART 15.231

TEST REPORT

For

Shenzhen Joy Technology Co. Ltd

5/F,3rd Building, Shunchengji Park, Huayun Road of Dalang, Longhua, Shenzhen, China

FCC ID: 2AH83RC30P-FD

Report Type: **Product Type:** Original Report Panic Button/Fall Detector **Report Number:** RSZ161018002-00 **Report Date:** 2016-11-04 Jesse Hump Jesse Huang Reviewed By: Manager Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road Kunshan Development Zone Prepared By: No.248, Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

_
3 3 3 3
5
5
5
5 5
7
8
9
9
9
10
10
10
11 11
12
12
12
14
14
14
14
15
15
15 15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Shenzhen Joy Technology Co. Ltd 's product, model number: RC30P-FD (FCC ID: 2AH83RC30P-FD) (or the "EUT") in this report was a Panic Button/Fall Detector, which was measured approximately: 40 mm (L) x 31 mm (W) x 13 mm (H), rated input voltage: DC 3V battery.

Report No.: RSZ161018002-00

Note: The series product, model: RC30P, RC30P-BZ, RC30P-VB, RC50P, RC50P-FD, RC50P-BZ, RC50P-VB, RC60P, RC60P-FD, RC60P-BZ, RC60P-VB and RC30P-FD are identical schematics, they are different from model number due to marketing purposes. RC30P-FD was selected for fully testing. Detailed information is stated and guaranteed by the applicant which was explained in the attached declaration letter.

*All measurement and test data in this report was gathered from production sample serial number: 1603459 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-10-18.

Objective

This test report is prepared on behalf of *Shenzhen Joy Technology Co. Ltd.* All the test measurements were performed according to the measurement procedure described in ANSI C63.10 - 2013.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209, 15.35(c) and 15.231 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10 - 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Iten	Uncertainty	
Radiated emission	30MHz ∼1 GHz	5.91dB
Radiated emission	Above 1 GHz	4.92dB

FCC Part 15.231 Page 3 of 16

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Lake Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China

Report No.: RSZ161018002-00

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 15.231 Page 4 of 16

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Report No.: RSZ161018002-00

Special Accessories


No special accessories was used

Equipment Modifications

No modification was made to the EUT.


Block Diagram of Test Setup

For Radiated Emission: Below 1GHz

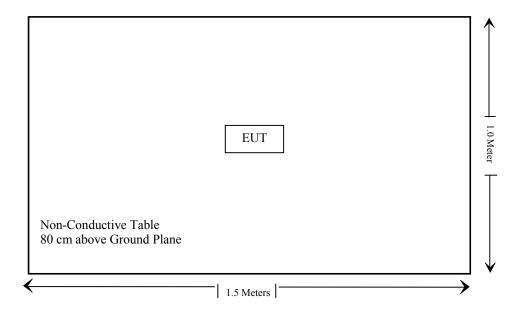

FCC Part 15.231 Page 5 of 16

For Radiated Emission: Above 1GHz

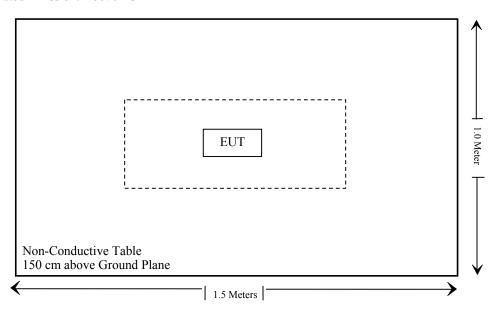

FCC Part 15.231 Page 6 of 16

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Not Applicable
§15.205, §15.209, §15.231(b)	Radiated Emissions	Compliance
§15.231 (c)	20dB Emission Bandwidth	Compliance
§15.231 (a) (2)	Deactivation	Compliance

Report No.: RSZ161018002-00

Not Applicable: The EUT is powered by battery only.

FCC Part 15.231 Page 7 of 16

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrunent	Amplifier	330	171377	2016-09-16	2017-09-15
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	ЈВ3	A090314-2	2015-11-07	2016-11-06
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Mini	Pre-amplifier	ZVA-183-S+	857001418	2016-09-16	2017-09-16
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
BACL	RF cable	KS-LAB-010	KS-LAB-010	2015-12-16	2016-12-15

Report No.: RSZ161018002-00

FCC Part 15.231 Page 8 of 16

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Report No.: RSZ161018002-00

Antenna Connector Construction

The EUT has one internal PCB antenna arrangement which was permanently attached and the antenna gain is 2.0dBi; fulfill the requirement of this section. Please refer to EUT photos.

Result: Compliant.

FCC Part 15.231 Page 9 of 16

FCC §15.205, §15.209, §15.231 (b) - RADIATED EMISSIONS

Applicable Standard

FCC §15.205, §15.209, §15.231 (b)

According to FCC §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Report No.: RSZ161018002-00


Fundamental frequency (MHz)	Field Strength of Fundamental (Microvolts /meter)	Field Strength of spurious emissions ((Microvolts /meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750**	125 to 375**
174-260	3750	375
260-470	3750 to 12500**	375 to 1250**
Above 470	12500	1250

^{*}Linear interpolations.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.


EUT Setup

Below 1 GHz:

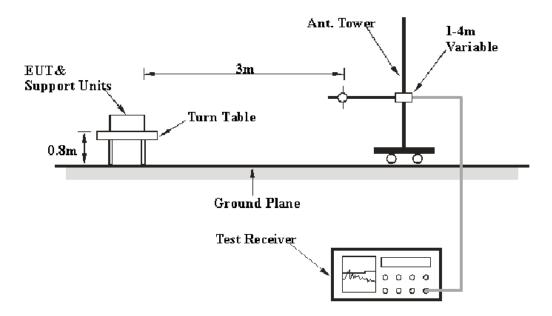

FCC Part 15.231 Page 10 of 16

Above 1 GHz:

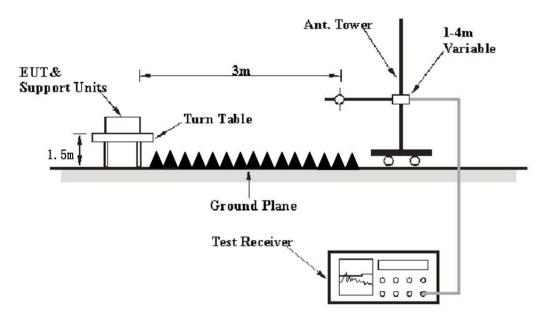

Report No.: RSZ161018002-00

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10 - 2013. The specification used was the FCC 15 \S 15.205, 15.205 and 15.231.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 4.4 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
Above 1 GHz	1 MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak detection mode above 1 GHz.

FCC Part 15.231 Page 11 of 16

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Report No.: RSZ161018002-00

Corrected Amplitude = Meter Reading + Antenna Loss + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 5.8 dB means the emission is 5.8 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit –Corrected Amplitude

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.205, §15.209, §15.231 (b),

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m}$$
 ++ $U_{(Lm)} \le L_{\rm lim}$ ++ $U_{\rm cispr}$

In BACL, $U_{(Lm)}$ is less than + U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	28 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-10-25.

Test mode: Transmitting

FCC Part 15.231 Page 12 of 16

30MHz – 4.4GHz: (GFSK)

	Re	eceiver			tenna	Corrected	Corrected	FCC F	Part 15.231(b)/205/209
Frequency (MHz)	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)		Factor	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
434.201	80.87	PK	253	1.5	Н	-7.32	73.55	100.8	27.25	Fundamental
434.201	78.22	Ave.	253	1.5	Н	-7.32	70.9	80.8	9.9	Fundamental
434.201	71.48	PK	214	1.3	V	-7.32	64.16	100.8	36.64	Fundamental
434.201	68.22	Ave.	214	1.3	V	-7.32	60.9	80.8	19.9	Fundamental
868.402	39.99	PK	136	1.6	Н	-1.09	38.9	80.8	41.9	Harmonic
868.402	37.59	Ave.	136	1.6	Н	-1.09	36.5	60.8	24.3	Harmonic
868.402	35.79	PK	187	2.2	V	-1.09	34.7	80.8	46.1	Harmonic
868.402	33.49	Ave.	187	2.2	V	-1.09	32.4	60.8	28.4	Harmonic
1302.603	38.04	PK	219	2.1	Н	-3.91	34.13	80.8	46.67	Harmonic
1302.603	23.35	Ave.	219	2.1	Н	-3.91	19.44	60.8	41.36	Harmonic
1302.603	38.15	PK	299	1.2	V	-3.91	34.24	80.8	46.56	Harmonic
1302.603	23.37	Ave.	299	1.2	V	-3.91	19.46	60.8	41.34	Harmonic

Report No.: RSZ161018002-00


Note:

This item was tested with 100% duty cycle.

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (Rx) + cable loss – amplifier factor

Margin = Limit - Corr. Amplitude

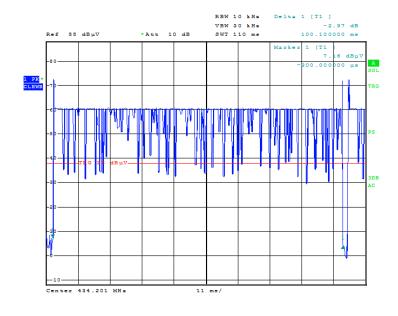

EUT

Date: 25.OCT.2016 13:59:16

FCC Part 15.231 Page 13 of 16

FCC §15.231(a) (2) - DEACTIVATION TESTING

Applicable Standard

Per FCC §15.231(a) (2), a transmitter activated automatically shall cease transmission within 5 seconds after activation.

Report No.: RSZ161018002-00

Test Procedure

- 1. Set center frequency of spectrum analyzer=operating frequency.
- 2. Set the spectrum analyzer as RBW=100k VBW=300k Span=0Hz.
- 3. Repeat above procedures until all frequency measured was complete.

Test Data


Environmental Conditions

Temperature:	28 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-10-25.

Test mode: Transmitting

Test Result: Compliant, please refer to following plot.

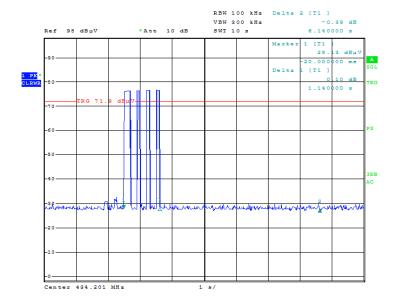

EUT
Date: 25.0CT.2016 14:05:44

FCC Part 15.231 Page 14 of 16

FCC §15.231(c) – 20 dB EMISSION BANDWIDTH TESTING

Applicable Standard

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Report No.: RSZ161018002-00

Test Procedure

With the EUT's antenna attached, the wave form was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

Test Data

Environmental Conditions

Temperature:	28 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-10-25.

Test mode: Transmitting

Please refer to following table and plot.


FCC Part 15.231 Page 15 of 16

Channel Frequency (MHz)	• •		Result
434.201	94.2	1085.502	Pass

Report No.: RSZ161018002-00

Note: Limit = 0.25% * center frequency = 0.25% * 434.201 MHz = 1085.502 kHz 20dB bandwidth = 94.2 kHz < 1085.502 kHz

20 dB Emission Bandwidth

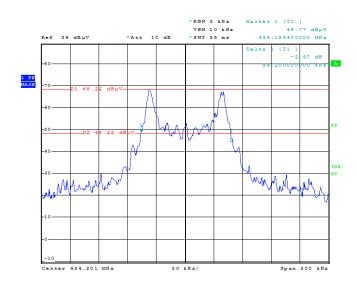

EUT
Date: 25.0CT.2016 14:11:04

***** END OF REPORT *****

FCC Part 15.231 Page 16 of 16