FCC Test Report

Report No.: AGC05406151101FE08

FCC ID : 2AHADQKXX

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Fingerprint Encryption Key

BRAND NAME : QBKey

MODEL NAME : QKXX

CLIENT : Niip Limited

DATE OF ISSUE : Jan.21,2016

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION : V1.0

Attestation of Globa Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 57

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan.21,2016	Valid	Original Report

Page 3 of 57

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	
2.GENERAL INFORMATION	
2.2 RELATED SUBMITTAL(S)/GRANT(S)	
2.3TEST METHODOLOGY	
2.4 TEST FACILITY	6
2.5 SPECIAL ACCESSORIES	
2.6 EQUIPMENT MODIFICATIONS	7
2.7 MEASUREMENT UNCERTAINTY	7
3. SYSTEM TEST CONFIGURATION	8
3.2 EQUIPMENT USED IN TESTED SYSTEM	8
3.3. SUMMARY OF TEST RESULTS	g
4. DESCRIPTION OF TEST MODES	
5. ANTENNA REQUIREMENT	
5.2. TEST RESULT	
6. TEST FACILITY	13
7. RADIATED EMISSION	
7.2 TEST SETUP	
7.3 LIMITS AND MEASUREMENT RESULT	18
7.4 TEST RESULT (WORST MODULATION: GFSK)	18
8. BAND EDGE EMISSION	31
8.2. TEST SET-UP	31
8.3. TEST RESULT	32
9. 6DB BANDWIDTH	
9.2. SUMMARY OF TEST RESULTS/PLOTS	36
10. CONDUCTED OUTPUT POWER	38
10.1. MEASUREMENT PROCEDURE	38
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
10.3. LIMITS AND MEASUREMENT RESULT	
11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	

Page 4 of 57

	11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	41
	11.3 LIMITS AND MEASUREMENT RESULT	41
12	2. FCC LINE CONDUCTED EMISSION TEST	
	12.1 LIMITS	44
	12.2 TEST SETUP	44
	12.3 PRELIMINARY PROCEDURE	45
	12.4 FINAL TEST PROCEDURE	45
	12.5 TEST RESULT OF POWER LINE	46
Α	PPENDIX A: PHOTOGRAPHS OF TEST SETUP	48
	PPENDIX B: PHOTOGRAPHS OF EUT	

Page 5 of 57

1. VERIFICATION OF COMPLIANCE

Applicant	Niip Limited			
Address	UNITS 903-906A,KOWLOON CENTRE, 33 ASHLEY ROAD, TSIMSHATSUI, KOWLOON, HONGKONG			
Manufacturer	Niip Limited			
Address	UNITS 903-906A,KOWLOON CENTRE, 33 ASHLEY ROAD, TSIMSHATSUI, KOWLOON, HONGKONG			
Product Designation	Fingerprint Encryption Key			
Brand Name	QBKey			
Test Model	QKXX			
Date of test	Jan.16,2016 to Jan.19,2016			
Deviation	None			
Condition of Test Sample	Normal			
Report Template	AGCRT-US-BLE/RF (2013-03-01)			

WE HEREBY CERTIFY THAT:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Tested By	Water Zuo	
·	Water Zuo(Zuo Yingying)	Jan.21,2016
Reviewed By	forest ei	
	Forrest Lei(Lei Yonggang)	Jan.21,2016
Approved By	Solya Hong	
•	Solger Zhang(Zhang Hongyi) Authorized Officer	Jan.21,2016

Page 6 of 57

2.GENERAL INFORMATION 2.1PRODUCT DESCRIPTION

The EUT is designed as a "Fingerprint Encryption Key". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz		
RF Output Power	0.44dBm(Max)		
Bluetooth Version	V4.0		
Modulation	GFSK		
Number of channels	40 Channel(37 Hopping Channel,3 advertising Channel)		
Antenna Designation	Ceramic Antenna		
Antenna Gain	2dBi		
Hardware Version	V5.0		
Software Version	BSE_DAT_2(CONTEC).1.1.1_3.6.7.8U		
Power Supply	DC3.7V by Battery		

Note: The USB port only used for charging and can't be used to transfer data with PC.

2.2 RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2AHADQKXX** filling to comply with Section 15.247of the FCC Part 15, Subpart C Rules.

2.3TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The test has been referenced the KDB 558074 D01 DTS Meas Guidance v03r04

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was tested in all three orthogonal planes and the worse case was showed.

2.4 TEST FACILITY

All measurement facilities used to collect the measurement data are located at Dongguan Precise Testing Service Co., Ltd.

Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China FCC register No.:371540

2.5 SPECIAL ACCESSORIES

Refer to section 2.2.

Page 7 of 57

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 MEASUREMENT UNCERTAINTY

Radiation Emission:+/-3.2


Conduction Emission:+/-2.5

Page 8 of 57

3. SYSTEM TEST CONFIGURATION

3.1 CONFIGURATION OF TESTED SYSTEM

Configure 1: (Normal hopping)

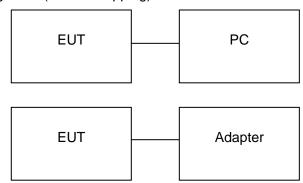

Note: Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configuration: Continuous TX



3.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Fingerprint Encryption Key	QBKey	QKXX	EUT
2	PC	SONY	E1412AYCW	A.E
3	Control box	N/A	N/A	A.E
4	AC adapter	N/A	MX12X8-0502000UU	A.E
5	AC adapter (PC)	GPE0538	1.1m,unshielded	A.E
6	Temporary Antenna Connector	T10	N/A	A.E

Page 9 of 57

3.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203	Antenna Requirement	Compliant
§15.209 §15.247(d)	Radiated Emission	Compliant
§15.247(d)	Band Edges	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247(b)	Conducted Power	Compliant
§15.247(e)	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.207	Line Conduction Emission	Compliant

Page 10 of 57

4. DESCRIPTION OF TEST MODES


The EUT has been operated in one modulation: GFSK.

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	BT Link +fingerprint input+ charging

Note:

- 1. Only the result of the worst case was recorded in the report if no any records.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. Transmitting duty cycle >98%, The average correction factor is about -0.18
- 4. The EUT used fully-charged battery when tested.

Report No.: AGC05406151101FE08 Page 11 of 57

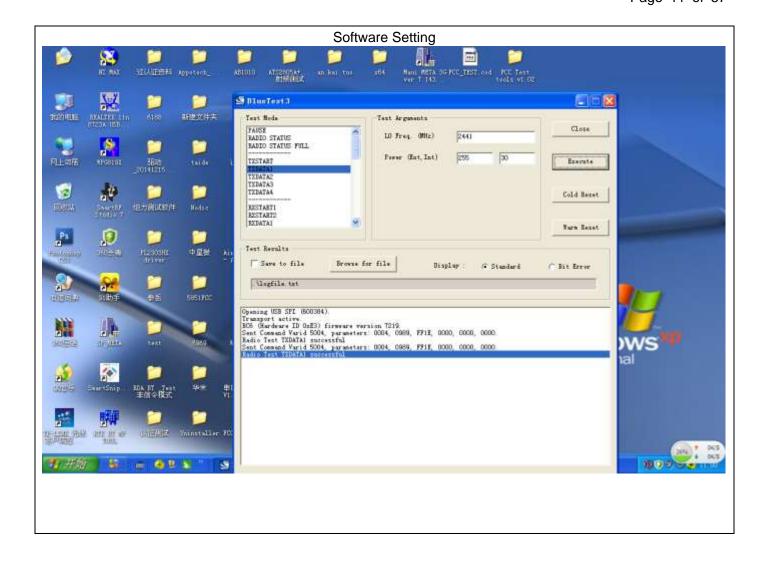

Page 12 of 57

5. ANTENNA REQUIREMENT

5.1. STANDARD APPLICABLE

According to FCC 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

5.2. TEST RESULT

This product has a permanent antenna, fulfill the requirement of this section.

Page 13 of 57

6. TEST FACILITY

Site Dongguan Precise Testing Service Co., Ltd.		
Location Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China		
FCC Registration No.	371540	
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.	

ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site							
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration		
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016		
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016		
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016		
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016		
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016		
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A		
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016		
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016		

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site							
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration		
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016		
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016		
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016		
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016		
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016		
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016		
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A		
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016		

Page 14 of 57

	Conducted Emission Test Site												
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration								
EMI Test Receiver	- Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016								
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016								
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016								
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016								
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016								

Page 15 of 57

7. RADIATED EMISSION

7.1 MEASUREMENT PROCEDURE


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported for above 1GHz, and the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.


Page 16 of 57

7.2 TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

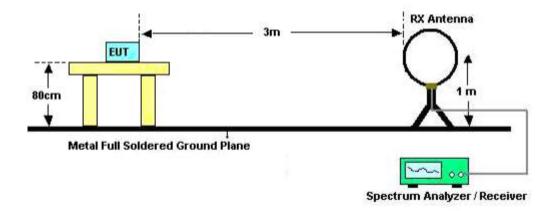


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

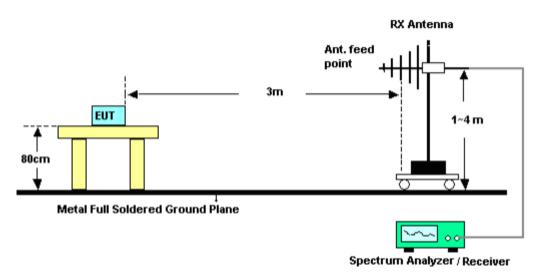

Page 17 of 57

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

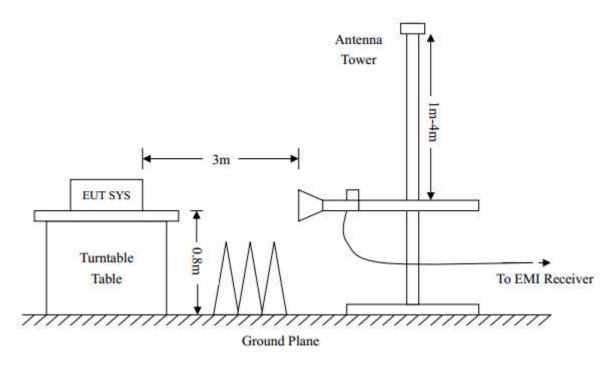

Page 18 of 57

7.3 LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

7.4 TEST RESULT (Worst Modulation: GFSK)


RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

Page 19 of 57

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

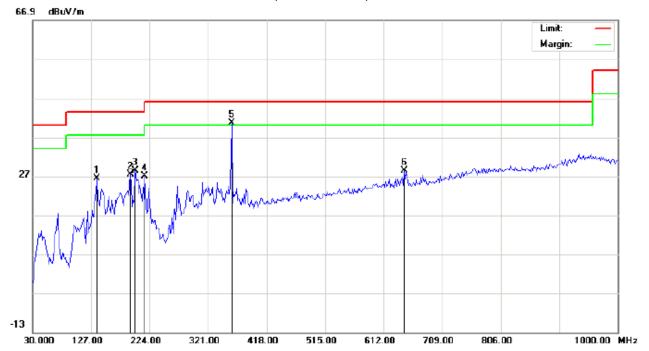

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Fingerprint Encryption Key

M/N:QKXX

Mode: Low Channel TX

Note:


Polarization: *Horizontal* Temperature: 23.1 Power: Humidity: 54.1 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		136.7000	12.67	13.66	26.33	43.50	-17.17	peak			
2		191.6667	15.79	11.61	27.40	43.50	-16.10	peak			
3		199.7500	16.46	11.99	28.45	43.50	-15.05	peak			
4		215.9167	16.55	10.38	26.93	43.50	-16.57	peak			
5	*	359.8000	21.90	18.80	40.70	46.00	-5.30	peak			
6		645.9500	4.64	23.84	28.48	46.00	-17.52	peak			

Page 20 of 57

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

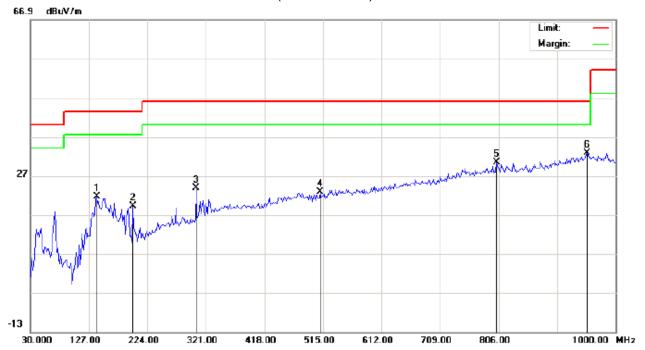

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Fingerprint Encryption Key

M/N:QKXX

Mode: Low Channel TX

Note:

Polarization:	Vertical	Temperature:	23.1
Power:		Humidity: 54.	1 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		139.9333	6.36	15.17	21.53	43.50	-21.97	peak			
2		199.7500	10.24	9.06	19.30	43.50	-24.20	peak			
3		304.8333	8.01	15.73	23.74	46.00	-22.26	peak			
4		510.1500	1.36	21.40	22.76	46.00	-23.24	peak			
5		802.7667	3.08	27.32	30.40	46.00	-15.60	peak			
6	*	953.1167	2.87	29.97	32.84	46.00	-13.16	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 21 of 57

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

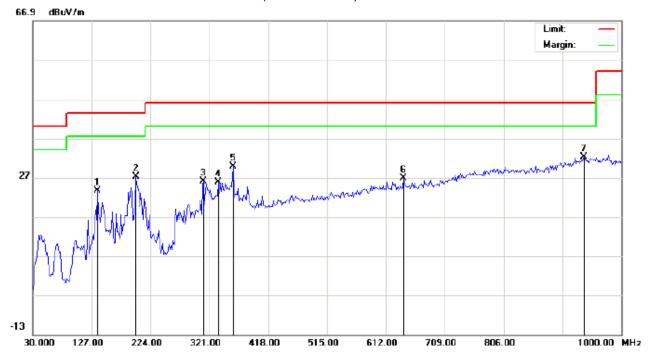

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Fingerprint Encryption Key

M/N:QKXX

Mode: Middle Channel TX

Note:


Polarization: Horizontal Temperature: 23.1 Power: Humidity: 54.1 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∨/m	dBu∀/m	dB		cm	degree	
1		136.7000	9.88	13.66	23.54	43.50	-19.96	peak			
2		199.7500	15.14	11.99	27.13	43.50	-16.37	peak			
3		311.3000	9.90	16.16	26.06	46.00	-19.94	peak			
4		335.5500	8.02	17.78	25.80	46.00	-20.20	peak			
5		359.8000	11.08	18.80	29.88	46.00	-16.12	peak			
6		641.1000	2.88	23.83	26.71	46.00	-19.29	peak			
7	*	938.5667	2.60	29.68	32.28	46.00	-13.72	peak			

Page 22 of 57

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

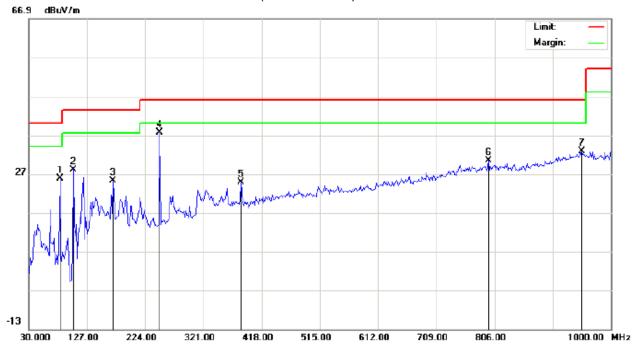

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Fingerprint Encryption Key

M/N:QKXX

Mode: Middle Channel TX

Note:

Polarization:	Vertical	Temperature: 23.1
Power:		Humidity: 54.1 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		81.7333	23.32	2.42	25.74	40.00	-14.26	peak			
2		104.3667	29.03	-0.93	28.10	43.50	-15.40	peak			
3		170.6500	10.55	14.66	25.21	43.50	-18.29	peak			
4	*	248.2500	23.89	13.73	37.62	46.00	-8.38	peak			
5		384.0500	5.78	18.96	24.74	46.00	-21.26	peak			
6		796.3000	3.16	27.27	30.43	46.00	-15.57	peak			
7		951.5000	2.87	29.99	32.86	46.00	-13.14	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 23 of 57

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

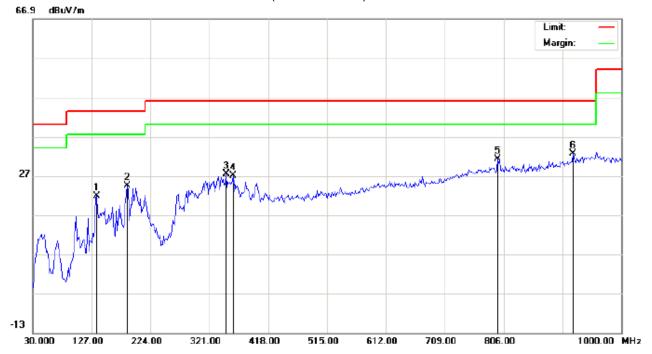

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Fingerprint Encryption Key

M/N:QKXX

Mode: High Channel TX

Note:

Polarization: *Horizontal* Temperature: 23.1 Power: Humidity: 54.1 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		135.0833	8.99	12.90	21.89	43.50	-21.61	peak			
2		185.2000	13.15	11.31	24.46	43.50	-19.04	peak			
3		348.4833	8.84	18.64	27.48	46.00	-18.52	peak			
4		359.8000	8.19	18.80	26.99	46.00	-19.01	peak			
5		796.3000	3.91	27.27	31.18	46.00	-14.82	peak			
6	*	920.7833	3.34	29.19	32.53	46.00	-13.47	peak			

Page 24 of 57

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL



Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Fingerprint Encryption Key

M/N:QKXX

Mode: High Channel TX

Note:

Polarization:	Vertical	Temperature: 23.1
Power:		Humidity: 54.1 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		136.7000	4.55	13.82	18.37	43.50	-25.13	peak			
2		225.6167	13.45	11.51	24.96	46.00	-21.04	peak			
3		264.4167	6.55	14.34	20.89	46.00	-25.11	peak			
4		558.6500	1.40	22.52	23.92	46.00	-22.08	peak			
5		754.2667	2.35	26.69	29.04	46.00	-16.96	peak			
6	*	896.5333	6.15	28.52	34.67	46.00	-11.33	peak		·	

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 25 of 57

RADIATED EMISSION ABOVE 1GHZ

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

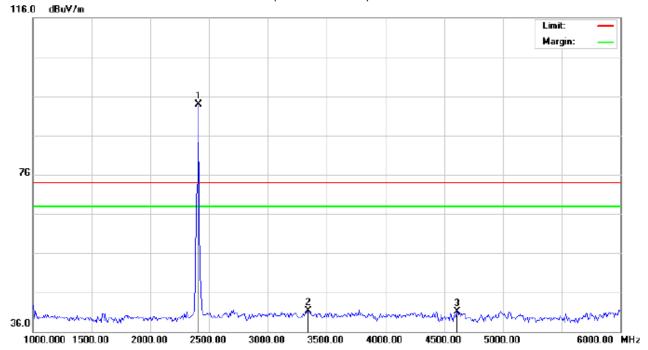

Site: Conduction Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Fingerprint Encryption Key Distance:

M/N:QKXX


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	83.65	10.32	93.97	74.00	19.97	peak			
2		3341.667	29.32	11.96	41.28	74.00	-32.72	peak			
3		4608.333	33.89	7.17	41.06	74.00	-32.94	peak			

Page 26 of 57

RADIATED EMISSION TEST-(ABOVE 1GHZ)-LOW CHANNEL-VERTICAL

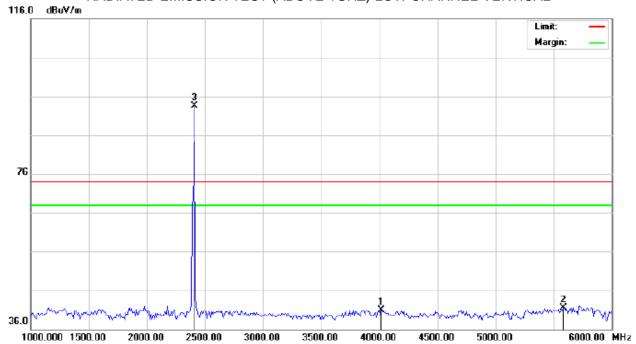

Site: Conduction Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

Distance:

EUT:Fingerprint Encryption Key

M/N:QKXX

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		4016.667	26.05	14.91	40.96	74.00	-33.04	peak			
2		5583.333	43.34	-1.77	41.57	74.00	-32.43	peak			
3	*	2402.000	83.18	10.32	93.50	74.00	19.50	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 27 of 57

RADIATED EMISSION TEST-(ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

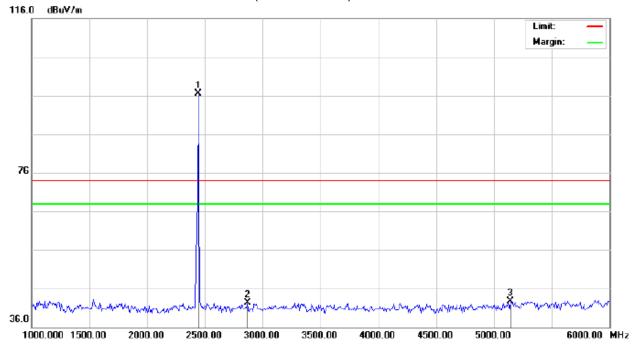

Site: Conduction Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Fingerprint Encryption Key Distance:

M/N:QKXX


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2440.000	86.11	10.36	96.47	74.00	22.47	peak			
2		2866.667	31.05	11.32	42.37	74.00	-31.63	peak			
3		5141.667	37.38	5.36	42.74	74.00	-31.26	peak			

Page 28 of 57

RADIATED EMISSION TEST-(ABOVE 1GHZ)-MIDDLE CHANNEL-VERTICAL

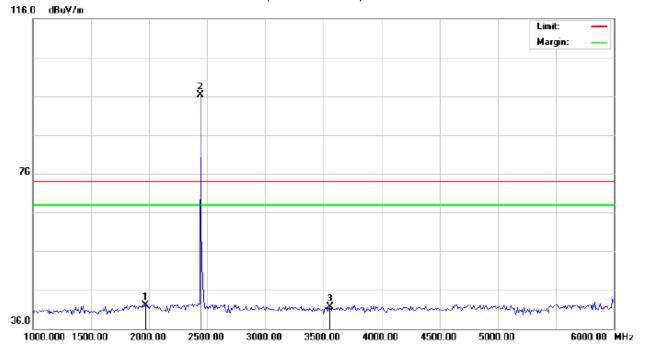

Site: Conduction Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Fingerprint Encryption Key Distance:

M/N:QKXX

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1966.667	32.62	9.53	42.15	74.00	-31.85	peak			
2	*	2440.000	85.91	10.36	96.27	74.00	22.27	peak			
3		3558.333	29.20	12.47	41.67	74.00	-32.33	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

Temperature: 26

Humidity: 60 %

Page 29 of 57

RADIATED EMISSION TEST-(ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

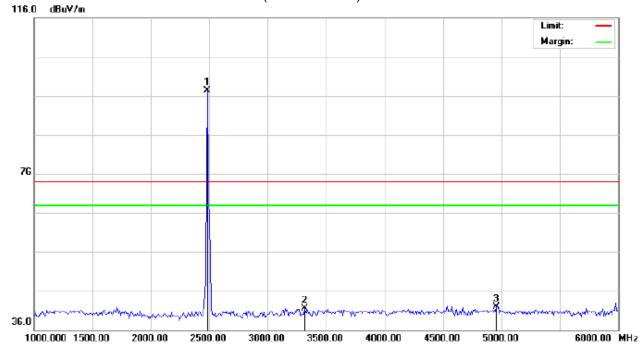

Site: Conduction
Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

EUT:Fingerprint Encryption Key

Distance:

Polarization: Horizontal

M/N:QKXX


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	86.89	10.41	97.30	74.00	23.30	peak			
2		3316.667	29.49	11.94	41.43	74.00	-32.57	peak			
3		4958.333	33.89	8.09	41.98	74.00	-32.02	peak			

Page 30 of 57

RADIATED EMISSION TEST-(ABOVE 1GHZ)-HIGH CHANNEL-VERTICAL

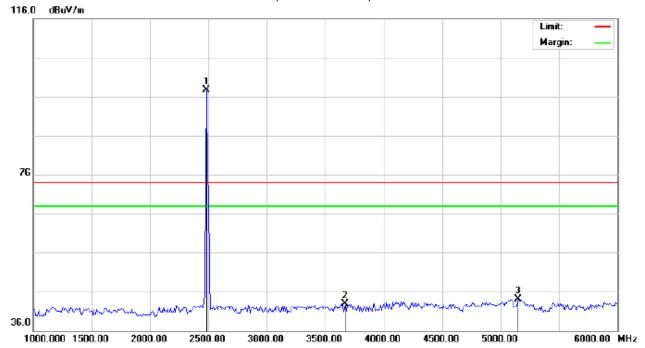

Site: Conduction Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Fingerprint Encryption Key Distance:

M/N:QKXX

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.26	10.41	97.67	74.00	23.67	peak			
2		3666.667	29.76	13.14	42.90	74.00	-31.10	peak			
3		5150.000	38.90	5.20	44.10	74.00	-29.90	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain,

Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 31 of 57

8. BAND EDGE EMISSION

8.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency=Operation Frequency, RBW>=100kHz, VBW>=3*RBW, Center frequency =Operation frequency
- 3. The band edges was measured and recorded.

8.2. TEST SET-UP

Radiated same as 7.2

Page 32 of 57

8.3. TEST RESULT

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Horizontal



Site: Conduction Temperature: 26 Polarization: Horizontal Limit: FCC Class B 3M Radiation above 1GHZ(PK) Humidity: 60 % Power:

EUT:Fingerprint Encryption Key

Distance:

M/N:QKXX


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2254.325	32.75	10.16	42.91	74.00	-31.09	peak			
2		2390.000	35.00	10.31	45.31	74.00	-28.69	peak			
3	*	2402.000	83.22	10.32	93.54	74.00	19.54	peak			

Page 33 of 57

TEST PLOT OF BAND EDGE FOR LOW CHANNEL - Vertical

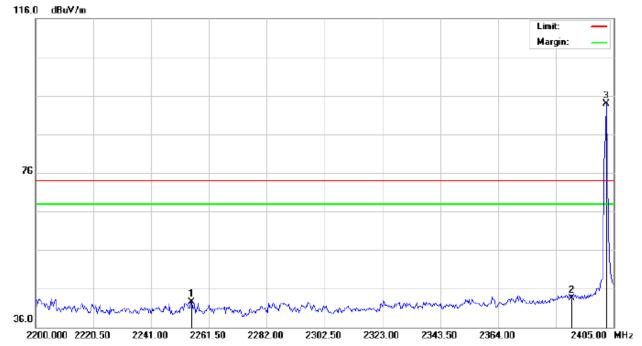

Site: Conduction Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Fingerprint Encryption Key Distance:

M/N:QKXX


Mode: Low Channel TX

Note:

No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2255.350	32.37	10.16	42.53	74.00	-31.47	peak			
2		2390.000	33.21	10.31	43.52	74.00	-30.48	peak			
3	*	2402.000	83.59	10.32	93.91	74.00	19.91	peak			

Page 34 of 57

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

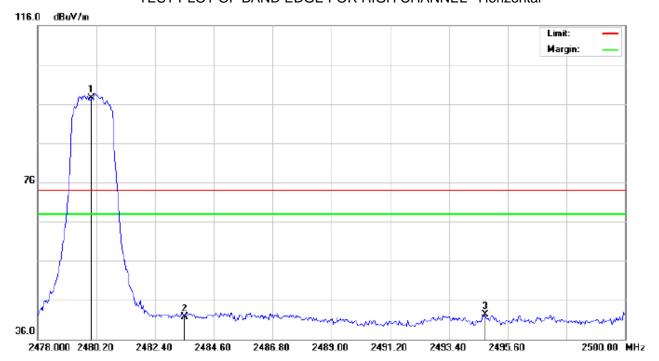

Site: Conduction

Polarization: Horizontal Power: Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Humidity: 60 %

EUT:Fingerprint Encryption Key

Distance:

M/N:QKXX


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.05	10.41	97.46	74.00	23.46	peak			
2		2483.500	31.19	10.41	41.60	74.00	-32.40	peak			
3		2494.757	31.91	10.42	42.33	74.00	-31.67	peak			

Page 35 of 57

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Vertical

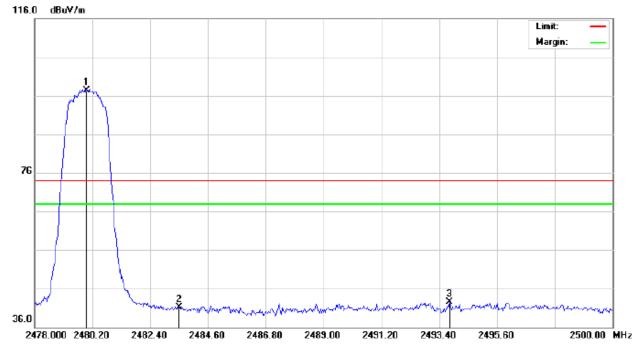

Site: Conduction Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Fingerprint Encryption Key Distance:

M/N:QKXX

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	86.82	10.41	97.23	74.00	23.23	peak			
2		2483.500	30.76	10.41	41.17	74.00	-32.83	peak			
3		2493.803	32.03	10.42	42.45	74.00	-31.55	peak			

Page 36 of 57

9. 6DB BANDWIDTH


9.1. TEST PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW ≥ 3*RBW.
- 4. Set SPA Trace 1 Max hold, then View.

9.2. SUMMARY OF TEST RESULTS/PLOTS

Channel	6dB Bandwidth (KHz)	Minimum Limit (KHz)	Pass/Fail
Low	691.864		Pass
Middle	696.375	500KHz	Pass
High	696.700		Pass

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

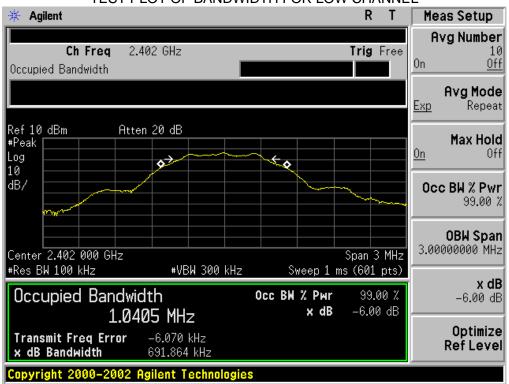


Page 37 of 57

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

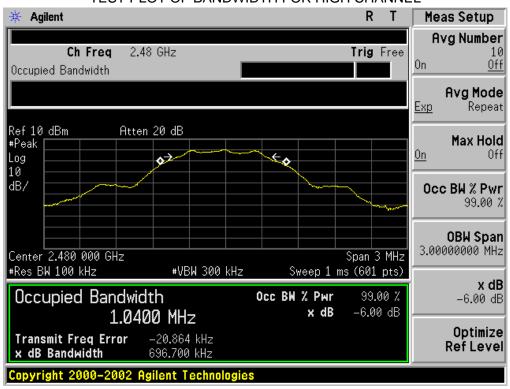

Page 38 of 57

10. CONDUCTED OUTPUT POWER

10.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 3. Use the following spectrum analyzer settings:
- a) Set the RBW ≥ DTS bandwidth.
- b) Set VBW ≥ 3 RBW.
- c) Set span ≥ 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.
- 4. Allow the trace to stabilize.
- 5. Record the result form the Spectrum Analyzer.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


Setup Diagram for Peak Power

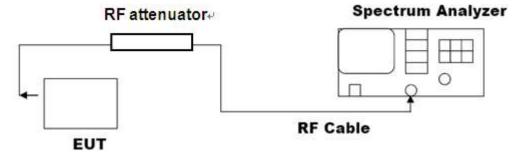


Page 39 of 57

10.3. LIMITS AND MEASUREMENT RESULT


Channel	Peak Power (dBm)	Applicable Limits (dBm)	Pass/Fail		
Low Channel	-3.25	30	Pass		
Middle Channel	-0.71	30	Pass		
High Channel	0.44	30	Pass		




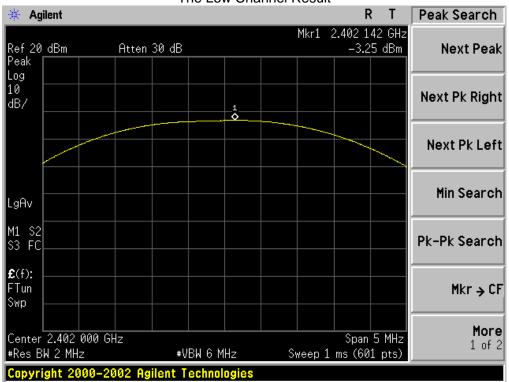

Page 40 of 57



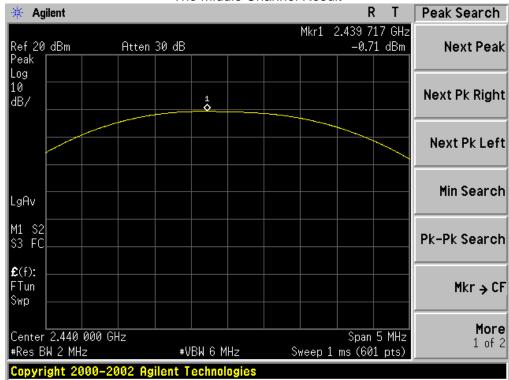

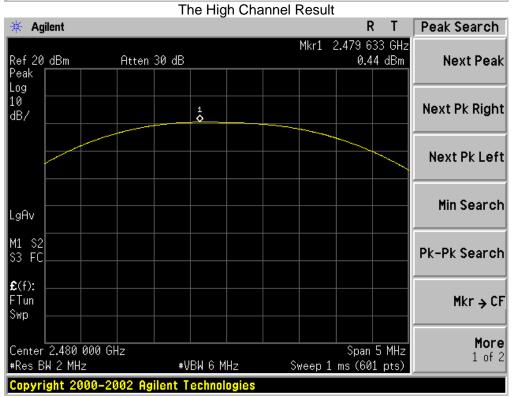


Page 41 of 57

11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY 11.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the span to 1.5times the DTS bandwidth, RBW: 3kHz<=RBW<=100KHz, VBW>=3*RBW
- 4). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

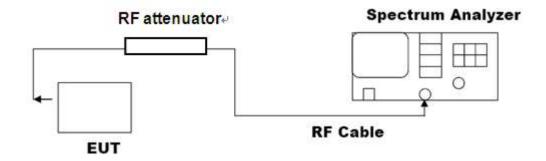


11.3 LIMITS AND MEASUREMENT RESULT


Channel No.	PSD (dBm/3KHz)	Limit (dBm/3KHz)	Result		
Low Channel	-19.08	8	Pass		
Middle Channel	-16.61	8	Pass		
High Channel	-15.45	8	Pass		

Page 42 of 57

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

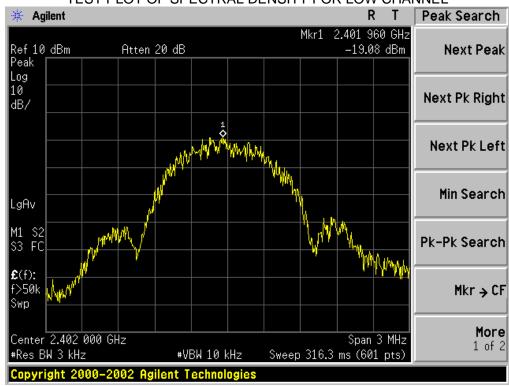


TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

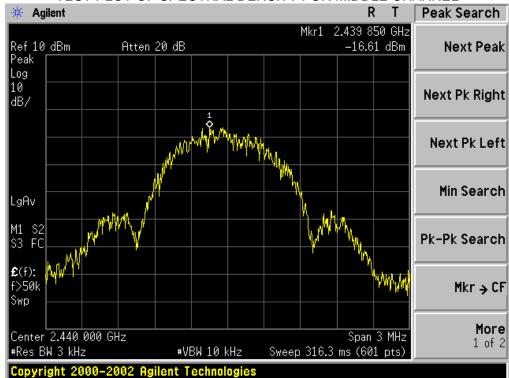

Page 43 of 57

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

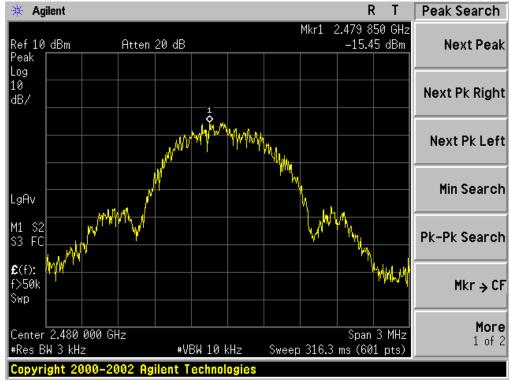

Page 44 of 57


12. FCC LINE CONDUCTED EMISSION TEST

12.1 LIMITS

Fraguency	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

^{**}Note: 1. The lower limit shall apply at the transition frequency.

12.2 TEST SETUP

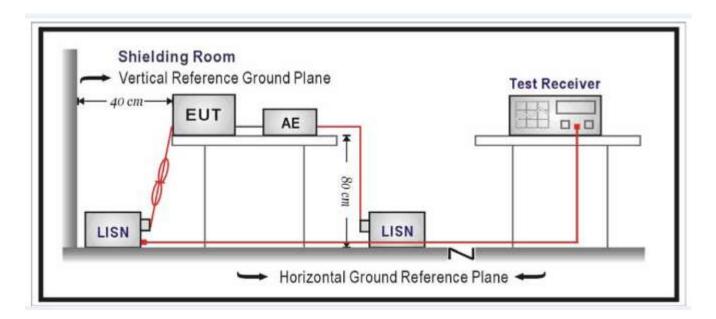

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

Page 45 of 57

12.3 PRELIMINARY PROCEDURE

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received DC charging voltage by PC or by adapter which received 120V/60Hzpower by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test. Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 FINAL TEST PROCEDURE


- 10) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 11) 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 12) 3) The test data of the worst case condition(s) was reported on the Summary Data page.

Page 46 of 57

12.5 TEST RESULT OF POWER LINE

Worst Case (By Adapter)

Line Conducted Emission Test Line 1-L

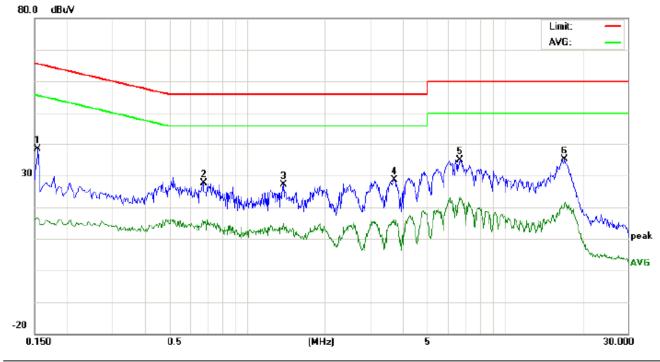

Site: Conduction Phase: L1 Temperature: 23.4
Limit: FCC Class B Conduction(QP) Power: Humidity: 56.0 %

EUT:Fingerprint Encryption Key

M/N:QKXX


Mode: BT Link + charging

Note:

No.	No. Freq.				Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP.	AVG	QP	AVG	QP	AVG		
1	0.1539	28.12		6.57	10.16	38.28		16.73	65.78	55.78	-27.50	-39.05	Р	
2	0.6780	17.39		4.75	10.34	27.73		15.09	56.00	46.00	-28.27	-30.91	Р	
3	1.3820	16.68		4.41	10.38	27.06		14.79	56.00	46.00	-28.94	-31.21	Р	
4	3.7380	18.16		5.50	10.47	28.63		15.97	56.00	46.00	-27.37	-30.03	Р	
5	6.6780	24.57		13.04	10.32	34.89		23.36	60.00	50.00	-25.11	-26.64	Р	
6	17.1060	24.89		10.44	10.13	35.02		20.57	60.00	50.00	-24.98	-29.43	Р	

Page 47 of 57

Line Conducted Emission Test Line 2-N

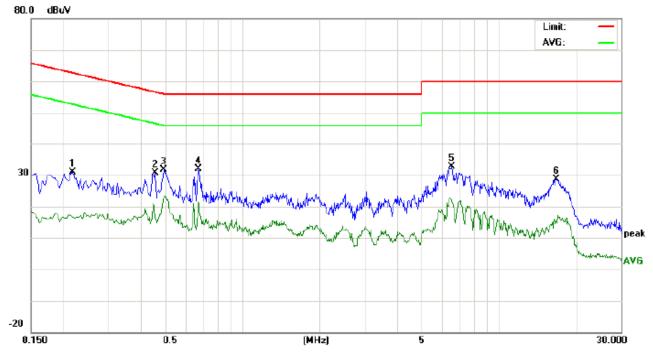

Site: Conduction Phase: N Temperature: 23.4
Limit: FCC Class B Conduction(QP) Power: Humidity: 56.0 %

EUT:Fingerprint Encryption Key

M/N:QKXX

Mode: BT Link + charging

Note:

No.	Freq.	req. (dBu		eading_Level (dBuV)		Correct Measurement Factor (dBuV)		Limit (dBuV)		Margin (dB)		P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2180	20.74		6.41	10.23	30.97		16.64	62.89	52.89	-31.92	-36.25	Р	
2	0.4580	20.21		5.93	10.37	30.58		16.30	56.73	46.73	-26.15	-30.43	Р	
3	0.4940	21.19		12.13	10.40	31.59		22.53	56.10	46.10	-24.51	-23.57	Р	
4	0.6740	21.48		11.28	10.34	31.82		21.62	56.00	46.00	-24.18	-24.38	Р	
5	6.5300	22.36		11.86	10.30	32.66		22.16	60.00	50.00	-27.34	-27.84	Р	
6	16.7820	18.47		4.92	10.13	28.60		15.05	60.00	50.00	-31.40	-34.95	Р	


Page 48 of 57

APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC LINE CONDUCTED EMISSION TEST SETUP






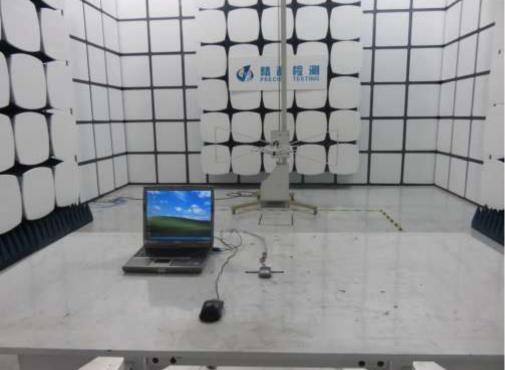

Report No.: AGC05406151101FE08 Page 49 of 57

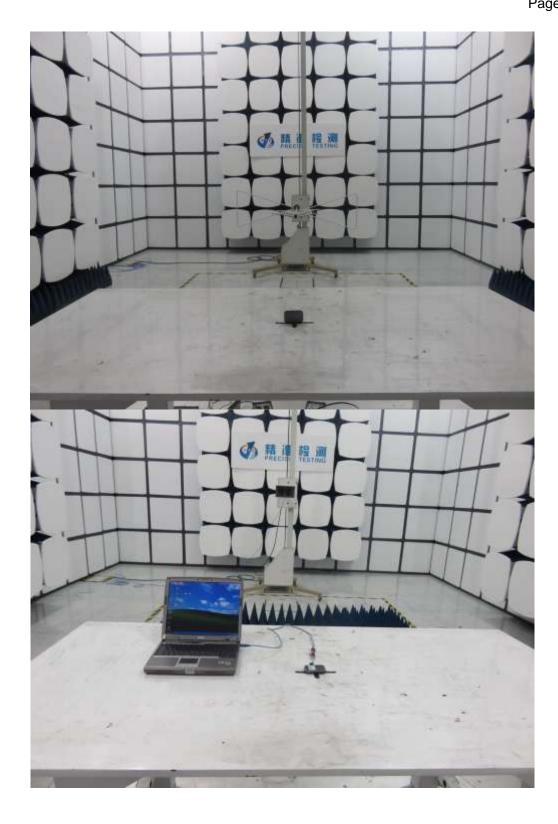

Page 50 of 57

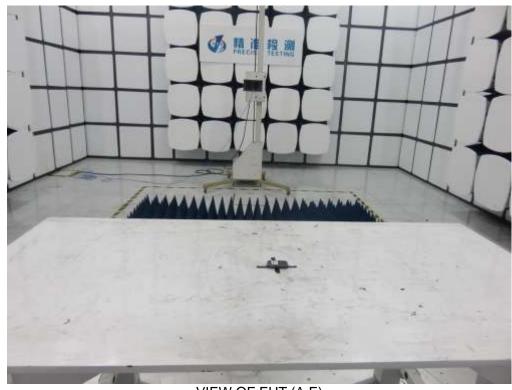



Note: The Adapter above was provided by AGC Lab.

Page 51 of 57

APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



Report No.: AGC05406151101FE08 Page 52 of 57

BOTTOM VIEW OF EUT





Report No.: AGC05406151101FE08 Page 53 of 57







Report No.: AGC05406151101FE08 Page 54 of 57






Page 55 of 57






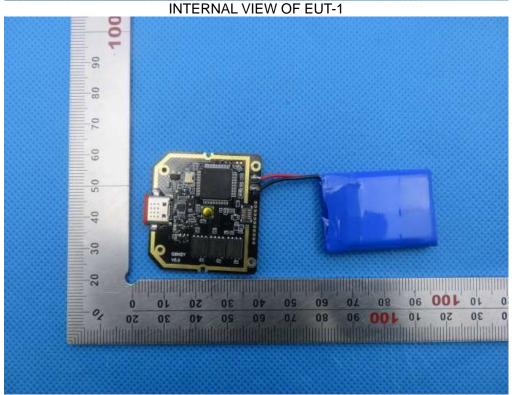


Report No.: AGC05406151101FE08 Page 56 of 57



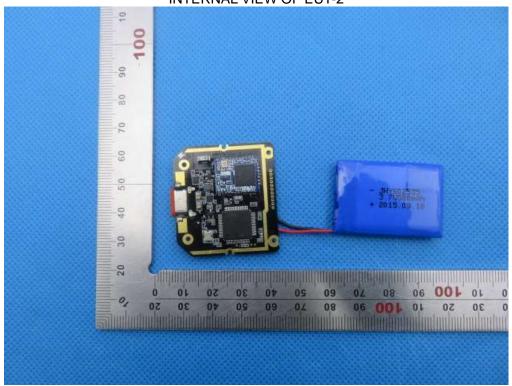





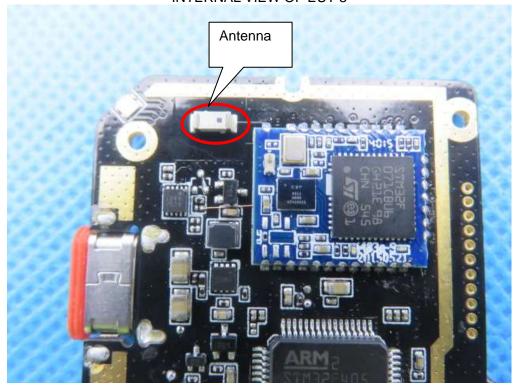

Report No.: AGC05406151101FE08 Page 57 of 57



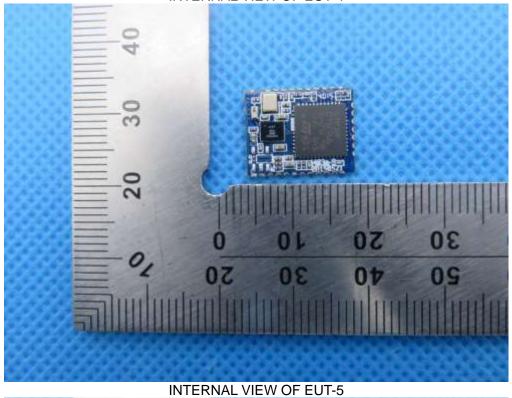

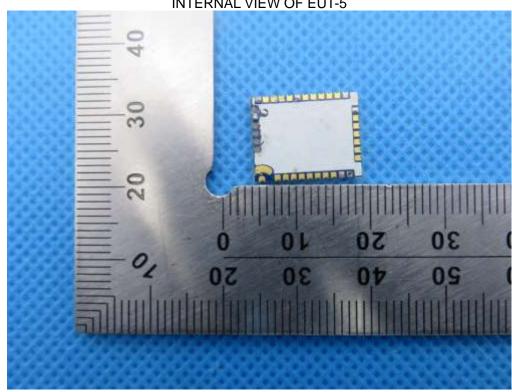

----END OF REPORT----