

TEST REPORT

Reference No...... : WTX22X05090003W003
FCC ID : 2AHAF-MDT760V30
Applicant : TOPICON HK LIMITED
Address : Room 2314-2316, Tower C, Huangdu Plaza, Yitian Road, Futian District,
Shenzhen, China
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : GPS
Model No...... : MDT760
Standards : FCC Part 15.247
Date of Receipt sample : 2022-05-09
Date of Test..... : 2022-05-09 to 2022-06-15
Date of Issue : 2022-06-15
Test Report Form No. : WTX_Part 15_247W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Jason Su

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	10
3. ANTENNA REQUIREMENT	11
3.1 STANDARD APPLICABLE.....	11
3.2 EVALUATION INFORMATION	11
4. POWER SPECTRAL DENSITY	12
4.1 STANDARD APPLICABLE.....	12
4.2 TEST SETUP BLOCK DIAGRAM	12
4.3 TEST PROCEDURE.....	12
4.4 SUMMARY OF TEST RESULTS/PLOTS	12
5. DTS BANDWIDTH.....	13
5.1 STANDARD APPLICABLE.....	13
5.2 TEST SETUP BLOCK DIAGRAM	13
5.3 TEST PROCEDURE.....	13
5.4 SUMMARY OF TEST RESULTS/PLOTS	13
6. RF OUTPUT POWER	14
6.1 STANDARD APPLICABLE.....	14
6.2 TEST SETUP BLOCK DIAGRAM	14
6.3 TEST PROCEDURE.....	14
6.4 SUMMARY OF TEST RESULTS/PLOTS	14
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	15
7.1 STANDARD APPLICABLE.....	15
7.2 TEST PROCEDURE.....	15
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
7.4 SUMMARY OF TEST RESULTS/PLOTS	17
8. OUT OF BAND EMISSIONS.....	32
8.1 STANDARD APPLICABLE.....	32
8.2 TEST PROCEDURE.....	32
8.3 SUMMARY OF TEST RESULTS/PLOTS	33
9. CONDUCTED EMISSIONS	50
9.1 TEST PROCEDURE.....	50
9.2 BASIC TEST SETUP BLOCK DIAGRAM.....	50
9.3 TEST RECEIVER SETUP	50
9.4 SUMMARY OF TEST RESULTS/PLOTS	50
APPENDIX SUMMARY	55
APPENDIX A.....	56
APPENDIX B.....	61
APPENDIX C.....	66
APPENDIX D.....	71
APPENDIX PHOTOGRAPHS.....	79

Report version

Version No.	Date of issue	Description
Rev.00	2022-06-15	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	GPS
Trade Name:	/
Model No.:	MDT760
Adding Model(s):	MDT761, MDT740, MDT741, MDT770, MDT780, OBC740, OBC760, M710A, M710AG, M710AB, M710AKB, M720A, M720B, M720AG, M720AB, M720AKB, MDT714D, MDT715D, X7(V2), TABX7V2, X8C, TABX8C, MDT860, MDT861, MDT840, MDT841, MDT870, MDT871, MDT880, MDT881, OBC860, 100822, 100783
Rated Voltage:	MDT760:DC3.7V MDT860:DC3.7V
Battery:	/
Adapter Model:	/
Software Version:	MDT760: mdt760_gms_1.8.6 MDT860: mdt860_gms_1.9.2
Hardware Version:	MDT760: MDT760_V30 MDT860: MDT760_V30
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model MDT760, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	14.68dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	3dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the FCC rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	With Ferrite
DC Cable	1.45	Unshielded	Without Ferrite
Camera Cable	0.8	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi310-14ISK	/
Battery	JADE	DC12V	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24

SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
☐ Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has an integral antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

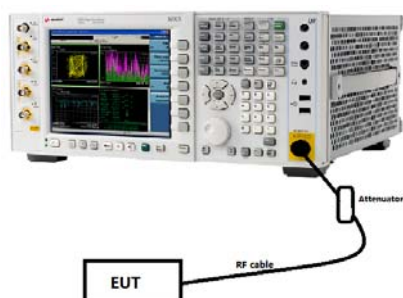

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

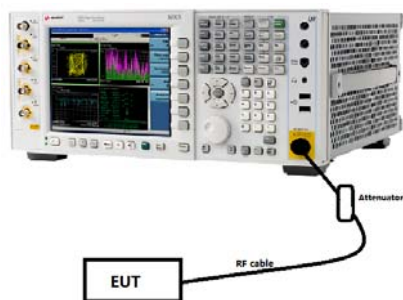

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

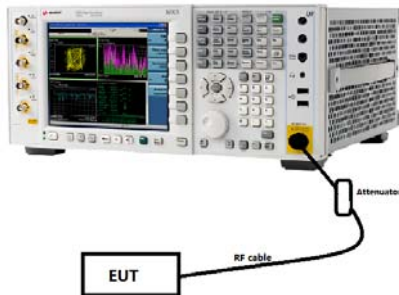

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth.

- Set span to at least 1.5 times the OBW.
- Set RBW = 1-5% of the OBW, not to exceed 1MHz.
- Set VBW $\geq 3 \times$ RBW.
- Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

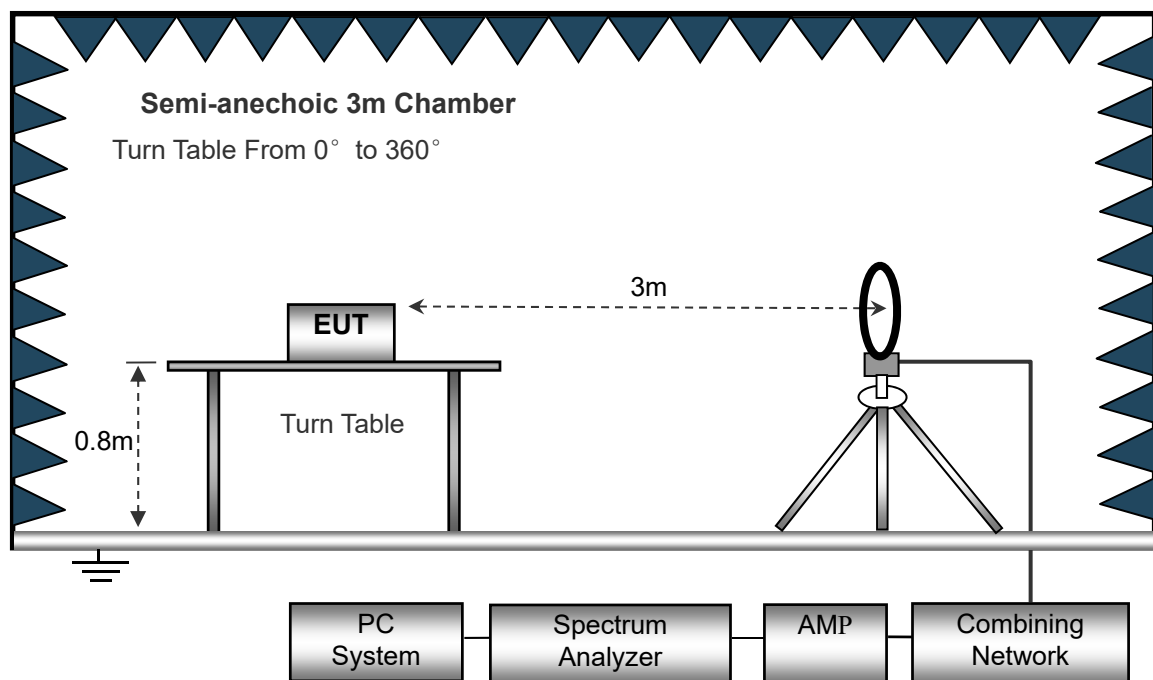

The test setup for emission measurement from 30MHz to 1GHz.

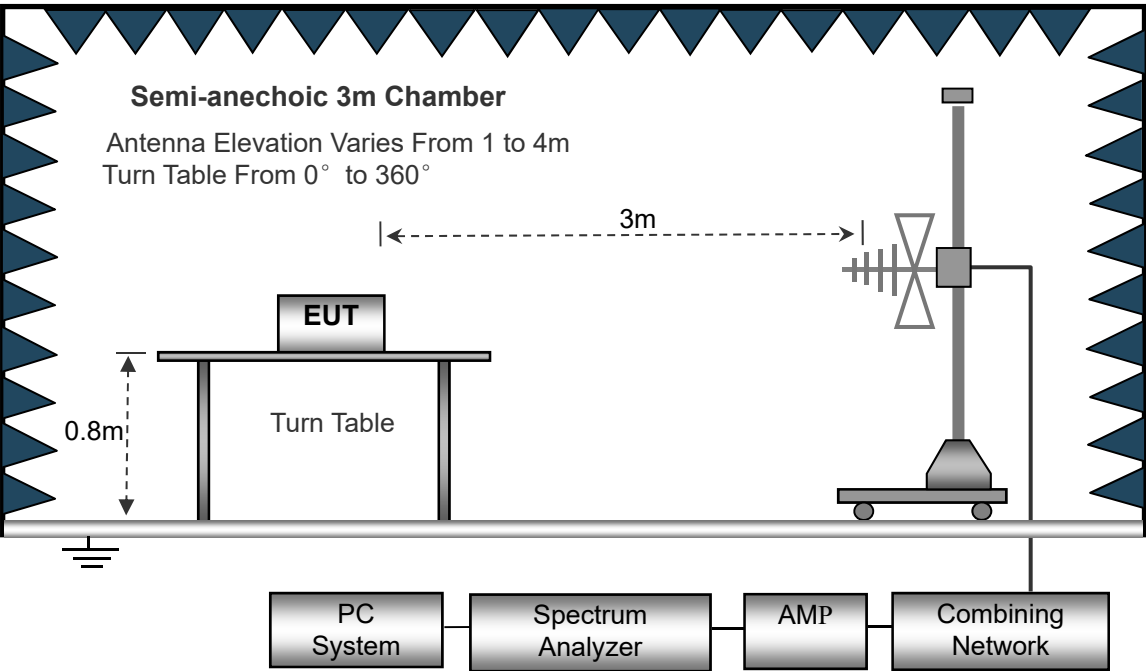

The test setup for emission measurement above 1GHz.

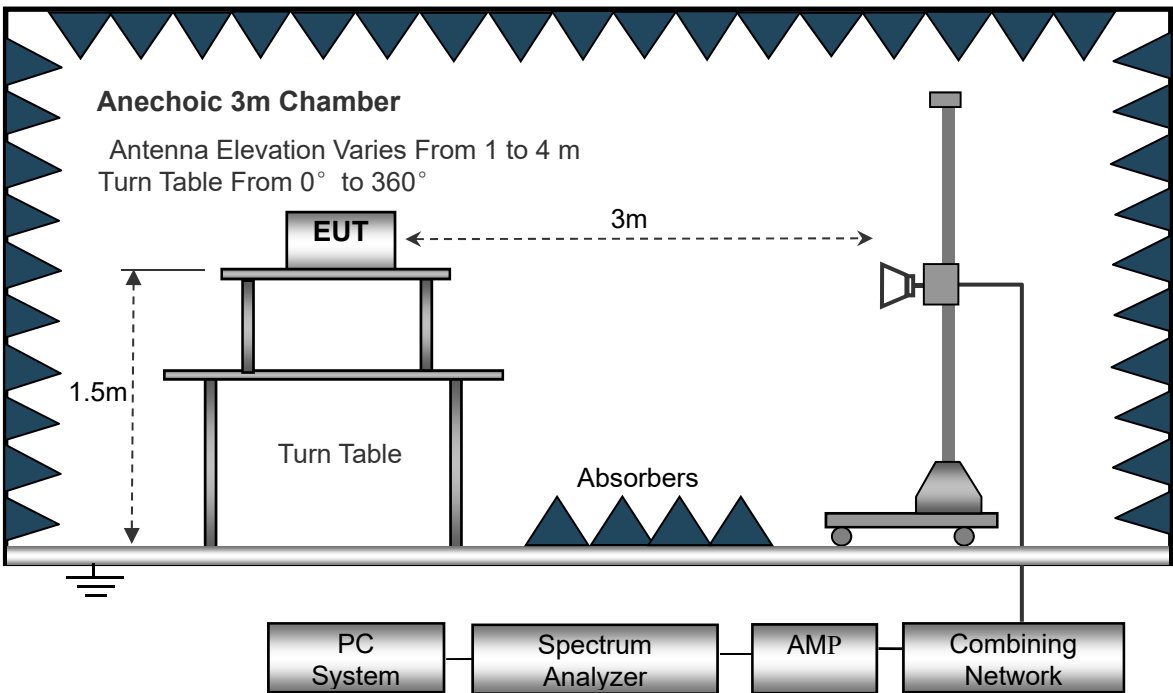

Frequency :9kHz-30MHz RBW=10KHz, VBW =30KHz Sweep time= Auto Trace = max hold Detector function = peak	Frequency :30MHz-1GHz RBW=120KHz, VBW=300KHz Sweep time= Auto Trace = max hold Detector function = peak, QP	Frequency :Above 1GHz RBW=1MHz, VBW=3MHz(Peak), 10Hz(AV) Sweep time= Auto Trace = max hold Detector function = peak, AV
---	--	--

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


7.4 Summary of Test Results/Plots

*Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported.
All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps) is recorded in this report.*

➤ Spurious Emissions Below 1GHz


MDT760

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

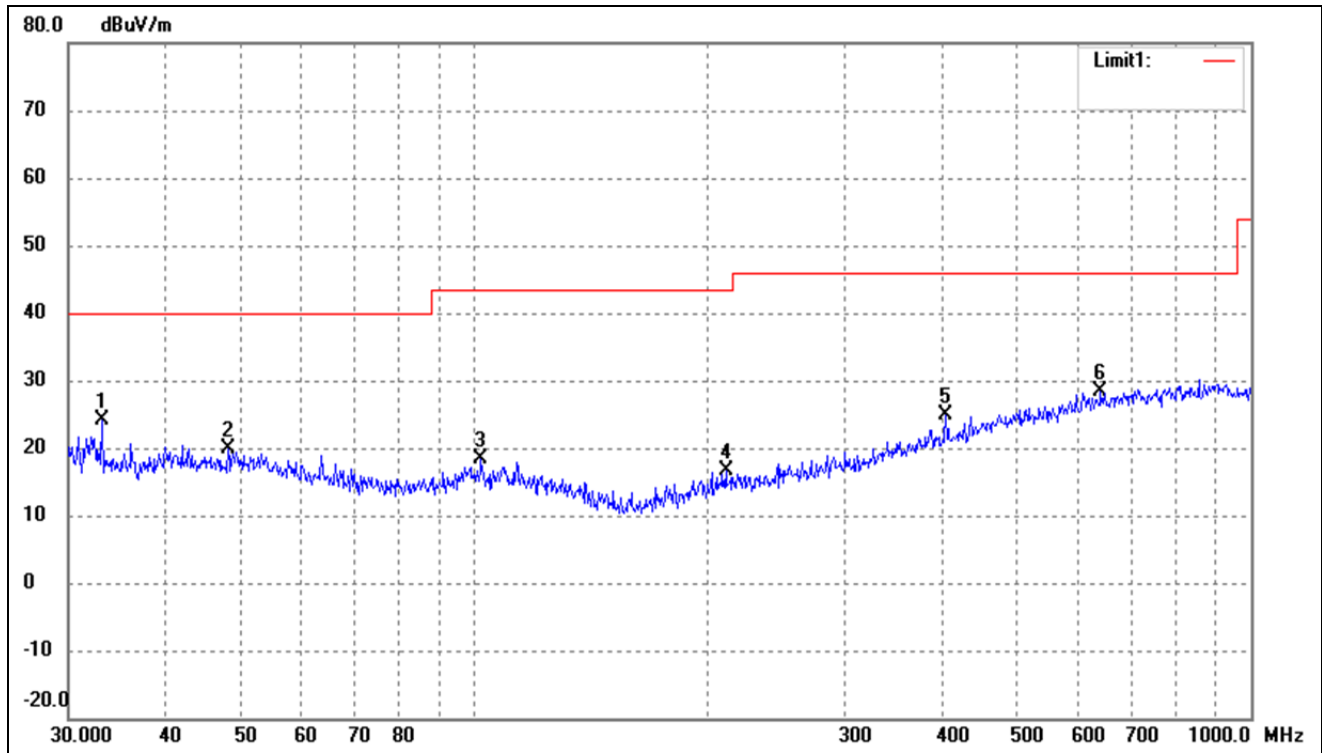


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.0950	32.84	-8.69	24.15	40.00	-15.85	-	-	peak
2	48.1626	26.78	-6.97	19.81	40.00	-20.19	-	-	peak
3	102.0014	27.26	-8.76	18.50	43.50	-25.00	-	-	peak
4	210.7860	25.98	-9.41	16.57	43.50	-26.93	-	-	peak
5	404.6665	28.54	-3.76	24.78	46.00	-21.22	-	-	peak
6	640.6110	27.62	0.82	28.44	46.00	-17.56	-	-	peak

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

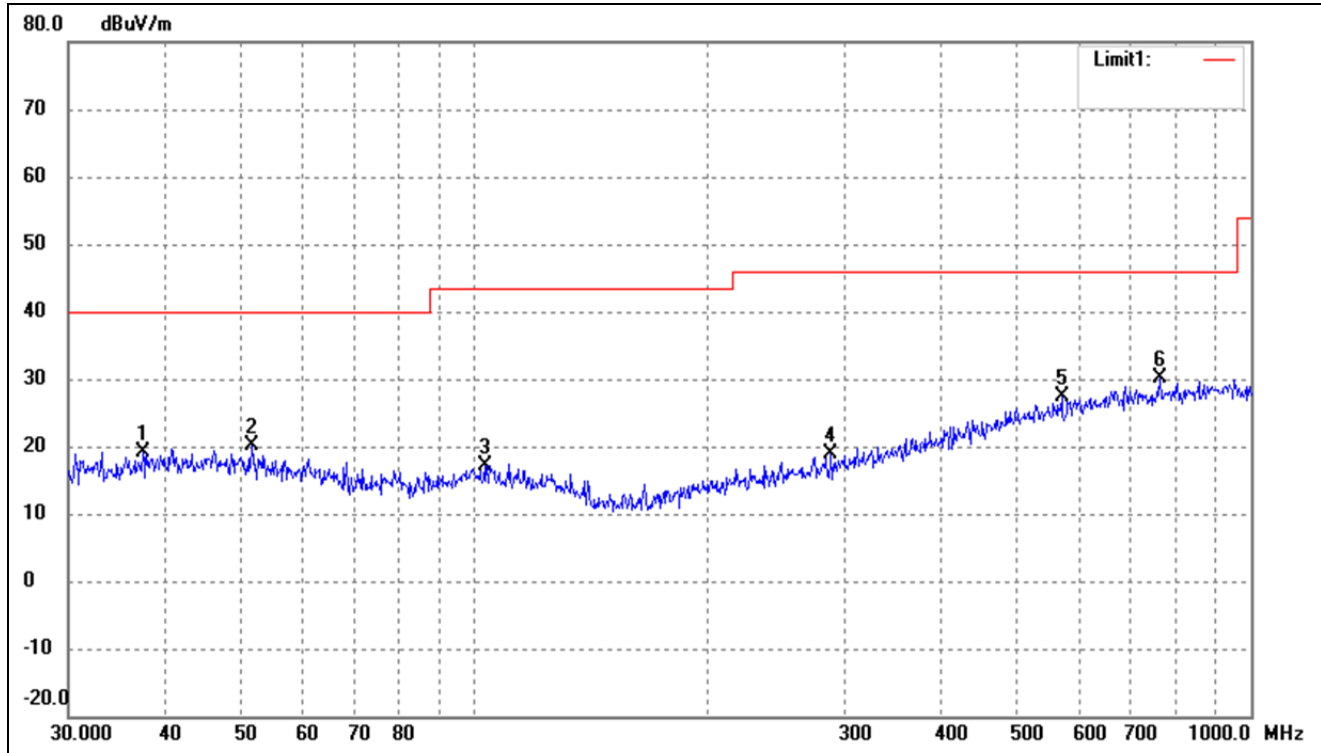


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.4165	26.78	-7.63	19.15	40.00	-20.85	-	-	peak
2	51.6616	27.22	-7.20	20.02	40.00	-19.98	-	-	peak
3	103.0800	25.83	-8.77	17.06	43.50	-26.44	-	-	peak
4	287.9904	26.13	-7.28	18.85	46.00	-27.15	-	-	peak
5	570.6100	27.60	-0.12	27.48	46.00	-18.52	-	-	peak
6	763.3757	28.27	1.85	30.12	46.00	-15.88	-	-	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

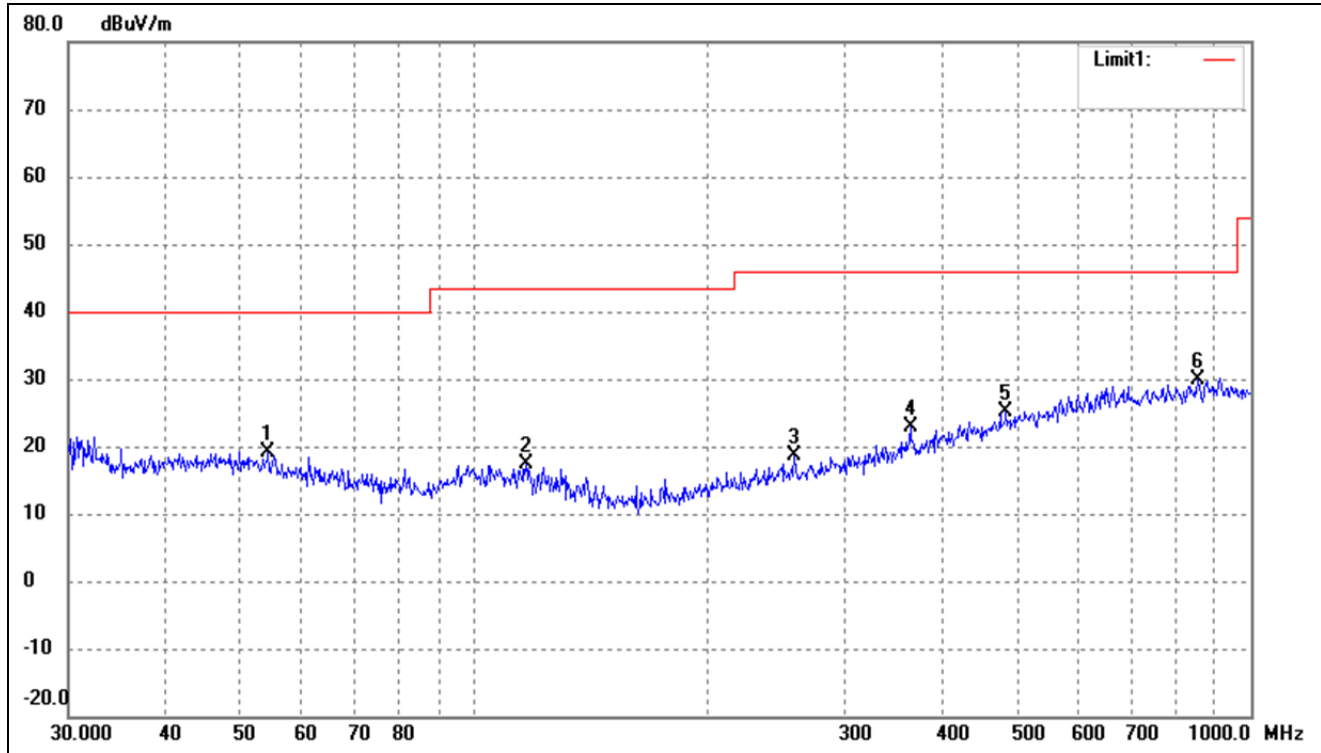


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	54.2610	26.81	-7.59	19.22	40.00	-20.78	-	-	peak
2	116.5401	26.67	-9.34	17.33	43.50	-26.17	-	-	peak
3	258.3264	26.81	-8.09	18.72	46.00	-27.28	-	-	peak
4	364.2595	27.74	-4.96	22.78	46.00	-23.22	-	-	peak
5	483.9094	26.89	-1.71	25.18	46.00	-20.82	-	-	peak
6	854.0247	27.51	2.41	29.92	46.00	-16.08	-	-	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

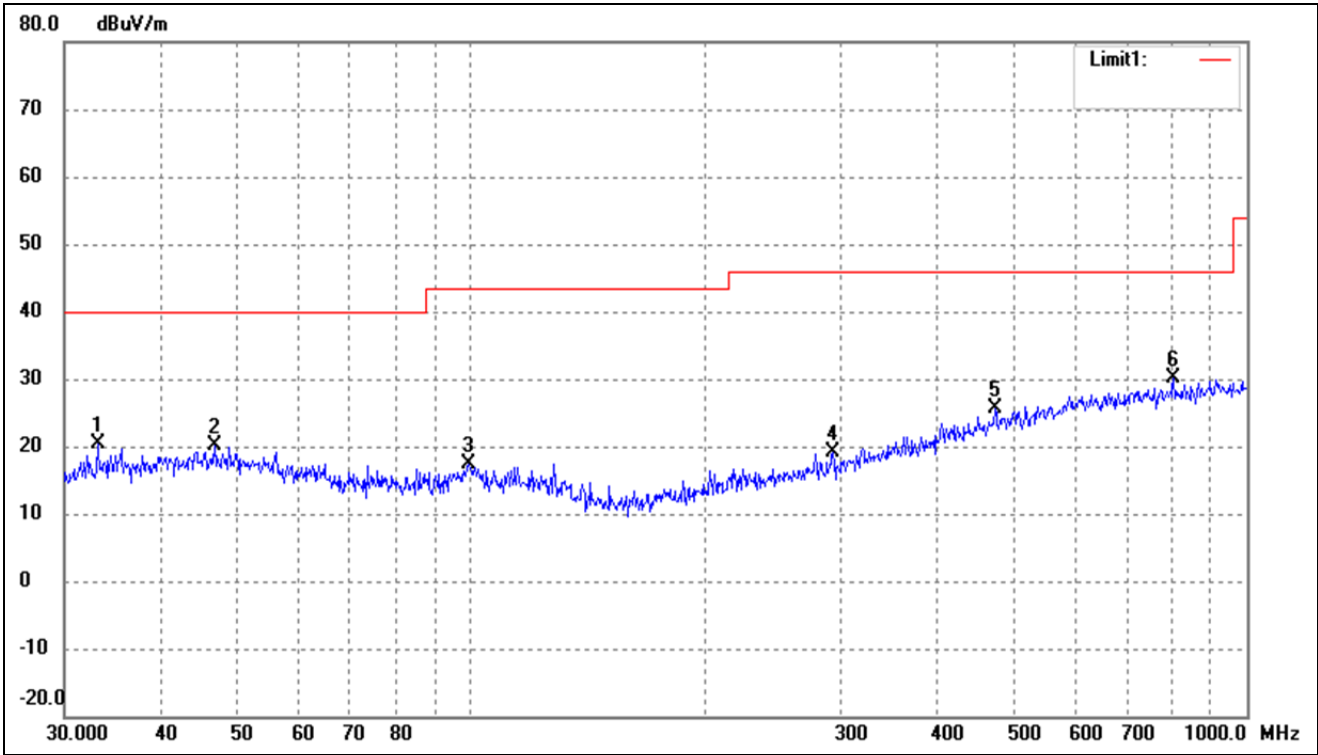


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.0950	29.16	-8.69	20.47	40.00	-19.53	-	-	peak
2	46.8303	27.06	-6.96	20.10	40.00	-19.90	-	-	peak
3	99.5281	26.20	-8.81	17.39	43.50	-26.11	-	-	peak
4	293.0842	26.16	-7.14	19.02	46.00	-26.98	-	-	peak
5	473.8347	27.63	-1.96	25.67	46.00	-20.33	-	-	peak
6	804.6028	28.11	2.12	30.23	46.00	-15.77	-	-	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

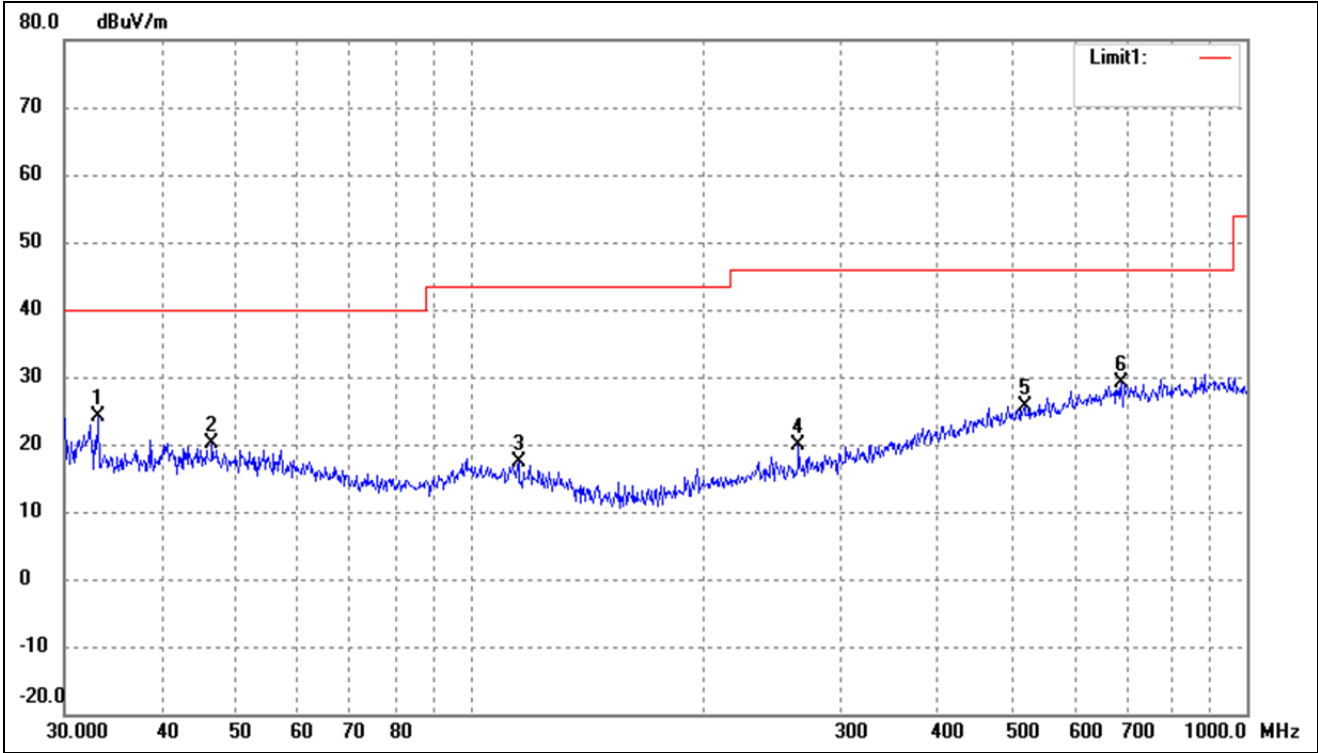

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	32.81	-8.67	24.14	40.00	-15.86	-	-	peak
2	46.5030	27.06	-6.98	20.08	40.00	-19.92	-	-	peak
3	115.3205	26.60	-9.26	17.34	43.50	-26.16	-	-	peak
4	264.7457	27.73	-7.91	19.82	46.00	-26.18	-	-	peak
5	517.2480	26.62	-1.02	25.60	46.00	-20.40	-	-	peak
6	689.5644	27.83	1.33	29.16	46.00	-16.84	-	-	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

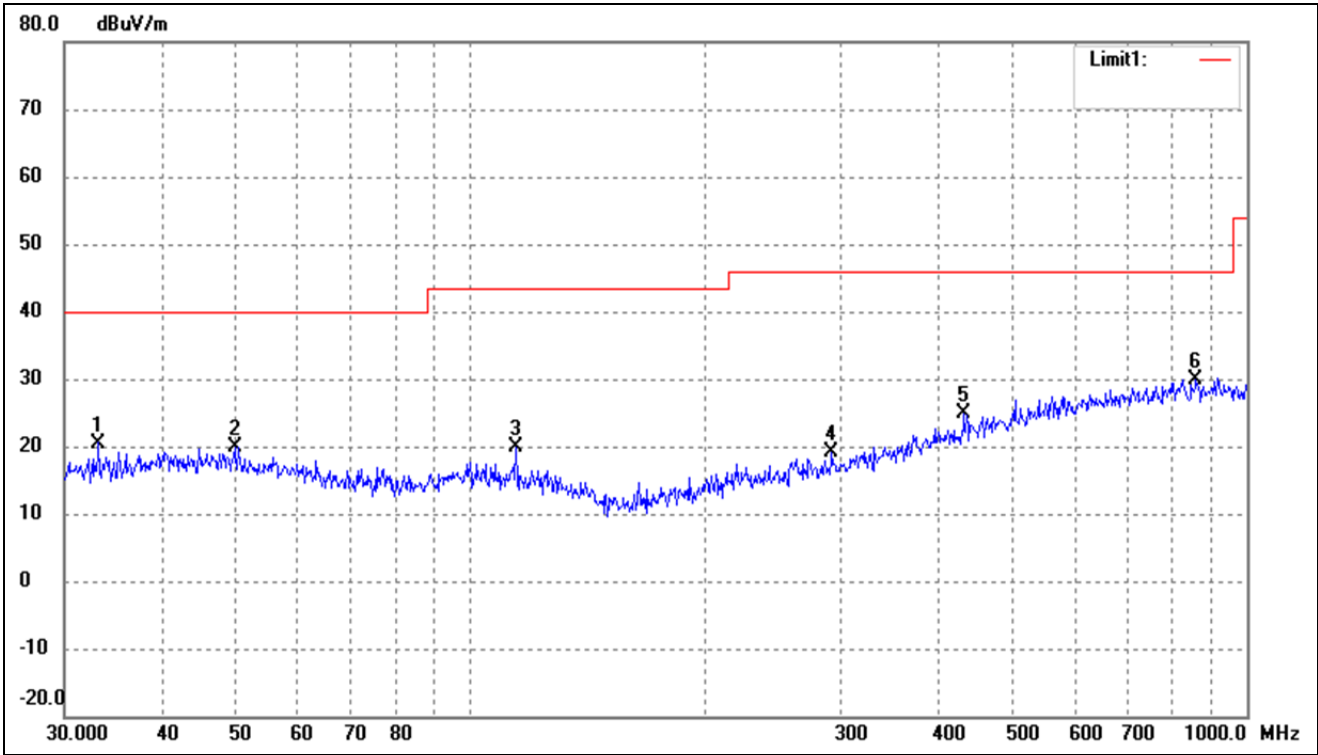


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	29.17	-8.67	20.50	40.00	-19.50	-	-	peak
2	49.7068	26.84	-6.96	19.88	40.00	-20.12	-	-	peak
3	114.5146	28.97	-9.20	19.77	43.50	-23.73	-	-	peak
4	292.0583	26.31	-7.17	19.14	46.00	-26.86	-	-	peak
5	432.5457	27.90	-3.02	24.88	46.00	-21.12	-	-	peak
6	860.0352	27.37	2.45	29.82	46.00	-16.18	-	-	peak

MDT860


802.11b_11Mbps

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

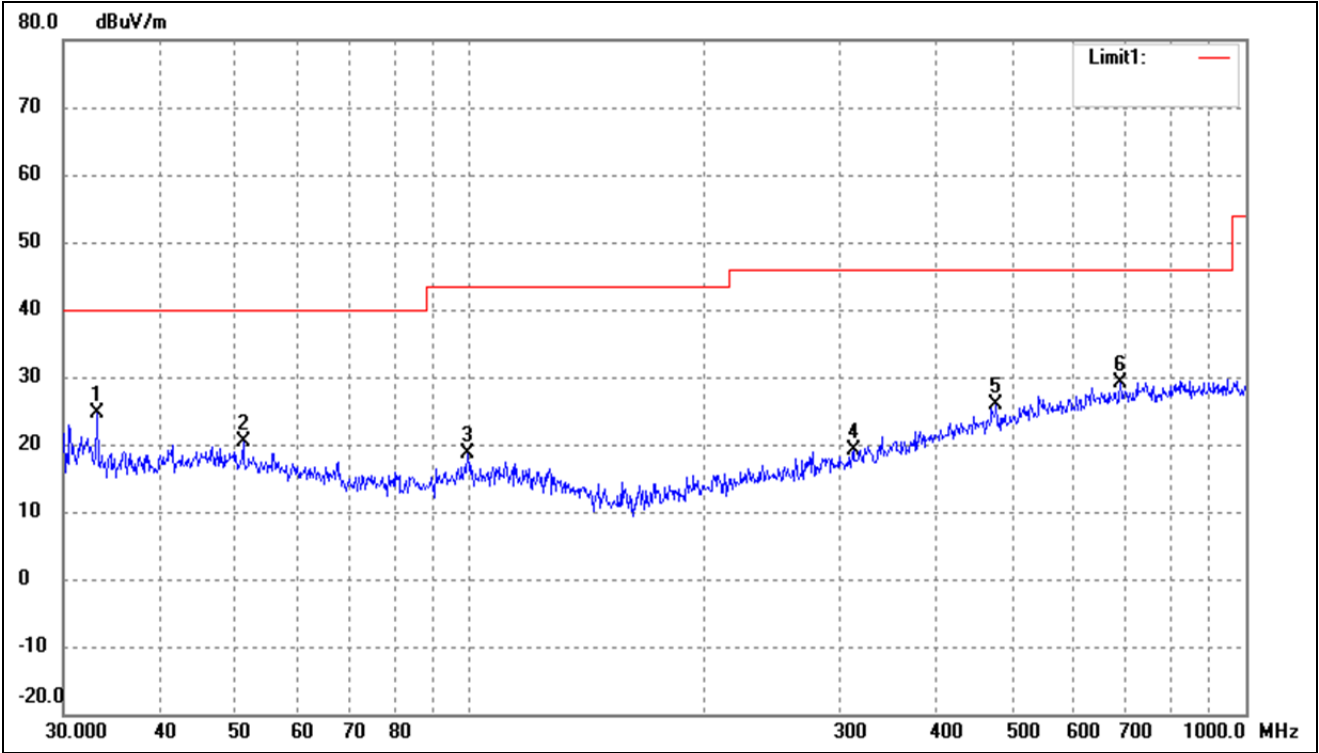


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	33.28	-8.67	24.61	40.00	-15.39	-	-	peak
2	51.1209	27.61	-7.12	20.49	40.00	-19.51	-	-	peak
3	99.5281	27.50	-8.81	18.69	43.50	-24.81	-	-	peak
4	312.1794	25.82	-6.59	19.23	46.00	-26.77	-	-	peak
5	477.1694	27.67	-1.88	25.79	46.00	-20.21	-	-	peak
6	689.5644	27.70	1.33	29.03	46.00	-16.97	-	-	peak

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

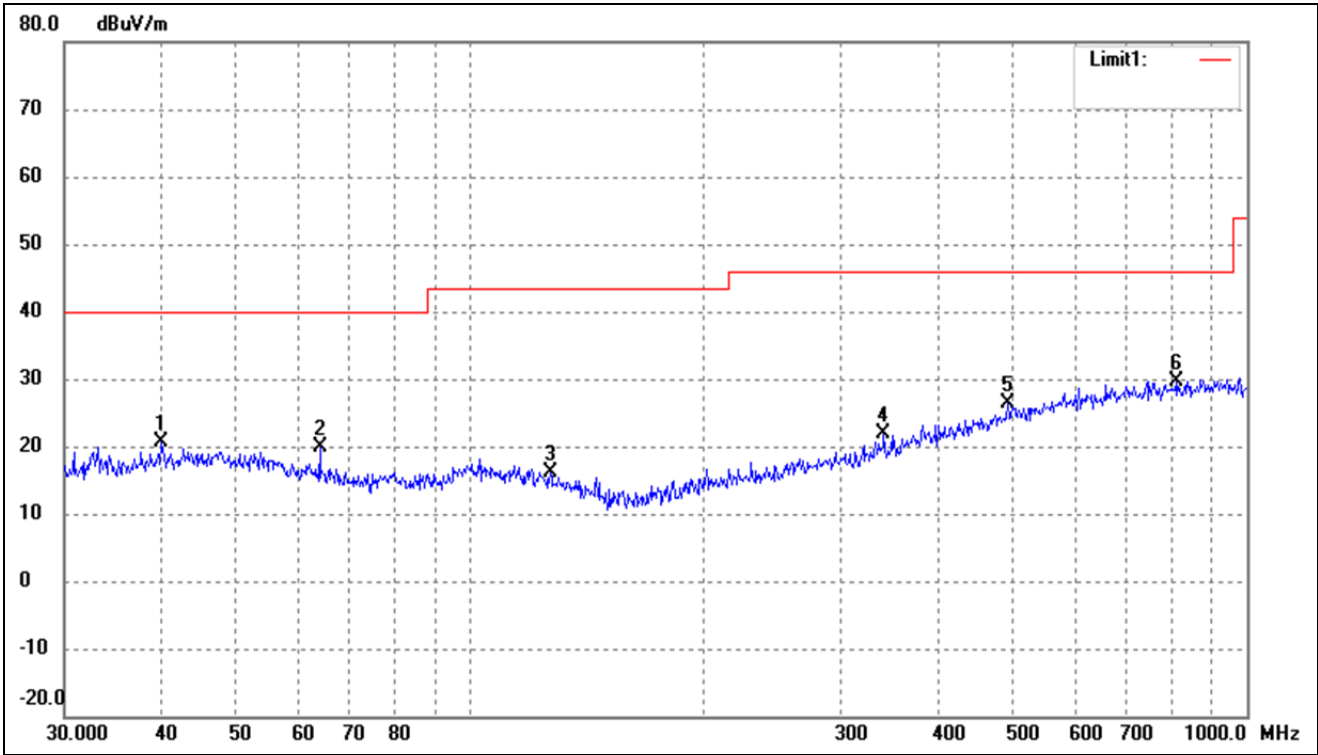


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.9942	27.74	-7.00	20.74	40.00	-19.26	-	-	peak
2	63.9828	28.93	-9.12	19.81	40.00	-20.19	-	-	peak
3	126.7723	27.00	-10.85	16.15	43.50	-27.35	-	-	peak
4	340.7817	27.48	-5.69	21.79	46.00	-24.21	-	-	peak
5	492.4685	27.75	-1.49	26.26	46.00	-19.74	-	-	peak
6	810.2654	27.43	2.16	29.59	46.00	-16.41	-	-	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

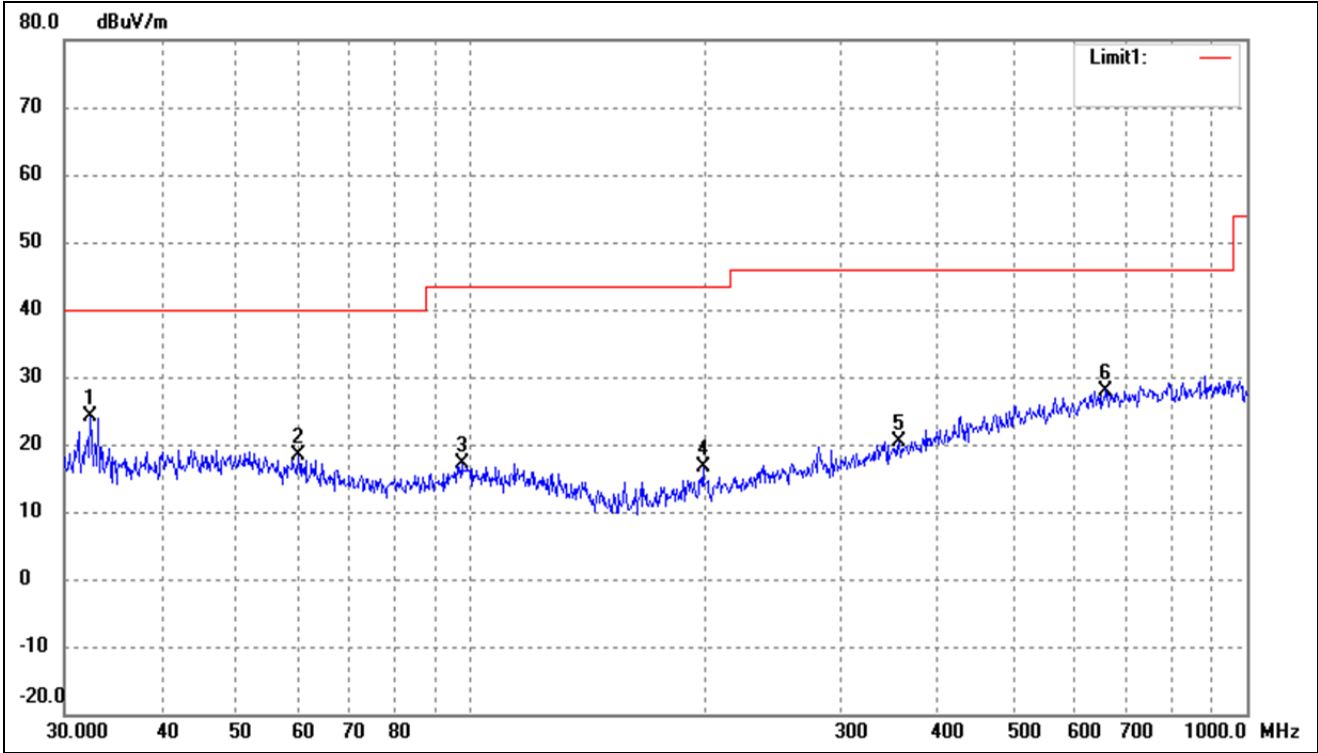


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.4059	32.86	-8.85	24.01	40.00	-15.99	-	-	peak
2	60.0691	26.89	-8.44	18.45	40.00	-21.55	-	-	peak
3	97.4560	26.31	-9.20	17.11	43.50	-26.39	-	-	peak
4	199.2855	26.39	-9.72	16.67	43.50	-26.83	-	-	peak
5	356.6758	25.67	-5.20	20.47	46.00	-25.53	-	-	peak
6	658.8362	26.99	1.01	28.00	46.00	-18.00	-	-	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

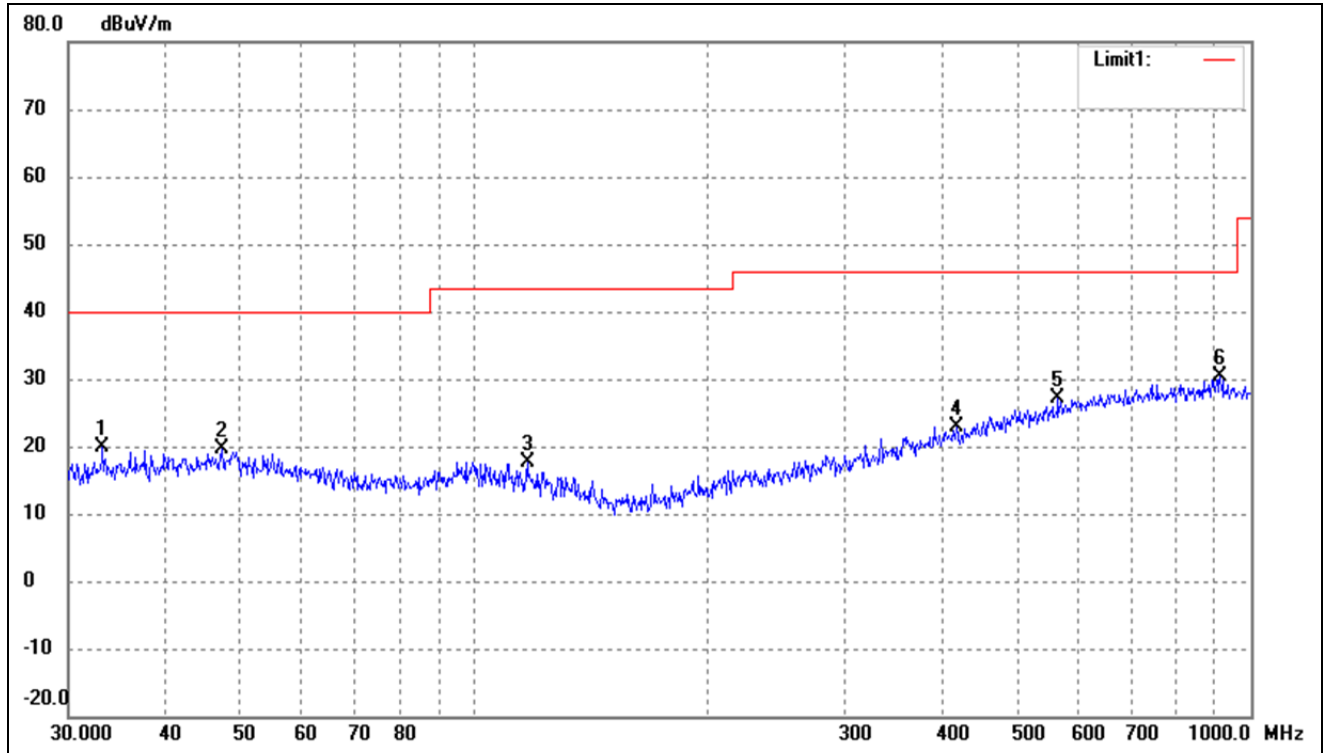


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	28.44	-8.67	19.77	40.00	-20.23	-	-	peak
2	47.3255	26.57	-6.97	19.60	40.00	-20.40	-	-	peak
3	116.9495	26.99	-9.38	17.61	43.50	-25.89	-	-	peak
4	417.6411	26.29	-3.42	22.87	46.00	-23.13	-	-	peak
5	564.6389	27.34	-0.22	27.12	46.00	-18.88	-	-	peak
6	912.8620	27.68	2.70	30.38	46.00	-15.62	-	-	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

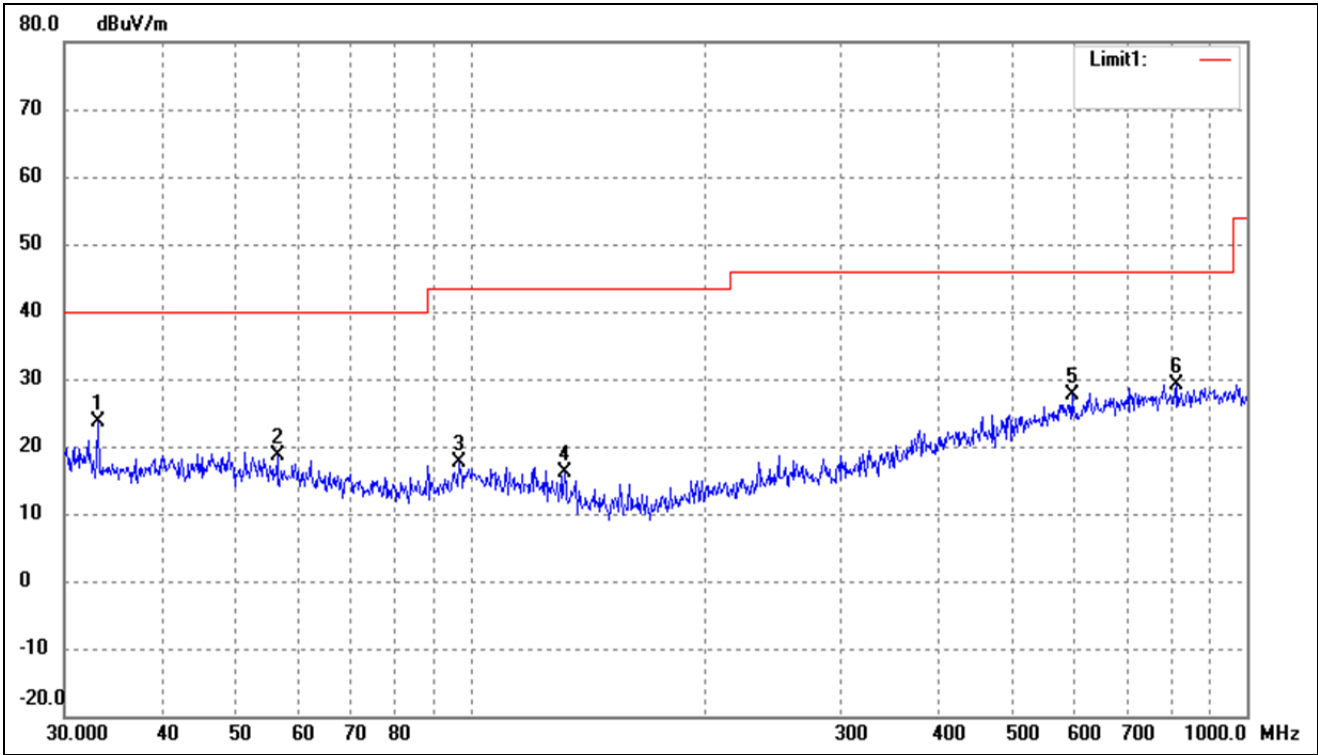

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.0950	32.39	-8.69	23.70	40.00	-16.30	-	-	peak
2	56.3948	26.55	-7.90	18.65	40.00	-21.35	-	-	peak
3	96.7749	26.98	-9.33	17.65	43.50	-25.85	-	-	peak
4	132.2206	27.84	-11.62	16.22	43.50	-27.28	-	-	peak
5	595.1329	27.22	0.29	27.51	46.00	-18.49	-	-	peak
6	813.1116	26.92	2.17	29.09	46.00	-16.91	-	-	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

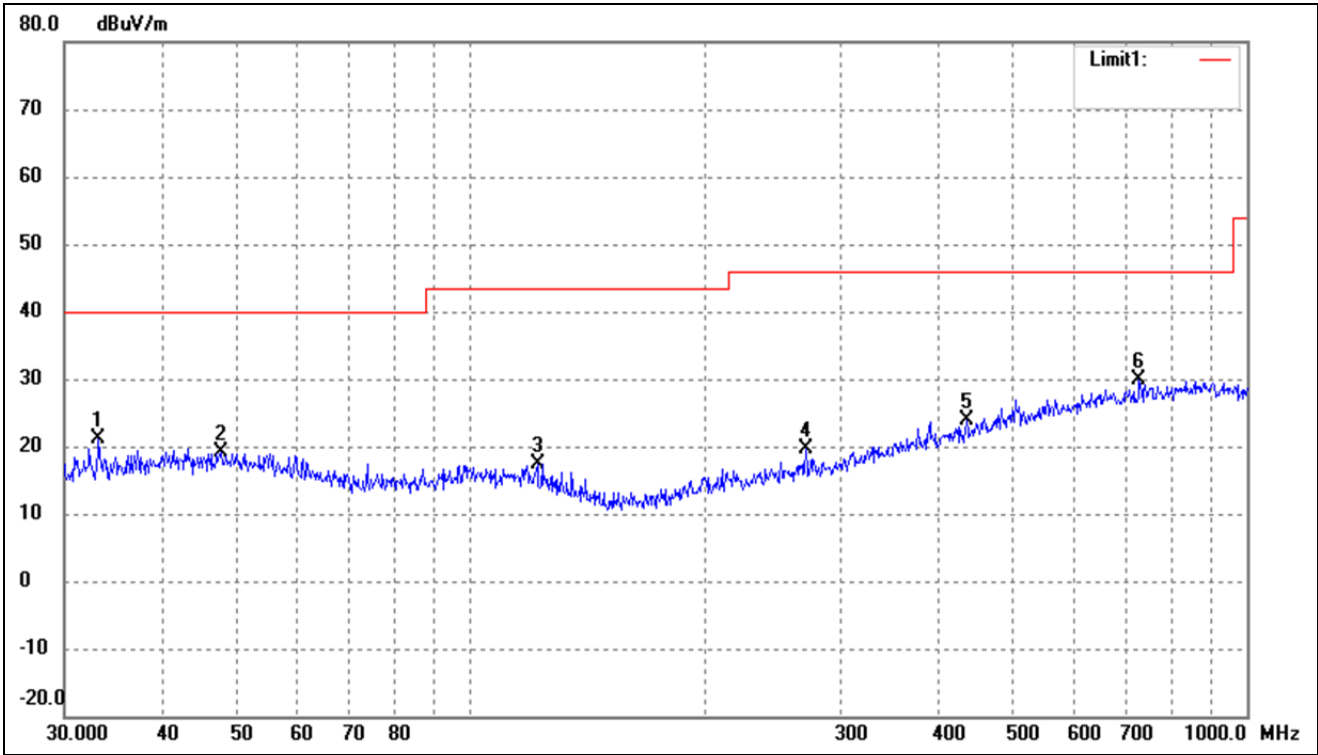

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	29.81	-8.67	21.14	40.00	-18.86	-	-	peak
2	47.8260	26.11	-6.96	19.15	40.00	-20.85	-	-	peak
3	121.9755	27.27	-9.96	17.31	43.50	-26.19	-	-	peak
4	270.3748	27.27	-7.76	19.51	46.00	-26.49	-	-	peak
5	435.5898	26.72	-2.95	23.77	46.00	-22.23	-	-	peak
6	726.8052	28.23	1.61	29.84	46.00	-16.16	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- MDT760
- Test Mode: 802.11b_11Mbps (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	60.32	-6.07	54.25	74	-19.75	H	PK
4824.000	42.93	-6.07	36.86	54	-17.14	H	AV
7236.000	53.83	-1.63	52.2	74	-21.8	H	PK
7236.000	38.11	-1.63	36.48	54	-17.52	H	AV
4824.000	59.01	-6.07	52.94	74	-21.06	V	PK
4824.000	41.23	-6.07	35.16	54	-18.84	V	AV
7236.000	53.2	-1.63	51.57	74	-22.43	V	PK
7236.000	39.77	-1.63	38.14	54	-15.86	V	AV
Middle Channel-2437MHz							
4874.000	59.14	-5.94	53.2	74	-20.8	H	PK
4874.000	43.91	-5.94	37.97	54	-16.03	H	AV
7311.000	54.02	-1.59	52.43	74	-21.57	H	PK
7311.000	40.76	-1.59	39.17	54	-14.83	H	AV
4874.000	59	-5.94	53.06	74	-20.94	V	PK
4874.000	42.48	-5.94	36.54	54	-17.46	V	AV
7311.000	55.09	-1.59	53.5	74	-20.5	V	PK
7311.000	38.47	-1.59	36.88	54	-17.12	V	AV
High Channel-2462MHz							
4924.000	60.14	-5.81	54.33	74	-19.67	H	PK
4924.000	43.31	-1.55	41.76	54	-12.24	H	AV
7386.000	55.12	-5.81	49.31	74	-24.69	H	PK
7386.000	38.97	-1.55	37.42	54	-16.58	H	AV
4924.000	59.38	-5.81	53.57	74	-20.43	V	PK
4924.000	42.92	-1.55	41.37	54	-12.63	V	AV
7386.000	54.63	-5.81	48.82	74	-25.18	V	PK
7386.000	40.19	-1.55	38.64	54	-15.36	V	AV

➤ MDT860

➤ Test Mode: 802.11b_11Mbps (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	60.96	-6.07	54.89	74	-19.11	H	PK
4824.000	43.76	-6.07	37.69	54	-16.31	H	AV
7236.000	55.16	-1.63	53.53	74	-20.47	H	PK
7236.000	40.17	-1.63	38.54	54	-15.46	H	AV
4824.000	59.71	-6.07	53.64	74	-20.36	V	PK
4824.000	42.31	-6.07	36.24	54	-17.76	V	AV
7236.000	53.99	-1.63	52.36	74	-21.64	V	PK
7236.000	40.22	-1.63	38.59	54	-15.41	V	AV
Middle Channel-2437MHz							
4874.000	58.13	-5.94	52.19	74	-21.81	H	PK
4874.000	42.27	-5.94	36.33	54	-17.67	H	AV
7311.000	55.57	-1.59	53.98	74	-20.02	H	PK
7311.000	39.28	-1.59	37.69	54	-16.31	H	AV
4874.000	61.27	-5.94	55.33	74	-18.67	V	PK
4874.000	42.14	-5.94	36.2	54	-17.8	V	AV
7311.000	53.44	-1.59	51.85	74	-22.15	V	PK
7311.000	39.22	-1.59	37.63	54	-16.37	V	AV
High Channel-2462MHz							
4924.000	59.19	-5.81	53.38	74	-20.62	H	PK
4924.000	43.09	-1.55	41.54	54	-12.46	H	AV
7386.000	53.8	-5.81	47.99	74	-26.01	H	PK
7386.000	39.13	-1.55	37.58	54	-16.42	H	AV
4924.000	60.93	-5.81	55.12	74	-18.88	V	PK
4924.000	42.68	-1.55	41.13	54	-12.87	V	AV
7386.000	54.64	-5.81	48.83	74	-25.17	V	PK
7386.000	39.67	-1.55	38.12	54	-15.88	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) $VBW \geq [3 \times RBW]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.


8.3 Summary of Test Results/Plots

➤ Radiated test

MDT760


802.11b_11Mbps

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

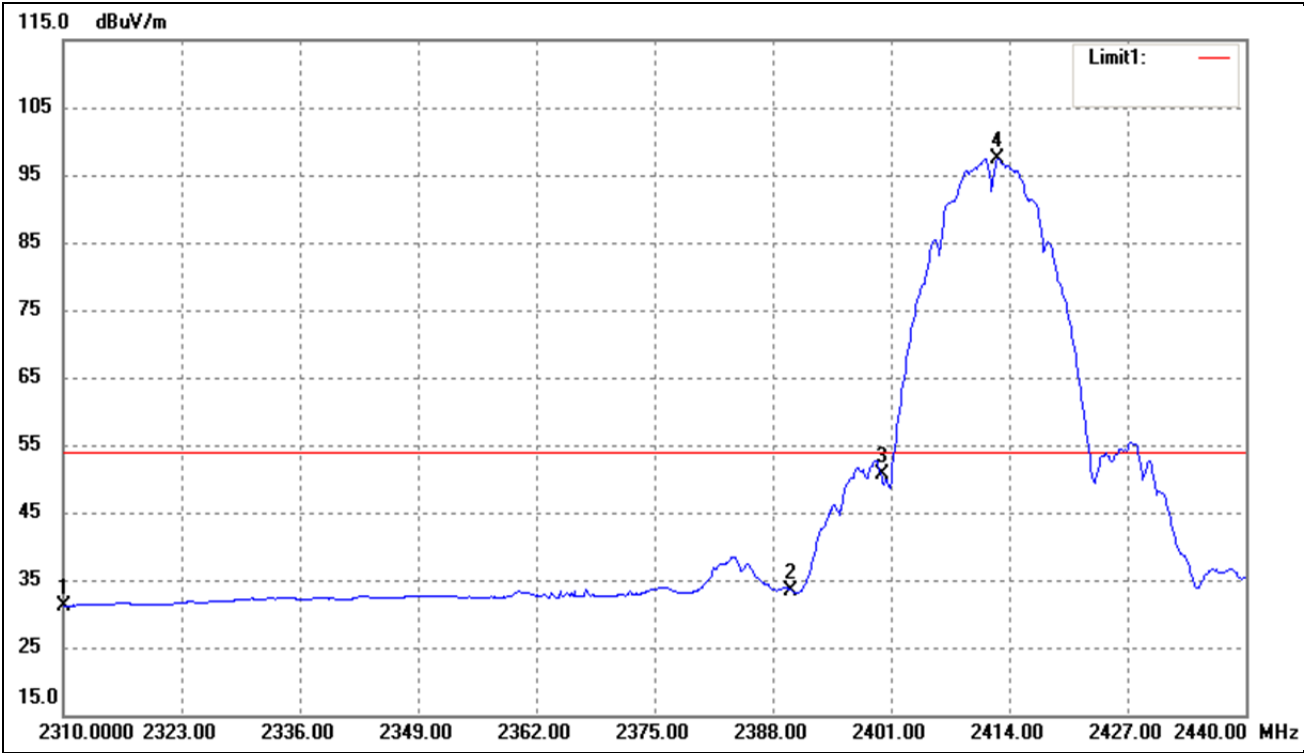


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.84	-9.66	31.18	54.00	-22.82	Average Detector
	2310.000	53.64	-9.66	43.98	74.00	-30.02	Peak Detector
2	2390.000	42.92	-9.50	33.42	54.00	-20.58	Average Detector
	2390.000	57.12	-9.50	47.62	74.00	-26.38	Peak Detector
3	2400.000	60.06	-9.48	50.58	Delta=46.79dBc		Average Detector
4	2412.700	106.83	-9.46	97.37			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

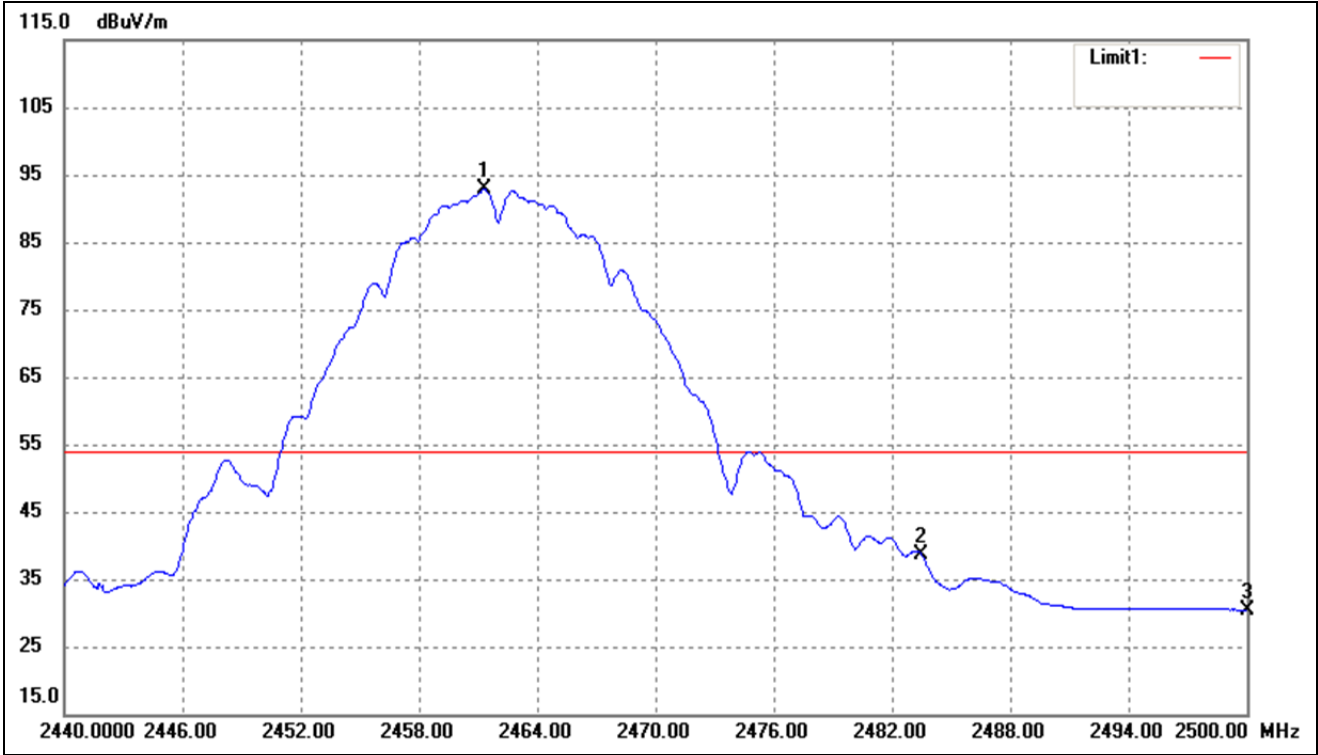


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.300	102.28	-9.36	92.92	/	/	Average Detector
	2463.040	108.54	-9.36	99.18	/	/	Peak Detector
2	2483.500	47.96	-9.31	38.65	54.00	-15.35	Average Detector
	2483.500	56.58	-9.31	47.27	74.00	-26.73	Peak Detector
3	2500.000	39.76	-9.28	30.48	54.00	-23.52	Average Detector
	2500.000	52.11	-9.28	42.83	74.00	-31.17	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

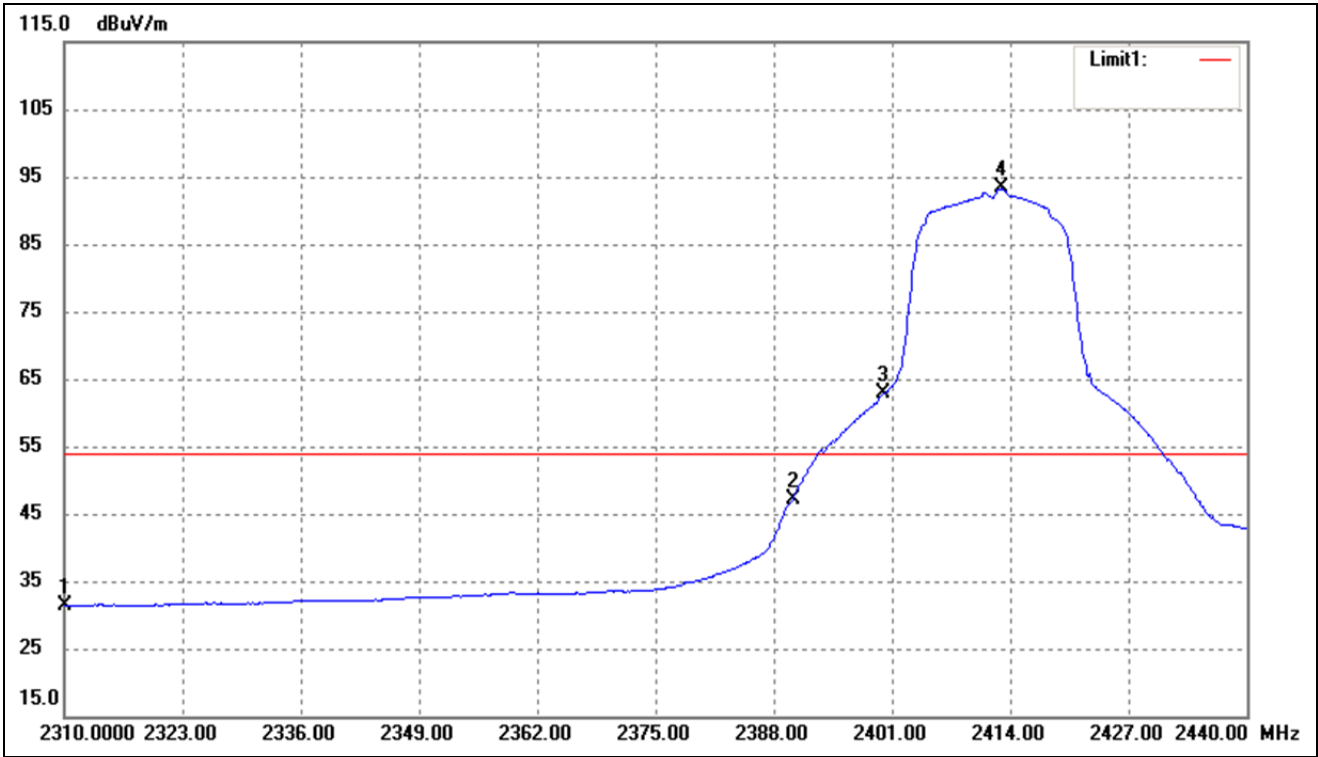


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.01	-9.66	31.35	54.00	-22.65	Average Detector
	2310.000	53.77	-9.66	44.11	74.00	-29.89	Peak Detector
2	2390.000	56.74	-9.50	47.24	54.00	-6.76	Average Detector
	2390.000	75.66	-9.50	66.16	74.00	-7.84	Peak Detector
3	2400.000	72.31	-9.48	62.83	Delta=30.44dBc		Average Detector
4	2413.090	102.73	-9.46	93.27			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

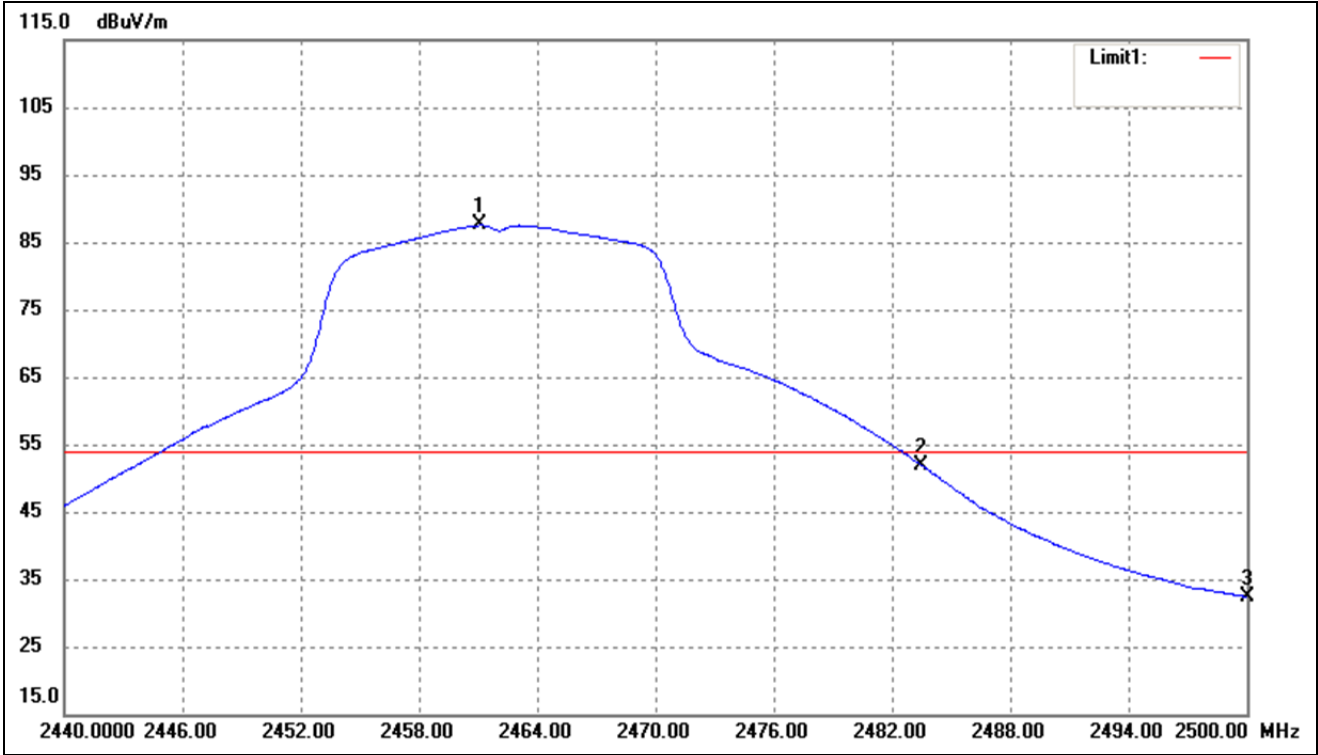


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.060	96.92	-9.36	87.56	/	/	Average Detector
	2463.160	108.24	-9.36	98.88	/	/	Peak Detector
2	2483.500	61.22	-9.31	51.91	54.00	-2.09	Average Detector
	2483.500	75.97	-9.31	66.66	74.00	-7.34	Peak Detector
3	2500.000	41.68	-9.28	32.40	54.00	-21.60	Average Detector
	2500.000	58.65	-9.28	49.37	74.00	-24.63	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

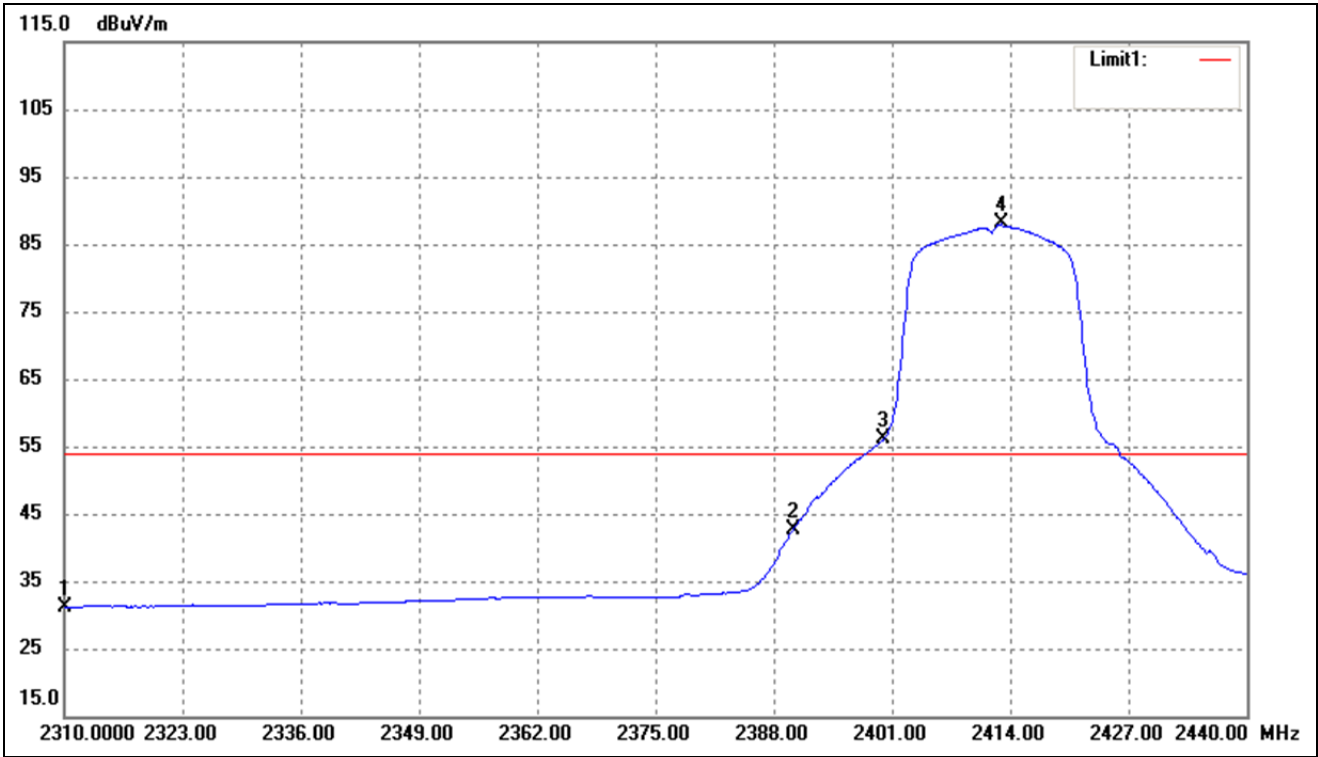


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.82	-9.66	31.16	54.00	-22.84	Average Detector
	2310.000	52.88	-9.66	43.22	74.00	-30.78	Peak Detector
2	2390.000	52.02	-9.50	42.52	54.00	-11.48	Average Detector
	2390.000	73.10	-9.50	63.60	74.00	-10.40	Peak Detector
3	2400.000	65.61	-9.48	56.13	Delta=31.90dBc		Average Detector
4	2413.090	97.49	-9.46	88.03			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

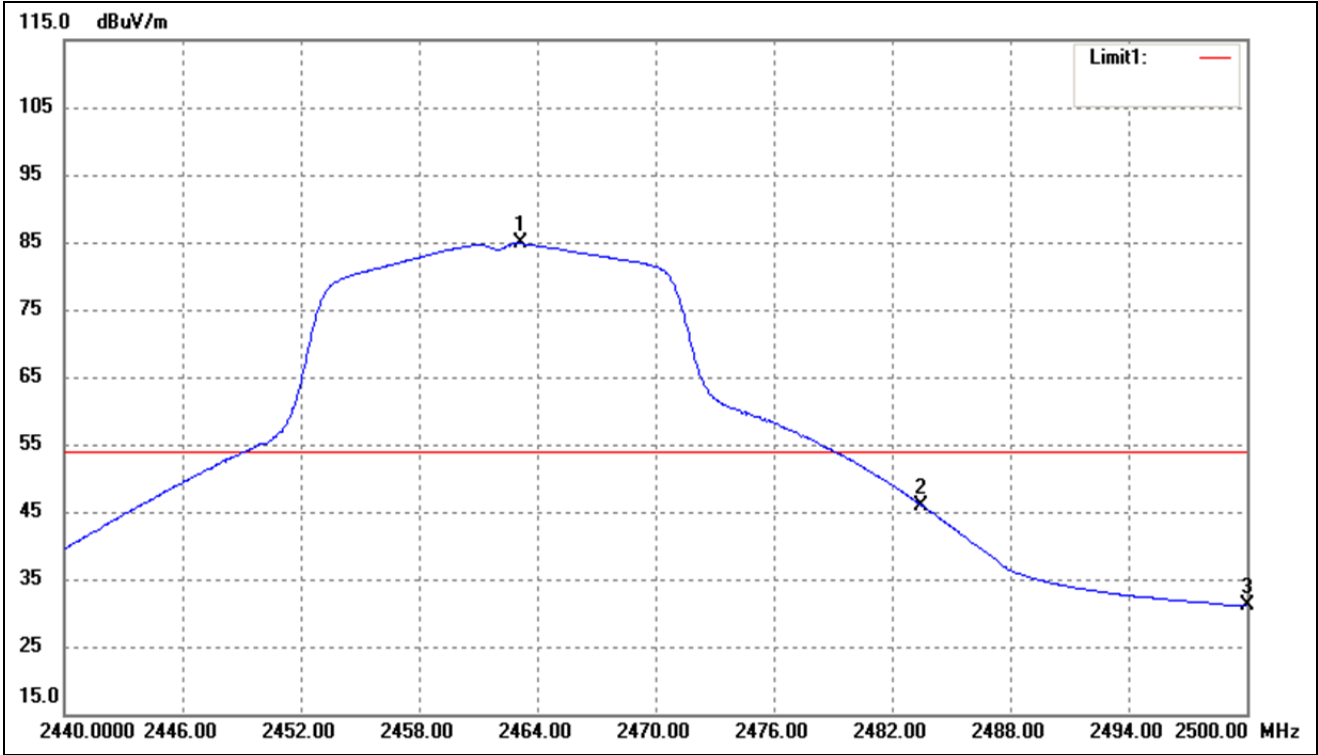


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.160	94.22	-9.36	84.86	/	/	Average Detector
	2463.640	106.09	-9.35	96.74	/	/	Peak Detector
2	2483.500	55.29	-9.31	45.98	54.00	-8.02	Average Detector
	2483.500	69.00	-9.31	59.69	74.00	-14.31	Peak Detector
3	2500.000	40.34	-9.28	31.06	54.00	-22.94	Average Detector
	2500.000	53.75	-9.28	44.47	74.00	-29.53	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

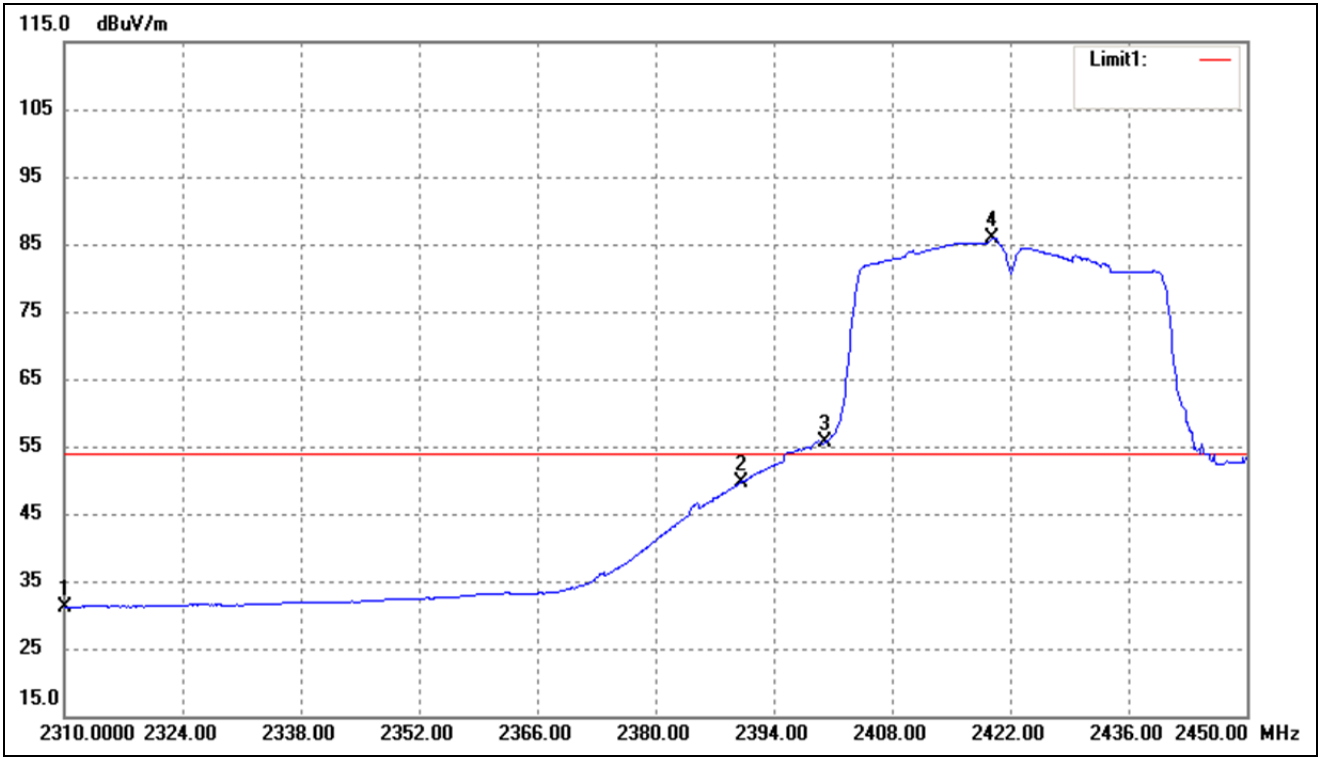

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.84	-9.66	31.18	54.00	-22.82	Average Detector
	2310.000	53.39	-9.66	43.73	74.00	-30.27	Peak Detector
2	2390.000	59.08	-9.50	49.58	54.00	-4.42	Average Detector
	2390.000	74.97	-9.50	65.47	74.00	-8.53	Peak Detector
3	2400.000	64.99	-9.48	55.51	Delta=30.38dBc		Average Detector
4	2419.900	95.33	-9.44	85.89			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

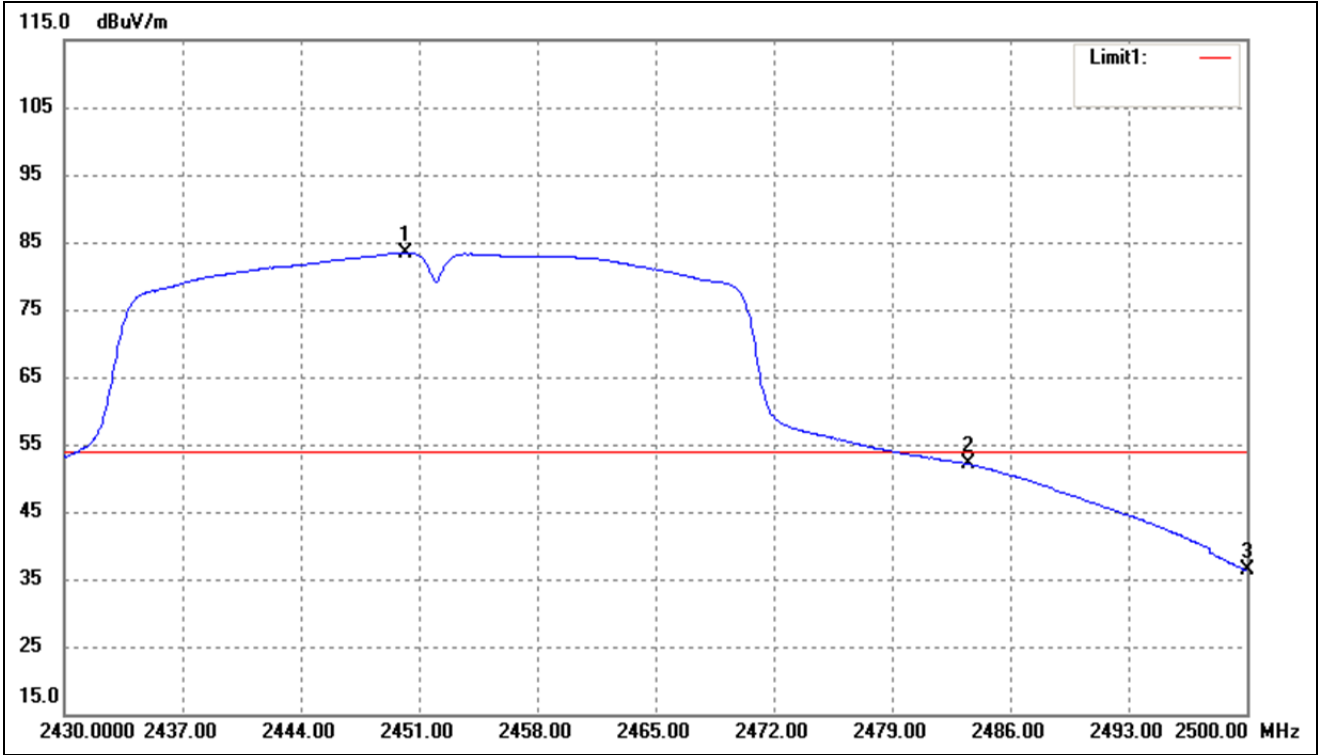


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.160	92.82	-9.38	83.44	/	/	Average Detector
	2449.740	104.17	-9.39	94.78	/	/	Peak Detector
2	2483.500	61.33	-9.31	52.02	54.00	-1.98	Average Detector
	2483.500	75.92	-9.31	66.61	74.00	-7.39	Peak Detector
3	2500.000	45.61	-9.28	36.33	54.00	-17.67	Average Detector
	2500.000	67.32	-9.28	58.04	74.00	-15.96	Peak Detector

MDT860


802.11b_11Mbps

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

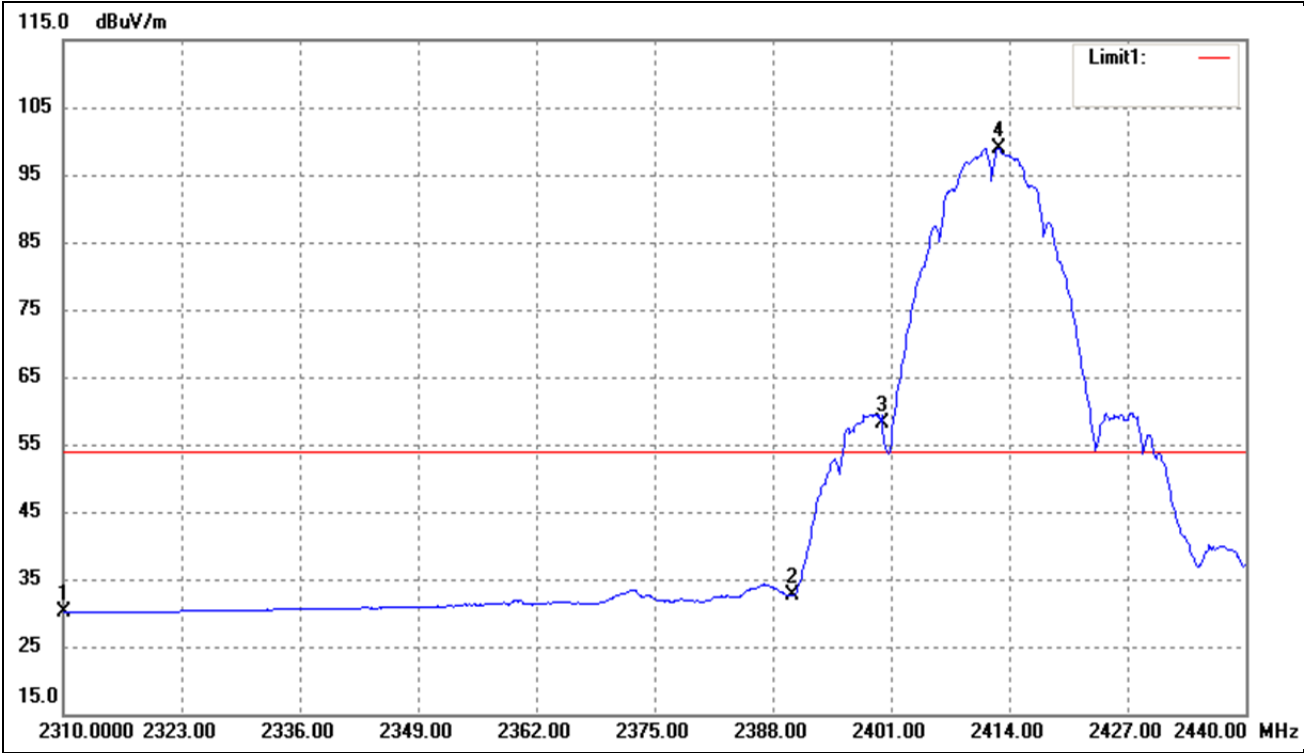


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	39.68	-9.66	30.02	54.00	-23.98	Average Detector
	2310.000	52.29	-9.66	42.63	74.00	-31.37	Peak Detector
2	2390.000	42.12	-9.50	32.62	54.00	-21.38	Average Detector
	2390.000	55.56	-9.50	46.06	74.00	-27.94	Peak Detector
3	2400.000	67.53	-9.48	58.05	Delta=40.92dBc		Average Detector
4	2412.830	108.40	-9.46	98.94			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

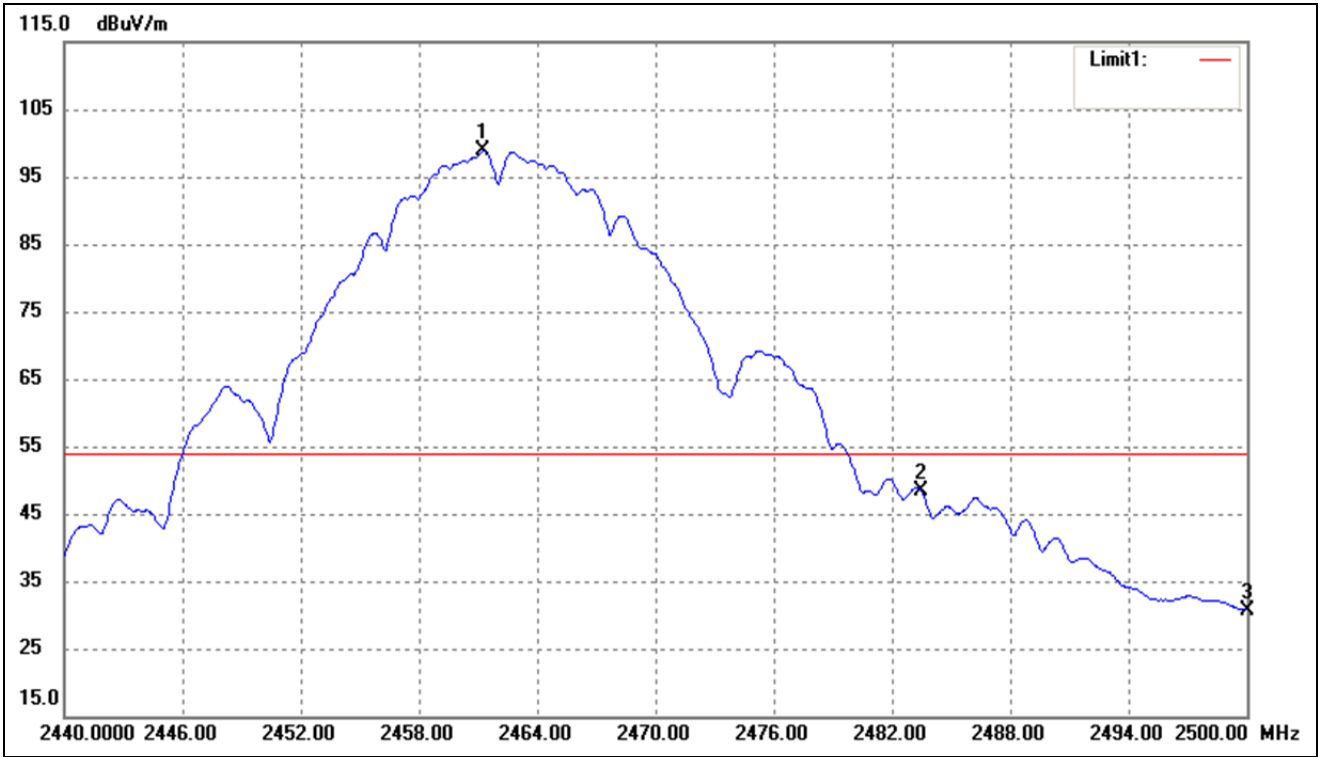


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.240	108.14	-9.36	98.78	/	/	Average Detector
	2463.040	112.46	-9.36	103.10	/	/	Peak Detector
2	2483.500	57.68	-9.31	48.37	54.00	-5.63	Average Detector
	2483.500	63.48	-9.31	54.17	74.00	-19.83	Peak Detector
3	2500.000	40.01	-9.28	30.73	54.00	-23.27	Average Detector
	2500.000	52.83	-9.28	43.55	74.00	-30.45	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

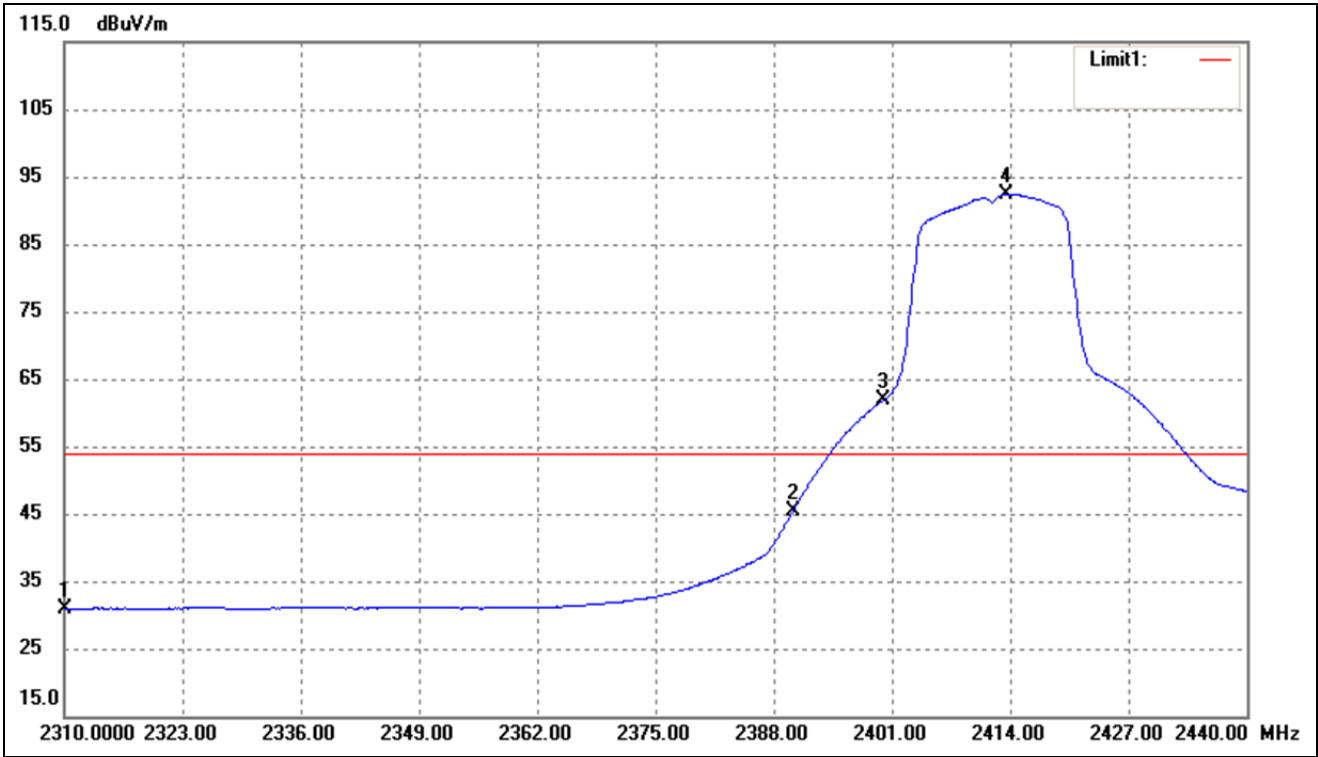


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.57	-9.66	30.91	54.00	-23.09	Average Detector
	2310.000	52.61	-9.66	42.95	74.00	-31.05	Peak Detector
2	2390.000	54.82	-9.50	45.32	54.00	-8.68	Average Detector
	2390.000	76.06	-9.50	66.56	74.00	-7.44	Peak Detector
3	2400.000	71.36	-9.48	61.88	Delta=30.52dBc		Average Detector
4	2413.610	101.85	-9.45	92.40			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

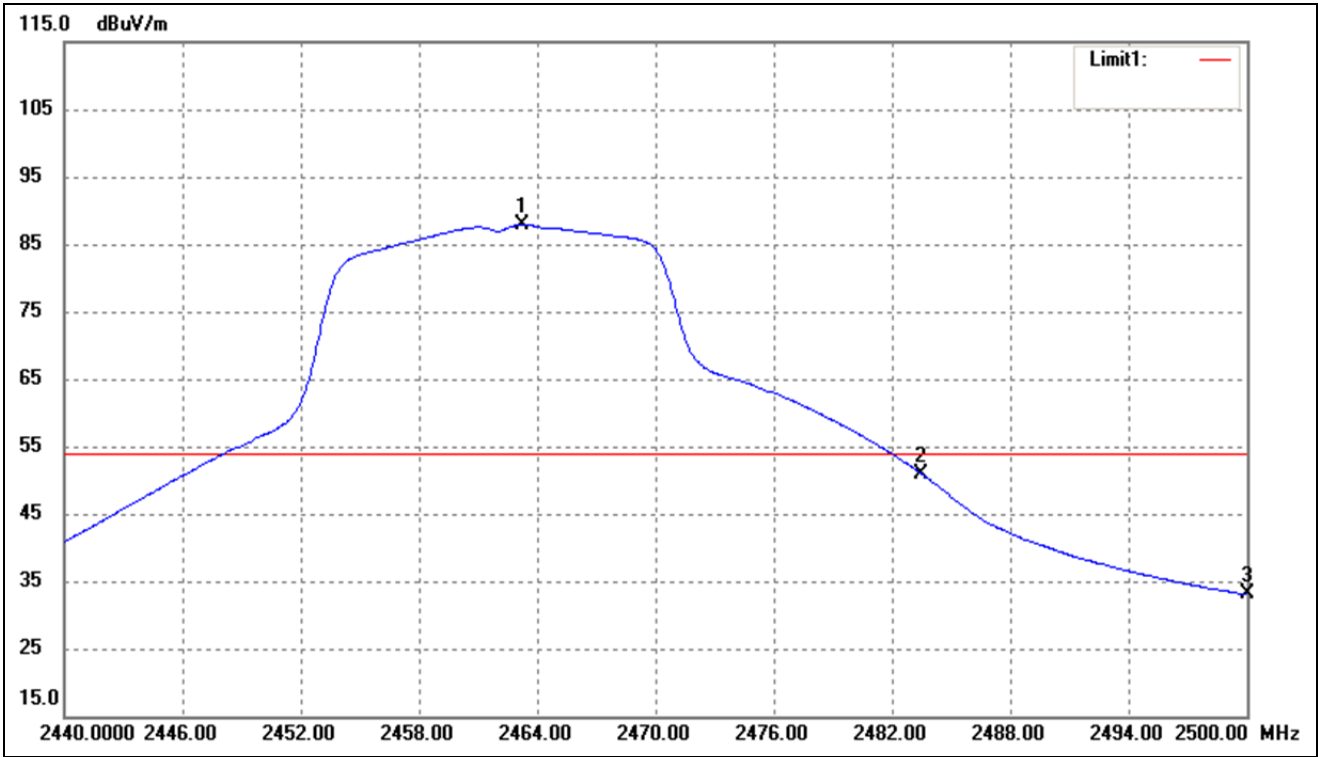


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.220	97.20	-9.36	87.84	/	/	Average Detector
	2466.760	108.85	-9.35	99.50	/	/	Peak Detector
2	2483.500	60.23	-9.31	50.92	54.00	-3.08	Average Detector
	2483.500	76.93	-9.31	67.62	74.00	-6.38	Peak Detector
3	2500.000	42.31	-9.28	33.03	54.00	-20.97	Average Detector
	2500.000	60.10	-9.28	50.82	74.00	-23.18	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

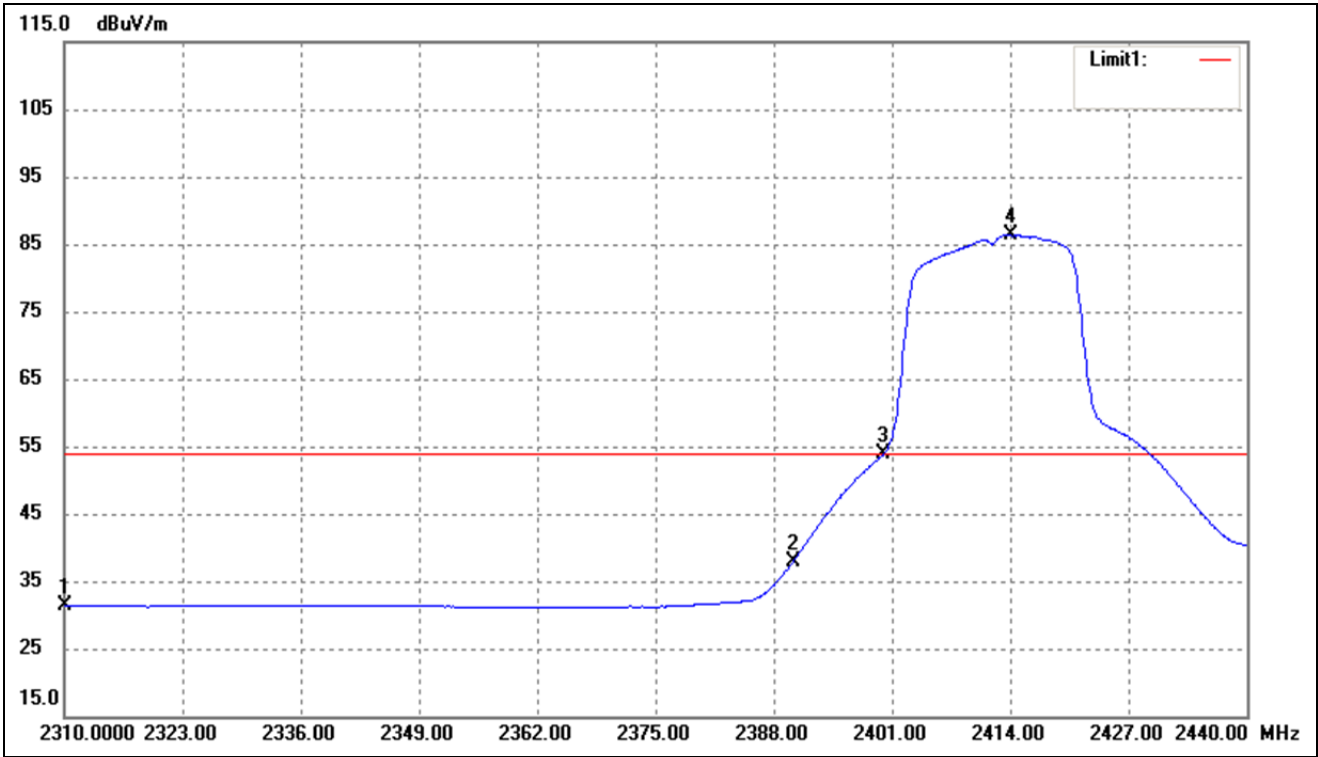


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.97	-9.66	31.31	54.00	-22.69	Average Detector
	2310.000	53.66	-9.66	44.00	74.00	-30.00	Peak Detector
2	2390.000	47.36	-9.50	37.86	54.00	-16.14	Average Detector
	2390.000	71.11	-9.50	61.61	74.00	-12.39	Peak Detector
3	2400.000	63.43	-9.48	53.95	Delta=32.49dBc		Average Detector
4	2414.000	95.89	-9.45	86.44			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

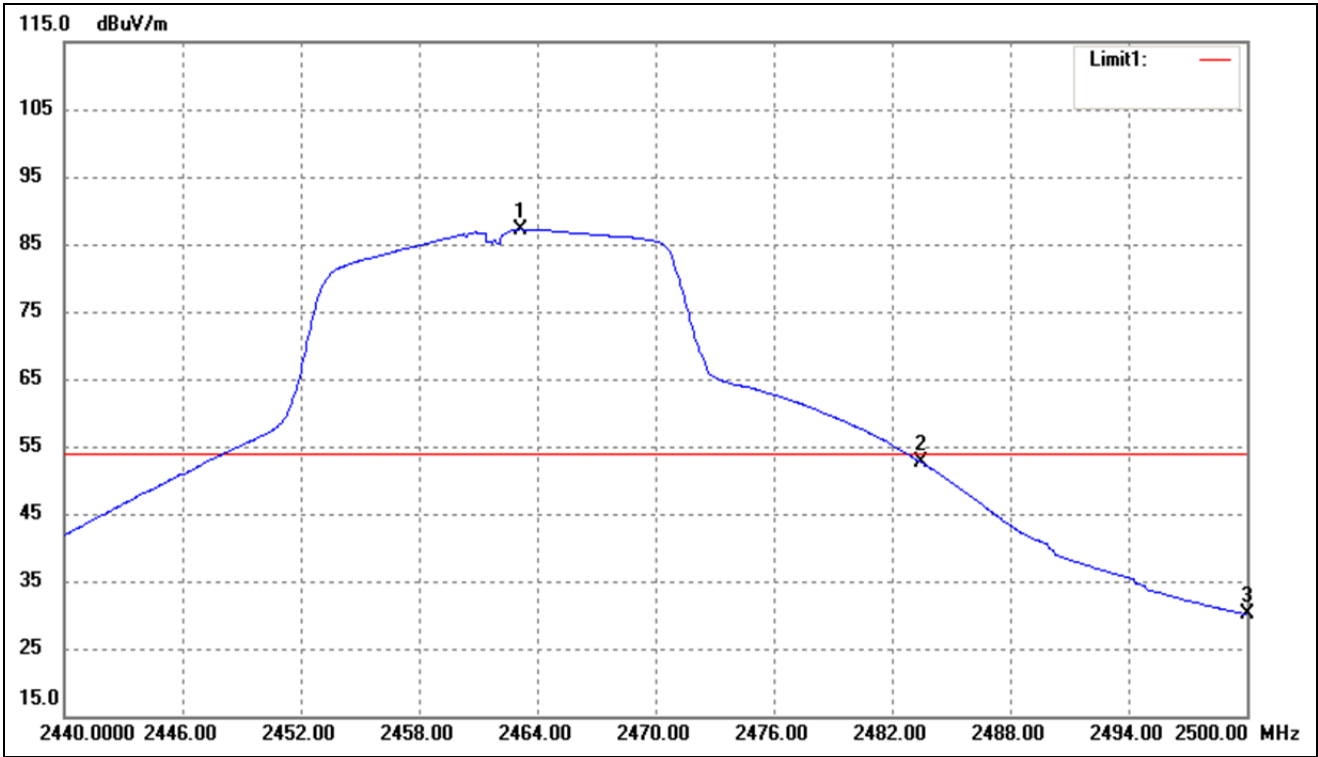


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.160	96.61	-9.36	87.25	/	/	Average Detector
	2463.520	108.46	-9.35	99.11	/	/	Peak Detector
2	2483.500	61.95	-9.31	52.64	54.00	-1.36	Average Detector
	2483.500	76.90	-9.31	67.59	74.00	-6.41	Peak Detector
3	2500.000	39.36	-9.28	30.08	54.00	-23.92	Average Detector
	2500.000	59.36	-9.28	50.08	74.00	-23.92	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

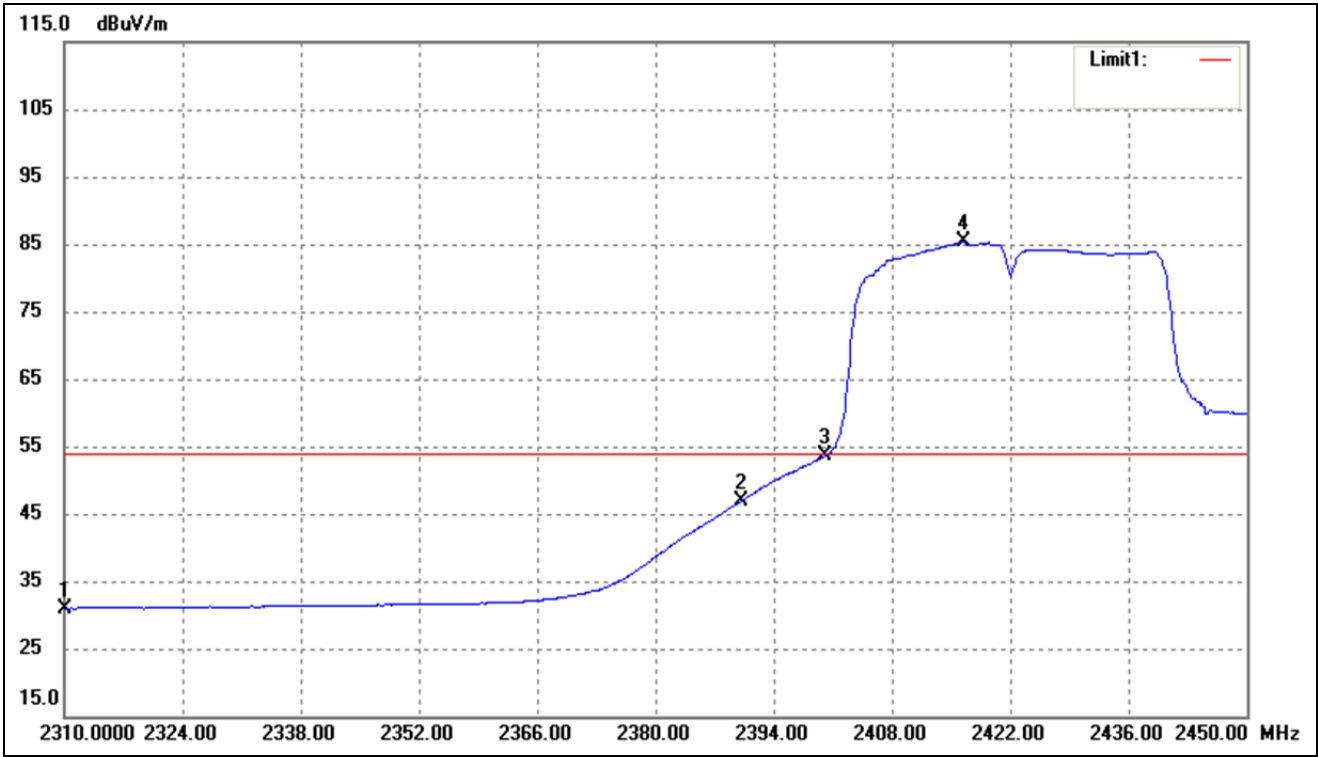

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.61	-9.66	30.95	54.00	-23.05	Average Detector
	2310.000	53.14	-9.66	43.48	74.00	-30.52	Peak Detector
2	2390.000	56.36	-9.50	46.86	54.00	-7.14	Average Detector
	2390.000	71.95	-9.50	62.45	74.00	-11.55	Peak Detector
3	2400.000	63.03	-9.48	53.55	Delta=31.78dBc		Average Detector
4	2416.540	94.79	-9.46	85.33			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

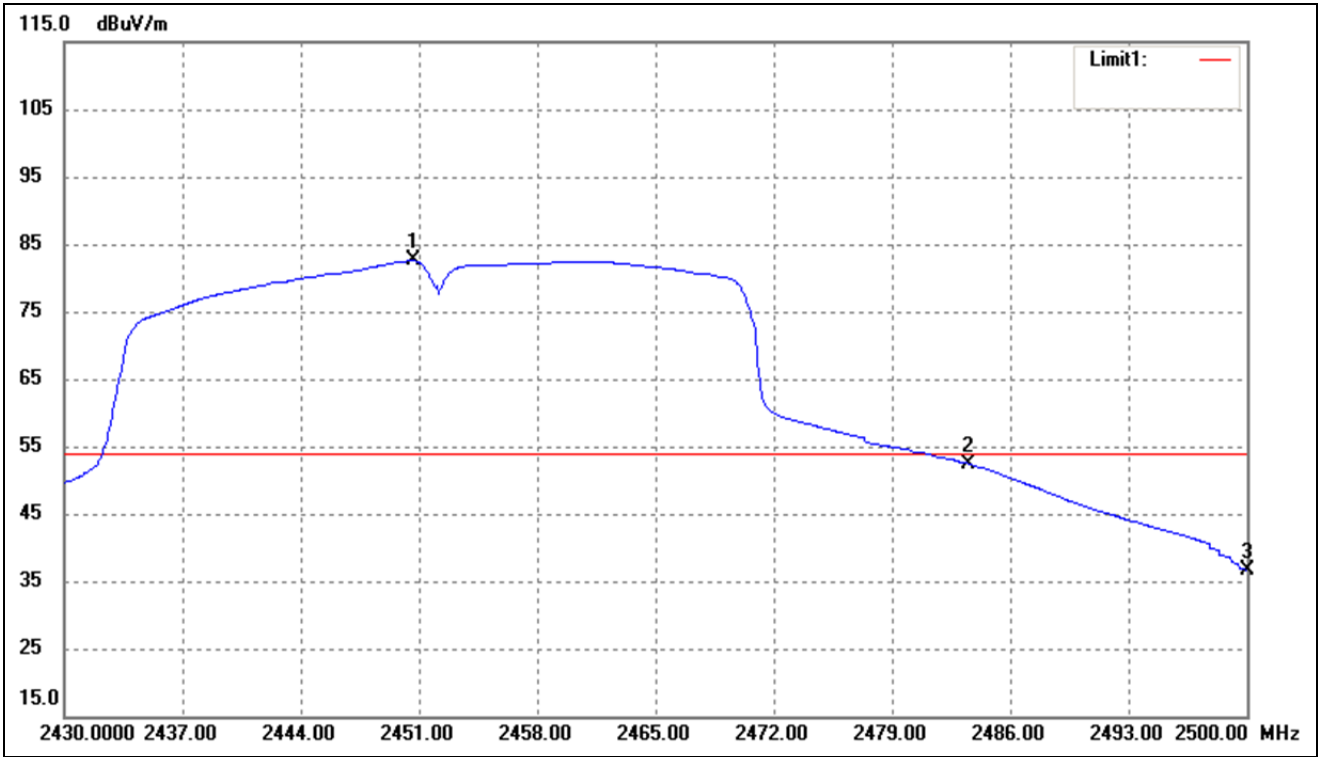

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.650	91.94	-9.38	82.56	/	/	Average Detector
	2447.290	104.42	-9.39	95.03	/	/	Peak Detector
2	2483.500	61.72	-9.31	52.41	54.00	-1.59	Average Detector
	2483.500	78.08	-9.31	68.77	74.00	-5.23	Peak Detector
3	2500.000	45.93	-9.28	36.65	54.00	-17.35	Average Detector
	2500.000	70.94	-9.28	61.66	74.00	-12.34	Peak Detector

➤ Conducted test
Please refer to Appendix D


9. Conducted Emissions

9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

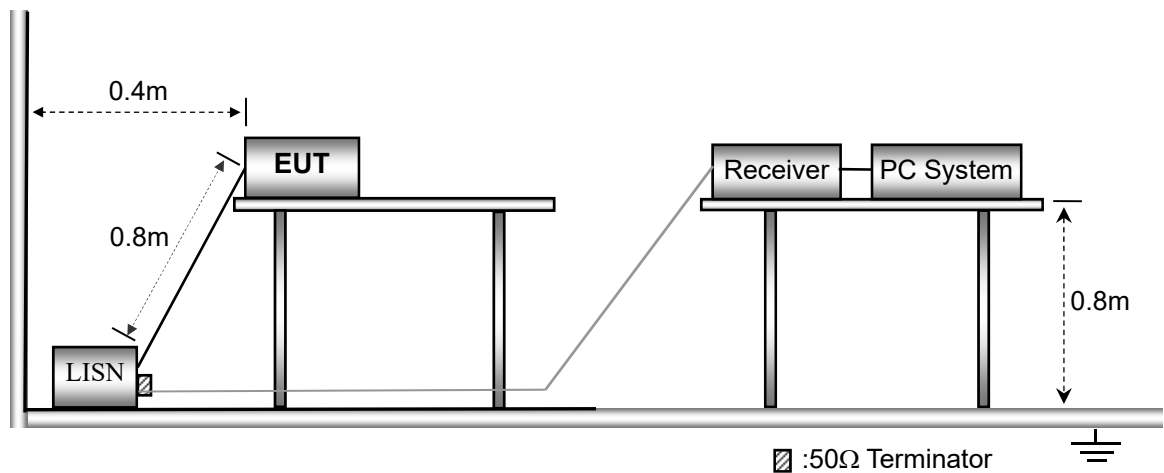

9.3 Test Receiver Setup


During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

9.4 Summary of Test Results/Plots


MDT760

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

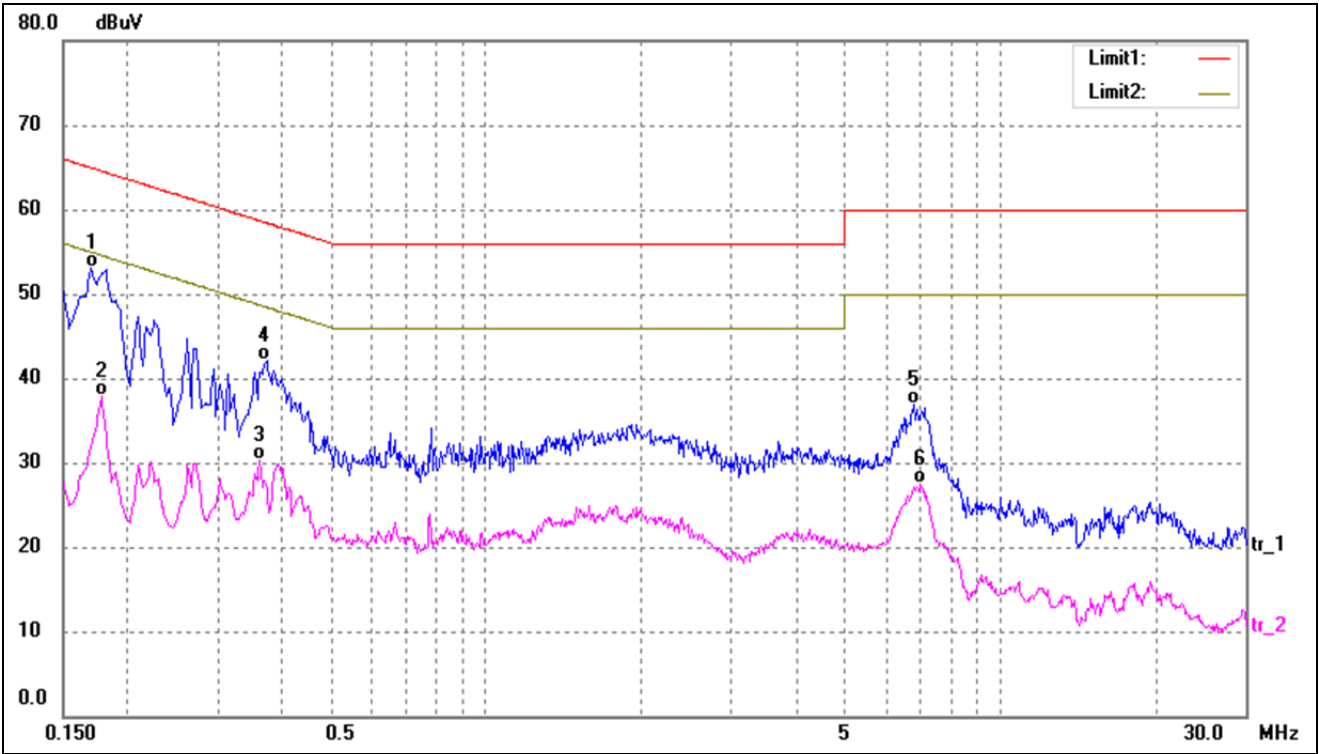

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1700	42.83	10.25	53.08	64.96	-11.88	QP
2	0.1780	27.74	10.26	38.00	54.57	-16.57	AVG
3	0.3620	20.01	10.25	30.26	48.68	-18.42	AVG
4	0.3740	31.94	10.24	42.18	58.41	-16.23	QP
5	6.7780	26.63	10.25	36.88	60.00	-23.12	QP
6	7.0060	17.32	10.25	27.57	50.00	-22.43	AVG


Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

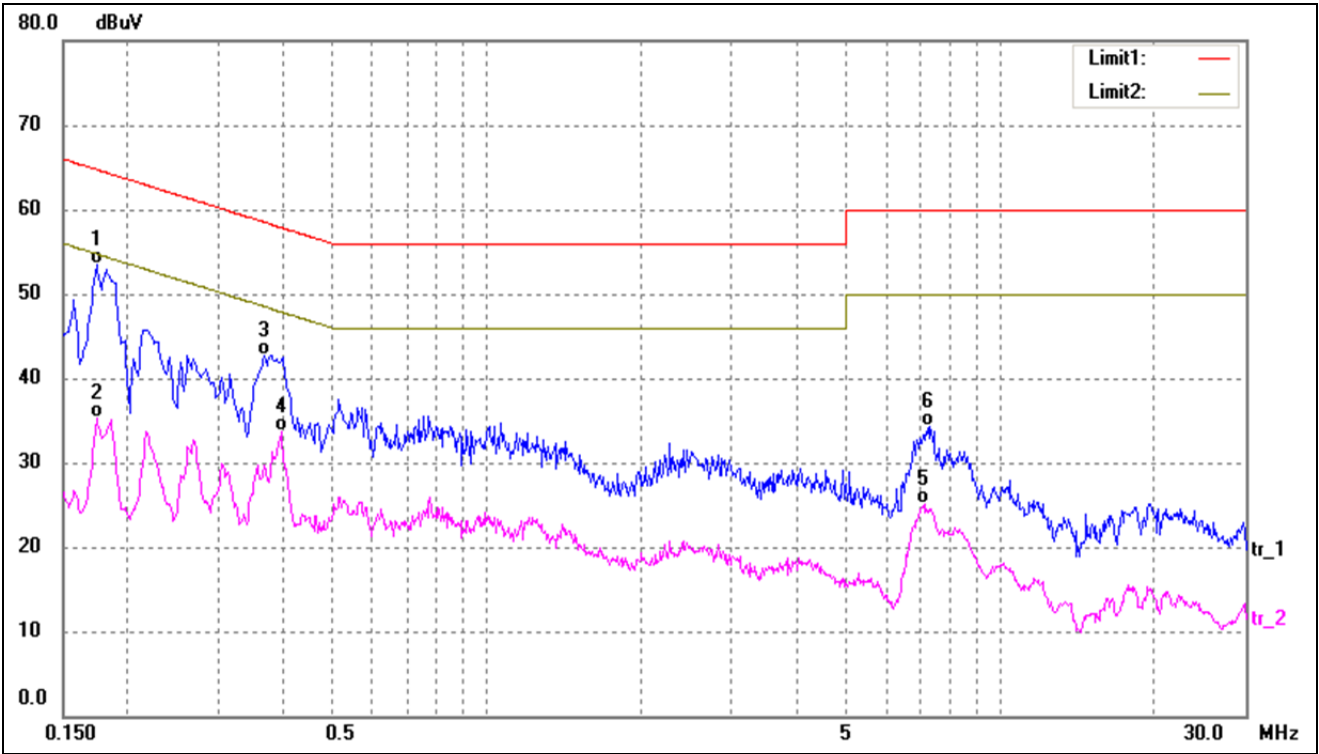

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1740	43.29	10.25	53.54	64.76	-11.22	QP
2	0.1740	25.03	10.25	35.28	54.76	-19.48	AVG
3	0.3700	32.54	10.24	42.78	58.50	-15.72	QP
4	0.3980	23.44	10.23	33.67	47.89	-14.22	AVG
5	7.1260	14.81	10.25	25.06	50.00	-24.94	AVG
6	7.2980	24.09	10.25	34.34	60.00	-25.66	QP


MDT860

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

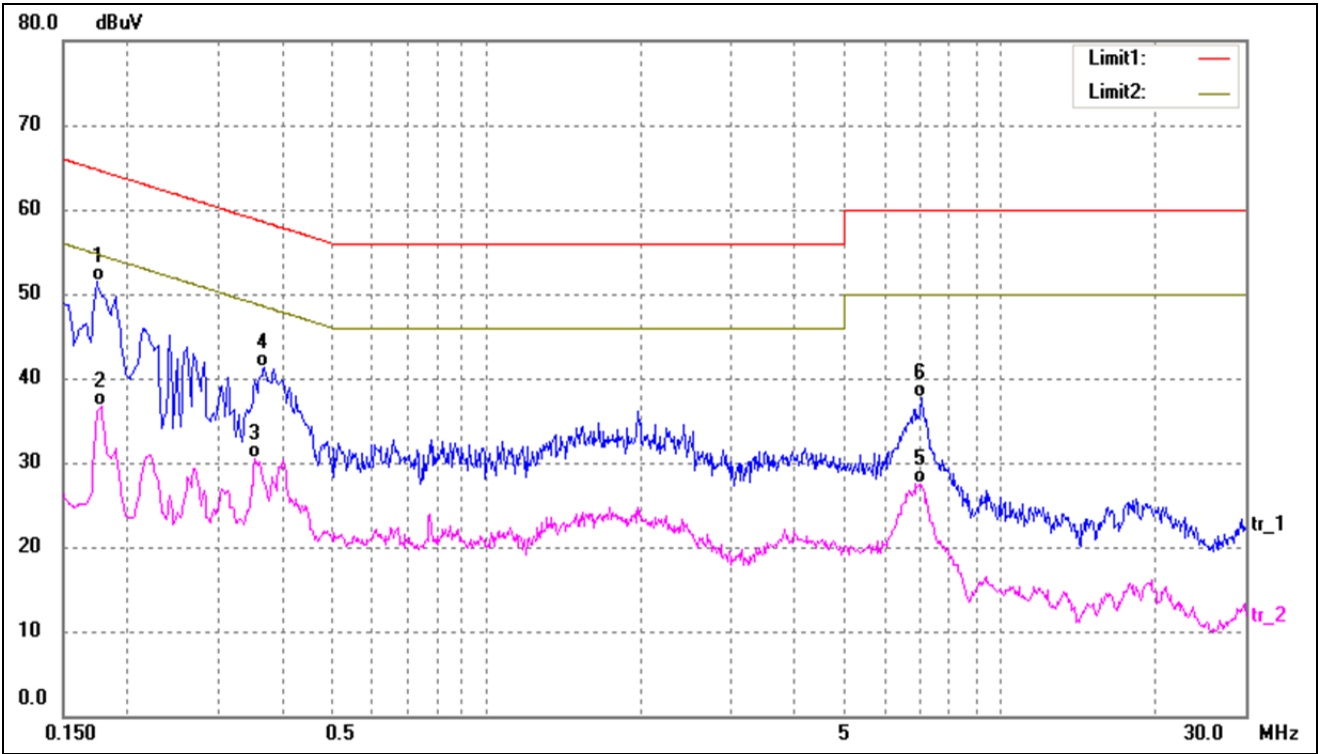

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1740	41.27	10.25	51.52	64.76	-13.24	QP
2	0.1780	26.47	10.26	36.73	54.57	-17.84	AVG
3	0.3540	20.26	10.26	30.52	48.87	-18.35	AVG
4	0.3700	30.99	10.24	41.23	58.50	-17.27	QP
5	6.9860	17.30	10.25	27.55	50.00	-22.45	AVG
6	7.0500	27.44	10.25	37.69	60.00	-22.31	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

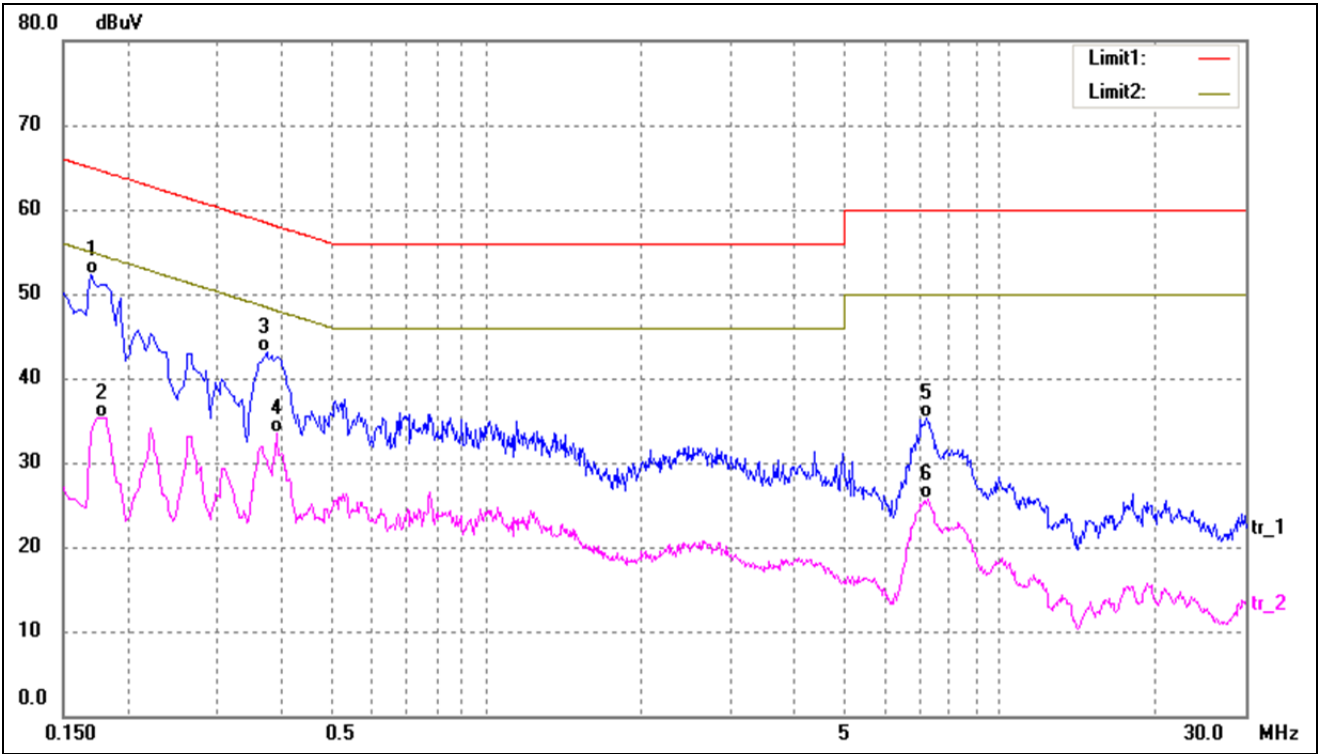

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1700	42.03	10.25	52.28	64.96	-12.68	QP
2	0.1780	25.00	10.26	35.26	54.57	-19.31	AVG
3	0.3740	32.79	10.24	43.03	58.41	-15.38	QP
4	0.3899	23.31	10.24	33.55	48.06	-14.51	AVG
5	7.1820	25.02	10.25	35.27	60.00	-24.73	QP
6	7.2340	15.46	10.25	25.71	50.00	-24.29	AVG

APPENDIX SUMMARY

Project No.	WTX22X05090003W	Test Engineer	BAIdi
Start date	2022/6/9	Finish date	2022/6/10
Temperature	22.4	Humidity	59
RF specifications	WIFI-2.4G		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

APPENDIX A

Power Spectral Density			
Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b_11Mbps	2412	-15.41	8
	2437	-15.27	8
	2462	-16.10	8
802.11g_54Mbps	2412	-19.28	8
	2437	-19.14	8
	2462	-19.22	8
802.11n-HT20_MCS7	2412	-20.68	8
	2437	-20.17	8
	2462	-20.41	8
802.11n-HT40_MCS7	2422	-24.36	8
	2437	-24.12	8
	2452	-25.81	8

802.11b-Low	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.41140 GHz -15.41 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.411400000 GHz -15.41 dBm Center 2.412 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11b-Middle	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.43775 GHz -15.27 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.437750000 GHz -15.27 dBm Center 2.437 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11b-High	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.46266 GHz -16.1 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.462660000 GHz -16.1 dBm Center 2.462 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11g-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.41137 GHz -19.28 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.411370000 GHz -19.28 dBm Center 2.412 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11g-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.43670 GHz -19.14 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.436700000 GHz -19.14 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11g-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.46140 GHz -19.22 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.461400000 GHz -19.22 dBm Center 2.462 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11n-HT20-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.41257 GHz -20.68 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.412570000 GHz -20.68 dBm Center 2.412 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.43640 GHz -20.17 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.436400000 GHz -20.17 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.46230 GHz -20.41 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.462300000 GHz -20.41 dBm Center 2.462 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11n-HT40-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.42104 GHz -24.36 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.421040000 GHz -24.36 dBm Center 2.422 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts) Span 60 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT40-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.43574 GHz -24.12 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.435740000 GHz -24.12 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts) Span 60 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT40-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.45074 GHz -25.81 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.450740000 GHz -25.81 dBm Center 2.452 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts) Span 60 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

APPENDIX B

DTS Bandwidth			
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b_11Mbps	2412	8.075	≥ 500
	2437	8.033	≥ 500
	2462	8.047	≥ 500
802.11g_54Mbps	2412	16.342	≥ 500
	2437	16.331	≥ 500
	2462	16.338	≥ 500
802.11n-HT20_MCS7	2412	17.586	≥ 500
	2437	17.588	≥ 500
	2462	17.569	≥ 500
802.11n-HT40_MCS7	2422	34.836	≥ 500
	2437	34.900	≥ 500
	2452	36.062	≥ 500

802.11b-Low	Agilent Ch Freq2.412 GHz TrigFree Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 12.7382 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 120.103 kHz x dB Bandwidth 8.075 MHz Trace/View Trace 123 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-Middle	Agilent Ch Freq2.437 GHz TrigFree Occupied Bandwidth Center 2.437000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 12.7784 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 84.790 kHz x dB Bandwidth 8.033 MHz Trace/View Trace 123 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-High	Agilent Ch Freq2.462 GHz TrigFree Occupied Bandwidth Center 2.462000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 12.9875 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 12.068 kHz x dB Bandwidth 8.047 MHz Trace/View Trace 123 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11g-Low	Agilent Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Center 2.41200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 16.4493 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 59.129 kHz x dB Bandwidth 16.342 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-Middle	Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 16.4807 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 50.302 kHz x dB Bandwidth 16.331 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-High	Agilent Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Center 2.46200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 16.4471 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -4.523 kHz x dB Bandwidth 16.338 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT20-Low	Agilent Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Center 2.41200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 17.5702 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 37.992 kHz x dB Bandwidth 17.586 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-Middle	Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 17.5954 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 35.735 kHz x dB Bandwidth 17.588 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-High	Agilent Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Center 2.46200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 17.5815 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -434.417 Hz x dB Bandwidth 17.569 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT40-Low	Agilent Ch Freq 2.422 GHz Trig Free Occupied Bandwidth Center 2.42200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Occupied Bandwidth 35.9301 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 183.587 kHz x dB Bandwidth 34.835 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-Middle	Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Occupied Bandwidth 35.8428 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 153.886 kHz x dB Bandwidth 34.900 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent Ch Freq 2.452 GHz Trig Free Occupied Bandwidth Center 2.45200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Occupied Bandwidth 35.8376 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 51.973 kHz x dB Bandwidth 35.062 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

APPENDIX C

Test Mode	Frequency MHz	Reading dBm	Limit dBm
802.11b _ 11Mbps	2412	14.68	30.00
	2437	14.68	30.00
	2462	13.91	30.00
802.11g_54Mbps	2412	13.44	30.00
	2437	12.84	30.00
	2462	12.62	30.00
802.11n HT20_MCS7	2412	12.17	30.00
	2437	12.13	30.00
	2462	11.68	30.00
802.11n HT40_MCS7	2422	11.14	30.00
	2437	10.52	30.00
	2452	10.90	30.00

802.11b-Low	Agilent Ch Freq 2.412 GHz Channel Power VBW 1.000000000 MHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Span 30 MHz Channel Power Power Spectral Density 14.68 dBm / 20.0000 MHz -58.33 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-Middle	Agilent Ch Freq 2.437 GHz Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Span 30 MHz Channel Power Power Spectral Density 14.68 dBm / 20.0000 MHz -58.33 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-High	Agilent Ch Freq 2.462 GHz Channel Power Center 2.462000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Span 30 MHz Channel Power Power Spectral Density 13.91 dBm / 20.0000 MHz -59.10 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2




802.11g-Low	Agilent Ch Freq 2.412 GHz Channel Power Center 2.412000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Span 30 MHz Channel Power Power Spectral Density 13.44 dBm / 20.0000 MHz -59.57 dBm/Hz Trace/View Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-Middle	Agilent Ch Freq 2.437 GHz Channel Power Center 2.437000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Span 30 MHz Channel Power Power Spectral Density 12.84 dBm / 20.0000 MHz -60.17 dBm/Hz Trace/View Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-High	Agilent Ch Freq 2.462 GHz Channel Power Center 2.462000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Span 30 MHz Channel Power Power Spectral Density 12.62 dBm / 20.0000 MHz -60.32 dBm/Hz Trace/View Trace Clear Write Max Hold Min Hold View Blank More 1 of 2


802.11n-HT20-Low	Agilent Ch Freq 2.412 GHz Channel Power Center 2.412000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Span 30 MHz Channel Power Power Spectral Density 12.17 dBm / 20.0000 MHz -60.84 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-Middle	Agilent Ch Freq 2.437 GHz Channel Power Center 2.437000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Span 30 MHz Channel Power Power Spectral Density 12.13 dBm / 20.0000 MHz -60.70 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-High	Agilent Ch Freq 2.462 GHz Channel Power VBW 1.000000000 MHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Span 30 MHz Channel Power Power Spectral Density 11.68 dBm / 20.0000 MHz -61.33 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT40-Low	Agilent Ch Freq 2.422 GHz Channel Power Span 60.00000000 MHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.422 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Span 60 MHz Channel Power Power Spectral Density 11.14 dBm / 40.0000 MHz -64.88 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-Middle	Agilent Ch Freq 2.437 GHz Channel Power Center 2.437000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Span 60 MHz Channel Power Power Spectral Density 10.52 dBm / 40.0000 MHz -65.50 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent Ch Freq 2.452 GHz Channel Power Center 2.452000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.452 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Span 60 MHz Channel Power Power Spectral Density 10.90 dBm / 40.0000 MHz -65.12 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2


APPENDIX D




Conducted Out of Band Emissions

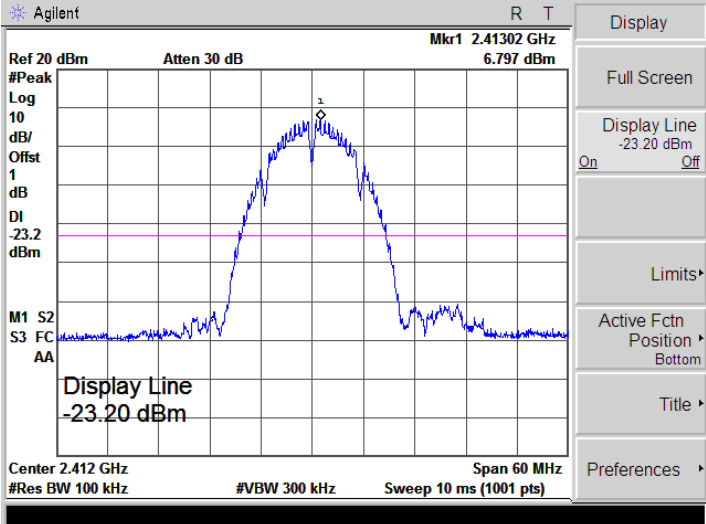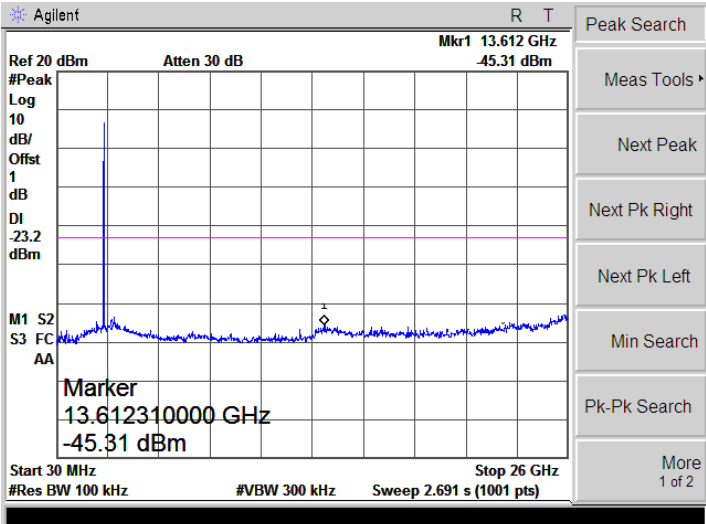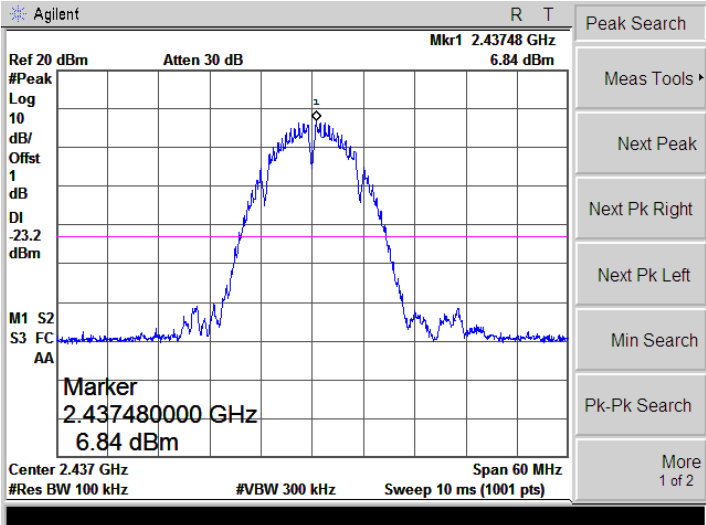
802.11b-Low	
	
802.11b-Middle	



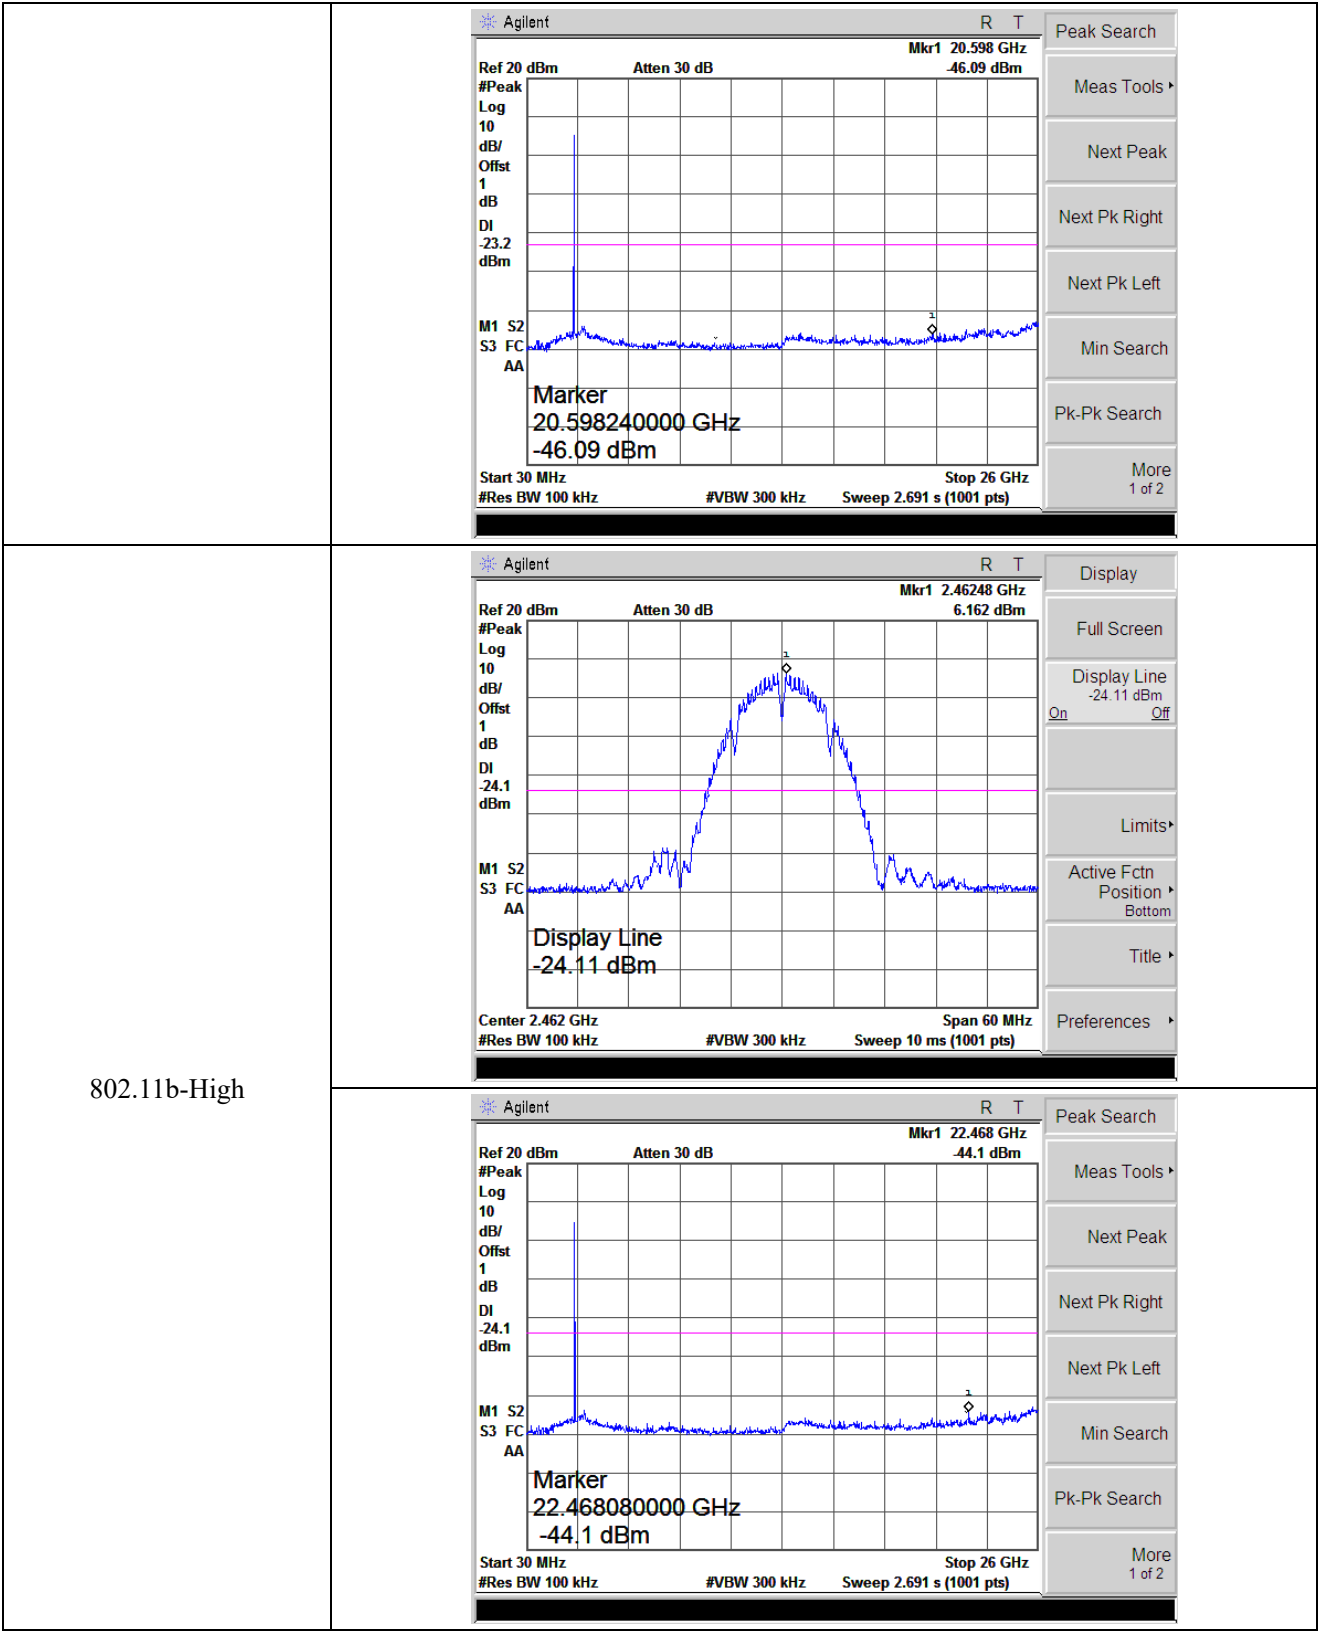



802.11g-Low	
802.11g-Middle	

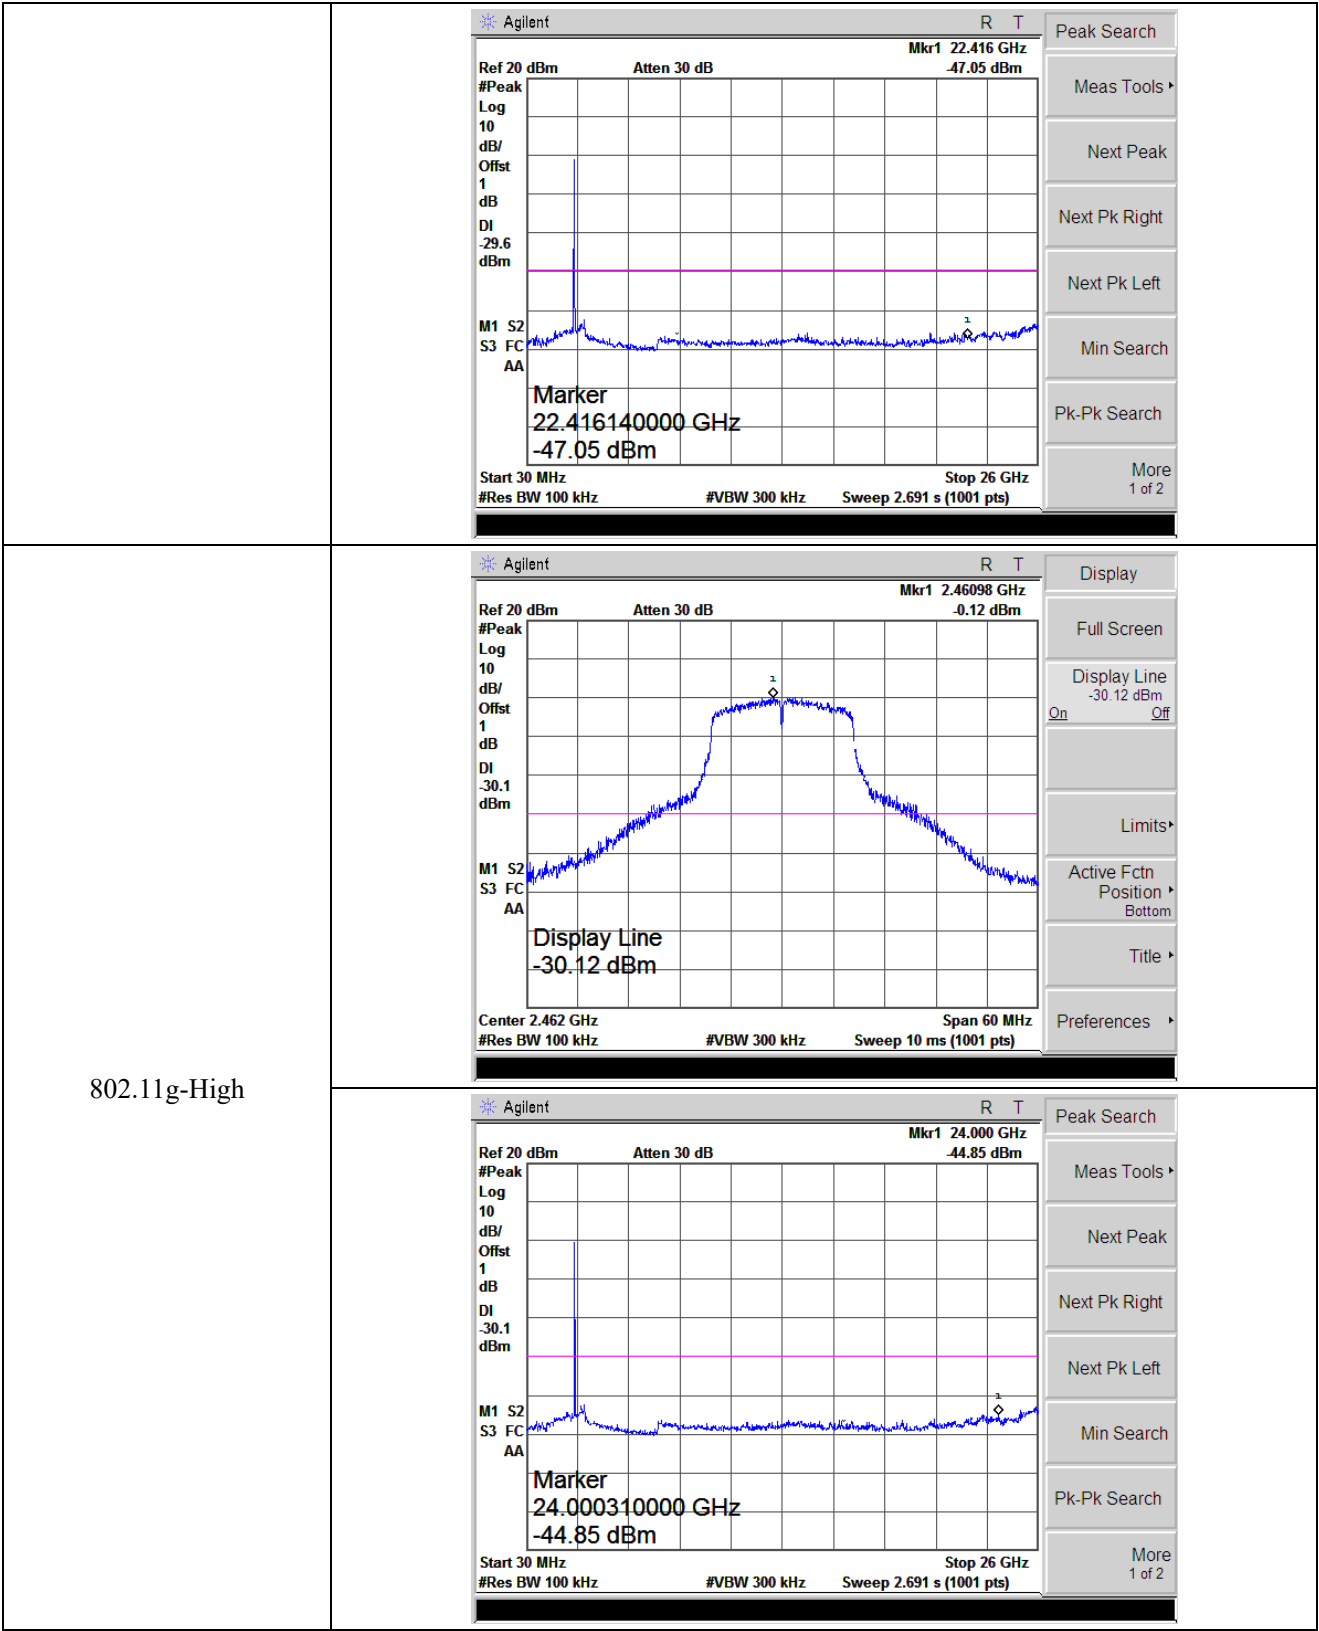

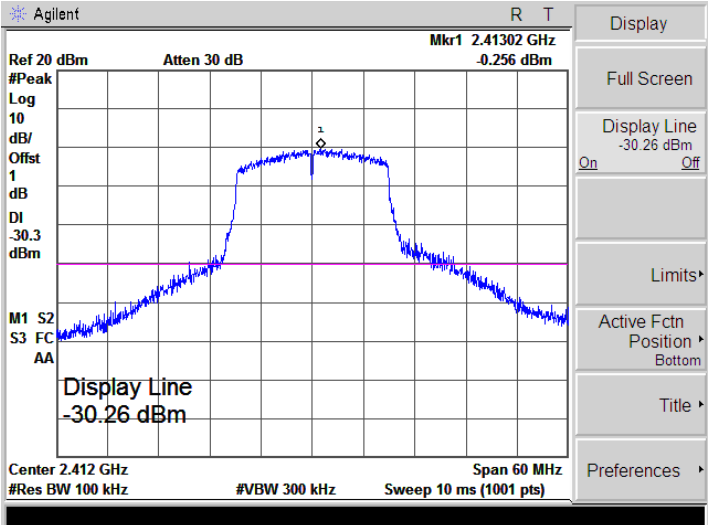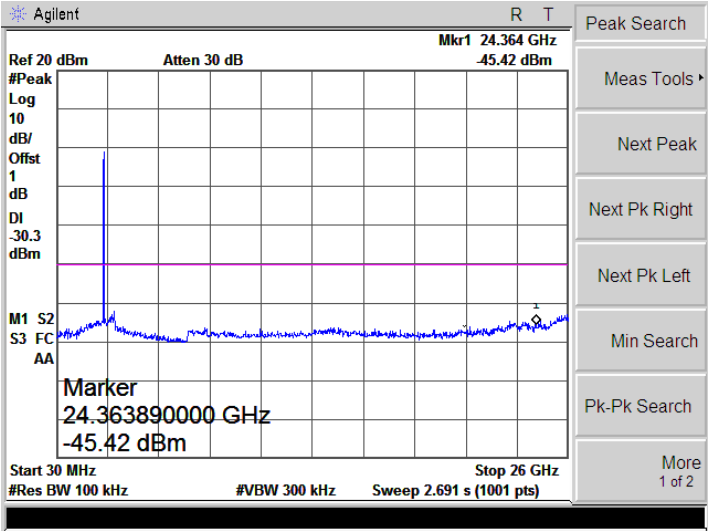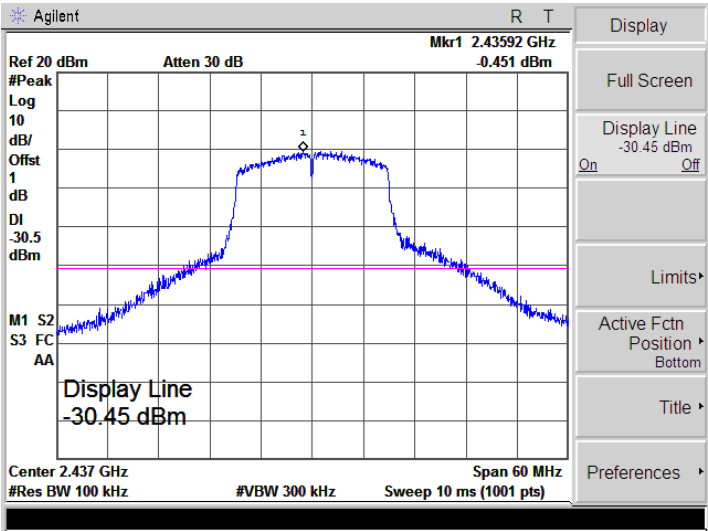802.11n-HT20-Low	
	
802.11n-HT20-Middle	

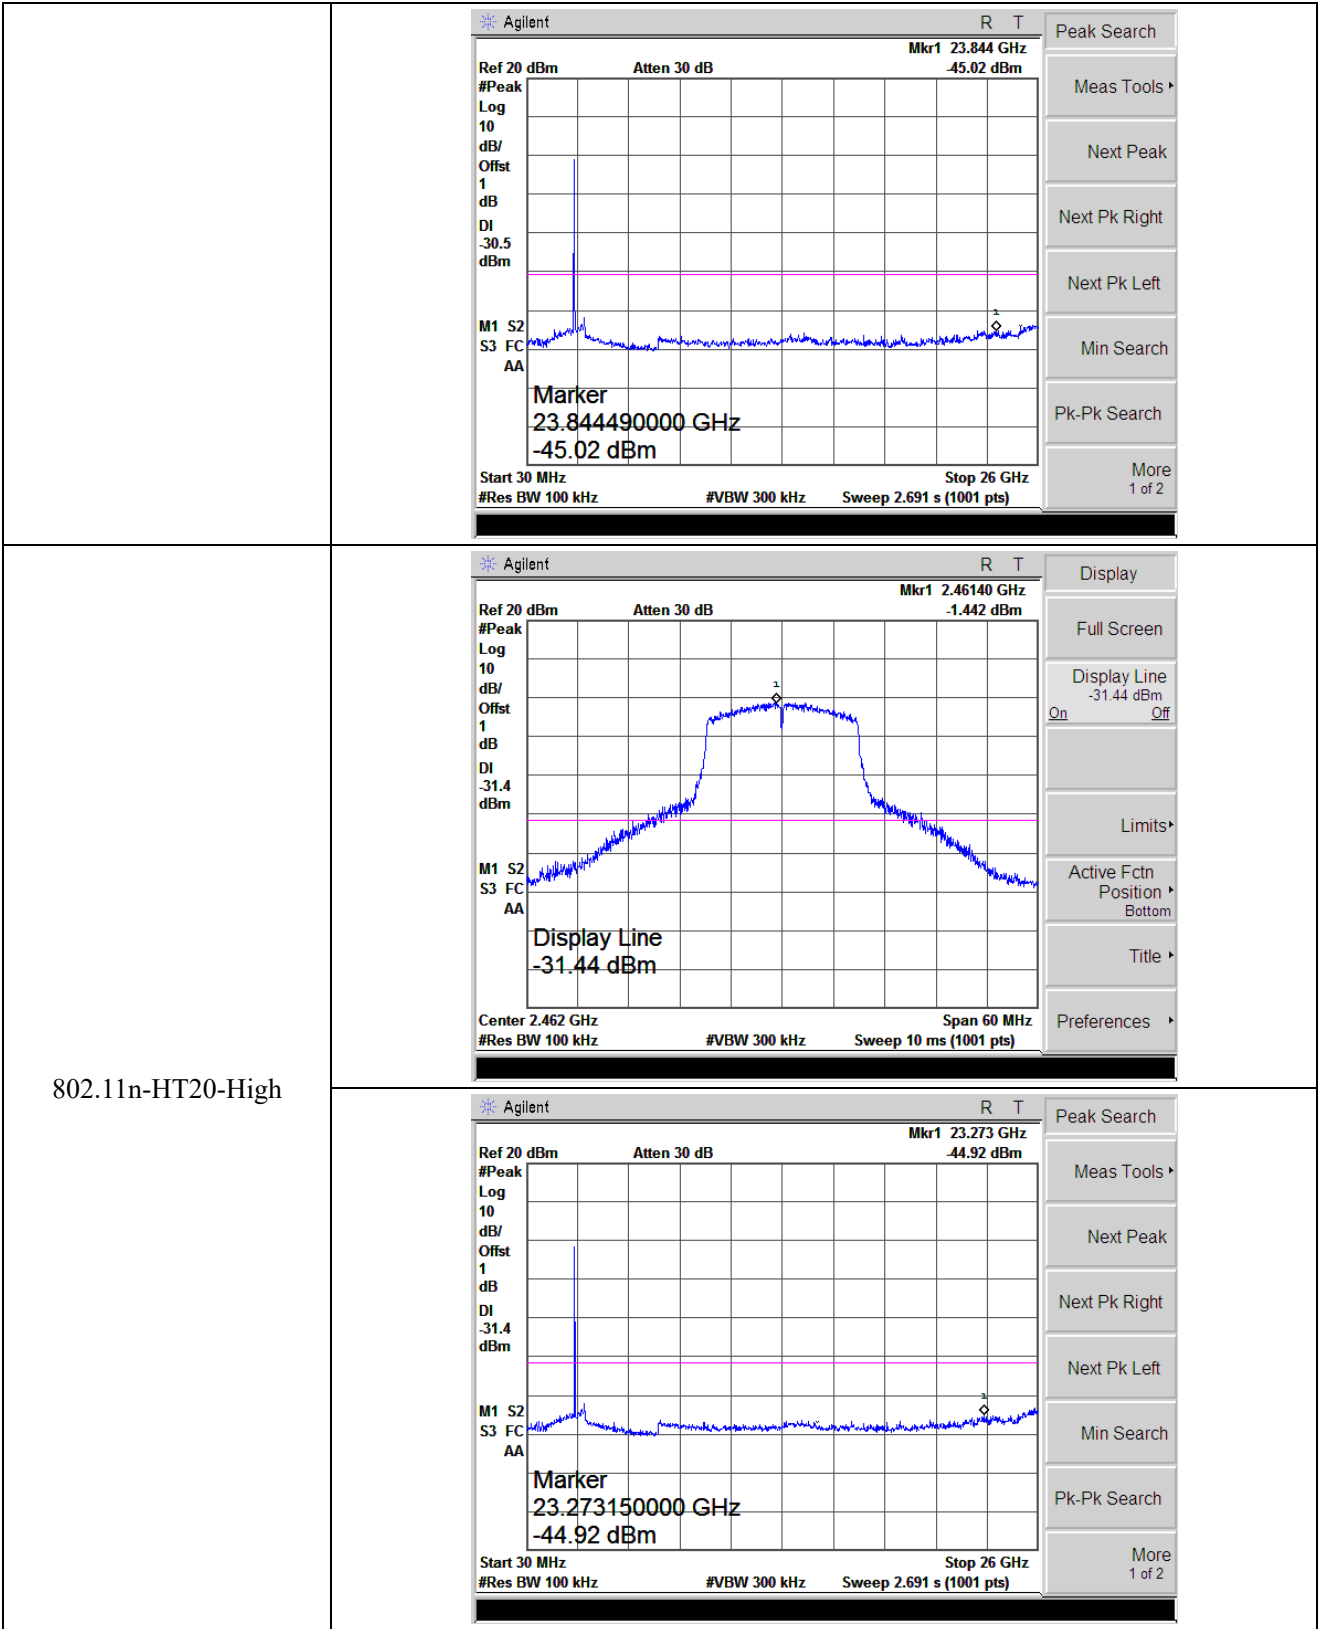

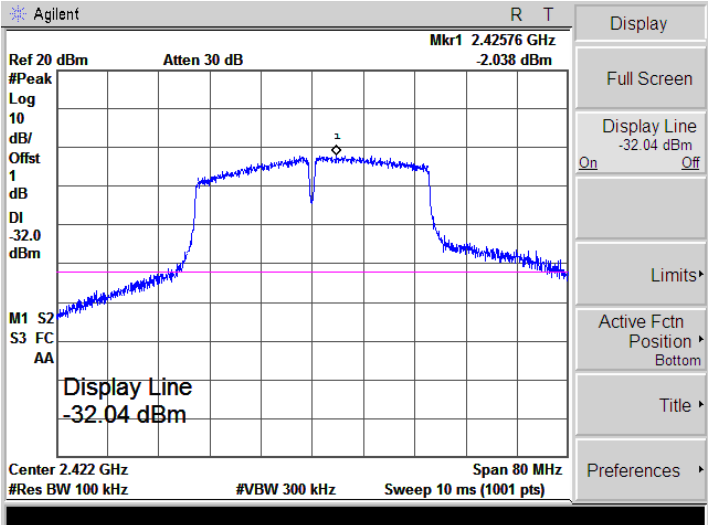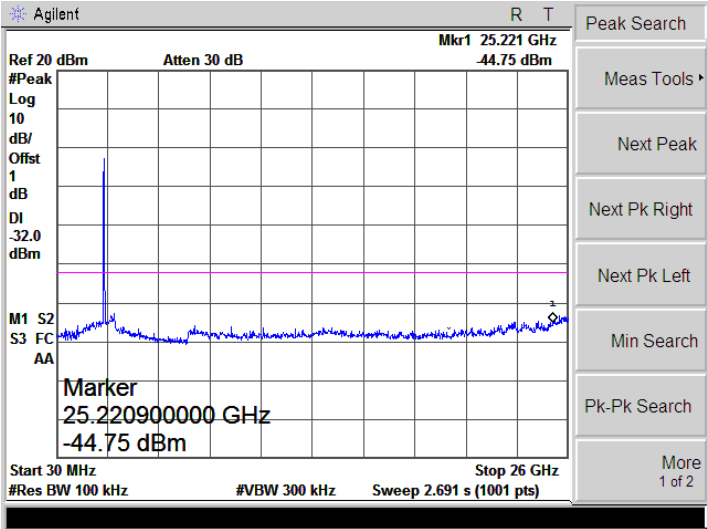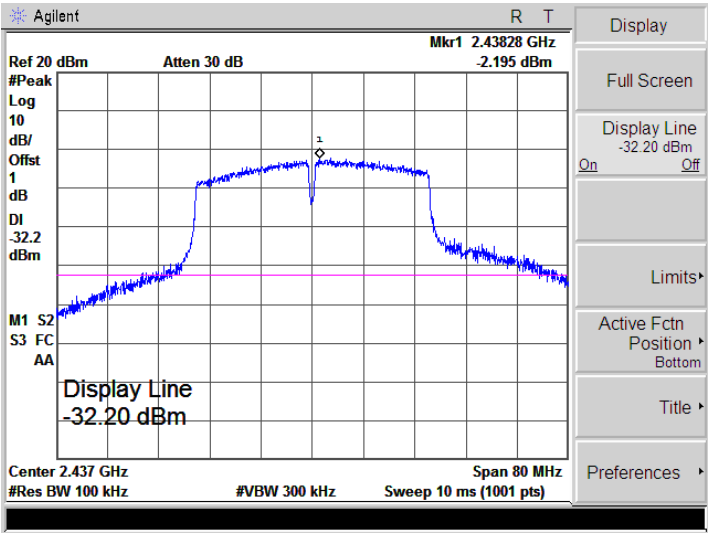802.11n-HT40-Low	
	
802.11n-HT40-Middle	

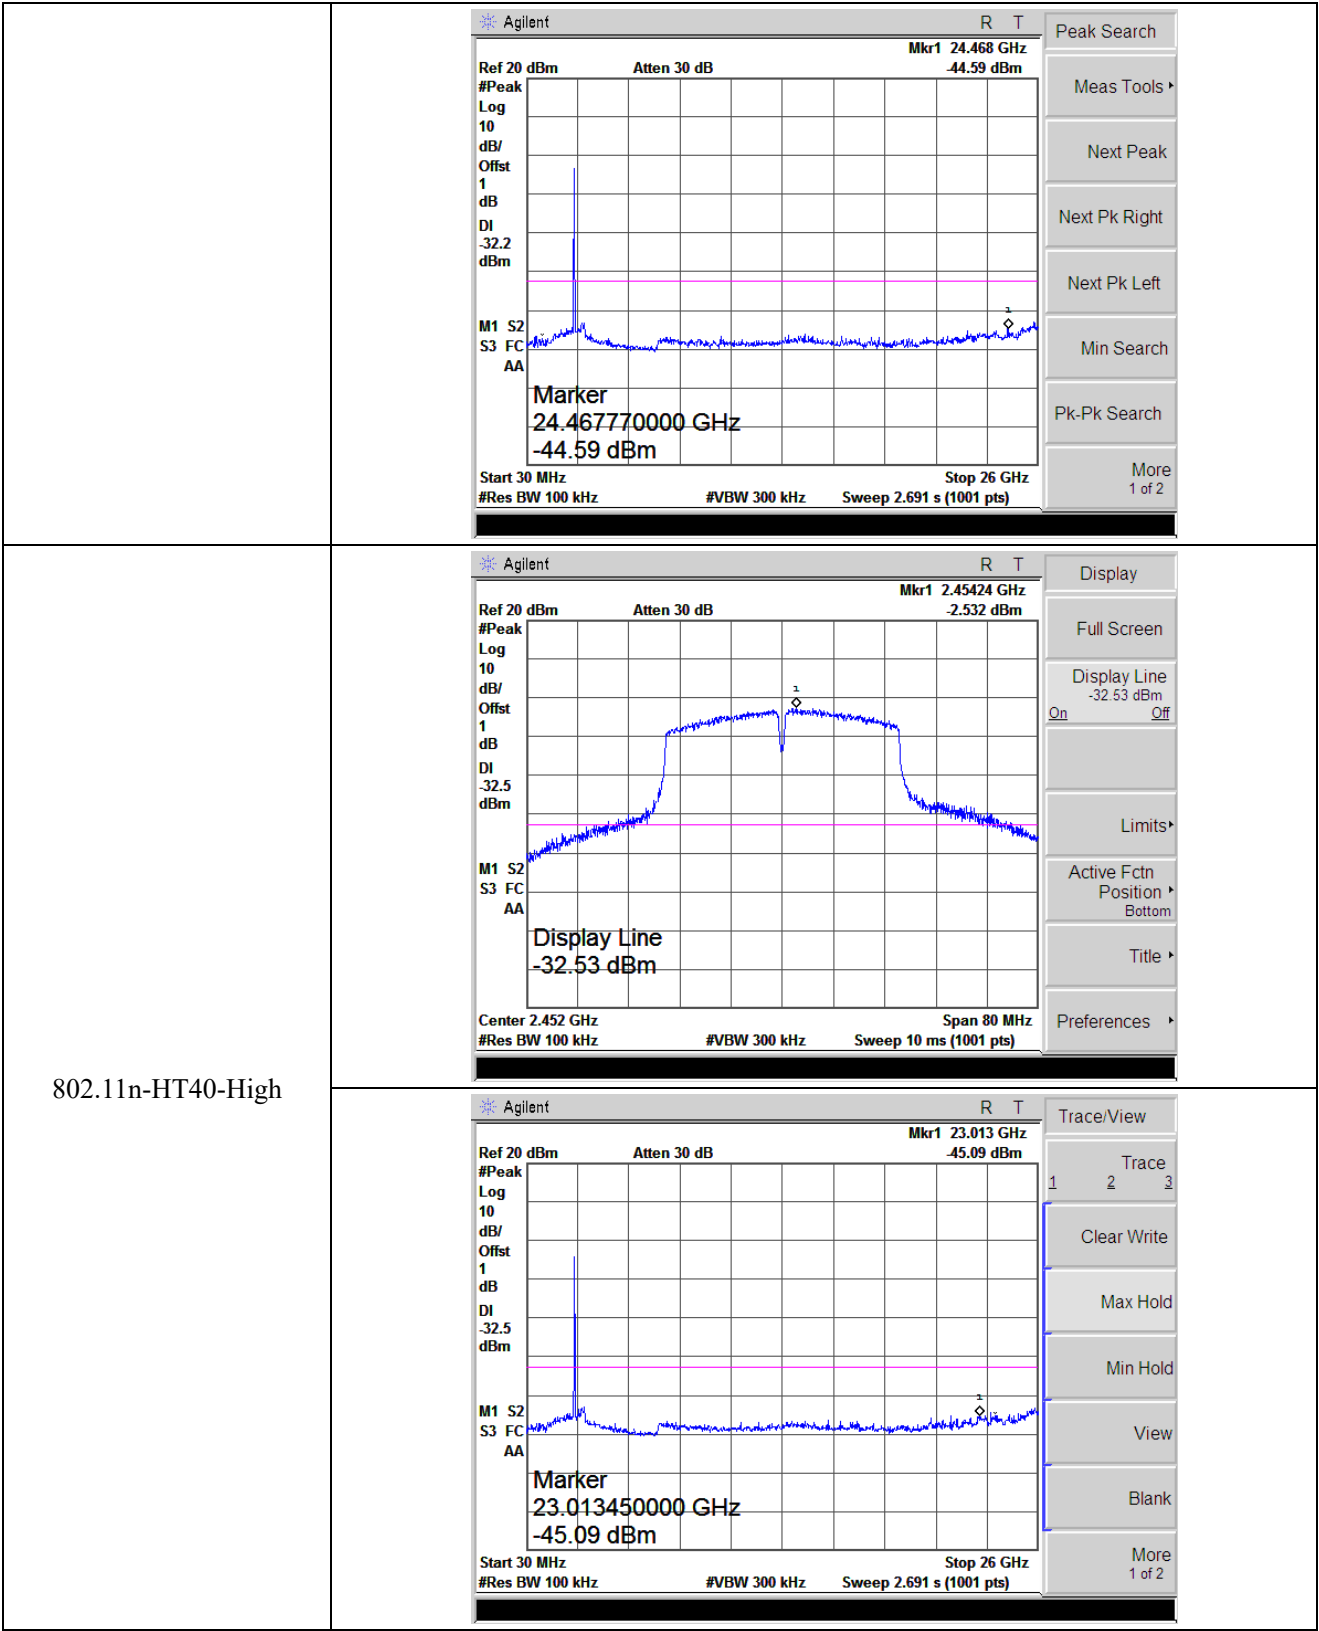

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****