

TEST REPORT

Reference No...... : WTX22X05090003W004
FCC ID : 2AHAF-MDT760V30
Applicant : TOPICON HK LIMITED
Address : Room 2314-2316, Tower C, Huangdu Plaza, Yitian Road, Futian District,
Shenzhen, China
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : GPS
Model No...... : MDT760
Standards : FCC Part 15.247
Date of Receipt sample : 2022-05-09
Date of Test..... : 2022-05-09 to 2022-06-15
Date of Issue : 2022-06-15
Test Report Form No. : WTX_Part 15_247W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Jason Su

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	8
1.7 TEST EQUIPMENT LIST AND DETAILS	9
2. SUMMARY OF TEST RESULTS	11
3. ANTENNA REQUIREMENT	12
3.1 STANDARD APPLICABLE	12
3.2 EVALUATION INFORMATION	12
4. FREQUENCY HOPPING SYSTEM REQUIREMENTS	13
4.1 STANDARD APPLICABLE	13
4.2 FREQUENCY HOPPING SYSTEM	13
4.3 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	14
5. QUANTITY OF HOPPING CHANNELS AND CHANNEL SEPARATION	15
5.1 STANDARD APPLICABLE	15
5.2 TEST SETUP BLOCK DIAGRAM	15
5.3 TEST PROCEDURE	15
5.4 SUMMARY OF TEST RESULTS/PLOTS	16
6. DWELL TIME OF HOPPING CHANNEL	17
6.1 STANDARD APPLICABLE	17
6.2 TEST SETUP BLOCK DIAGRAM	17
6.3 TEST PROCEDURE	17
6.4 SUMMARY OF TEST RESULTS/PLOTS	18
7. 20DB BANDWIDTH	19
7.1 STANDARD APPLICABLE	19
7.2 TEST SETUP BLOCK DIAGRAM	19
7.3 TEST PROCEDURE	19
7.4 SUMMARY OF TEST RESULTS/PLOTS	20
8. RF OUTPUT POWER	21
8.1 STANDARD APPLICABLE	21
8.2 TEST SETUP BLOCK DIAGRAM	21
8.3 TEST PROCEDURE	21
8.4 SUMMARY OF TEST RESULTS/PLOTS	21
9. FIELD STRENGTH OF SPURIOUS EMISSIONS	22
9.1 STANDARD APPLICABLE	22
9.2 TEST PROCEDURE	22
9.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	24
9.4 SUMMARY OF TEST RESULTS/PLOTS	24
10. OUT OF BAND EMISSIONS	39
10.1 STANDARD APPLICABLE	39
10.2 TEST PROCEDURE	39
10.3 SUMMARY OF TEST RESULTS/PLOTS	40
11. CONDUCTED EMISSIONS	45
11.1 TEST PROCEDURE	45
11.2 BASIC TEST SETUP BLOCK DIAGRAM	45
11.3 TEST RECEIVER SETUP	45
11.4 SUMMARY OF TEST RESULTS/PLOTS	45

Report version

Version No.	Date of issue	Description
Rev.00	2022-06-15	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	GPS
Trade Name:	/
Model No.:	MDT760
Adding Model(s):	MDT761, MDT740, MDT741, MDT770, MDT780, OBC740, OBC760, M710A, M710AG, M710AB, M710AKB, M720A, M720B, M720AG, M720AB, M720AKB, MDT714D, MDT715D, X7(V2), TABX7V2, X8C, TABX8C, MDT860, MDT861, MDT840, MDT841, MDT870, MDT871, MDT880, MDT881, OBC860, 100822, 100783
Rated Voltage:	MDT760:DC3.7V MDT860:DC3.7V
Battery:	/
Adapter Model:	/
Software Version:	MDT760: mdt760_gms_1.8.6 MDT860: mdt860_gms_1.9.2
Hardware Version:	MDT760: MDT760_V30 MDT860: MDT760_V30
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model MDT760, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Bluetooth Version:	V4.0 (BR/EDR mode)
Frequency Range:	2402-2480MHz
RF Output Power:	6.518dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Quantity of Channels:	79
Channel Separation:	1MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	3dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2402MHz
TM2	Middle Channel	2441MHz
TM3	High Channel	2480MHz
TM4	Hopping	2402-2480MHz

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	27
	DH3	11	183
	DH5	15	339
$\pi/4$ DQPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	679
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021
Normal mode: the Bluetooth has been tested on the modulation of GFSK, $\pi/4$ DQPSK and 8DPSK, compliance test and record the worst case.			

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	With Ferrite
DC Cable	1.45	Unshielded	Without Ferrite
Camera Cable	0.8	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi310-14ISK	/
Battery	JADE	DC12V	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24

SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
☐ Chamber B: Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
☐ Chamber C: Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.209(a)	Radiated Spurious Emissions	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)	Channel Separation	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	Compliant
§15.247(a)	20dB Bandwidth	Compliant
§15.247(b)(1)	RF Power Output	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant
§15.247(a)(1)	Frequency Hopping Sequence	Compliant
§15.247(g), (h)	Frequency Hopping System	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has an Integral antenna, fulfill the requirement of this section.

4. Frequency Hopping System Requirements

4.1 Standard Applicable

According to FCC Part 15.247(a)(1), the system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

4.2 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1MHz each; centred from 2402 to 2480MHz) in the range 2,400-2,483.5MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with a Bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for 558074 D01 15.247 Meas Guidance v05r02 and FCC Part 15.247 rule.

4.3 EUT Pseudorandom Frequency Hopping Sequence

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45 etc.


The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

5. Quantity of Hopping Channels and Channel Separation

5.1 Standard Applicable

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

5.2 Test Setup Block Diagram

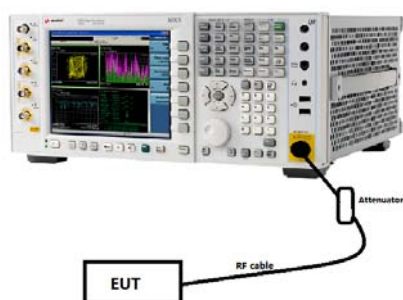

5.3 Test Procedure

According to KDB 558074 D01 v05r02 Subclause 9 and ANSI C63.10-2013 section 7.8.3, the number of hopping frequencies test method as follows.

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) $VBW \geq RBW$.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

According to DA 00-705 Section 15.247(a), the EUT shall have its hopping function enabled, the Carrier frequency separation test method as follows:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

Reference No.: WTX22X05090003W004

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

5.4 Summary of Test Results/Plots


Please refer to Appendix A

6. Dwell Time of Hopping Channel

6.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

6.2 Test Setup Block Diagram

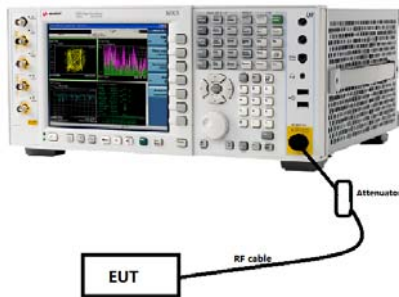

6.3 Test Procedure

According to KDB 558074 D01 v05r02 Subclause 9 and ANSI C63.10-2013 section 7.8.4, the dwell time of a hopping channel test method as follows.

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\begin{aligned} & \text{(Number of hops in the period specified in the requirements)} = \\ & \text{(number of hops on spectrum analyzer)} \times (\text{period specified in the requirements} / \text{analyzer sweep time}) \end{aligned}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation. The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

6.4 Summary of Test Results/Plots

The dwell time within a period in data mode is independent from the packet type (packet length).

The test period: $T = 0.4 \text{ Second} * 79 \text{ Channel} = 31.6 \text{ s}$

Dwell time = time slot length * (Hopping rate / Number of hopping channels) * Period


Please refer to Appendix B

7. 20dB Bandwidth

7.1 Standard Applicable

According to 15.247(a) and 15.215(c), 20dB bandwidth is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

7.2 Test Setup Block Diagram

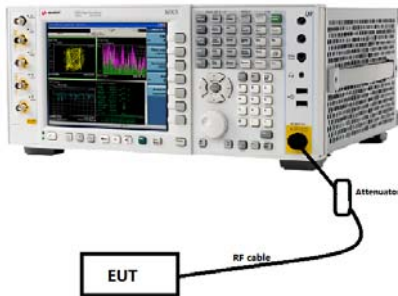

7.3 Test Procedure

According to KDB 558074 D01 v05r02 Subclause 9 and ANSI C63.10-2013 section 6.9.2, the 20dB bandwidth test method as follows.

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- The nominal IF filter bandwidth (3dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- Steps a) through c) might require iteration to adjust within the specified tolerances.
- The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30dB below the reference value.
- Set detection mode to peak and trace mode to max hold.
- Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

7.4 Summary of Test Results/Plots


Please refer to Appendix C

8. RF Output Power

8.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5MHz band: 0.125 watts.

8.2 Test Setup Block Diagram

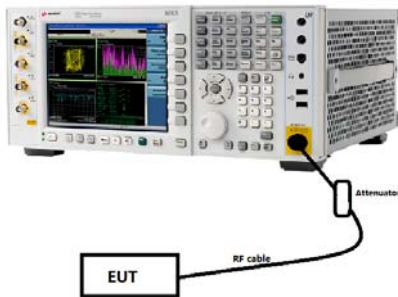

8.3 Test Procedure

According to KDB 558074 D01 v05r02 Subclause 9 and ANSI C63.10-2013 section 7.8.5, the output power test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

8.4 Summary of Test Results/Plots

Please refer to Appendix D

9. Field Strength of Spurious Emissions

9.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


9.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

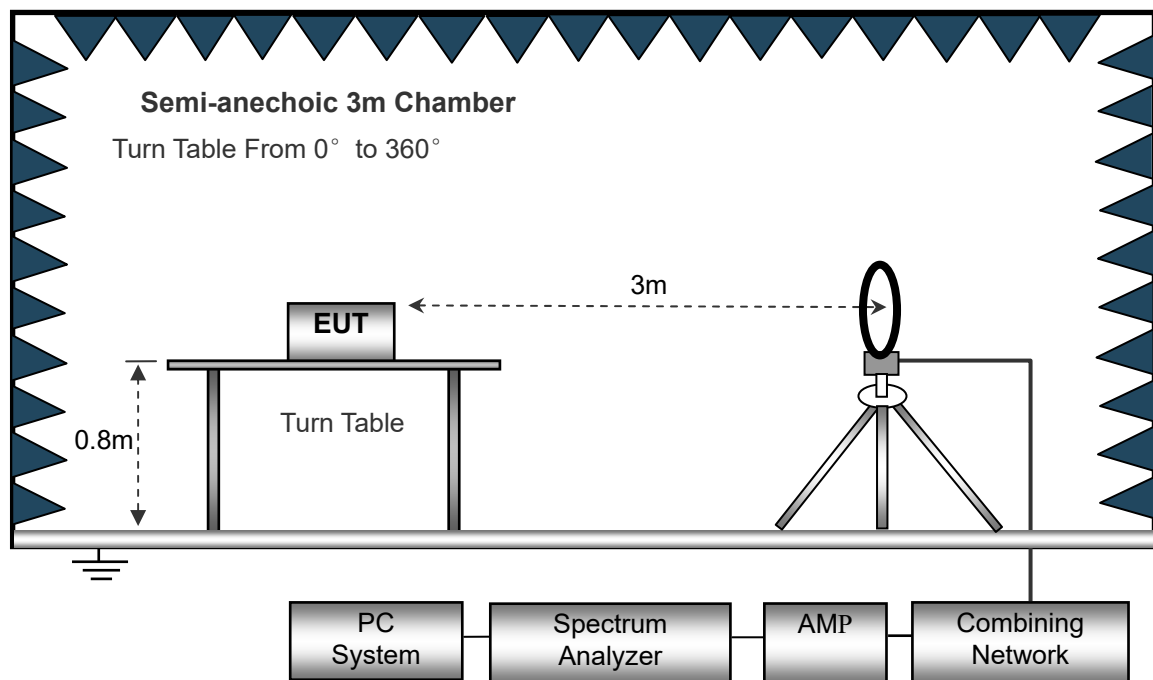

The test setup for emission measurement from 30MHz to 1GHz.

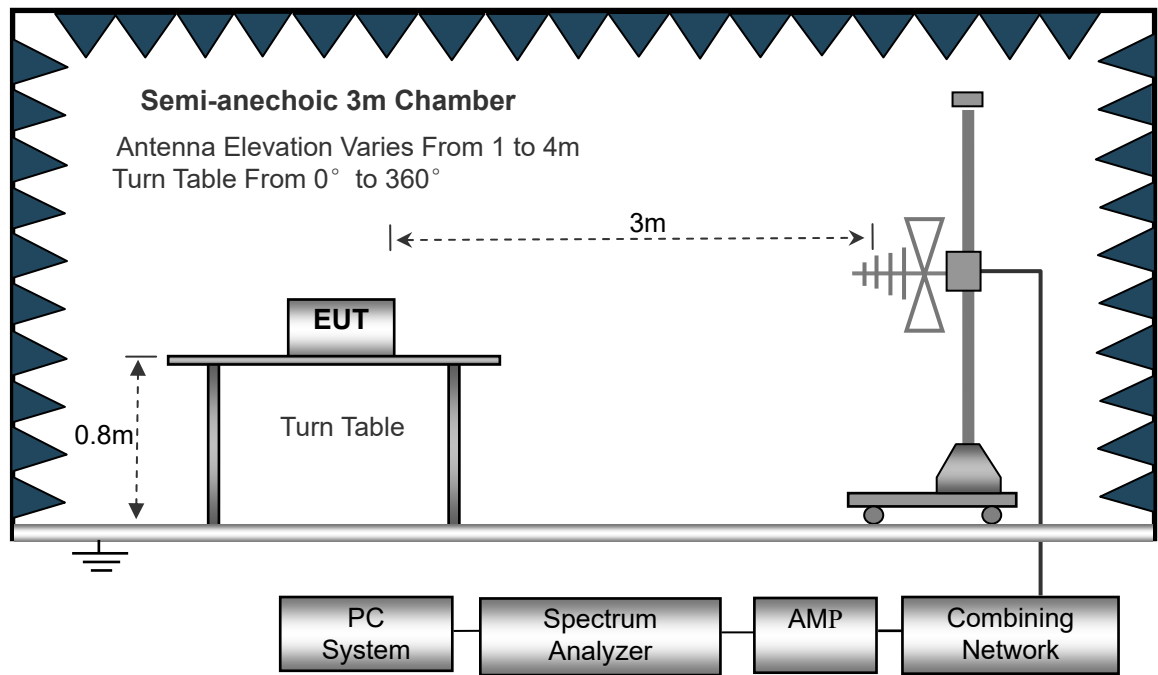

The test setup for emission measurement above 1GHz.

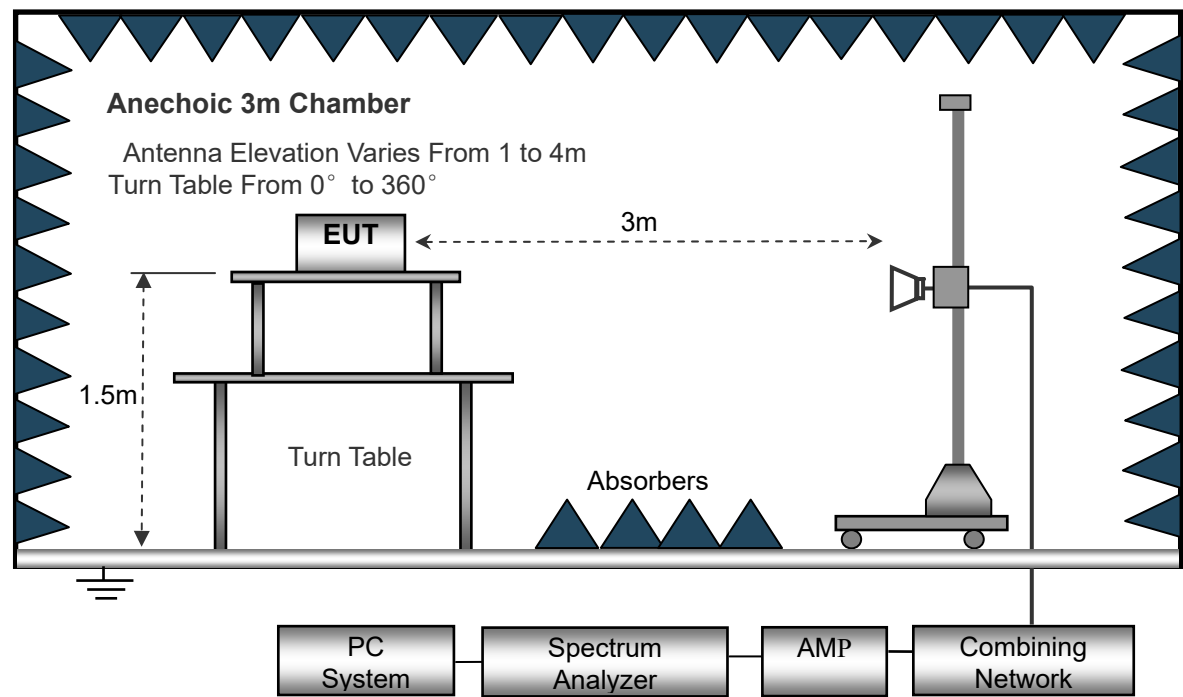

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

9.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\begin{aligned}\text{Corr. Ampl.} &= \text{Indicated Reading} + \text{Correct} \\ \text{Correct} &= \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


9.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case (GFSK) is recorded in this report.


- Spurious Emissions Below 1GHz
- MDT760

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

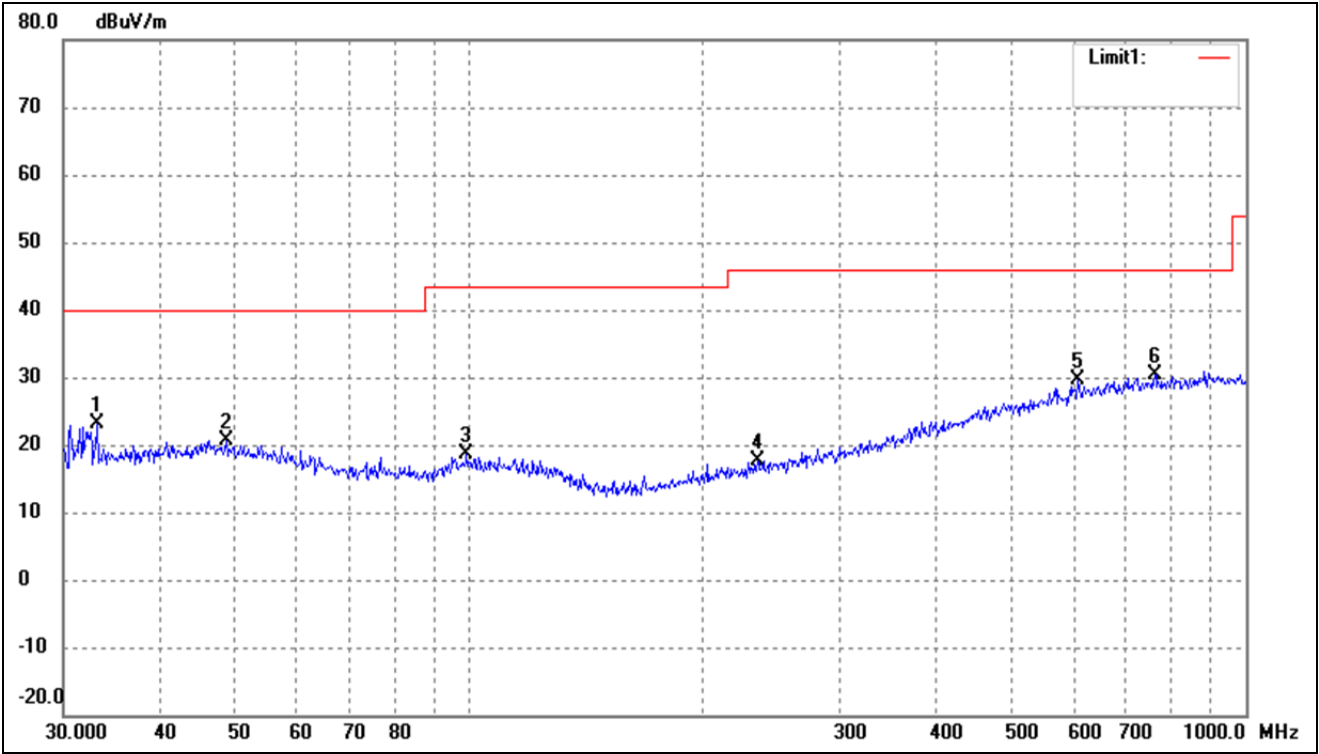


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	31.80	-8.67	23.13	40.00	-16.87	-	-	peak
2	48.6719	27.70	-6.97	20.73	40.00	-19.27	-	-	peak
3	99.1797	27.55	-8.88	18.67	43.50	-24.83	-	-	peak
4	234.9909	26.48	-8.74	17.74	46.00	-28.26	-	-	peak
5	607.7867	29.27	0.46	29.73	46.00	-16.27	-	-	peak
6	763.3757	28.59	1.85	30.44	46.00	-15.56	-	-	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

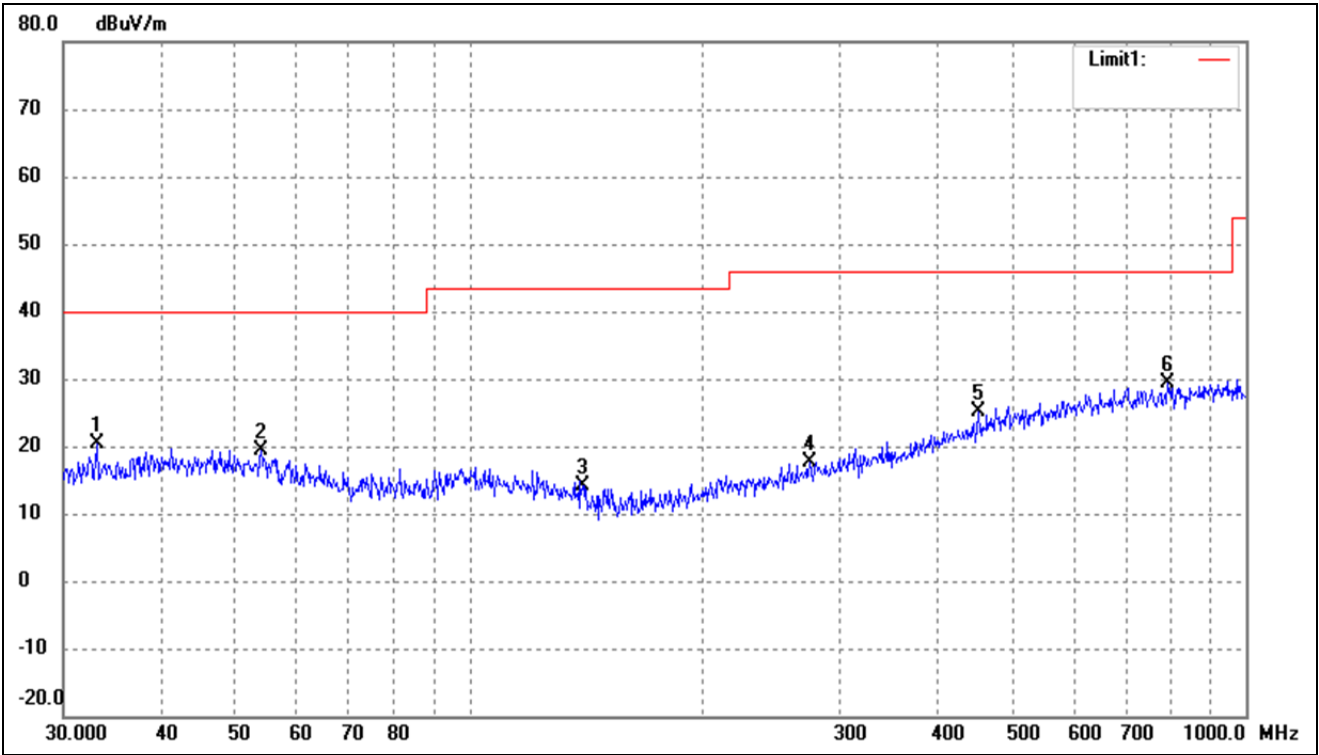


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	29.11	-8.67	20.44	40.00	-19.56	-	-	peak
2	53.8818	27.02	-7.53	19.49	40.00	-20.51	-	-	peak
3	139.8508	26.48	-12.26	14.22	43.50	-29.28	-	-	peak
4	274.1939	25.33	-7.65	17.68	46.00	-28.32	-	-	peak
5	452.7197	27.66	-2.49	25.17	46.00	-20.83	-	-	peak
6	793.3960	27.22	2.05	29.27	46.00	-16.73	-	-	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

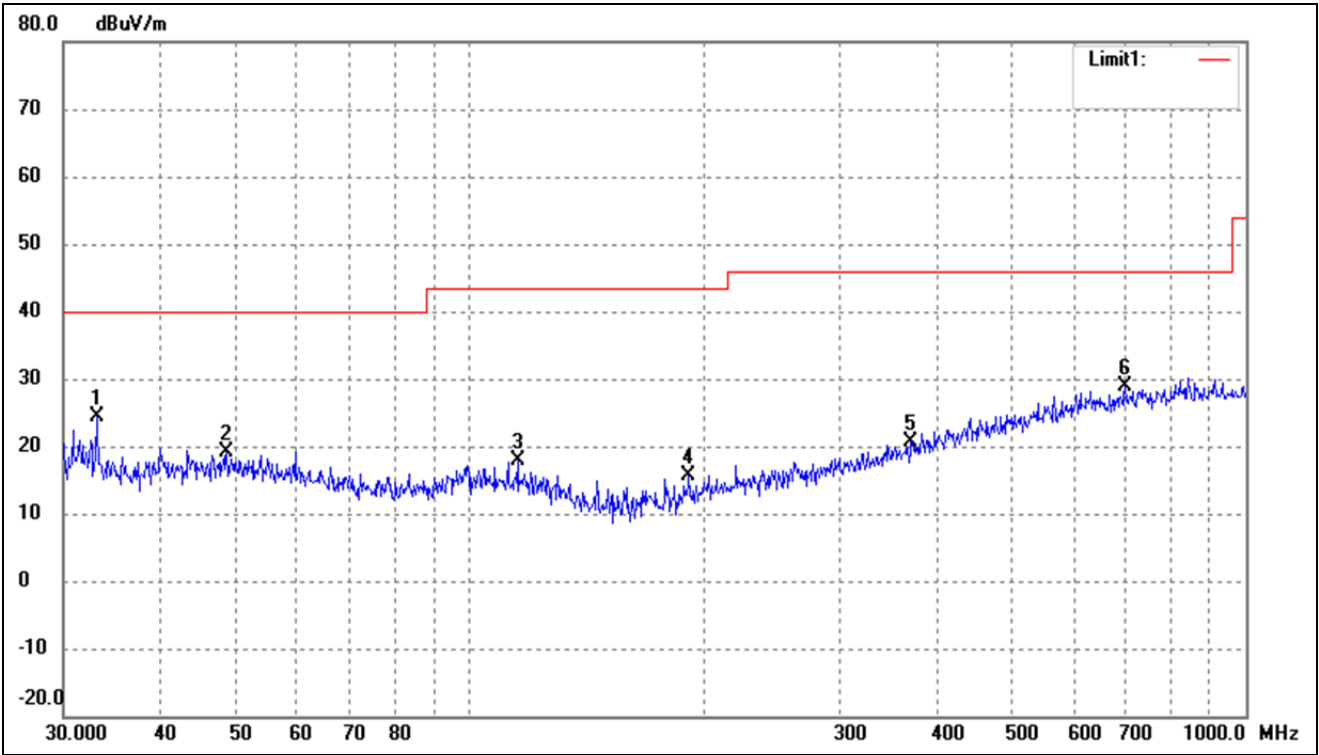


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.0950	33.12	-8.69	24.43	40.00	-15.57	-	-	peak
2	48.6719	26.15	-6.97	19.18	40.00	-20.82	-	-	peak
3	115.3205	27.08	-9.26	17.82	43.50	-25.68	-	-	peak
4	191.7450	25.72	-9.98	15.74	43.50	-27.76	-	-	peak
5	370.7023	25.51	-4.78	20.73	46.00	-25.27	-	-	peak
6	699.3046	27.54	1.42	28.96	46.00	-17.04	-	-	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

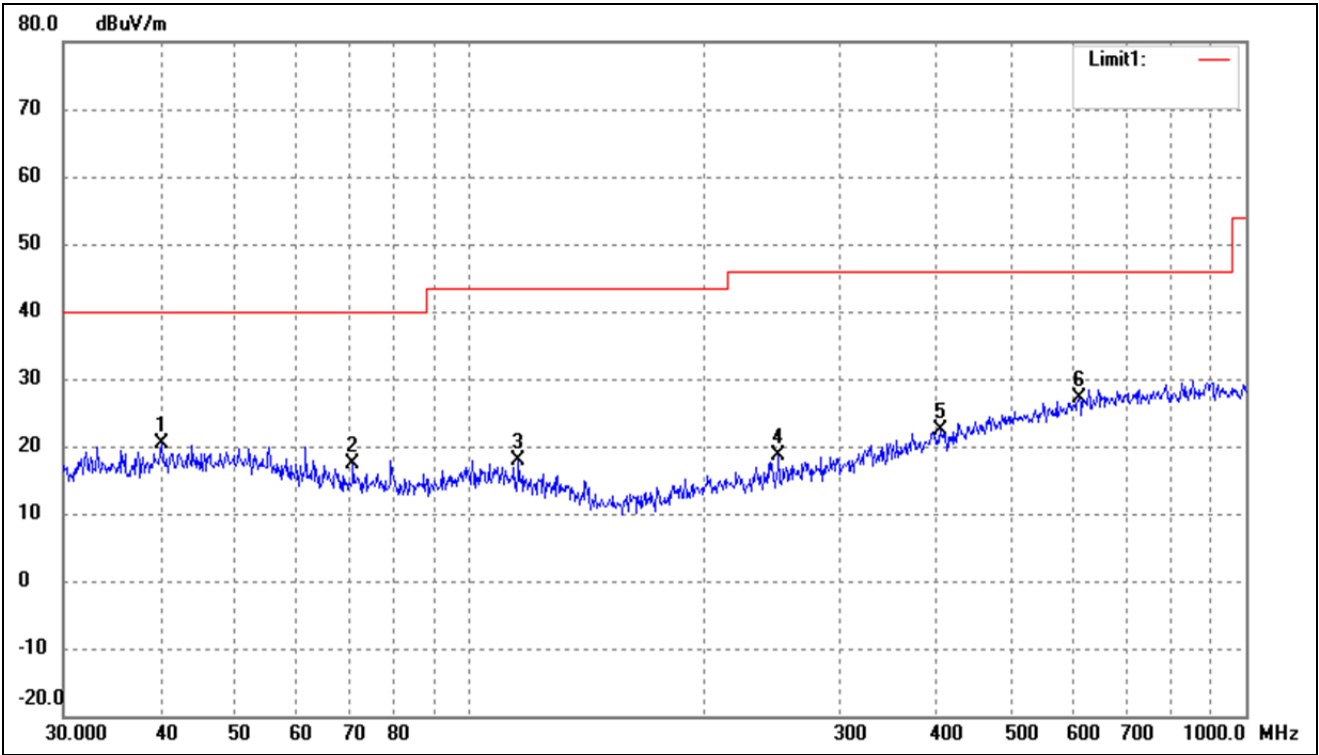


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.1347	27.48	-7.00	20.48	40.00	-19.52	-	-	peak
2	70.8315	27.53	-10.21	17.32	40.00	-22.68	-	-	peak
3	115.7256	27.23	-9.29	17.94	43.50	-25.56	-	-	peak
4	250.3012	26.89	-8.31	18.58	46.00	-27.42	-	-	peak
5	404.6665	26.26	-3.76	22.50	46.00	-23.50	-	-	peak
6	609.9217	26.59	0.48	27.07	46.00	-18.93	-	-	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

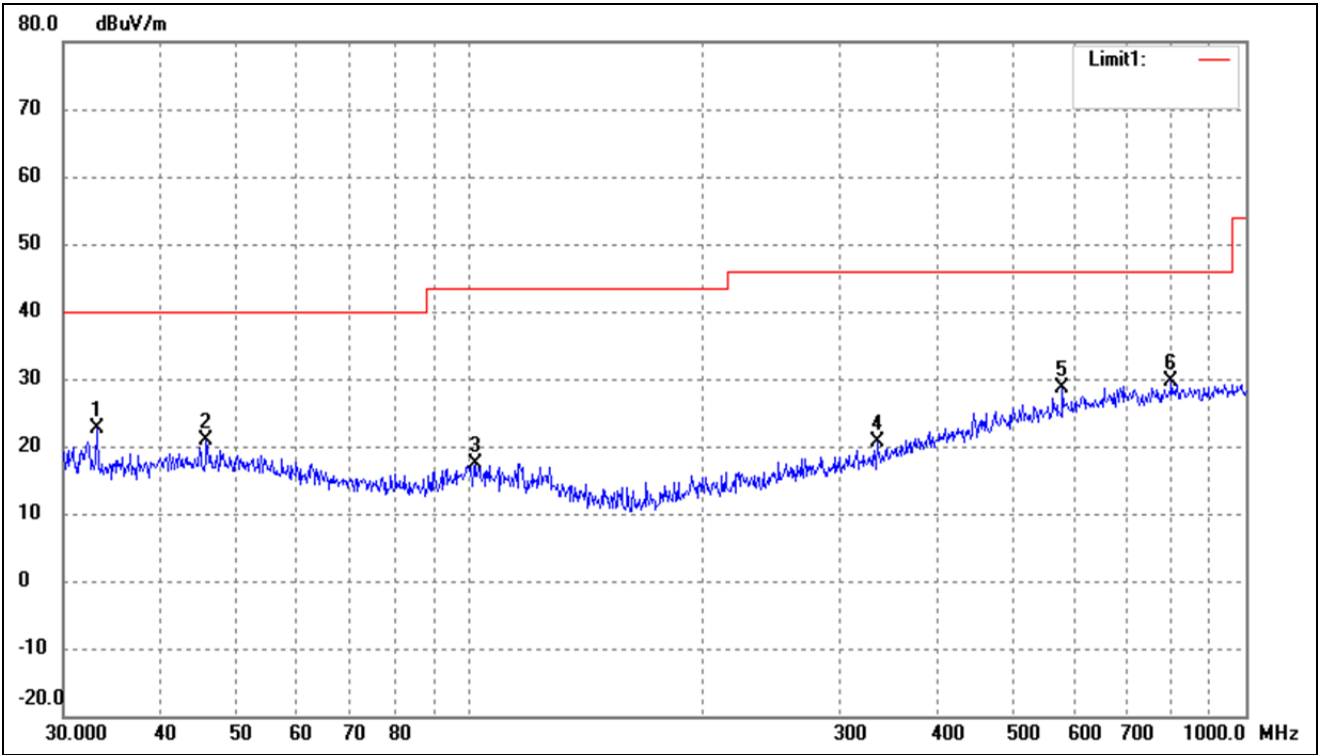

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.0950	31.35	-8.69	22.66	40.00	-17.34	-	-	peak
2	45.8553	27.77	-6.98	20.79	40.00	-19.21	-	-	peak
3	101.6443	26.11	-8.75	17.36	43.50	-26.14	-	-	peak
4	334.8589	26.38	-5.87	20.51	46.00	-25.49	-	-	peak
5	580.7026	28.48	0.05	28.53	46.00	-17.47	-	-	peak
6	801.7863	27.46	2.10	29.56	46.00	-16.44	-	-	peak


Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

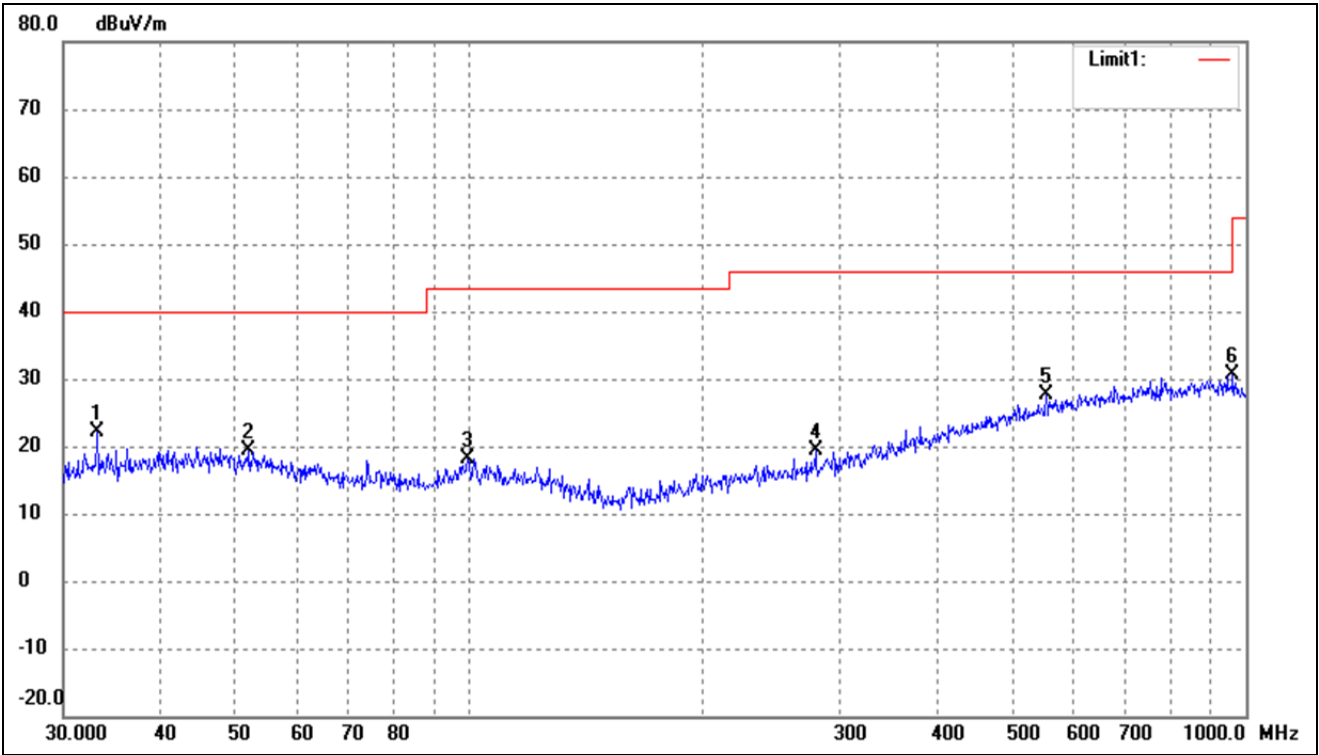

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	30.72	-8.67	22.05	40.00	-17.95	-	-	peak
2	52.0251	26.62	-7.25	19.37	40.00	-20.63	-	-	peak
3	99.5281	26.95	-8.81	18.14	43.50	-25.36	-	-	peak
4	279.0436	26.91	-7.52	19.39	46.00	-26.61	-	-	peak
5	552.8833	27.98	-0.42	27.56	46.00	-18.44	-	-	peak
6	962.1623	28.08	2.54	30.62	54.00	-23.38	-	-	peak


➤ MDT860

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

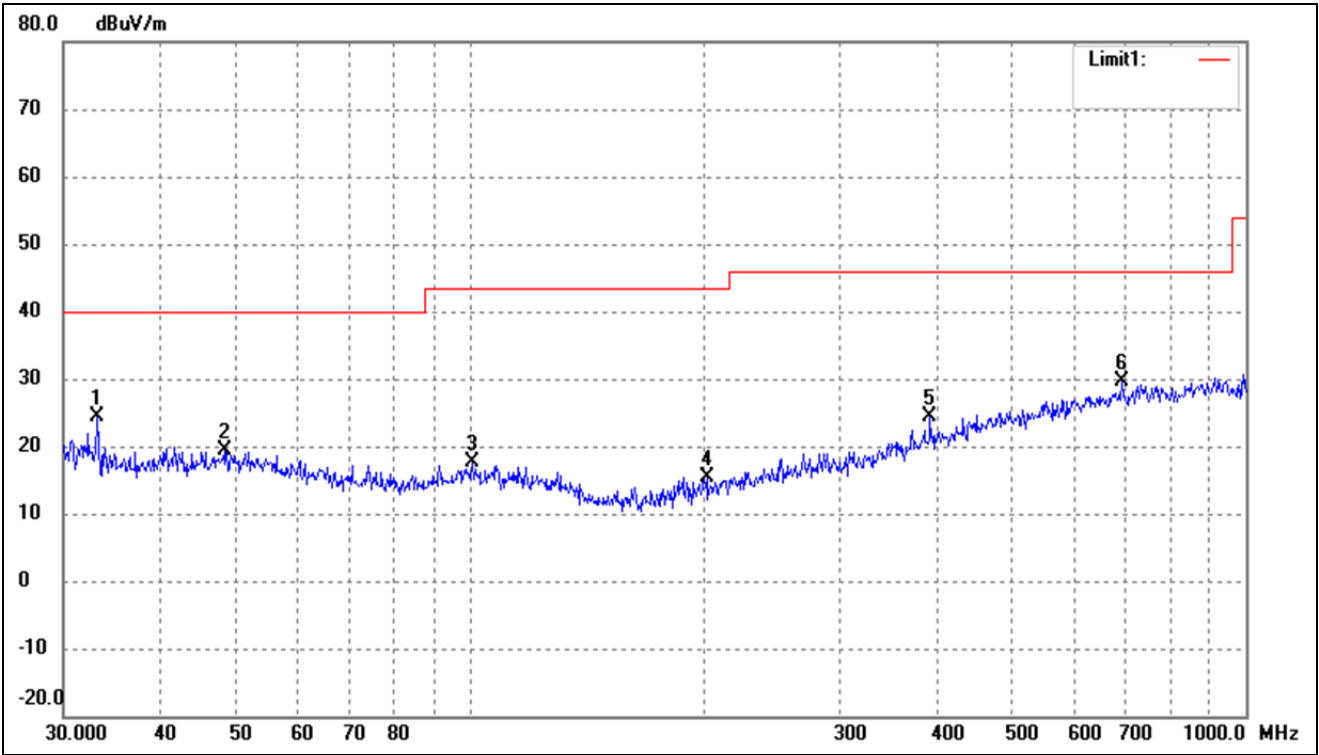


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	33.12	-8.67	24.45	40.00	-15.55	-	-	peak
2	48.5016	26.36	-6.97	19.39	40.00	-20.61	-	-	peak
3	100.9340	26.31	-8.74	17.57	43.50	-25.93	-	-	peak
4	202.1005	25.10	-9.65	15.45	43.50	-28.05	-	-	peak
5	392.0951	28.41	-4.13	24.28	46.00	-21.72	-	-	peak
6	691.9867	28.32	1.34	29.66	46.00	-16.34	-	-	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

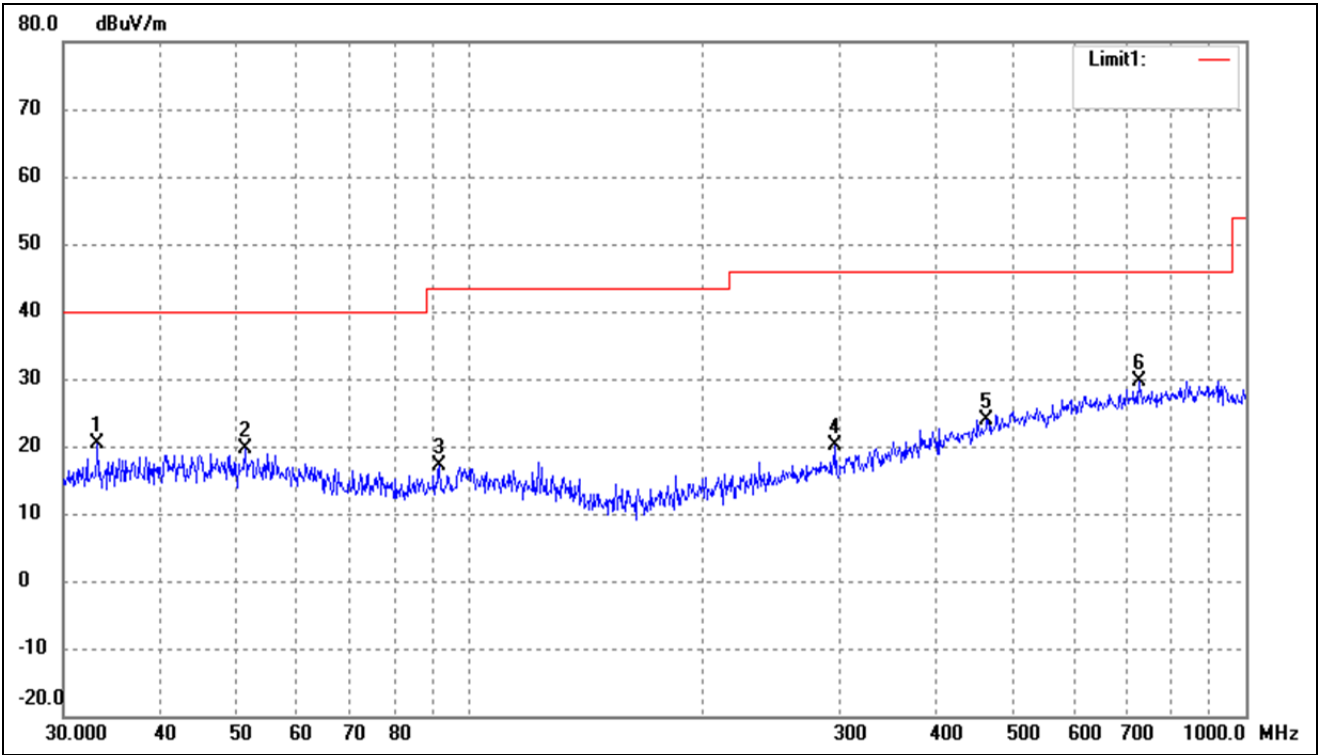


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	29.05	-8.67	20.38	40.00	-19.62	-	-	peak
2	51.4807	26.74	-7.19	19.55	40.00	-20.45	-	-	peak
3	91.4949	27.38	-10.31	17.07	43.50	-26.43	-	-	peak
4	296.1836	27.26	-7.06	20.20	46.00	-25.80	-	-	peak
5	463.9696	26.11	-2.21	23.90	46.00	-22.10	-	-	peak
6	729.3583	28.03	1.63	29.66	46.00	-16.34	-	-	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

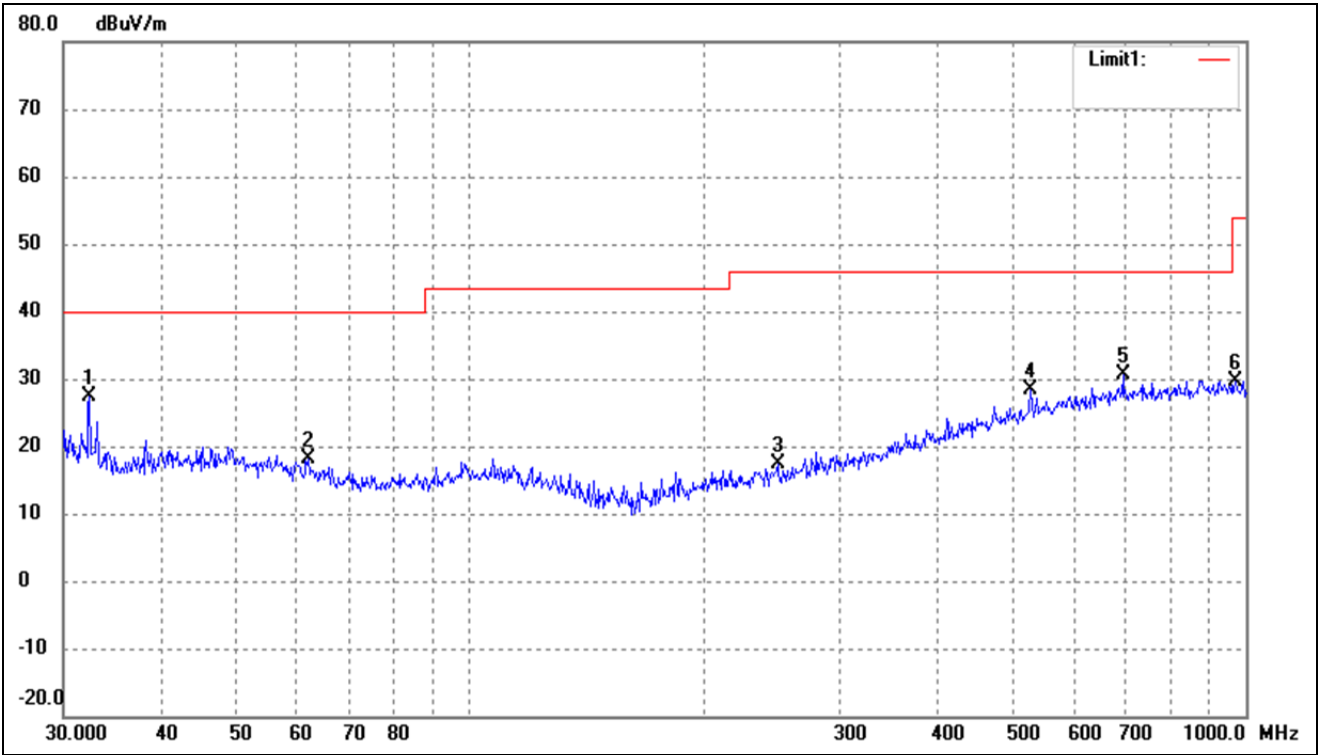


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.4059	36.31	-8.85	27.46	40.00	-12.54	-	-	peak
2	61.9951	26.84	-8.78	18.06	40.00	-21.94	-	-	peak
3	249.4250	25.77	-8.32	17.45	46.00	-28.55	-	-	peak
4	528.2458	29.31	-0.83	28.48	46.00	-17.52	-	-	peak
5	694.4174	29.19	1.37	30.56	46.00	-15.44	-	-	peak
6	968.9338	27.08	2.52	29.60	54.00	-24.40	-	-	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

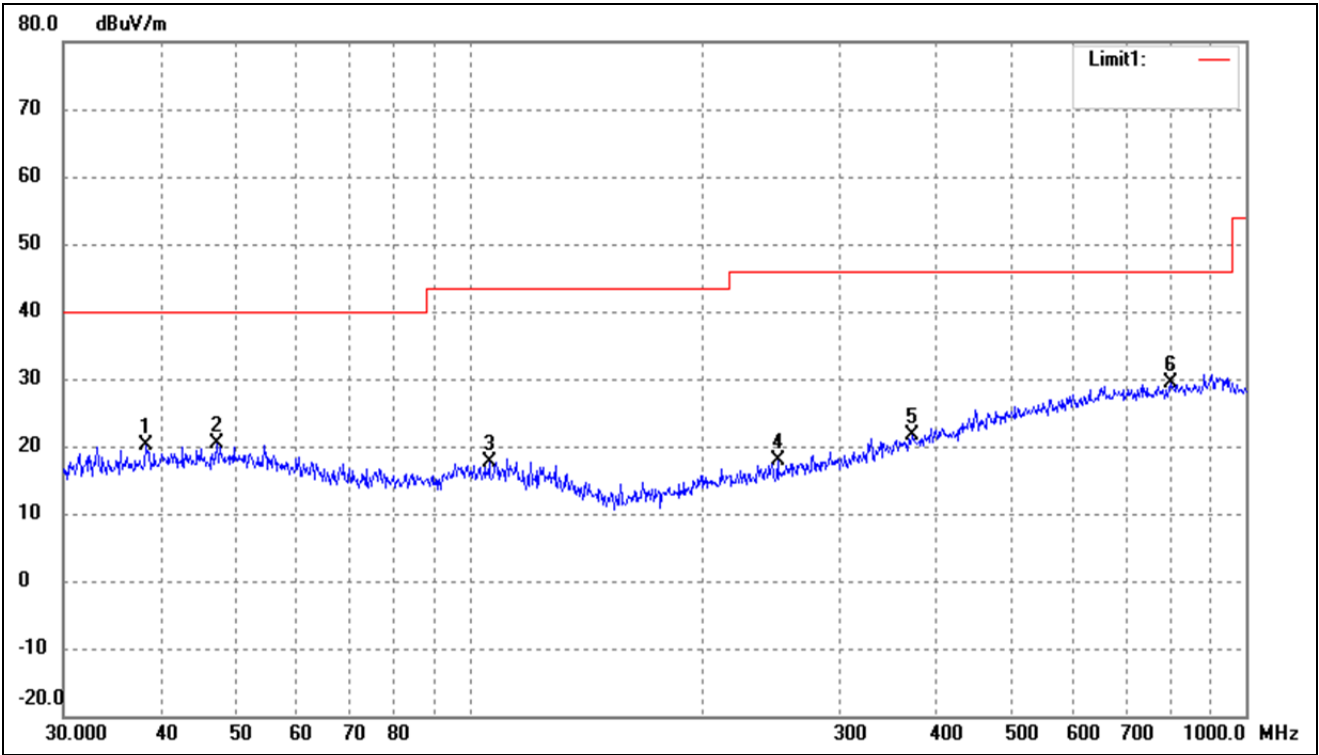


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.3462	27.54	-7.40	20.14	40.00	-19.86	-	-	peak
2	47.3255	27.33	-6.97	20.36	40.00	-19.64	-	-	peak
3	106.0126	26.41	-8.82	17.59	43.50	-25.91	-	-	peak
4	249.4250	26.30	-8.32	17.98	46.00	-28.02	-	-	peak
5	372.0045	26.35	-4.74	21.61	46.00	-24.39	-	-	peak
6	798.9797	27.34	2.09	29.43	46.00	-16.57	-	-	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

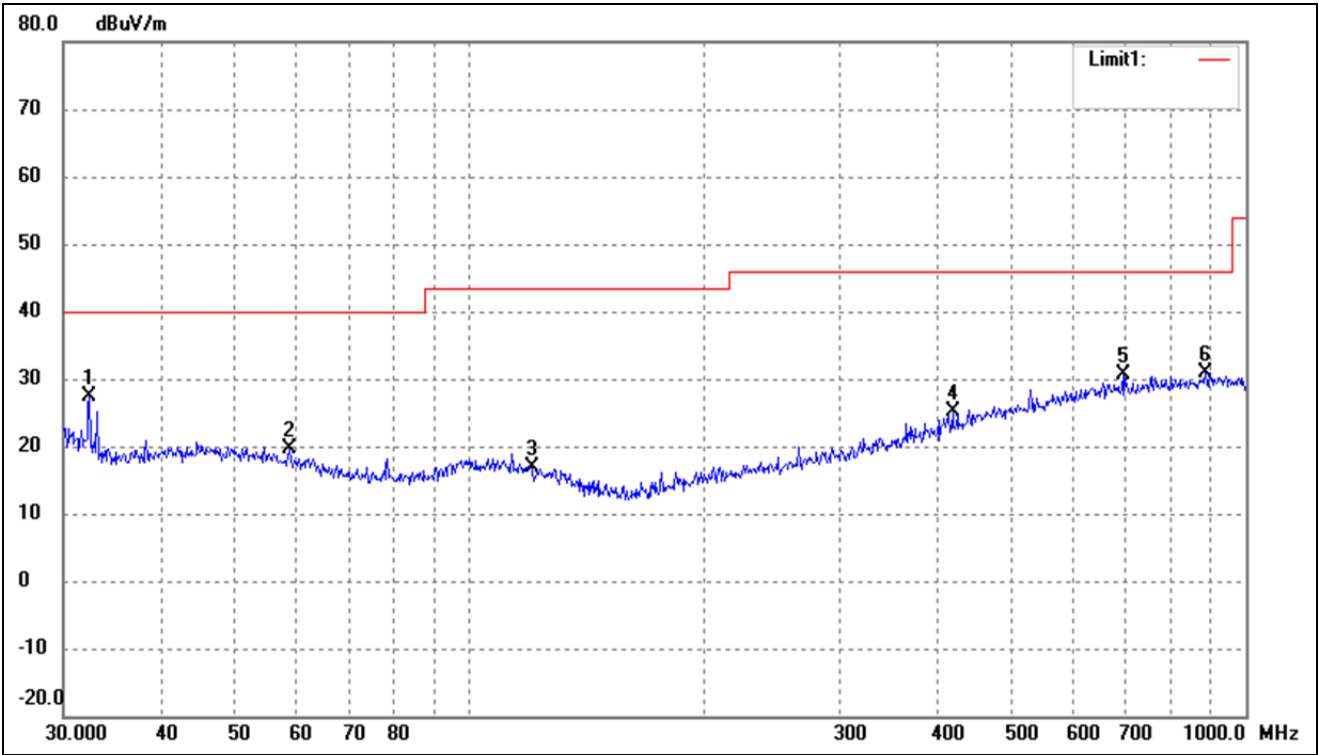

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.4059	36.31	-8.85	27.46	40.00	-12.54	-	-	peak
2	58.6126	27.97	-8.22	19.75	40.00	-20.25	-	-	peak
3	120.2766	26.58	-9.65	16.93	43.50	-26.57	-	-	peak
4	419.1081	28.45	-3.38	25.07	46.00	-20.93	-	-	peak
5	694.4174	29.19	1.37	30.56	46.00	-15.44	-	-	peak
6	887.6099	28.21	2.66	30.87	46.00	-15.13	-	-	peak

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

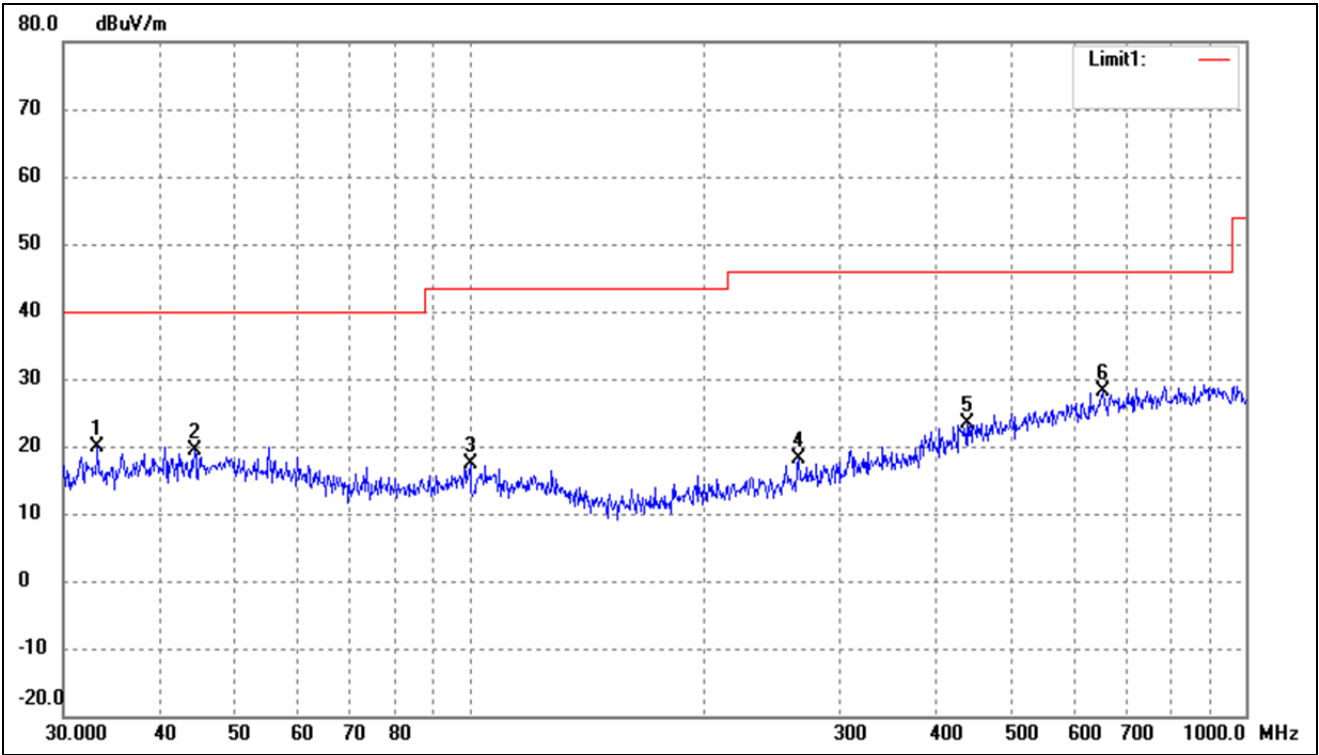

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	33.2112	28.49	-8.67	19.82	40.00	-20.18	-	-	peak
2	44.2752	26.37	-6.98	19.39	40.00	-20.61	-	-	peak
3	100.2286	26.20	-8.73	17.47	43.50	-26.03	-	-	peak
4	265.6757	26.08	-7.88	18.20	46.00	-27.80	-	-	peak
5	437.1199	26.29	-2.90	23.39	46.00	-22.61	-	-	peak
6	654.2318	27.07	0.96	28.03	46.00	-17.97	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

➤ Spurious Emissions Above 1GHz

MDT760

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	59.35	-6.13	53.22	74	-20.78	H	PK
4804	41.61	-6.13	35.48	54	-18.52	H	AV
7206	58.52	-1.64	56.88	74	-17.12	H	PK
7206	41.05	-1.64	39.41	54	-14.59	H	AV
4804	55.61	-6.13	49.48	74	-24.52	V	PK
4804	40.54	-6.13	34.41	54	-19.59	V	AV
7206	58.73	-1.64	57.09	74	-16.91	V	PK
7206	39.9	-1.64	38.26	54	-15.74	V	AV
Middle Channel-2441MHz							
4882	59.24	-5.93	53.31	74	-20.69	H	PK
4882	39.42	-5.93	33.49	54	-20.51	H	AV
7323	61.68	-1.58	60.1	74	-13.9	H	PK
7323	38.97	-1.58	37.39	54	-16.61	H	AV
4882	58.04	-5.93	52.11	74	-21.89	V	PK
4882	40.25	-5.93	34.32	54	-19.68	V	AV
7323	59.16	-1.58	57.58	74	-16.42	V	PK
7323	41.45	-1.58	39.87	54	-14.13	V	AV
High Channel-2480MHz							
4960	58.2	-5.71	52.49	74	-21.51	H	PK
4960	38.89	-5.71	33.18	54	-20.82	H	AV
7440	59.38	-1.52	57.86	74	-16.14	H	PK
7440	39.54	-1.52	38.02	54	-15.98	H	AV
4960	59.03	-5.71	53.32	74	-20.68	V	PK
4960	41.84	-5.71	36.13	54	-17.87	V	AV
7440	60.41	-1.52	58.89	74	-15.11	V	PK
7440	38.67	-1.52	37.15	54	-16.85	V	AV

MDT860

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	60.33	-6.13	54.2	74	-19.8	H	PK
4804	43.16	-6.13	37.03	54	-16.97	H	AV
7206	58.16	-1.64	56.52	74	-17.48	H	PK
7206	40.37	-1.64	38.73	54	-15.27	H	AV
4804	55.32	-6.13	49.19	74	-24.81	V	PK
4804	39.51	-6.13	33.38	54	-20.62	V	AV
7206	55.44	-1.64	53.8	74	-20.2	V	PK
7206	39.3	-1.64	37.66	54	-16.34	V	AV
Middle Channel-2441MHz							
4882	61.5	-5.93	55.57	74	-18.43	H	PK
4882	40.48	-5.93	34.55	54	-19.45	H	AV
7323	60.74	-1.58	59.16	74	-14.84	H	PK
7323	39.89	-1.58	38.31	54	-15.69	H	AV
4882	58.14	-5.93	52.21	74	-21.79	V	PK
4882	38.21	-5.93	32.28	54	-21.72	V	AV
7323	61.63	-1.58	60.05	74	-13.95	V	PK
7323	40.12	-1.58	38.54	54	-15.46	V	AV
High Channel-2480MHz							
4960	59.57	-5.71	53.86	74	-20.14	H	PK
4960	38.26	-5.71	32.55	54	-21.45	H	AV
7440	61.63	-1.52	60.11	74	-13.89	H	PK
7440	39.56	-1.52	38.04	54	-15.96	H	AV
4960	60.85	-5.71	55.14	74	-18.86	V	PK
4960	39.08	-5.71	33.37	54	-20.63	V	AV
7440	59.07	-1.52	57.55	74	-16.45	V	PK
7440	41.01	-1.52	39.49	54	-14.51	V	AV

Note: 1. Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

2. Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

10. Out of Band Emissions

10.1 Standard Applicable

According to §15.247 (d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

10.2 Test Procedure

According to ANSI C63.10-2013 section 7.8.6, the Band-edge measurements for RF conducted emissions test method as follows.

- a) Connect the EMI receiver or spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described in step e) (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).
- b) Set the EUT to the lowest frequency channel (for the hopping on test, the hopping sequence shall include the lowest frequency channel).
- c) Set the EUT to operate at maximum output power and 100% duty cycle, or equivalent “normal mode of operation” as specified in 6.10.3.
- d) If using the radiated method, then use the applicable procedure(s) of 6.4, 6.5, or 6.6, and orient the EUT and measurement antenna positions to produce the highest emission level.
- e) Perform the test as follows:
 - 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
 - 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW/RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
 - 3) Attenuation: Auto (at least 10dB preferred).
 - 4) Sweep time: Coupled.
 - 5) Resolution bandwidth: 100kHz.
 - 6) Video bandwidth: 300kHz.
 - 7) Detector: Peak.
 - 8) Trace: Max hold.
- f) Allow the trace to stabilize. For the test with the hopping function turned ON, this can take several minutes to achieve a reasonable probability of intercepting any emissions due to oscillator overshoot.

- g) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- h) Repeat step c) through step e) for every applicable modulation.
- i) Set the EUT to the highest frequency channel (for the hopping on test, the hopping sequence shall include the highest frequency channel) and repeat step c) through step d).
- j) The band-edge measurement shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Restricted-band band-edge test method please refers to ANSI C63.10-2013 section 6.10.5. The emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated band-edge measurements.

According to ANSI C63.10-2013 section 7.8.8, Conducted spurious emissions shall be measured for the transmit frequency, per 5.5 and 5.6, and at the maximum transmit powers.

Connect the primary antenna port through an attenuator to the spectrum analyzer input; in the results, account for all losses between the unlicensed wireless device output and the spectrum analyzer. The instrument shall span 30 MHz to 10 times the operating frequency in GHz, with a resolution bandwidth of 100 kHz, video bandwidth of 300 kHz, and a coupled sweep time with a peak detector. The band 30 MHz to the highest frequency may be split into smaller spans, as long as the entire spectrum is covered.


10.3 Summary of Test Results/Plots

Note: All test modes (different data rate and different modulation) are performed, but only the worst case (GFSK) is recorded in this report.

➤ Radiated test


MDT760

Test Channel	Low	Polarity:	Vertical (worst case)
--------------	-----	-----------	-----------------------

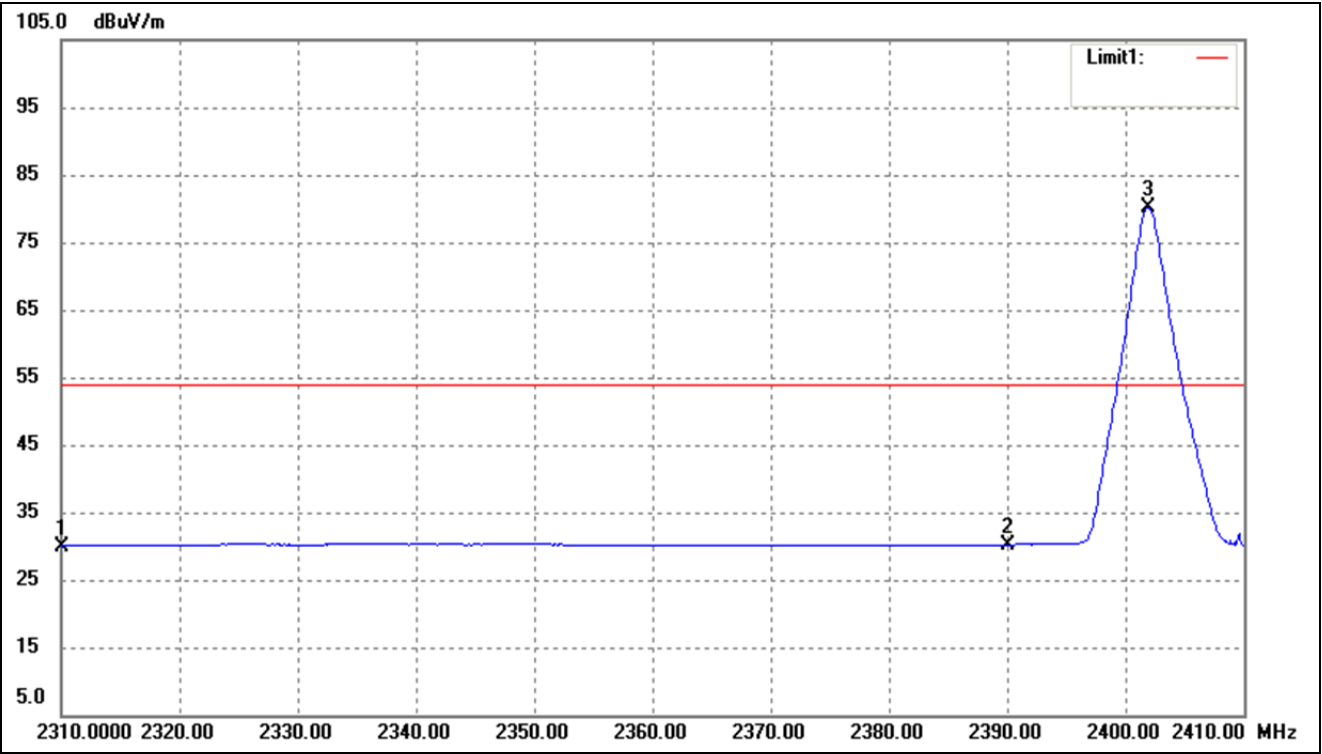

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	39.66	-9.66	30.00	54.00	-24.00	Average Detector
	2310.000	52.16	-9.66	42.50	74.00	-31.50	Peak Detector
2	2390.000	39.72	-9.50	30.22	54.00	-23.78	Average Detector
	2390.000	53.54	-9.50	44.04	74.00	-29.96	Peak Detector
3	2401.900	89.70	-9.48	80.22	/	/	Average Detector
	2401.900	105.84	-9.48	96.36	/	/	Peak Detector


Test Channel	High	Polarity:	Vertical (worst case)
--------------	------	-----------	-----------------------

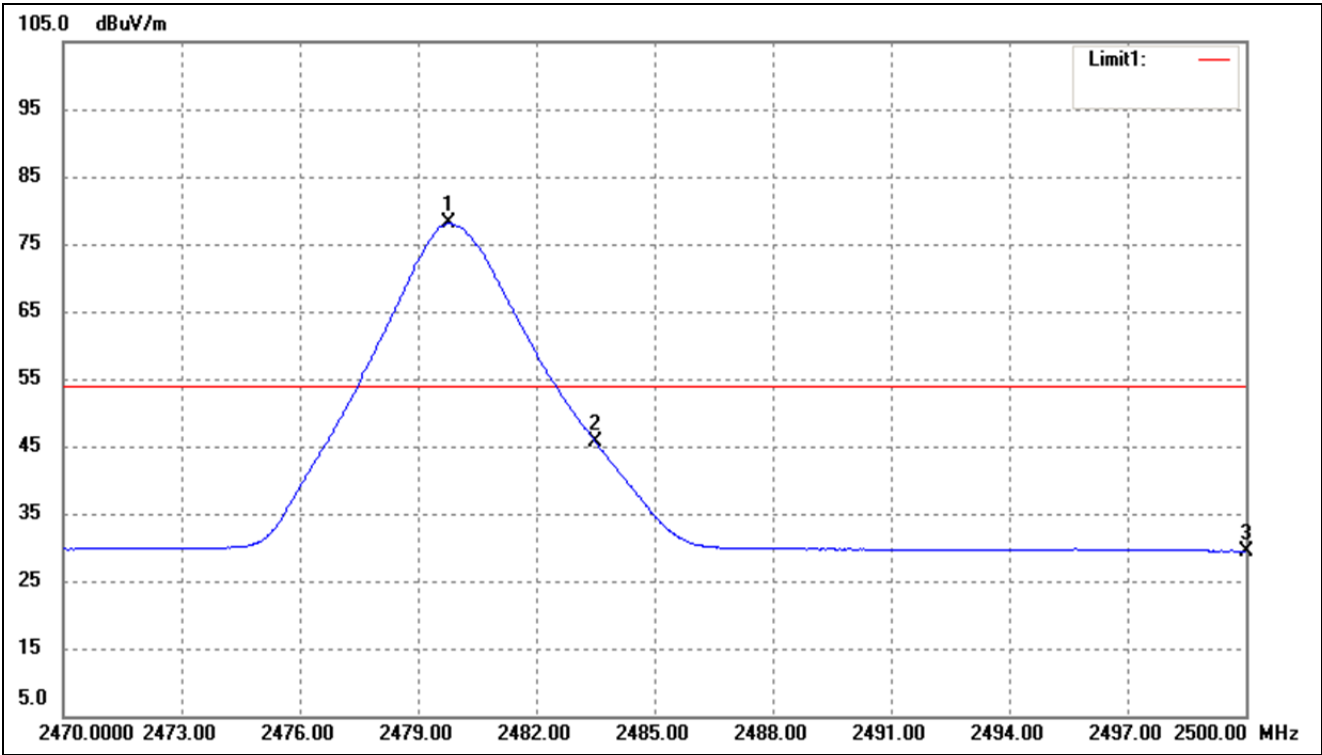

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.780	87.50	-9.32	78.18	/	/	Average Detector
	2480.110	102.98	-9.32	93.66	/	/	Peak Detector
2	2483.500	54.94	-9.31	45.63	54.00	-8.37	Average Detector
	2483.500	64.08	-9.31	54.77	74.00	-19.23	Peak Detector
3	2500.000	38.71	-9.28	29.43	54.00	-24.57	Average Detector
	2500.000	52.68	-9.28	43.40	74.00	-30.60	Peak Detector


MDT860

Test Channel	Low	Polarity:	Vertical (worst case)
--------------	-----	-----------	-----------------------

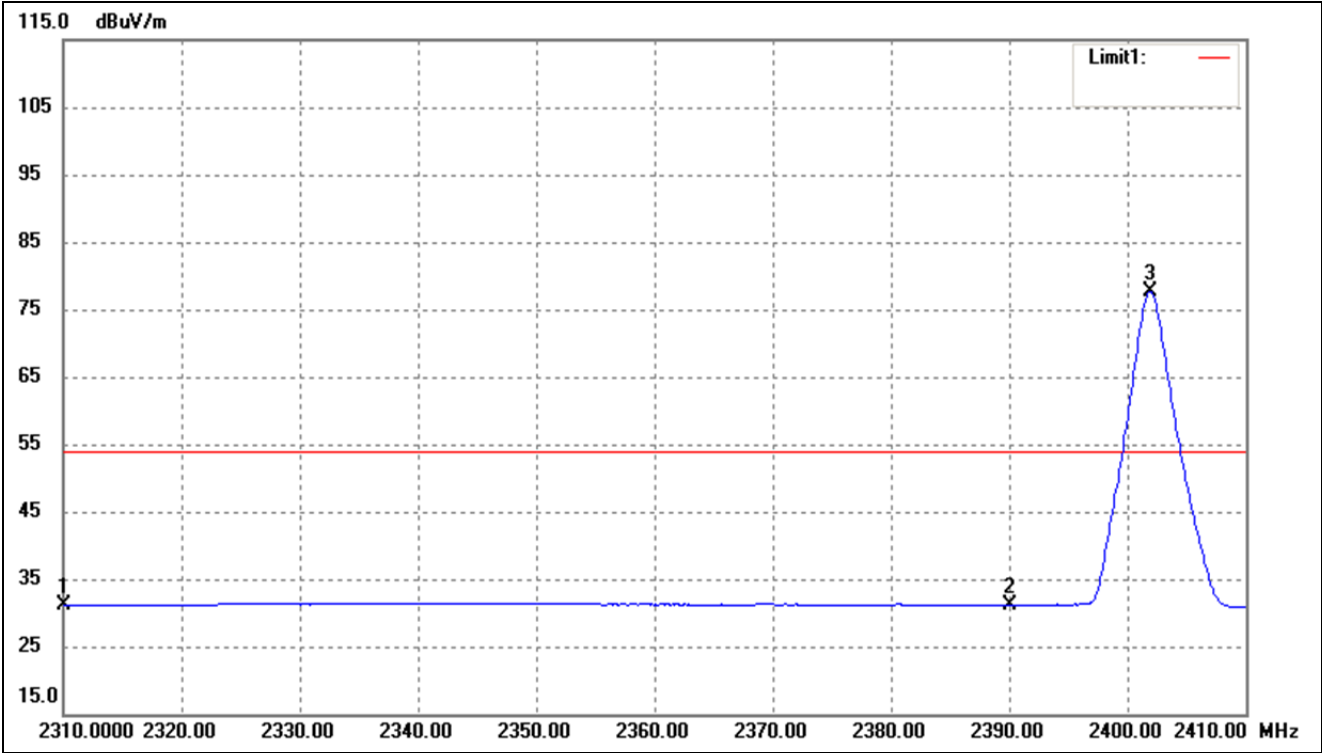

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.75	-9.66	31.09	54.00	-22.91	Average Detector
	2310.000	53.76	-9.66	44.10	74.00	-29.90	Peak Detector
2	2390.000	40.61	-9.50	31.11	54.00	-22.89	Average Detector
	2390.000	53.62	-9.50	44.12	74.00	-29.88	Peak Detector
3	2401.900	87.12	-9.48	77.64	/	/	Average Detector
	2402.200	102.73	-9.47	93.26	/	/	Peak Detector

Test Channel	High	Polarity:	Vertical (worst case)
--------------	------	-----------	-----------------------

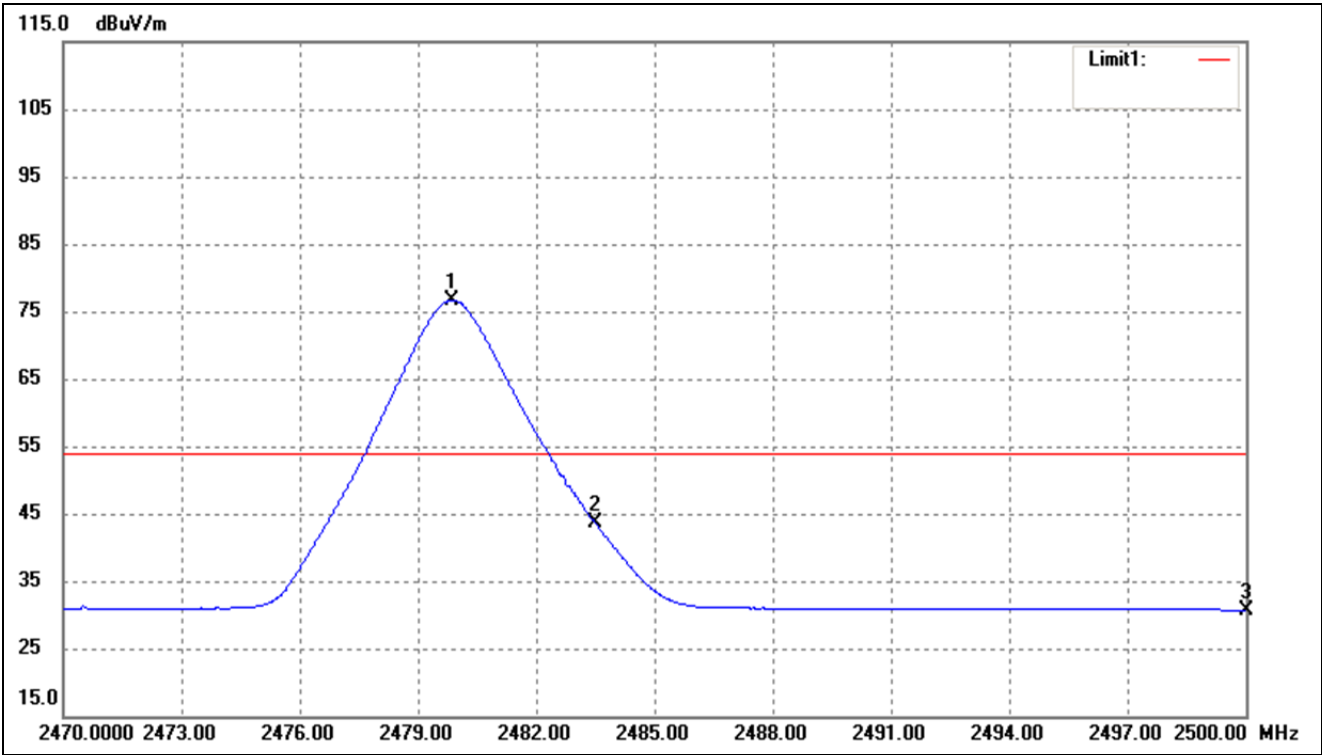

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.870	86.05	-9.32	76.73	/	/	Average Detector
	2479.990	100.53	-9.32	91.21	/	/	Peak Detector
2	2483.500	52.87	-9.31	43.56	54.00	-10.44	Average Detector
	2483.500	61.45	-9.31	52.14	74.00	-21.86	Peak Detector
3	2500.000	40.03	-9.28	30.75	54.00	-23.25	Average Detector
	2500.000	52.47	-9.28	43.19	74.00	-30.81	Peak Detector

Note: Average measurement was not performed if peak level is lower than average limit(54dBuV/m) for above 1GHz.

➤ Conducted test
Please refer to Appendix E

11. Conducted Emissions


11.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

11.2 Basic Test Setup Block Diagram

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

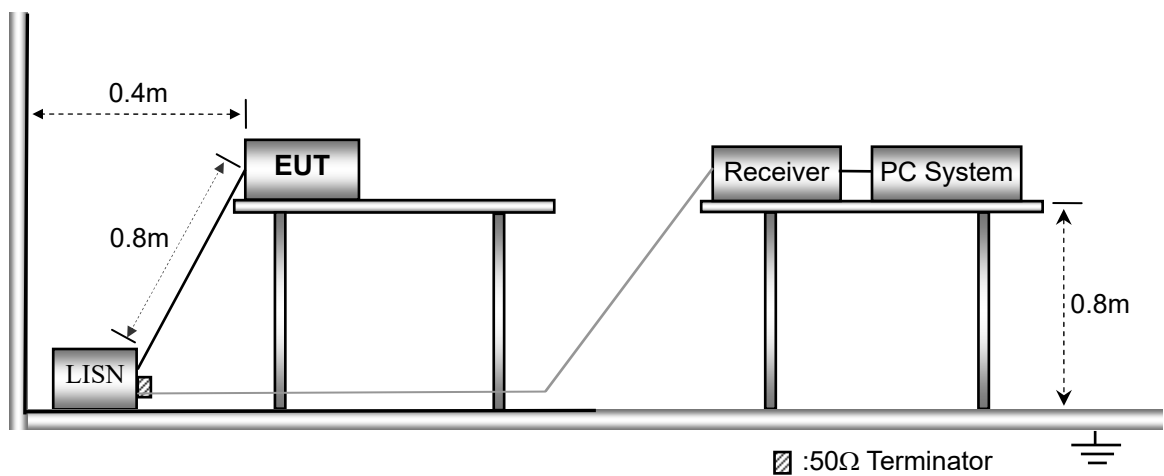

11.3 Test Receiver Setup


During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

11.4 Summary of Test Results/Plots


MDT760

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

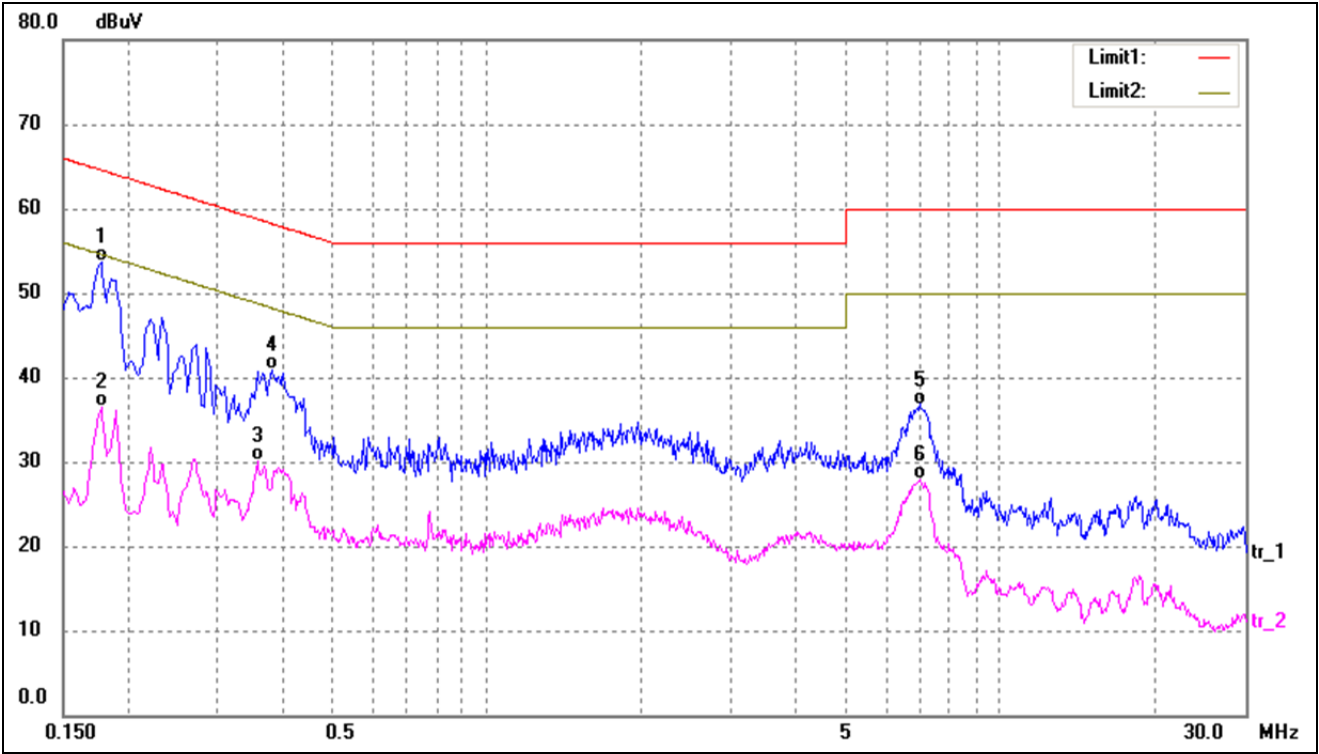

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1780	43.46	10.26	53.72	64.57	-10.85	QP
2	0.1780	26.32	10.26	36.58	54.57	-17.99	AVG
3	0.3580	19.83	10.25	30.08	48.77	-18.69	AVG
4	0.3820	30.74	10.23	40.97	58.23	-17.26	QP
5	6.9620	26.55	10.25	36.80	60.00	-23.20	QP
6	7.0020	17.60	10.25	27.85	50.00	-22.15	AVG


Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

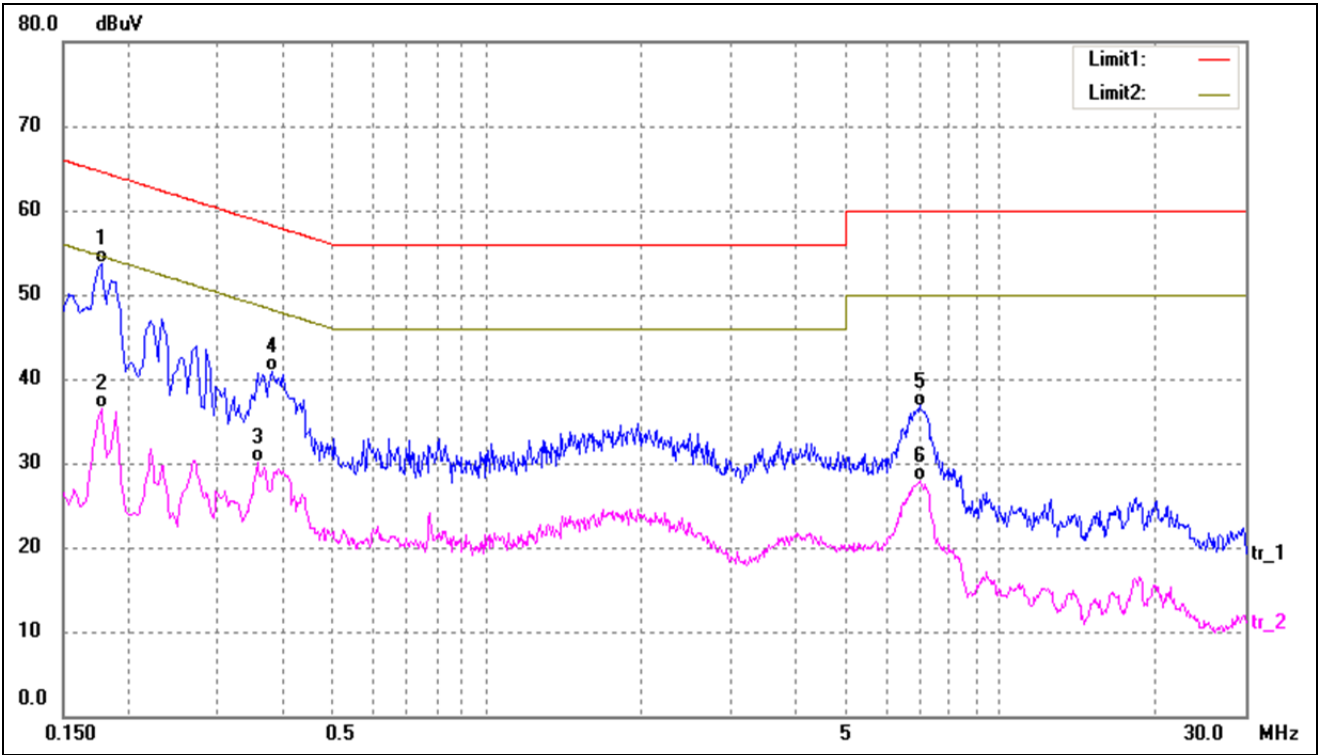

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1780	43.46	10.26	53.72	64.57	-10.85	QP
2	0.1780	26.32	10.26	36.58	54.57	-17.99	AVG
3	0.3580	19.83	10.25	30.08	48.77	-18.69	AVG
4	0.3820	30.74	10.23	40.97	58.23	-17.26	QP
5	6.9620	26.55	10.25	36.80	60.00	-23.20	QP
6	7.0020	17.60	10.25	27.85	50.00	-22.15	AVG


MDT860

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

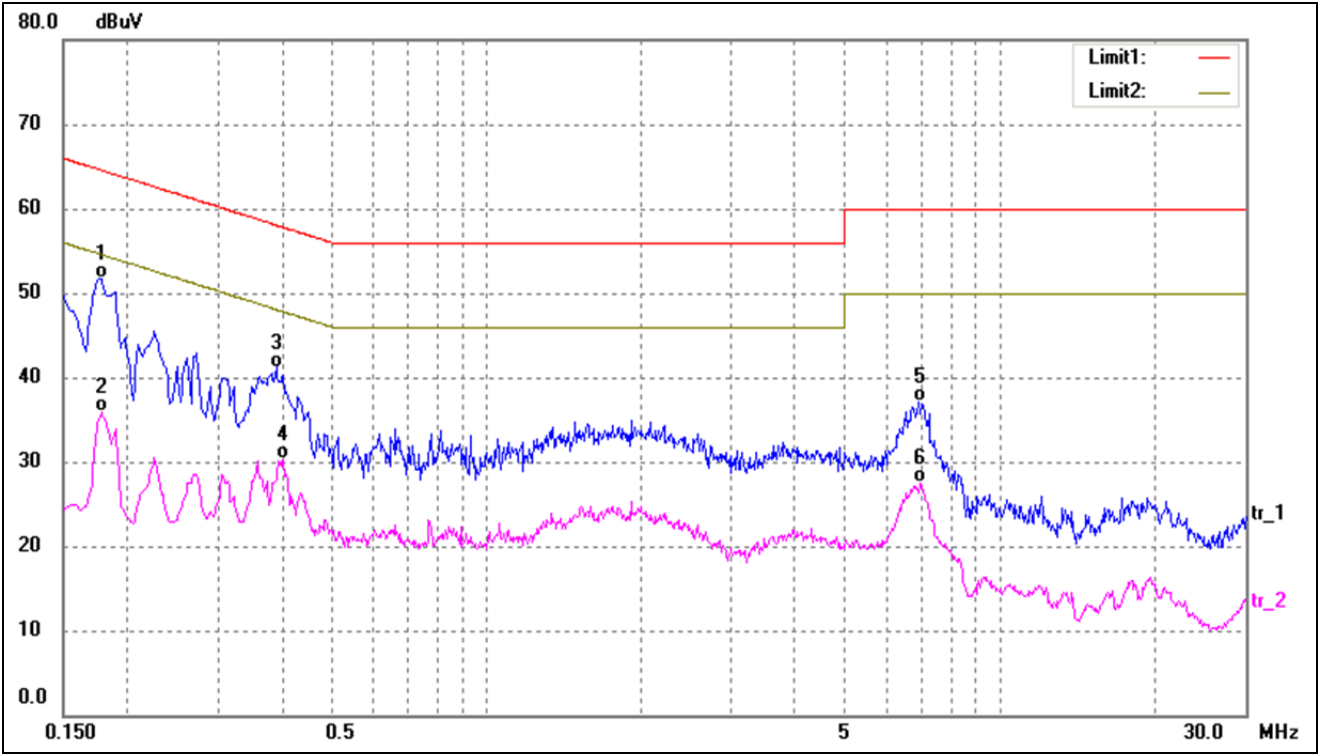

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1780	41.51	10.26	51.77	64.57	-12.80	QP
2	0.1780	25.59	10.26	35.85	54.57	-18.72	AVG
3	0.3899	30.96	10.24	41.20	58.06	-16.86	QP
4	0.4020	20.08	10.23	30.31	47.81	-17.50	AVG
5	6.9220	26.83	10.25	37.08	60.00	-22.92	QP
6	6.9940	17.30	10.25	27.55	50.00	-22.45	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

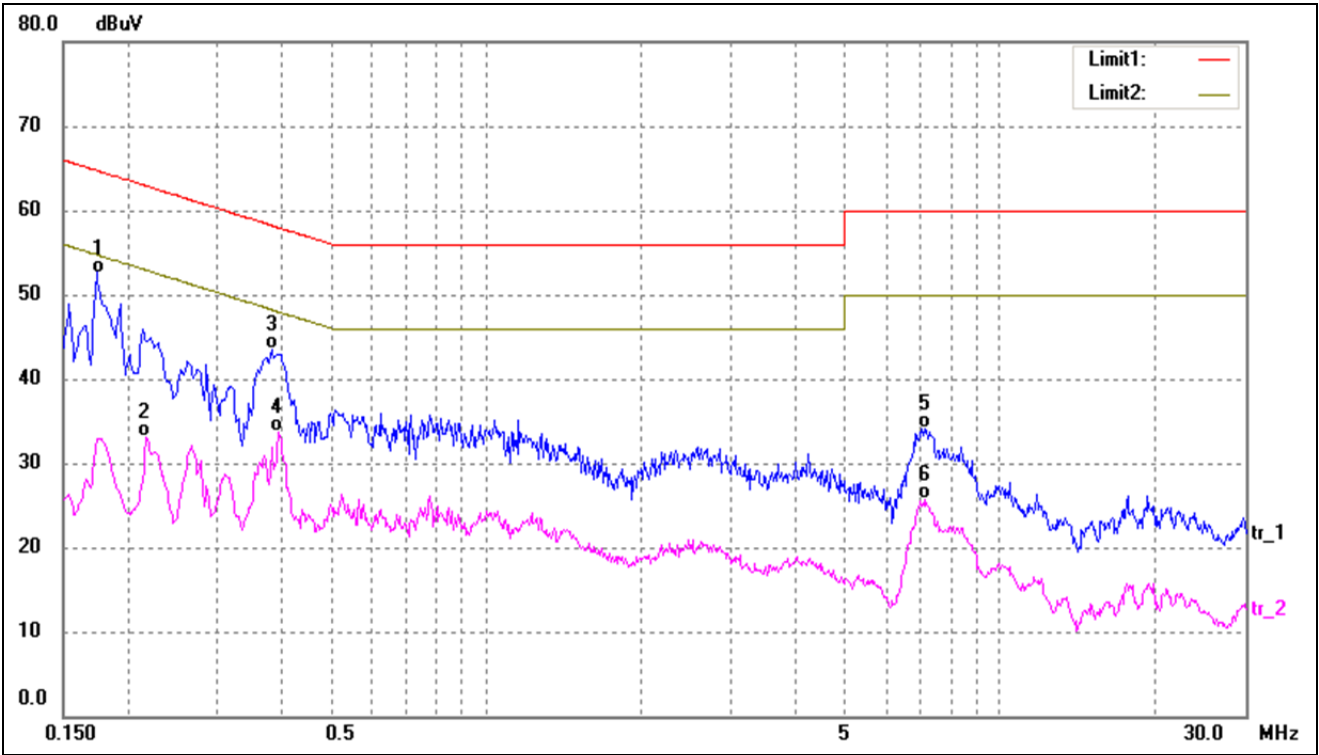

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1740	42.35	10.25	52.60	64.76	-12.16	QP
2	0.2180	22.90	10.26	33.16	52.89	-19.73	AVG
3	0.3820	33.31	10.23	43.54	58.23	-14.69	QP
4	0.3940	23.43	10.23	33.66	47.98	-14.32	AVG
5	7.1020	23.93	10.25	34.18	60.00	-25.82	QP
6	7.1020	15.36	10.25	25.61	50.00	-24.39	AVG




APPENDIX SUMMARY

Project No.	WTX22X05090003W	Test Engineer	BAIdi
Start date	2022/6/9	Finish date	2022/6/10
Temperature	22.3℃	Humidity	58%
RF specifications	BT-BR/EDR		

APPENDIX	Description of Test Item	Result
A	Hopping Channels and Channel Separation	Compliant
B	Dwell Time of Hopping Channel	Compliant
C	20dB Bandwidth	Compliant
D	RF Output Power	Compliant
E	Conducted Out of Band Emissions	Compliant




APPENDIX A

Hopping Channels Number			
Mode	Test Result	Limit	Result
GFSK	79	≥15	Pass
π/4 DQPSK	79	≥15	Pass
8DPSK	79	≥15	Pass

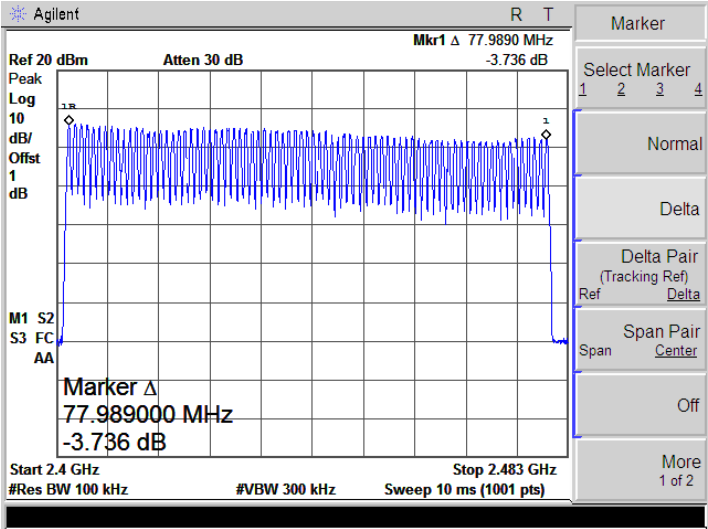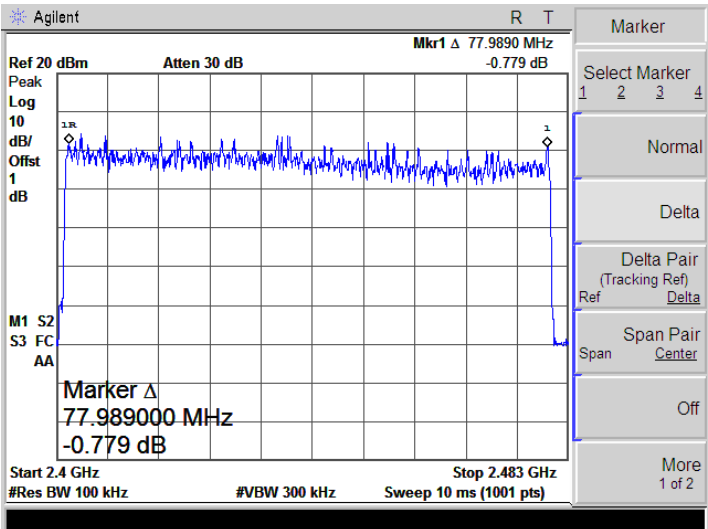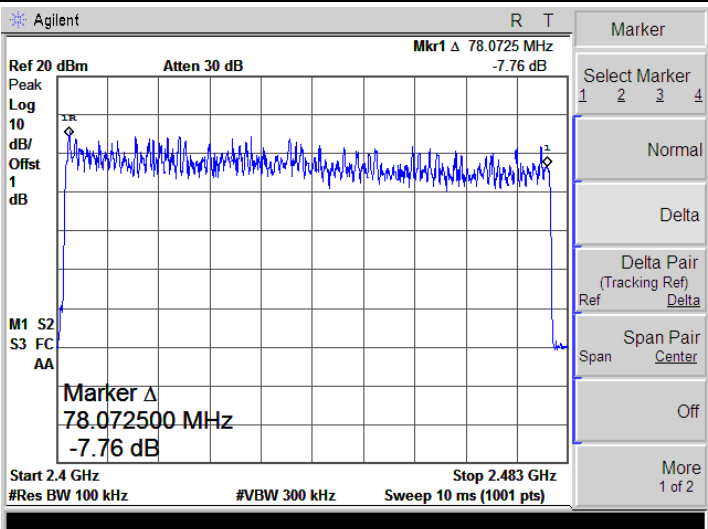GFSK	
$\pi/4$ DQPSK	
8DPSK	

Channel Separation			
Mode	Channel	Carrier Frequencies Separation (kHz)	Result
GFSK	Low	1002	Pass
	Middle	1002	Pass
	High	1002	Pass
8DPSK	Low	1002	Pass
	Middle	1002	Pass
	High	1002	Pass

GFSK-Low	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 Δ 1.002 MHz 0.033 dB Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker Δ 1.002000 MHz 0.033 dB Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 3 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
----------	--

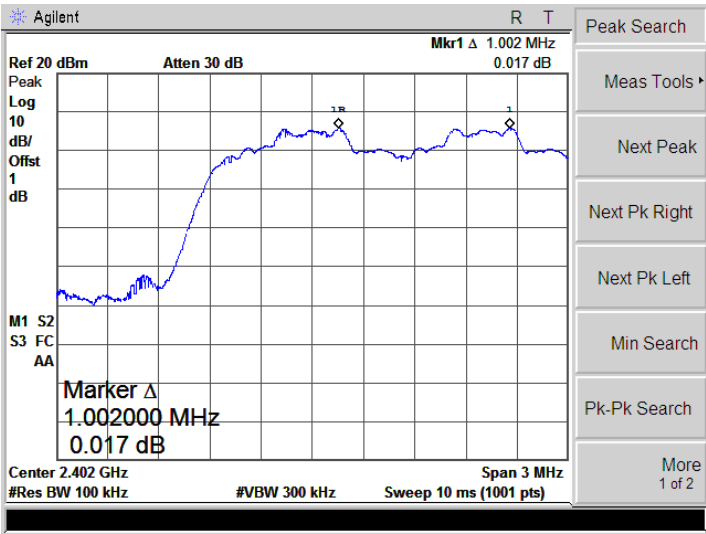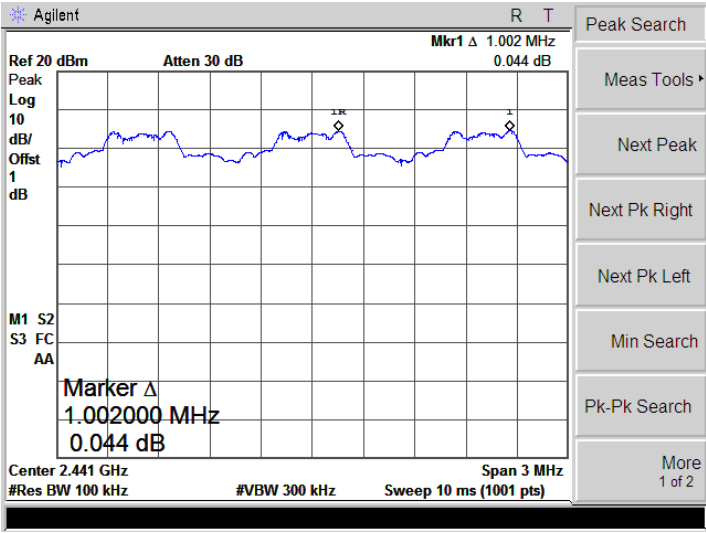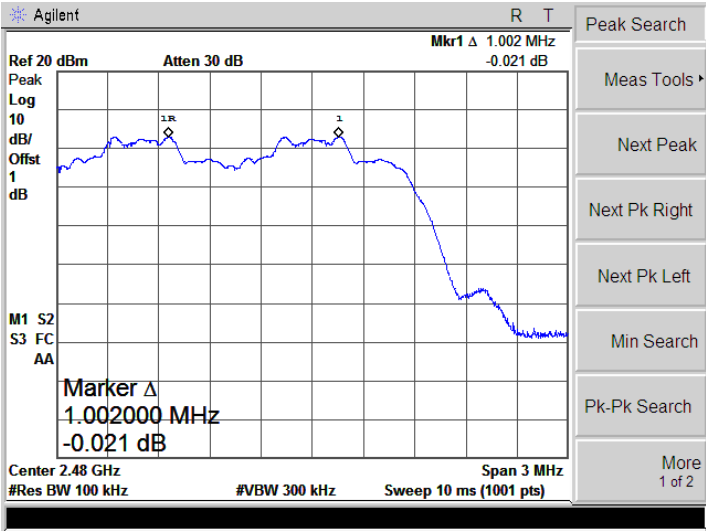8DPSK-Low	
8DPSK-Middle	
8DPSK-High	

APPENDIX B

Dwell Time of Hopping Channel					
Modulation	Packet	Test Channel	Time Slot Length	Dwell Time	Limit
			ms	ms	ms
GFSK	DH5	Low	2.850	304.00	≤400
		Middle	2.825	301.33	≤400
		High	2.867	305.81	≤400
$\pi/4$ DQPSK	2DH5	Low	2.888	308.05	≤400
		Middle	2.888	308.05	≤400
		High	2.867	305.81	≤400
8DPSK	3DH5	Low	2.888	308.05	≤400
		Middle	2.888	308.05	≤400
		High	2.867	305.81	≤400

Note: The test period: $T = 0.4 \text{ Second} * 79 \text{ Channel} = 31.6 \text{ s}$

Dwell time = time slot length * (Hopping rate / Number of hopping channels) * Period

Dwell time = Pulse time (ms) $\times (1600 \div 2 \div 79) \times 31.6 \text{ Second}$ for DH1, 2-DH1, 3-DH1

Dwell time = Pulse time (ms) $\times (1600 \div 4 \div 79) \times 31.6 \text{ Second}$ for DH3, 2-DH3, 3-DH3

Dwell time = Pulse time (ms) $\times (1600 \div 6 \div 79) \times 31.6 \text{ Second}$ for DH5, 2-DH5, 3-DH5

DH5-Low	
DH5-Middle	
DH5-High	

2DH5-Low	
2DH5-Middle	
2DH5-High	

3DH5-Low	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 Δ 2.888 ms -0.994 dB Peak Log 10 dB/Offset 1 dB W1 S2 S3 VS AA Marker Δ 2.888262378 ms -0.994 dB Center 2.402 GHz Res BW 1 MHz #VBW 3 MHz Sweep 8.558 ms (401 pts) Span 0 Hz Marker Select Marker 1 2 3 4 Normal Delta Delta Pair (Tracking Ref) Ref Delta Span Pair Span Center Off More 1 of 2
3DH5-Middle	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 Δ 2.888 ms -1.131 dB Peak Log 10 dB/Offset 1 dB W1 S2 S3 VS AA Center 2.441 GHz Res BW 1 MHz #VBW 3 MHz Sweep 8.558 ms (401 pts) Span 0 Hz Marker Select Marker 1 2 3 4 Normal Delta Delta Pair (Tracking Ref) Ref Delta Span Pair Span Center Off More 1 of 2
3DH5-High	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 Δ 2.867 ms 0.062 dB Peak Log 10 dB/Offset 1 dB W1 S2 S3 VS AA Center 2.48 GHz Res BW 1 MHz #VBW 3 MHz Sweep 8.558 ms (401 pts) Span 0 Hz Marker Select Marker 1 2 3 4 Normal Delta Delta Pair (Tracking Ref) Ref Delta Span Pair Span Center Off More 1 of 2

APPENDIX C

20 dB Bandwidth			
Test Mode	Test Channel MHz	20 dB Bandwidth MHz	Result
GFSK	2402	0.856	Pass
	2441	0.852	Pass
	2480	0.856	Pass
$\pi/4$ DQPSK	2402	1.286	Pass
	2441	1.260	Pass
	2480	1.257	Pass
8DPSK	2402	1.266	Pass
	2441	1.272	Pass
	2480	1.265	Pass

GFSK-Low	Agilent Ch Freq 2.402 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 10 ms (1001 pts) Span 3 MHz Occupied Bandwidth 773.1238 kHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 1.585 kHz x dB Bandwidth 859.751 kHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
GFSK-Middle	Agilent Ch Freq 2.441 GHz Trig Free Occupied Bandwidth Center 2.441000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 10 ms (1001 pts) Span 3 MHz Occupied Bandwidth 756.6716 kHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 2.105 kHz x dB Bandwidth 852.217 kHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
GFSK-High	Agilent Ch Freq 2.48 GHz Trig Free Occupied Bandwidth Center 2.480000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 10 ms (1001 pts) Span 3 MHz Occupied Bandwidth 756.5806 kHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 250.589 Hz x dB Bandwidth 855.775 kHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

$\pi/4$ DQPSK-Low	Agilent R T Ch Freq 2.402 GHz Trig Free Occupied Bandwidth Center 2.40200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 10 ms (1001 pts) Span 3 MHz Occupied Bandwidth 1.1614 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -5.101 kHz x dB Bandwidth 1.286 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
$\pi/4$ DQPSK-Middle	Agilent R T Ch Freq 2.441 GHz Trig Free Occupied Bandwidth Center 2.44100000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 10 ms (1001 pts) Span 3 MHz Occupied Bandwidth 1.1449 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -4.730 kHz x dB Bandwidth 1.260 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
$\pi/4$ DQPSK-High	Agilent R T Ch Freq 2.48 GHz Trig Free Occupied Bandwidth Center 2.48000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 10 ms (1001 pts) Span 3 MHz Occupied Bandwidth 1.1455 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -5.322 kHz x dB Bandwidth 1.257 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

8DPSK-Low	Agilent Ch Freq 2.402 GHz Occupied Bandwidth Center 2.40200000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 10 ms (1001 pts) Span 3 MHz Occupied Bandwidth 1.1586 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -499.977 Hz x dB Bandwidth 1.266 MHz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
8DPSK-Middle	Agilent Ch Freq 2.441 GHz Occupied Bandwidth Center 2.44100000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 10 ms (1001 pts) Span 3 MHz Occupied Bandwidth 1.1507 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -586.135 Hz x dB Bandwidth 1.272 MHz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
8DPSK-High	Agilent Ch Freq 2.48 GHz Occupied Bandwidth Center 2.48000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 10 ms (1001 pts) Span 3 MHz Occupied Bandwidth 1.1583 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -6.844 Hz x dB Bandwidth 1.265 MHz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2

APPENDIX D

RF Output Power				
Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	Low	6.518	30.00	Pass
	Middle	5.543		
	High	3.950		
$\pi/4$ DQPSK	Low	5.969	30.00	Pass
	Middle	4.733		
	High	3.159		
8DPSK	Low	5.795	30.00	Pass
	Middle	4.562		
	High	3.043		


GFSK-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.402070 GHz 6.518 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.402070000 GHz 6.518 dBm Center 2.402 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 5 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
----------	---


$\pi/4$ DQPSK-Low	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.401950 GHz 5.969 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.401950000 GHz 5.969 dBm Center 2.402 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 5 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
$\pi/4$ DQPSK-Middle	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.441005 GHz 4.733 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.441005000 GHz 4.733 dBm Center 2.441 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 5 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
$\pi/4$ DQPSK-High	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.480125 GHz 3.159 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.480125000 GHz 3.159 dBm Center 2.48 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 5 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

8DPSK-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.402145 GHz 5.795 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.402145000 GHz 5.795 dBm Center 2.402 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 5 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
8DPSK-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.441105 GHz 4.562 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.441105000 GHz 4.562 dBm Center 2.441 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 5 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
8DPSK-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.480175 GHz 3.043 dBm Peak Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.480175000 GHz 3.043 dBm Center 2.48 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Span 5 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2




APPENDIX E


Conducted Out of Band Emissions

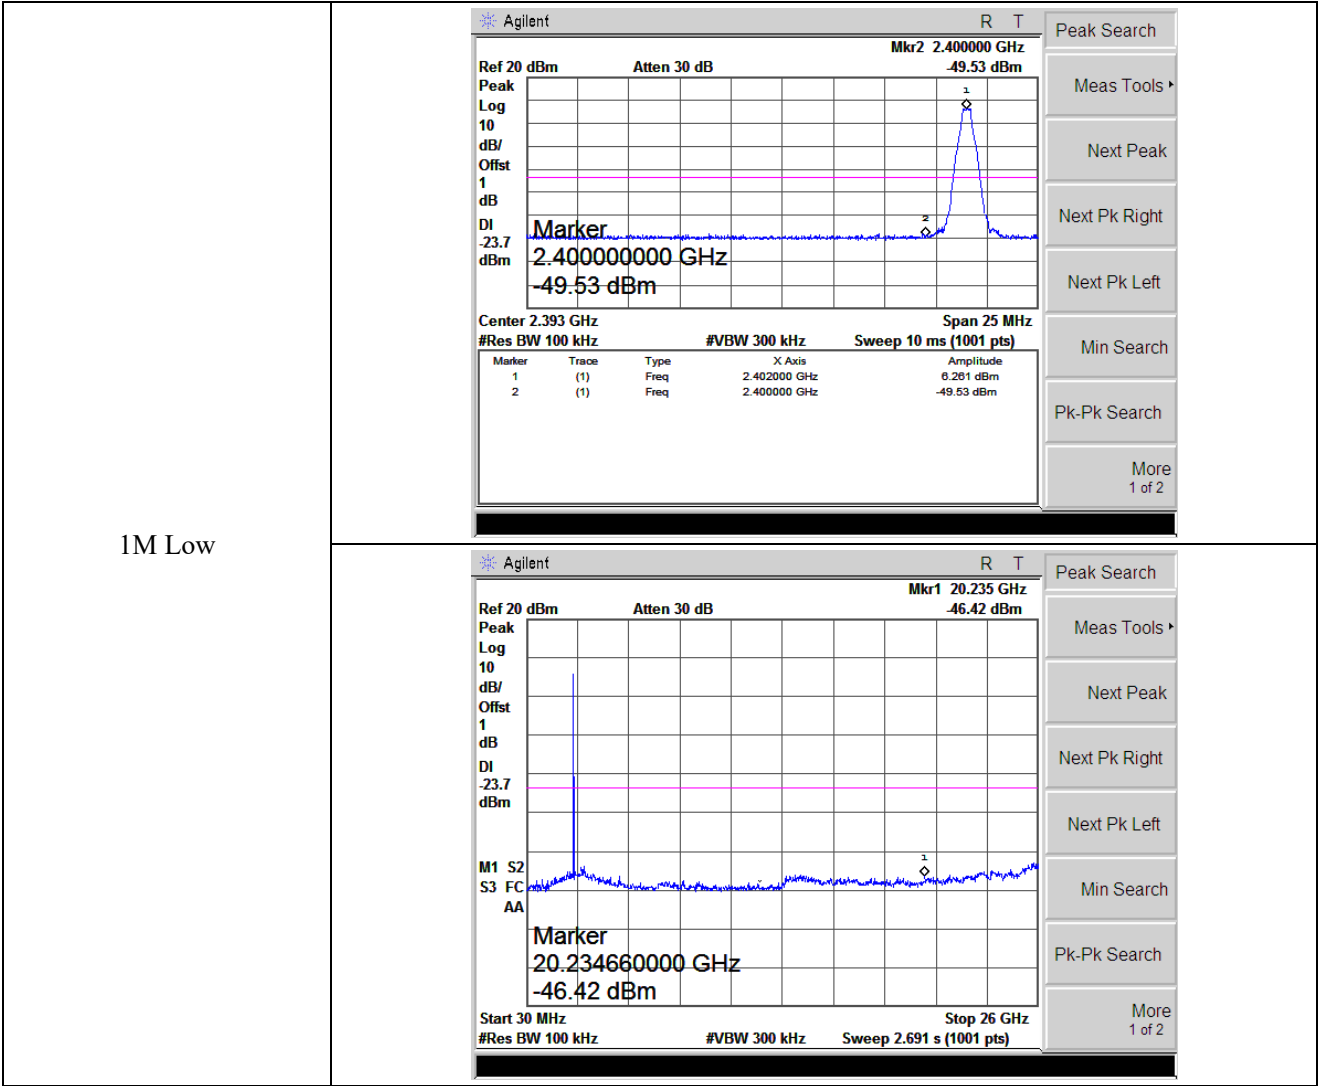


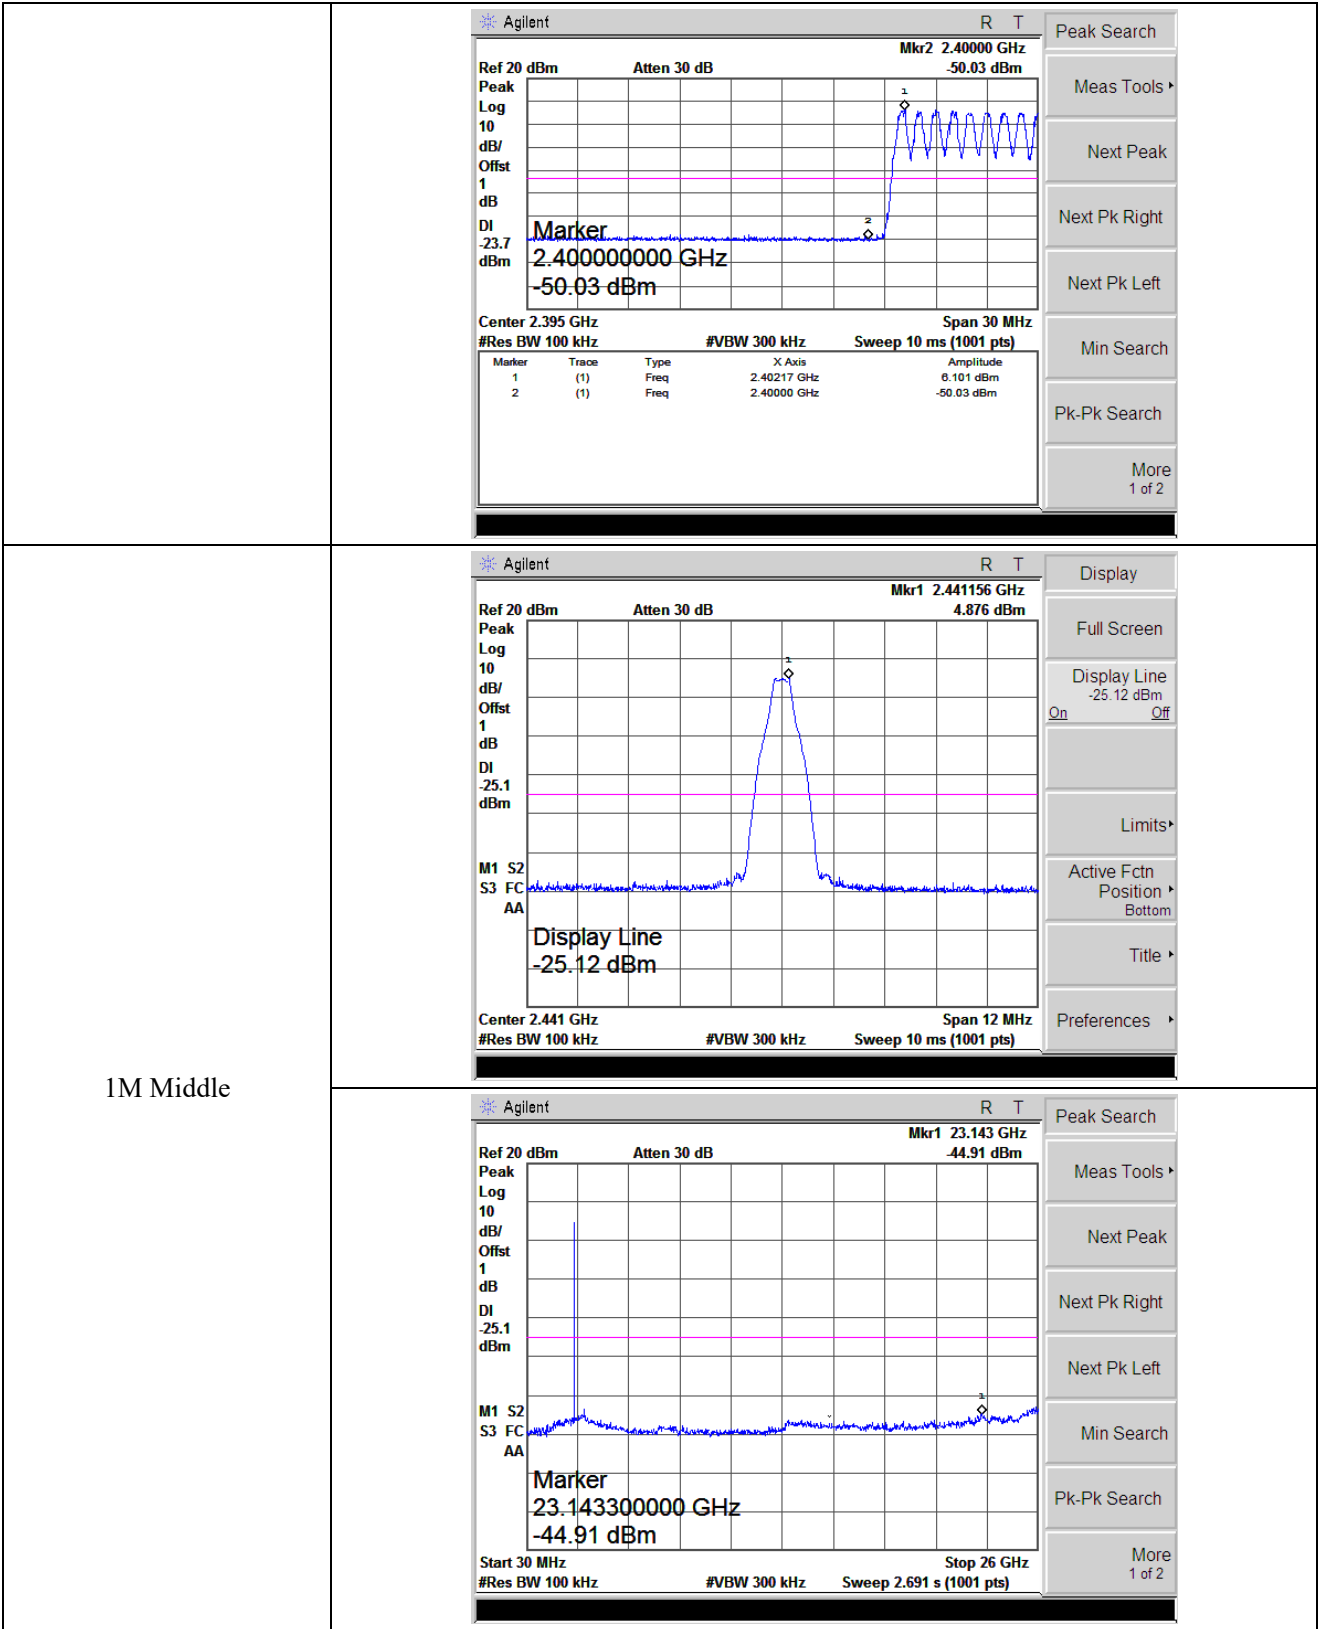


1M High

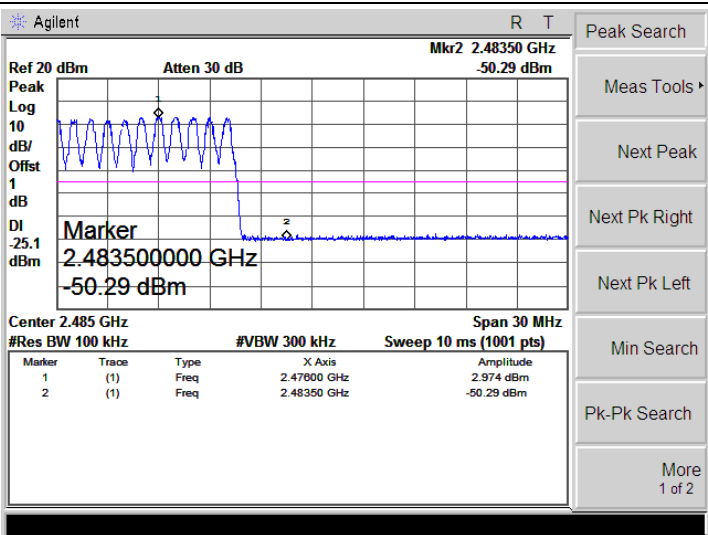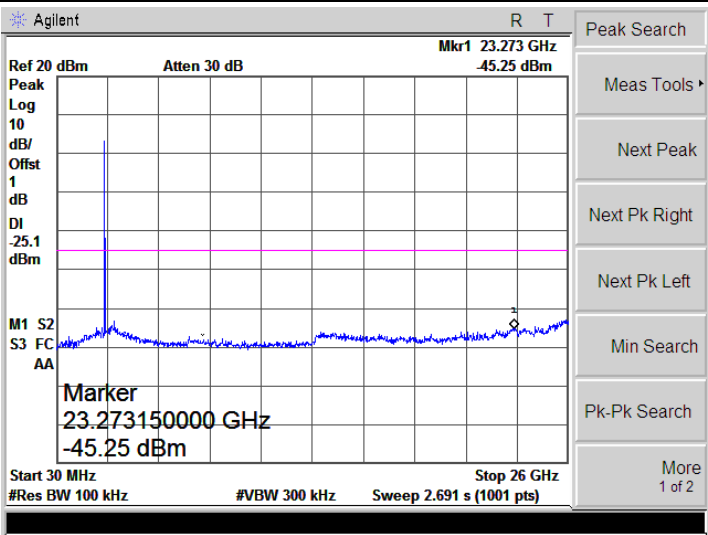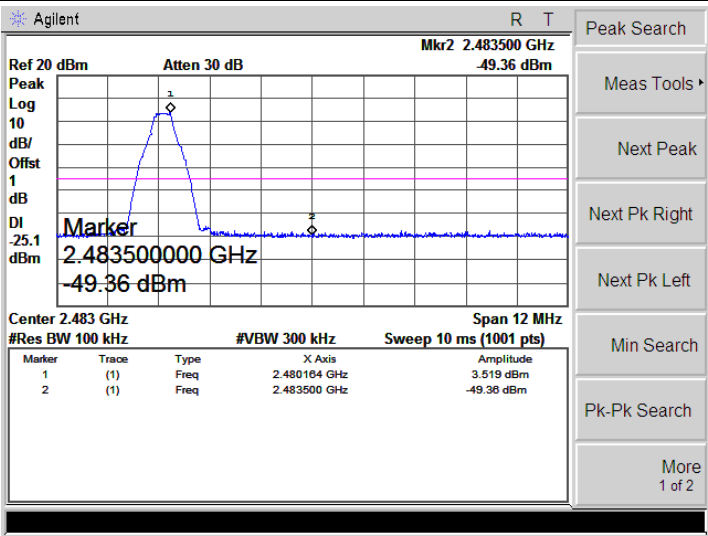


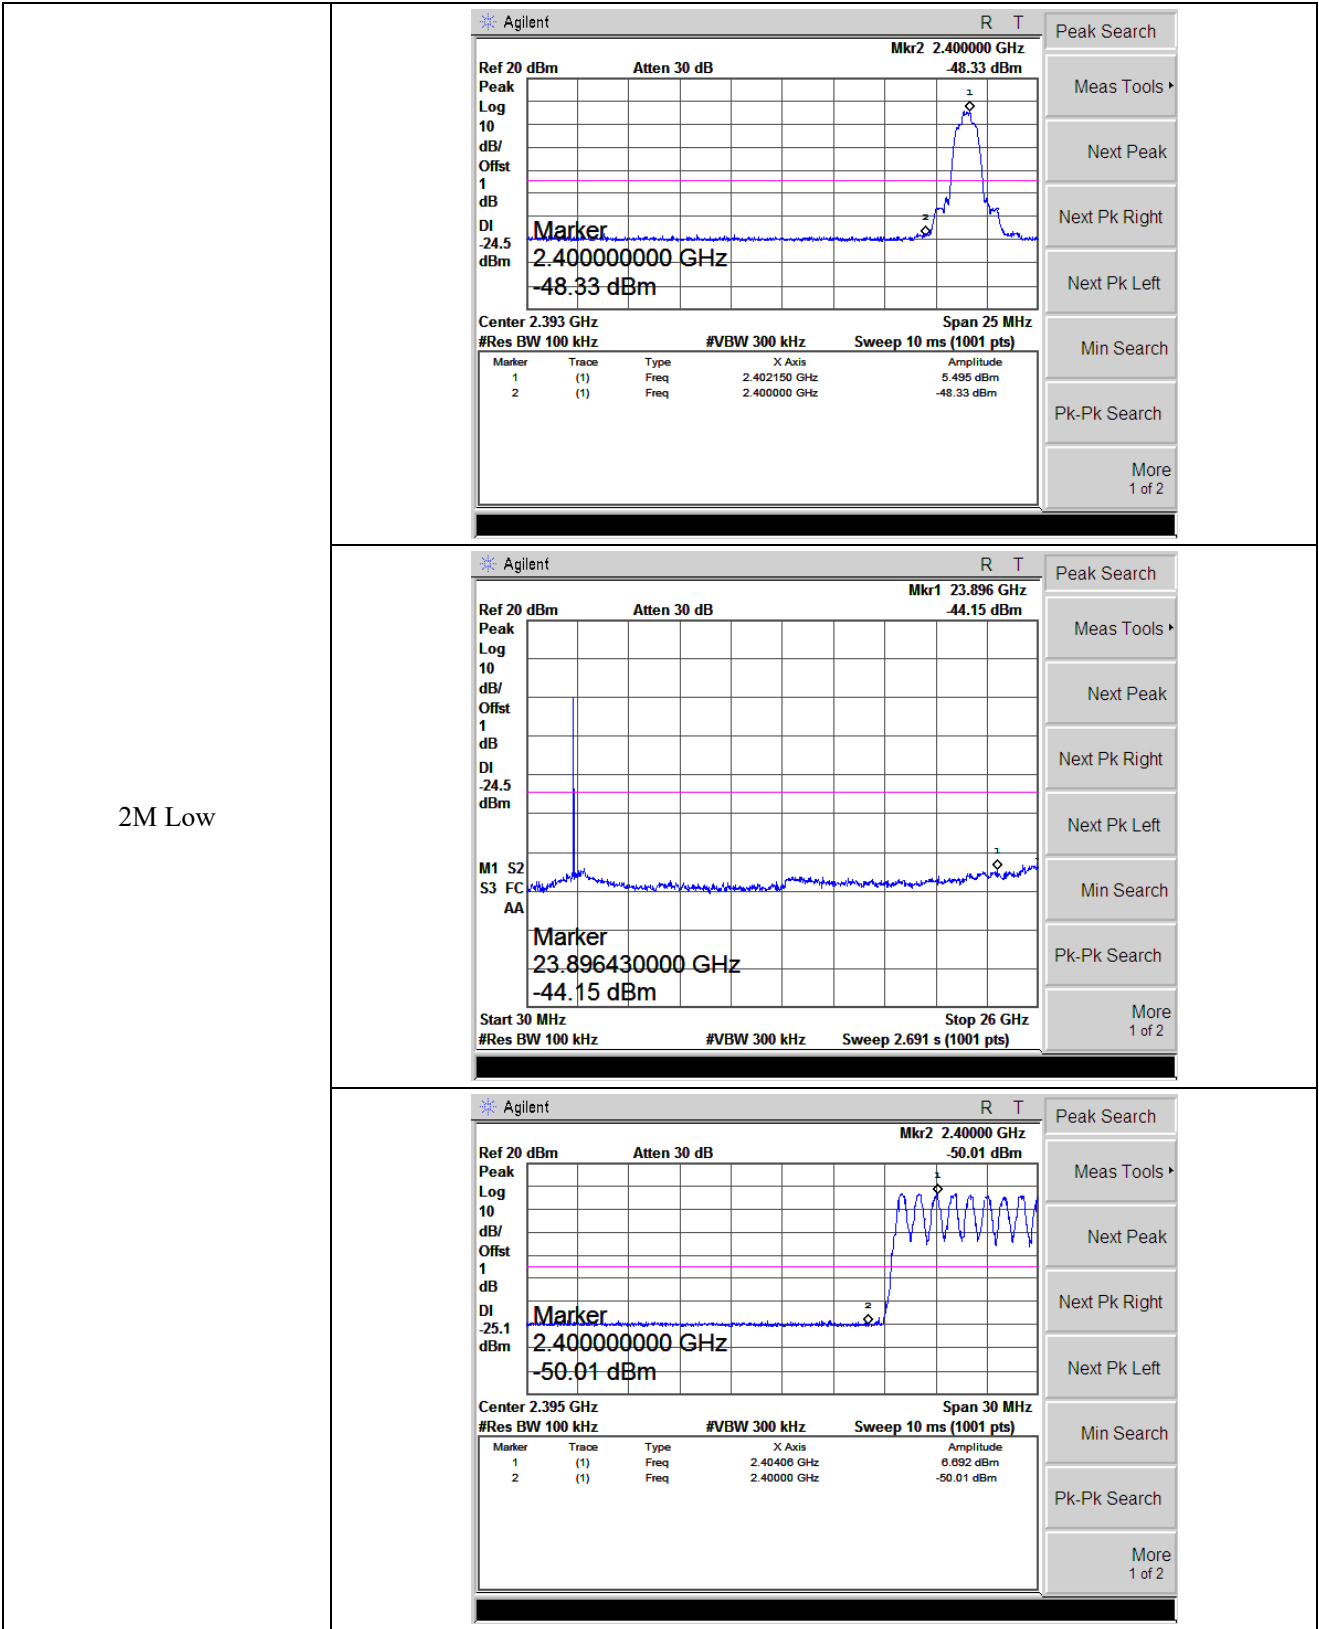



2M Middle

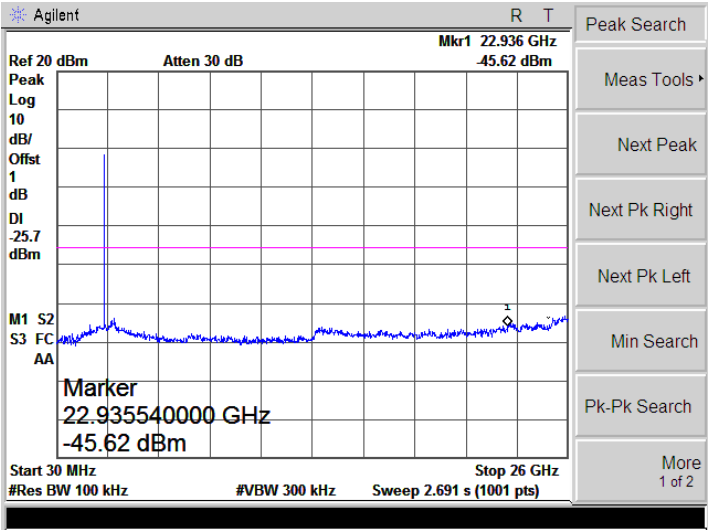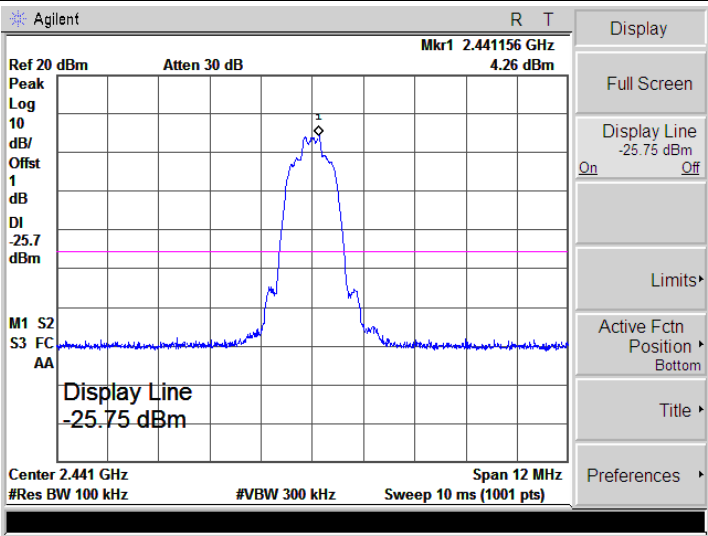


2M High

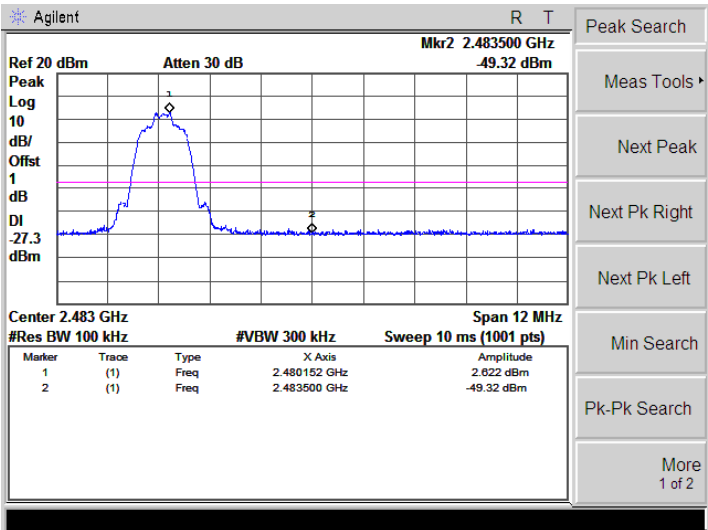

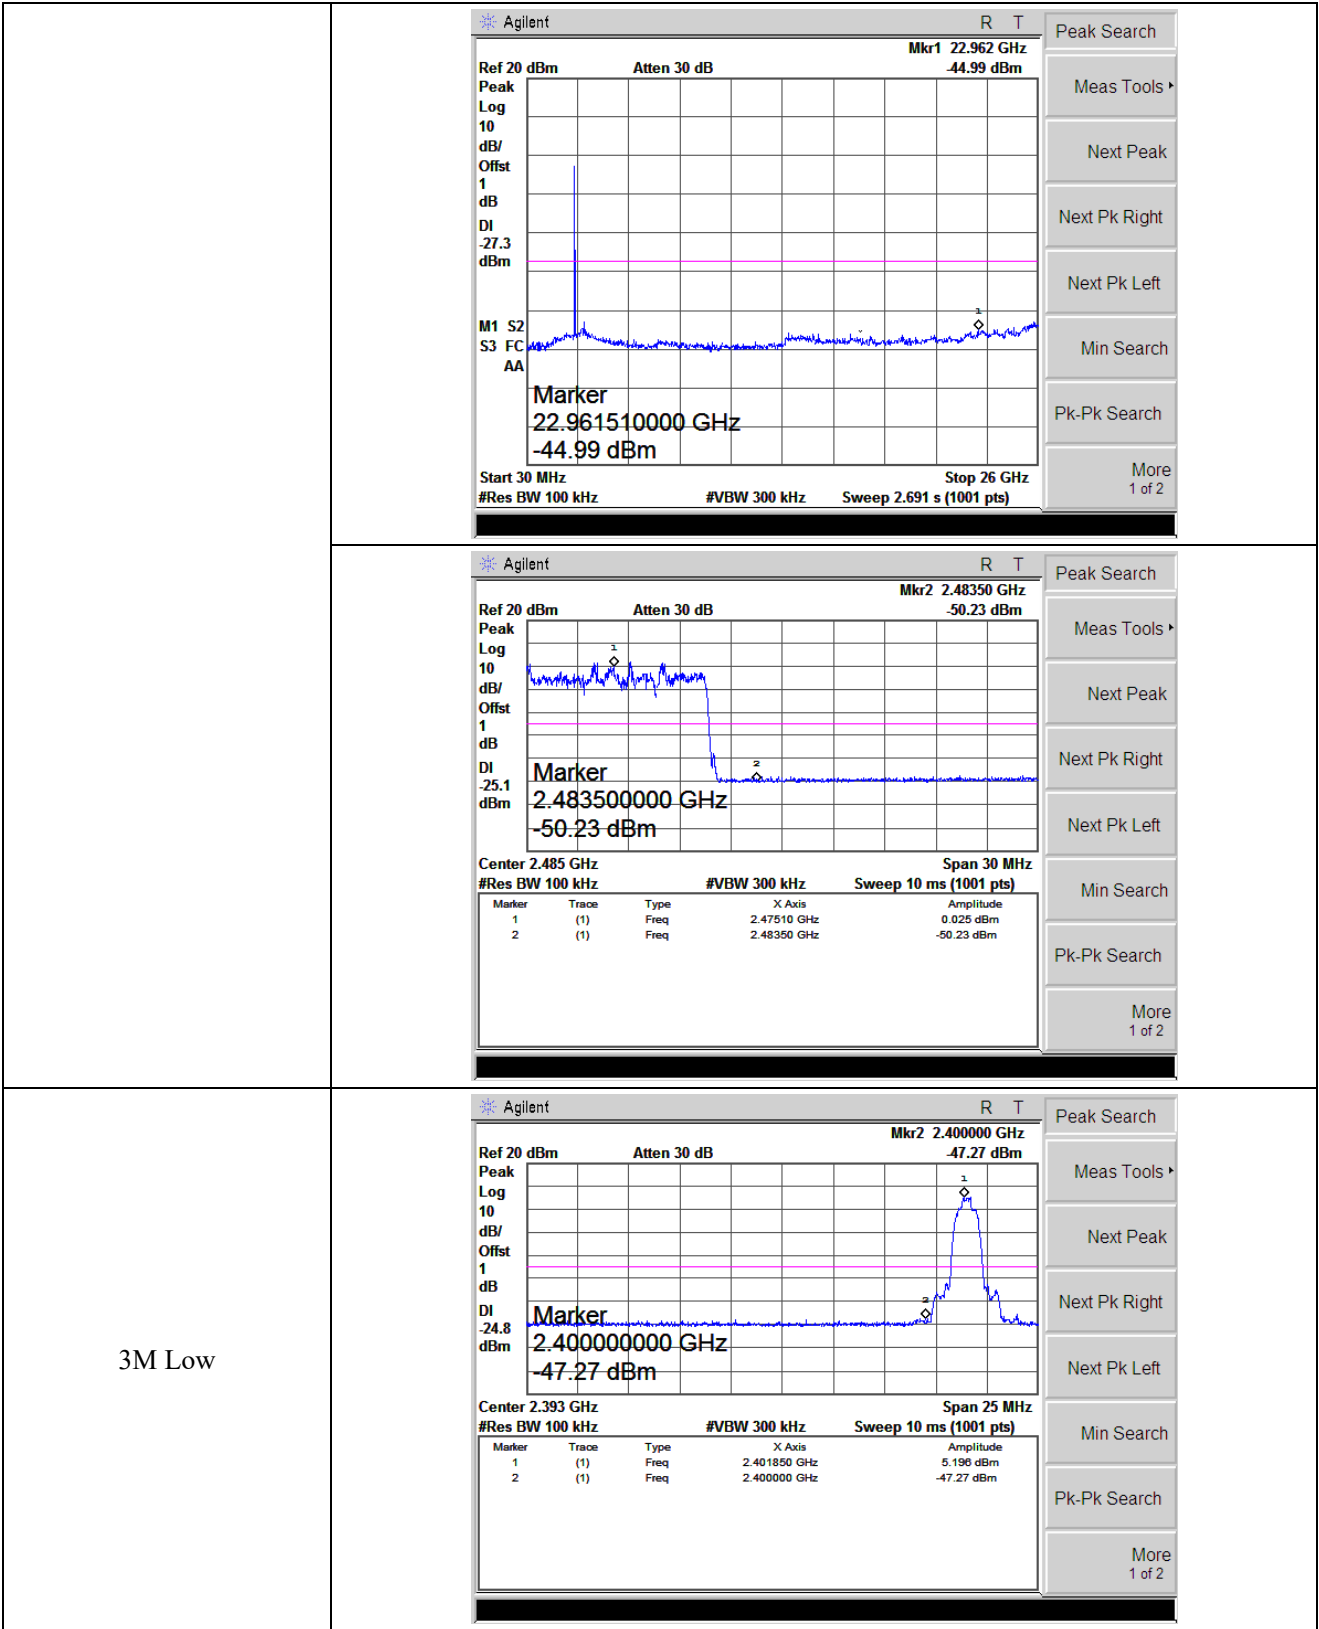

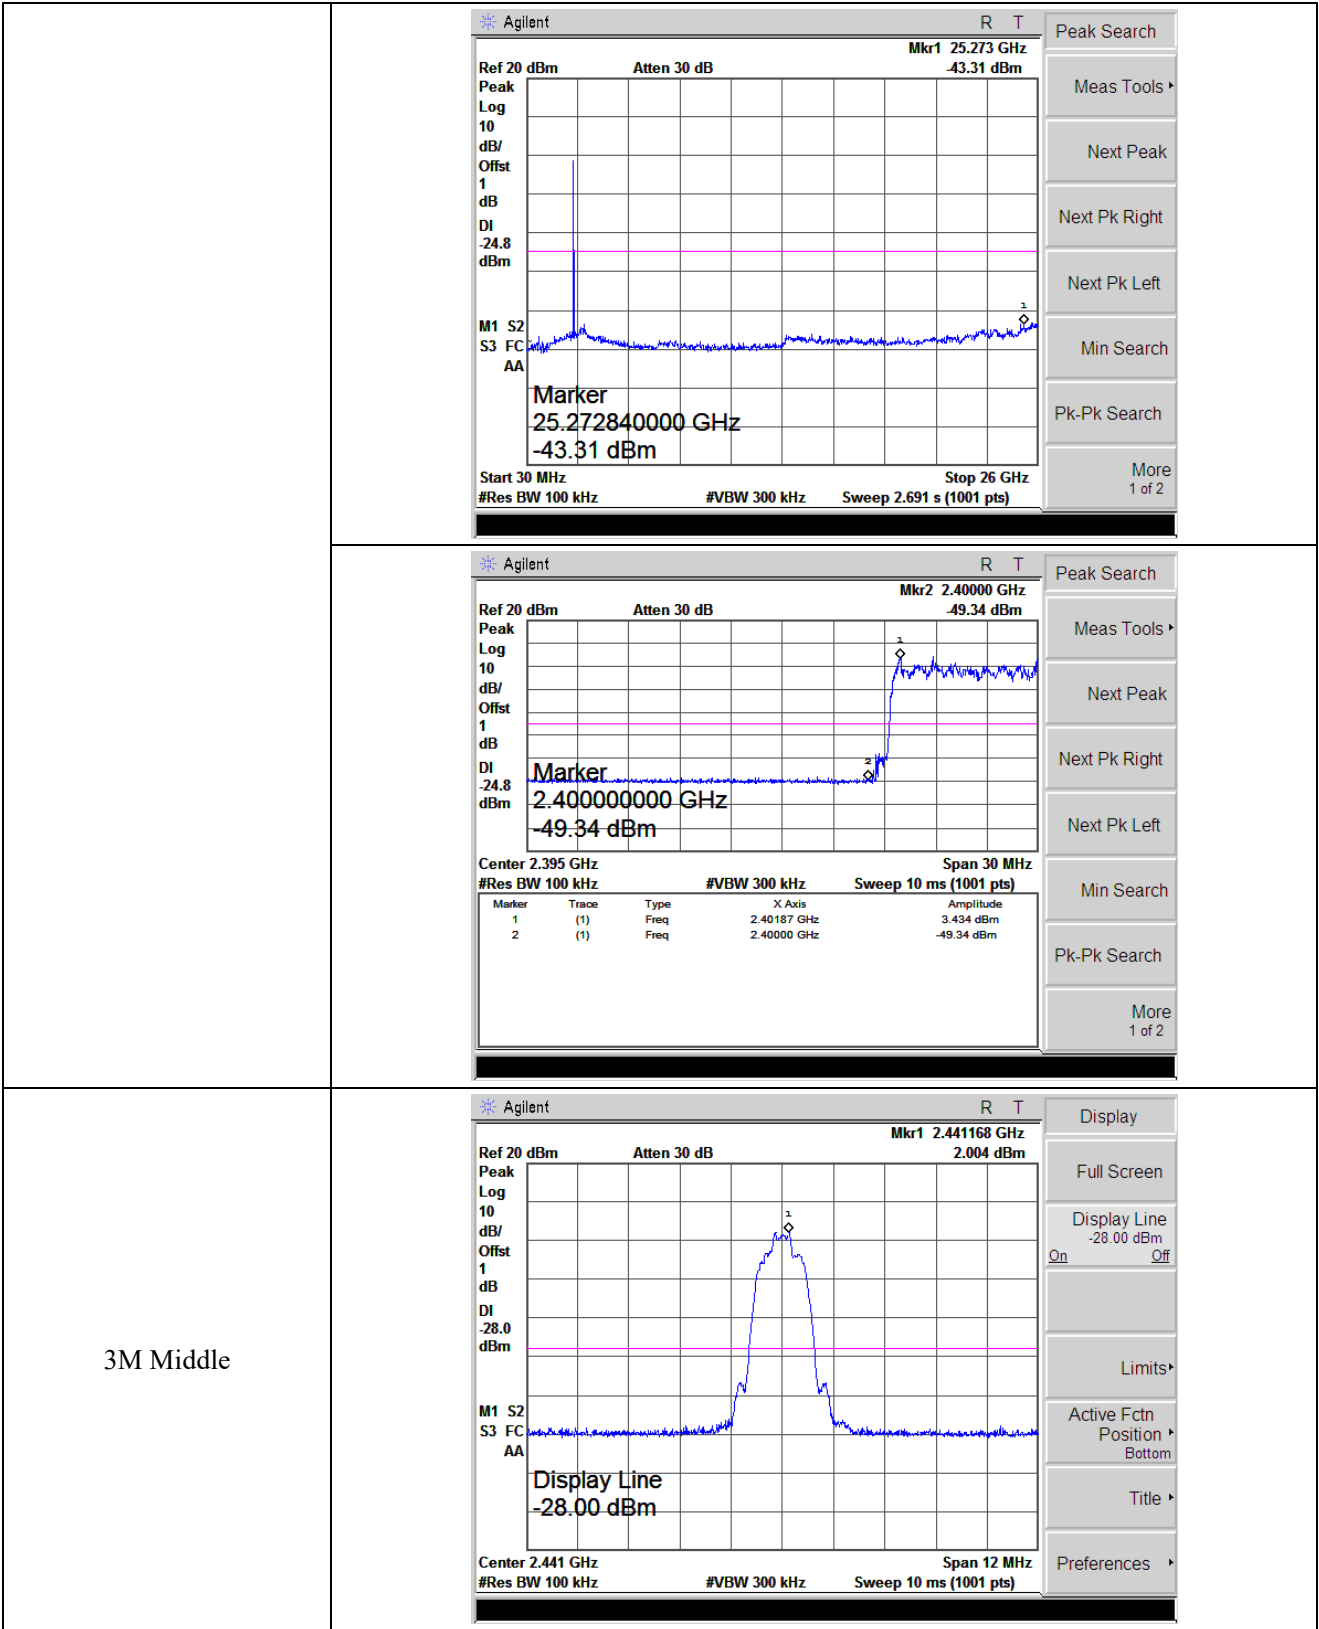



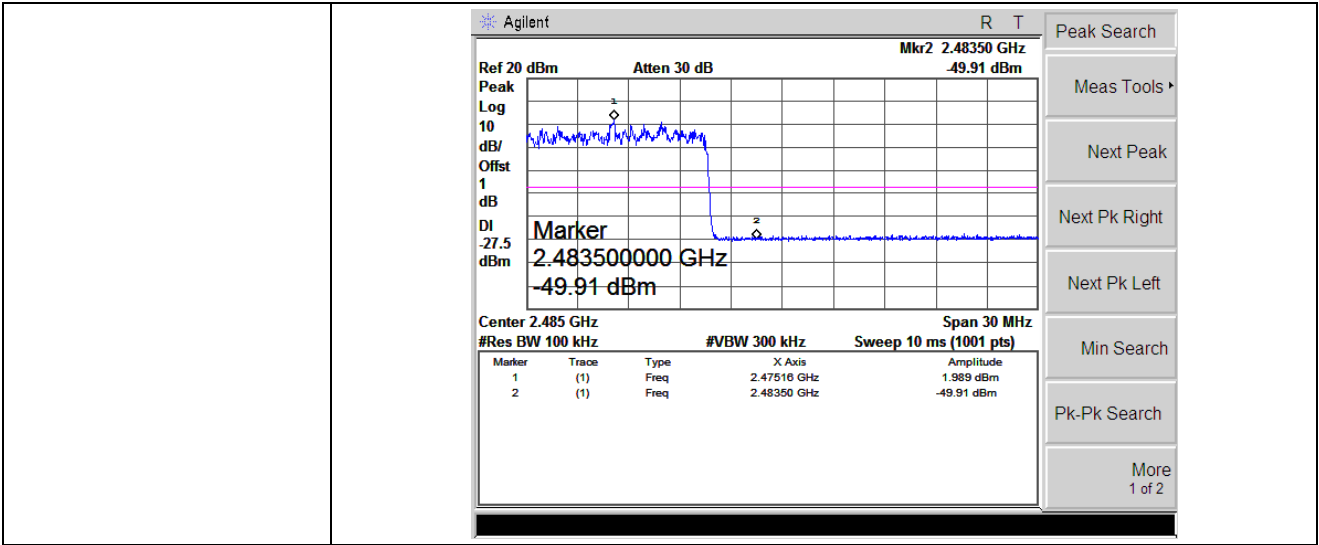

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******