

TEST REPORT

Reference No...... : WTX22X05090003W001
FCC ID : 2AHAF-MDT760V30
Applicant : TOPICON HK LIMITED
Address : Room 2314-2316, Tower C, Huangdu Plaza, Yitian Road, Futian District,
Shenzhen, China
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : GPS
Model No...... : MDT760
Standards : FCC Part 22H, FCC Part 24E, FCC Part 27
Date of Receipt sample : 2022-05-09
Date of Test..... : 2022-05-09 to 2022-06-15
Date of Issue : 2022-06-15
Test Report Form No. : WTX_Part 22_Part 24_Part 27W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Jason Su

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY	6
1.5 EUT SETUP AND TEST MODE	7
1.6 MEASUREMENT UNCERTAINTY	9
1.7 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	12
3. RF OUTPUT POWER	13
3.1 STANDARD APPLICABLE.....	13
3.2 TEST PROCEDURE.....	13
3.3 SUMMARY OF TEST RESULTS/PLOTS	13
4. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....	17
4.1 STANDARD APPLICABLE.....	17
4.2 TEST PROCEDURE.....	17
4.3 SUMMARY OF TEST RESULTS	17
5. EMISSION BANDWIDTH.....	18
5.1 STANDARD APPLICABLE.....	18
5.2 TEST PROCEDURE.....	18
5.3 SUMMARY OF TEST RESULTS/PLOTS	18
6. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....	19
6.1 STANDARD APPLICABLE.....	19
6.2 TEST PROCEDURE.....	19
6.3 SUMMARY OF TEST RESULTS/PLOTS	19
7. SPURIOUS RADIATED EMISSIONS.....	20
7.1 STANDARD APPLICABLE.....	20
7.2 TEST PROCEDURE.....	20
7.3 SUMMARY OF TEST RESULTS/PLOTS	20
8. FREQUENCY STABILITY	46
8.1 STANDARD APPLICABLE.....	46
8.2 TEST PROCEDURE.....	46
8.3 SUMMARY OF TEST RESULTS/PLOTS	46
9. MODULATION CHARACTERISTICS	47
9.1 STANDARD APPLICABLE.....	47
9.2 TEST PROCEDURE.....	47
9.3 SUMMARY OF TEST RESULTS/PLOTS	47
APPENDIX SUMMARY	48
APPENDIX A.....	49
APPENDIX B.....	51
APPENDIX C.....	52
APPENDIX D.....	69
APPENDIX E.....	123
APPENDIX F	127
APPENDIX PHOTOGRAPHS.....	130

Report version

Version No.	Date of issue	Description
Rev.00	2022-06-15	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Product Name:	GPS
Trade Name:	/
Model No.:	MDT760
Adding Model(s):	MDT761, MDT740, MDT741, MDT770, MDT780, OBC740, OBC760, M710A, M710AG, M710AB, M710AKB, M720A, M720B, M720AG, M720AB, M720AKB, MDT714D, MDT715D, X7(V2), TABX7V2, X8C, TABX8C, MDT860, MDT861, MDT840, MDT841, MDT870, MDT871, MDT880, MDT881, OBC860, 100822, 100783
Rated Voltage:	MDT760:DC3.7V MDT860:DC3.7V
Battery:	/
Adapter Model:	/
Software Version:	MDT760: mdt760_gms_1.8.6 MDT860: mdt860_gms_1.9.2
Hardware Version:	MDT760: MDT760_V30 MDT860: MDT760_V30
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i> <i>The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model MDT760, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT:	
2G	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 33.63dBm, GSM1900: 30.92dBm EDGE850: 27.71dBm, EDGE1900: 26.84dBm
Type of Emission:	GSM850: 248KGXW, GSM1900: 246KGXW EDGE850: 249KG7W, EDGE1900: 249KG7W
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: -2dBi; GSM1900: -2dBi
GPRS/EDGE Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 4, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 4: 1710~1755MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 4: 2110~2155MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 24.08dBm, WCDMA Band 4: 23.69dBm WCDMA Band 5: 23.80dBm
Type of Emission:	WCDMA Band 2: 4M20F9W WCDMA Band 4: 4M20F9W WCDMA Band 5: 4M19F9W
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: -2dBi, WCDMA Band 4: -2dBi, WCDMA Band 5: -2dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations.

FCC Rules Part 22: Private Land Mobile Radio Services.

FCC Rules Part 24: Public Mobile Services.

FCC Rules Part 27: Miscellaneous Wireless Communications Services.

TIA/EIA 603 E March 2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

KDB 971168 D01 Power Meas License Digital Systems v03r01: Measurement Guidance for Certification of Licensed Digital Transmitters.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 4	Low, Middle, High Channels
TM11	HSDPA Band 4	Low, Middle, High Channels
TM12	HSUPA Band 4	Low, Middle, High Channels
TM13	WCDMA Band 2	Low, Middle, High Channels
TM14	HSDPA Band 2	Low, Middle, High Channels
TM15	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS/EDGE	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 4	WCDMA/HSDPA/HSUPA	1712.4 MHz	1312
		1732.4 MHz	1412
		1752.6 MHz	1513
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538
Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.			

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	With Ferrite
DC Cable	1.45	Unshielded	Without Ferrite
Camera Cable	0.8	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi310-14ISK	/
Battery	JADE	DC12V	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
☐ Chamber B:Below 1GHz						

Reference No.: WTX22X05090003W001

SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§22.913(a), §24.232(c), §27.50(d)	RF Output Power	Compliant
§24.51, §27.50	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§22.917(b), §24.238(b), §27.53	Emission Bandwidth	Compliant
§22.917(a), §24.238(a), §27.53(h)	Spurious Emissions at Antenna Terminal	Compliant
§22.917(a), §24.238(a), §27.53(h)	Spurious Radiation Emissions	Compliant
§22.917(a), §24.238(a), §27.53(h)	Out of Band Emissions	Compliant
§22.355, §24.235, §27.54	Frequency Stability	Compliant

3. RF Output Power

3.1 Standard Applicable


According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755MHz band and mobile and portable stations operating in the 1695-1710MHz and 1755-1780MHz bands are limited to 1 watt EIRP.

3.2 Test Procedure

- Conducted output power test method:

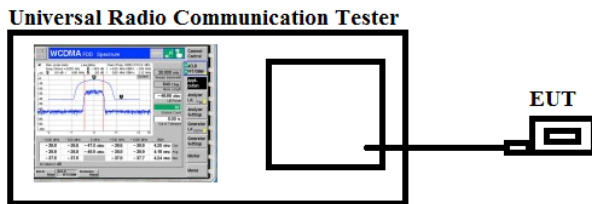

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

3.3 Summary of Test Results/Plots

➤ **Max. Radiated Power**

Mode	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Result
GSM850	128	V	30.15	<38.45	Pass
		H	25.13		
	190	V	29.41		
		H	24.02		
	251	V	29.38		
		H	24.16		
GPRS850	128	V	29.87	<38.45	Pass
		H	24.13		
	190	V	29.32		
		H	24.13		
	251	V	29.87		
		H	23.41		
EGPRS850	128	V	26.13	<38.45	Pass
		H	21.25		
	190	V	26.47		
		H	21.52		
	251	V	26.47		
		H	20.69		

Mode	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Result
PCS1900	512	V	28.41	<33.00	Pass
		H	22.62		
	661	V	28.32		
		H	22.13		
	810	V	28.46		
		H	22.13		
GPRS1900	512	V	28.47	<33.00	Pass
		H	22.36		
	661	V	28.95		
		H	22.12		
	810	V	28.65		
		H	22.18		
EGPRS1900	512	V	28.97	<33.00	Pass
		H	21.35		
	661	V	28.42		
		H	21.02		
	810	V	28.63		
		H	20.46		

Mode	Channel	Antenna Polar	ERP	Limit (dBm)	Result
WCDMA Band V	4132	V	21.02	<38.45	Pass
		H	13.24		
	4183	V	20.45		
		H	14.54		
	4233	V	20.47		
		H	13.98		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band IV	1312	V	20.42	<30.00	Pass
		H	13.28		
	1412	V	20.13		
		H	14.27		
	1513	V	20.42		
		H	15.13		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band II	9262	V	21.05	<33.00	Pass
		H	14.20		
	9400	V	21.42		
		H	14.12		
	9538	V	20.98		
		H	13.81		

➤ **Max. Conducted Power (Average power)**

Please refer to Appendix A

4. Peak-to-average Ratio (PAR) of Transmitter

4.1 Standard Applicable

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.


According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

4.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled.
2. Frequency = carrier center frequency.
3. Measurement BW > Emission bandwidth of signal.
4. The signal analyzer was set to collect one million samples to generate the CCDF curve.
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power.

Test Configuration for the emission bandwidth testing:

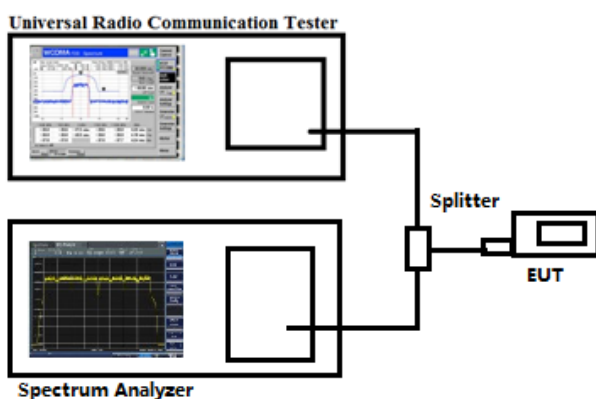

4.3 Summary of Test Results

Please refer to Appendix B.

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

5. Emission Bandwidth

5.1 Standard Applicable

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.


According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

5.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

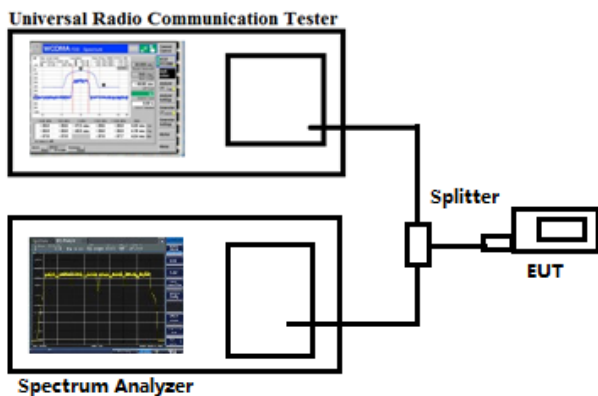

5.3 Summary of Test Results/Plots

Please refer to Appendix C.

6. Out of Band Emissions at Antenna Terminal

6.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:

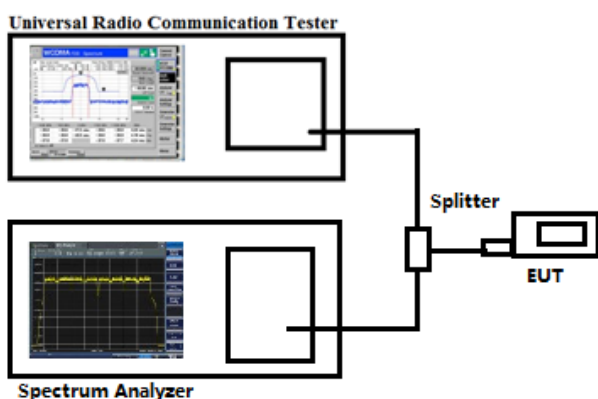

6.3 Summary of Test Results/Plots

Please refer to Appendix D.

7. Spurious Radiated Emissions

7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

7.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

7.3 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emissions Below 1GHz
MDT760

For Cellular Band			
Test Channel	GSM850	Polarity:	Horizontal

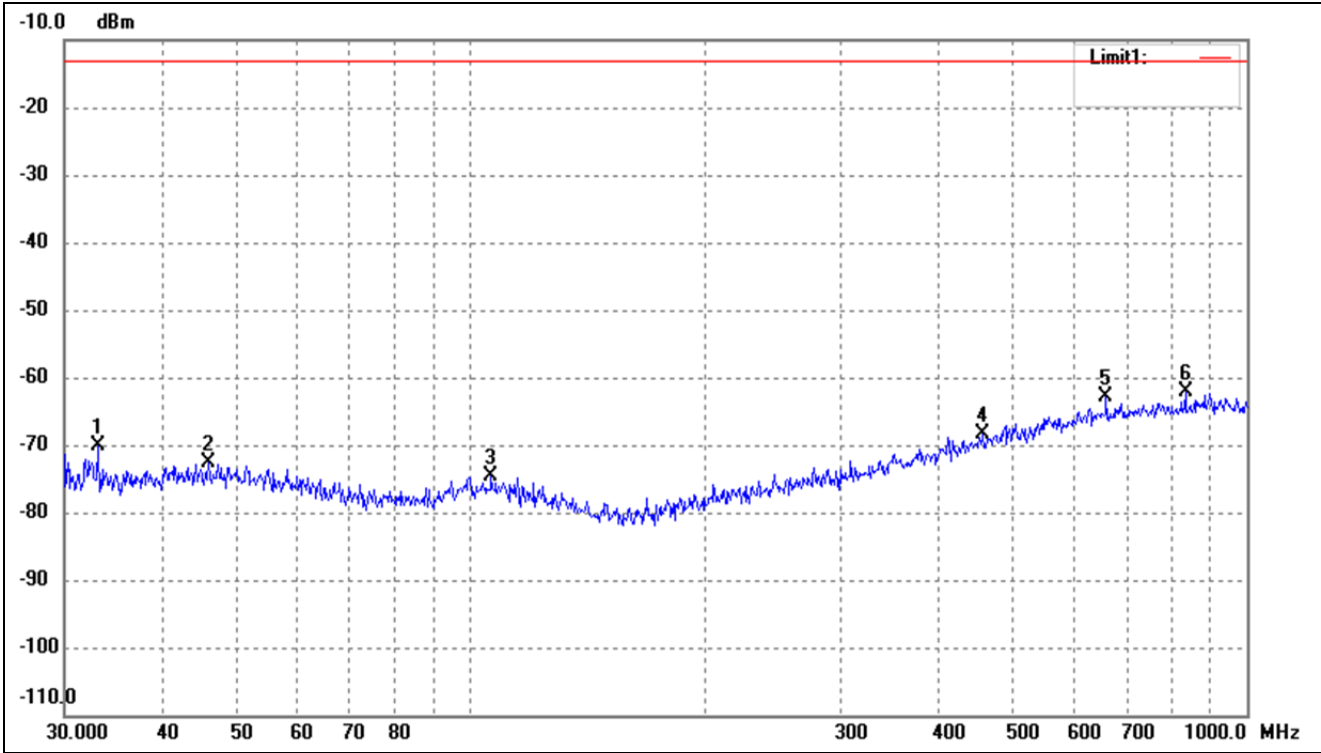


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	33.0950	-73.17	3.11	-70.06	-13.00	-57.06	ERP
2	46.0164	-77.48	4.82	-72.66	-13.00	-59.66	ERP
3	106.3850	-77.57	2.98	-74.59	-13.00	-61.59	ERP
4	457.5073	-77.71	9.43	-68.28	-13.00	-55.28	ERP
5	658.8362	-75.61	12.81	-62.80	-13.00	-49.80	ERP
6	833.3171	-76.22	14.09	-62.13	-13.00	-49.13	ERP

For Cellular Band			
Test Channel	GSM850	Polarity:	Vertical

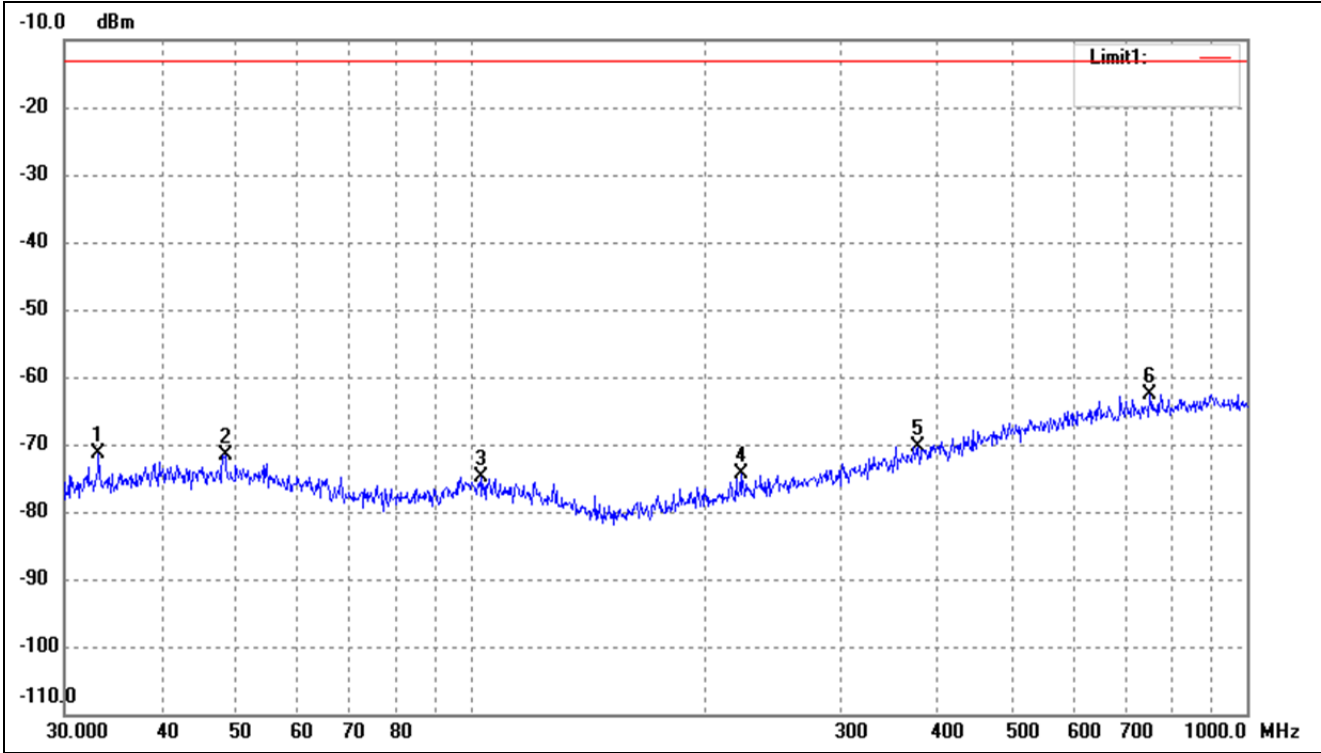


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	33.2112	-74.40	3.13	-71.27	-13.00	-58.27	ERP
2	48.3318	-76.48	4.84	-71.64	-13.00	-58.64	ERP
3	103.0800	-77.82	3.03	-74.79	-13.00	-61.79	ERP
4	222.9502	-77.11	2.73	-74.38	-13.00	-61.38	ERP
5	377.2591	-77.52	7.22	-70.30	-13.00	-57.30	ERP
6	750.1083	-76.09	13.56	-62.53	-13.00	-49.53	ERP

For Cellular Band			
Test Channel	GSM1900	Polarity:	Horizontal

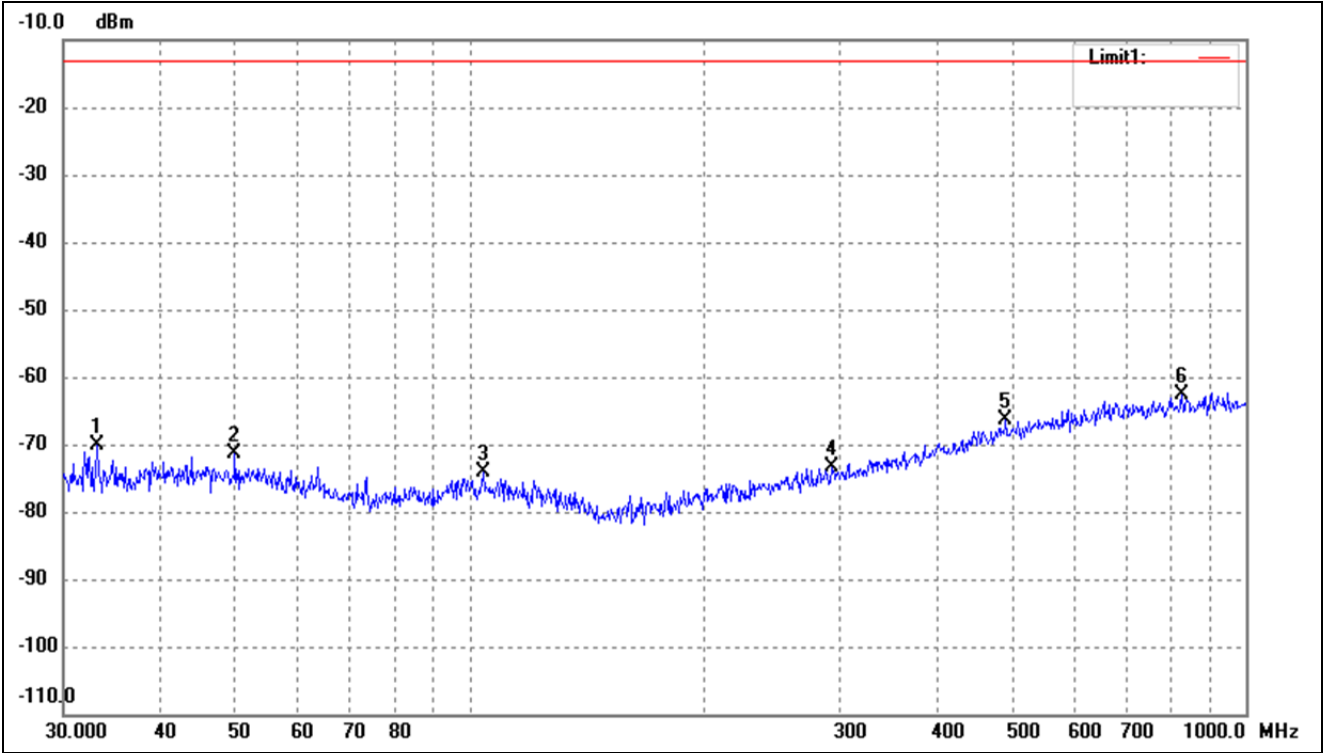

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	33.2112	-73.33	3.13	-70.20	-13.00	-57.20	ERP
2	49.8814	-76.29	4.84	-71.45	-13.00	-58.45	ERP
3	104.1701	-77.11	3.02	-74.09	-13.00	-61.09	ERP
4	293.0842	-78.13	4.66	-73.47	-13.00	-60.47	ERP
5	490.7447	-76.51	10.26	-66.25	-13.00	-53.25	ERP
6	827.4934	-76.73	14.06	-62.67	-13.00	-49.67	ERP


For Cellular Band			
Test Channel	GSM1900	Polarity:	Vertical

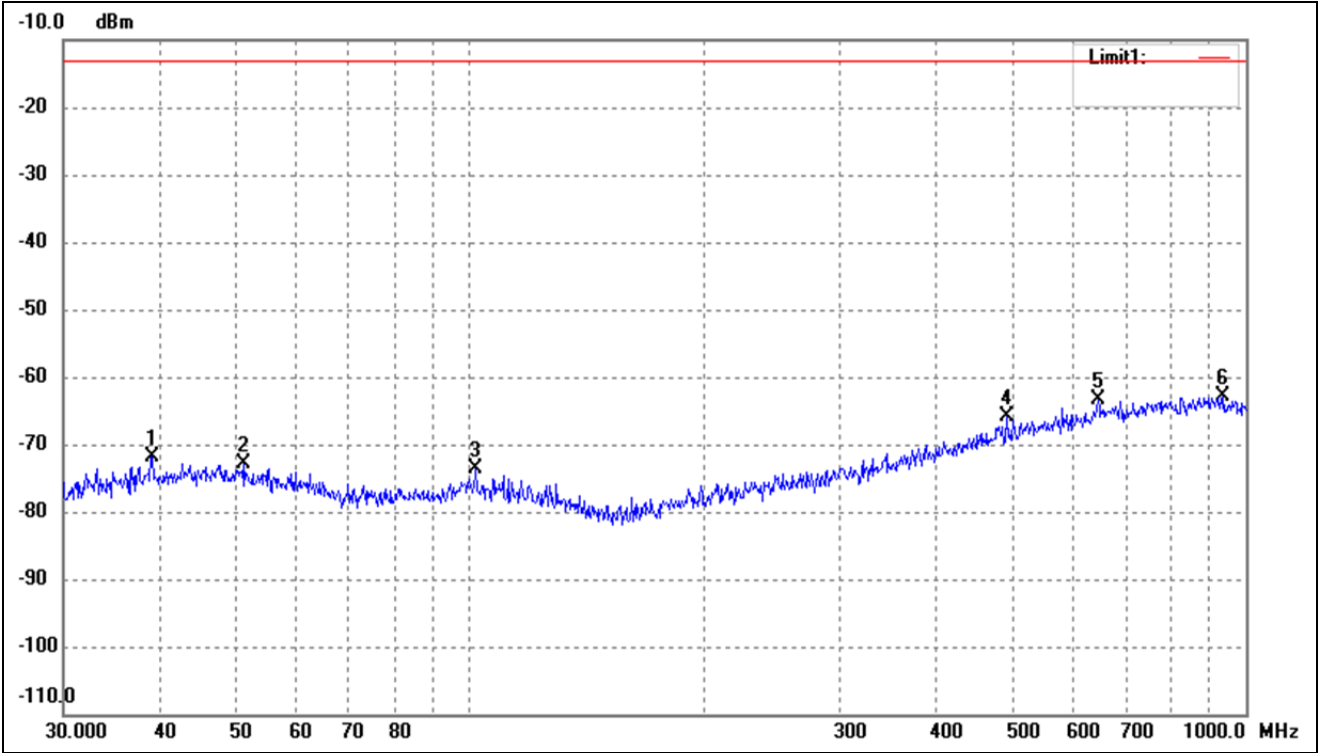

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	39.0245	-76.38	4.57	-71.81	-13.00	-58.81	ERP
2	51.3005	-77.59	4.65	-72.94	-13.00	-59.94	ERP
3	102.0014	-76.65	3.04	-73.61	-13.00	-60.61	ERP
4	492.4685	-76.16	10.31	-65.85	-13.00	-52.85	ERP
5	645.1195	-76.12	12.67	-63.45	-13.00	-50.45	ERP
6	935.5463	-77.33	14.42	-62.91	-13.00	-49.91	ERP


Note: Margin= (Reading+ Correct)- Limit

Test Channel	WCDMA Band V	Polarity:	Horizontal
--------------	--------------	-----------	------------

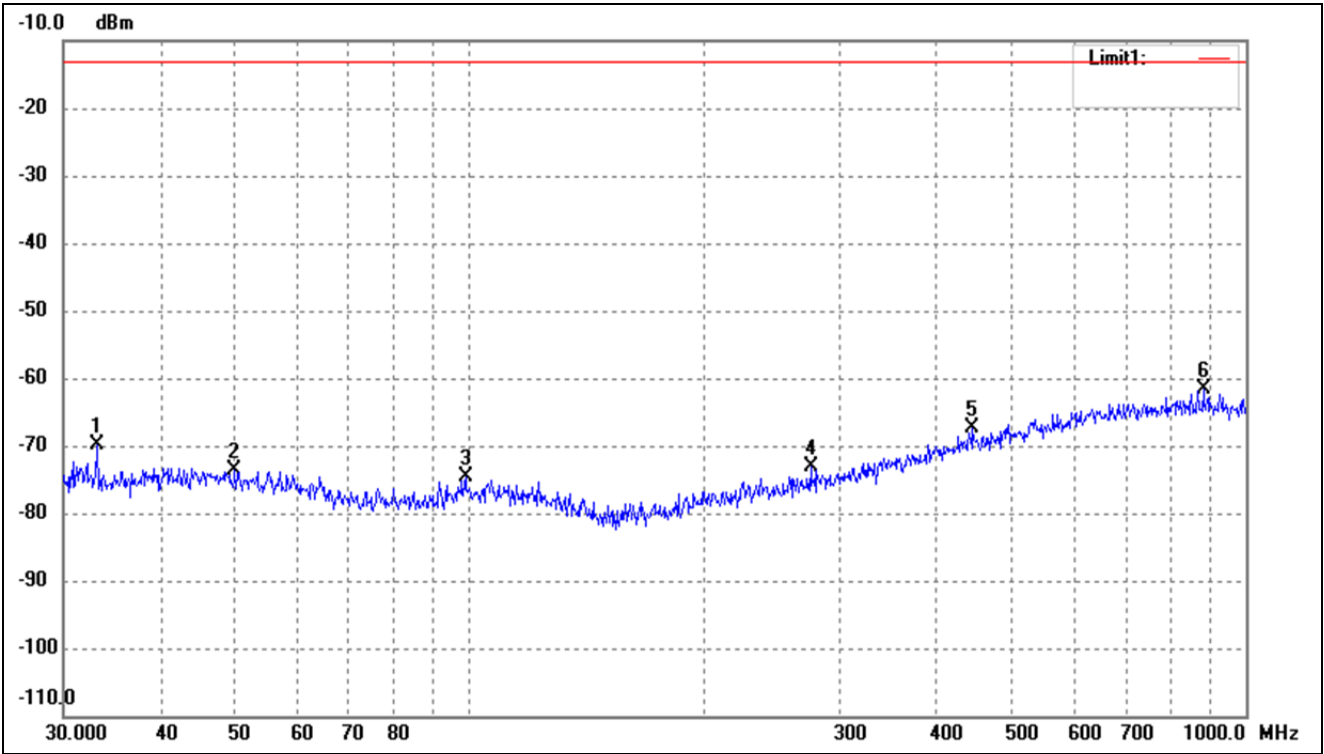


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBm)	Factor(dB)	(dBm)	(dBm)	(dB)	
1	33.2112	-72.98	3.13	-69.85	-13.00	-56.85	ERP
2	49.8814	-78.40	4.84	-73.56	-13.00	-60.56	ERP
3	98.8326	-77.46	2.86	-74.60	-13.00	-61.60	ERP
4	275.1570	-77.39	4.17	-73.22	-13.00	-60.22	ERP
5	444.8514	-76.44	9.10	-67.34	-13.00	-54.34	ERP
6	881.4067	-76.16	14.42	-61.74	-13.00	-48.74	ERP

Test Channel	WCDMA Band V	Polarity:	Vertical
--------------	--------------	-----------	----------

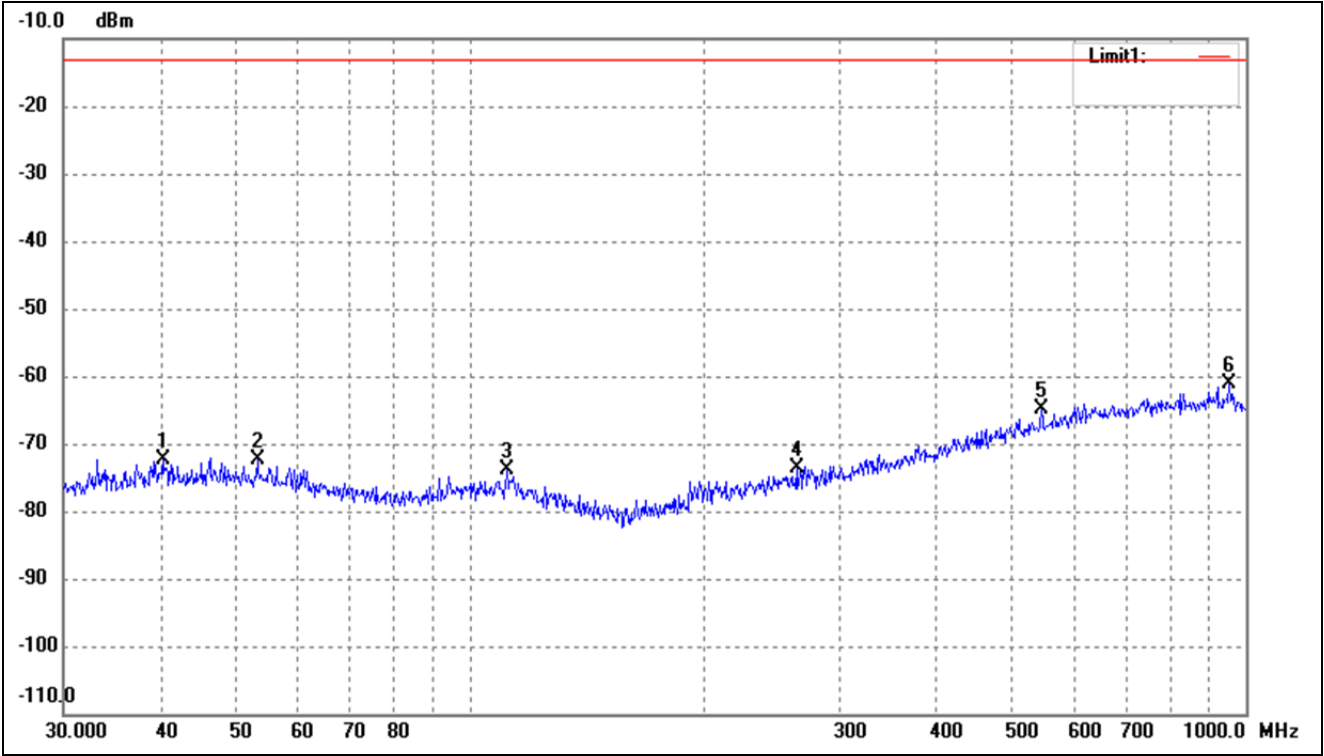


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	40.2757	-77.06	4.80	-72.26	-13.00	-59.26	ERP
2	53.3179	-76.73	4.35	-72.38	-13.00	-59.38	ERP
3	111.7380	-76.64	2.81	-73.83	-13.00	-60.83	ERP
4	263.8190	-77.46	3.86	-73.60	-13.00	-60.60	ERP
5	545.1826	-76.24	11.25	-64.99	-13.00	-51.99	ERP
6	952.0937	-75.40	14.38	-61.02	-13.00	-48.02	ERP

Test Channel	WCDMA Band IV	Polarity:	Horizontal
--------------	---------------	-----------	------------

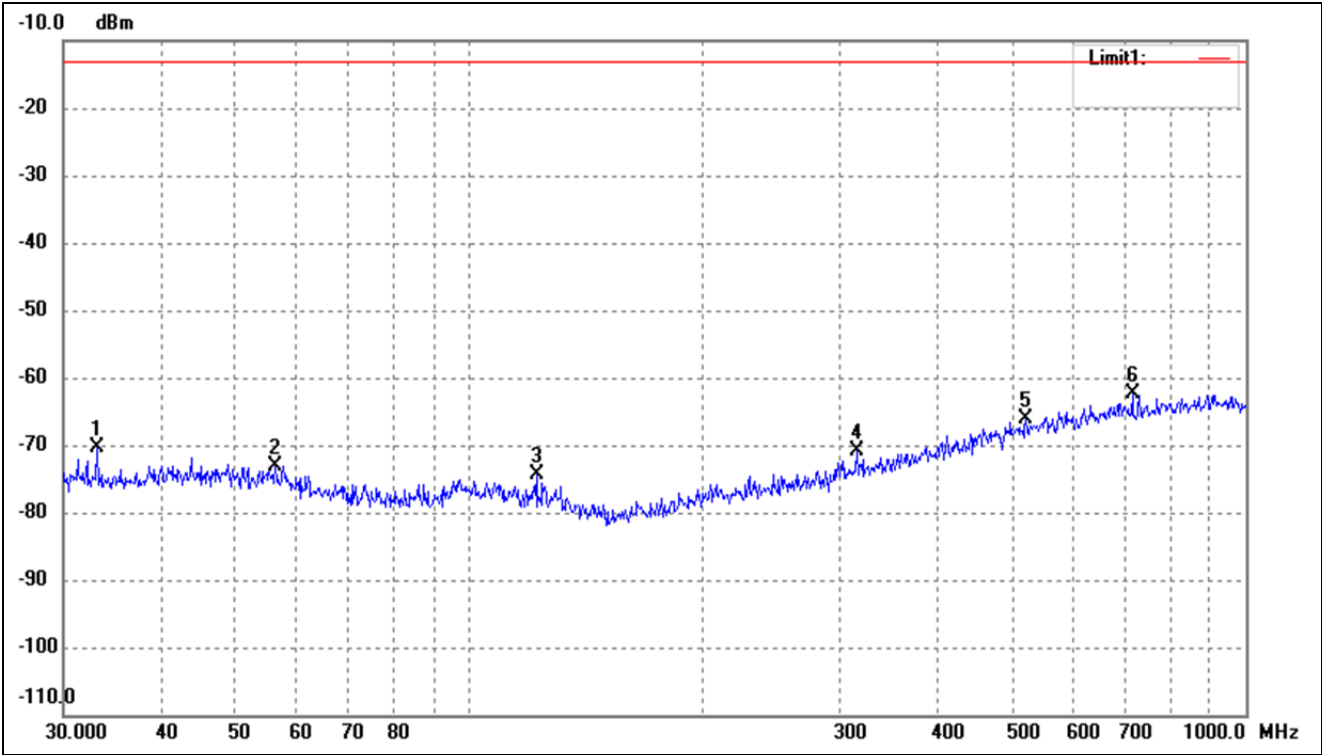

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	33.2112	-73.49	3.13	-70.36	-13.00	-57.36	ERP
2	56.1974	-77.06	3.92	-73.14	-13.00	-60.14	ERP
3	121.9755	-76.09	1.84	-74.25	-13.00	-61.25	ERP
4	315.4808	-76.08	5.32	-70.76	-13.00	-57.76	ERP
5	520.8882	-77.01	10.86	-66.15	-13.00	-53.15	ERP
6	714.1734	-75.71	13.32	-62.39	-13.00	-49.39	ERP


Test Channel	WCDMA Band IV	Polarity:	Vertical
--------------	---------------	-----------	----------

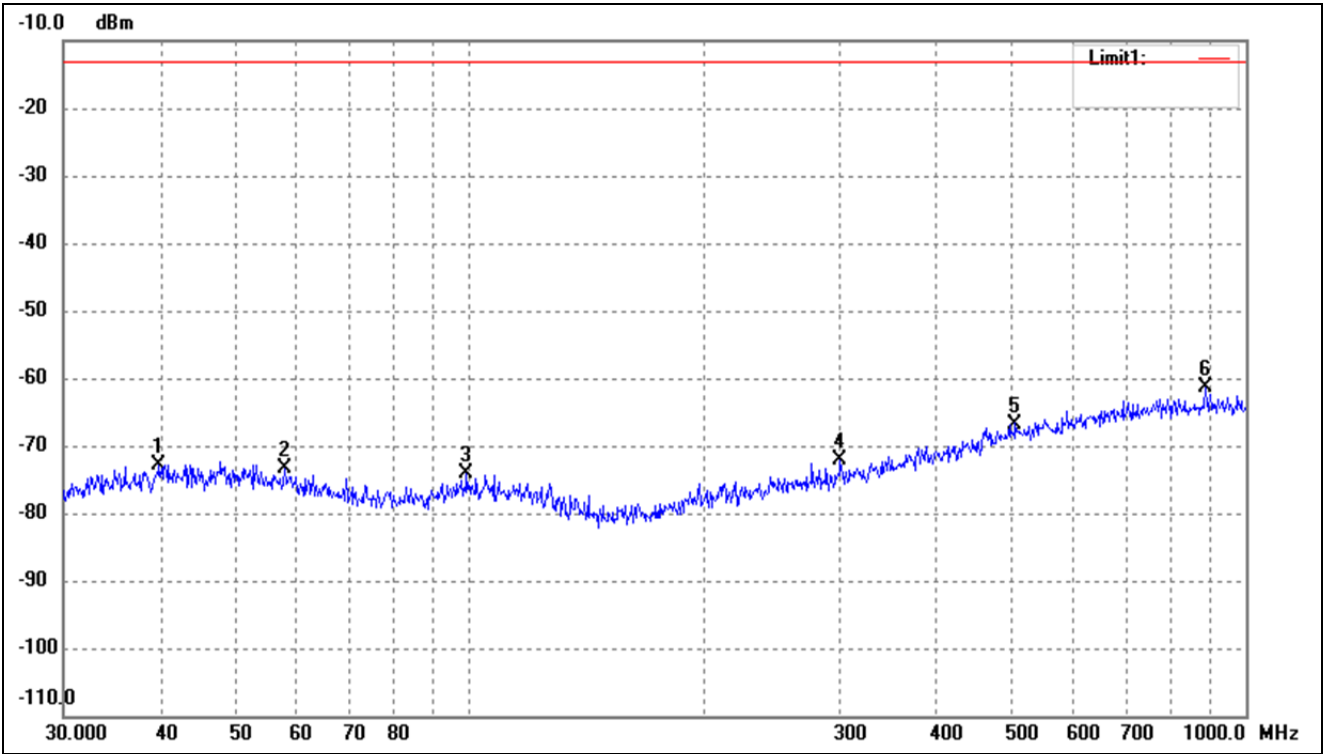

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	39.8542	-77.55	4.77	-72.78	-13.00	-59.78	ERP
2	57.7962	-76.97	3.70	-73.27	-13.00	-60.27	ERP
3	99.1797	-77.03	2.92	-74.11	-13.00	-61.11	ERP
4	300.3673	-76.97	4.85	-72.12	-13.00	-59.12	ERP
5	504.7062	-77.33	10.58	-66.75	-13.00	-53.75	ERP
6	887.6099	-75.88	14.46	-61.42	-13.00	-48.42	ERP


Note: Margin= (Reading+ Correct)- Limit

Test Channel	WCDMA Band II	Polarity:	Horizontal
--------------	---------------	-----------	------------

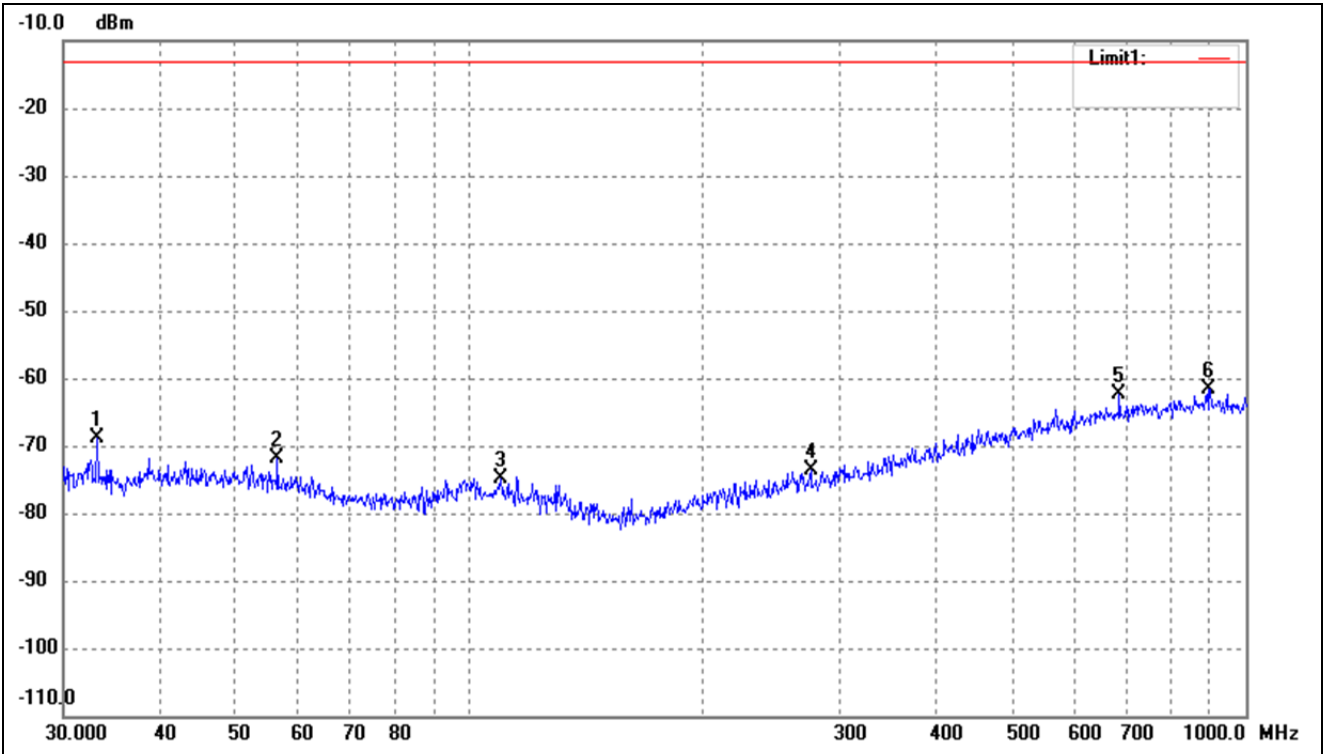

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	
1	33.2112	-71.97	3.13	-68.84	-13.00	-55.84	ERP
2	56.5929	-75.69	3.87	-71.82	-13.00	-58.82	ERP
3	109.7960	-77.83	2.94	-74.89	-13.00	-61.89	ERP
4	275.1570	-77.71	4.17	-73.54	-13.00	-60.54	ERP
5	687.1507	-75.36	13.10	-62.26	-13.00	-49.26	ERP
6	896.9965	-76.10	14.53	-61.57	-13.00	-48.57	ERP


Test Channel	WCDMA Band II	Polarity:	Vertical
--------------	---------------	-----------	----------

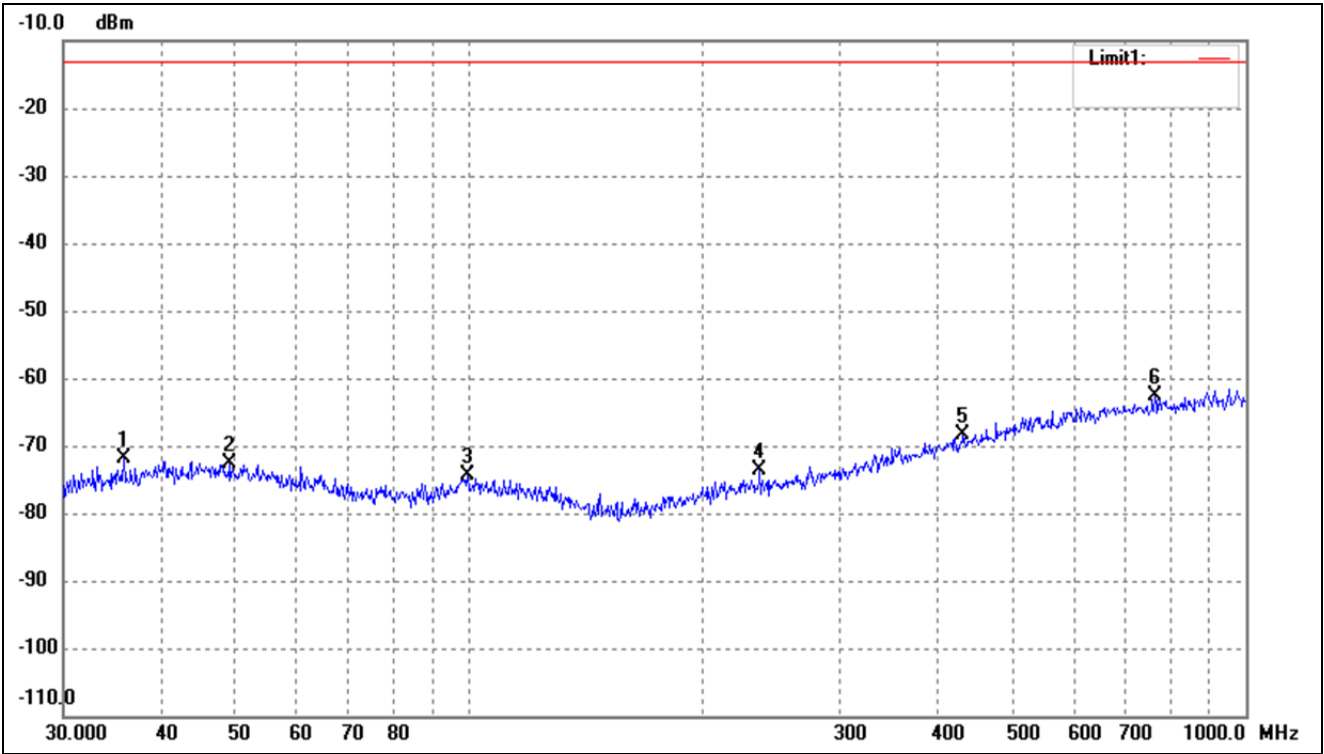

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	35.8747	-75.73	3.79	-71.94	-13.00	-58.94	ERP
2	49.1866	-77.54	4.83	-72.71	-13.00	-59.71	ERP
3	99.5281	-77.47	2.99	-74.48	-13.00	-61.48	ERP
4	236.6447	-76.73	3.12	-73.61	-13.00	-60.61	ERP
5	432.5457	-77.22	8.78	-68.44	-13.00	-55.44	ERP
6	763.3757	-76.25	13.65	-62.60	-13.00	-49.60	ERP


MDT860

For Cellular Band			
Test Channel	GSM850	Polarity:	Horizontal

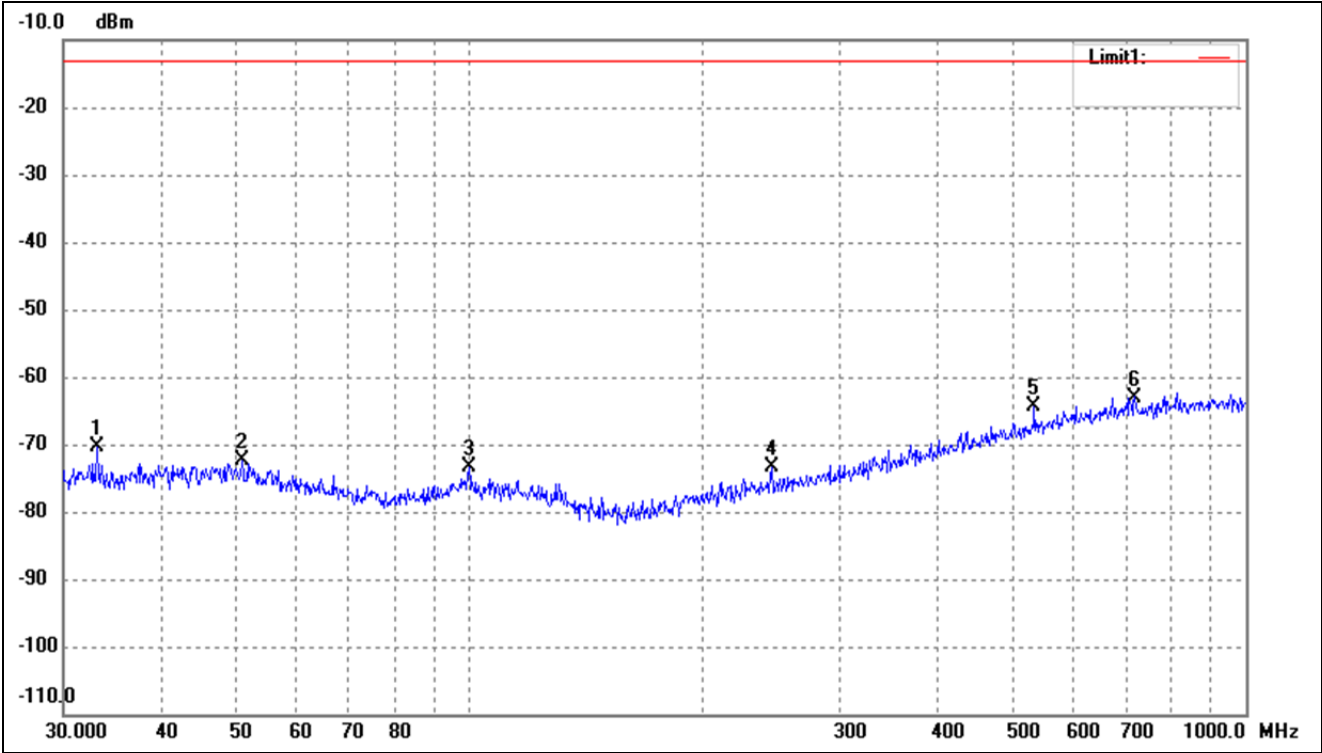


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	33.2112	-73.50	3.13	-70.37	-13.00	-57.37	ERP
2	50.9420	-77.08	4.70	-72.38	-13.00	-59.38	ERP
3	99.8777	-76.42	3.05	-73.37	-13.00	-60.37	ERP
4	245.0900	-76.74	3.35	-73.39	-13.00	-60.39	ERP
5	533.8321	-75.55	11.06	-64.49	-13.00	-51.49	ERP
6	719.1995	-76.35	13.35	-63.00	-13.00	-50.00	ERP

For Cellular Band			
Test Channel	GSM850	Polarity:	Vertical

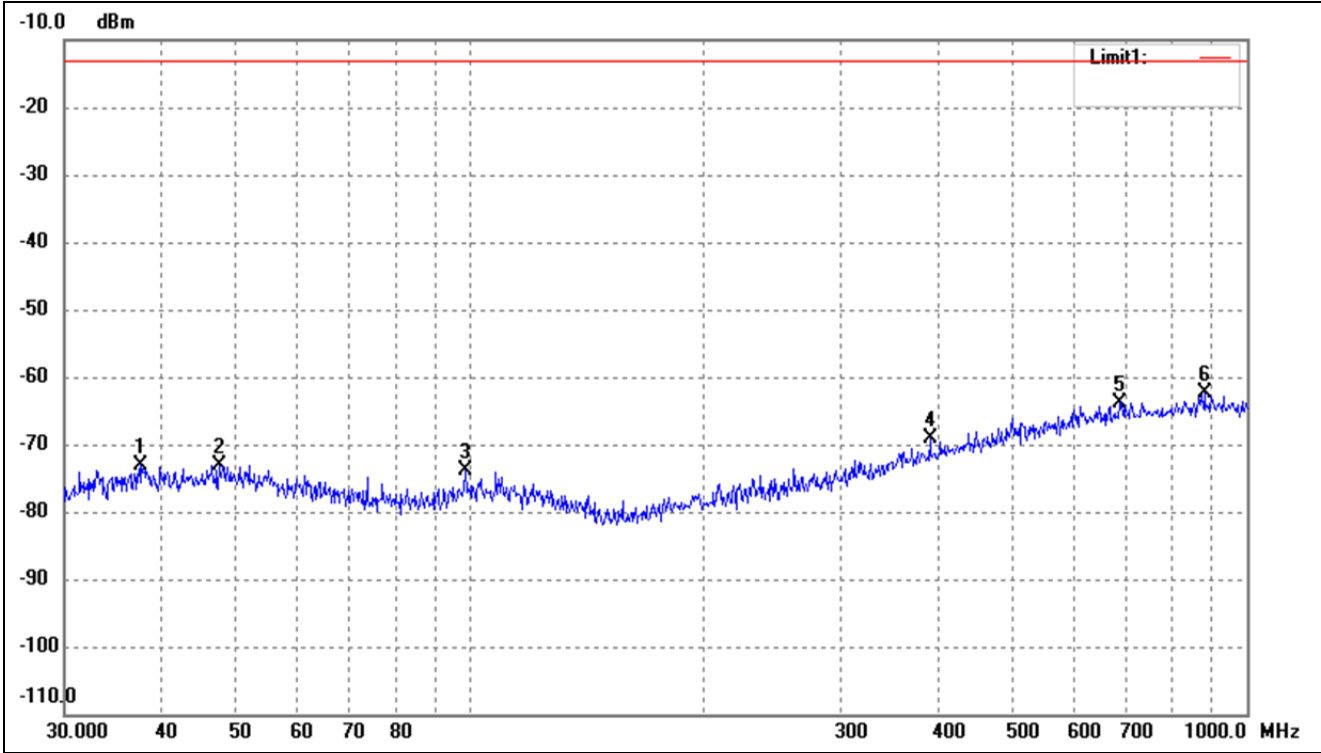


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	37.6798	-77.23	4.23	-73.00	-13.00	-60.00	ERP
2	47.4918	-77.96	4.83	-73.13	-13.00	-60.13	ERP
3	98.4866	-76.58	2.79	-73.79	-13.00	-60.79	ERP
4	390.7226	-76.64	7.62	-69.02	-13.00	-56.02	ERP
5	684.7454	-76.90	13.07	-63.83	-13.00	-50.83	ERP
6	881.4067	-76.72	14.42	-62.30	-13.00	-49.30	ERP

For Cellular Band			
Test Channel	GSM1900	Polarity:	Horizontal

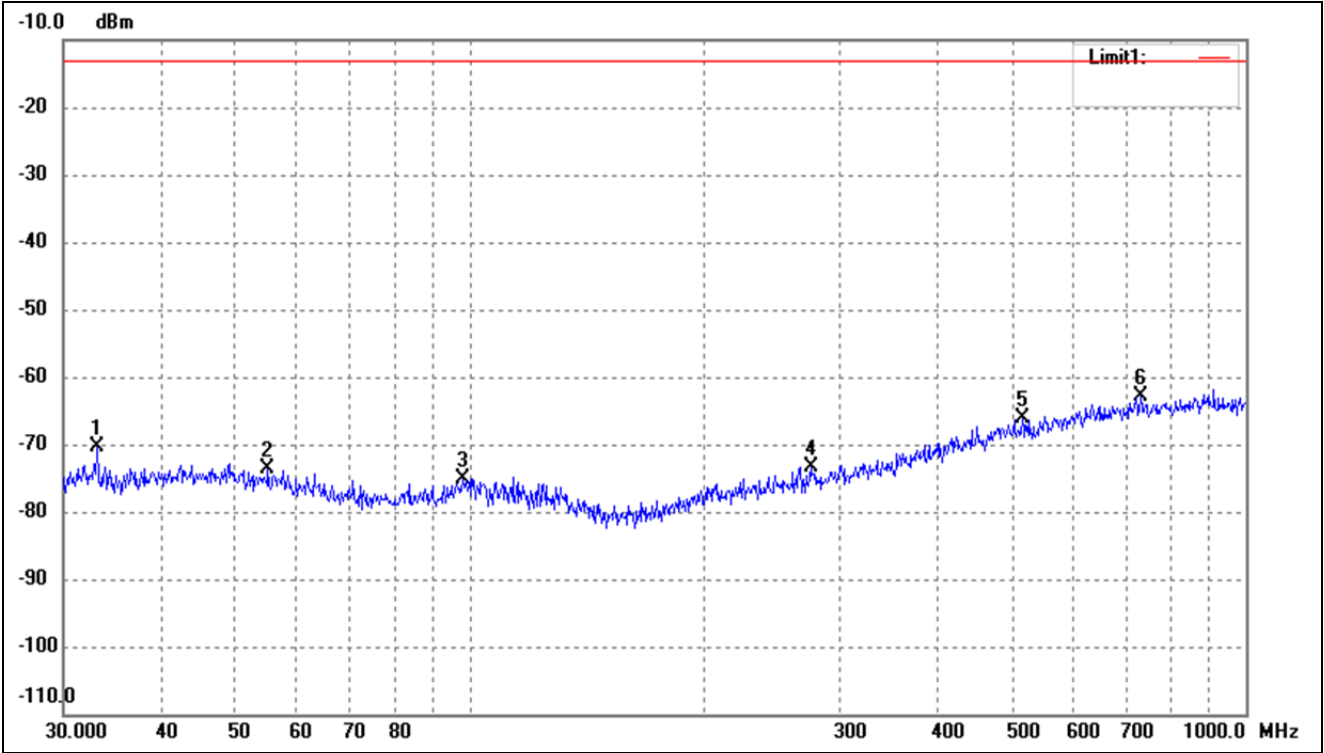

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	33.2112	-73.41	3.13	-70.28	-13.00	-57.28	ERP
2	55.0274	-77.81	4.11	-73.70	-13.00	-60.70	ERP
3	98.1419	-77.91	2.73	-75.18	-13.00	-62.18	ERP
4	275.1570	-77.58	4.17	-73.41	-13.00	-60.41	ERP
5	515.4374	-76.87	10.76	-66.11	-13.00	-53.11	ERP
6	731.9203	-76.27	13.43	-62.84	-13.00	-49.84	ERP


For Cellular Band			
Test Channel	GSM1900	Polarity:	Vertical

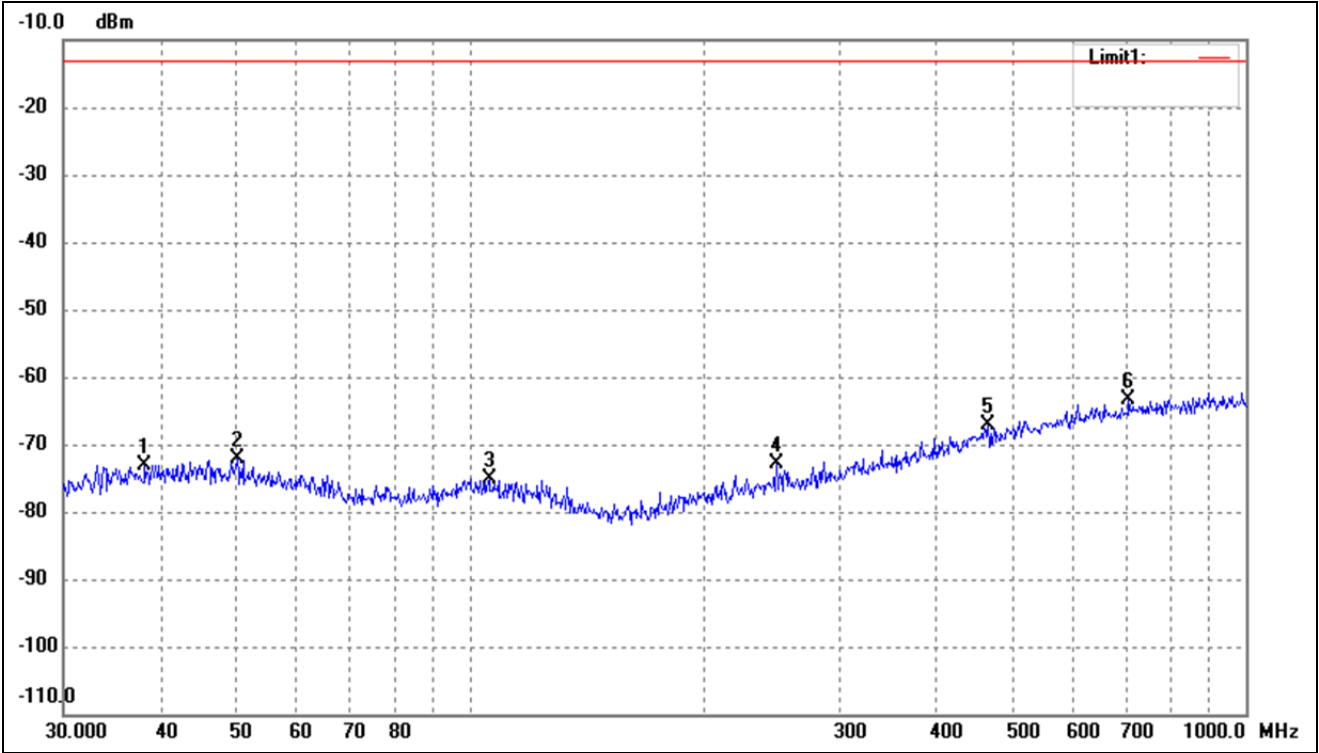

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	38.2120	-77.36	4.35	-73.01	-13.00	-60.01	ERP
2	50.2325	-76.87	4.81	-72.06	-13.00	-59.06	ERP
3	106.0126	-78.08	2.98	-75.10	-13.00	-62.10	ERP
4	248.5519	-76.39	3.45	-72.94	-13.00	-59.94	ERP
5	465.5994	-76.77	9.63	-67.14	-13.00	-54.14	ERP
6	706.6999	-76.59	13.27	-63.32	-13.00	-50.32	ERP


Note: Margin= (Reading+ Correct)- Limit

Test Channel	WCDMA Band V	Polarity:	Horizontal
--------------	--------------	-----------	------------

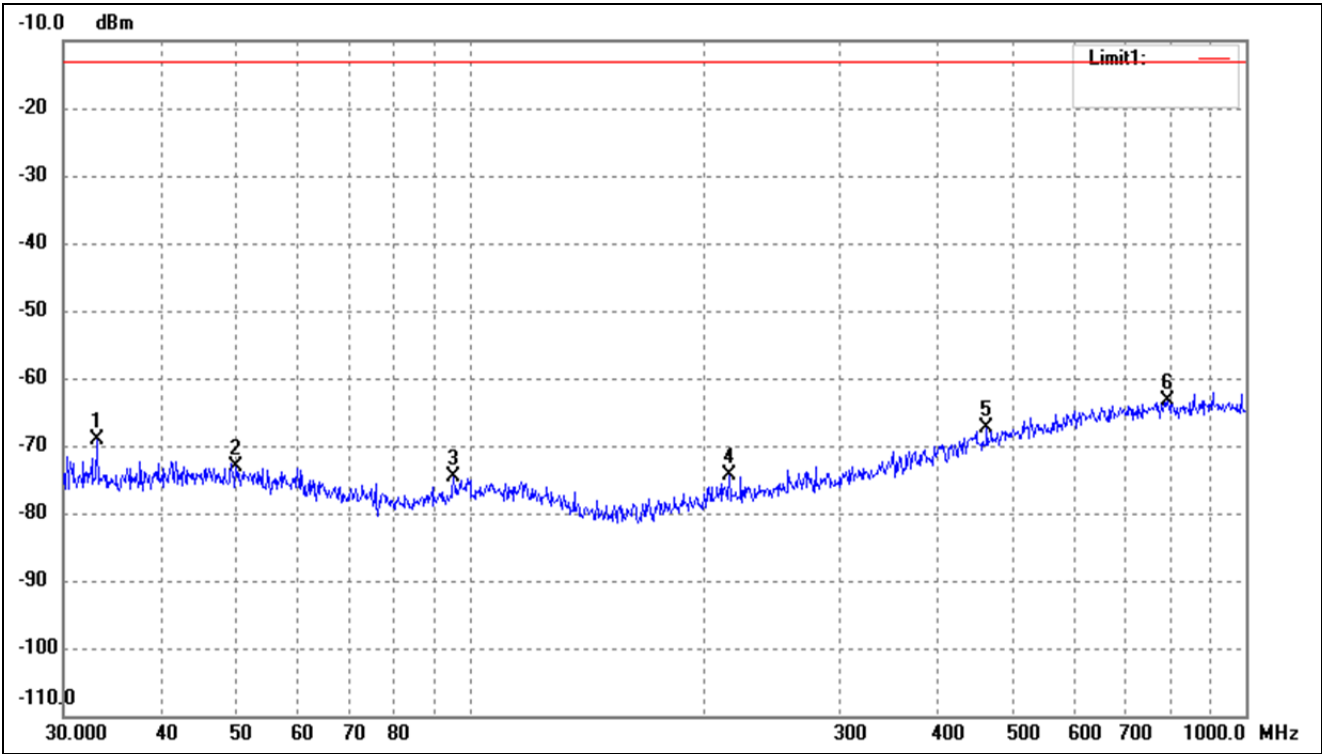


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBm)	Factor(dB)	(dBm)	(dBm)	(dB)	
1	33.0950	-72.34	3.11	-69.23	-13.00	-56.23	ERP
2	50.0566	-78.04	4.83	-73.21	-13.00	-60.21	ERP
3	95.4270	-76.86	2.22	-74.64	-13.00	-61.64	ERP
4	216.0240	-76.97	2.54	-74.43	-13.00	-61.43	ERP
5	463.9696	-77.04	9.59	-67.45	-13.00	-54.45	ERP
6	793.3960	-77.22	13.85	-63.37	-13.00	-50.37	ERP

Test Channel	WCDMA Band V	Polarity:	Vertical
--------------	--------------	-----------	----------

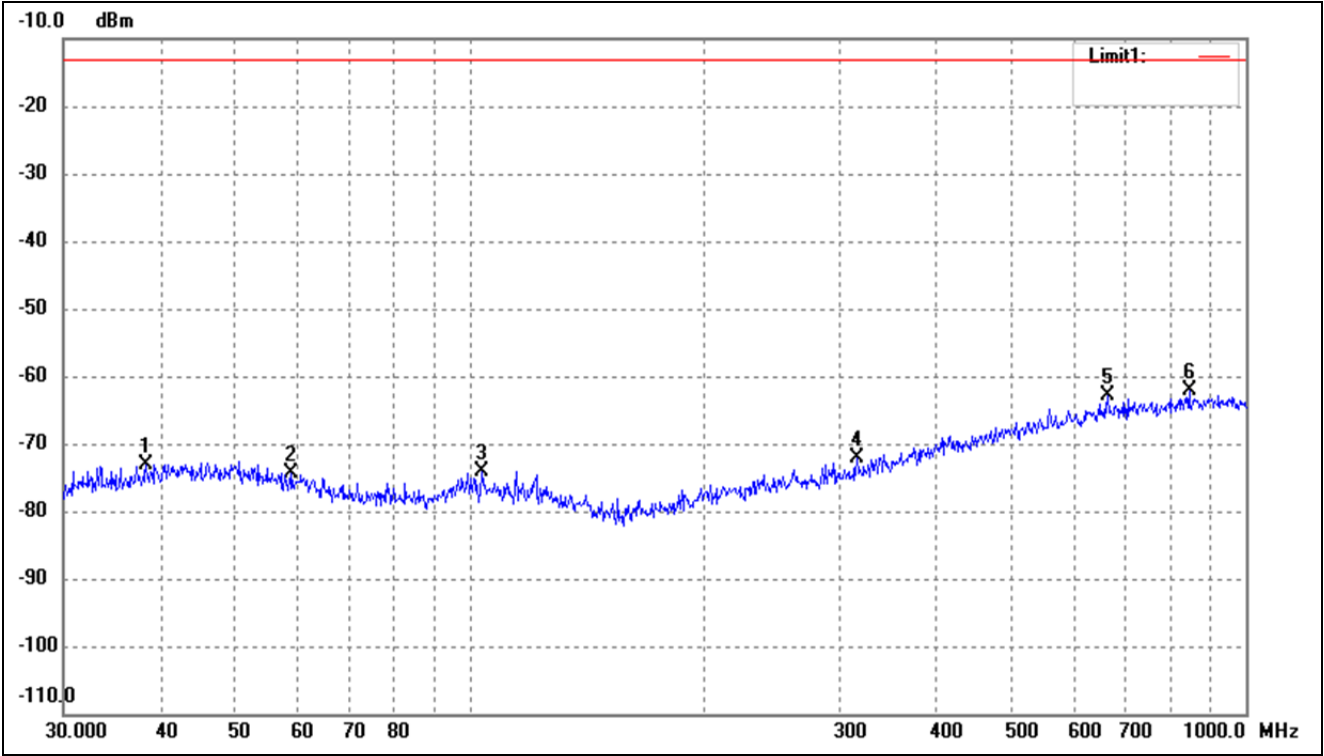


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	38.3462	-77.42	4.40	-73.02	-13.00	-60.02	ERP
2	59.0251	-77.86	3.52	-74.34	-13.00	-61.34	ERP
3	103.8055	-77.15	3.01	-74.14	-13.00	-61.14	ERP
4	315.4808	-77.50	5.32	-72.18	-13.00	-59.18	ERP
5	663.4729	-75.85	12.86	-62.99	-13.00	-49.99	ERP
6	845.0878	-76.39	14.16	-62.23	-13.00	-49.23	ERP

Test Channel	WCDMA Band IV	Polarity:	Horizontal
--------------	---------------	-----------	------------

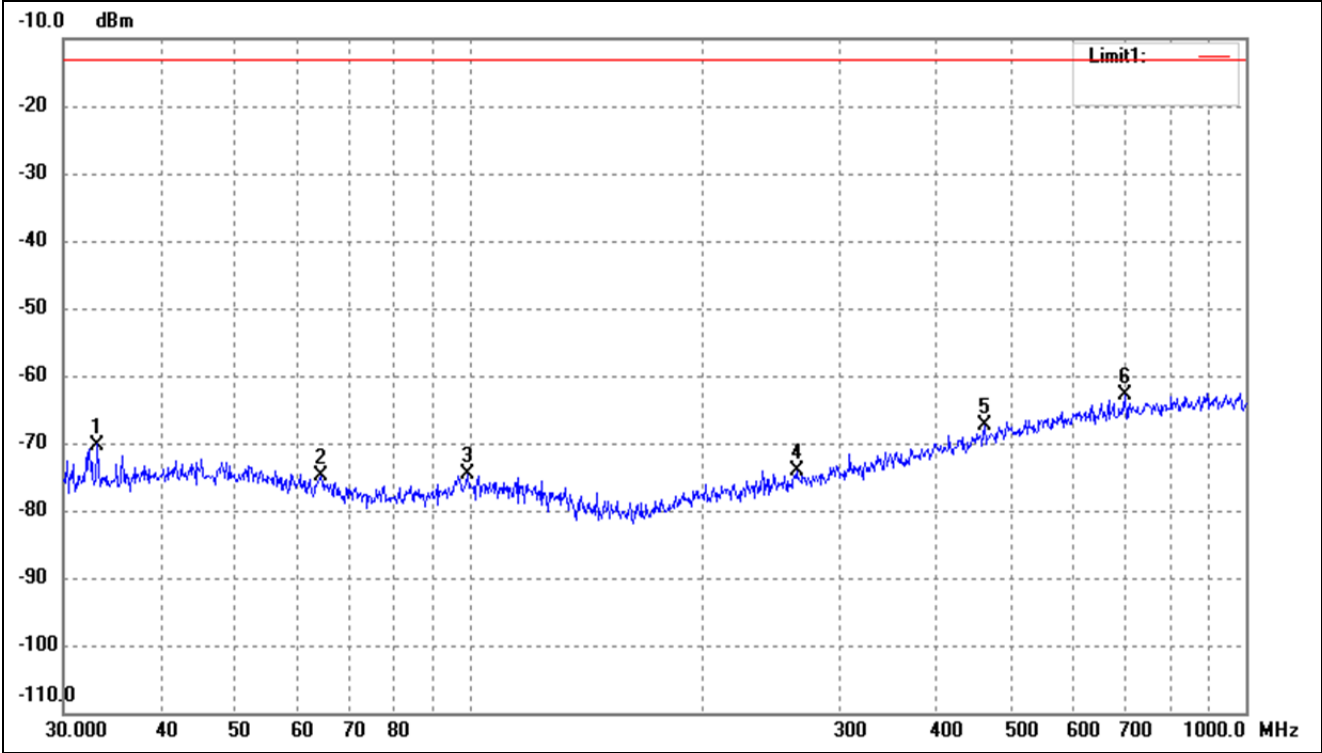

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	33.2112	-73.38	3.13	-70.25	-13.00	-57.25	ERP
2	64.4331	-77.37	2.60	-74.77	-13.00	-61.77	ERP
3	99.5281	-77.52	2.99	-74.53	-13.00	-61.53	ERP
4	263.8190	-78.07	3.86	-74.21	-13.00	-61.21	ERP
5	460.7271	-76.83	9.51	-67.32	-13.00	-54.32	ERP
6	699.3046	-76.16	13.22	-62.94	-13.00	-49.94	ERP


Test Channel	WCDMA Band IV	Polarity:	Vertical
--------------	---------------	-----------	----------

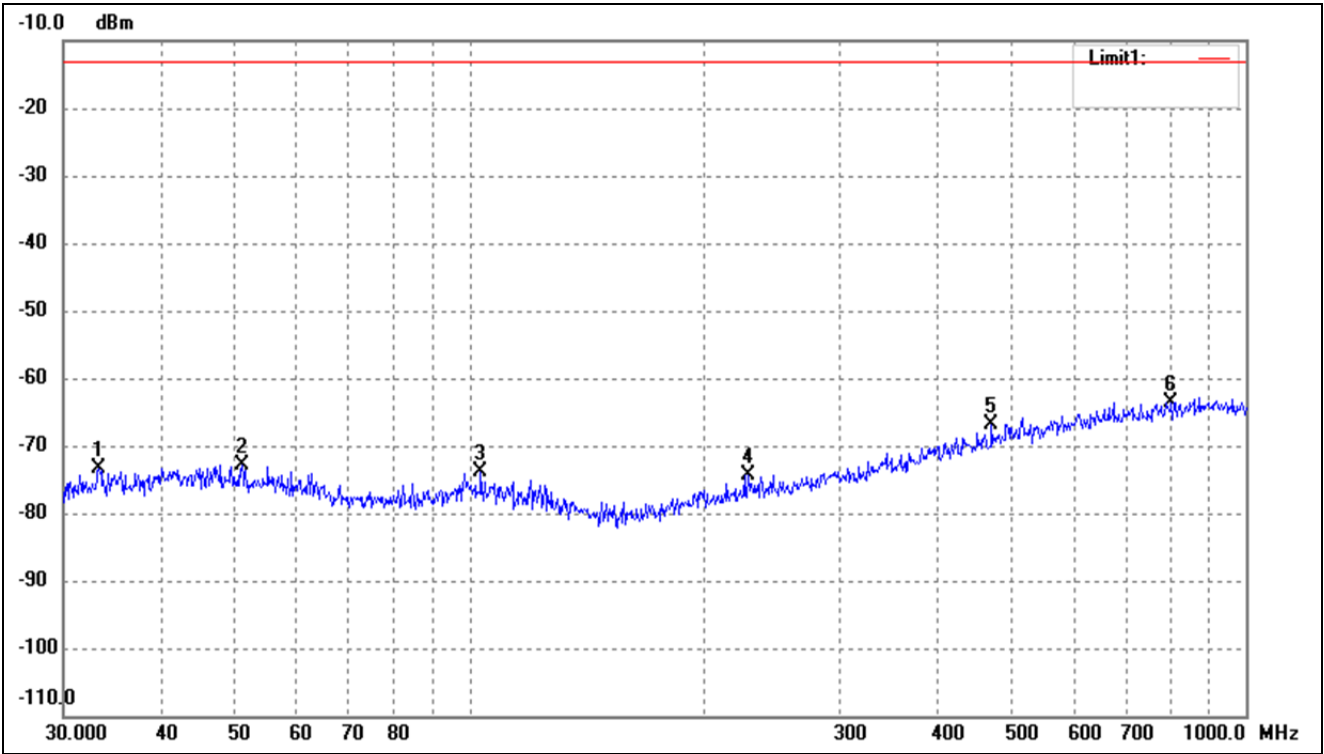

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBm)	Factor(dB)	(dBm)	(dBm)	(dB)	
1	33.3279	-76.48	3.17	-73.31	-13.00	-60.31	ERP
2	50.9420	-77.54	4.70	-72.84	-13.00	-59.84	ERP
3	103.4421	-76.81	3.02	-73.79	-13.00	-60.79	ERP
4	228.4904	-77.18	2.88	-74.30	-13.00	-61.30	ERP
5	470.5232	-76.56	9.76	-66.80	-13.00	-53.80	ERP
6	801.7863	-77.50	13.90	-63.60	-13.00	-50.60	ERP


Note: $Margin = (Reading + Correct) - Limit$

Test Channel	WCDMA Band II	Polarity:	Horizontal
--------------	---------------	-----------	------------

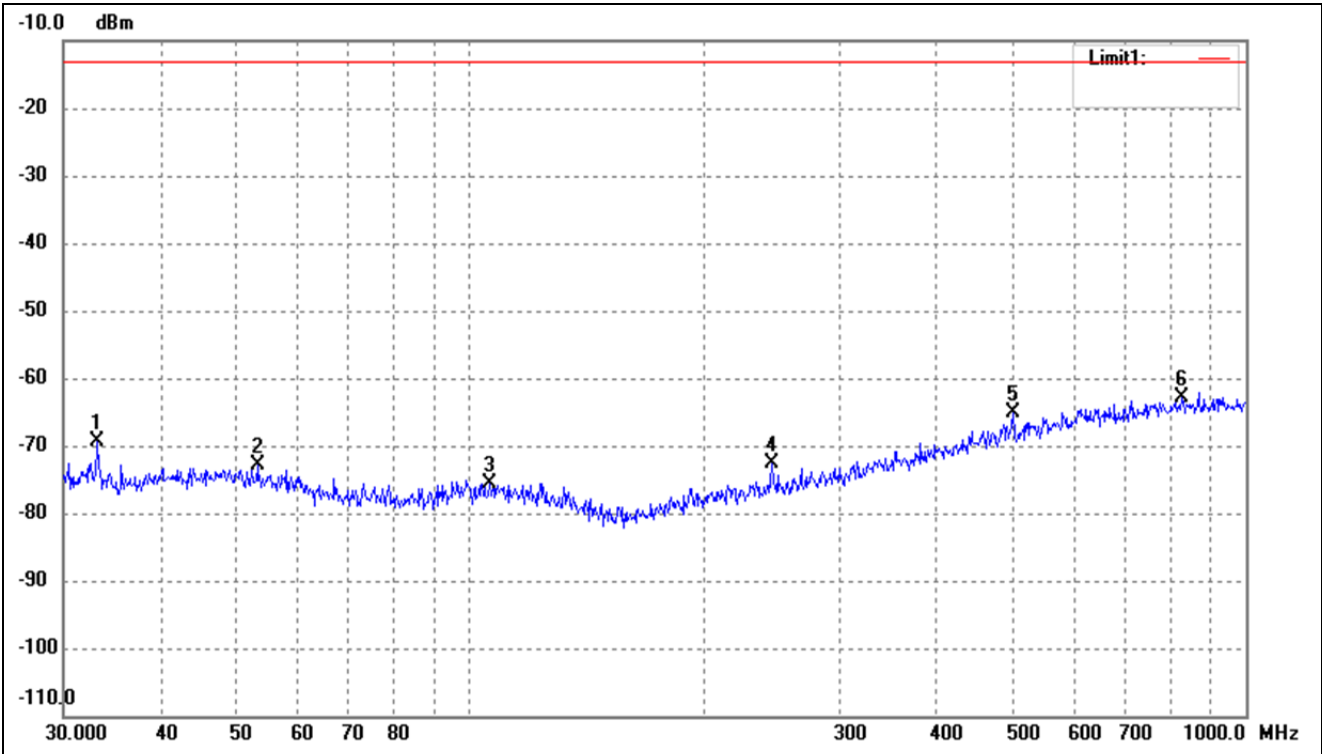

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	33.2112	-72.50	3.13	-69.37	-13.00	-56.37	ERP
2	53.3179	-77.18	4.35	-72.83	-13.00	-59.83	ERP
3	106.3850	-78.61	2.98	-75.63	-13.00	-62.63	ERP
4	245.0900	-76.02	3.35	-72.67	-13.00	-59.67	ERP
5	501.1790	-75.72	10.52	-65.20	-13.00	-52.20	ERP
6	827.4934	-77.02	14.06	-62.96	-13.00	-49.96	ERP

Test Channel	WCDMA Band II	Polarity:	Vertical
--------------	---------------	-----------	----------

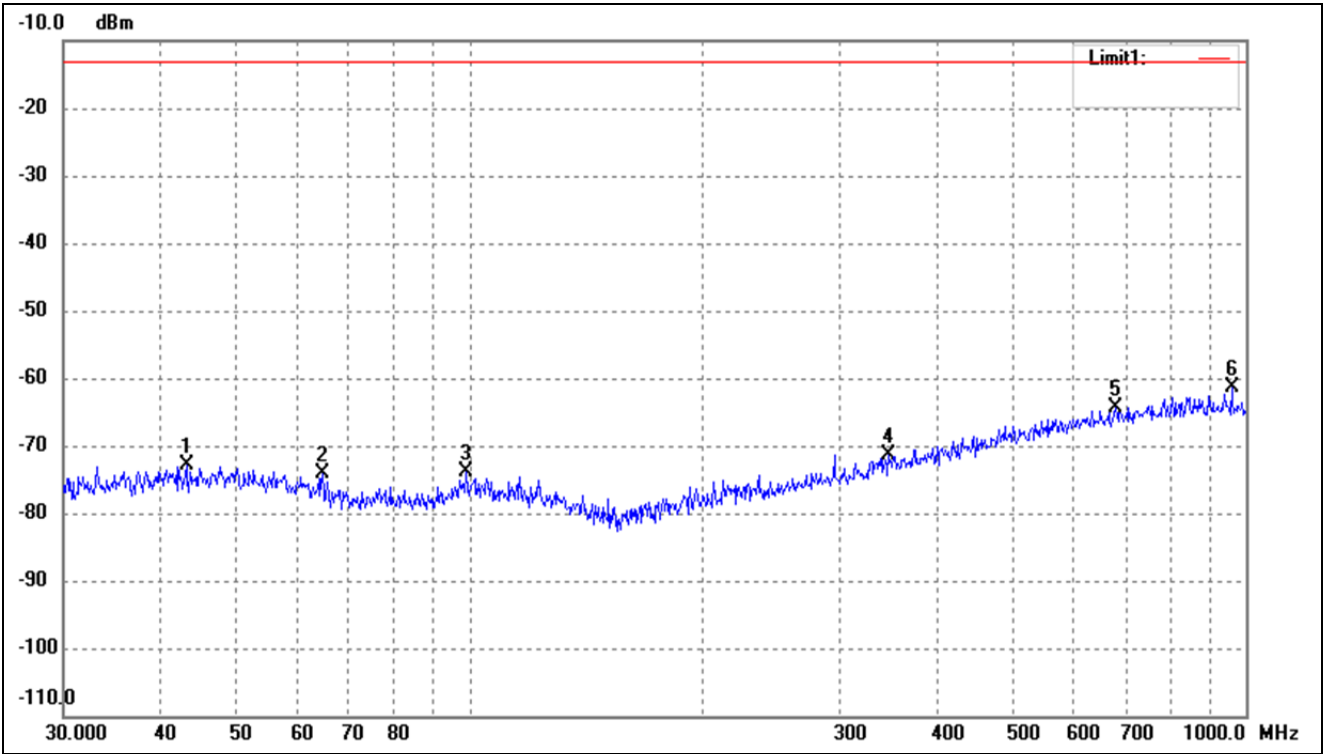

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBm)	Factor(dB)	(dBm)	(dBm)	(dB)	
1	43.2017	-77.75	4.80	-72.95	-13.00	-59.95	ERP
2	64.6594	-76.76	2.56	-74.20	-13.00	-61.20	ERP
3	99.1797	-76.91	2.92	-73.99	-13.00	-60.99	ERP
4	346.8092	-77.67	6.30	-71.37	-13.00	-58.37	ERP
5	679.9600	-77.30	13.03	-64.27	-13.00	-51.27	ERP
6	958.7943	-75.81	14.35	-61.46	-13.00	-48.46	ERP

Note: Margin= (Reading+ Correct)- Limit

- Spurious Emissions Above 1GHz
- MDT760
- For Cellular Band_GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-35.9	4.94	-30.96	-13	-17.96	H
2472.6	-43.6	8.46	-35.14	-13	-22.14	H
1648.4	-36.12	4.94	-31.18	-13	-18.18	V
2472.6	-42.21	8.46	-33.75	-13	-20.75	V
Middle Channel (836.6MHz)						
1673.2	-36.89	5.11	-31.78	-13	-18.78	H
2509.8	-44.16	8.54	-35.62	-13	-22.62	H
1673.2	-34.13	5.11	-29.02	-13	-16.02	V
2509.8	-44.78	8.54	-36.24	-13	-23.24	V
High Channel (848.8MHz)						
1697.6	-35.68	5.25	-30.43	-13	-17.43	H
2546.4	-44.88	8.57	-36.31	-13	-23.31	H
1697.6	-35.03	5.25	-29.78	-13	-16.78	V
2546.4	-42.70	8.57	-34.13	-13	-21.13	V

- For PCS Band_GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-39.4	10.54	-28.86	-13	-15.86	H
5550.6	-48.71	13.37	-35.34	-13	-22.34	H
3700.4	-39.17	10.54	-28.63	-13	-15.63	V
5550.6	-49.84	13.37	-36.47	-13	-23.47	V
Middle Channel (1880MHz)						
3760.0	-42.7	10.64	-32.06	-13	-19.06	H
5640.0	-46.11	13.54	-32.57	-13	-19.57	H
3760.0	-39.24	10.64	-28.6	-13	-15.6	V
5640.0	-47.43	13.54	-33.89	-13	-20.89	V
High Channel (1909.8MHz)						
3819.6	-41.04	10.74	-30.3	-13	-17.3	H
5729.4	-48.11	13.71	-34.4	-13	-21.4	H
3819.6	-42.93	10.74	-32.19	-13	-19.19	V
5729.4	-46.64	13.71	-32.93	-13	-19.93	V

➤ For WCDMA Band V Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-34.68	4.94	-29.74	-13	-16.74	H
2479.2	-43.13	8.46	-34.67	-13	-21.67	H
1652.8	-34.57	4.94	-29.63	-13	-16.63	V
2479.2	-41.7	8.46	-33.24	-13	-20.24	V
Middle Channel (836.6MHz)						
1672.8	-36.98	5.11	-31.87	-13	-18.87	H
2509.2	-43.43	8.54	-34.89	-13	-21.89	H
1672.8	-37.19	5.11	-32.08	-13	-19.08	V
2509.2	-43.39	8.54	-34.85	-13	-21.85	V
High Channel (846.6MHz)						
1693.2	-34.33	5.25	-29.08	-13	-16.08	H
2539.8	-41.75	8.57	-33.18	-13	-20.18	H
1693.2	-34.99	5.25	-29.74	-13	-16.74	V
2539.8	-43.79	8.57	-35.22	-13	-22.22	V

➤ For WCDMA Band IV Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1712.4MHz)						
3424.8	-40.05	8.65	-31.4	-13	-18.4	H
5137.2	-46.92	12.03	-34.89	-13	-21.89	H
3424.8	-42.42	8.65	-33.77	-13	-20.77	V
5137.2	-48.64	12.03	-36.61	-13	-23.61	V
Middle Channel (1732.4MHz)						
3466.8	-40.64	8.91	-31.73	-13	-18.73	H
5200.2	-48.83	12.29	-36.54	-13	-23.54	H
3466.8	-41.76	8.91	-32.85	-13	-19.85	V
5200.2	-47.56	12.29	-35.27	-13	-22.27	V
High Channel (1752.6MHz)						
3505.2	-40.57	9.11	-31.46	-13	-18.46	H
5257.8	-46.98	12.56	-34.42	-13	-21.42	H
3505.2	-41.68	9.11	-32.57	-13	-19.57	V
5257.8	-48.19	12.56	-35.63	-13	-22.63	V

➤ For WCDMA Band II Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.8	-42.53	10.54	-31.99	-13	-18.99	H
5557.2	-47.6	13.37	-34.23	-13	-21.23	H
3704.8	-42.65	10.54	-32.11	-13	-19.11	V
5557.2	-48.53	13.37	-35.16	-13	-22.16	V
Middle Channel (1880MHz)						
3760.0	-40.85	10.64	-30.21	-13	-17.21	H
5640.0	-46.01	13.54	-32.47	-13	-19.47	H
3760.0	-40.38	10.64	-29.74	-13	-16.74	V
5640.0	-48.36	13.54	-34.82	-13	-21.82	V
High Channel (1907.6MHz)						
3815.2	-41.32	10.74	-30.58	-13	-17.58	H
5722.8	-46.11	13.71	-32.4	-13	-19.4	H
3815.2	-41.91	10.74	-31.17	-13	-18.17	V
5722.8	-47.97	13.71	-34.26	-13	-21.26	H

➤ MDT860

➤ For Cellular Band GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-37.25	4.94	-32.31	-13	-19.31	H
2472.6	-44.37	8.46	-35.91	-13	-22.91	H
1648.4	-36.18	4.94	-31.24	-13	-18.24	V
2472.6	-42.98	8.46	-34.52	-13	-21.52	V
Middle Channel (836.6MHz)						
1673.2	-36.87	5.11	-31.76	-13	-18.76	H
2509.8	-42.86	8.54	-34.32	-13	-21.32	H
1673.2	-37.73	5.11	-32.62	-13	-19.62	V
2509.8	-43.27	8.54	-34.73	-13	-21.73	V
High Channel (848.8MHz)						
1697.6	-34.72	5.25	-29.47	-13	-16.47	H
2546.4	-42.48	8.57	-33.91	-13	-20.91	H
1697.6	-34.3	5.25	-29.05	-13	-16.05	V
2546.4	-44.48	8.57	-35.91	-13	-22.91	V

➤ For PCS Band GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-42.99	10.54	-32.45	-13	-19.45	H
5550.6	-47.43	13.37	-34.06	-13	-21.06	H
3700.4	-42.8	10.54	-32.26	-13	-19.26	V
5550.6	-48.14	13.37	-34.77	-13	-21.77	V
Middle Channel (1880MHz)						
3760.0	-39.69	10.64	-29.05	-13	-16.05	H
5640.0	-48.7	13.54	-35.16	-13	-22.16	H
3760.0	-41.57	10.64	-30.93	-13	-17.93	V
5640.0	-46.01	13.54	-32.47	-13	-19.47	V
High Channel (1909.8MHz)						
3819.6	-41.08	10.74	-30.34	-13	-17.34	H
5729.4	-49.39	13.71	-35.68	-13	-22.68	H
3819.6	-39.84	10.74	-29.10	-13	-16.1	V
5729.4	-48.02	13.71	-34.31	-13	-21.31	V

➤ For WCDMA Band V Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-34.3	4.94	-29.36	-13	-16.36	H
2479.2	-44.09	8.46	-35.63	-13	-22.63	H
1652.8	-37.25	4.94	-32.31	-13	-19.31	V
2479.2	-43.31	8.46	-34.85	-13	-21.85	V
Middle Channel (836.6MHz)						
1672.8	-34.15	5.11	-29.04	-13	-16.04	H
2509.2	-43.45	8.54	-34.91	-13	-21.91	H
1672.8	-34.27	5.11	-29.16	-13	-16.16	V
2509.2	-43.27	8.54	-34.73	-13	-21.73	V
High Channel (846.6MHz)						
1693.2	-34.61	5.25	-29.36	-13	-16.36	H
2539.8	-44.2	8.57	-35.63	-13	-22.63	H
1693.2	-35.91	5.25	-30.66	-13	-17.66	V
2539.8	-44.87	8.57	-36.3	-13	-23.30	V

➤ For WCDMA Band IV Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1712.4MHz)						
3424.8	-39.09	8.65	-30.44	-13	-17.44	H
5137.2	-49.65	12.03	-37.62	-13	-24.62	H
3424.8	-42.51	8.65	-33.86	-13	-20.86	V
5137.2	-46.07	12.03	-34.04	-13	-21.04	V
Middle Channel (1732.4MHz)						
3466.8	-40.66	8.91	-31.75	-13	-18.75	H
5200.2	-48.86	12.29	-36.57	-13	-23.57	H
3466.8	-40.84	8.91	-31.93	-13	-18.93	V
5200.2	-48.82	12.29	-36.53	-13	-23.53	V
High Channel (1752.6MHz)						
3505.2	-41.77	9.11	-32.66	-13	-19.66	H
5257.8	-46.98	12.56	-34.42	-13	-21.42	H
3505.2	-40.89	9.11	-31.78	-13	-18.78	V
5257.8	-49.13	12.56	-36.57	-13	-23.57	V

➤ For WCDMA Band II Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.8	-37.95	10.17	-27.78	-13	-14.78	H
5557.2	-44.18	14.69	-29.49	-13	-16.49	H
3704.8	-35.46	10.17	-25.29	-13	-12.29	V
5557.2	-42.43	14.69	-27.74	-13	-14.74	V
Middle Channel (1880MHz)						
3760.8	-37.89	10.26	-27.63	-13	-14.63	H
5640.0	-43.7	14.78	-28.92	-13	-15.92	H
3760.8	-37.54	10.26	-27.28	-13	-14.28	V
5640.0	-42.66	14.78	-27.88	-13	-14.88	V
High Channel (1907.6MHz)						
3815.2	-35.06	10.59	-24.47	-13	-11.47	H
5722.8	-43.22	15.03	-28.19	-13	-15.19	H
3815.2	-34.43	10.59	-23.84	-13	-10.84	V
5722.8	-43.99	15.03	-28.96	-13	-15.96	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Frequency Stability

8.1 Standard Applicable

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

8.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

8.3 Summary of Test Results/Plots

Please refer to Appendix E

9. Modulation characteristics


9.1 Standard Applicable

According to §2.1047, measurements required: Modulation characteristics is given below:

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

9.2 Test Procedure

According to ANSI C63.26-2015 section 5.3.2, the following test setup was performed.

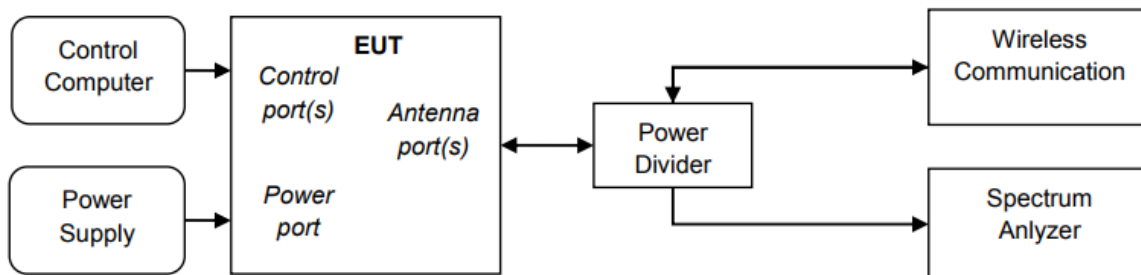

9.3 Summary of Test Results/Plots

Please refer to Appendix F

APPENDIX SUMMARY

Project No.	WTX22X05090000W	Test Engineer	Gala
Start date	2022/5/19	Finish date	2022/5/23
Temperature	23℃	Humidity	45%
RF specifications	GSM/WCDMA		

APPENDIX	Description of Test Item	Result
A	RF Output Power	Compliant
B	Peak-to-average Ratio (PAR) of Transmitter	Compliant
C	Emission Bandwidth	Compliant
D	Out of Band Emissions at Antenna Terminal	Compliant
E	Frequency Stability	Compliant
F	Modulation characteristics	Compliant

APPENDIX A**Conducted Average power**

Conducted Average power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM	33.61	33.63	33.57	30.87	30.72	30.58
GPRS(1Slot)	33.55	33.56	33.50	30.92	30.75	30.64
EGPRS(1Slot)	27.50	27.71	27.68	26.38	26.72	26.84

Conducted Average power (dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency(MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
RMC 12.2k	23.70	23.71	23.80	23.78	23.88	24.08
HSDPA Subtest-1	22.75	22.72	22.78	22.80	22.93	23.11
HSDPA Subtest-2	22.40	22.37	22.54	22.73	22.89	23.06
HSDPA Subtest-3	22.27	22.21	22.45	22.78	22.87	23.08
HSDPA Subtest-4	22.10	22.07	22.01	22.75	22.86	23.09
HSUPA Subtest-1	22.66	22.73	22.81	22.77	22.94	23.11
HSUPA Subtest-2	22.48	22.65	22.70	22.72	22.91	23.08
HSUPA Subtest-3	22.36	22.45	22.47	22.73	22.92	23.09
HSUPA Subtest-4	22.24	22.35	22.37	22.75	22.91	23.07
HSUPA Subtest-5	22.10	22.21	22.26	22.74	22.91	23.08

Conducted Average power (dBm)						
Band	WCDMA Band IV					
Channel	1312	1412	1513			
Frequency(MHz)	1712.4	1733.4	1752.6			
RMC 12.2k	23.69	23.57	23.43			
HSDPA Subtest-1	22.68	22.63	22.44			
HSDPA Subtest-2	22.56	22.54	22.35			
HSDPA Subtest-3	22.34	22.41	22.25			
HSDPA Subtest-4	22.15	22.17	22.16			
HSUPA Subtest-1	22.64	22.58	22.34			
HSUPA Subtest-2	22.48	22.50	22.21			
HSUPA Subtest-3	22.35	22.35	22.19			
HSUPA Subtest-4	22.27	22.26	22.04			
HSUPA Subtest-5	22.14	22.14	22.00			

APPENDIX B

Peak-to-average Ratio (PAR) of Transmitter

PCS1900				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	661	1850.2	3.89	13
GPRS(1 Slot)	661	1850.2	4.02	13
EDGE(1 Slot)	661	1850.2	4.16	13

WCDMA Band IV				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	1312	1712.4	3.90	13
	1412	1733.4	4.21	13
	1513	1752.6	4.16	13

WCDMA Band II				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	3.94	13
	9400	1880.0	3.98	13
	9538	1907.6	4.10	13




Note: Only the worst case was selected to record.




APPENDIX C

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850 (GMSK)	128	824.20	245.2756	312.112
	190	836.60	248.2808	314.435
	251	848.80	247.4526	312.716
GPRS850 (GMSK,1Slot)	128	824.20	248.1397	310.693
	190	836.60	247.6823	345.863
	251	848.80	245.9666	317.387
EGPRS850 (8PSK,1Slot)	128	824.20	249.9054	314.587
	190	836.60	245.2154	298.503
	251	848.80	247.9930	321.866
PCS1900 (GMSK)	512	1850.20	246.0573	319.194
	661	1880.00	246.9806	318.484
	810	1909.80	241.8817	316.999
GPRS1900 (GMSK,1Slot)	512	1850.20	245.9082	322.890
	661	1880.00	245.7171	316.598
	810	1909.80	243.1695	317.733
EGPRS1900 (8PSK,1Slot)	512	1850.20	249.1355	320.191
	661	1880.00	249.6462	316.029
	810	1909.80	246.8659	312.952

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
WCDMA Band V	4132	826.40	4172.9	4706
	4183	836.60	4170.5	4718
	4233	846.60	4170.2	4718
HSDPA	4132	826.40	4192.0	4958
	4183	836.60	4183.9	4769
	4233	846.60	4169.4	4870
HSUPA	4132	826.40	4205.2	5453
	4183	836.60	4191.9	5084
	4233	846.60	4177.9	4771
WCDMA Band II	9262	1852.40	4183.2	4715
	9400	1880.00	4183.0	5233
	9538	1907.60	4176.9	4709
HSDPA	9262	1852.40	4206.8	4786
	9400	1880.00	4205.4	5013
	9538	1907.60	4203.7	4733
HSUPA	9262	1852.40	4192.1	5127
	9400	1880.00	4194.0	4719
	9538	1907.60	4203.9	4732
WCDMA Band IV	1312	1712.4	4174.6	4717
	1412	1733.4	4191.3	4754
	1513	1752.6	4179.4	4694
HSDPA	1312	1712.4	4174.0	4724
	1412	1733.4	4193.0	4738
	1513	1752.6	4176.1	4720
HSUPA	1312	1712.4	4197.5	4719
	1412	1733.4	4196.8	4806
	1513	1752.6	4181.9	4749




GSM 850 (GMSK)-Low	Agilent R T Ch Freq 824.2 MHz Trig Free Occupied Bandwidth Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offset 5 dB Center 824.2 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Span 1 MHz Occupied Bandwidth 245.2756 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -802.544 Hz x dB Bandwidth 312.112 kHz Meas Setup Avg Number 10 On Off Avg Mode Exp Repeat Max Hold On Off Occ BW % Pwr 99.00 % OBW Span 1.00000000 MHz x dB -26.00 dB Optimize Ref Level
-----------------------	--

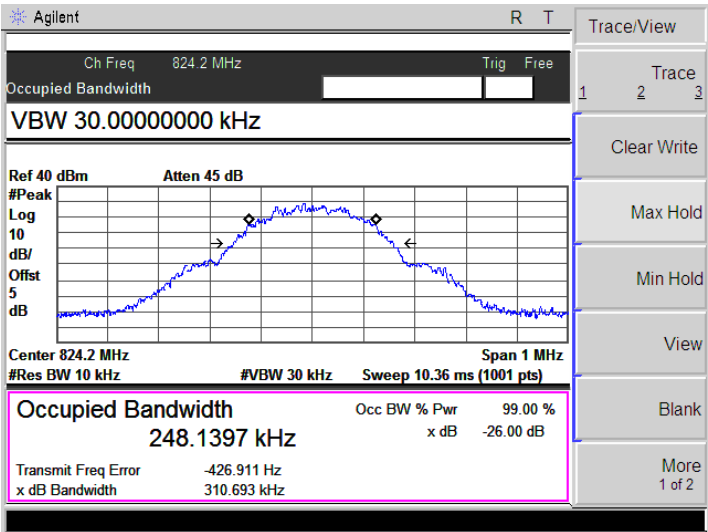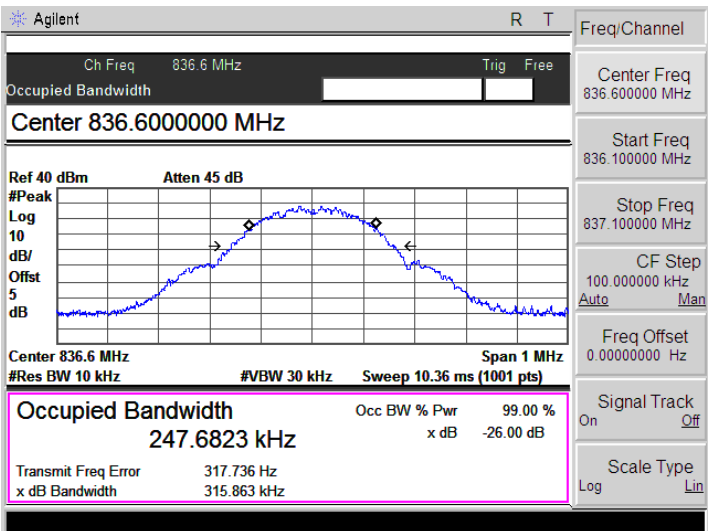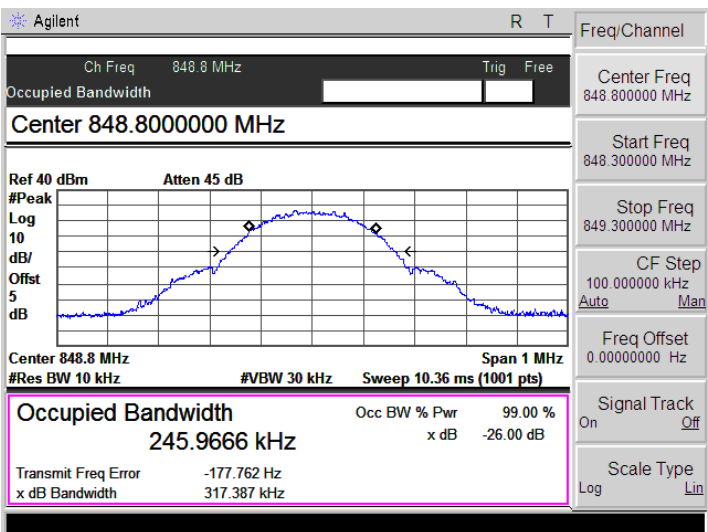GPRS850 (GMSK,1Slot)-Low	
GPRS850 (GMSK,1Slot)-Middle	
GPRS850 (GMSK,1Slot)-High	

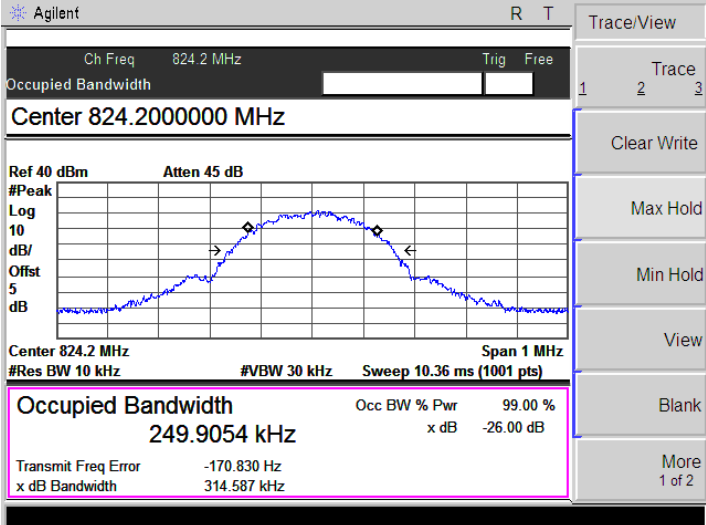
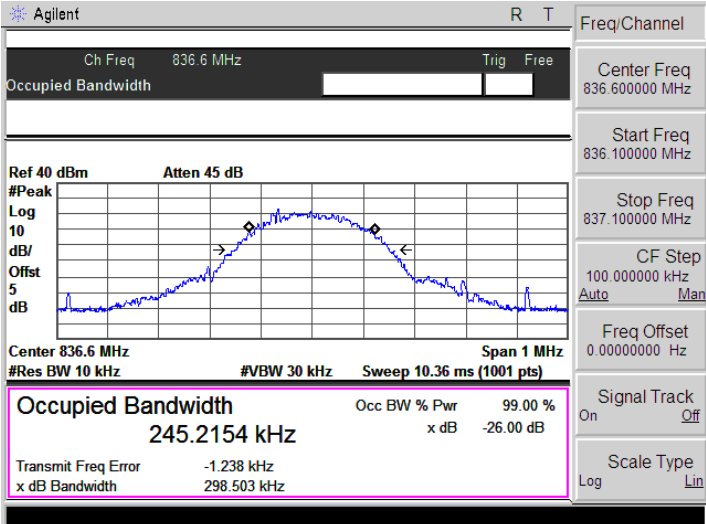
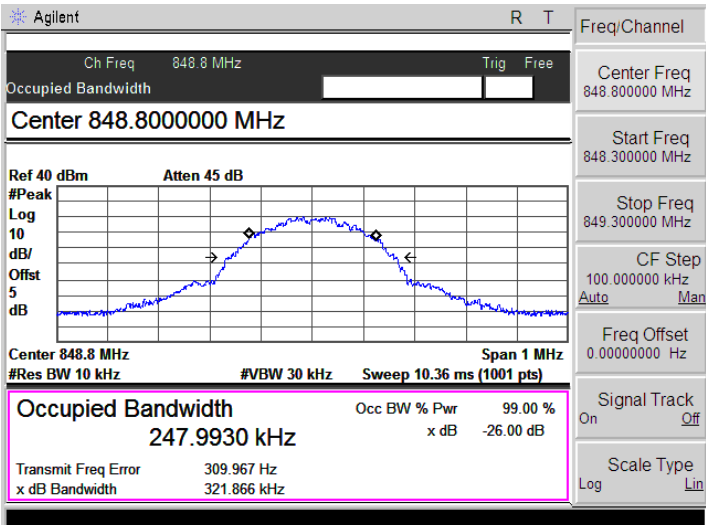
EGPRS850 (8PSK,1Slot)-Low	
EGPRS850 (8PSK,1Slot)-Middle	
EGPRS850 (8PSK,1Slot)-High	

PCS1900 (GMSK)-Low	Agilent R T Ch Freq 1.8502 GHz Occupied Bandwidth Center 1.850200000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.85 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 246.0573 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 389.984 Hz x dB Bandwidth 319.194 kHz Freq/Channel Center Freq 1.85020000 GHz Start Freq 1.84970000 GHz Stop Freq 1.85070000 GHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
PCS1900 (GMSK)-Middle	Agilent R T Ch Freq 1.88 GHz Occupied Bandwidth Center 1.880000000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.88 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 246.9806 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 1.769 kHz x dB Bandwidth 318.484 kHz Freq/Channel Center Freq 1.88000000 GHz Start Freq 1.87950000 GHz Stop Freq 1.88050000 GHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
PCS1900 (GMSK)-High	Agilent R T Ch Freq 1.9098 GHz Occupied Bandwidth Center 1.909800000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.91 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 241.8817 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -70.290 Hz x dB Bandwidth 316.999 kHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2




GPRS1900 (GMSK,1Slot)-Low	Agilent R T Ch Freq 1.8502 GHz Trig Free Occupied Bandwidth Center 1.85020000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.85 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 245.9082 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 287.282 Hz x dB Bandwidth 322.890 kHz Freq/Channel Center Freq 1.85020000 GHz Start Freq 1.84970000 GHz Stop Freq 1.85070000 GHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
GPRS1900 (GMSK,1Slot)-Middle	Agilent R T Ch Freq 1.88 GHz Trig Free Occupied Bandwidth Center 1.880000000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.88 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 245.7171 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 1.696 kHz x dB Bandwidth 316.598 kHz Freq/Channel Center Freq 1.880000000 GHz Start Freq 1.879500000 GHz Stop Freq 1.880500000 GHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
GPRS1900 (GMSK,1Slot)-High	Agilent R T Ch Freq 1.9098 GHz Trig Free Occupied Bandwidth Center 1.909800000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.91 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 243.1695 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 421.951 Hz x dB Bandwidth 317.733 kHz Freq/Channel Center Freq 1.90980000 GHz Start Freq 1.90930000 GHz Stop Freq 1.91030000 GHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

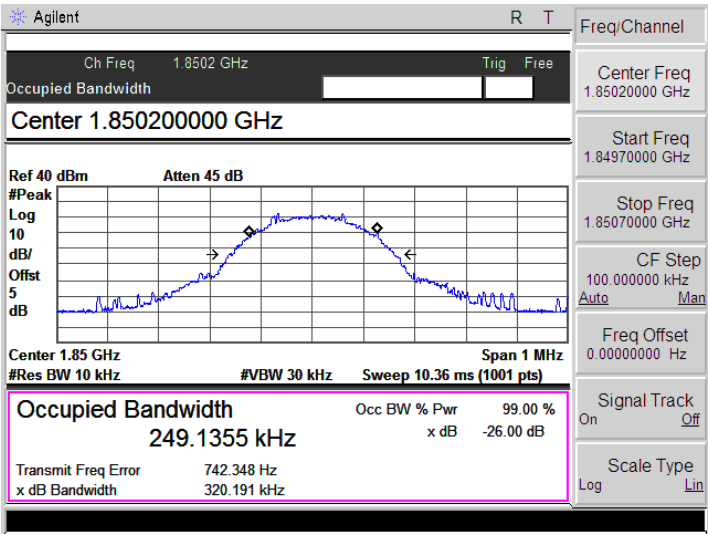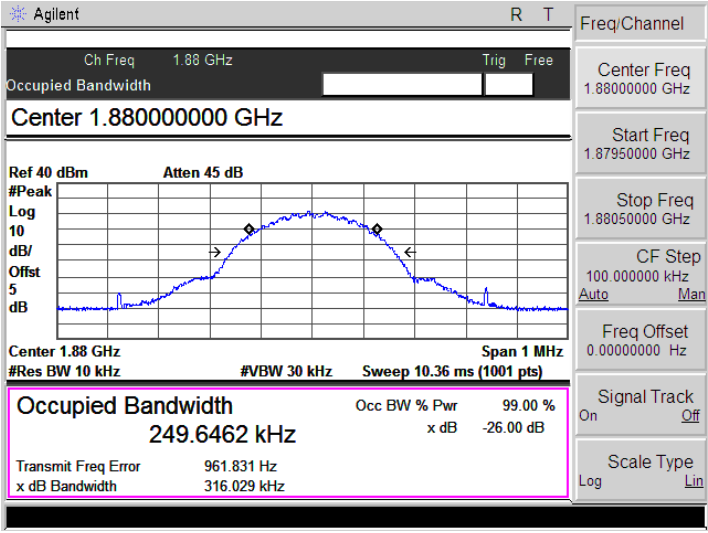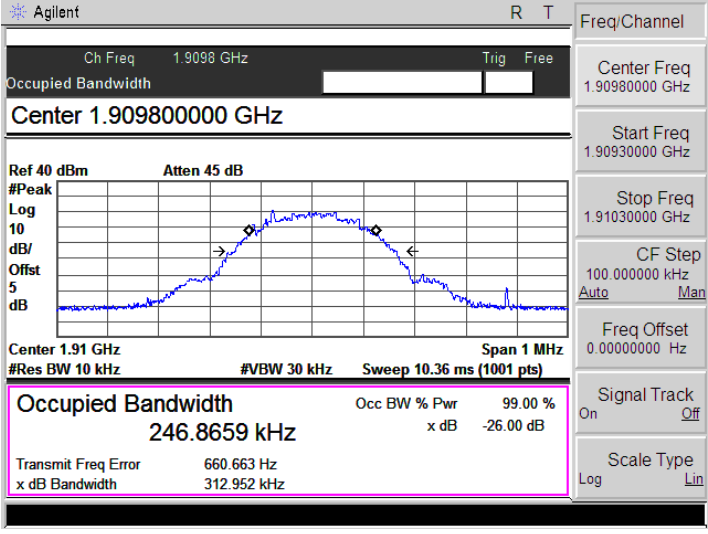EGPRS1900 (8PSK,1Slot)-Low	
EGPRS1900 (8PSK,1Slot)-Middle	
EGPRS1900 (8PSK,1Slot)-High	




WCDMA Band V-Low	Agilent Ch Freq826.4 MHz TrigFree Occupied Bandwidth Span 10.00000000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offset 5 dB Center 826.4 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1729 MHz Occ BW % Pwr99.00 % x dB-26.00 dB Transmit Freq Error4.145 kHz x dB Bandwidth4.706 MHz Trace/View Trace Clear Write Max Hold Min Hold View Blank More1 of 2
WCDMA Band V-Middle	Agilent Ch Freq836.6 MHz TrigFree Occupied Bandwidth Center 836.6000000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offset 5 dB Center 836.6 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1705 MHz Occ BW % Pwr99.00 % x dB-26.00 dB Transmit Freq Error-13.530 kHz x dB Bandwidth4.718 MHz Freq/Channel Center Freq836.600000 MHz Start Freq831.600000 MHz Stop Freq841.600000 MHz CF Step1.00000000 MHz AutoMan Freq Offset0.00000000 Hz Signal TrackOnOff Scale TypeLogLin
WCDMA Band V-High	Agilent Ch Freq836.6 MHz TrigFree Occupied Bandwidth Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offset 5 dB Center 836.6 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1702 MHz Occ BW % Pwr99.00 % x dB-26.00 dB Transmit Freq Error-10.836 kHz x dB Bandwidth4.718 MHz Freq/Channel Center Freq836.600000 MHz Start Freq831.600000 MHz Stop Freq841.600000 MHz CF Step1.00000000 MHz AutoMan Freq Offset0.00000000 Hz Signal TrackOnOff Scale TypeLogLin

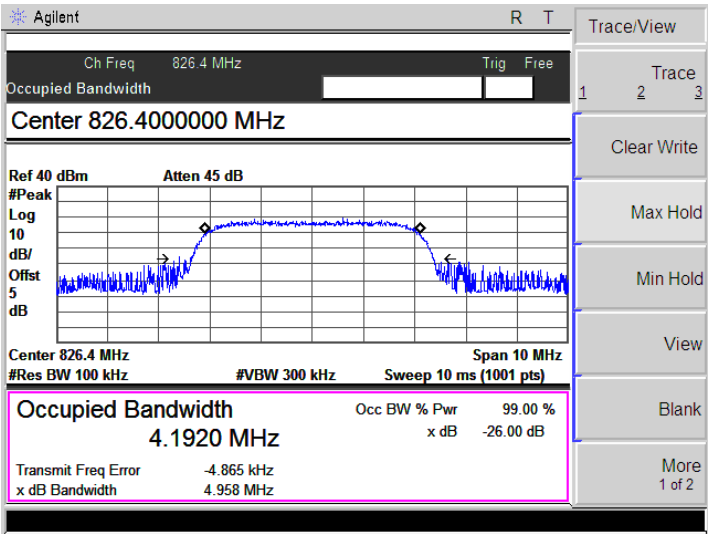
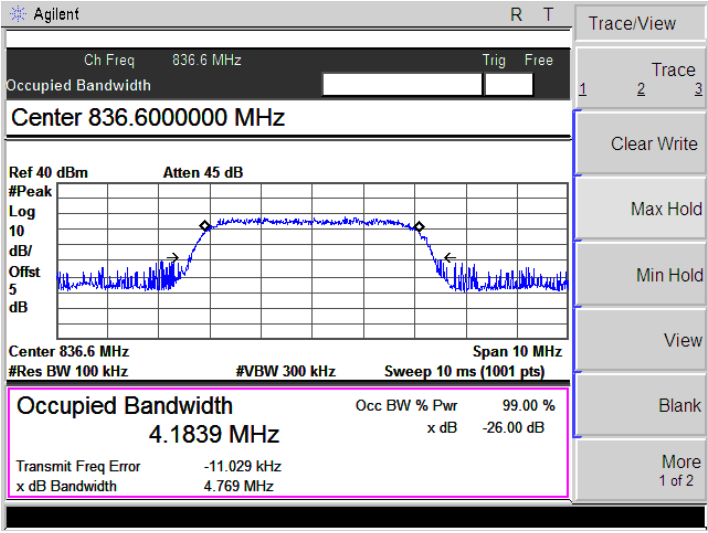
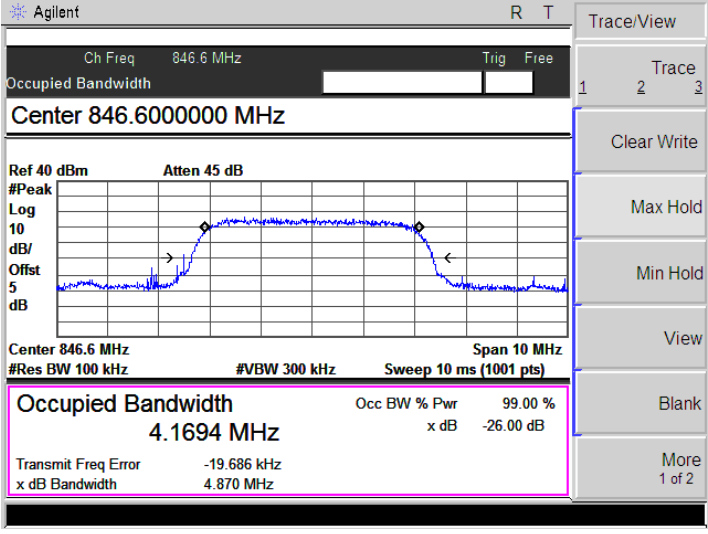
HSDPA-Low	 Agilent R T Ch Freq 826.4 MHz Trig Free Occupied Bandwidth Center 826.400000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 826.4 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1920 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -4.865 kHz x dB Bandwidth 4.958 MHz
HSDPA-Middle	 Agilent R T Ch Freq 836.6 MHz Trig Free Occupied Bandwidth Center 836.600000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 836.6 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1839 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -11.029 kHz x dB Bandwidth 4.769 MHz
HSDPA-High	 Agilent R T Ch Freq 846.6 MHz Trig Free Occupied Bandwidth Center 846.600000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 846.6 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1694 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -19.686 kHz x dB Bandwidth 4.870 MHz




HSUPA-Low	Agilent R T Ch Freq 826.4 MHz Trig Free Occupied Bandwidth Center 826.400000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 826.4 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.2052 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 4.357 kHz x dB Bandwidth 5.453 MHz Freq/Channel Center Freq 826.400000 MHz Start Freq 821.400000 MHz Stop Freq 831.400000 MHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
HSUPA-Middle	Agilent R T Ch Freq 836.6 MHz Trig Free Occupied Bandwidth Center 836.600000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 836.6 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1919 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -20.092 kHz x dB Bandwidth 5.084 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
HSUPA-High	Agilent R T Ch Freq 846.6 MHz Trig Free Occupied Bandwidth Center 846.600000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 846.6 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1779 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -20.851 kHz x dB Bandwidth 4.771 MHz Freq/Channel Center Freq 846.600000 MHz Start Freq 841.600000 MHz Stop Freq 851.600000 MHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

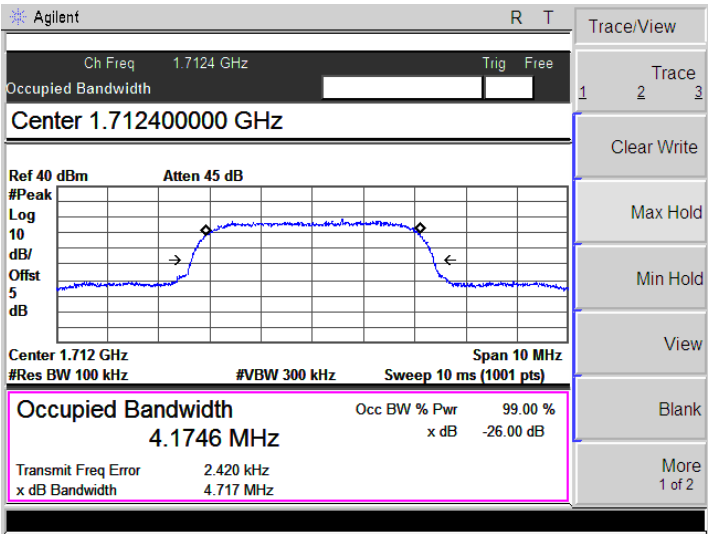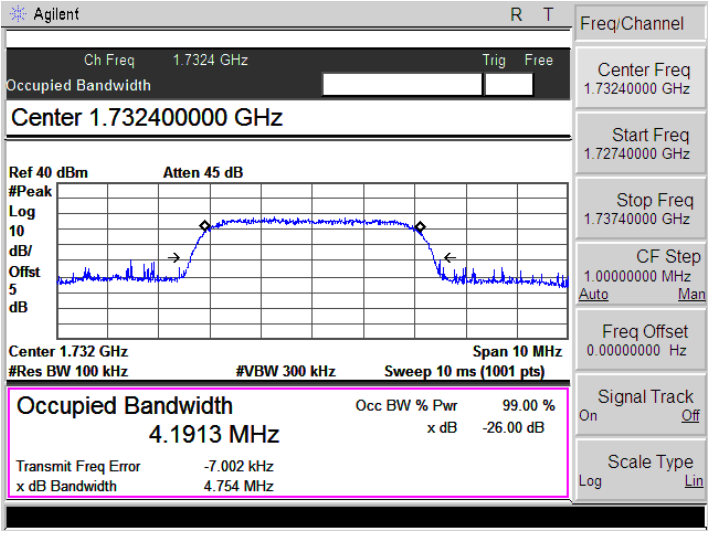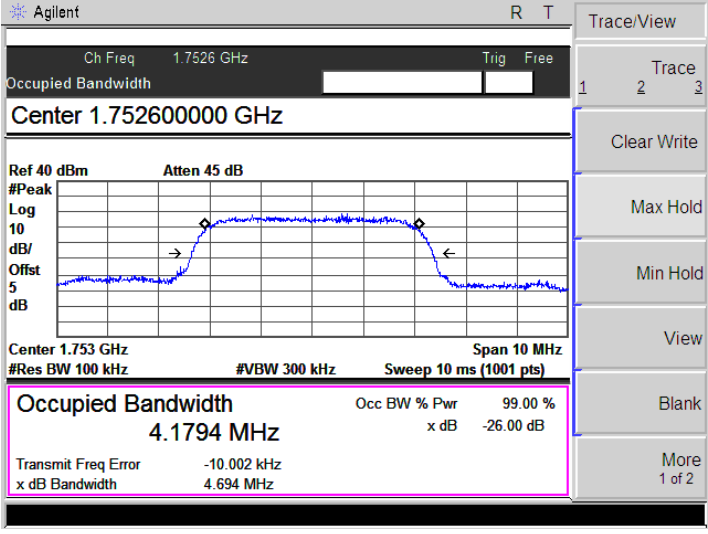WCDMA Band IV-Low	
WCDMA Band IV-Middle	
WCDMA Band IV-High	

HSDPA-Low	Agilent Ch Freq1.7124 GHz Occupied Bandwidth Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.712 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1740 MHz Transmit Freq Error 3.662 kHz x dB Bandwidth 4.724 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Freq/Channel Center Freq1.71240000 GHz Start Freq1.70740000 GHz Stop Freq1.71740000 GHz CF Step1.00000000 MHz AutoMan Freq Offset0.00000000 Hz Signal TrackOn Off Scale TypeLog Lin
HSDPA-Middle	Agilent Ch Freq1.7324 GHz Occupied Bandwidth Center 1.732400000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.732 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1930 MHz Transmit Freq Error -12.565 kHz x dB Bandwidth 4.738 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Trace/View Trace123 Clear Write Max Hold Min Hold View Blank More1 of 2
HSDPA-High	Agilent Ch Freq1.7526 GHz Occupied Bandwidth Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.753 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1761 MHz Transmit Freq Error -8.545 kHz x dB Bandwidth 4.720 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Freq/Channel Center Freq1.75260000 GHz Start Freq1.74760000 GHz Stop Freq1.75760000 GHz CF Step1.00000000 MHz AutoMan Freq Offset0.00000000 Hz Signal TrackOn Off Scale TypeLog Lin

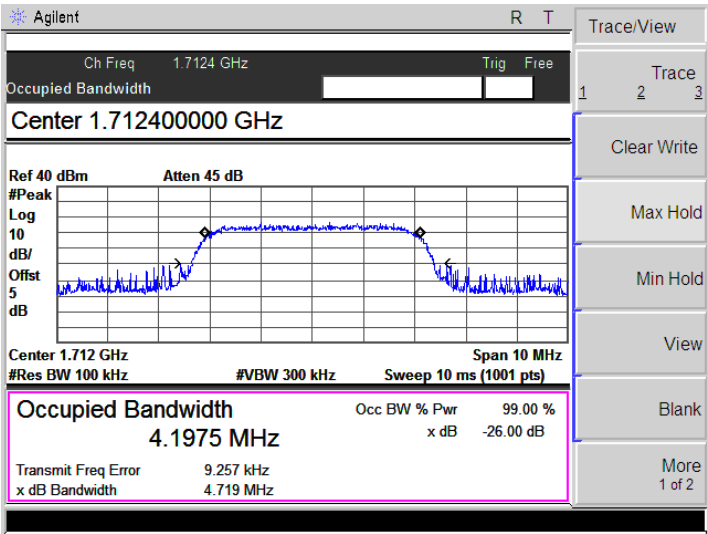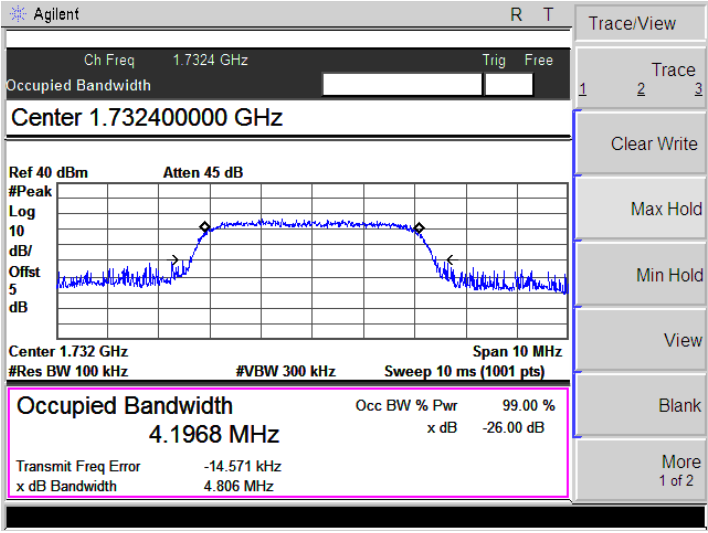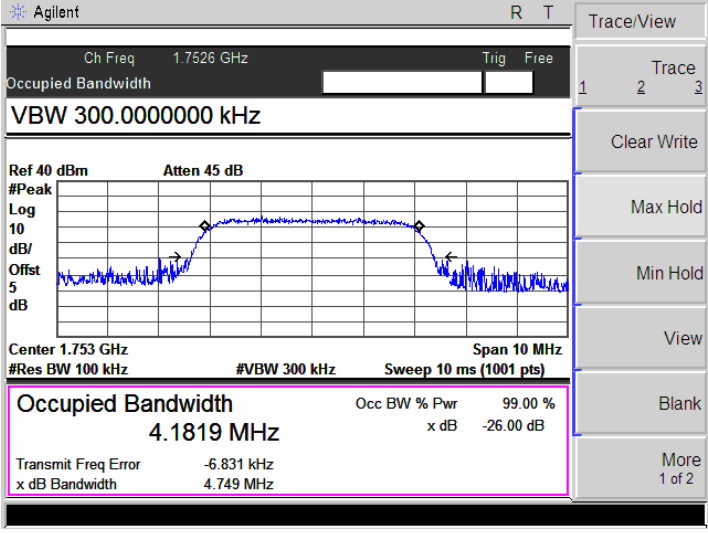HSUPA-Low	
HSUPA-Middle	
HSUPA-High	

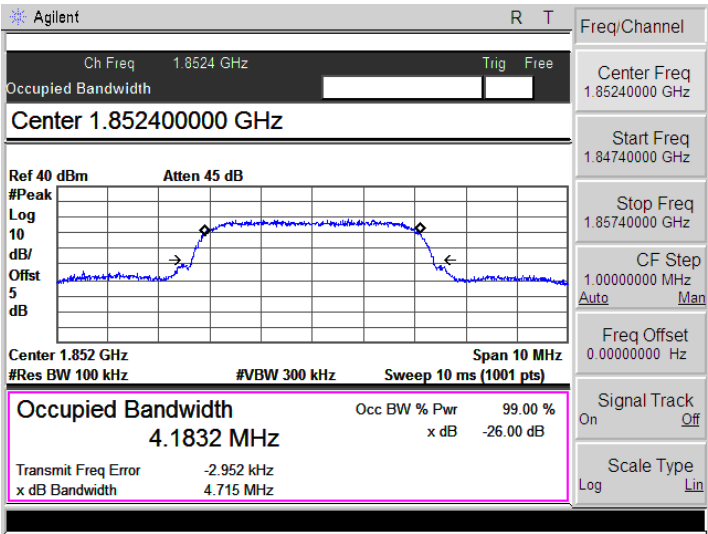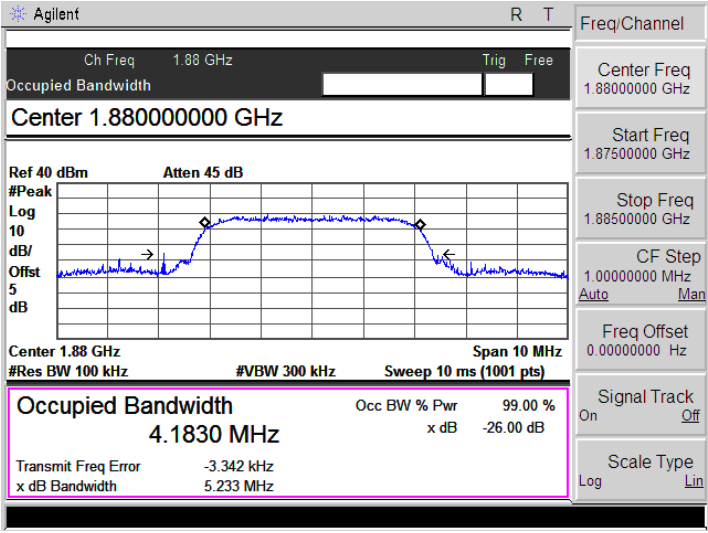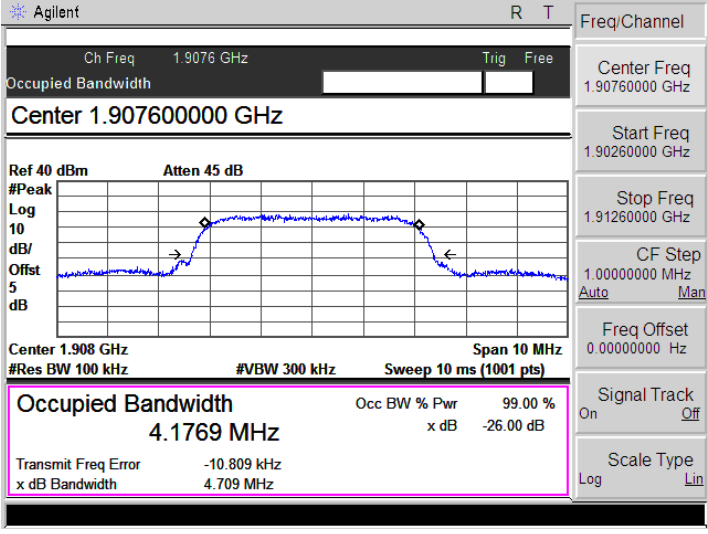WCDMA Band II-Low	 Agilent R T Ch Freq 1.8524 GHz Trig Free Occupied Bandwidth Center 1.85240000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.852 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1832 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -2.952 kHz x dB Bandwidth 4.715 MHz Freq/Channel Center Freq 1.85240000 GHz Start Freq 1.84740000 GHz Stop Freq 1.85740000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
WCDMA Band II-Middle	 Agilent R T Ch Freq 1.88 GHz Trig Free Occupied Bandwidth Center 1.88000000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.88 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1830 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -3.342 kHz x dB Bandwidth 5.233 MHz Freq/Channel Center Freq 1.88000000 GHz Start Freq 1.87500000 GHz Stop Freq 1.88500000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
WCDMA Band II-High	 Agilent R T Ch Freq 1.9076 GHz Trig Free Occupied Bandwidth Center 1.90760000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.908 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1769 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -10.809 kHz x dB Bandwidth 4.709 MHz Freq/Channel Center Freq 1.90760000 GHz Start Freq 1.90260000 GHz Stop Freq 1.91260000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

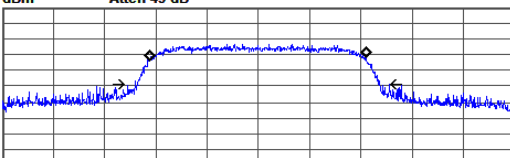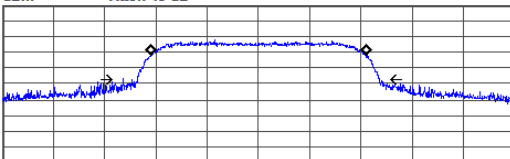
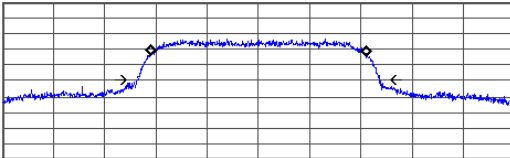
HSDPA-Low	Agilent R T Ch Freq 1.8524 GHz Trig Free Occupied Bandwidth Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB  Center 1.852 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.2068 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -12.515 kHz x dB Bandwidth 4.786 MHz Freq/Channel Center Freq 1.85240000 GHz Start Freq 1.84740000 GHz Stop Freq 1.85740000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
HSDPA-Middle	Agilent R T Ch Freq 1.88 GHz Trig Free Occupied Bandwidth VBW 300.0000000 kHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB  Center 1.88 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.2054 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -7.315 kHz x dB Bandwidth 5.013 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
HSDPA-High	Agilent R T Ch Freq 1.9076 GHz Trig Free Occupied Bandwidth Center 1.907600000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB  Center 1.908 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.2037 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -2.161 kHz x dB Bandwidth 4.733 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

HSUPA-Low	Agilent Ch Freq 1.8524 GHz Occupied Bandwidth Center 1.852400000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.852 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1921 MHz Transmit Freq Error -5.384 kHz x dB Bandwidth 5.127 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Freq/Channel Center Freq 1.85240000 GHz Start Freq 1.84740000 GHz Stop Freq 1.85740000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
HSUPA-Middle	Agilent Ch Freq 1.88 GHz Occupied Bandwidth Center 1.880000000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.88 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1940 MHz Transmit Freq Error -8.679 kHz x dB Bandwidth 4.719 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
HSUPA-High	Agilent Ch Freq 1.9076 GHz Occupied Bandwidth Center 1.907600000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.908 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.2039 MHz Transmit Freq Error -8.775 kHz x dB Bandwidth 4.732 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Freq/Channel Center Freq 1.90760000 GHz Start Freq 1.90260000 GHz Stop Freq 1.91260000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin



APPENDIX D

Out of Band Emissions at Antenna Terminal


GSM 850
(GMSK)-Low


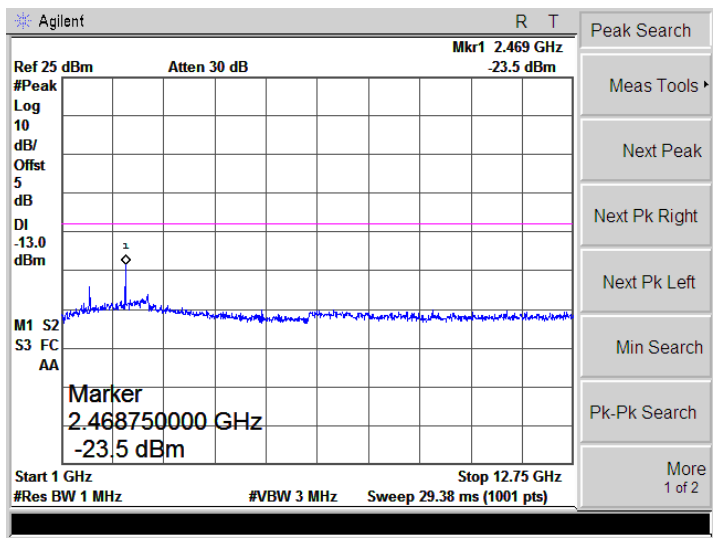
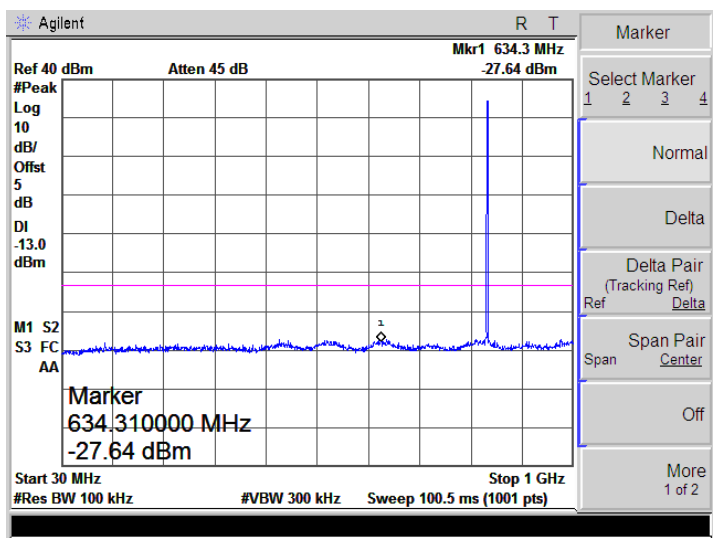


GSM 850
(GMSK)-Middle

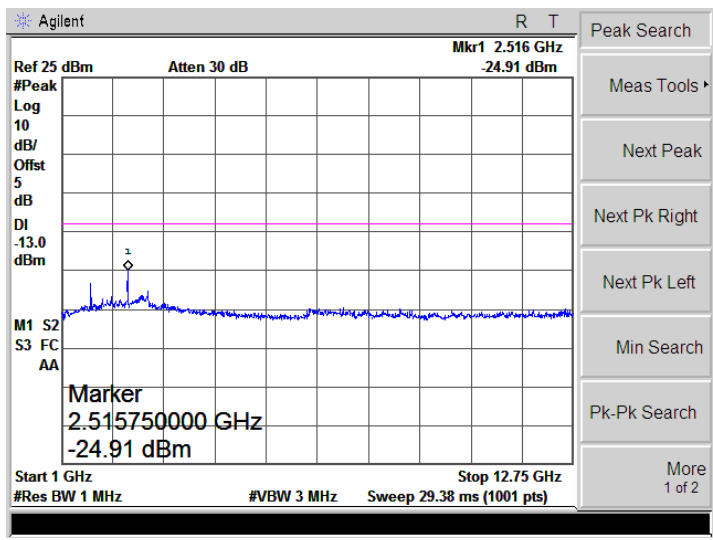
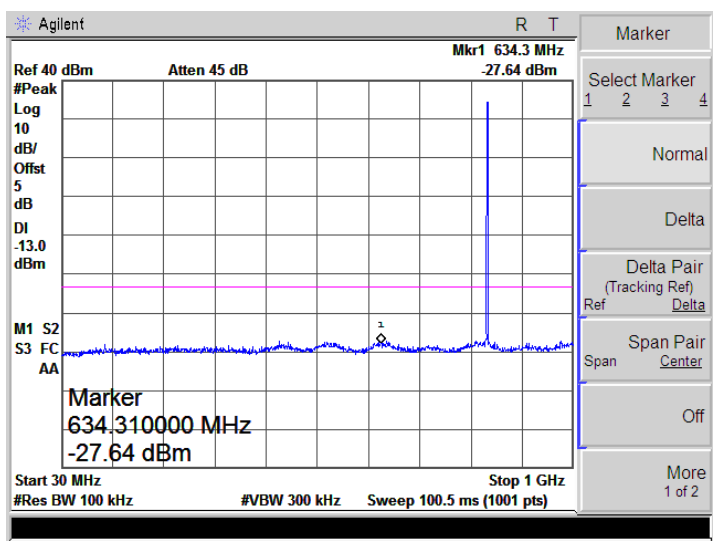


GSM 850
(GMSK)-High

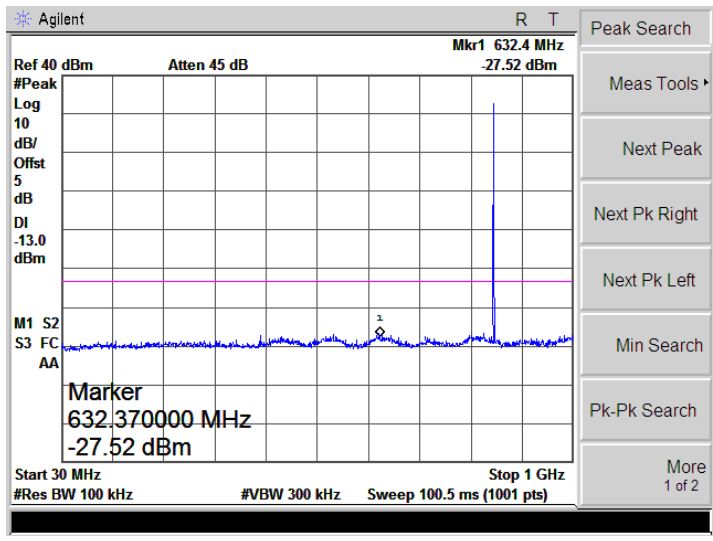


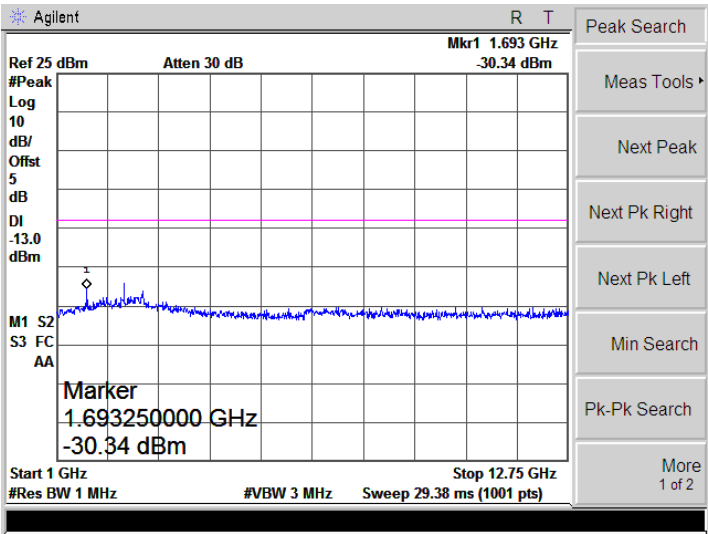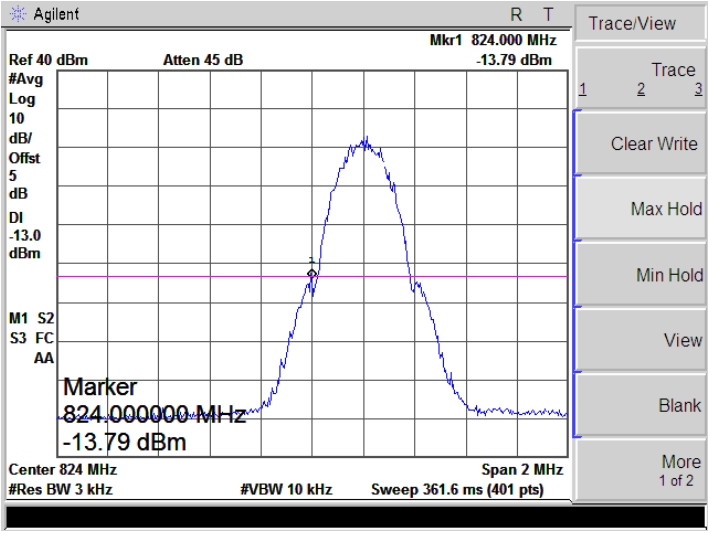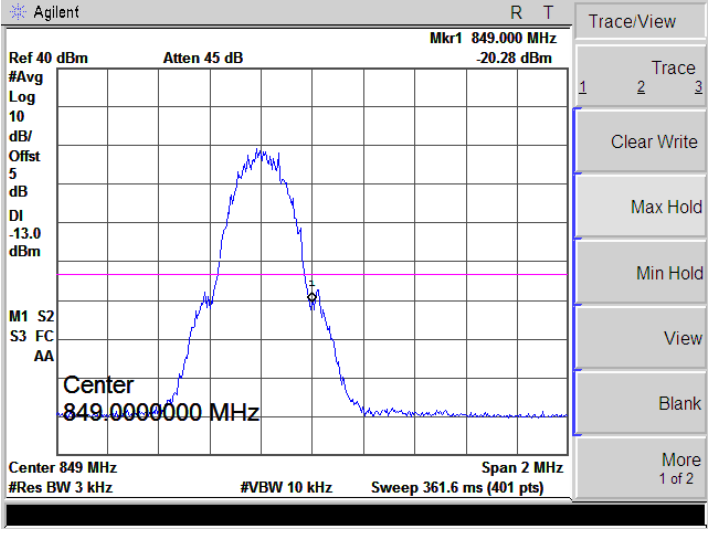
	
Bandedge	
	

GPRS850
(GMSK,1Slot)-Low

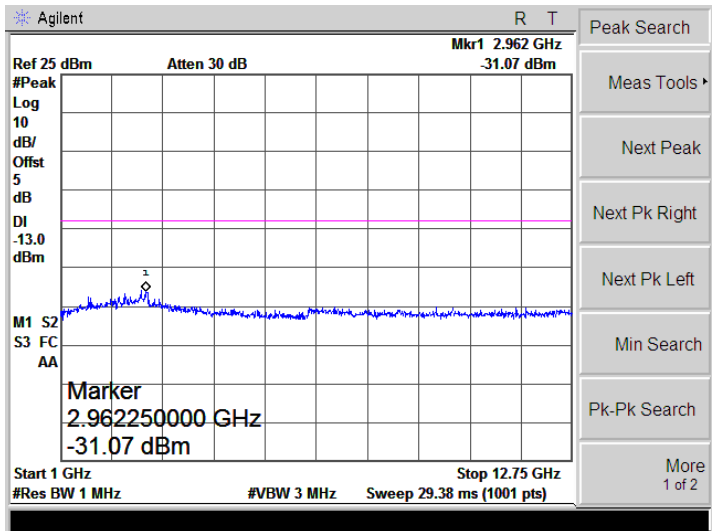
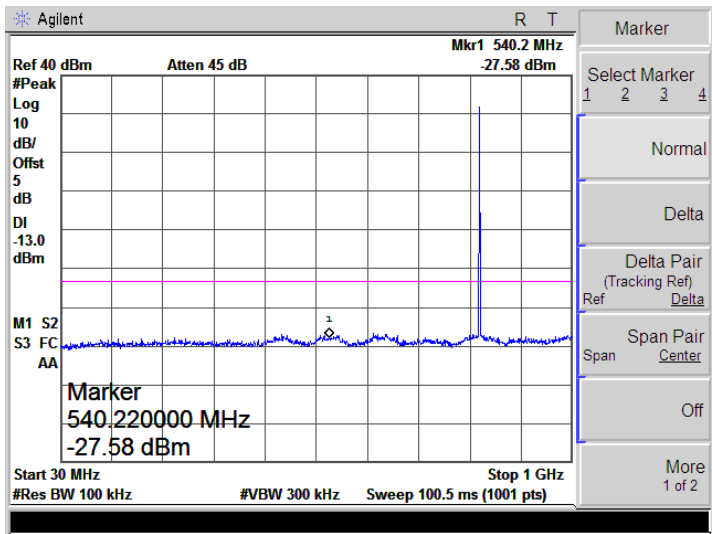


GPRS850
(GMSK,1Slot)-Middle


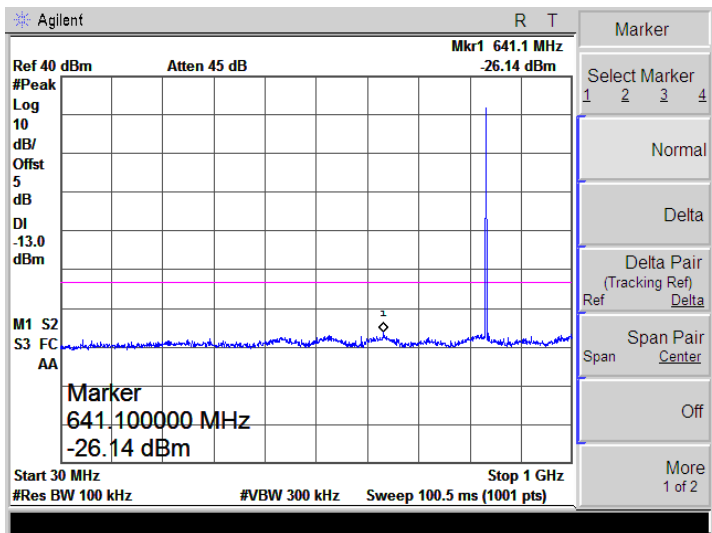


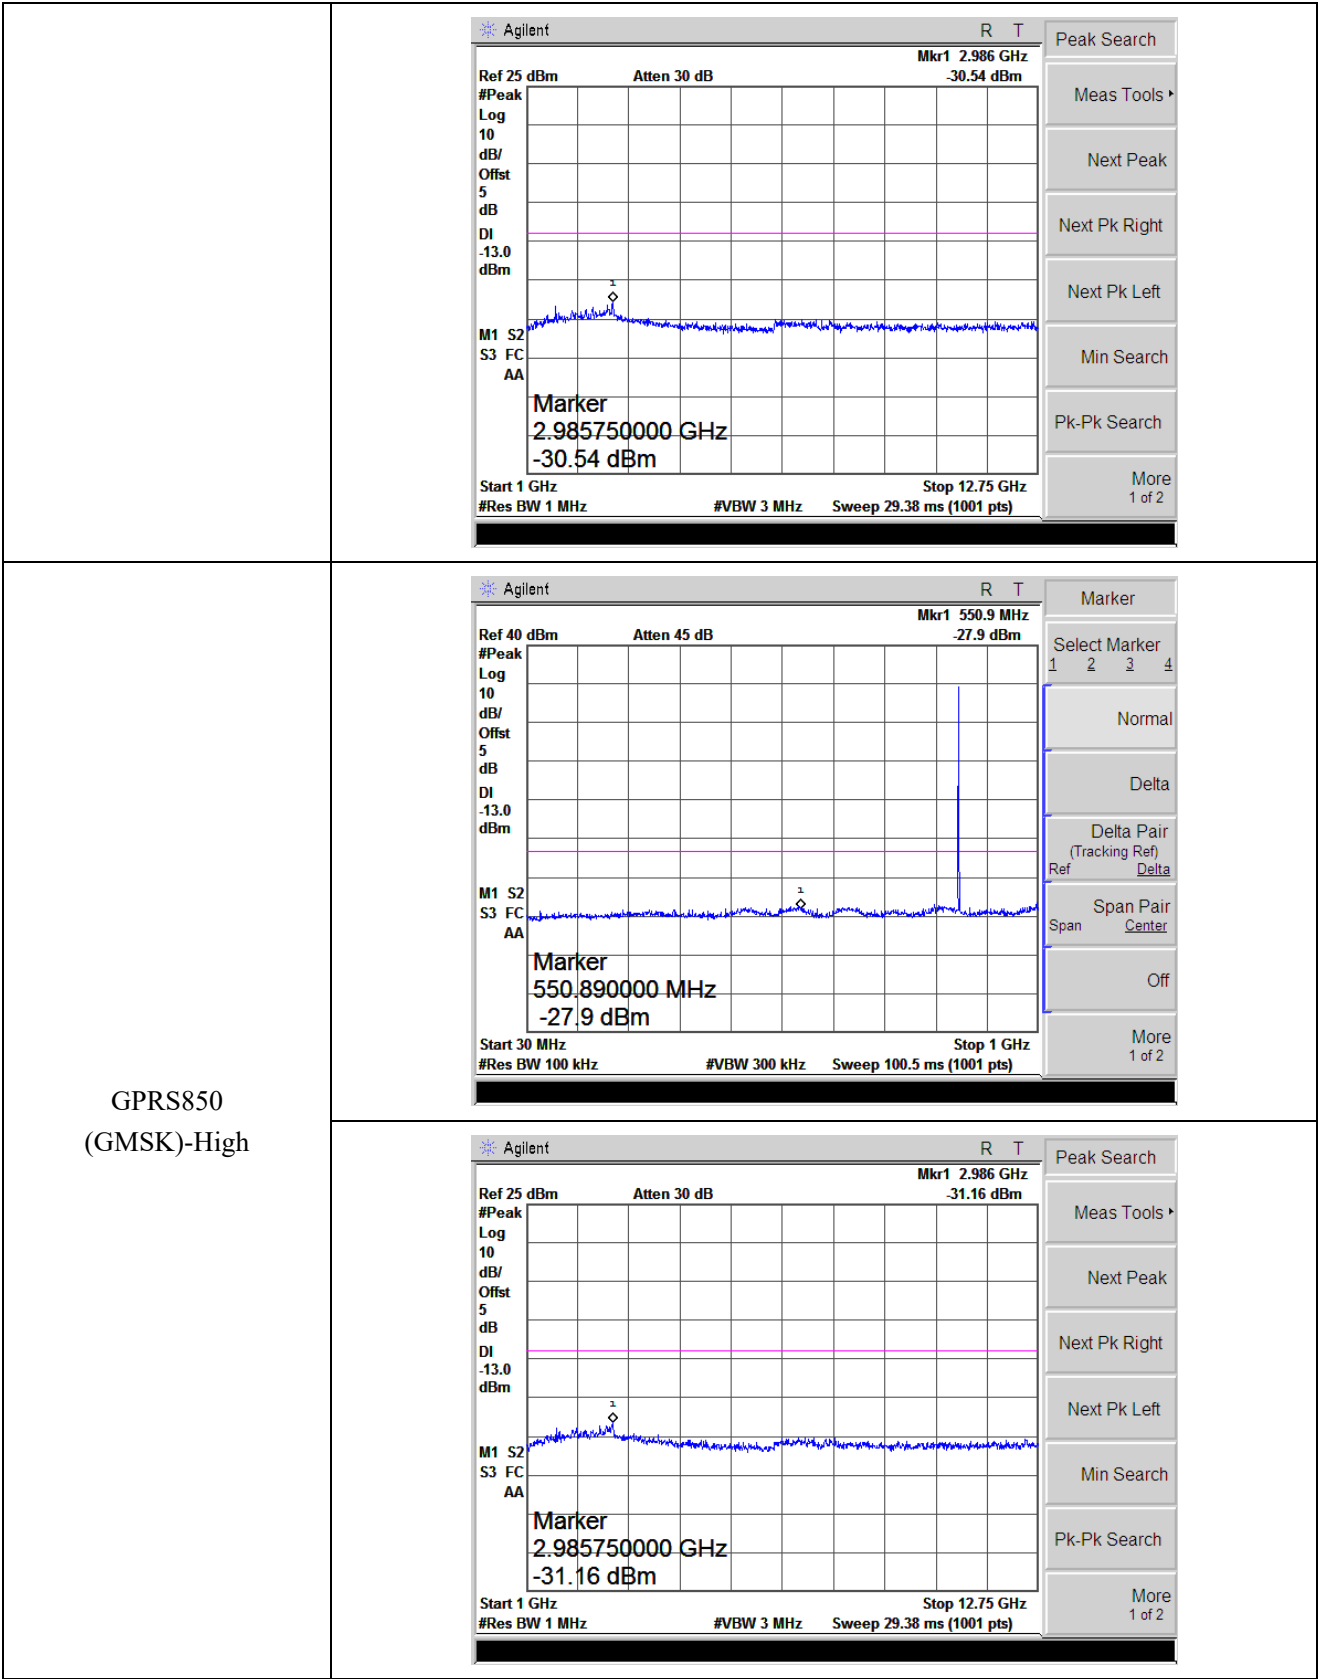


Bandedge

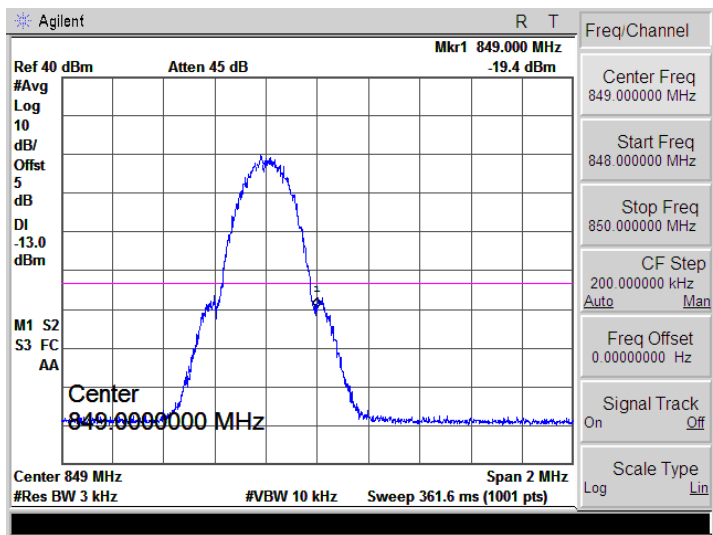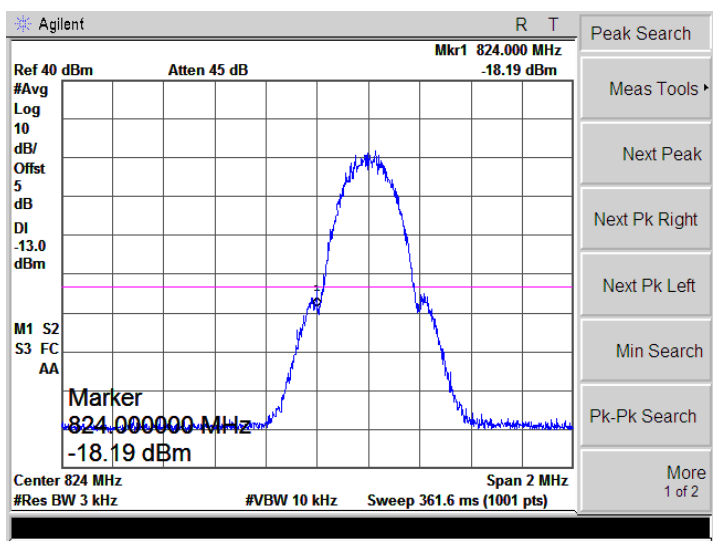


EGPRS850
(8PSK,1Slot)-Low

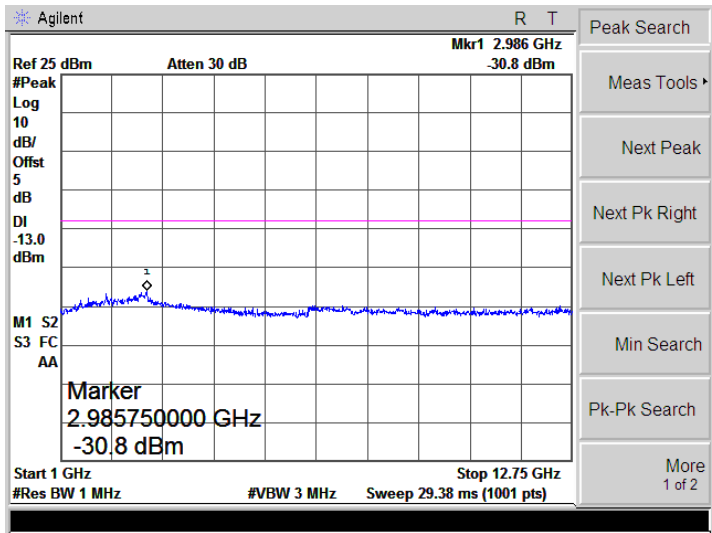
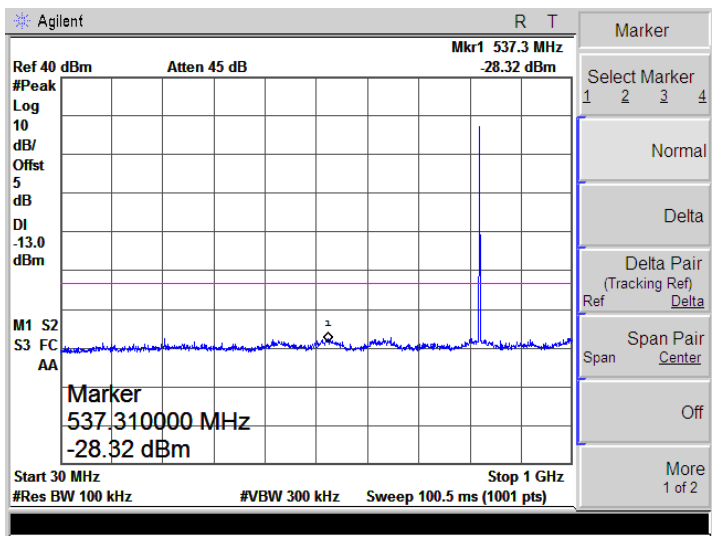


EGPRS850
(8PSK,1Slot)-Middle



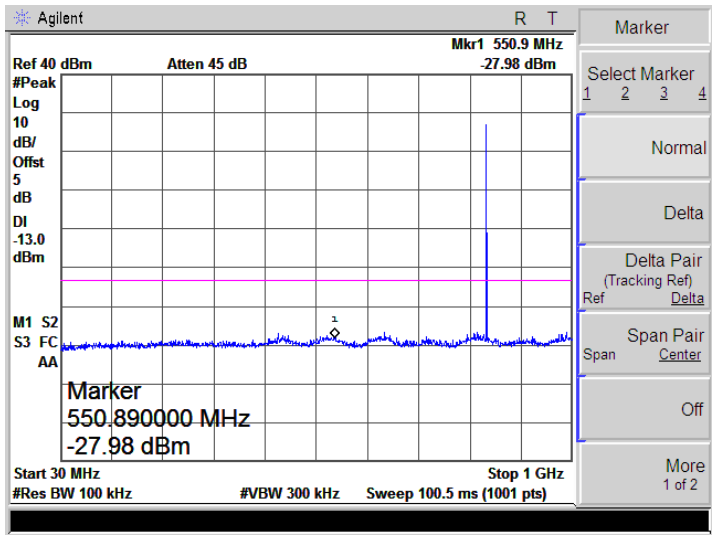


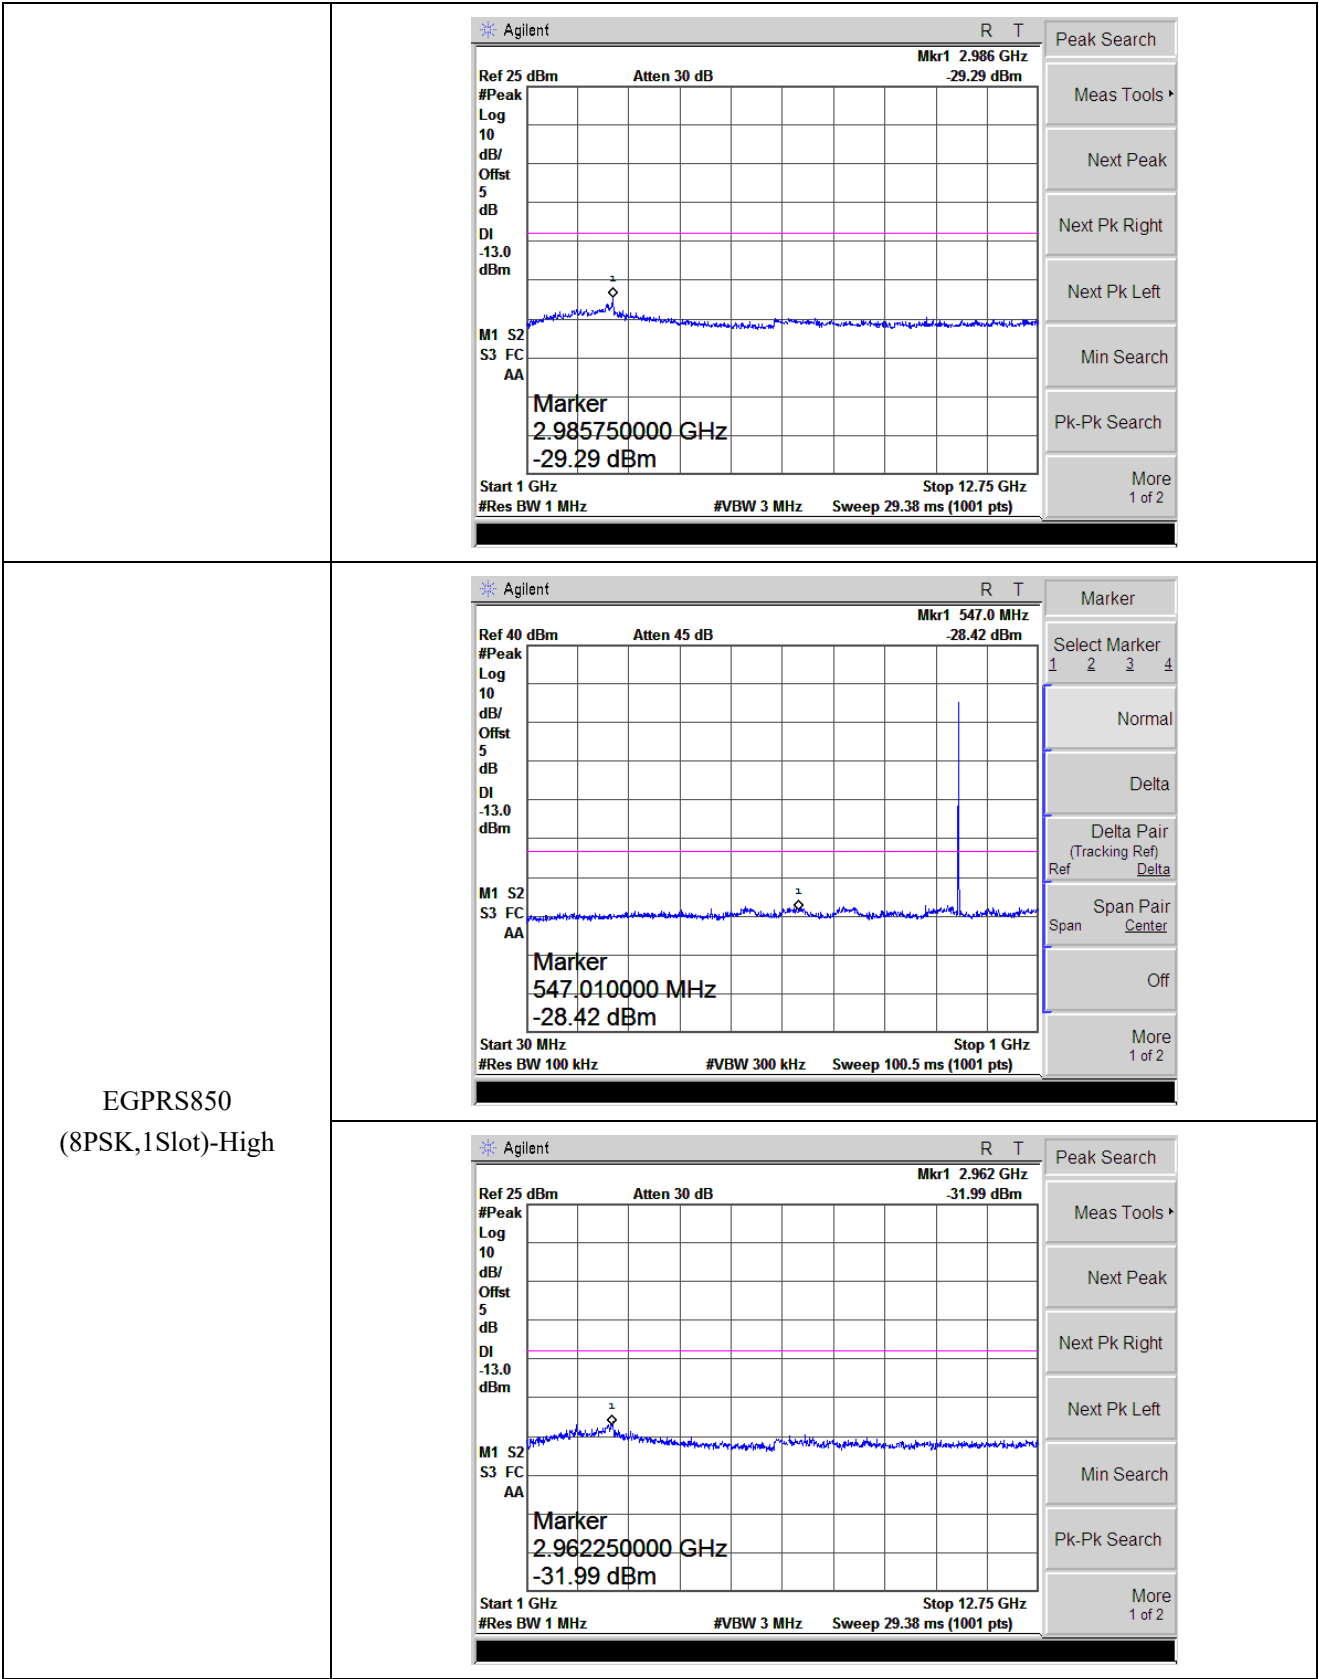




Bandedge

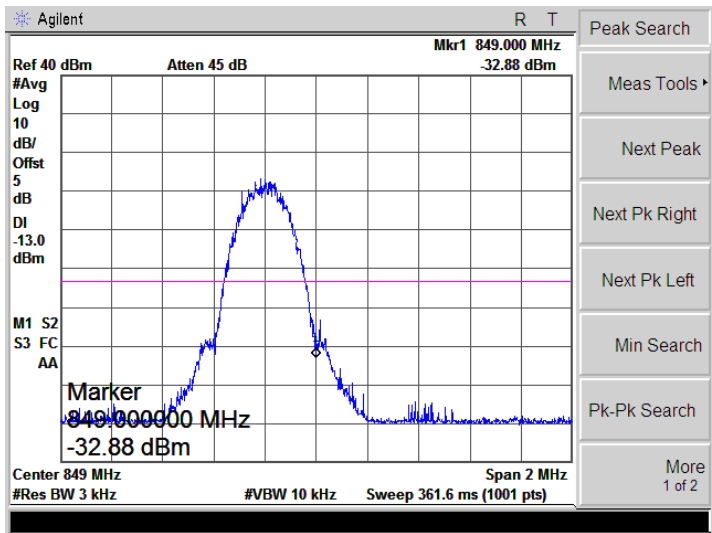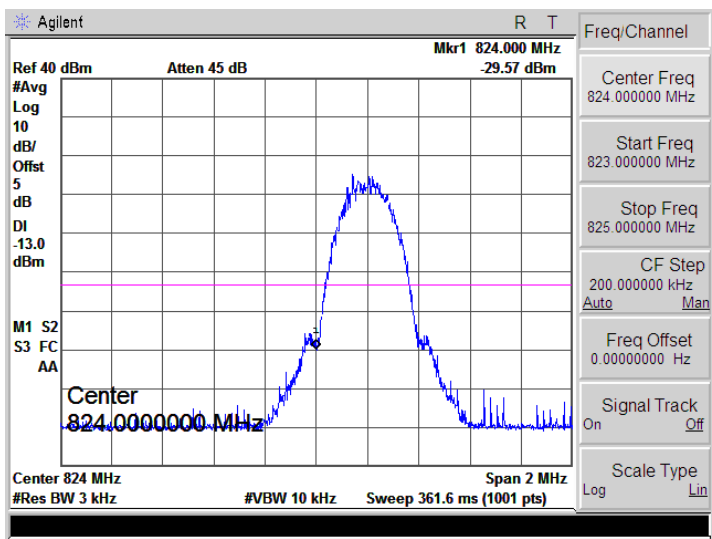




PCS1900
(GMSK)-Low

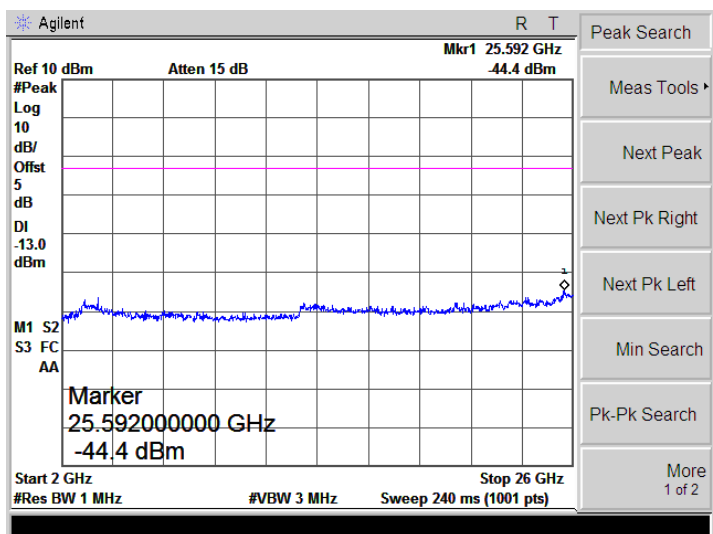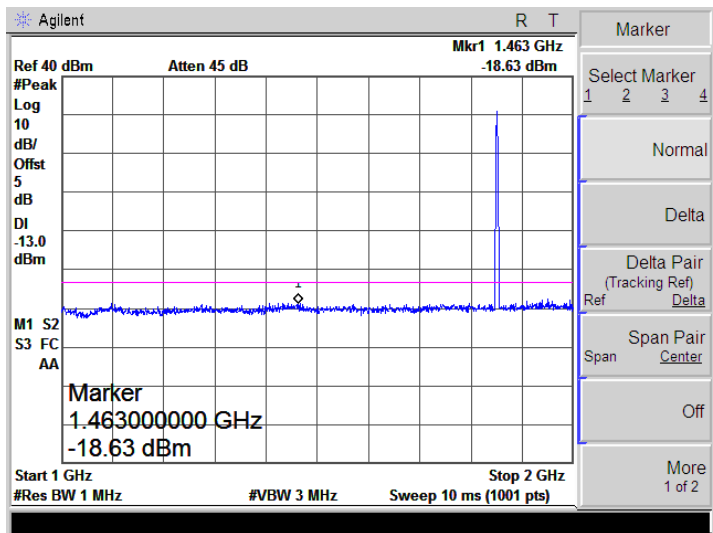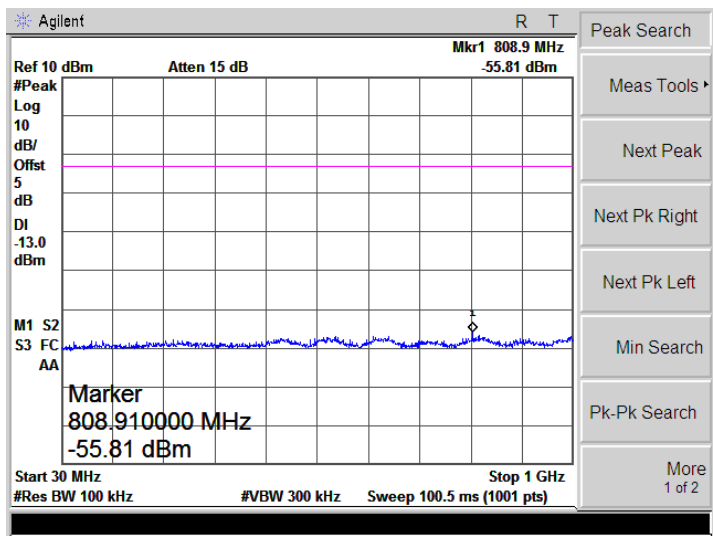



PCS1900
(GMSK)-Middle

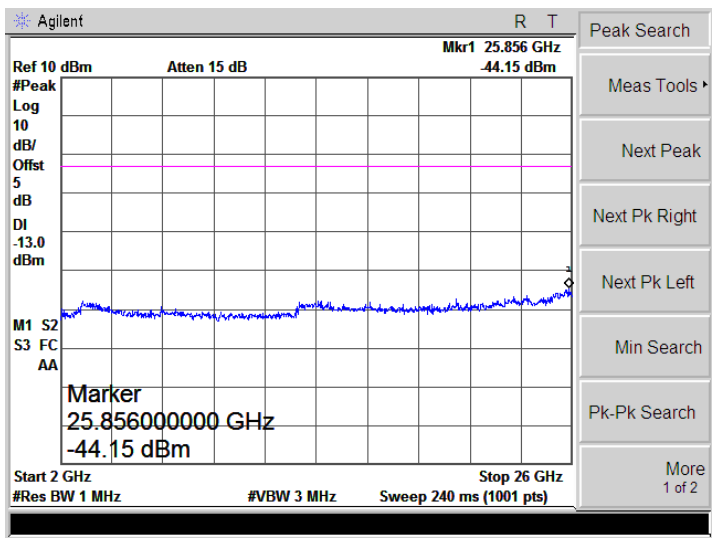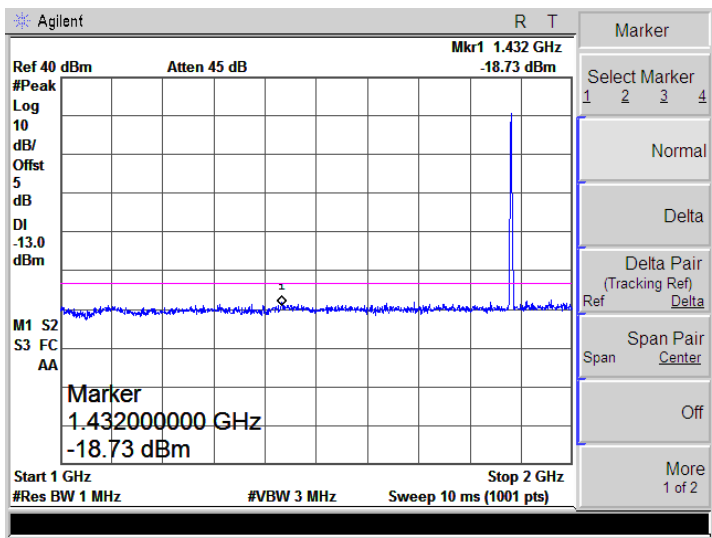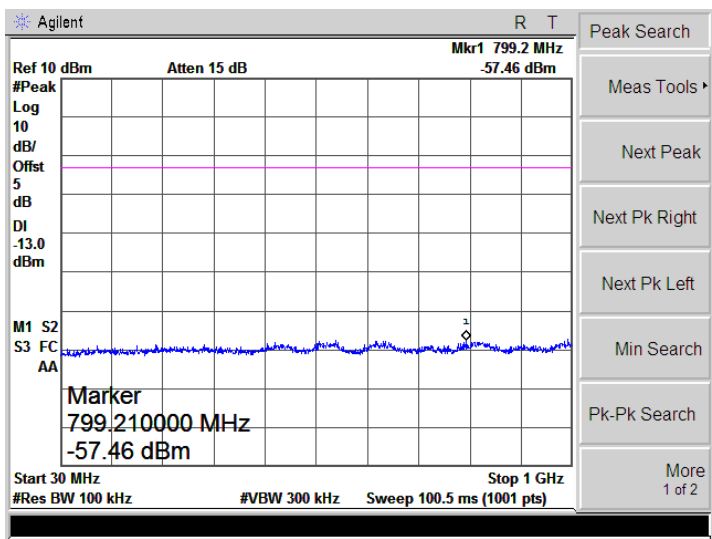




PCS1900
(GMSK)-High

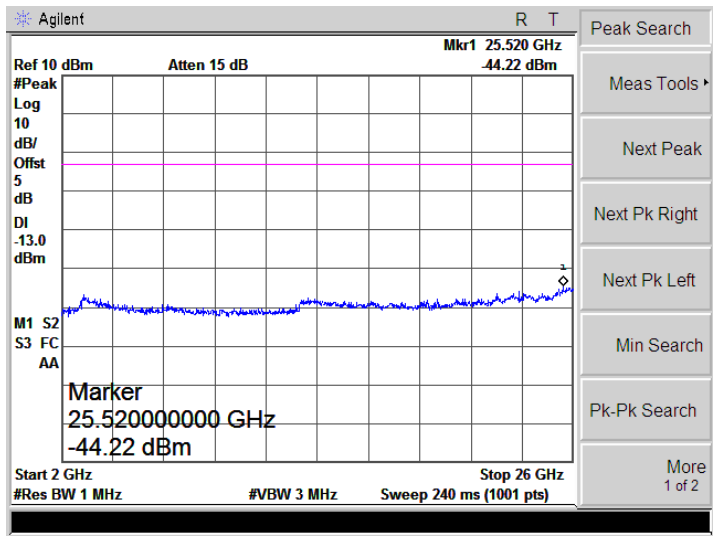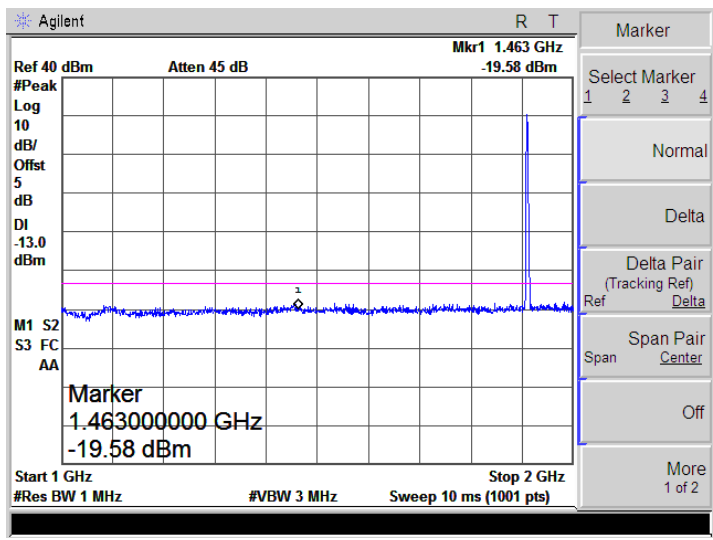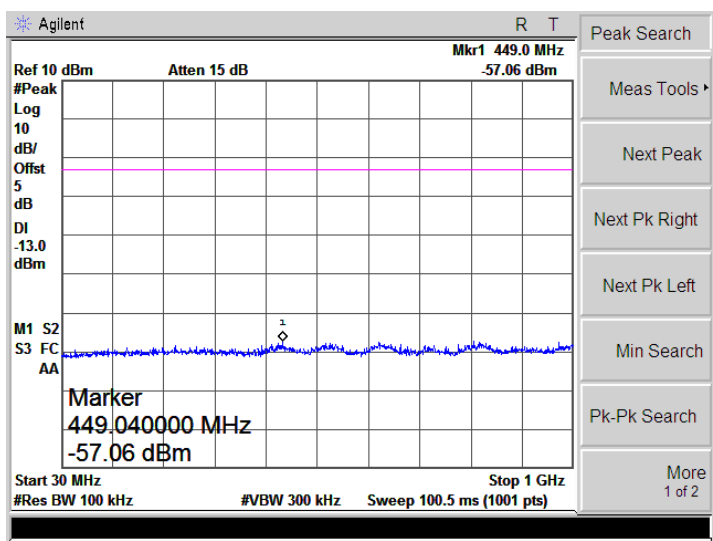




Bandedge

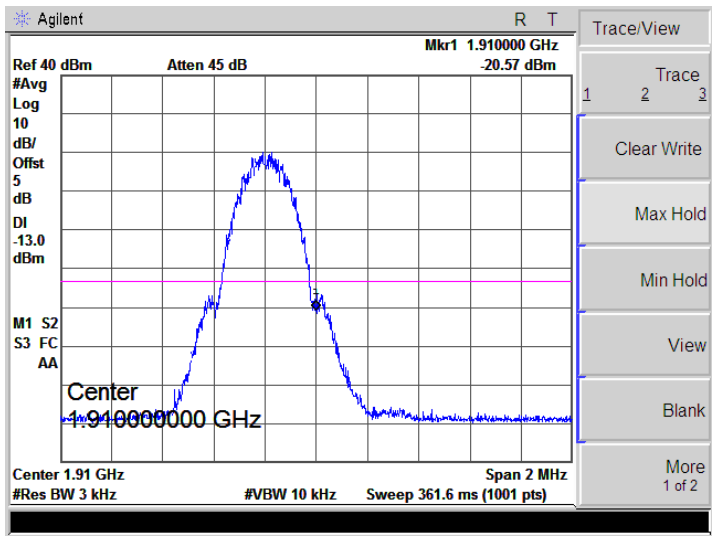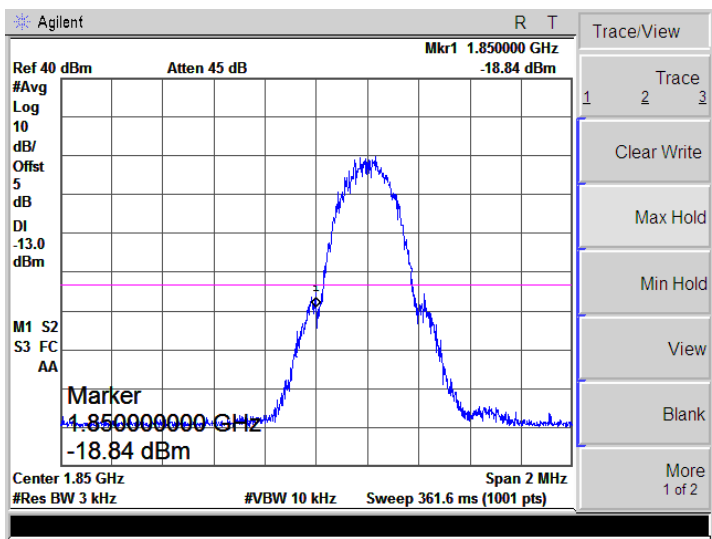




GPRS1900
(GMSK,1Slot)-Low

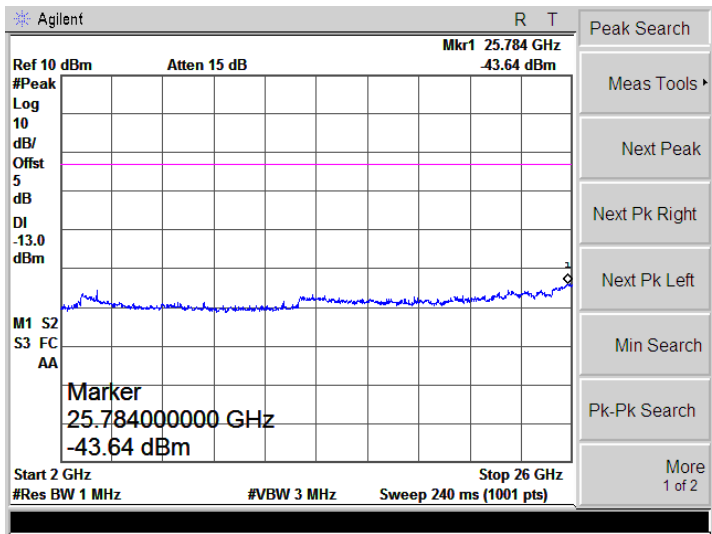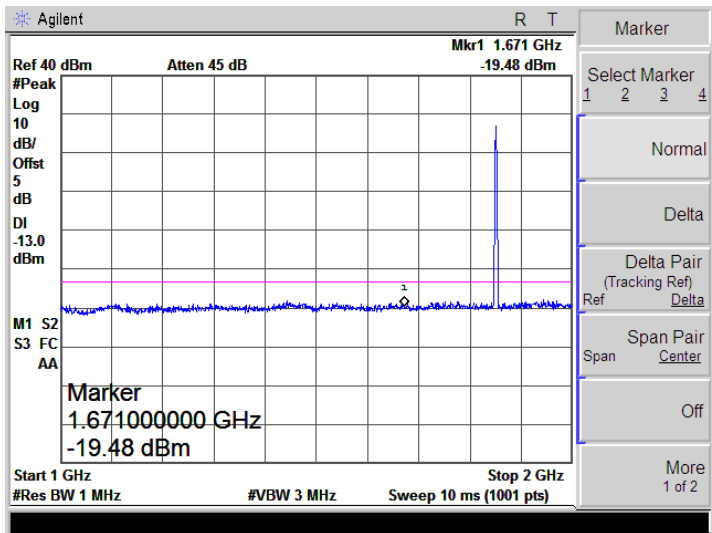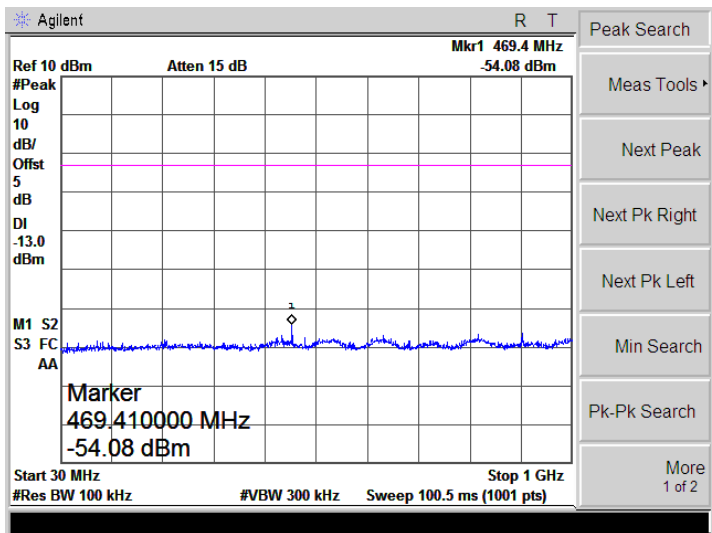



GPRS1900
(GMSK,1Slot)-Middle

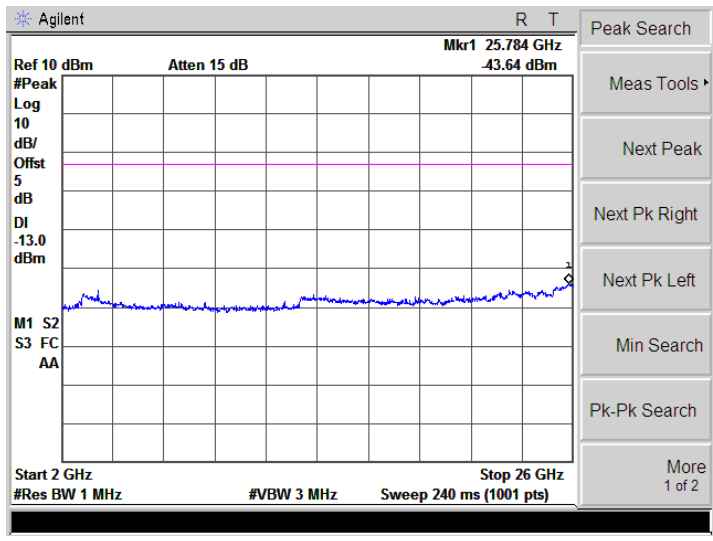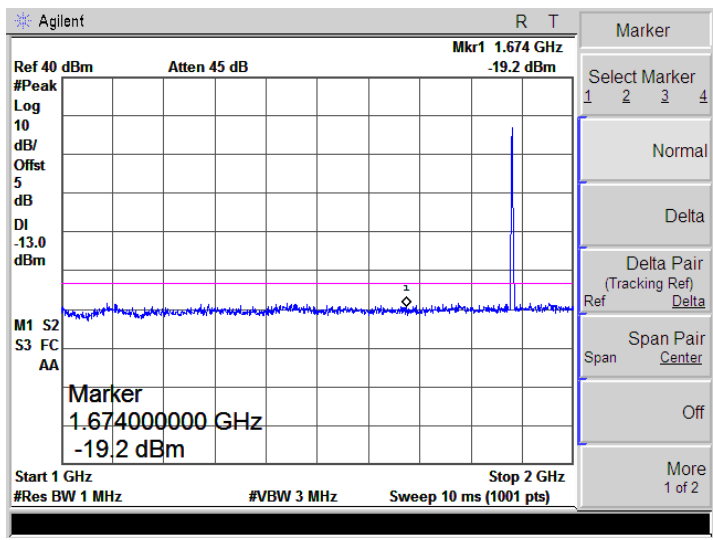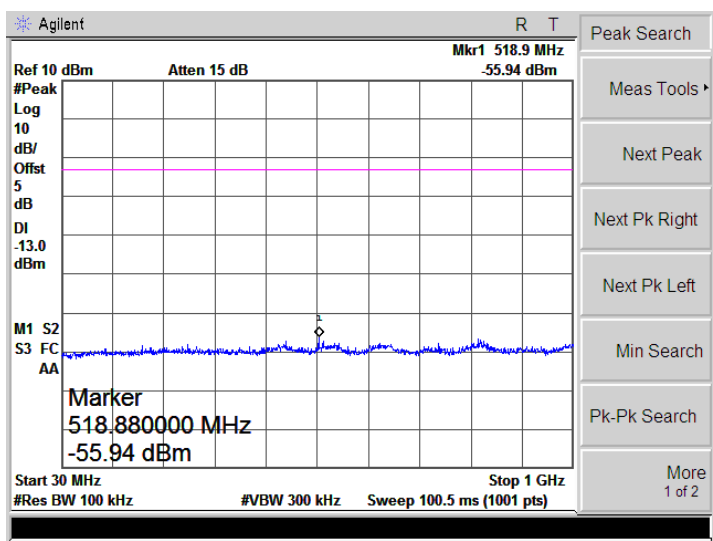




GPRS1900
(GMSK,1Slot)-High

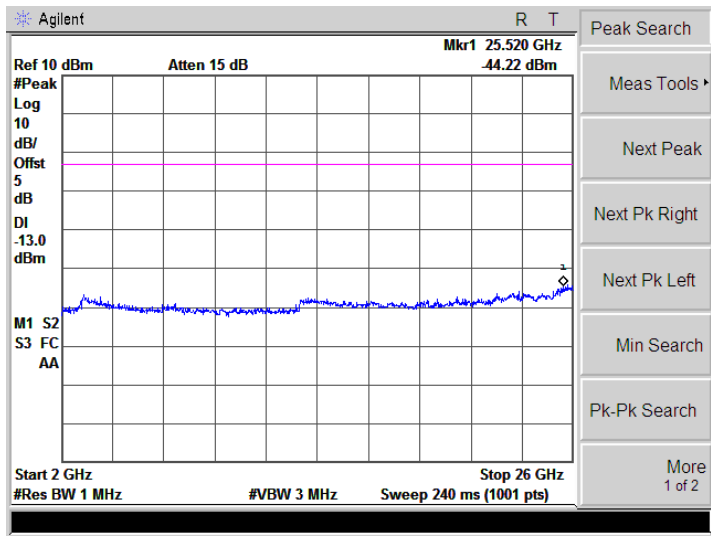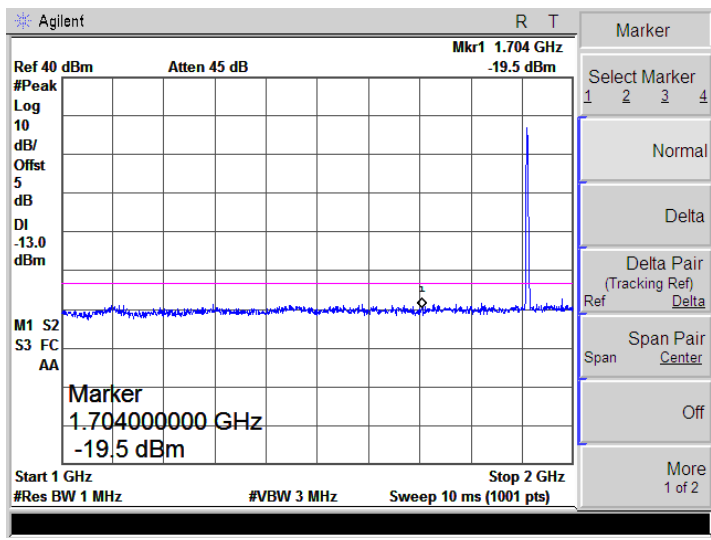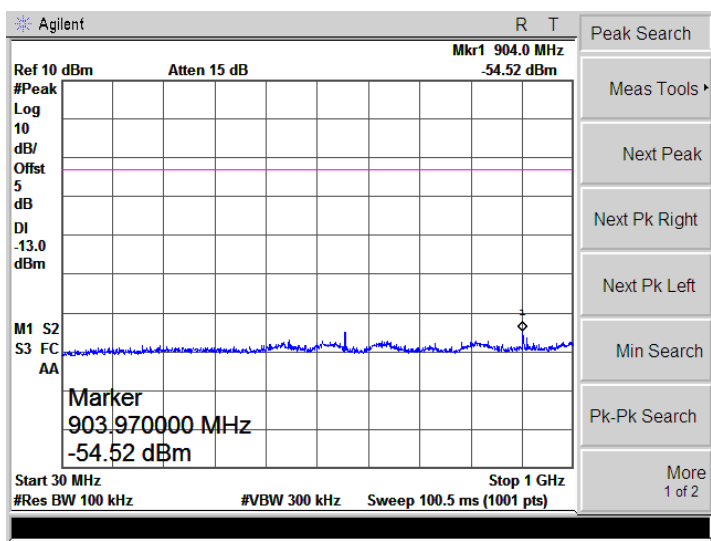




Bandedge

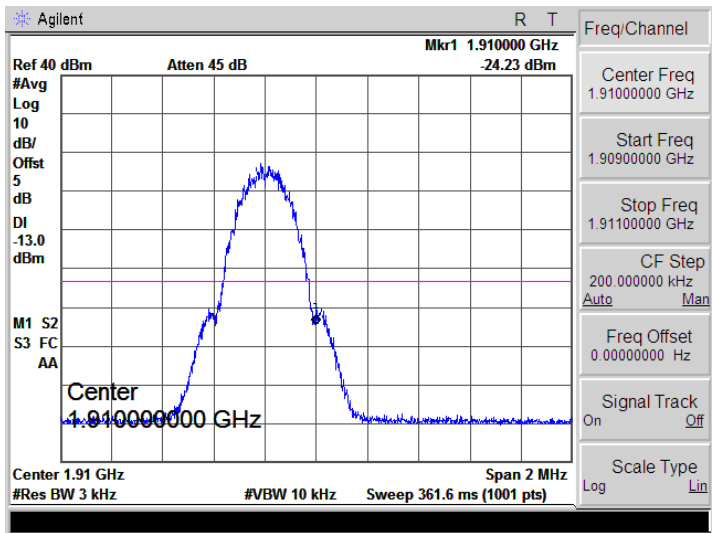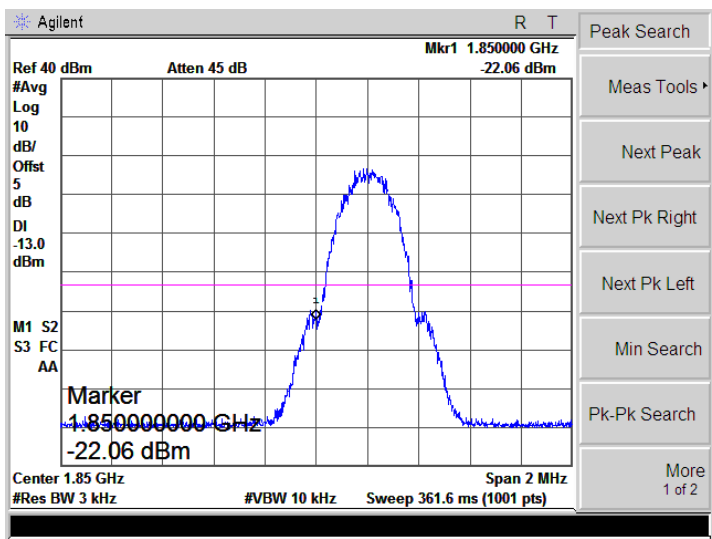




EGPRS1900
(8PSK,1Slot)-Low

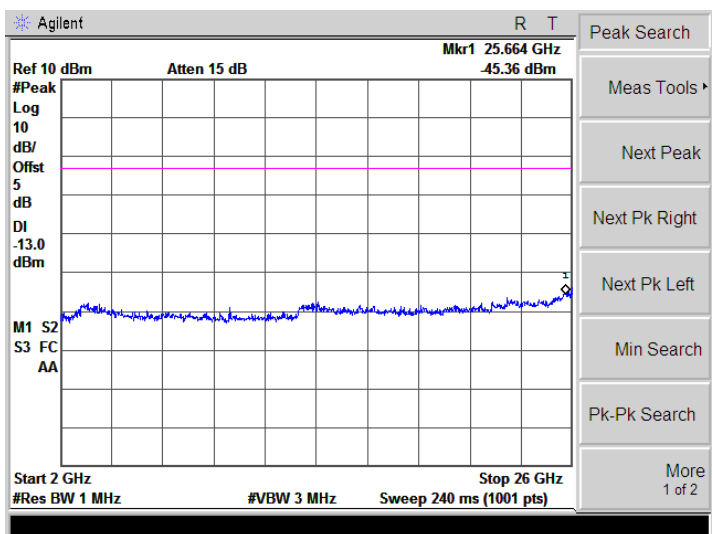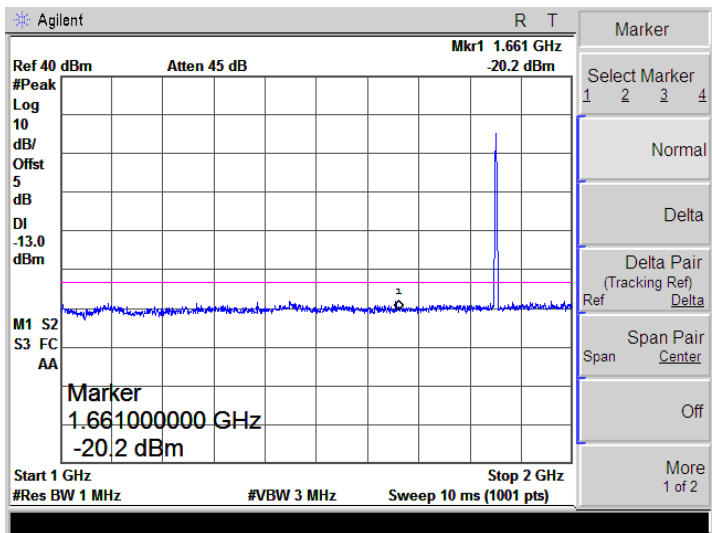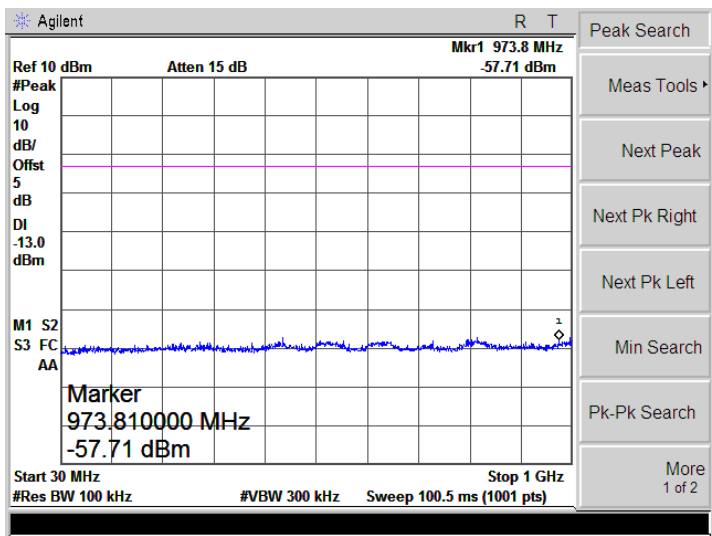



EGPRS1900
(8PSK,1Slot)-Middle

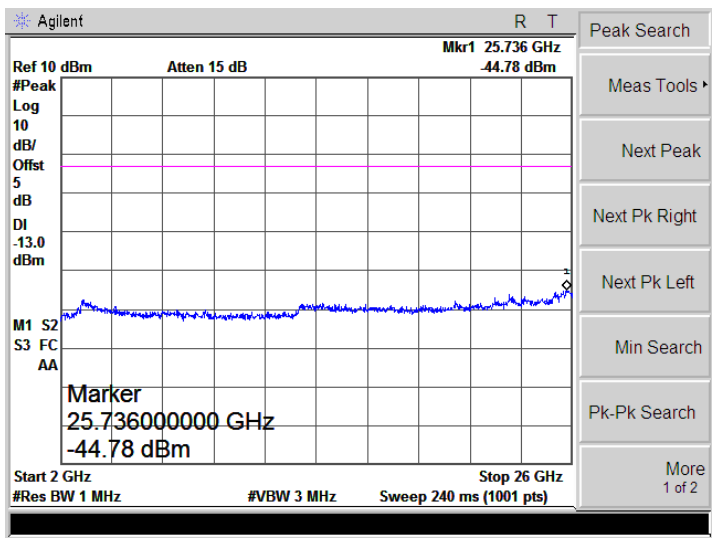
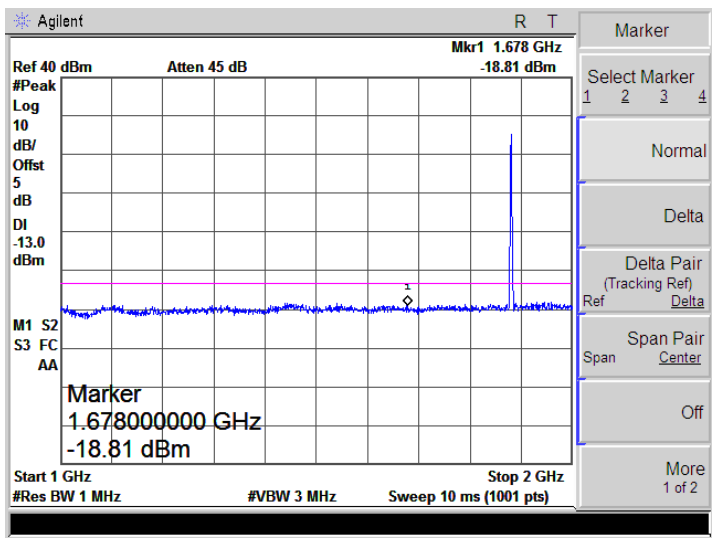
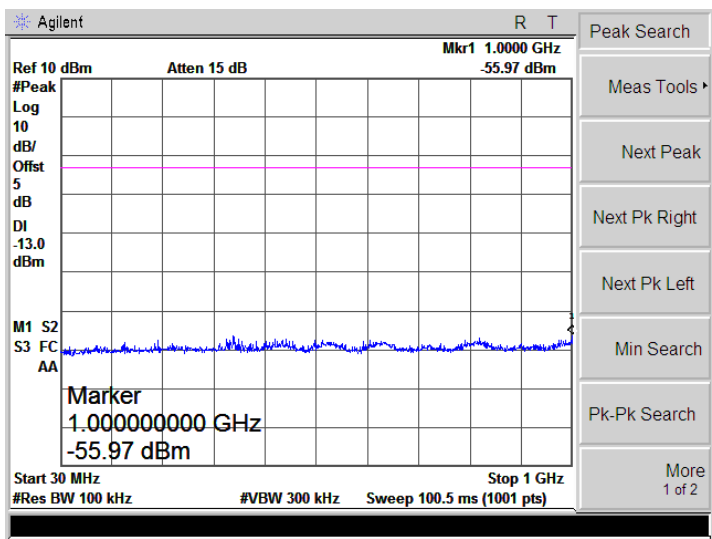





EGPRS1900
(8PSK,1Slot)-High

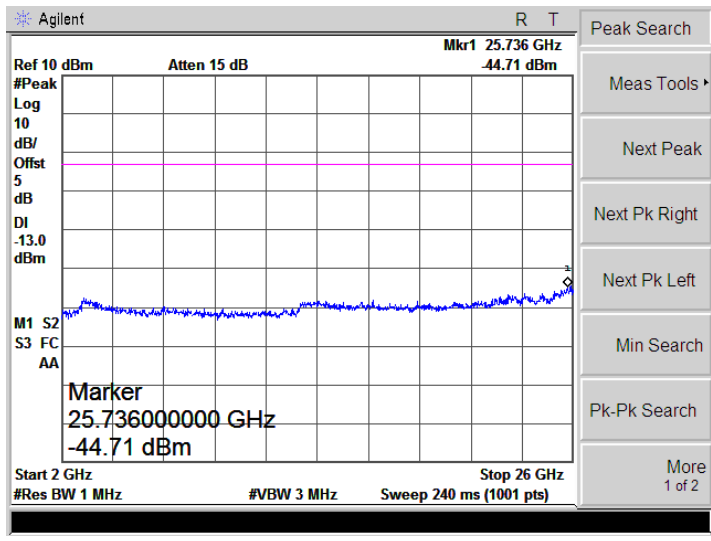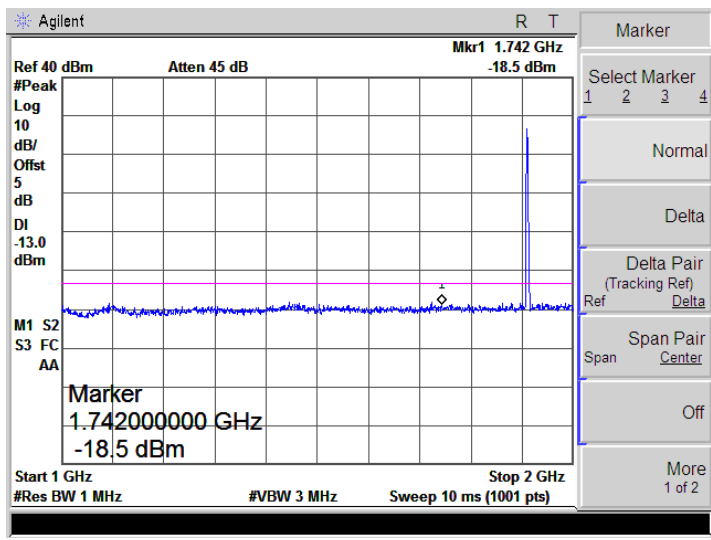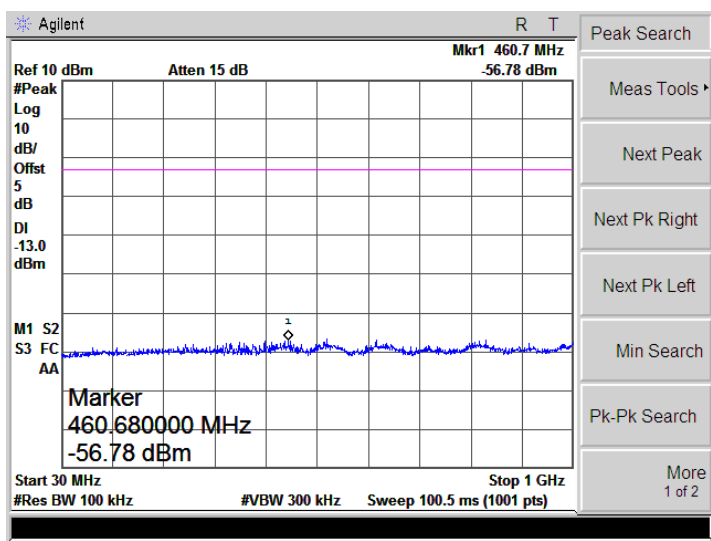



Bandedge

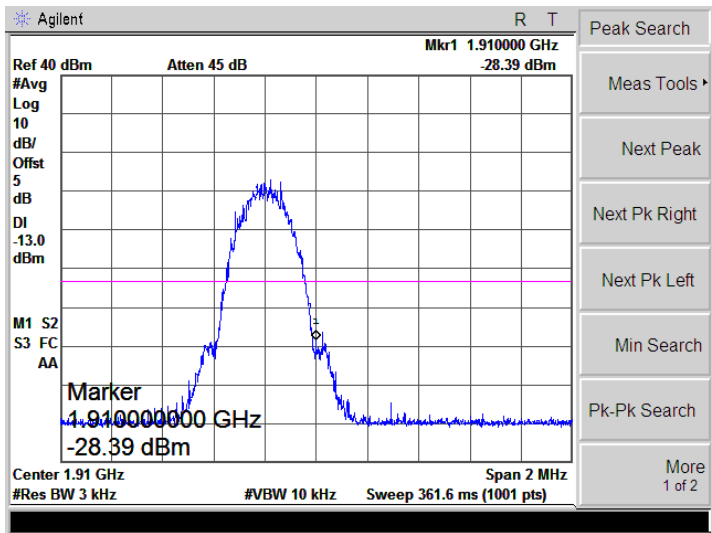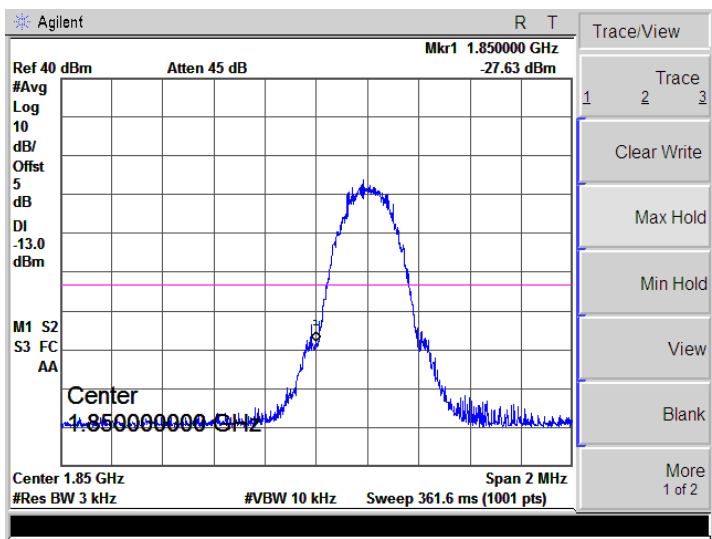

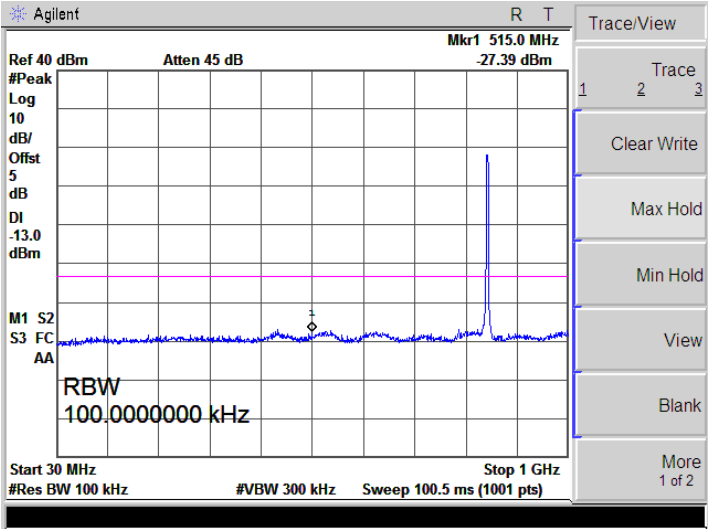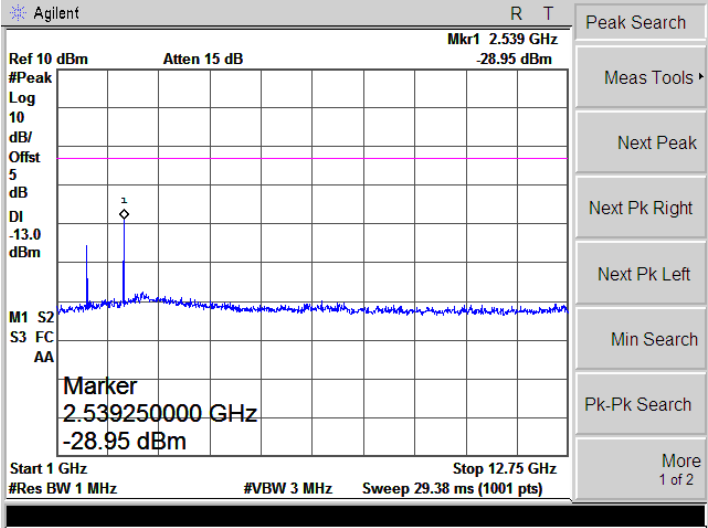
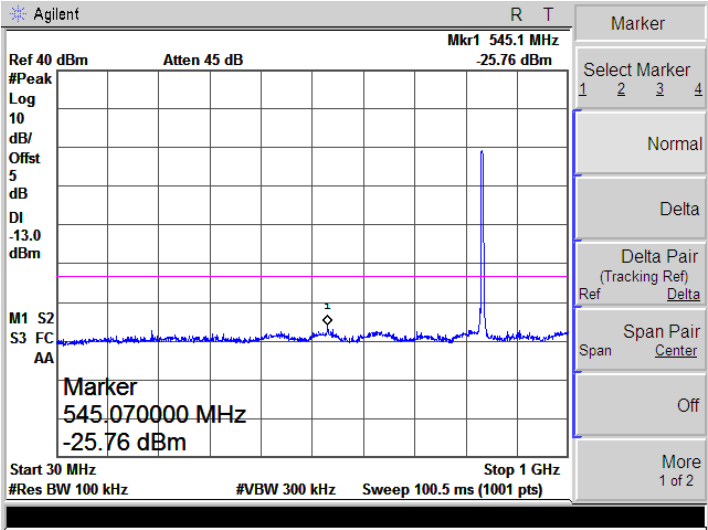
WCDMA Band V-Low	
	
WCDMA Band V-Middle	

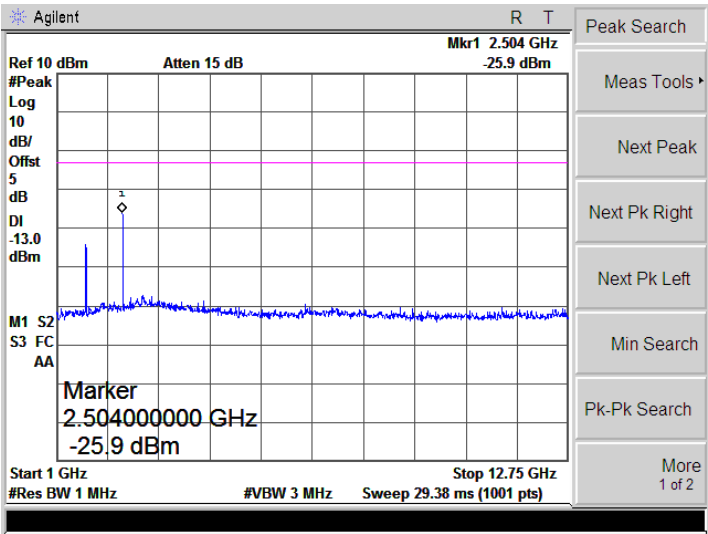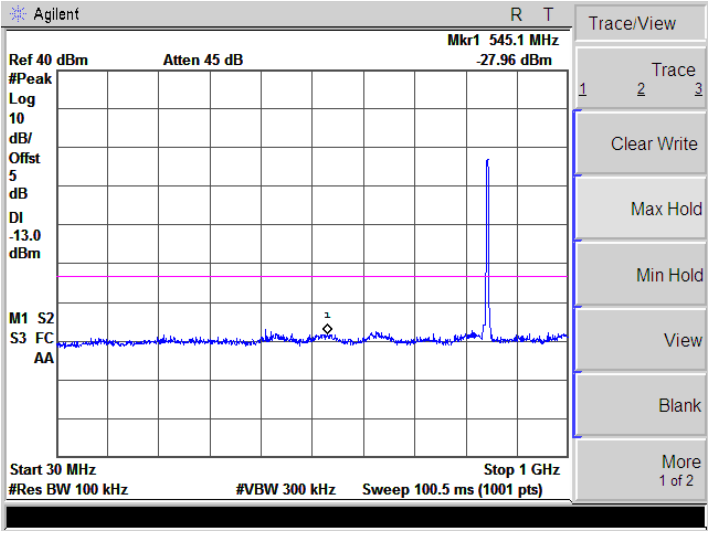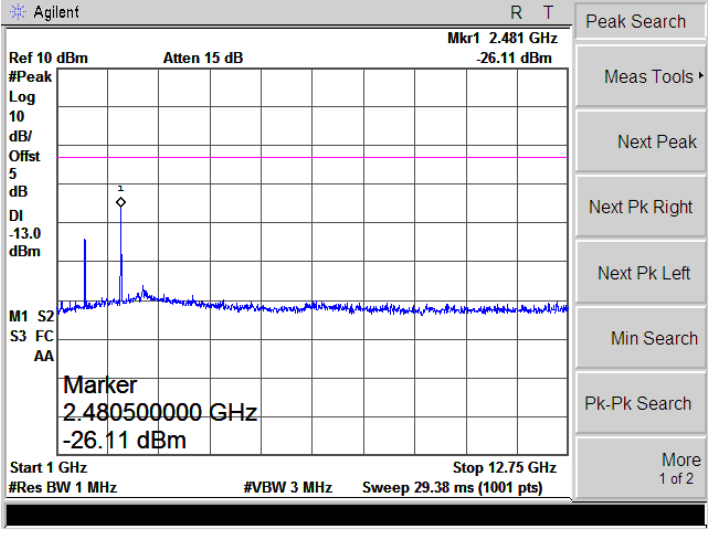	
WCDMA Band V-High	
	


Bandedge

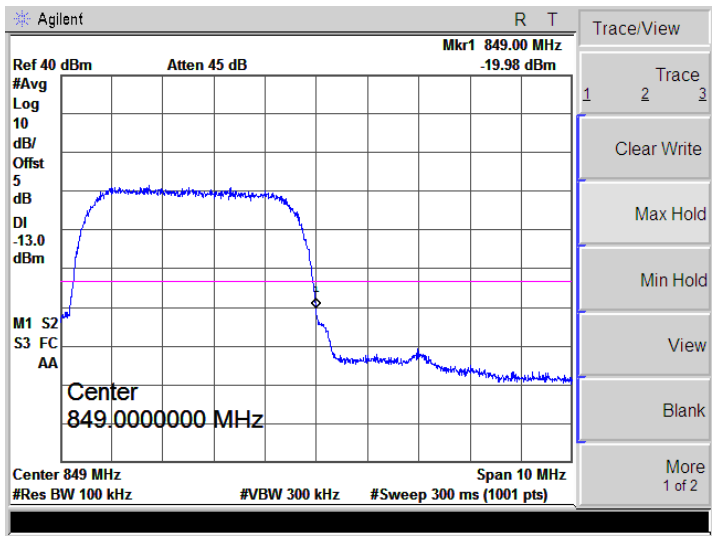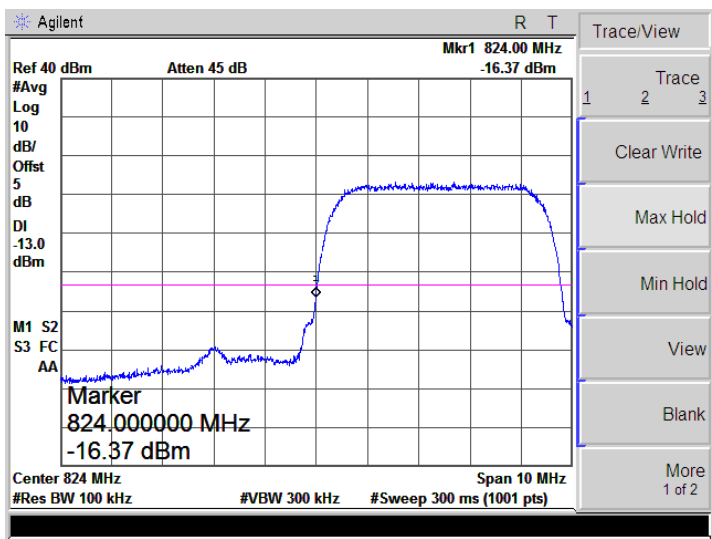


HSDPA Band V-Low

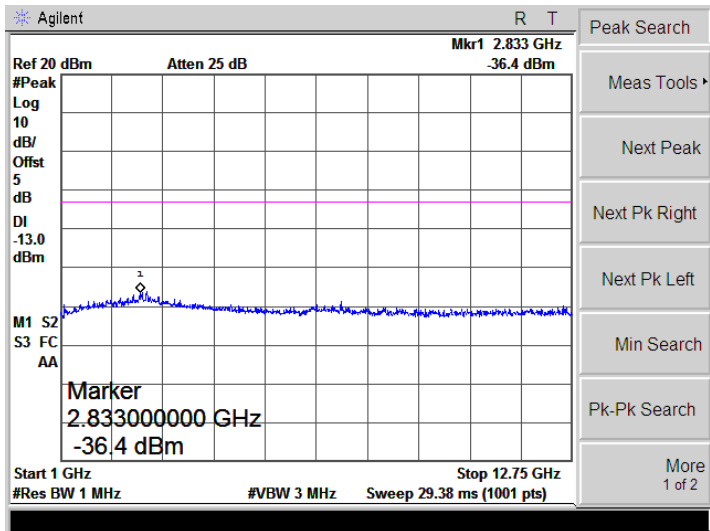
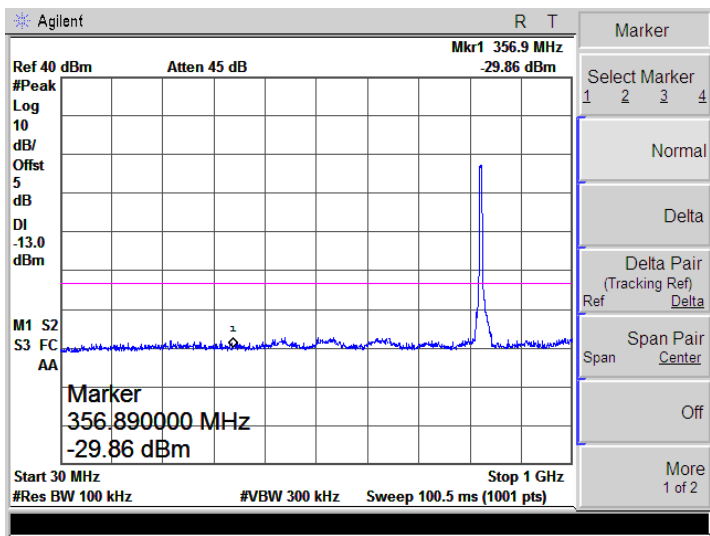





HSDPA Band V-Middle



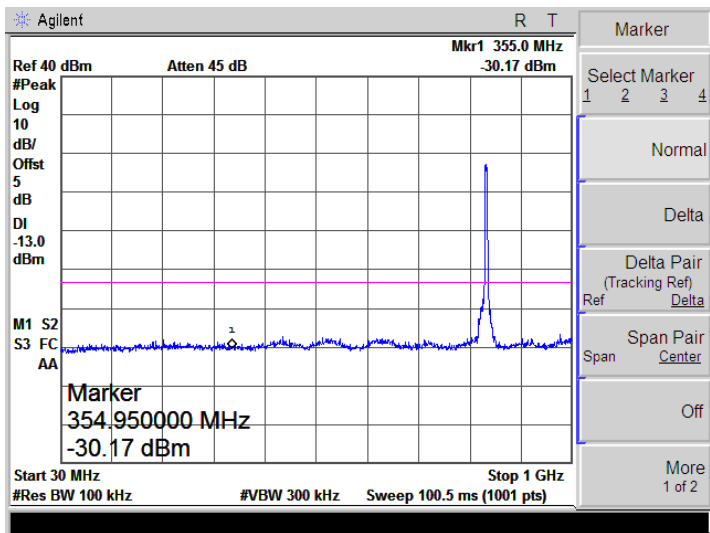


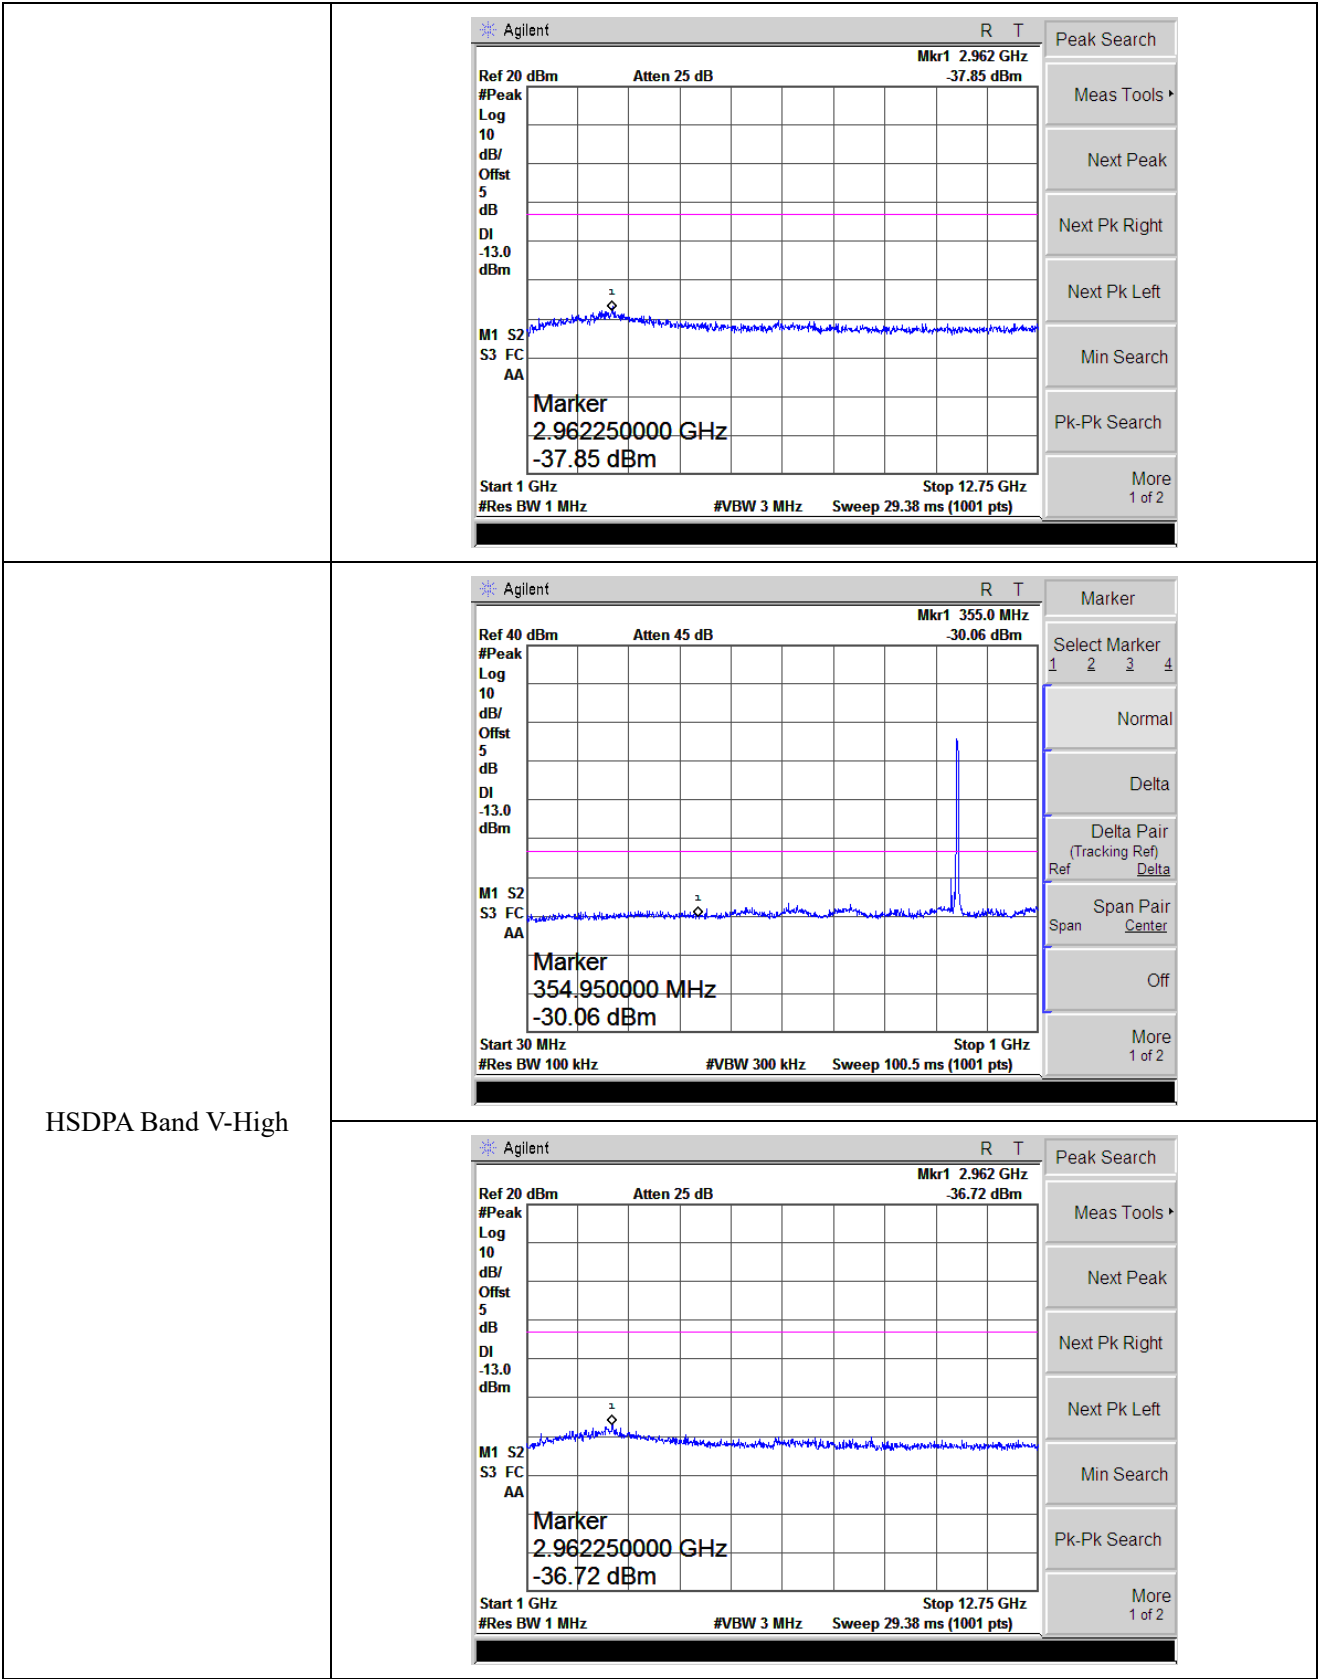



Bandedge

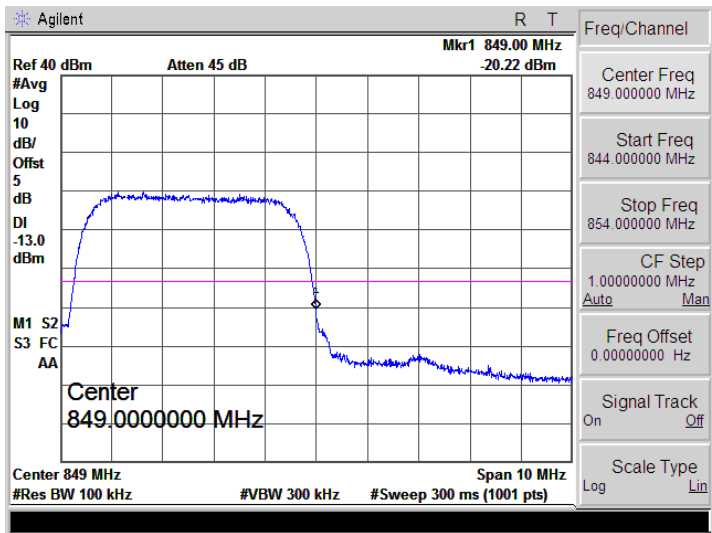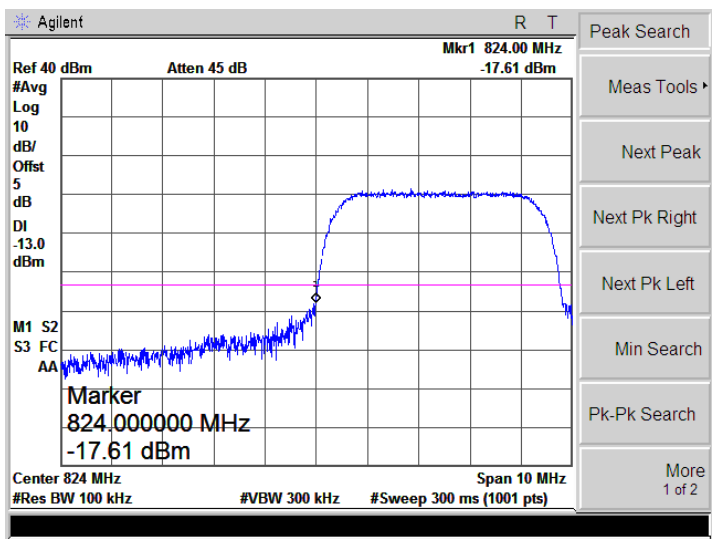

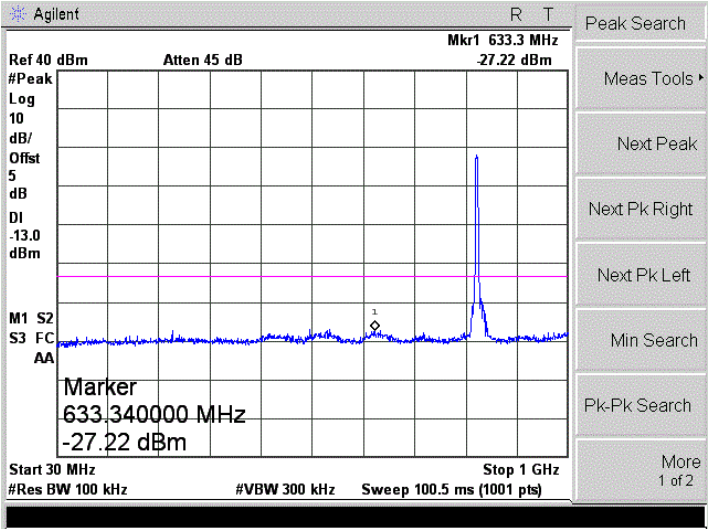
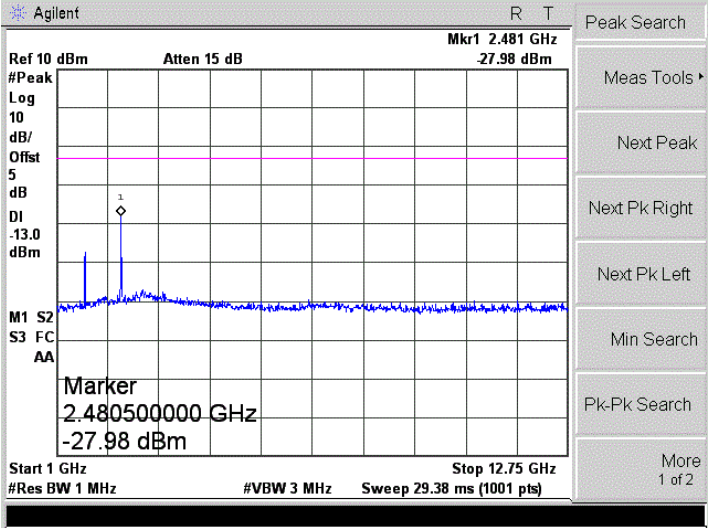
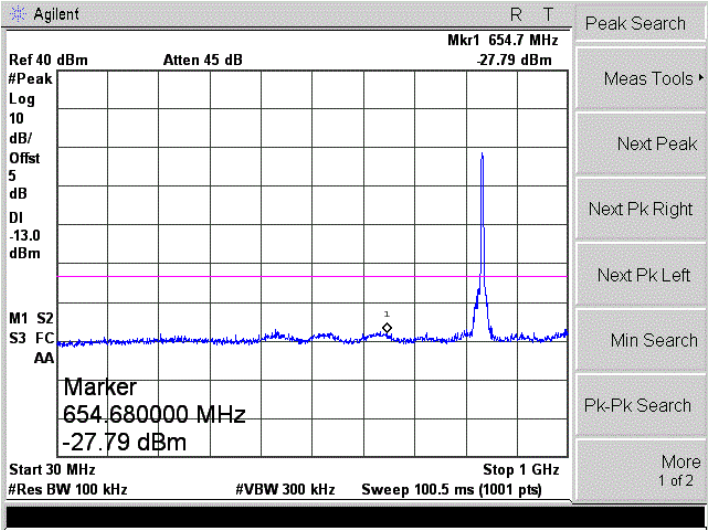
HSUPA Band V-Low	
	
HSUPA Band V-Middle	

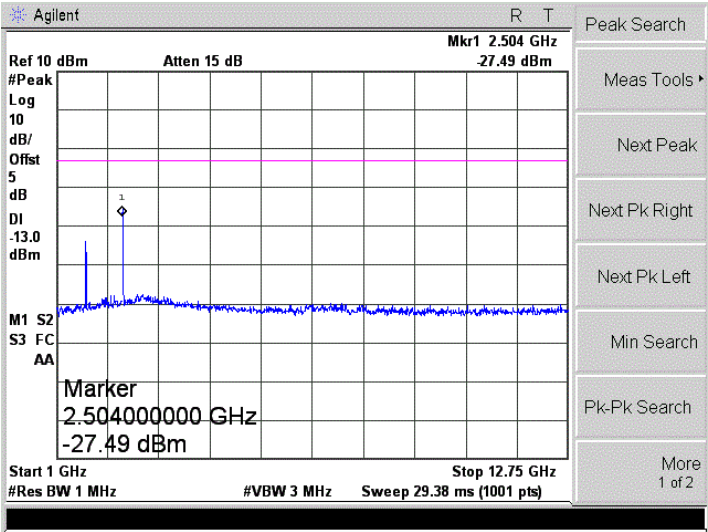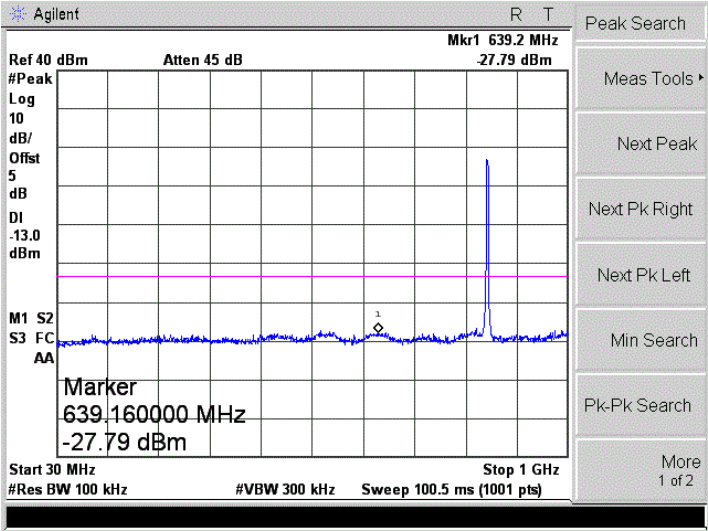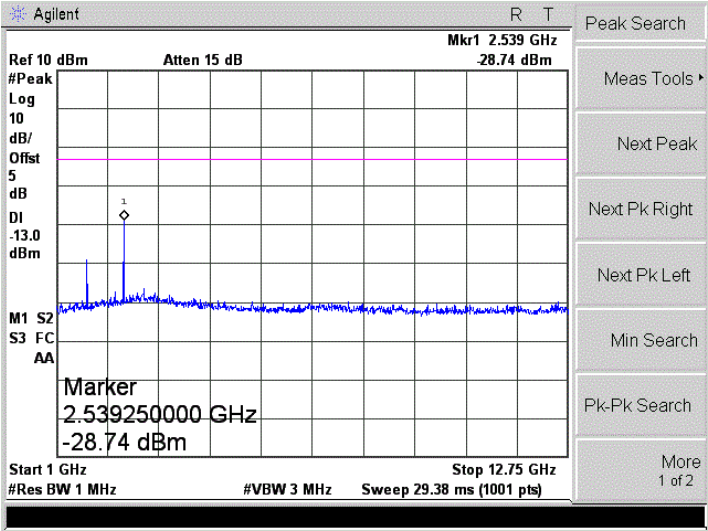	
HSUPA Band V-High	
	




Bandedge

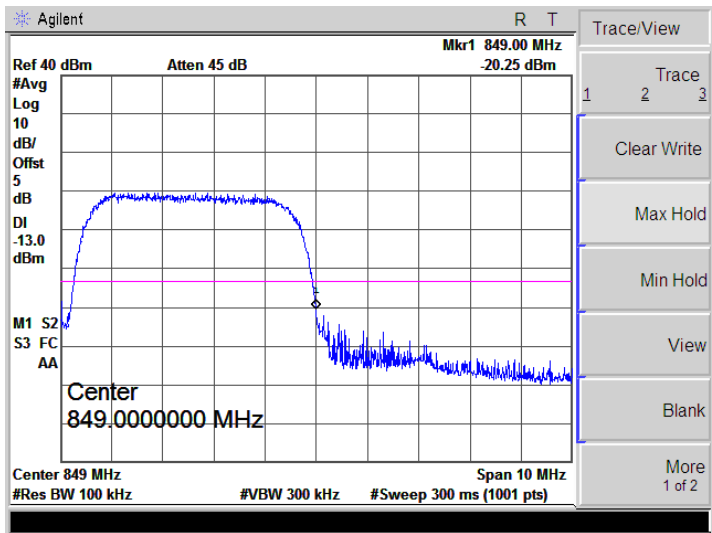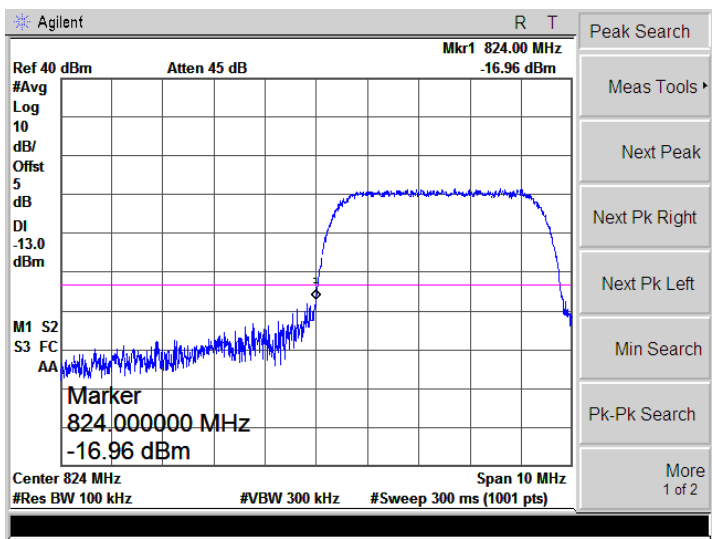




WCDMA Band IV-Low

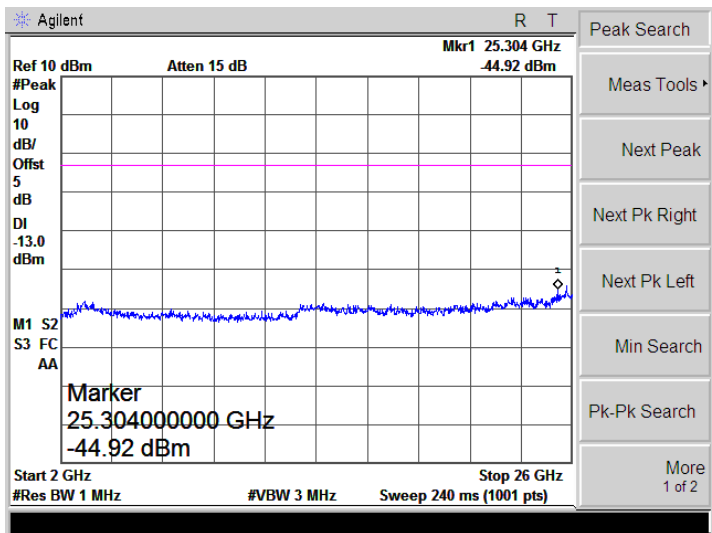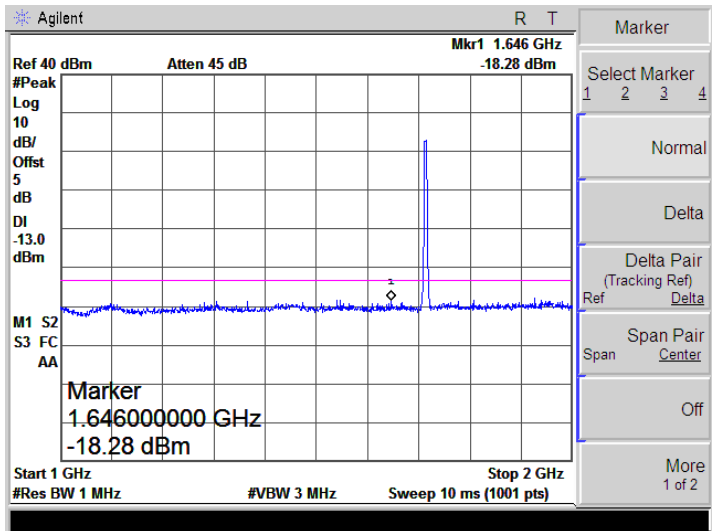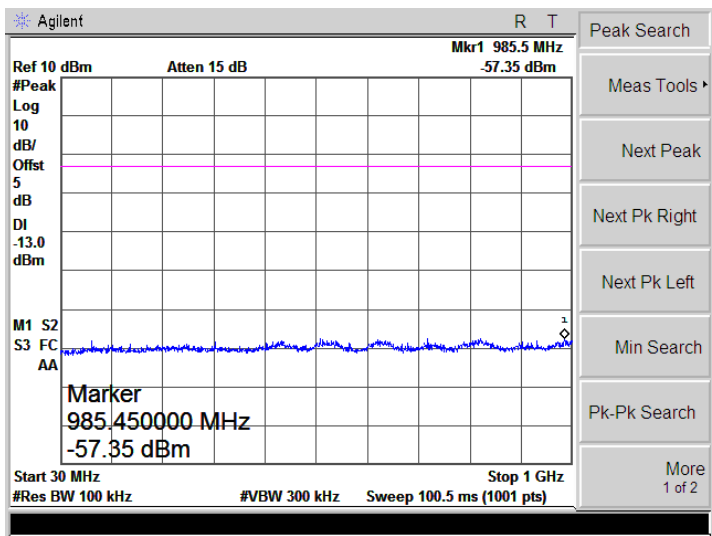



WCDMA Band IV-Middle

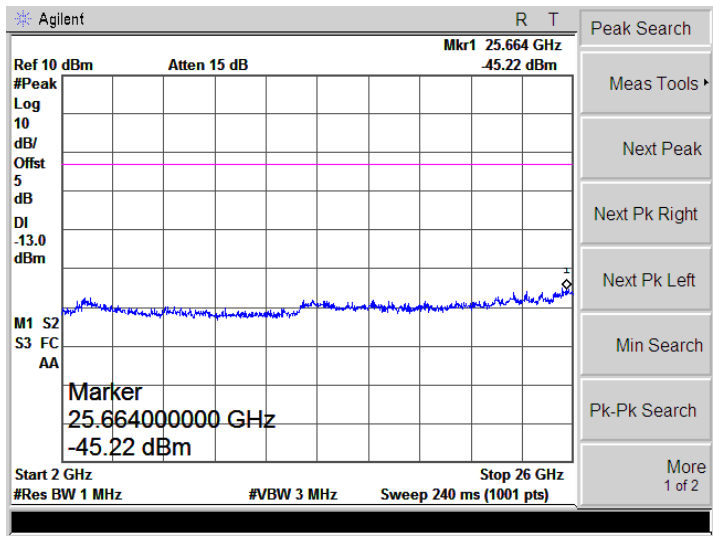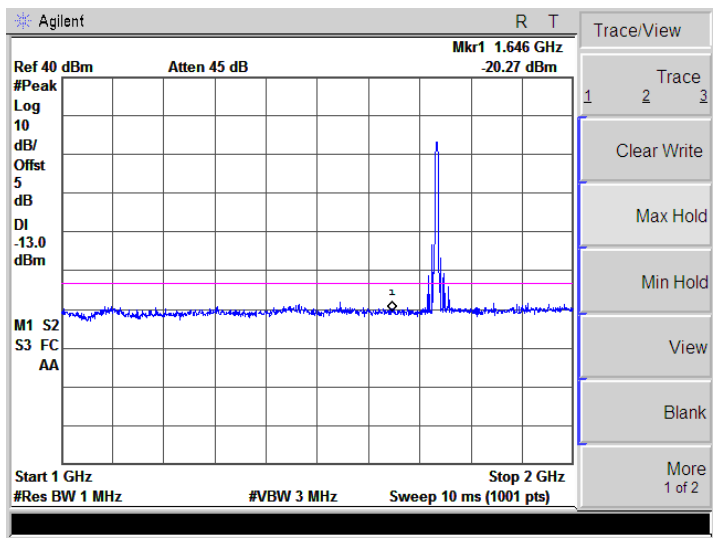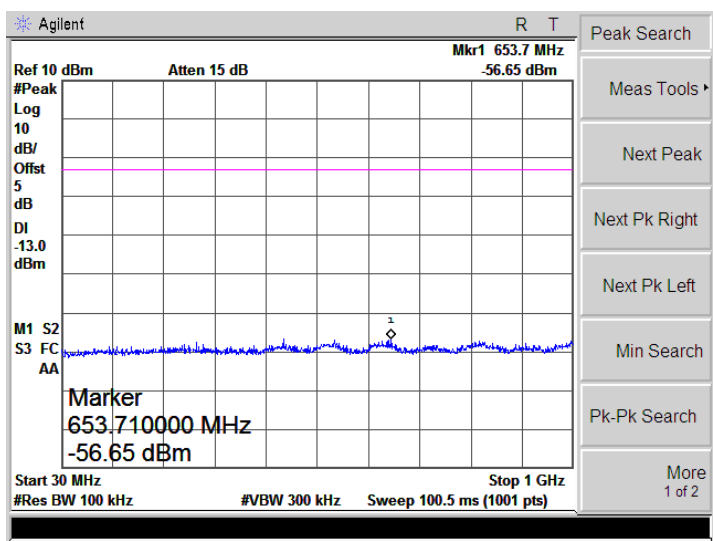




WCDMA Band IV-High

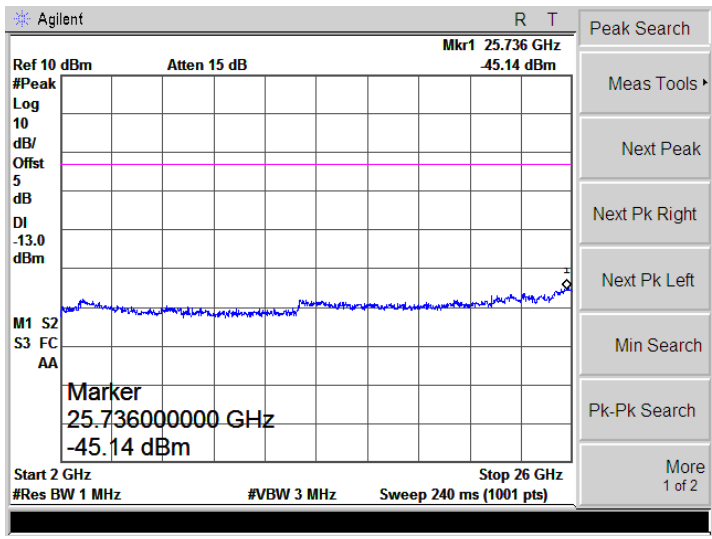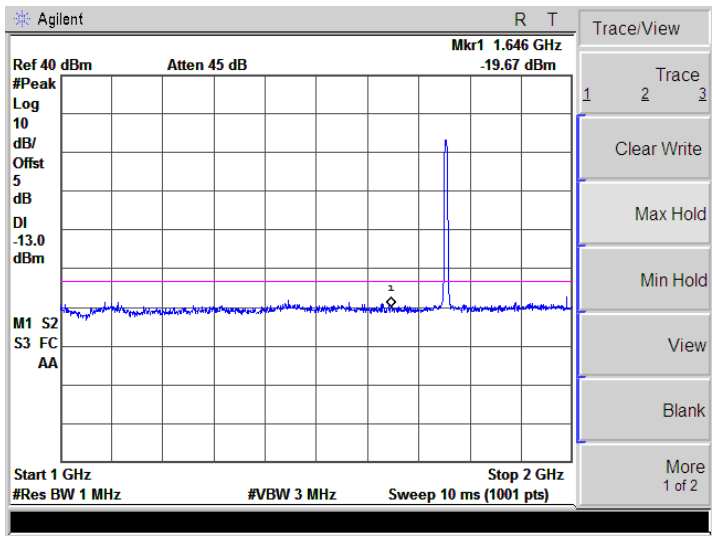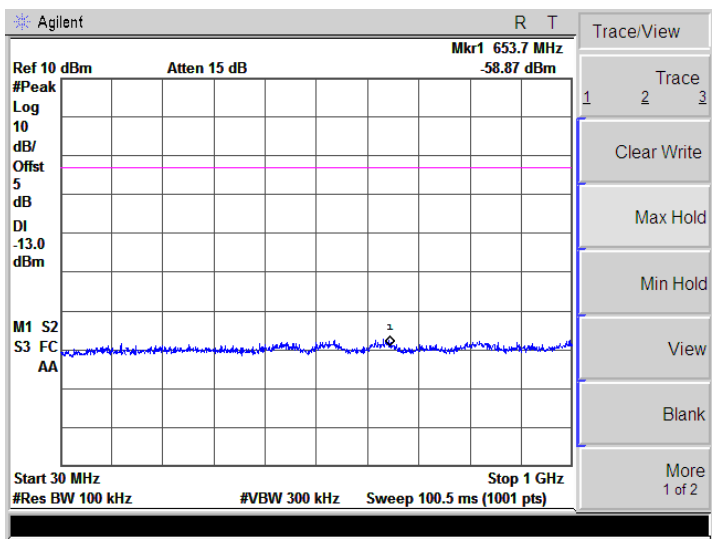


Bandedge


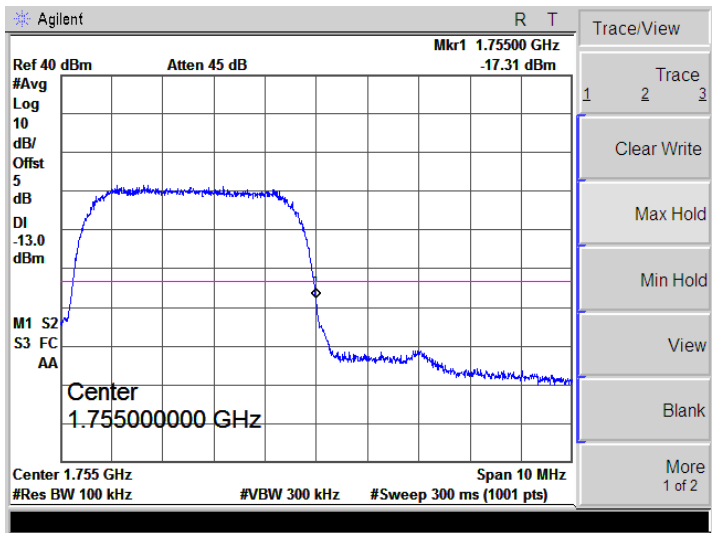
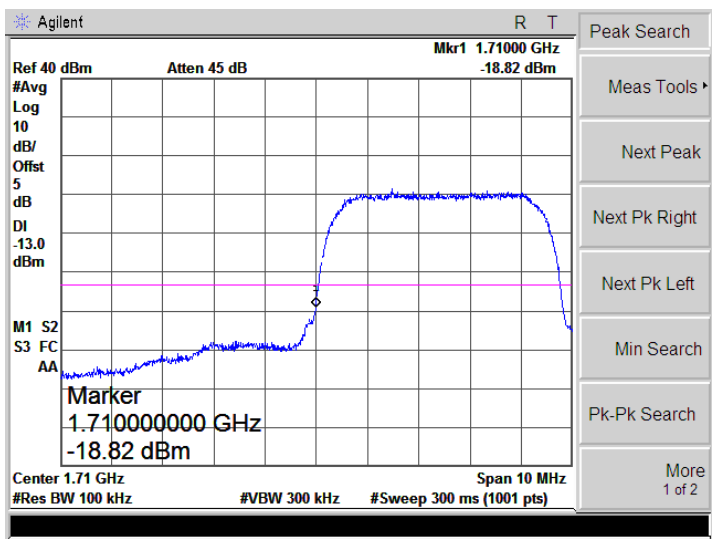


HSDPA Band IV-Low

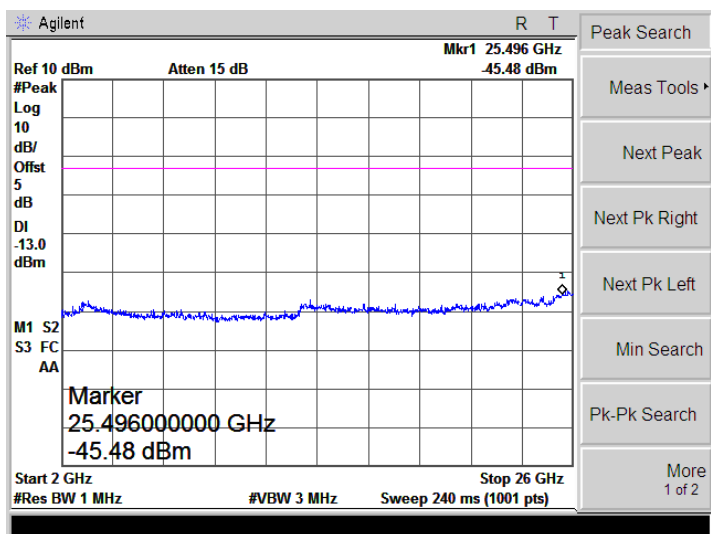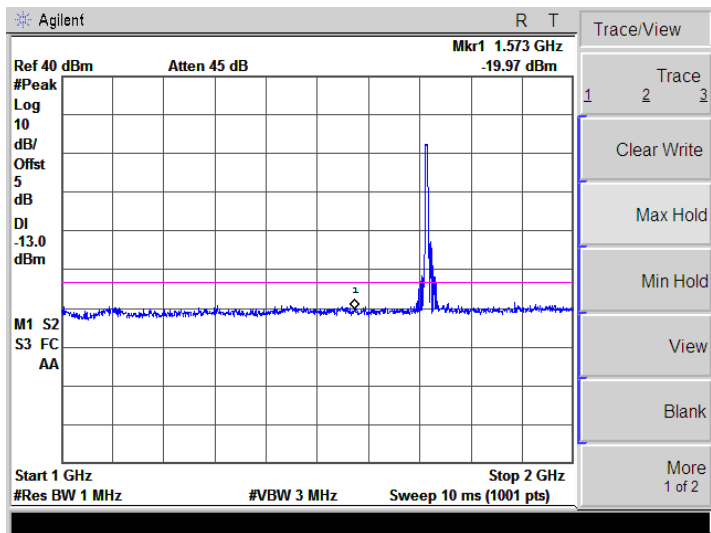
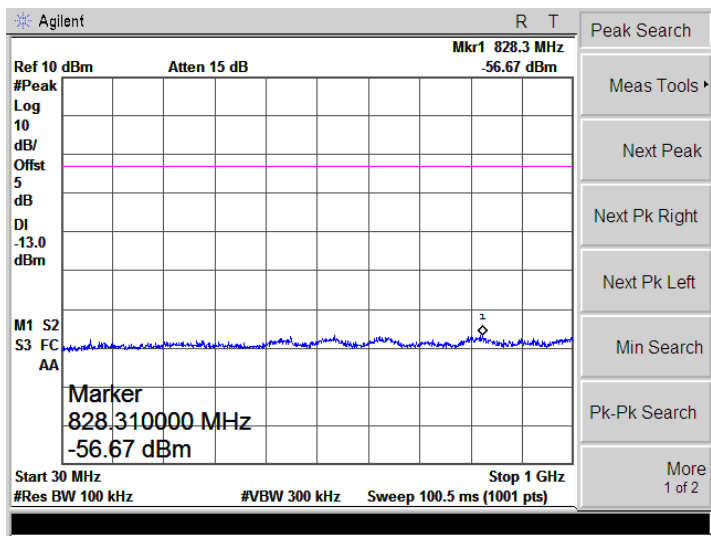


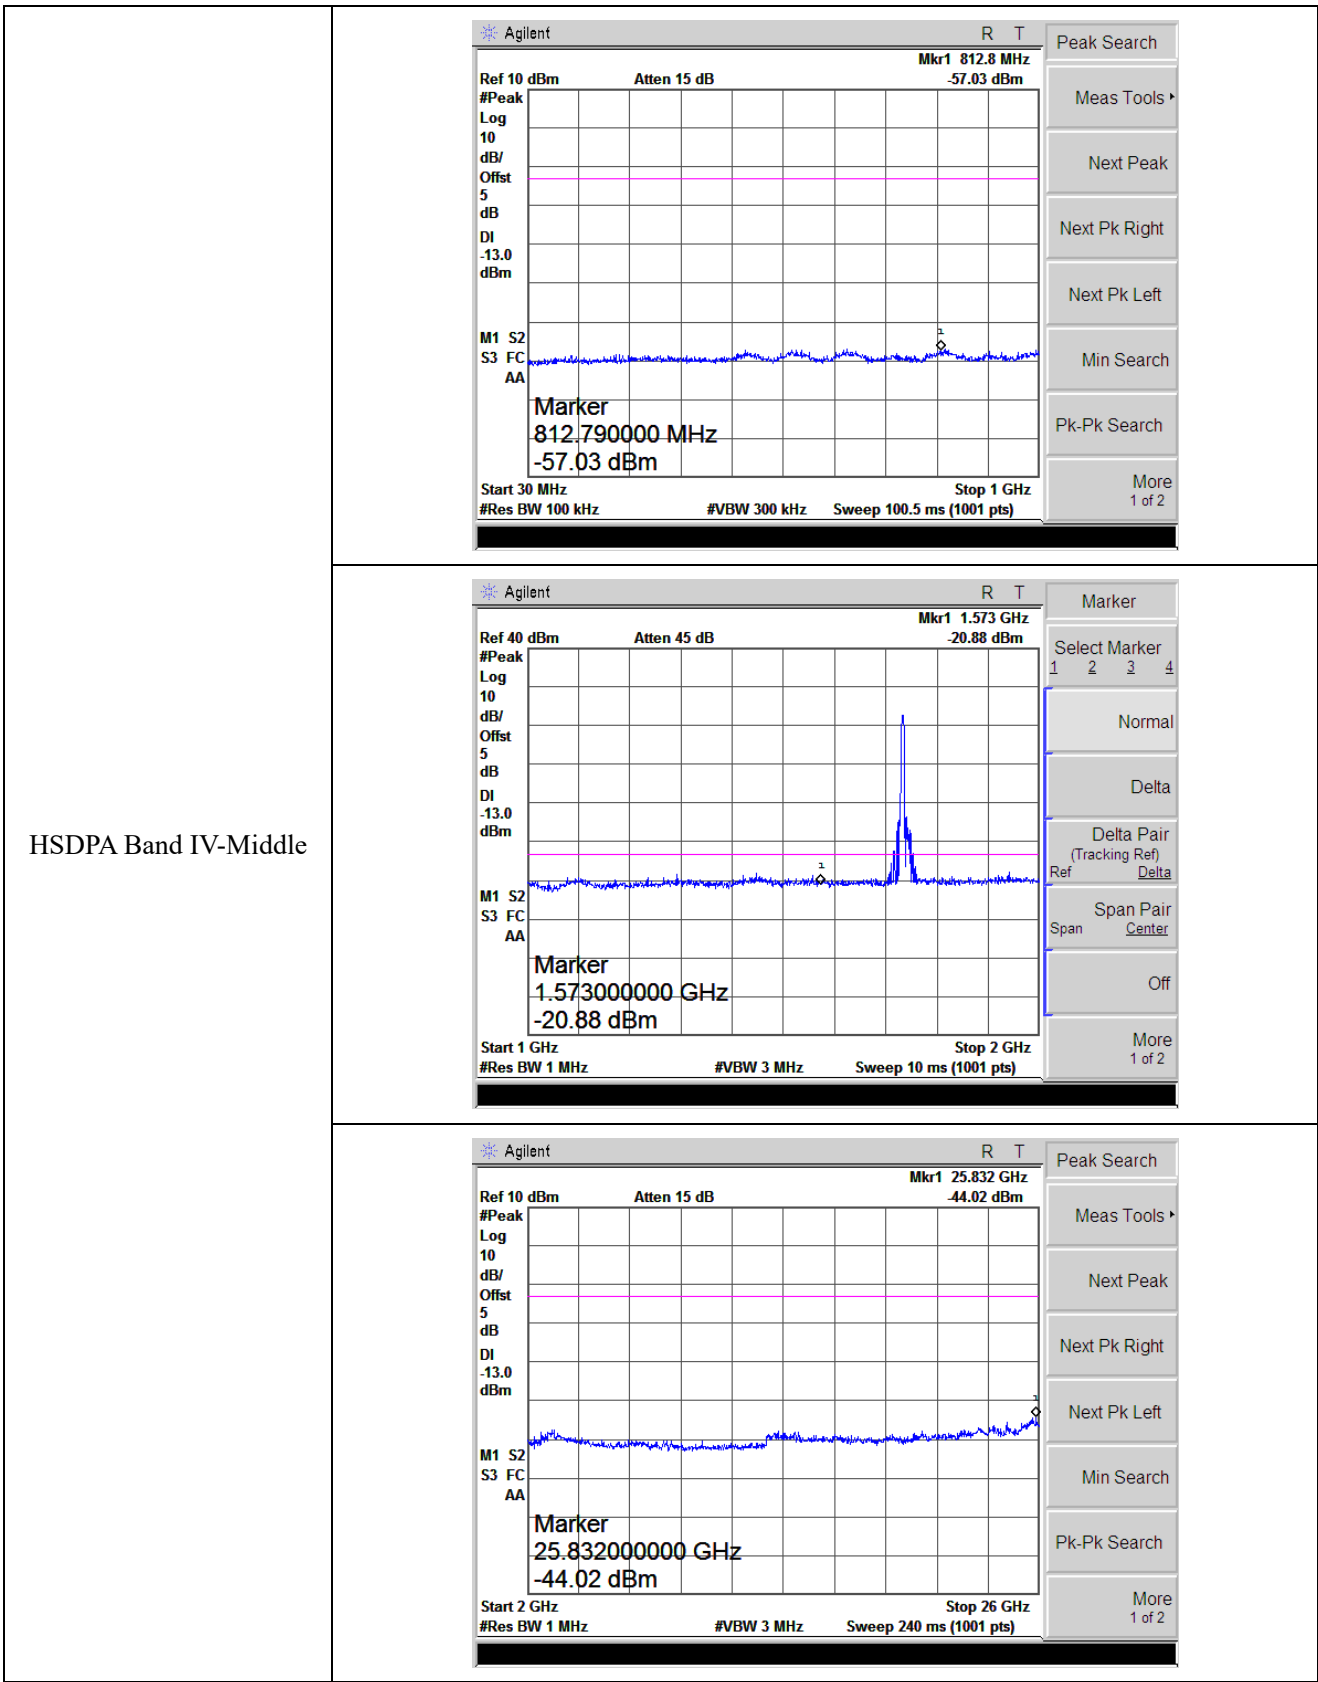




HSDPA Band IV-High

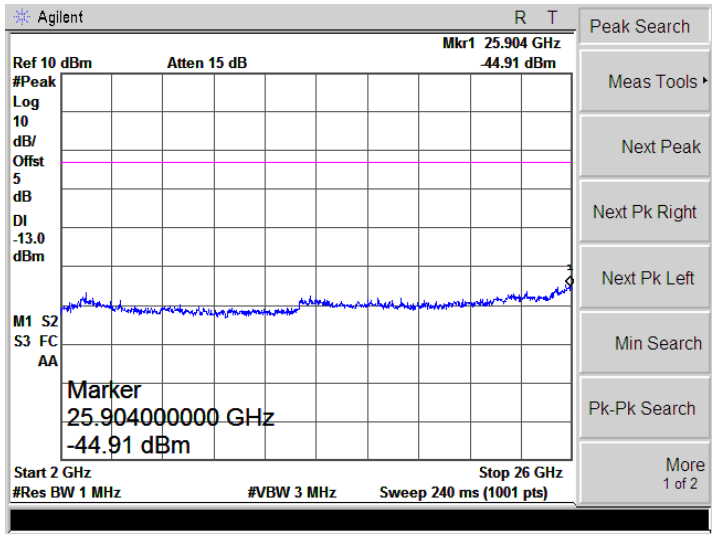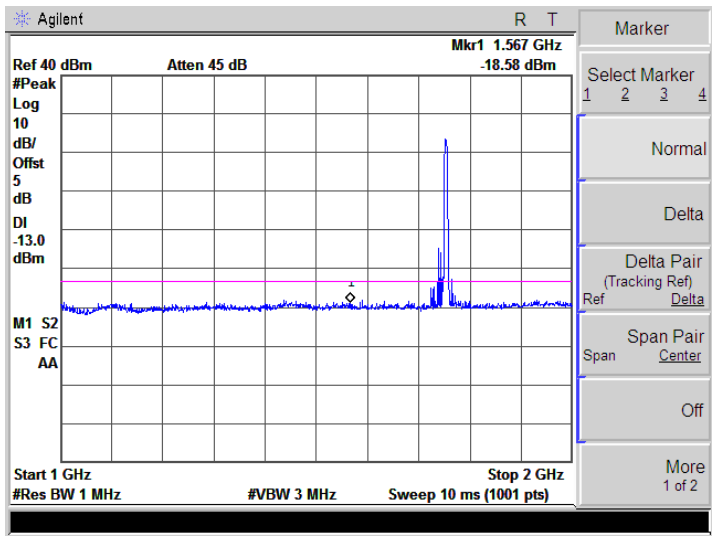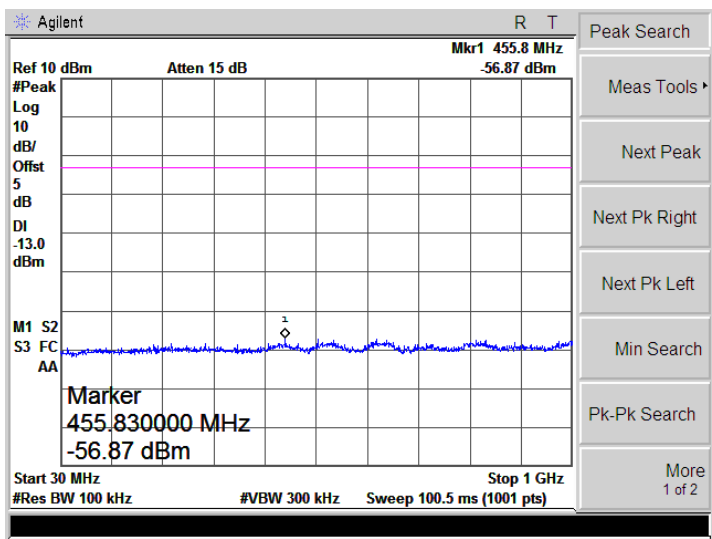


Bandedge


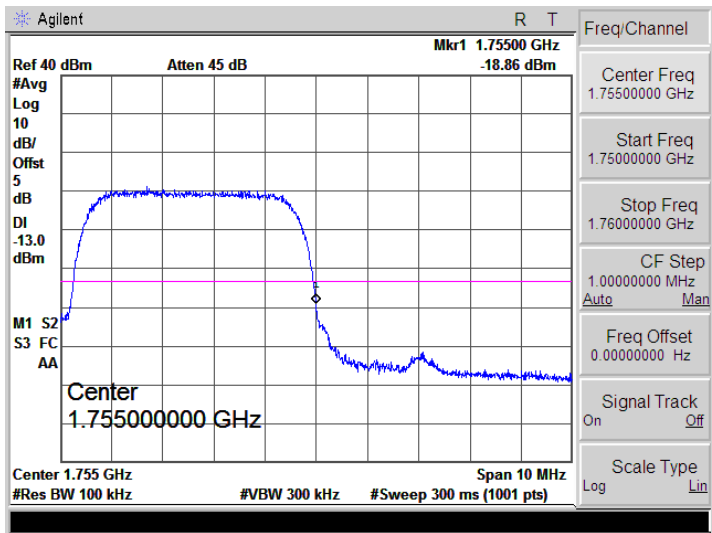
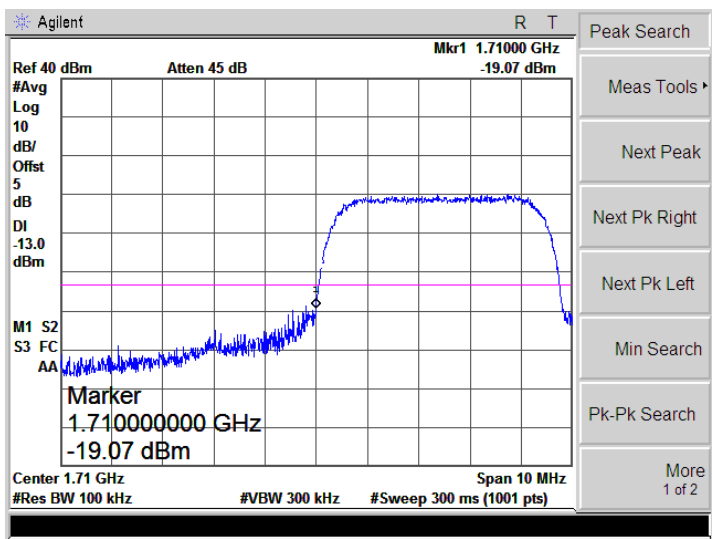


HSUPA Band IV-Low

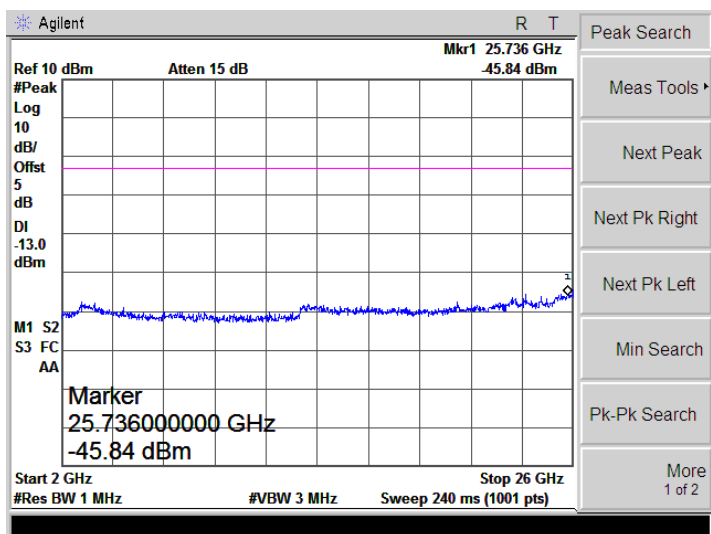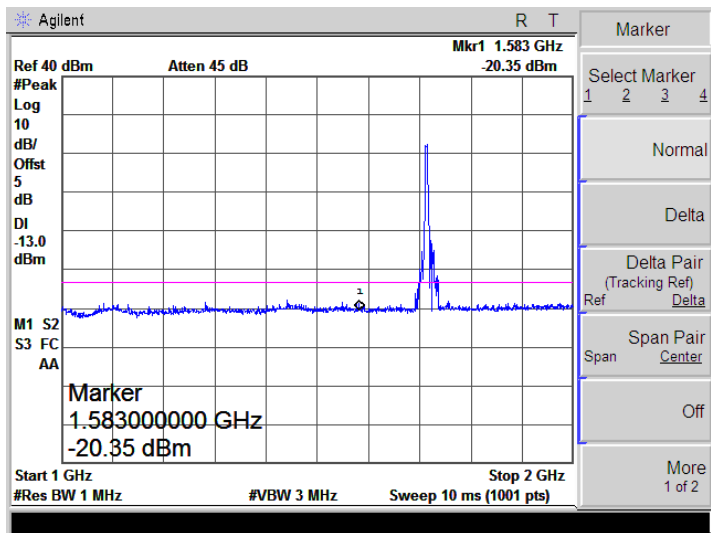
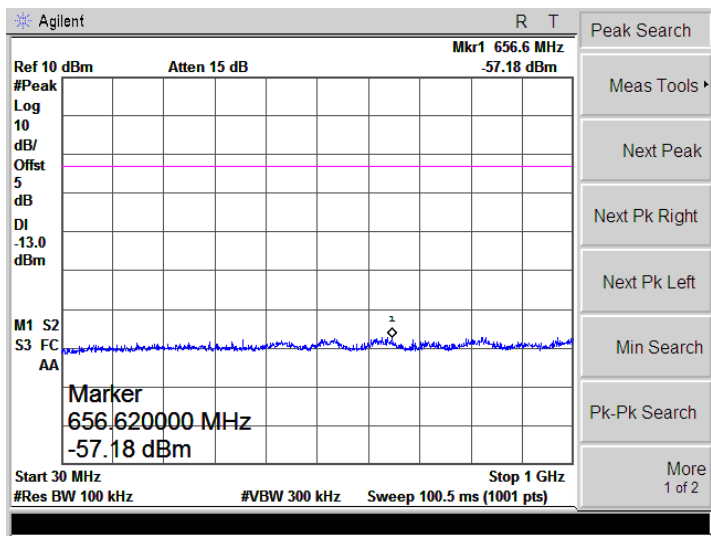


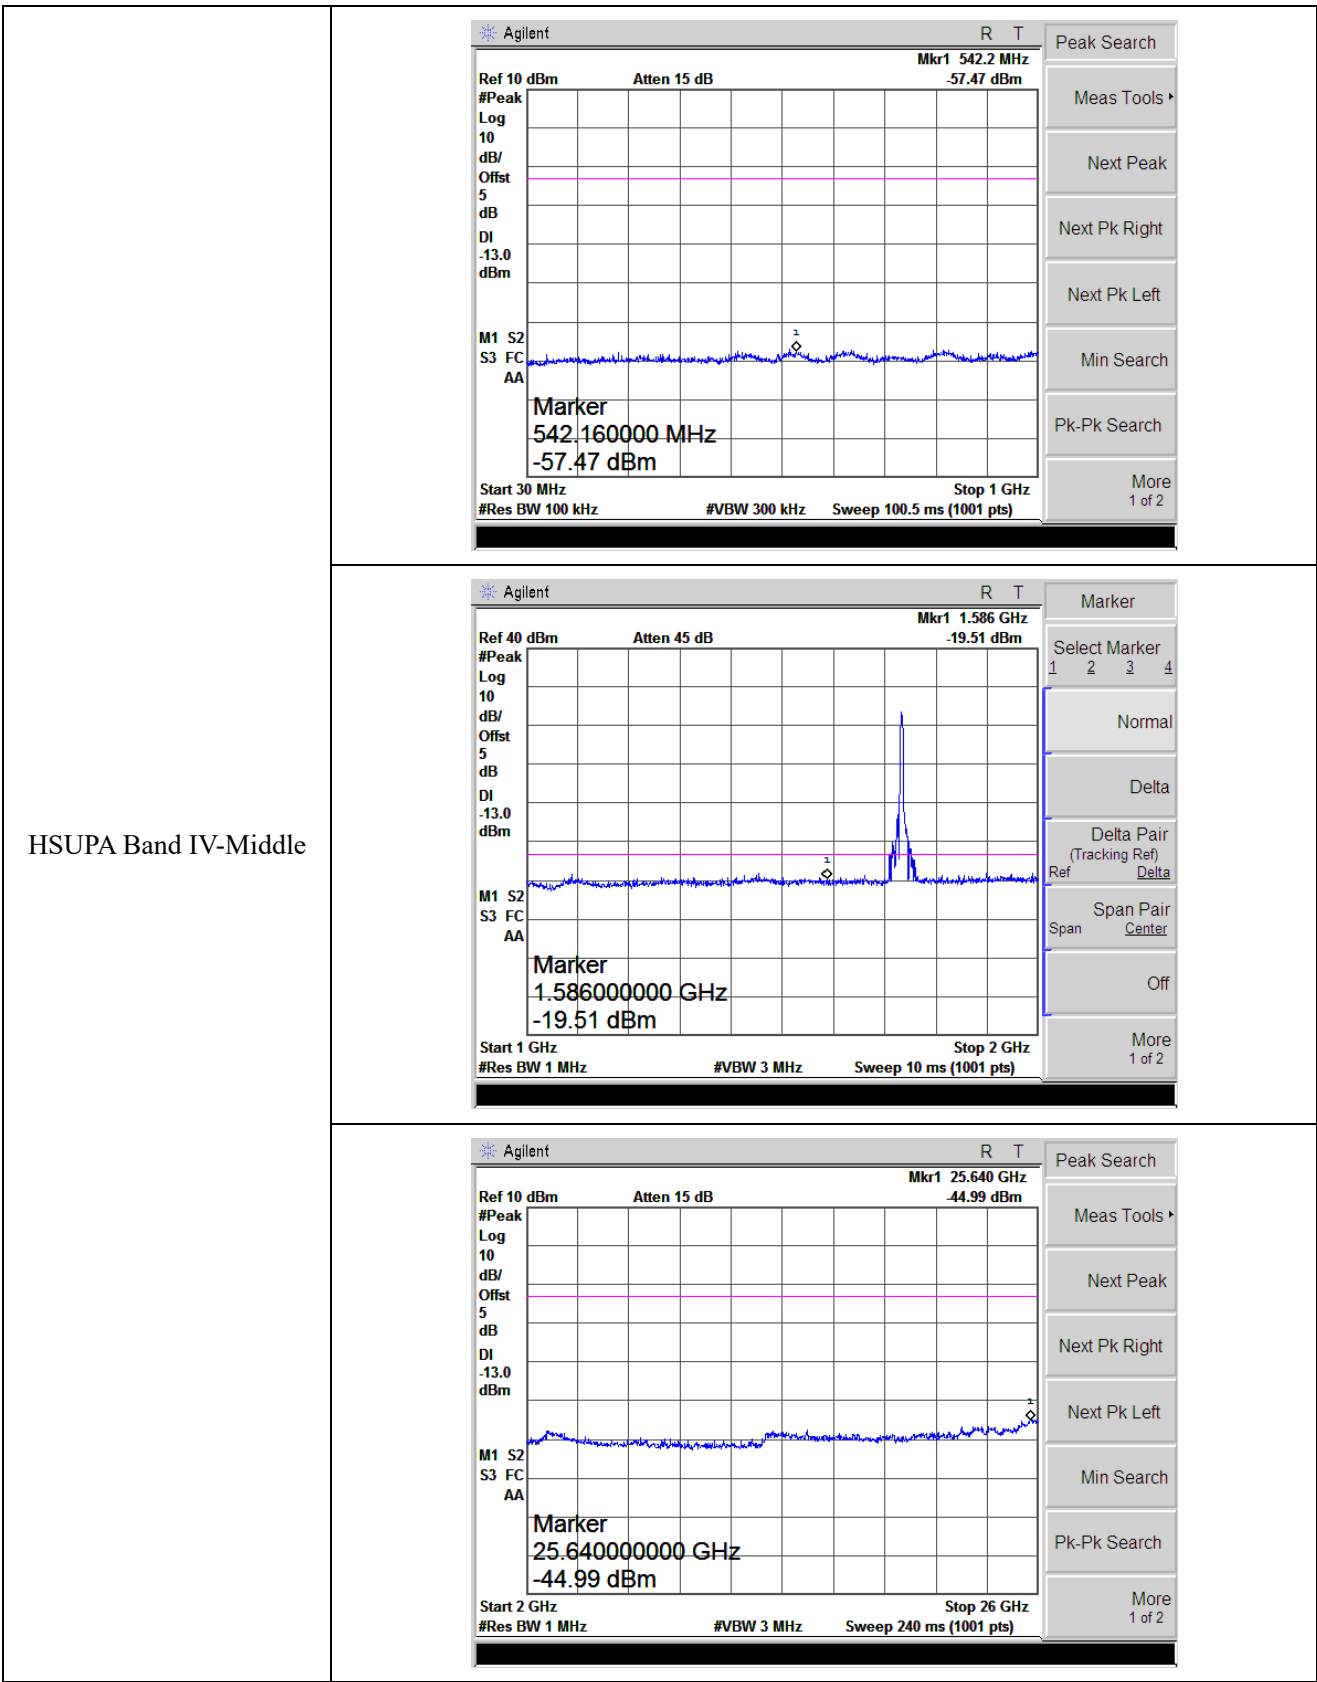




HSUPA Band IV-High

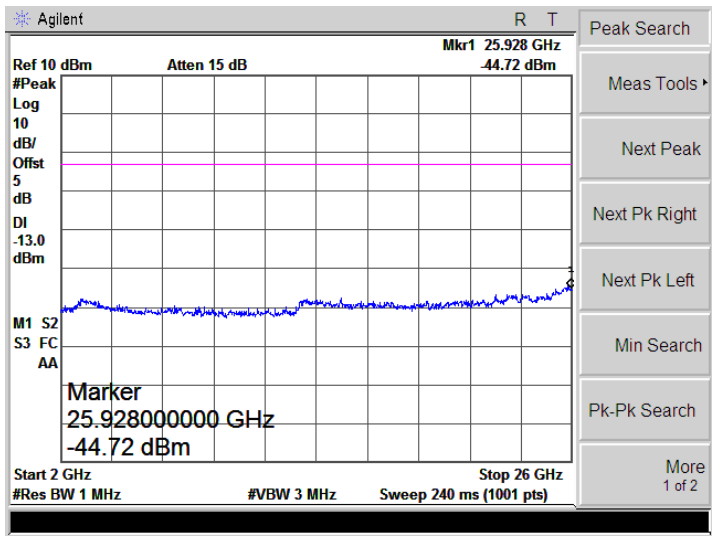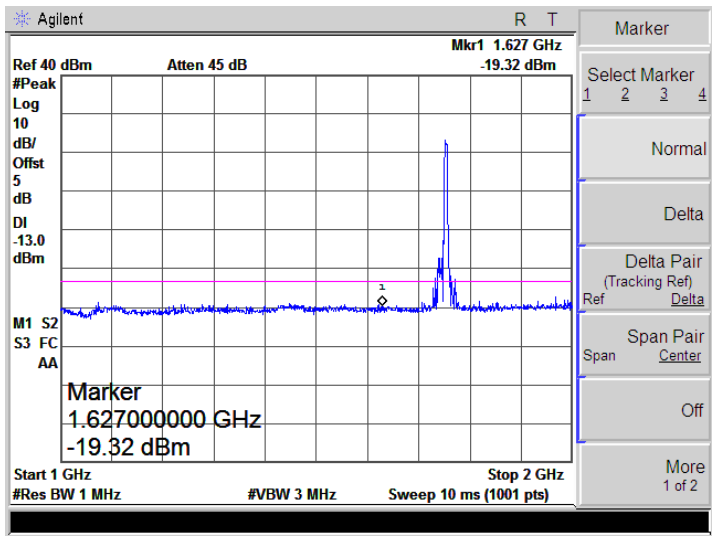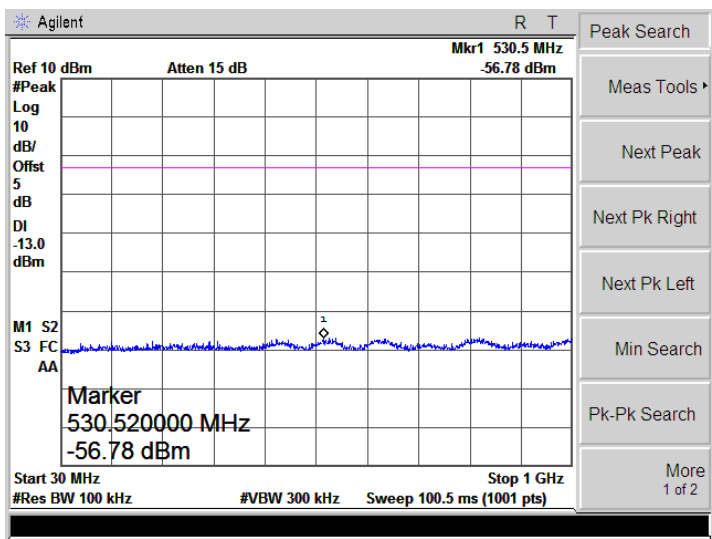




Bandedge

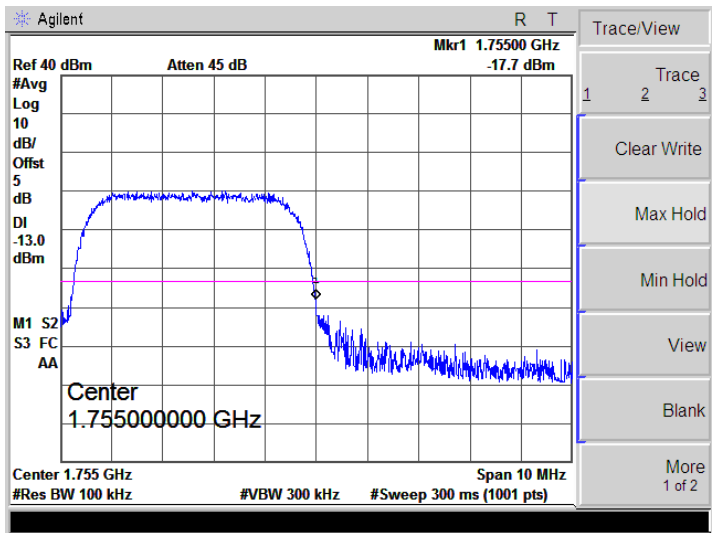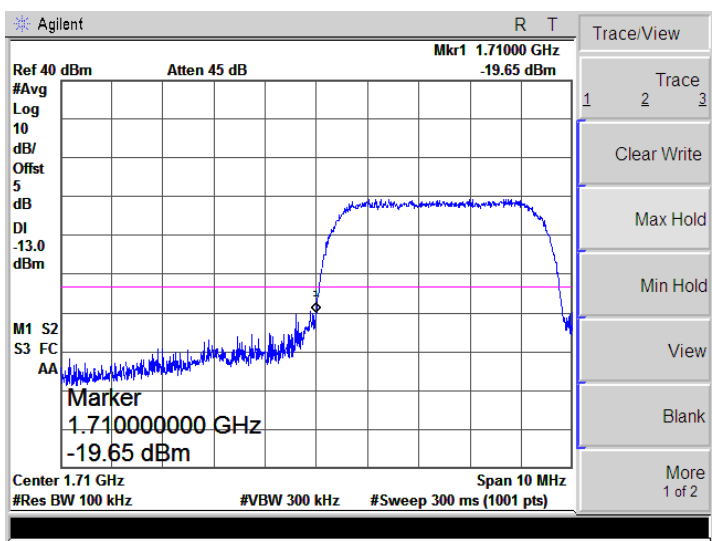




WCDMA Band II-Low

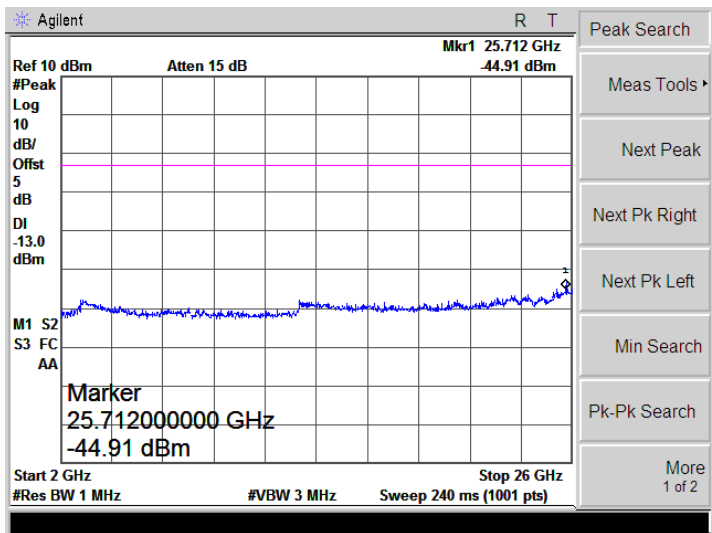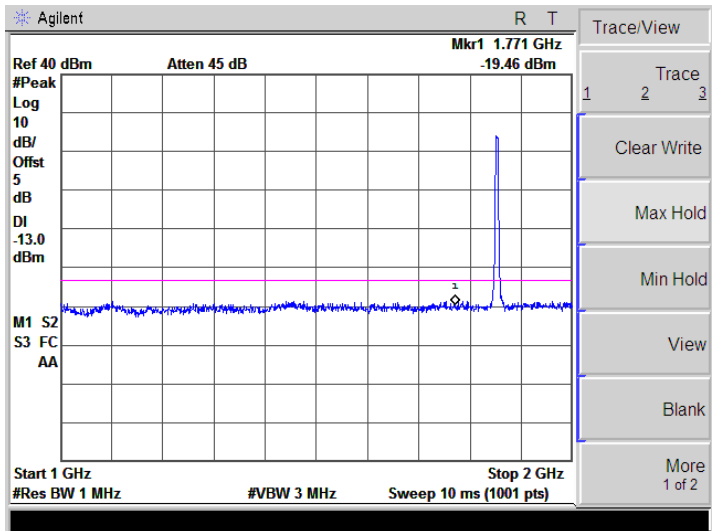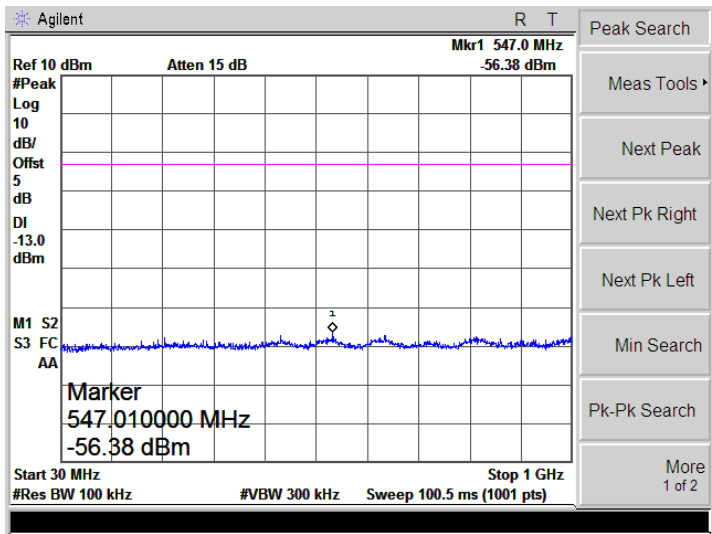



WCDMA Band II-Low

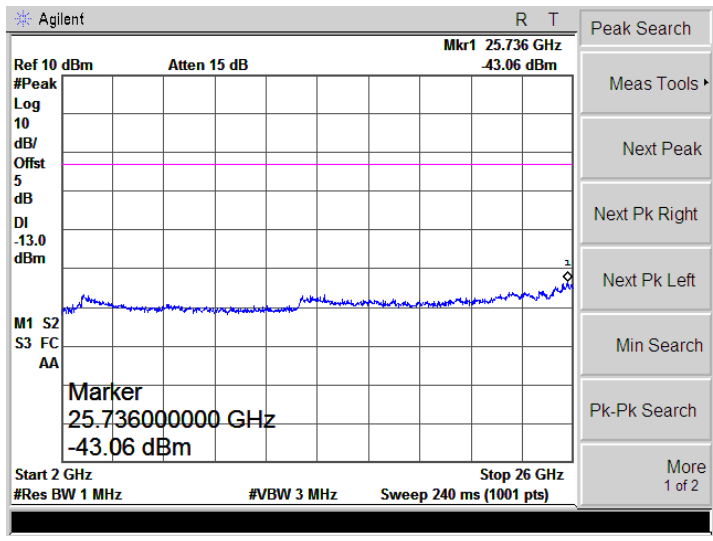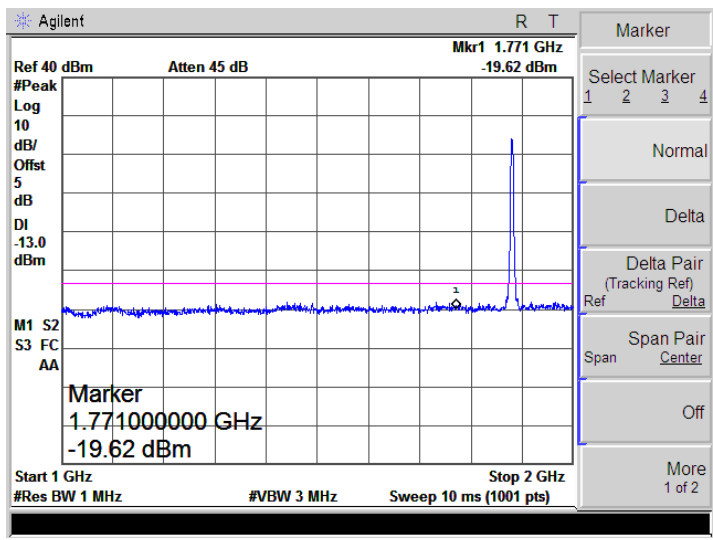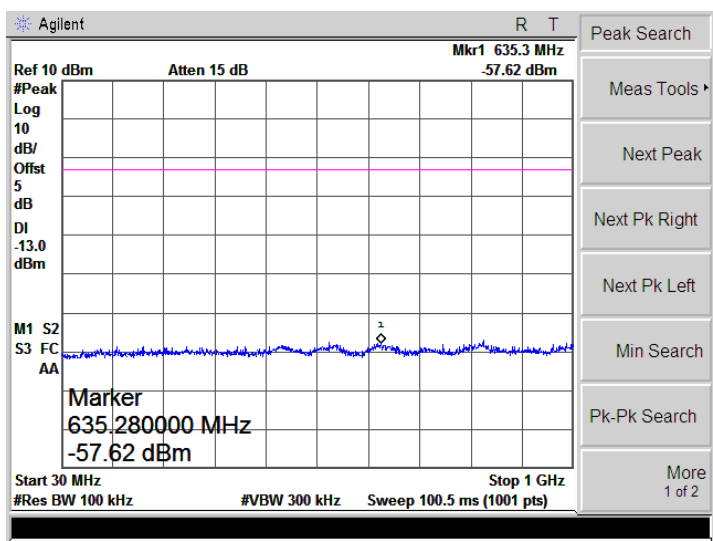




WCDMA Band II-Low

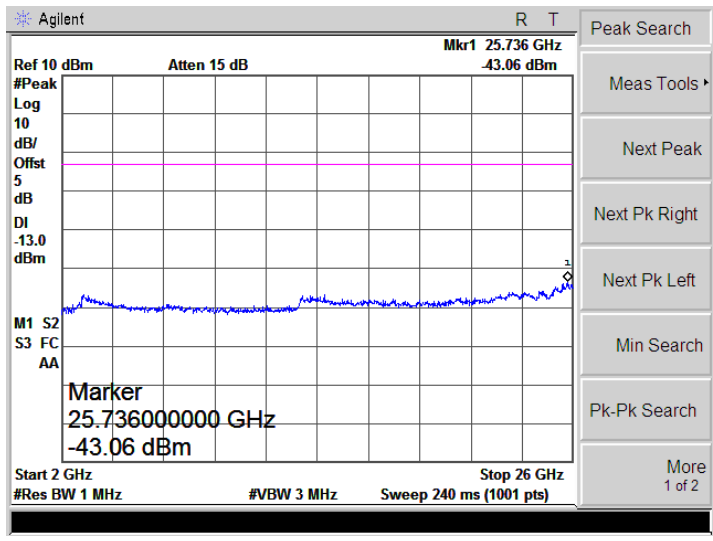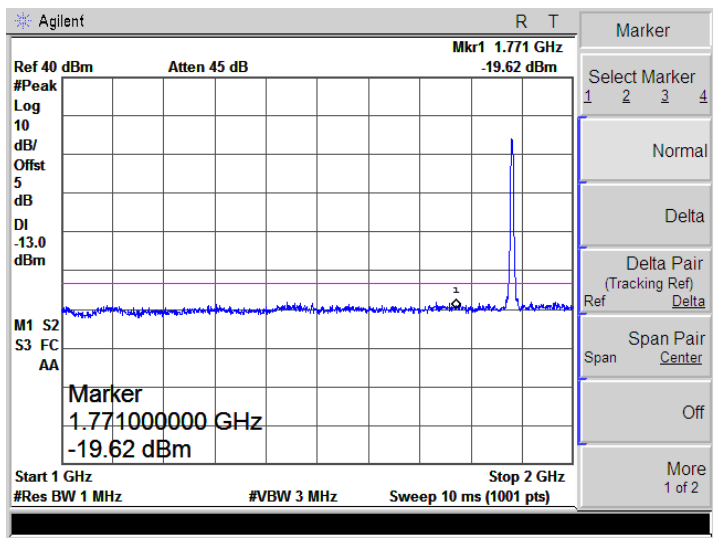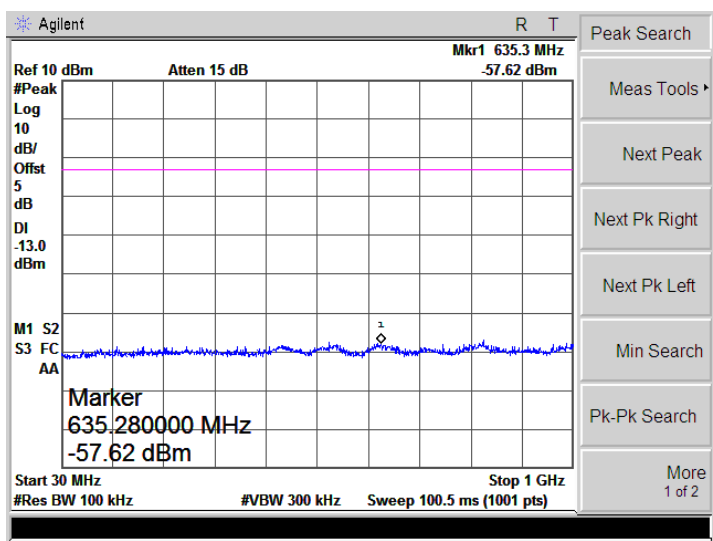




Bandedge

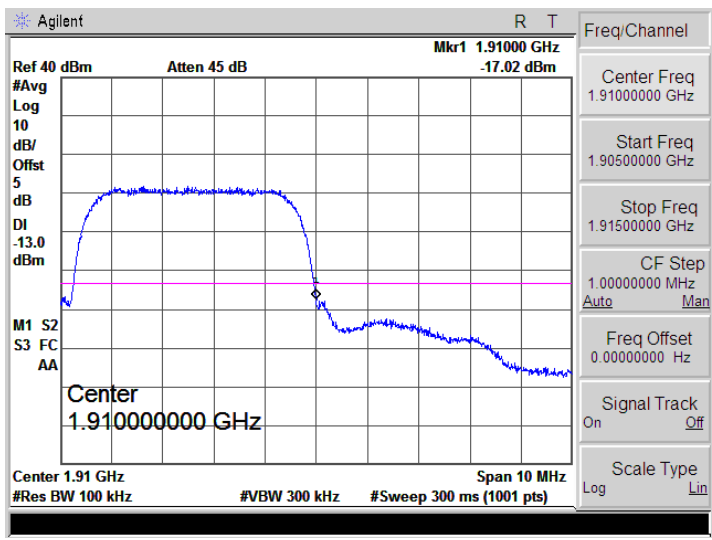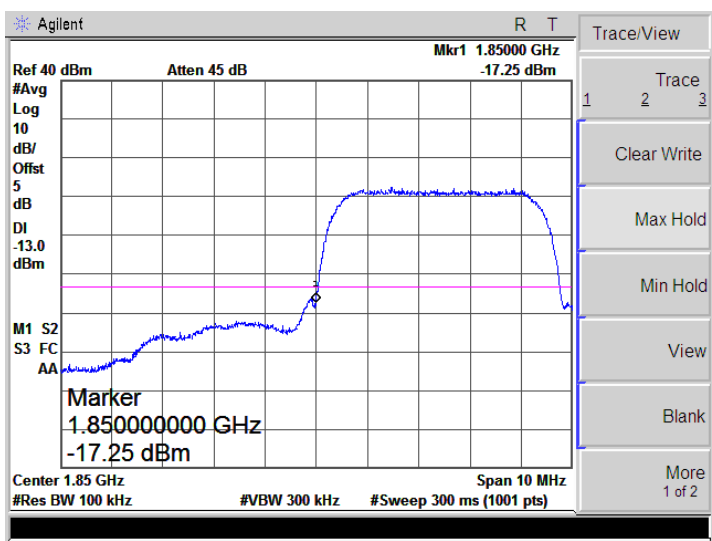




HSDPA Band II-Low

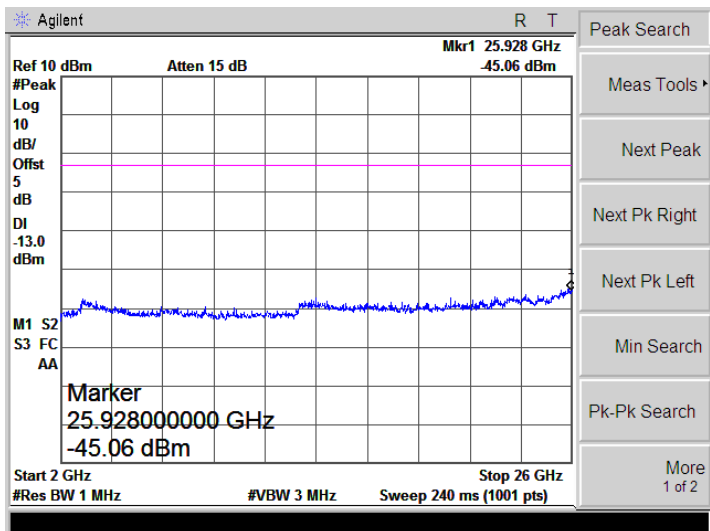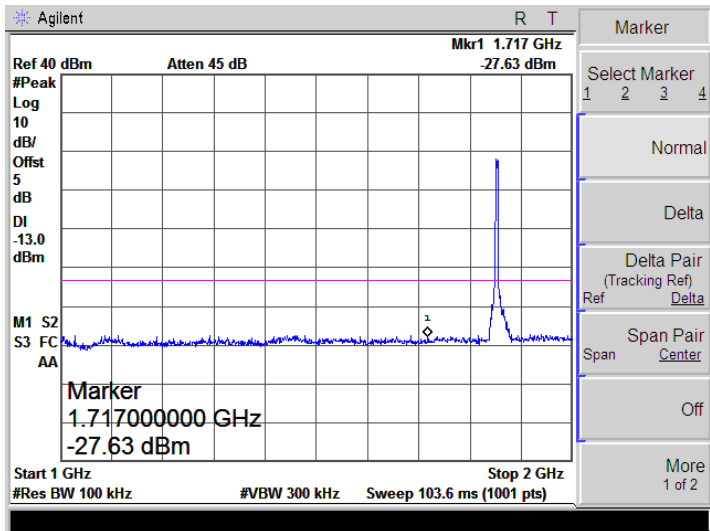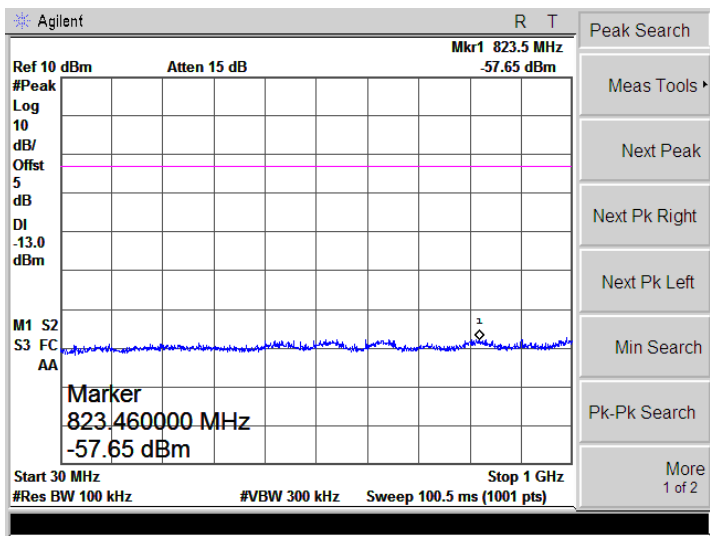



HSDPA Band II-Low

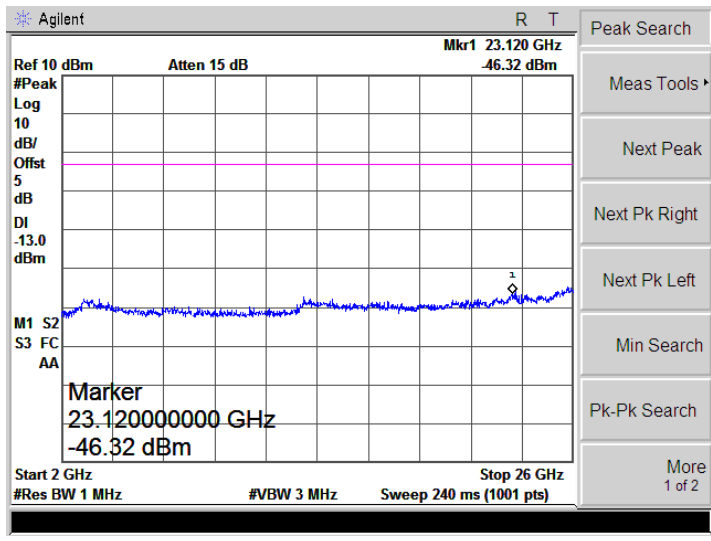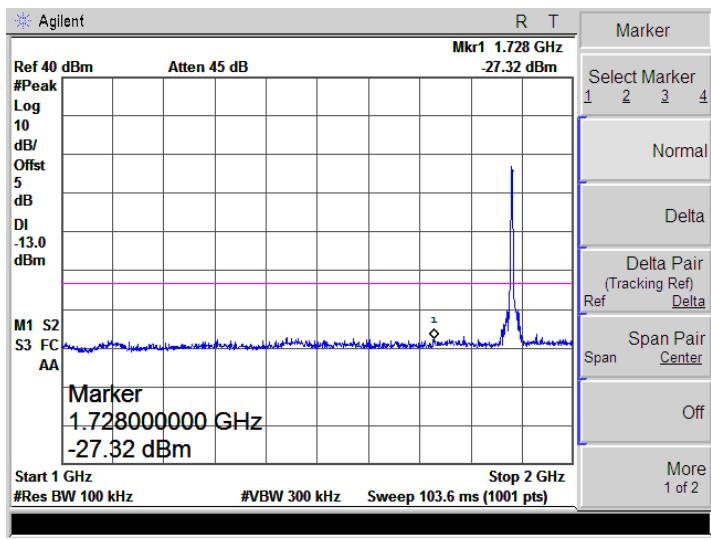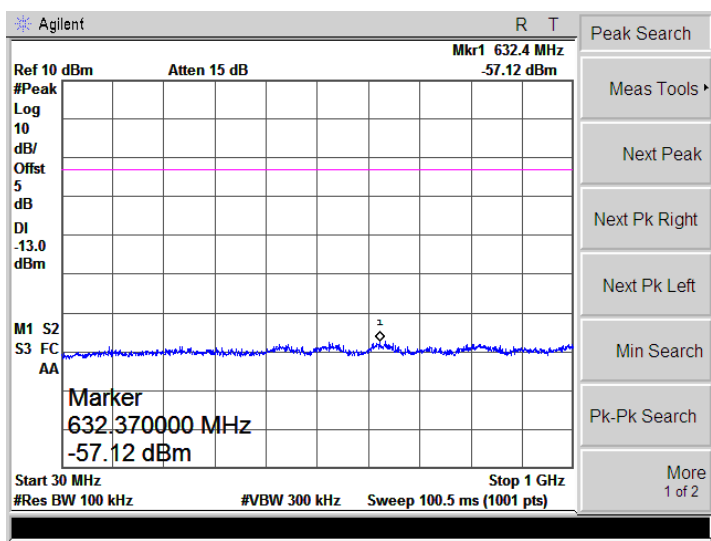




HSDPA Band II-Low

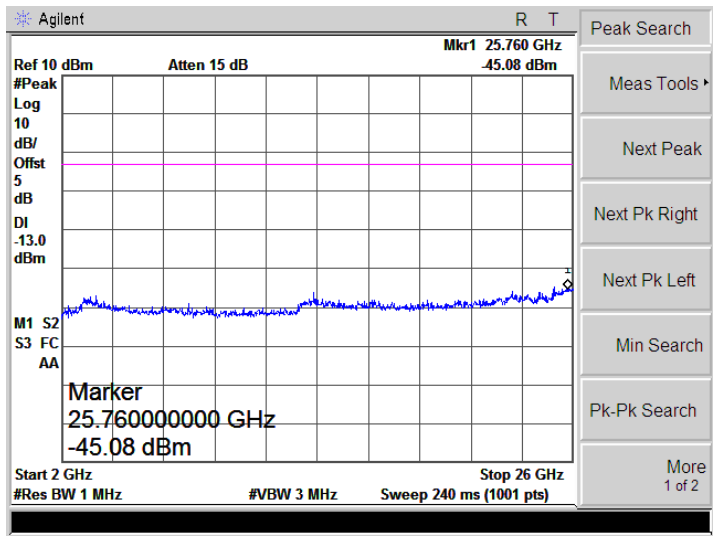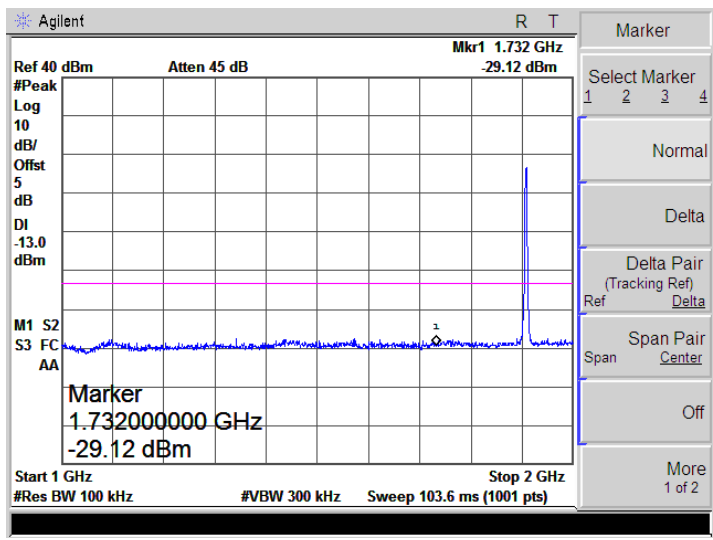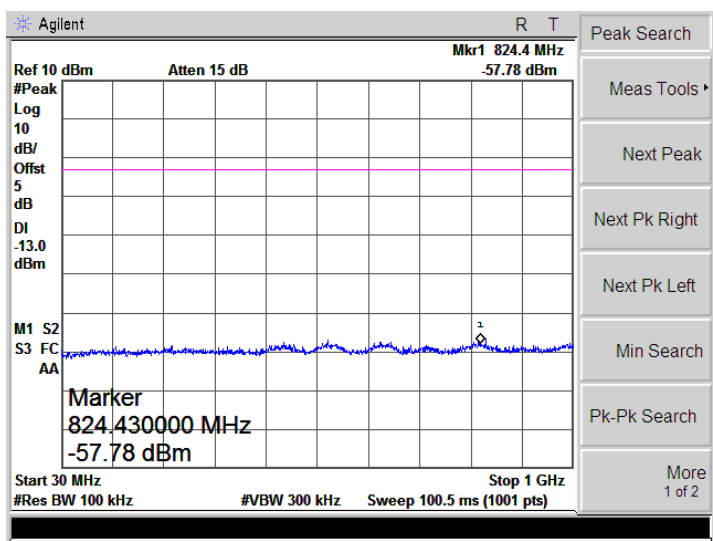




Bandedge

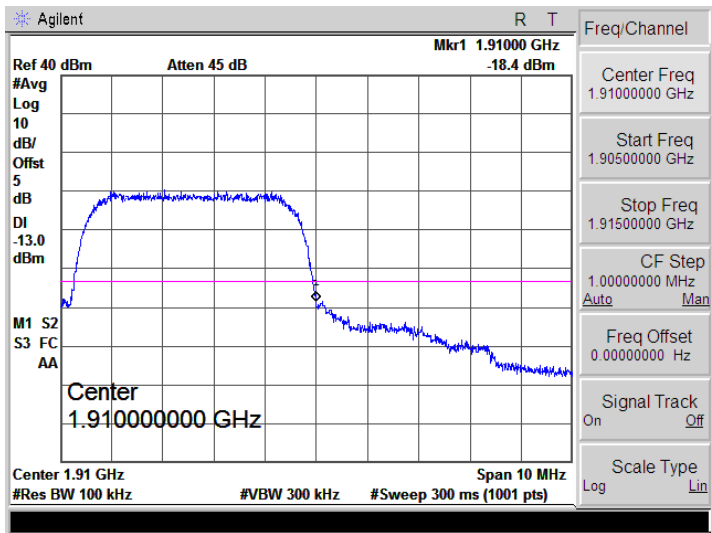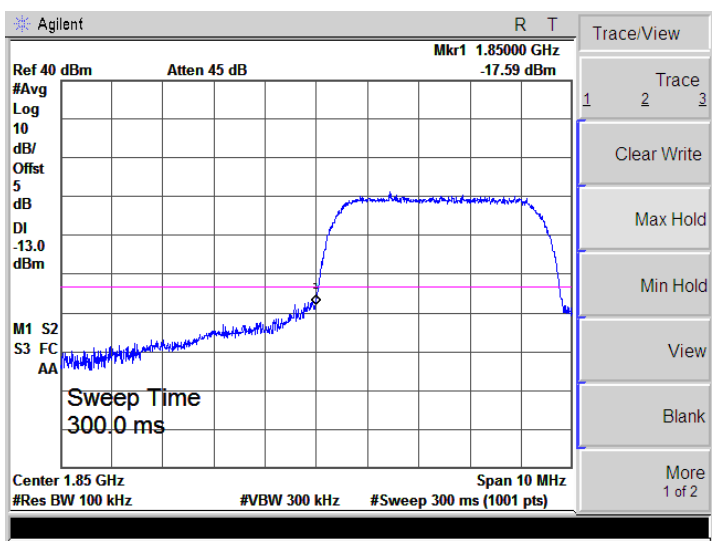




HSUPA Band II-Low

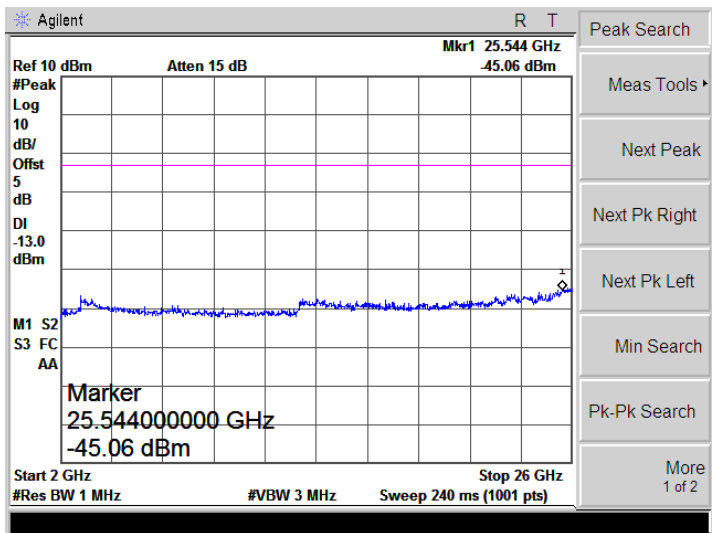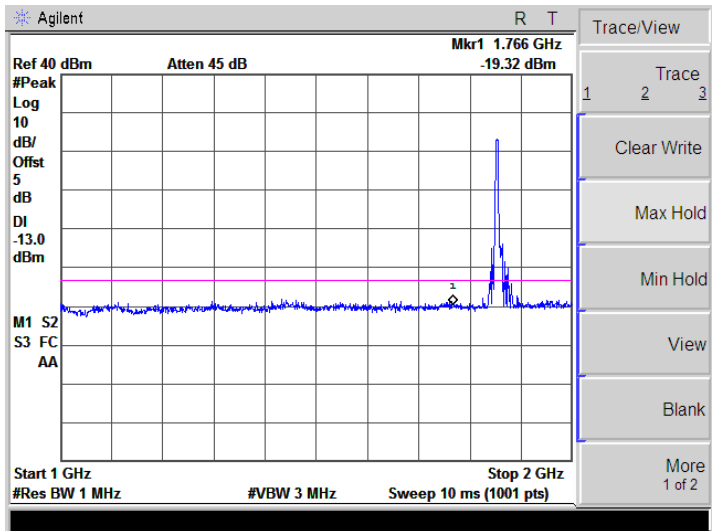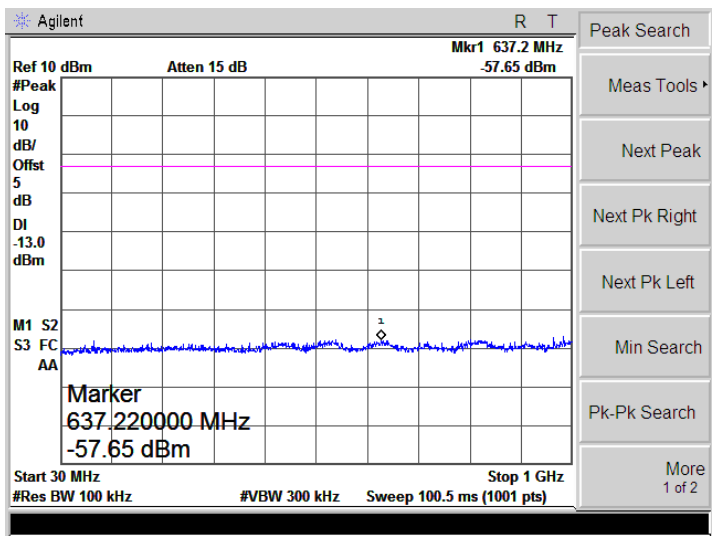



HSUPA Band II-Low

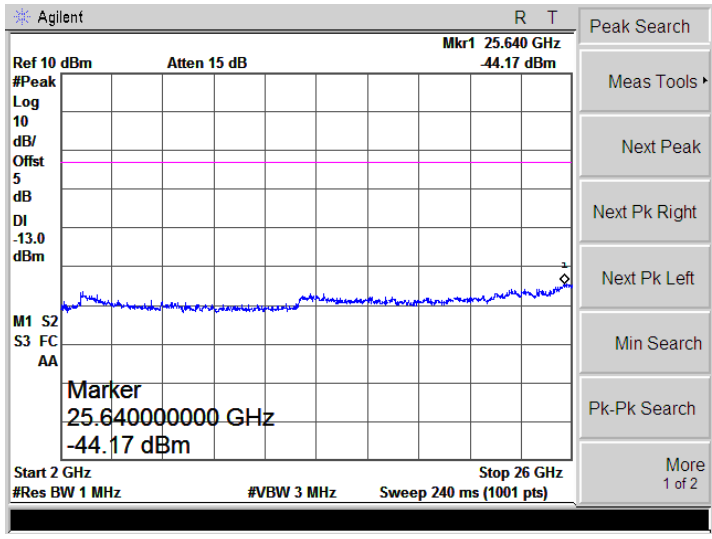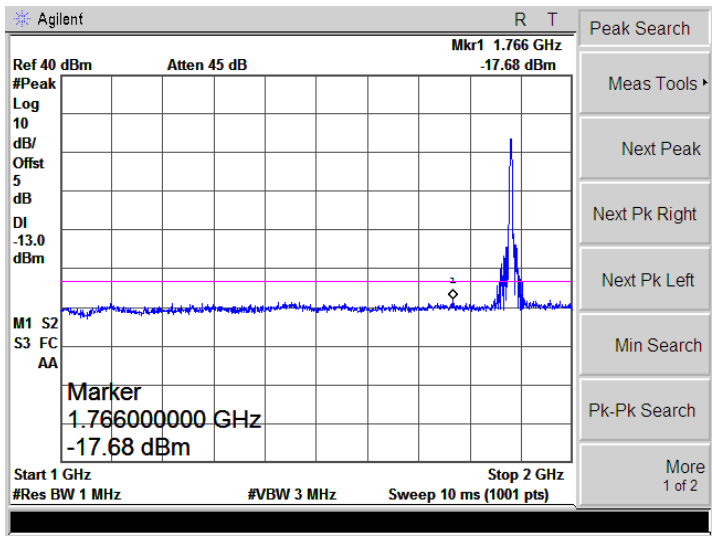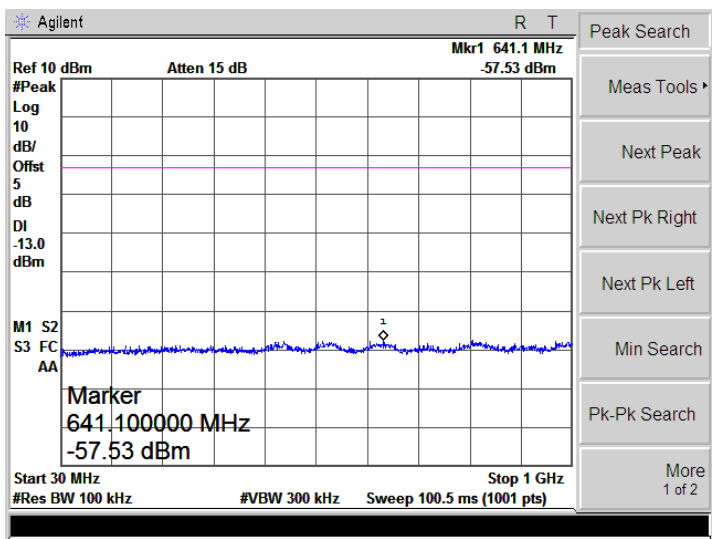

HSUPA Band II-Low

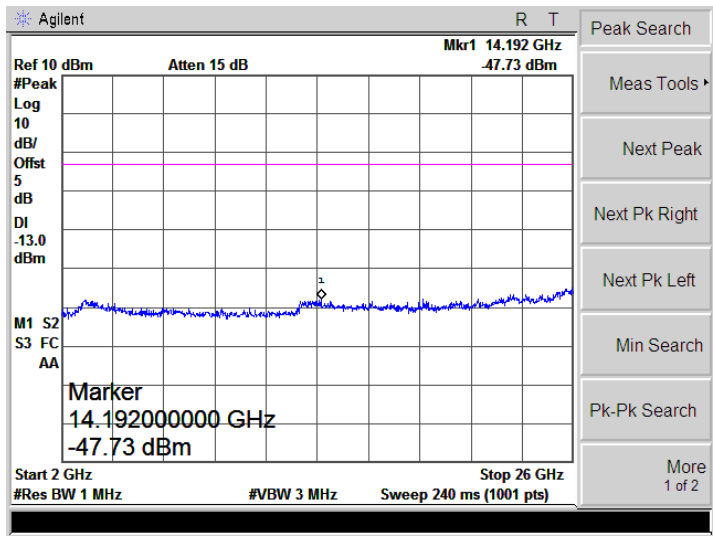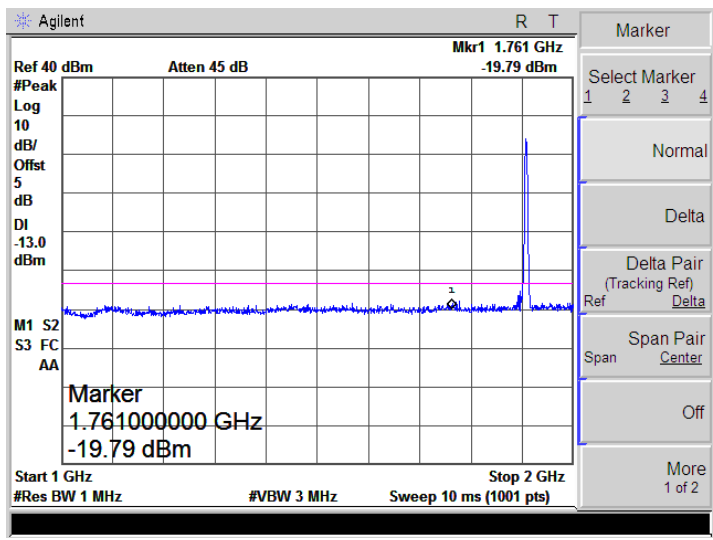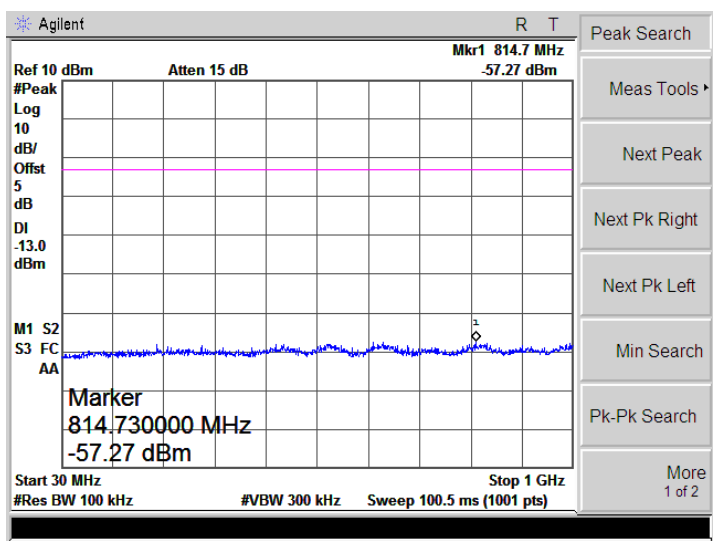

Bandedge

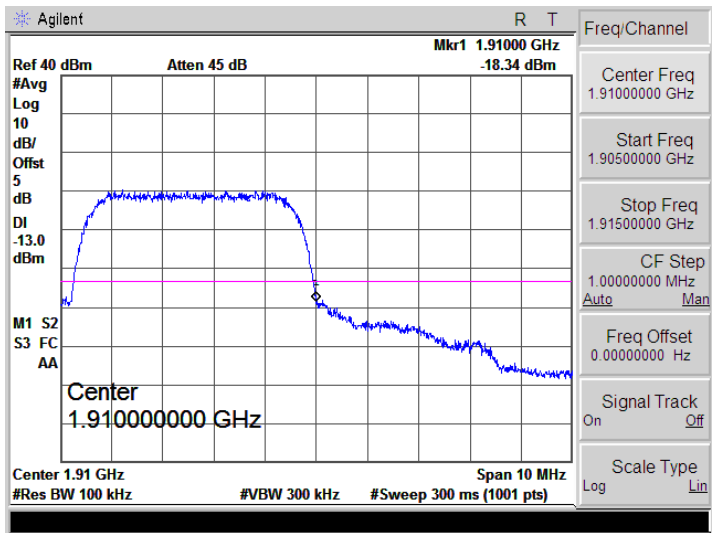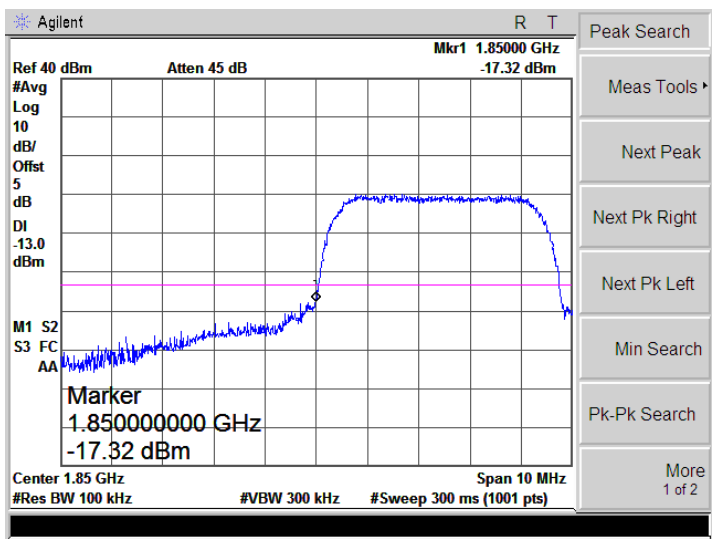

APPENDIX E

Frequency Stability

Note: 1. Worst case at GSM850/PCS1900/WCDMA B2/B4/B5 middle channel

2. Normal Voltage NV=DC3.7V; Low Voltage LV=DC3.5V; High Voltage HV=DC4.2V

➤ Frequency stability V.S. Temperature measurement

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	62	0.0736	2.50	Pass
	-20	52	0.0625		
	-10	41	0.0487		
	0	33	0.0395		
	10	29	0.0349		
	20	22	0.0267		
	30	30	0.0359		
	40	37	0.0441		
	50	45	0.0533		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	52	0.0278	2.50	Pass
	-20	48	0.0258		
	-10	38	0.0205		
	0	33	0.0176		
	10	26	0.0139		
	20	19	0.0102		
	30	24	0.0127		
	40	31	0.0164		
	50	36	0.0192		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	68	0.0809	2.50	Pass
	-20	56	0.0671		
	-10	47	0.0561		
	0	42	0.0497		
	10	38	0.0451		
	20	33	0.0395		
	30	39	0.0469		
	40	45	0.0533		
	50	49	0.0588		
Reference Frequency: WCDMA Band IV Middle channel=1412 channel=1733.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	69	0.0400	2.50	Pass
	-20	55	0.0320		
	-10	45	0.0258		
	0	38	0.0218		
	10	33	0.0191		
	20	27	0.0155		
	30	32	0.0186		
	40	39	0.0226		
	50	47	0.0271		

Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	72	0.0381	2.50	Pass
	-20	58	0.0311		
	-10	49	0.0262		
	0	42	0.0221		
	10	34	0.0180		
	20	29	0.0155		
	30	36	0.0192		
	40	41	0.0217		
	50	47	0.0250		


➤ Frequency stability V.S. Voltage measurement

Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	32	0.0377	2.50	Pass
	NV	25	0.0303		
	LV	33	0.0395		
Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	34	0.0180	2.50	Pass
	NV	24	0.0127		
	LV	30	0.0160		


Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	
		Hz	ppm	Result	
25	HV	25	0.0303	2.50	Pass
	NV	19	0.0230		
	LV	30	0.0359		
Reference Frequency: WCDMA Band IV Middle channel=1412 channel=1733.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	20	0.0115	2.50	Pass
	NV	15	0.0184		
	LV	26	0.0313		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	23	0.0123	2.50	Pass
	NV	18	0.0094		
	LV	27	0.0143		

APPENDIX F


Modulation characteristics



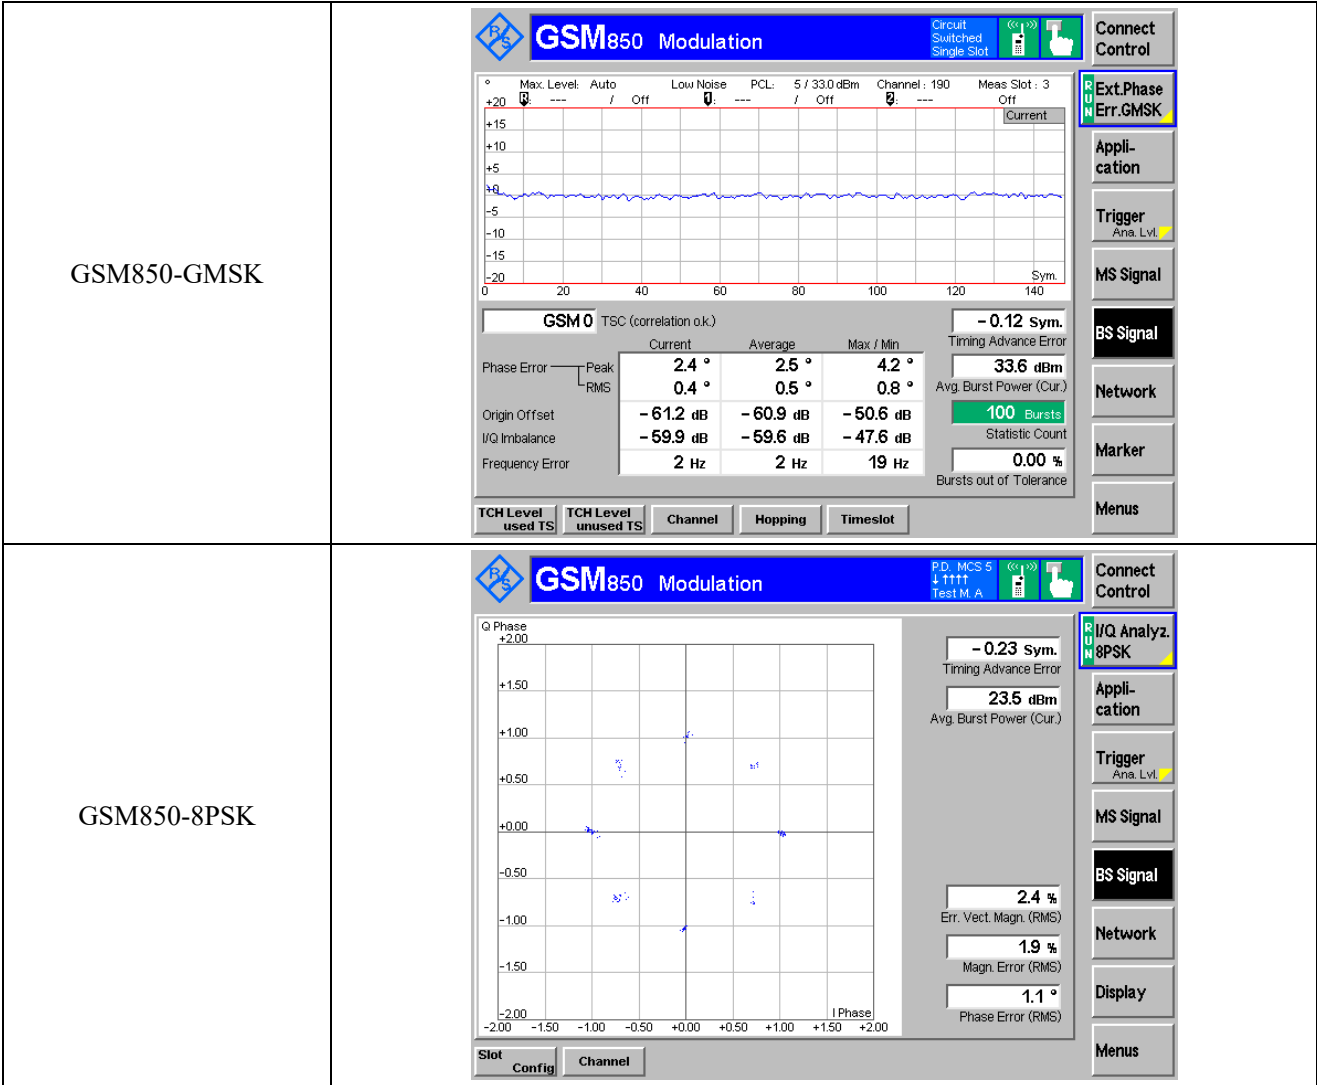


GSM1900-GMSK

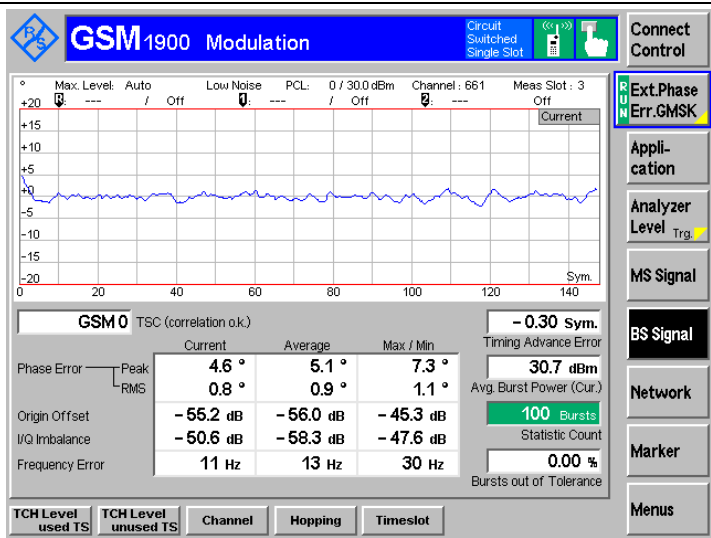

GSM1900-8PSK

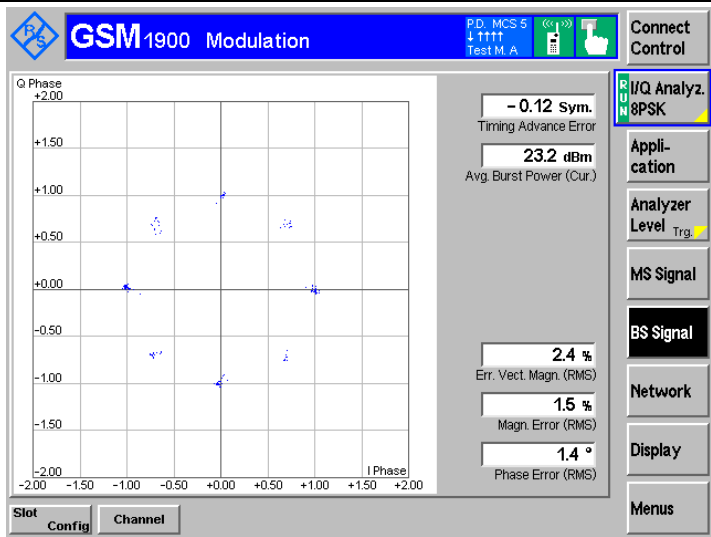

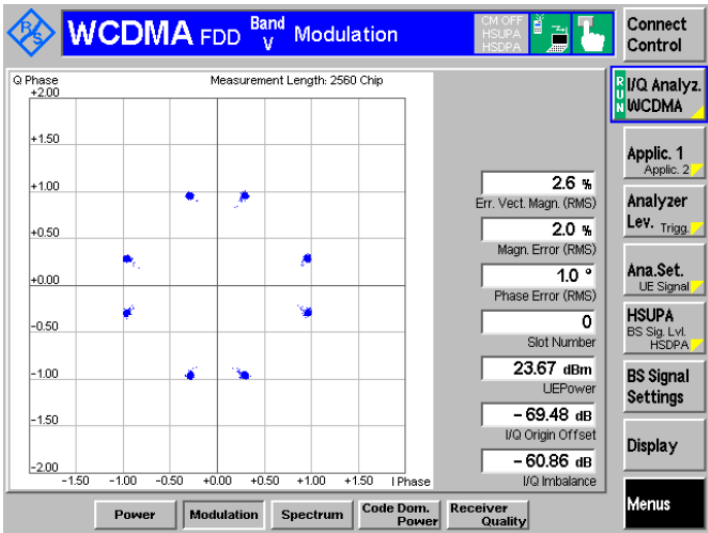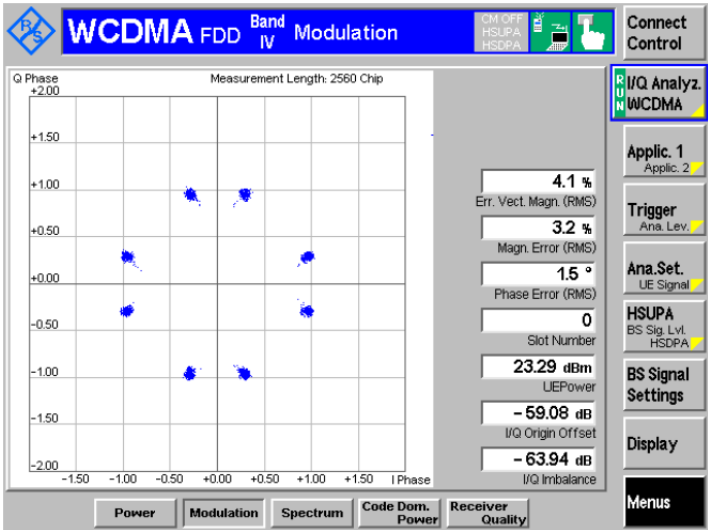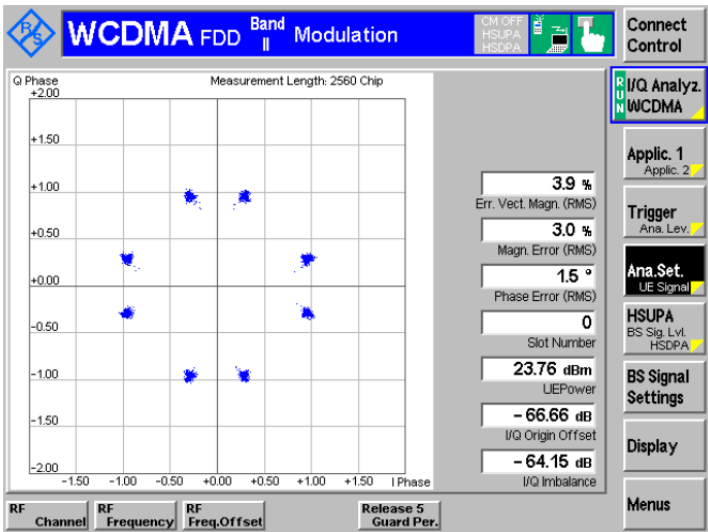WCDMA B5	
WCDMA B4	
WCDMA B2	

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****