



TEST REPORT

Applicant Name : JEM ACCESSORIES INC.
Address : 32 Brunswick Avenue Edison, NJ 08817, United States
Report Number : SZ3210913-47551E-RF-00A
FCC ID: 2AHAS-MLB71074

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: SMART RGBW LED Lamp with dual charging
Model No.: MLB7-1074
Multiple Model(s) No.: XLB7-1074 (Please refer to DOS for Model difference)
Trade Mark: 
Date Received: 2021/09/13
Date of Test: 2021/10/01~2021/11/09
Report Date: 2021/11/18

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Black Ding
EMC Engineer

Approved By:



Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "*". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
DUTY CYCLE	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §15.247 (I) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
FCC §15.203 - ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
TRANSD FACTOR & MARGIN CALCULATION.....	14
TEST DATA	14
FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
FACTOR & MARGIN CALCULATION	18
TEST DATA	18
FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24
FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	35
FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	37
APPLICABLE STANDARD	37

TEST PROCEDURE37

TEST DATA37

FCC §15.247(E) - POWER SPECTRAL DENSITY.....41

APPLICABLE STANDARD41

TEST PROCEDURE41

TEST DATA41

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	Wi-Fi: 2412-2472MHz
Maximum Conducted Peak Output Power	Wi-Fi: 802.11b: 18.65dBm, 802.11g: 18.26dBm, 802.11n-HT20: 18.29dBm
Modulation Technique	Wi-Fi: DSSS, OFDM
Antenna Specification*	Internal Antenna: 3.0dBi(provided by the applicant)
Voltage Range	DC 5V or 9V
Sample serial number	SZ3210913-47551E-RF-S1 for Conducted and Radiation Emissions SZ3210913-47551E-RF-S2 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, total 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 7 and 13.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PSD across all data rates, bandwidths and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“BK7231N-test_tool”* Software was used to test and power level is default.

802.11b: Data rate: 1 Mbps, power level: default*

802.11g: Data rate: 6 Mbps, power level: default*

802.11n-HT20: Data rate: MCS0, power level: default*

Duty cycle

Test Result: Compliant. Please refer to the Appendix Wi-Fi.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
HD	Wireless load	E237212	1752
Unknown	Load	10W	Unknown
HUAWEI	Adapter	XY30W-1396-C+AY	XY0003


External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Un-Detachable AC Cable	1.2	LISN	Receptacle
Un-shielding Detachable USB Cable	1.0	Adapter	EUT
Un-shielding Un-Detachable USB Cable	0.5	EUT	Load

Block Diagram of Test Setup

For conducted emission:

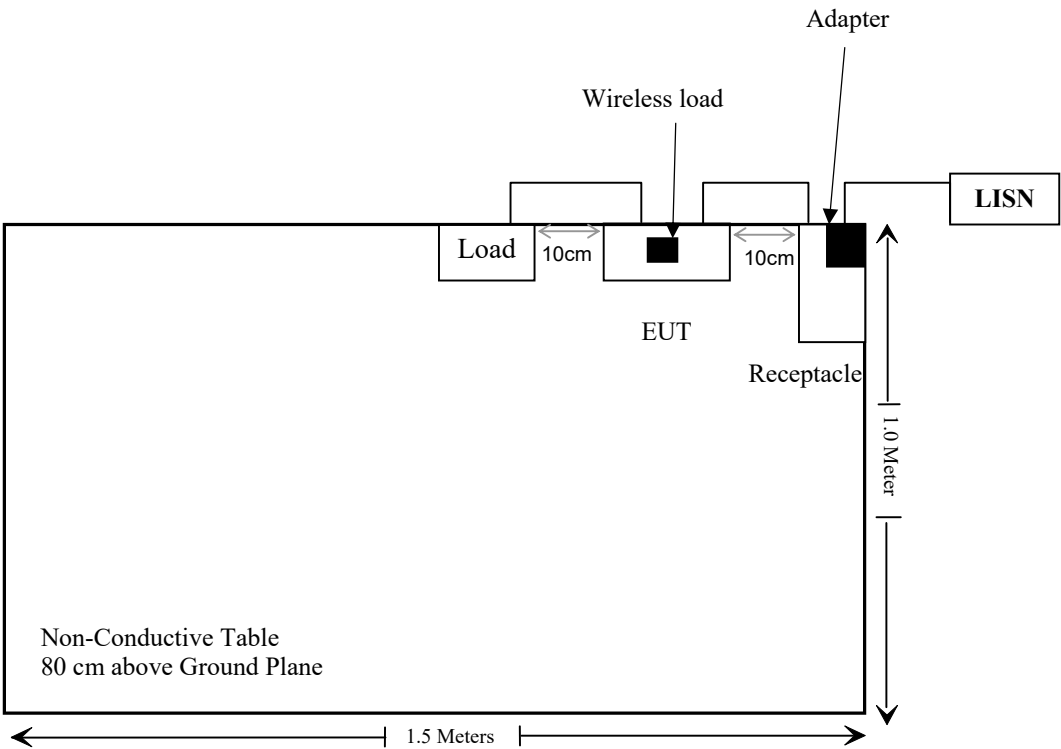

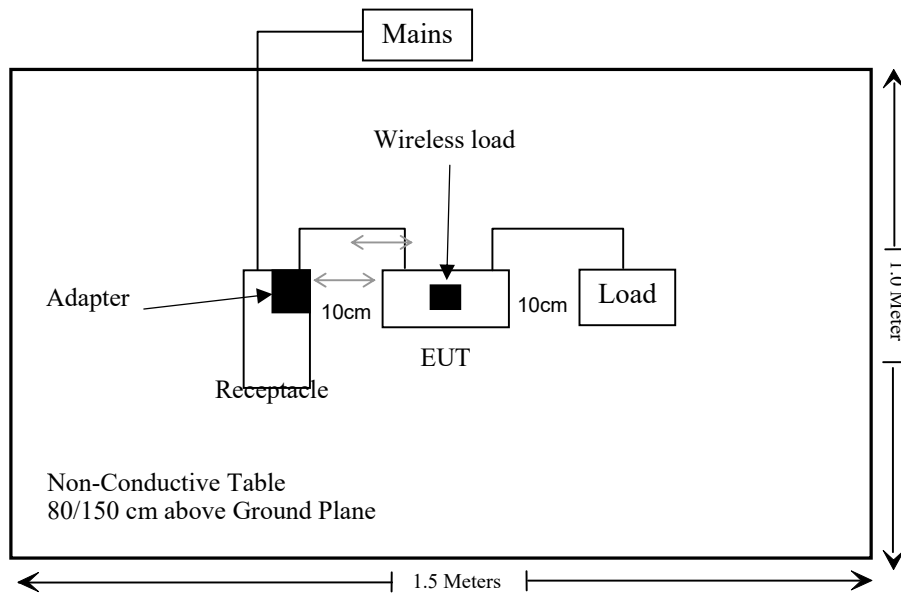For Radiated Emission

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

Note: The device can support different input and output, the worst case is input 9V/3A, output 10Watts which was recorded in the report.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	Test Receiver	ESPI3	100396	2020/12/24	2021/12/23
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50ΩCoaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Conducted Emission Test Software: ES-K1 V1.71					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2020/11/28	2021/11/27
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Radiated Emission Test Software: EZ EMC V 1.1.4.2 & e3 19821b (V9)					
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-10m	No.7	2021/11/09	2022/11/08
Unknown	RF Coaxial Cable	N-2m	No.8	2021/11/09	2022/11/08
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2020/12/25	2021/12/24
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2020/12/24	2021/12/23
WEINSCHL	10dB Attenuator	5324	AU 3842	2020/12/25	2021/12/24

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2472	3.0	2.0	19.0	79.43	20	0.032	1

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 3.0dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

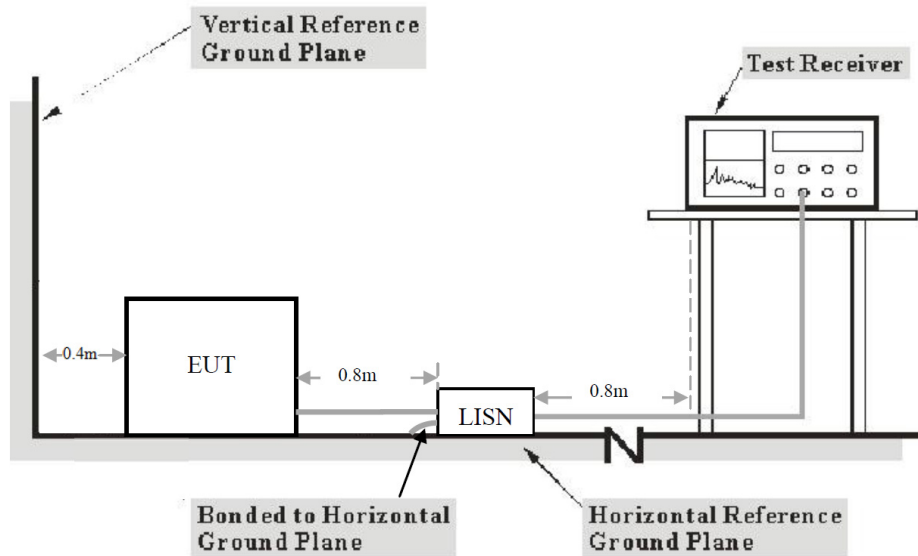

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{level}$$

$$\text{Level} = \text{Reading level} + \text{Transd Factor}$$

Test Data

Environmental Conditions


Temperature:	25.6°C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Fan Yang on 2021-10-01.

EUT operation mode: Transmitting

Wi-Fi: (Worst case is 802.11B mode, low Channel)

AC 120V/60 Hz, Line

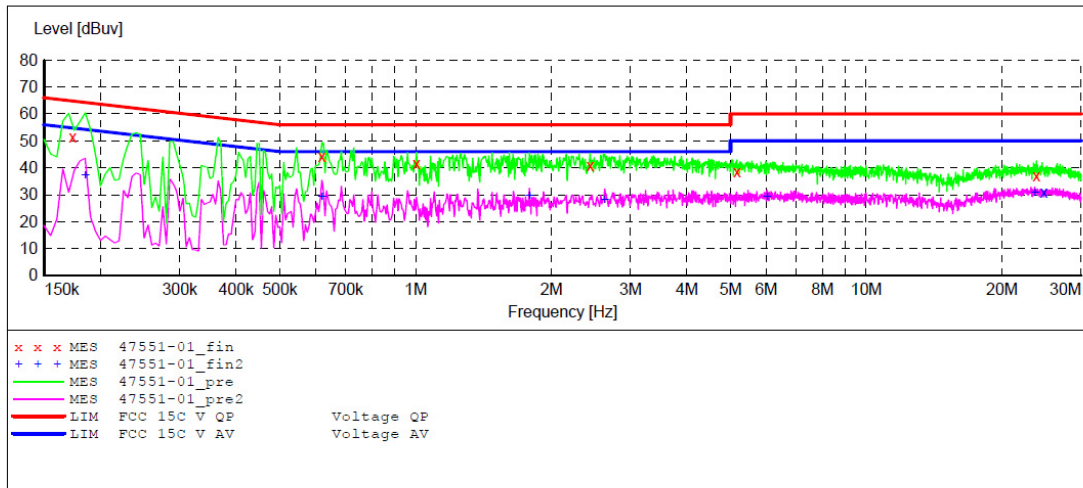

MEASUREMENT RESULT: "47551-01_fin"


2021-10-1 11:40

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.185000	51.80	10.8	64	12.2	QP	L1	GND
0.620000	44.10	11.0	56	11.9	QP	L1	GND
1.005000	41.50	11.1	56	14.5	QP	L1	GND
2.440000	40.70	11.3	56	15.3	QP	L1	GND
5.170000	38.40	11.4	60	21.6	QP	L1	GND
23.875000	36.90	11.7	60	23.1	QP	L1	GND

MEASUREMENT RESULT: "47551-01_fin2"

2021-10-1 11:40

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.185000	37.00	10.8	54	17.0	AV	L1	GND
0.620000	29.50	11.0	46	16.5	AV	L1	GND
1.790000	29.70	11.2	46	16.3	AV	L1	GND
2.630000	28.30	11.3	46	17.7	AV	L1	GND
6.030000	29.40	11.5	50	20.6	AV	L1	GND
23.675000	31.00	11.7	50	19.0	AV	L1	GND

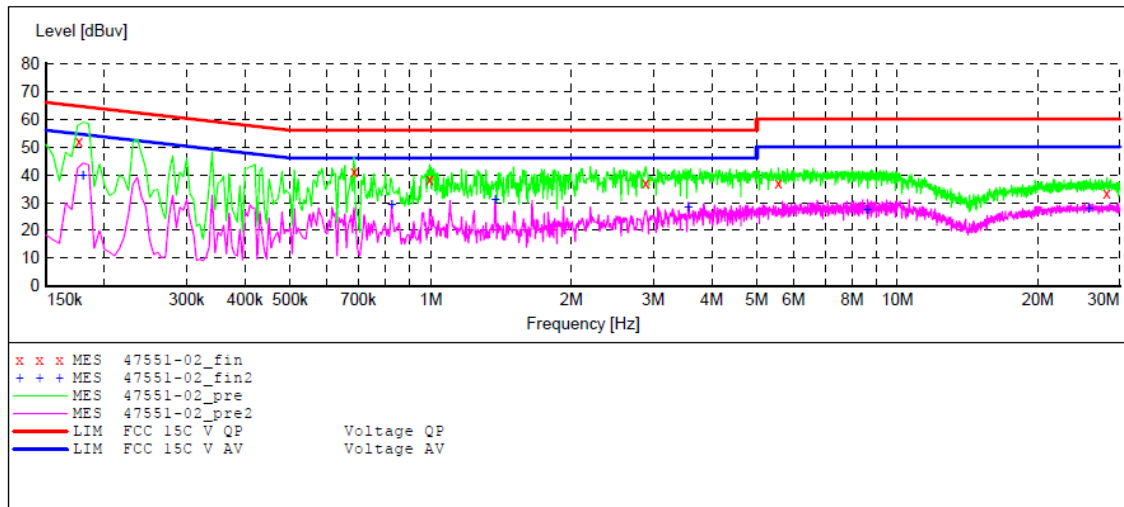AC 120V/60 Hz, Neutral**MEASUREMENT RESULT: "47551-02_fin"**

2021-10-1 11:42

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.180000	52.50	10.8	65	12.5	QP	N	GND
0.685000	41.20	11.1	56	14.8	QP	N	GND
0.995000	38.20	11.1	56	17.8	QP	N	GND
2.890000	36.90	11.3	56	19.1	QP	N	GND
5.560000	36.90	11.5	60	23.1	QP	N	GND
28.150000	33.50	11.8	60	26.5	QP	N	GND

MEASUREMENT RESULT: "47551-02_fin2"

2021-10-1 11:42

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.180000	39.10	10.8	55	15.9	AV	N	GND
0.825000	29.30	11.1	46	16.7	AV	N	GND
1.375000	31.20	11.2	46	14.8	AV	N	GND
3.570000	28.50	11.4	46	17.5	AV	N	GND
8.640000	27.60	11.5	50	22.4	AV	N	GND
25.750000	27.90	11.7	50	22.1	AV	N	GND


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

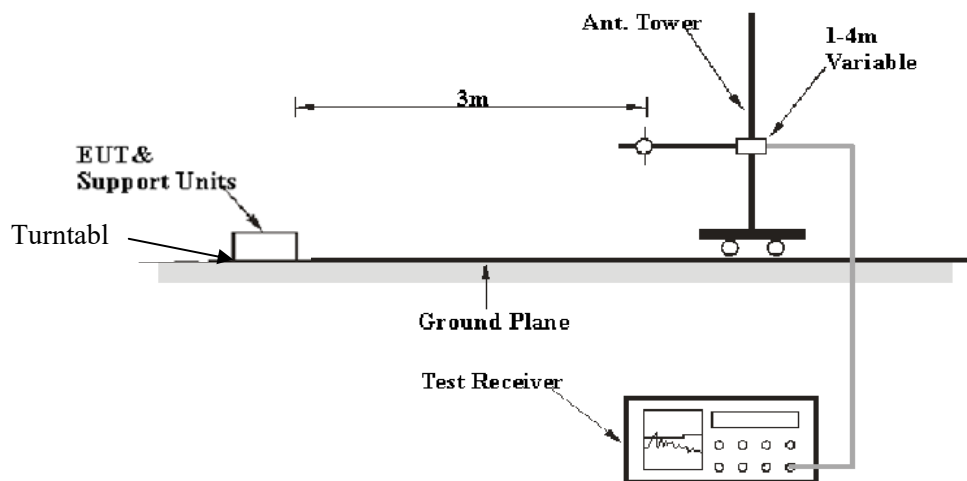

Above 1GHz:

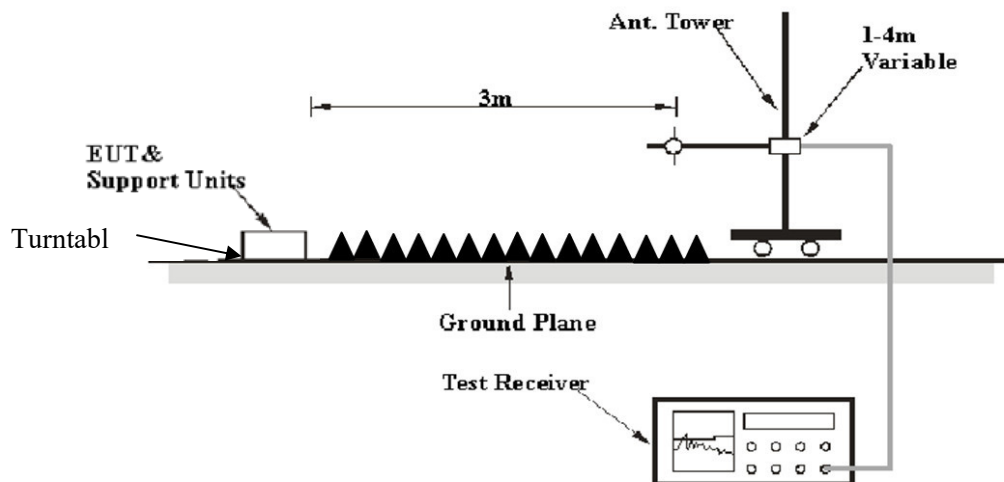

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin} &= \text{Result} / \text{Absolute Level} - \text{Limit} \\ \text{Result} / \text{Absolute Level} &= \text{Reading} + \text{Factor} \end{aligned}$$



Test Data

Environmental Conditions

Temperature:	23~25 °C
Relative Humidity:	48~50 %
ATM Pressure:	101.0~103 kPa

The testing was performed by Chao Mo on 2021-10-02 for below 1GHz and 2021-11-09 for above 1GHz.

Test mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case Y-axis of orientation was recorded)

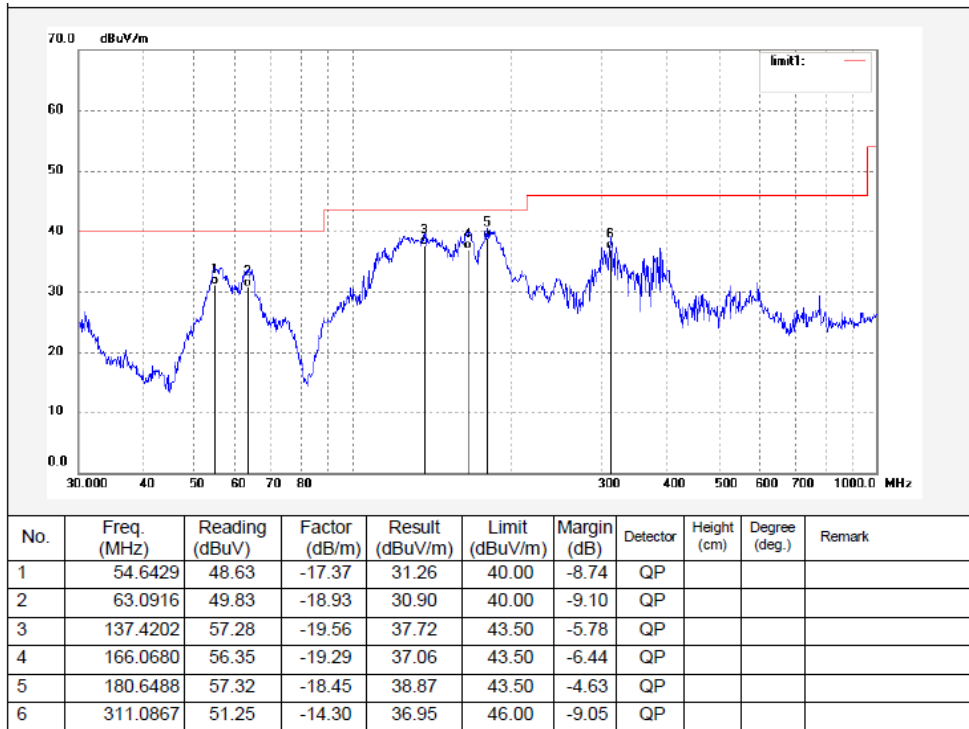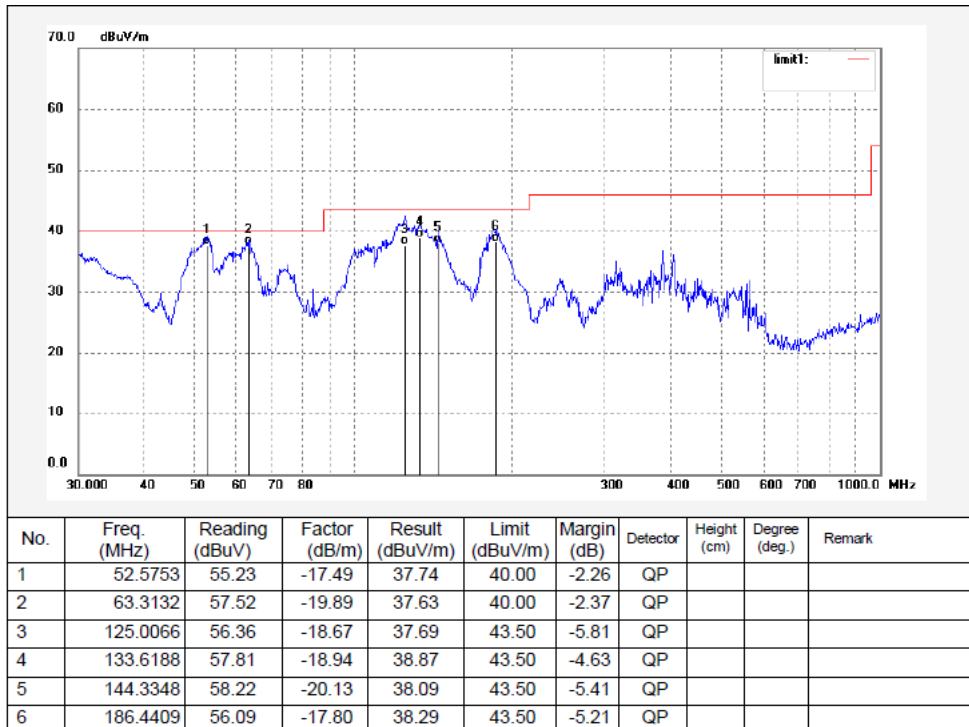30MHz-1GHz: (Worst case is 802.11B mode, low Channel)
Horizontal**Vertical**

1-25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
802.11B, Low Channel									
2310	46.69	PK	51	1.9	H	-6.84	39.85	74	34.15
2310	46.28	PK	338	1.3	V	-6.84	39.44	74	34.56
2390	72.96	PK	231	2.1	H	-6.44	66.52	74	7.48
2390	44.14	AV	231	2.1	H	-6.44	37.7	54	16.3
2390	71.59	PK	2	2.0	V	-6.44	65.15	74	8.85
2390	43.93	AV	2	2.0	V	-6.44	37.49	54	16.51
4824	48.08	PK	84	2.0	H	2.87	50.95	74	23.05
4824	47.62	PK	55	1.0	V	2.87	50.49	74	23.51
802.11B, Middle Channel									
4884	46.76	PK	308	2.1	H	3.01	49.77	74	24.23
4884	46.88	PK	12	1.7	V	3.01	49.89	74	24.11
11B, High Channel									
2483.5	45.28	PK	273	1.7	H	-5.96	39.32	74	34.68
2483.5	46.5	PK	247	1.2	V	-5.96	40.54	74	33.46
2500	71.21	PK	32	1.3	H	-5.88	65.33	74	8.67
2500	43	AV	32	1.3	H	-5.88	37.12	54	16.88
2500	71.46	PK	134	1.3	V	-5.88	65.58	74	8.42
2500	43.91	AV	134	1.3	V	-5.88	38.03	54	15.97
4944	46.7	PK	341	2.0	H	3.17	49.87	74	24.13
4944	47.27	PK	25	1.6	V	3.17	50.44	74	23.56
802.11G, Low Channel									
2310	47.2	PK	41	1.8	H	-6.84	40.36	74	33.64
2310	46.61	PK	103	2.1	V	-6.84	39.77	74	34.23
2390	71.99	PK	205	1.4	H	-6.44	65.55	74	8.45
2390	44	AV	205	1.4	H	-6.44	37.56	54	16.44
2390	72.46	PK	127	1.6	V	-6.44	66.02	74	7.98
2390	44.05	AV	127	1.6	V	-6.44	37.61	54	16.39
4824	47.26	PK	162	1.1	H	2.87	50.13	74	23.87
4824	47	PK	92	1.9	V	2.87	49.87	74	24.13
802.11G, Middle Channel									
4884	47.01	PK	53	1.2	H	3.01	50.02	74	23.98
4884	46.6	PK	229	2.0	V	3.01	49.61	74	24.39

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
802.11G, High Channel									
2483.5	46.08	PK	237	1.3	H	-5.96	40.12	74	33.88
2483.5	45.38	PK	251	2.1	V	-5.96	39.42	74	34.58
2500	70.42	PK	95	2.0	H	-5.88	64.54	74	9.46
2500	43.9	AV	95	2.0	H	-5.88	38.02	54	15.98
2500	71.21	PK	25	2.0	V	-5.88	65.33	74	8.67
2500	43.62	AV	25	2.0	V	-5.88	37.74	54	16.26
4944	46.37	PK	205	1.5	H	3.17	49.54	74	24.46
4944	47.05	PK	336	1.9	V	3.17	50.22	74	23.78
802.11N20, Low Channel									
2310	46.16	PK	66	1.3	H	-6.84	39.32	74	34.68
2310	46.29	PK	194	1.9	V	-6.84	39.45	74	34.55
2390	72	PK	189	2.0	H	-6.44	65.56	74	8.44
2390	44.23	AV	189	2.0	H	-6.44	37.79	54	16.21
2390	71.93	PK	291	1.8	V	-6.44	65.49	74	8.51
2390	44.21	AV	291	1.8	V	-6.44	37.77	54	16.23
4824	47.02	PK	100	2.1	H	2.87	49.89	74	24.11
4824	47.35	PK	352	1.2	V	2.87	50.22	74	23.78
802.11N20, Middle Channel									
4884	46.68	PK	127	1.7	H	3.01	49.69	74	24.31
4884	46.94	PK	244	1.7	V	3.01	49.95	74	24.05
802.11N20, High Channel									
2483.5	45.73	PK	246	1.9	H	-5.96	39.77	74	34.23
2483.5	45.84	PK	99	1.9	V	-5.96	39.88	74	34.12
2500	71.19	PK	262	1.3	H	-5.88	65.31	74	8.69
2500	43.33	AV	262	1.3	H	-5.88	37.45	54	16.55
2500	71.11	PK	265	2.1	V	-5.88	65.23	74	8.77
2500	43.84	AV	265	2.1	V	-5.88	37.96	54	16.04
4944	46.6	PK	105	1.3	H	3.17	49.77	74	24.23
4944	46.97	PK	290	1.0	V	3.17	50.14	74	23.86

Note:



Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude)= Factor + Reading

Margin = Absolute Level - Limit

The other spurious emission which is 20dB below to the limit was not recorded.


The test result of peak was less than the limit of average, so just peak values were recorded.

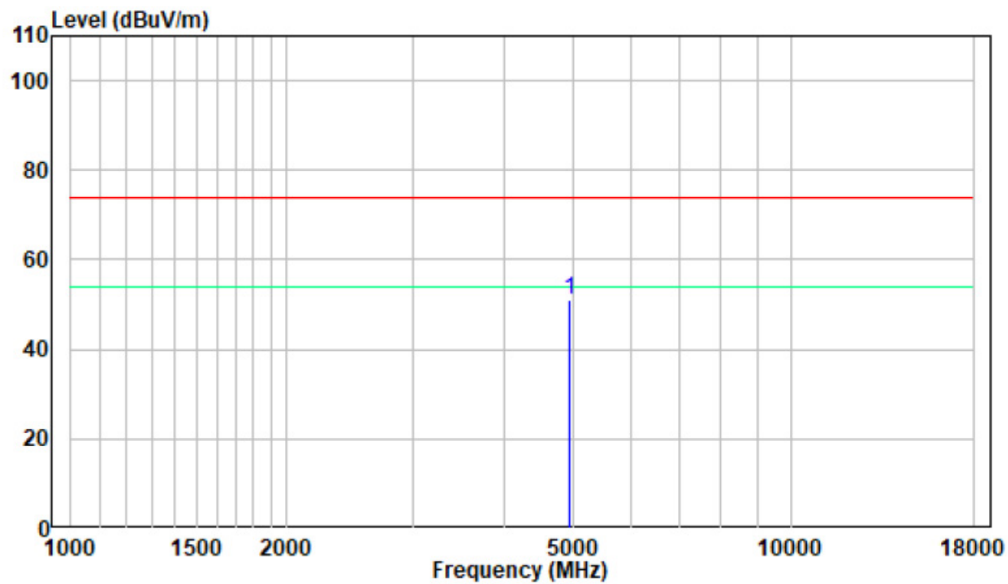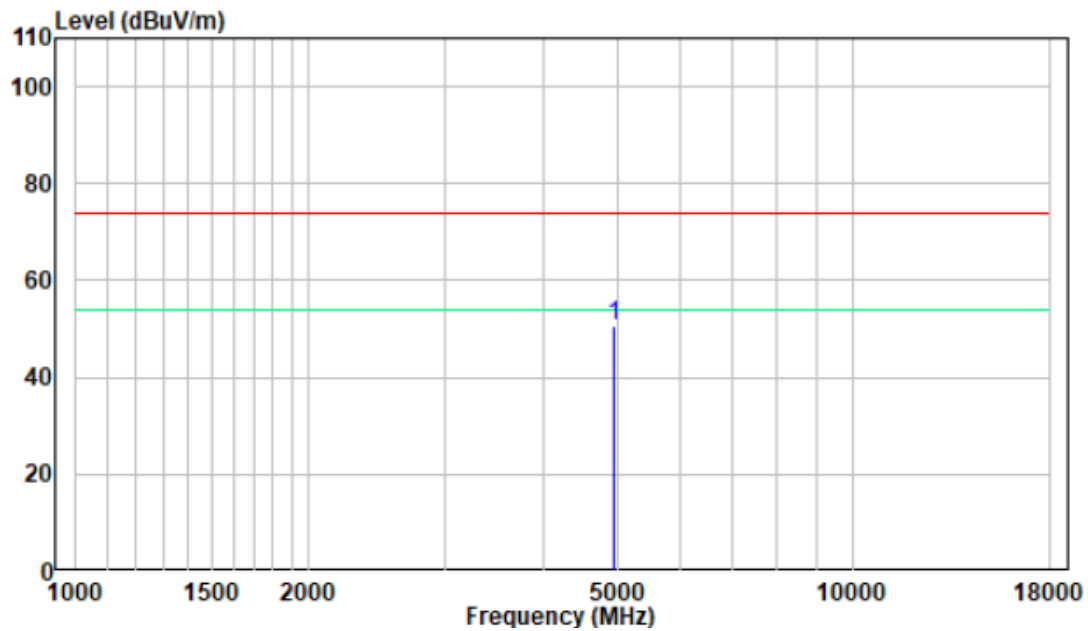1-18 GHz:**Pre-scan Plots:****802.11 b Low Channel
Horizontal****Vertical**


18 -25GHz:

Pre-scan Plots:

802.11 b Low Channel
Horizontal

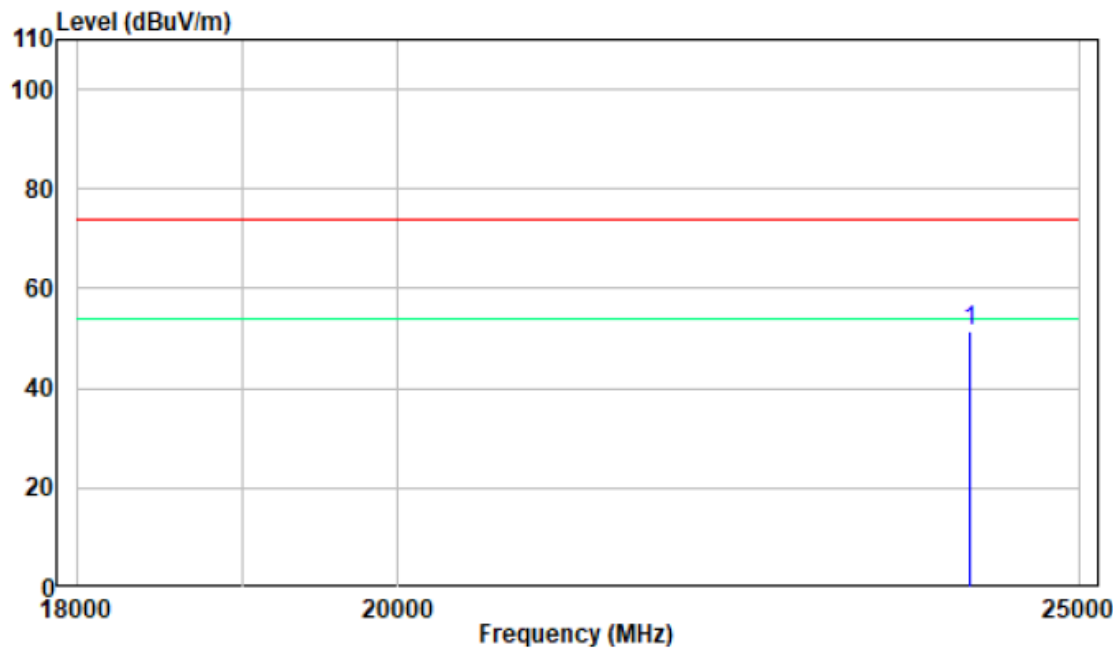

Vertical

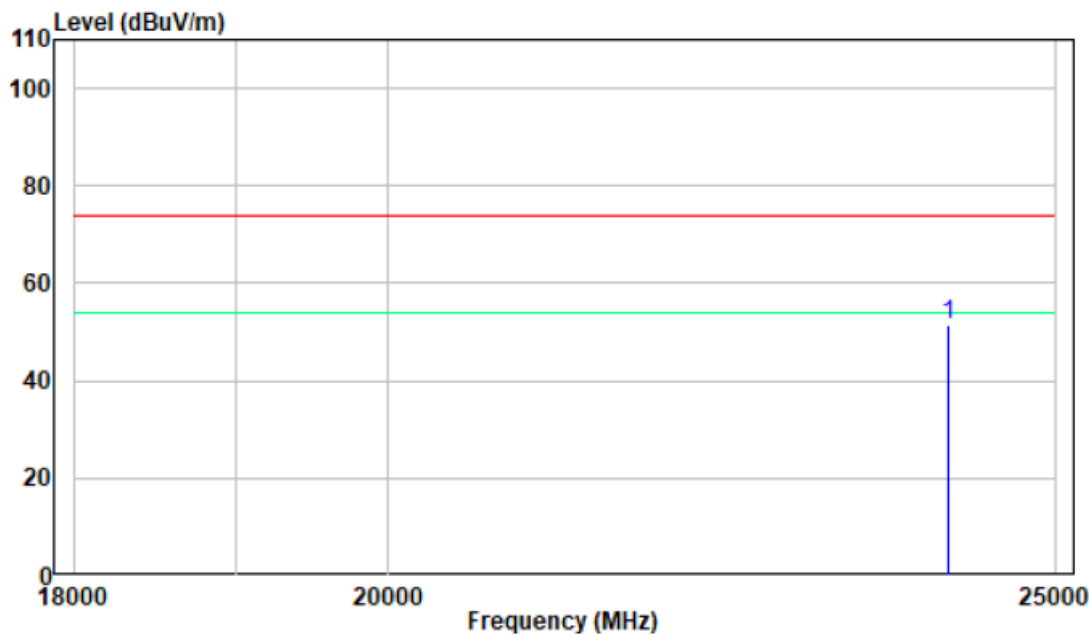


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	25.6°C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Ting Lü on 2021-10-15.

EUT operation mode: Transmitting

Please refer to the following table and plots.


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode				
Low	2412	10.007	15.543	≥ 500
Middle	2442	10.014	15.543	≥ 500
High	2472	10.014	15.412	≥ 500
802.11g mode				
Low	2412	15.166	17.366	≥ 500
Middle	2442	15.166	17.453	≥ 500
High	2472	15.109	17.453	≥ 500
802.11n-HT20 mode				
Low	2412	15.166	18.234	≥ 500
Middle	2442	15.109	18.191	≥ 500
High	2472	15.109	18.234	≥ 500

6dB Bandwidth, 802.11b Low Channel

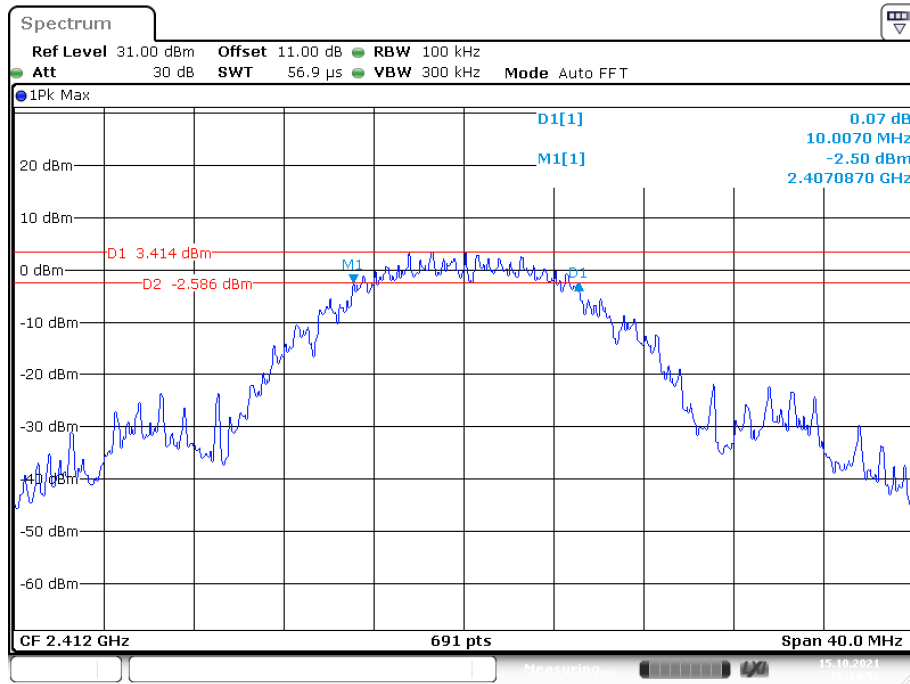


Date: 15.OCT.2021 15:14:52

6dB Bandwidth, 802.11b Middle Channel

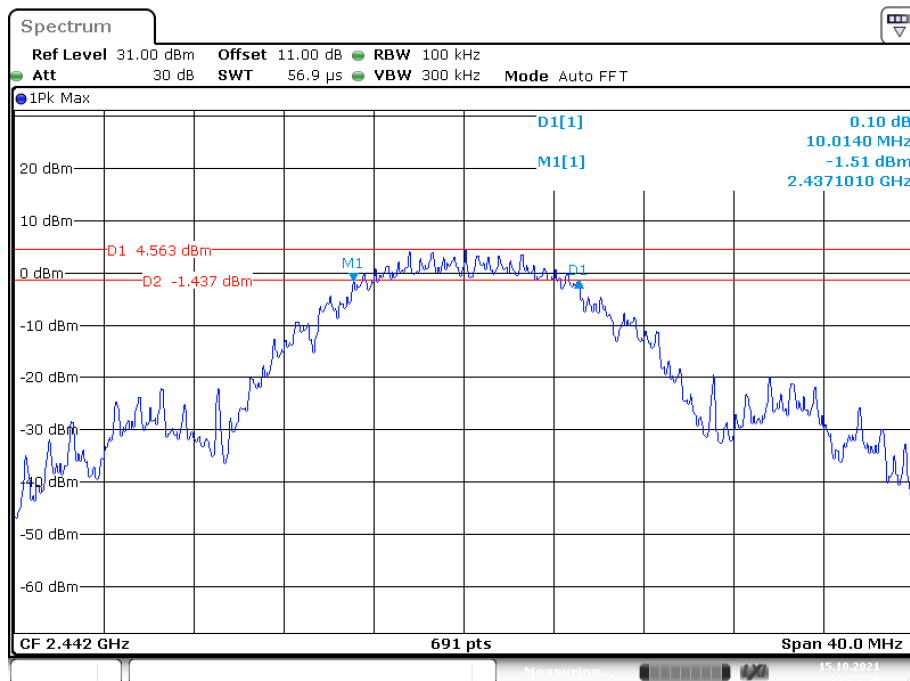


Date: 15.OCT.2021 15:23:36

6dB Bandwidth, 802.11b High Channel

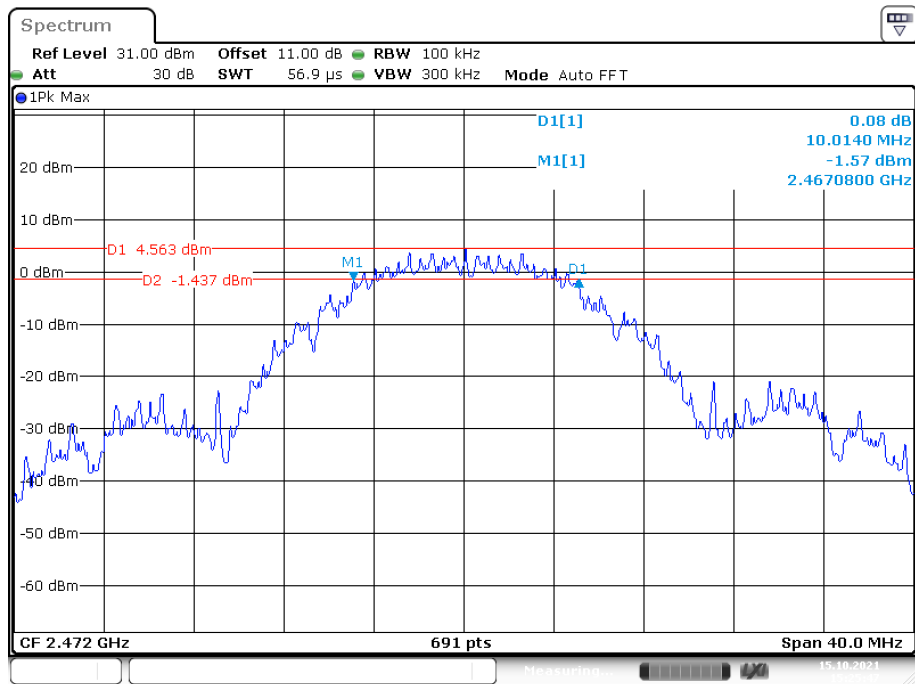


Date: 15.OCT.2021 15:25:47

6dB Bandwidth, 802.11g Low Channel

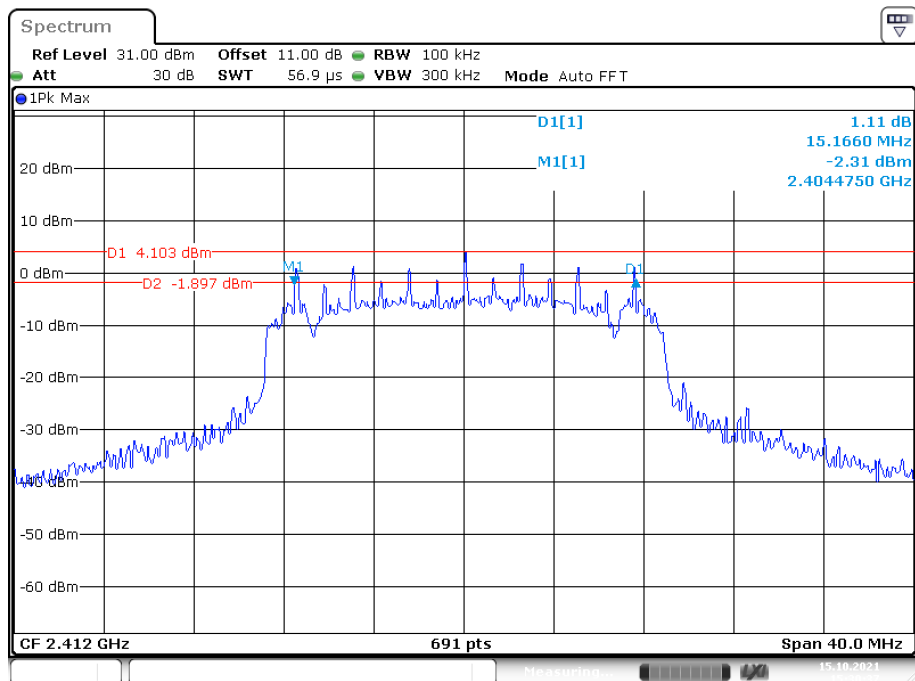


Date: 15.OCT.2021 15:30:37


6dB Bandwidth, 802.11g Middle Channel

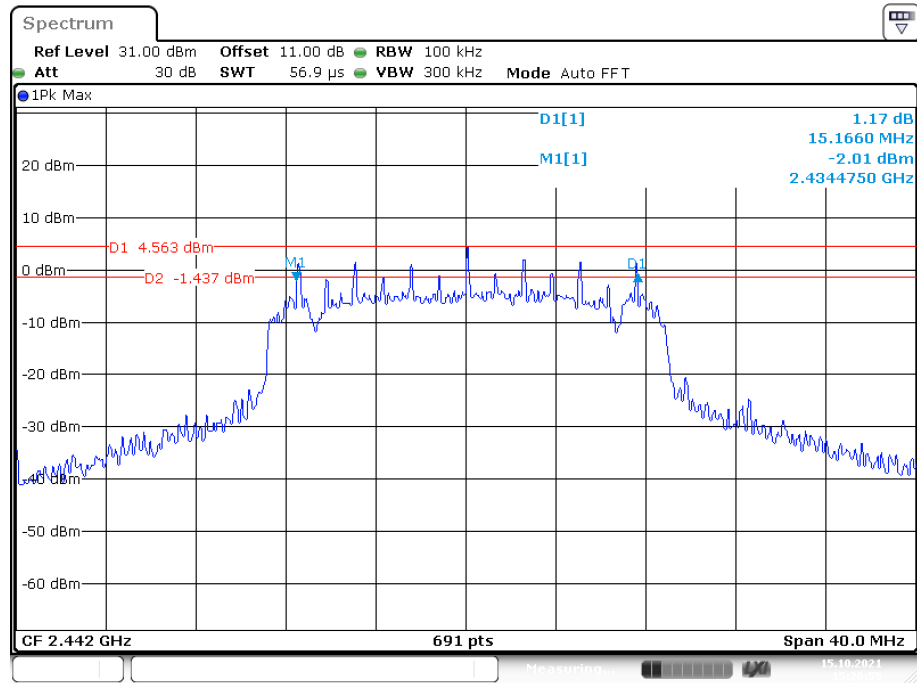

6dB Bandwidth, 802.11g High Channel

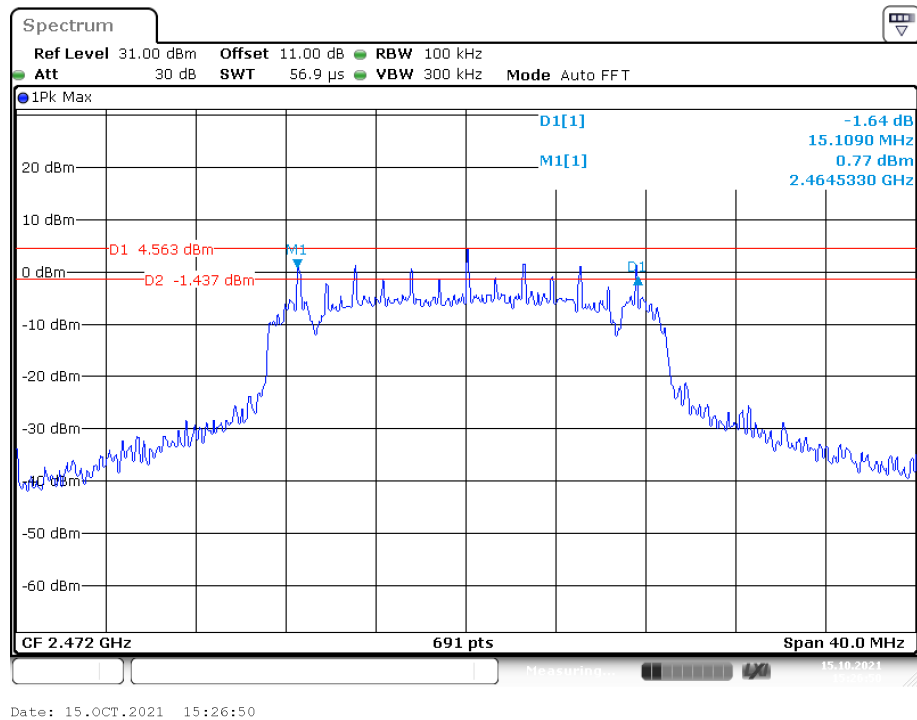


6dB Bandwidth, 802.11n-HT20 Low Channel

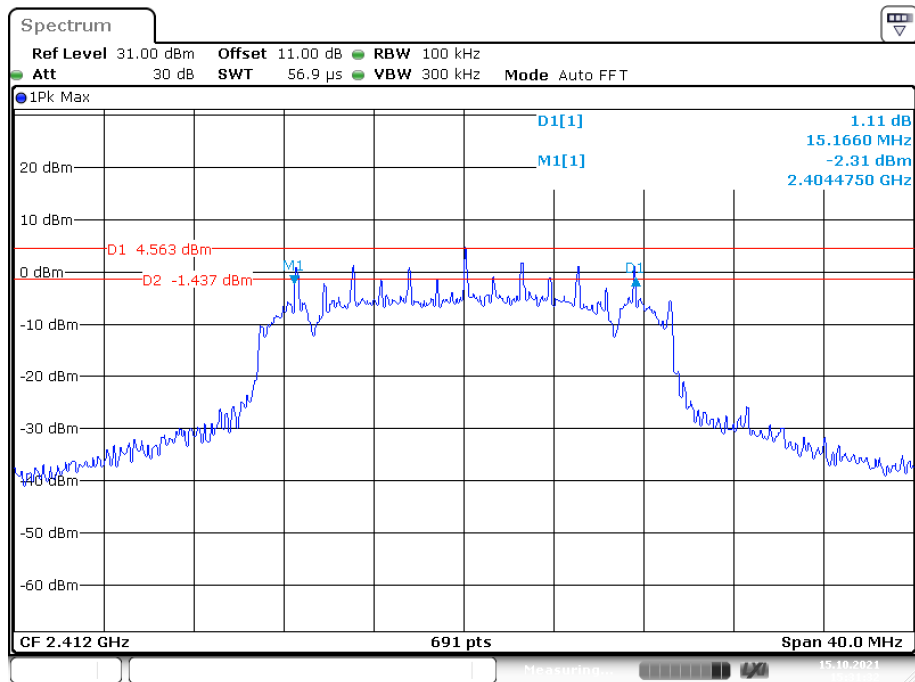


Date: 15.OCT.2021 15:31:32

6dB Bandwidth, 802.11n-HT20 Middle Channel

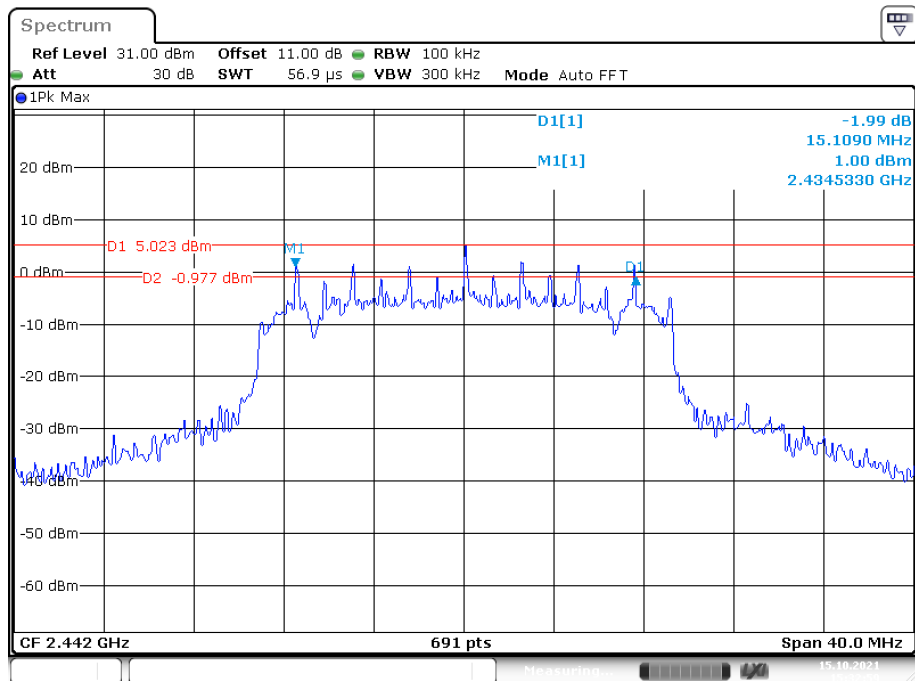


Date: 15.OCT.2021 15:32:59

6dB Bandwidth, 802.11n-HT20 High Channel

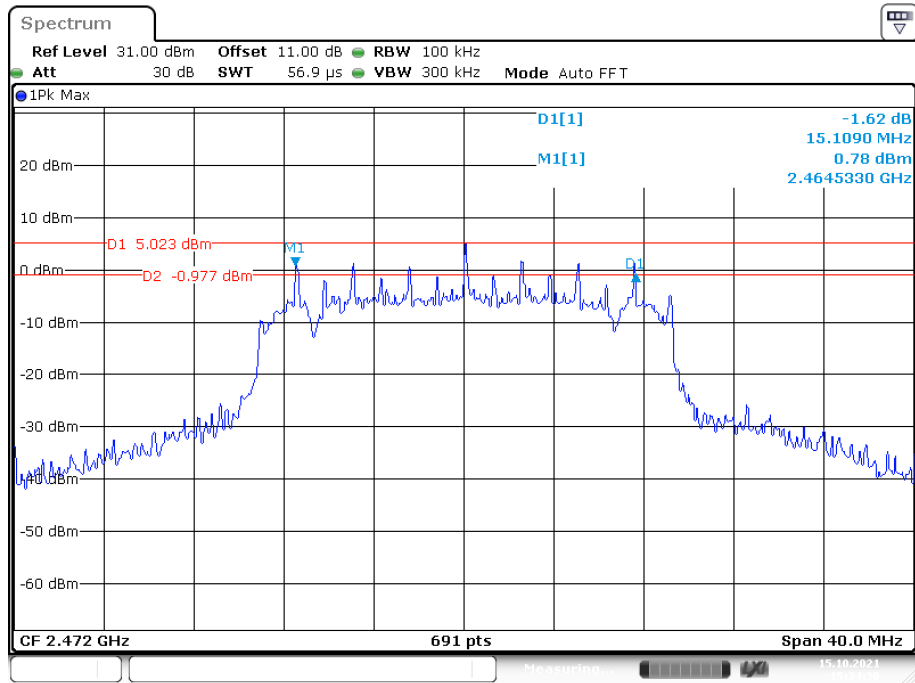


Date: 15.OCT.2021 15:34:30

Occupied Bandwidth, 802.11b Low Channel

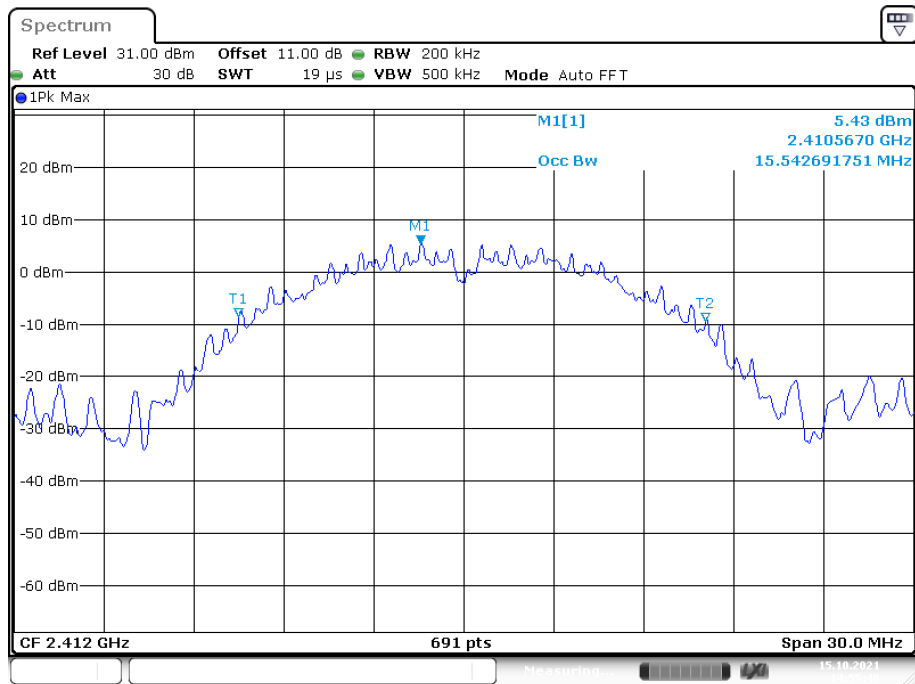


Date: 15.OCT.2021 14:55:49

Occupied Bandwidth, 802.11b Middle Channel

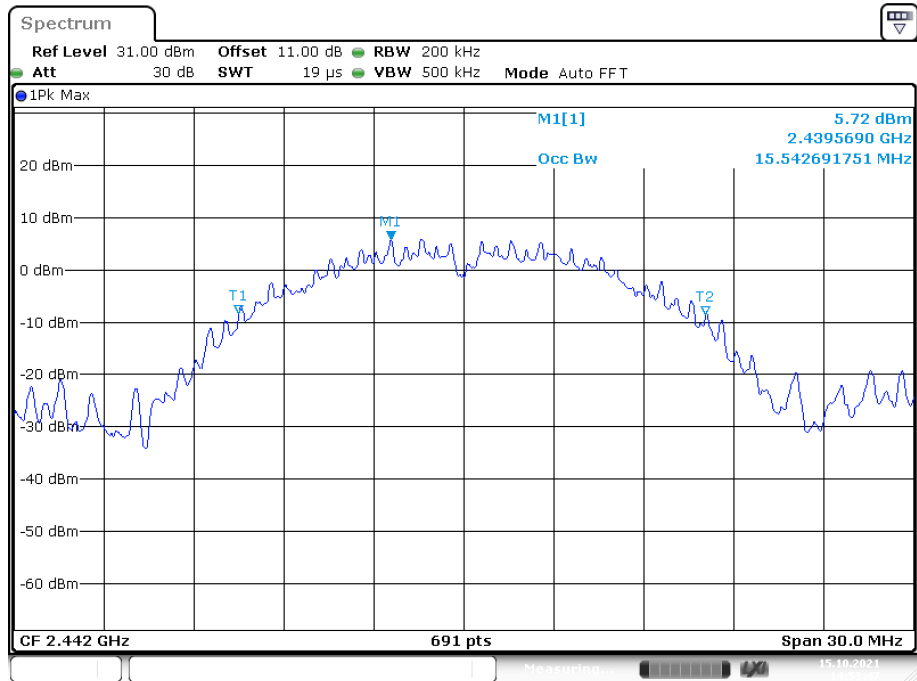


Date: 15.OCT.2021 14:53:47

Occupied Bandwidth, 802.11b High Channel

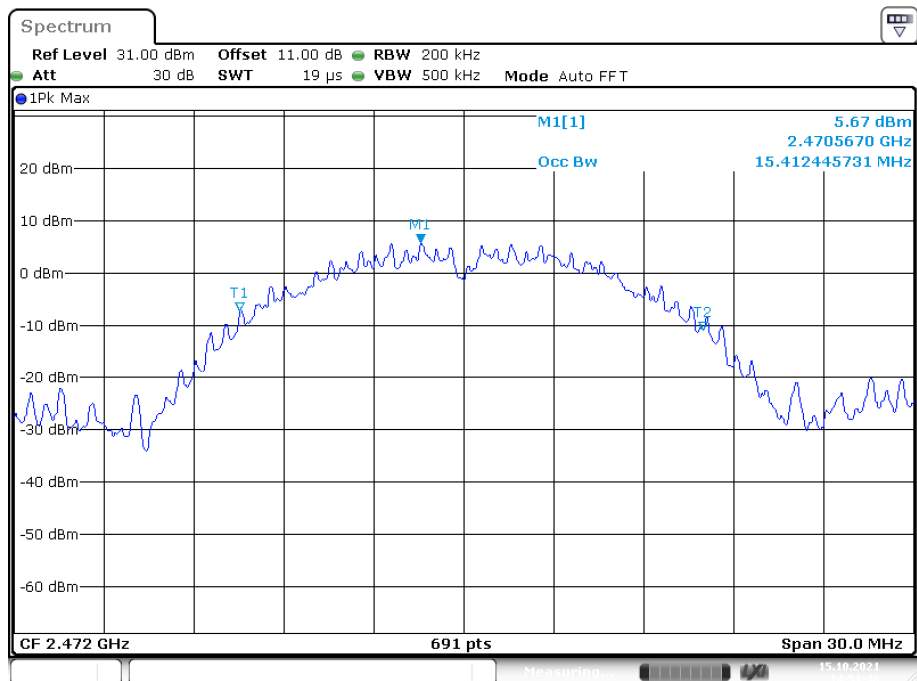


Date: 15.OCT.2021 14:51:48

Occupied Bandwidth, 802.11g Low Channel

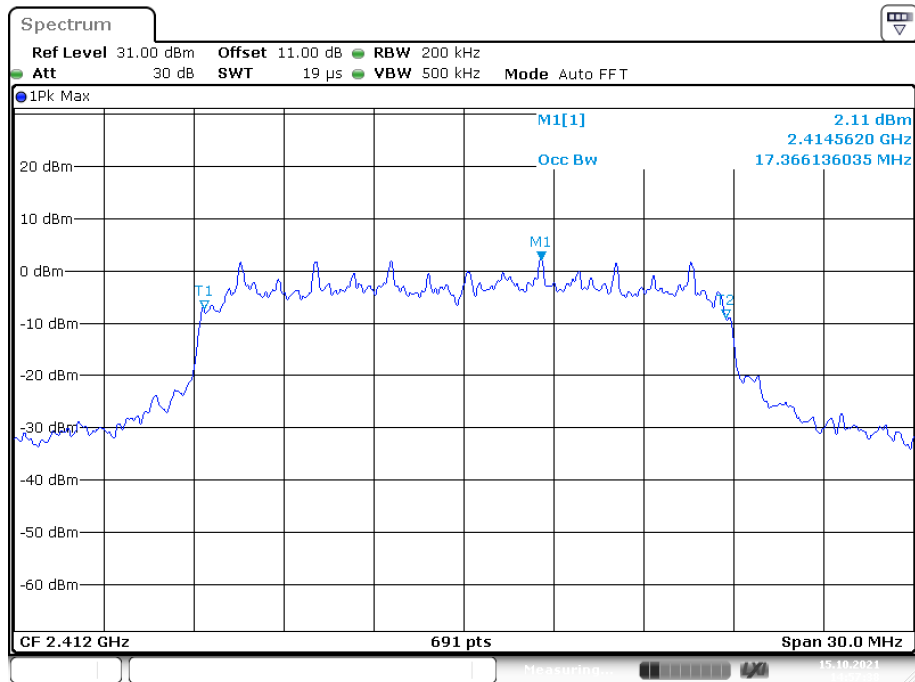


Date: 15.OCT.2021 14:57:37

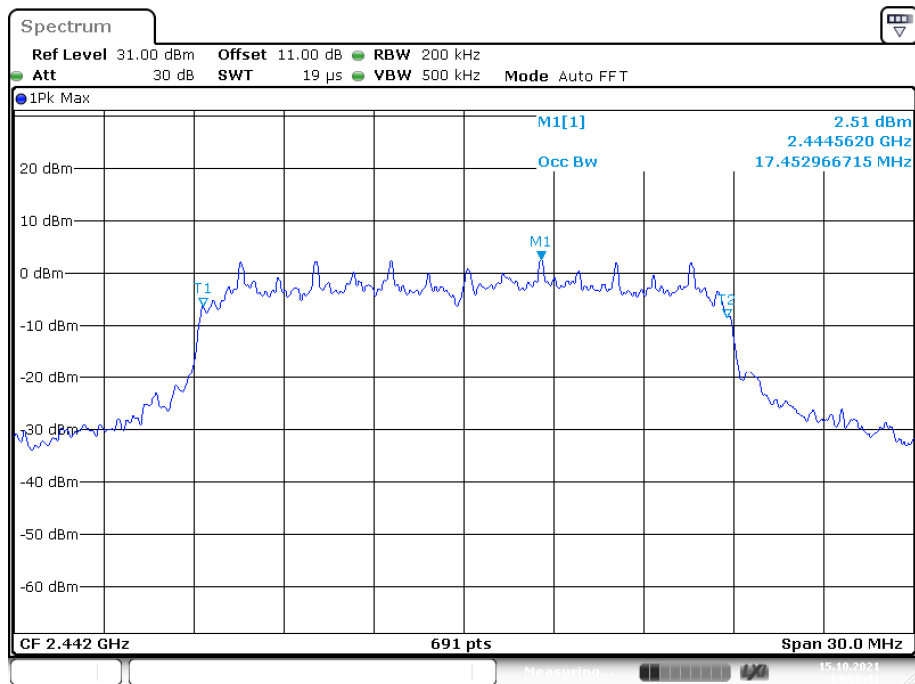


Date: 15.OCT.2021 14:58:41

Occupied Bandwidth, 802.11g High Channel

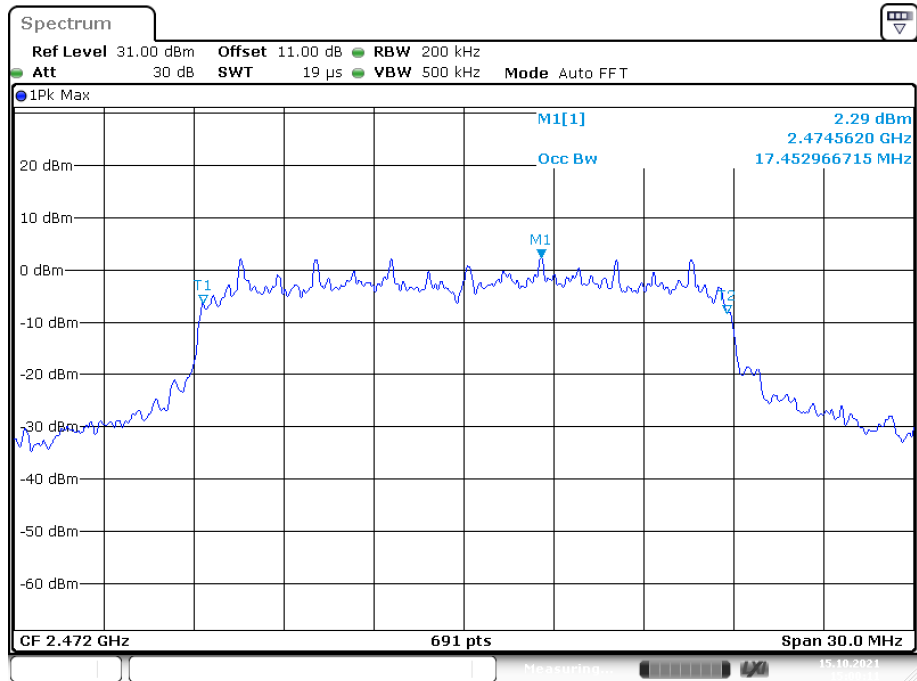


Date: 15.OCT.2021 15:00:11

Occupied Bandwidth, 802.11n-HT20 Low Channel

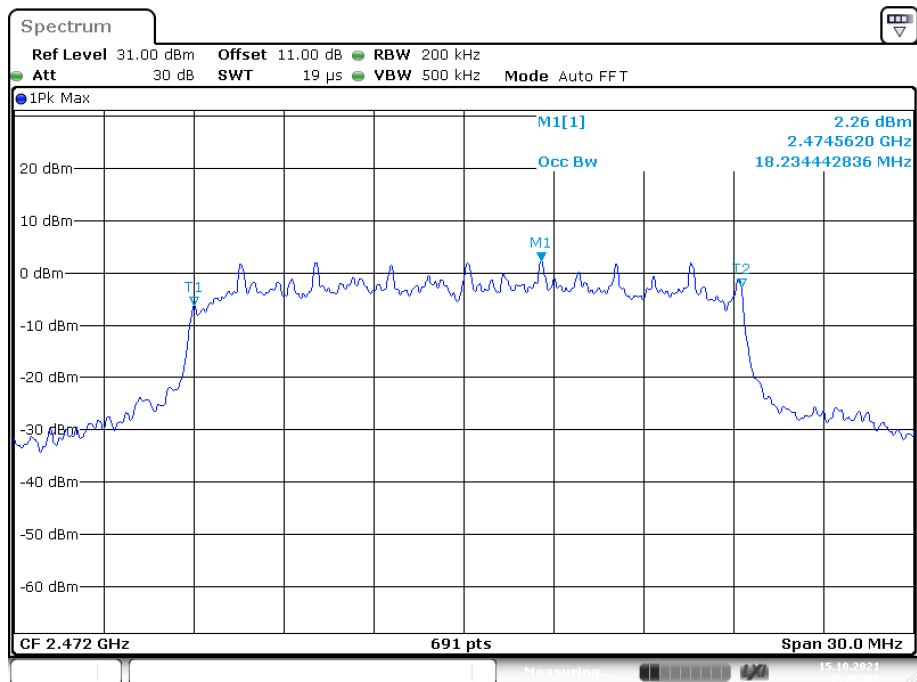


Date: 15.OCT.2021 15:03:06

Occupied Bandwidth, 802.11n-HT20 Middle Channel

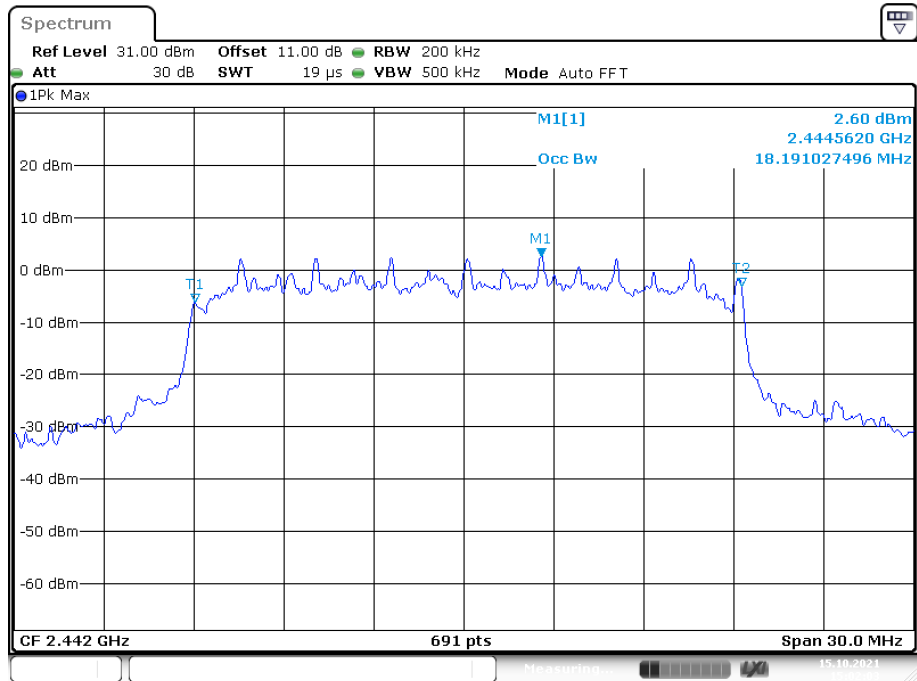

Date: 15.OCT.2021 15:02:03

Occupied Bandwidth, 802.11n-HT20 High Channel

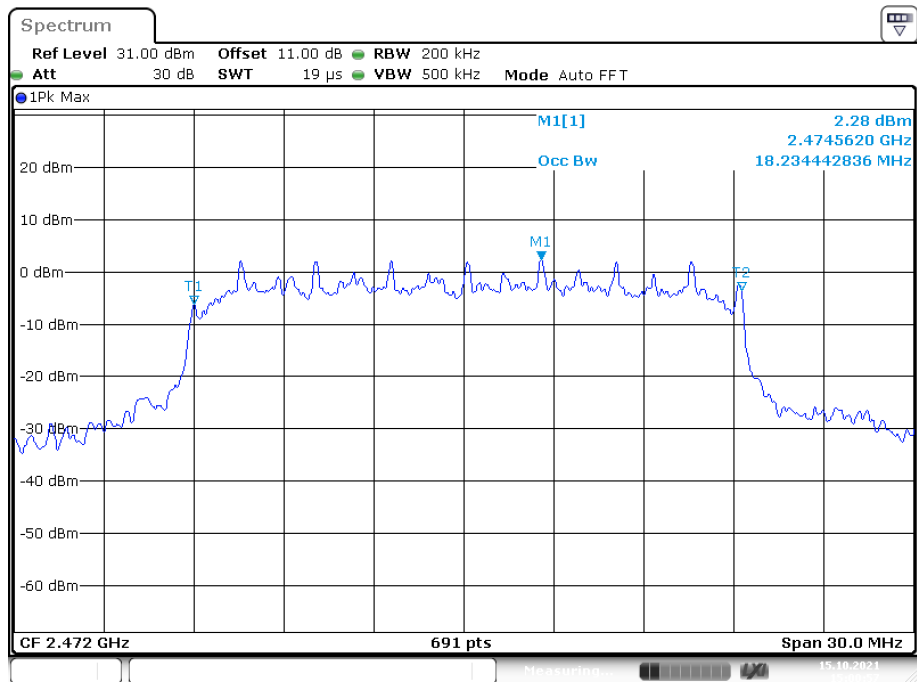

Date: 15.OCT.2021 15:00:56


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lv on 2021-11-02.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Max Conducted Average Output Power (dBm)	Limit (dBm)
802.11b mode				
Low	2412	18.04	16.06	30
Middle	2442	18.65	16.68	30
High	2472	18.52	16.59	30
802.11g mode				
Low	2412	17.65	14.38	30
Middle	2442	18.26	15.14	30
High	2472	18.24	14.98	30
802.11n HT20 mode				
Low	2412	17.66	14.60	30
Middle	2442	18.29	15.39	30
High	2472	18.28	15.31	30

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	25.6 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lv on 2021-10-15.


EUT operation mode: Transmitting

Test Result: Compliant.

Conducted Band Edge Result:

Please refer to the following plots.

802.11b: Band Edge, Left Side

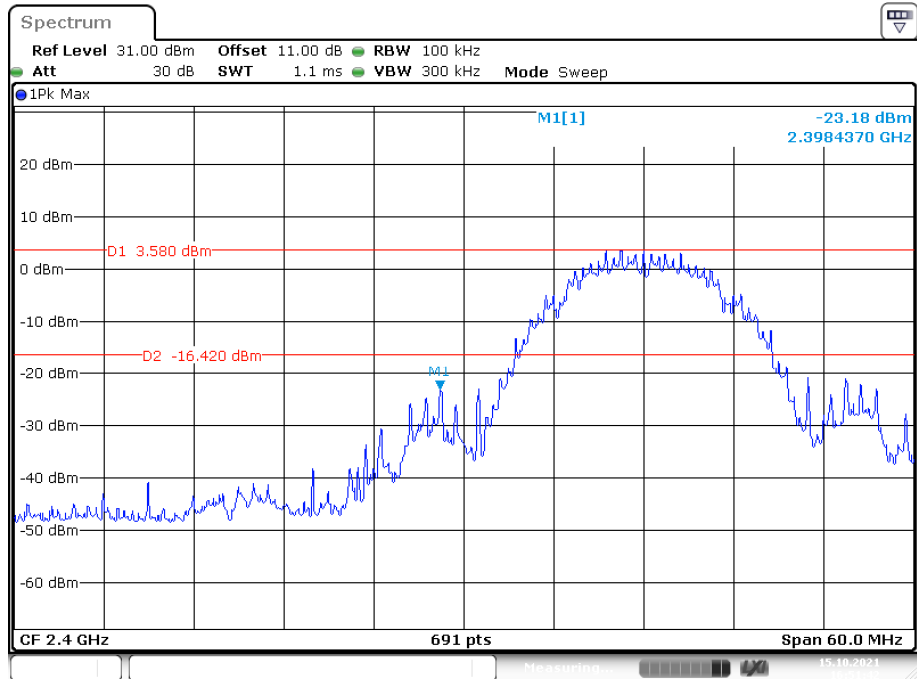


Date: 15.OCT.2021 16:51:42

802.11b: Band Edge, Right Side




Date: 15.OCT.2021 17:43:40

802.11g: Band Edge, Left Side

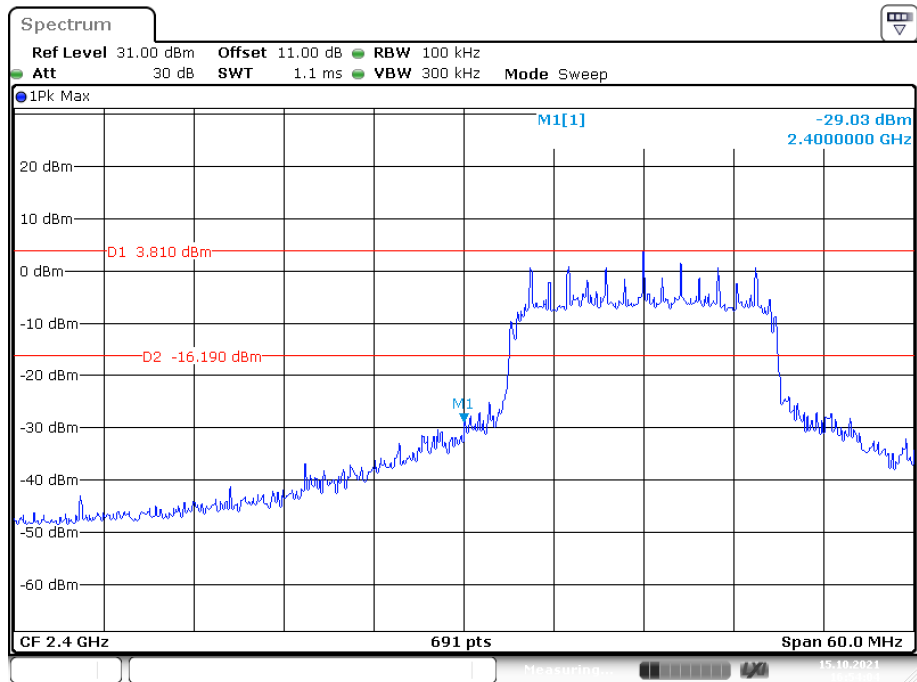


Date: 15.OCT.2021 16:54:04

802.11g: Band Edge, Right Side

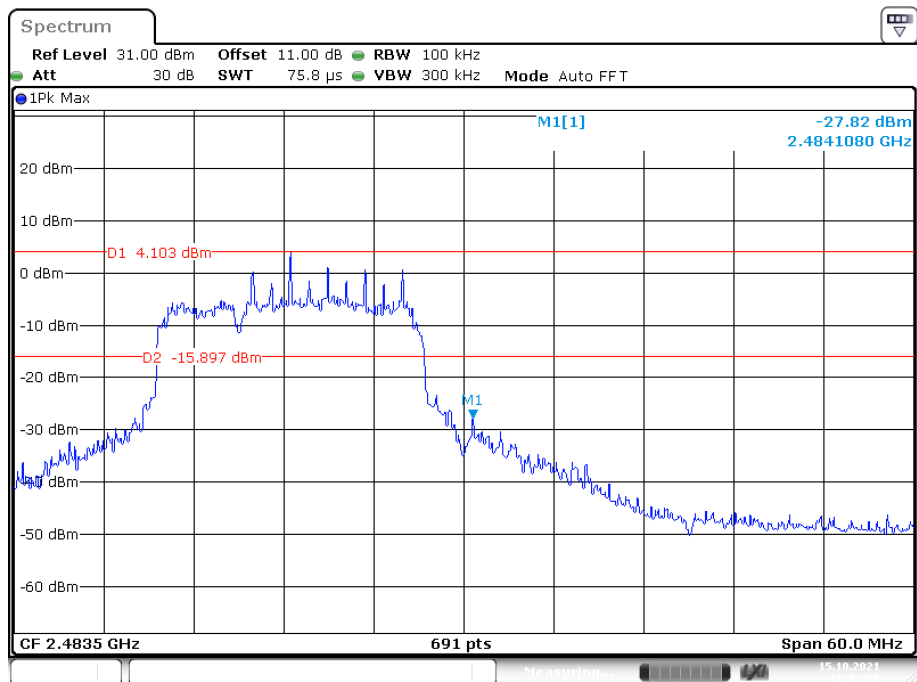


Date: 15.OCT.2021 17:42:55

802.11n-HT20: Band Edge, Left Side

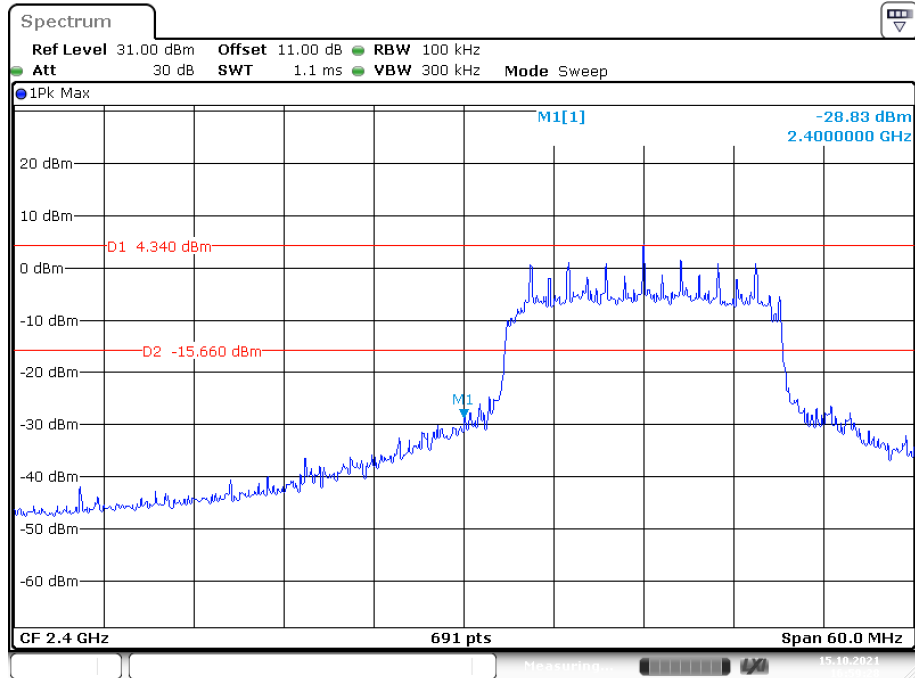

Date: 15.OCT.2021 16:59:28

802.11n-HT20: Band Edge, Right Side

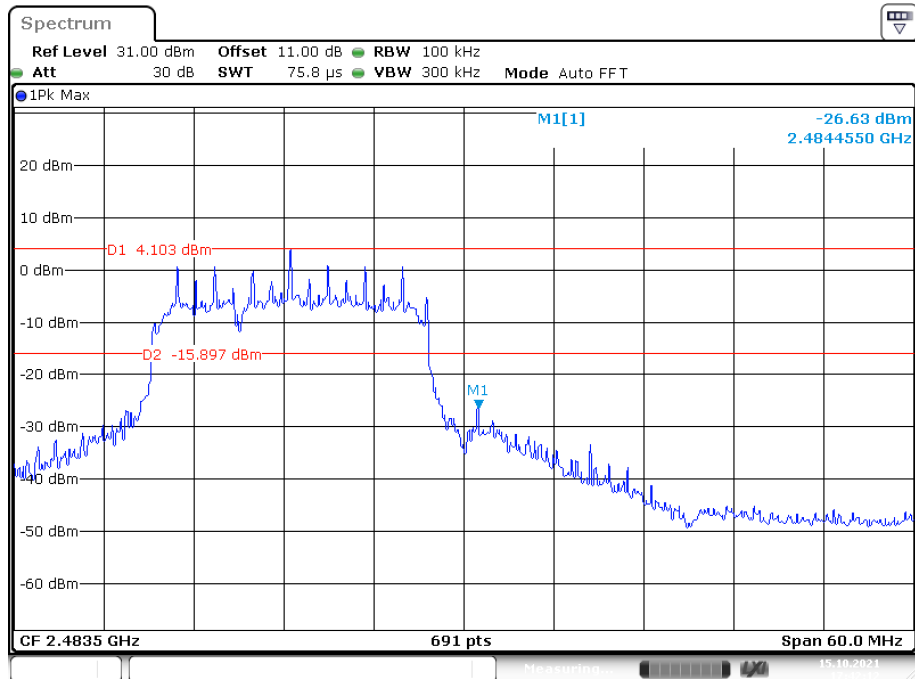

Date: 15.OCT.2021 17:42:12


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions


Temperature:	25.6 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lv on 2021-11-02.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-10.71	≤ 8
Middle	2442	-10.43	≤ 8
High	2472	-11.38	≤ 8
802.11g mode			
Low	2412	-12.14	≤ 8
Middle	2442	-11.10	≤ 8
High	2472	-11.90	≤ 8
802.11n-HT20 mode			
Low	2412	-12.62	≤ 8
Middle	2442	-12.14	≤ 8
High	2472	-13.15	≤ 8

Power Spectral Density, 802.11b Low Channel

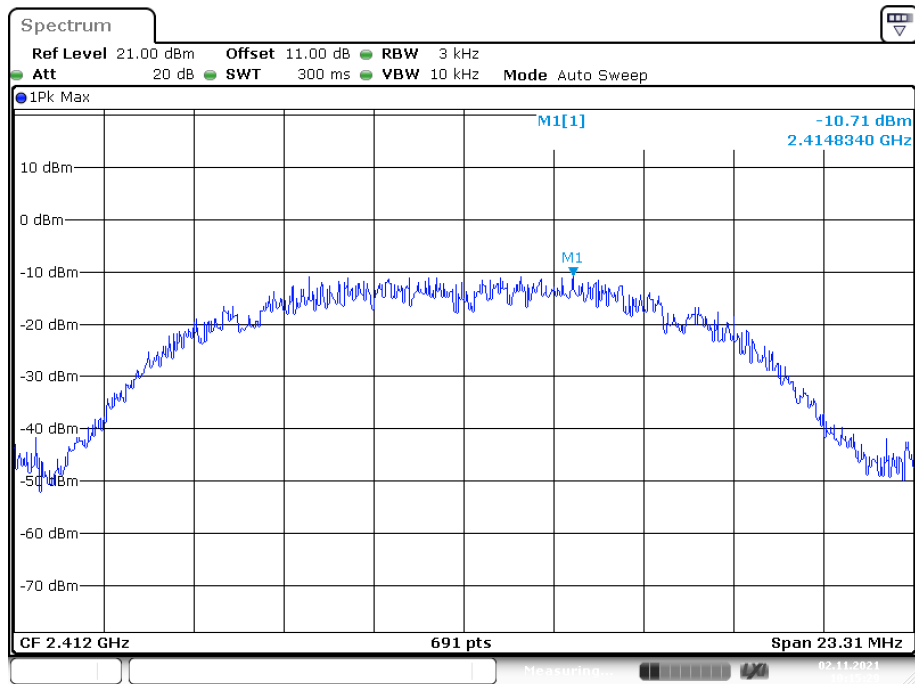


Date: 2.NOV.2021 10:15:29

Power Spectral Density, 802.11b Middle Channel

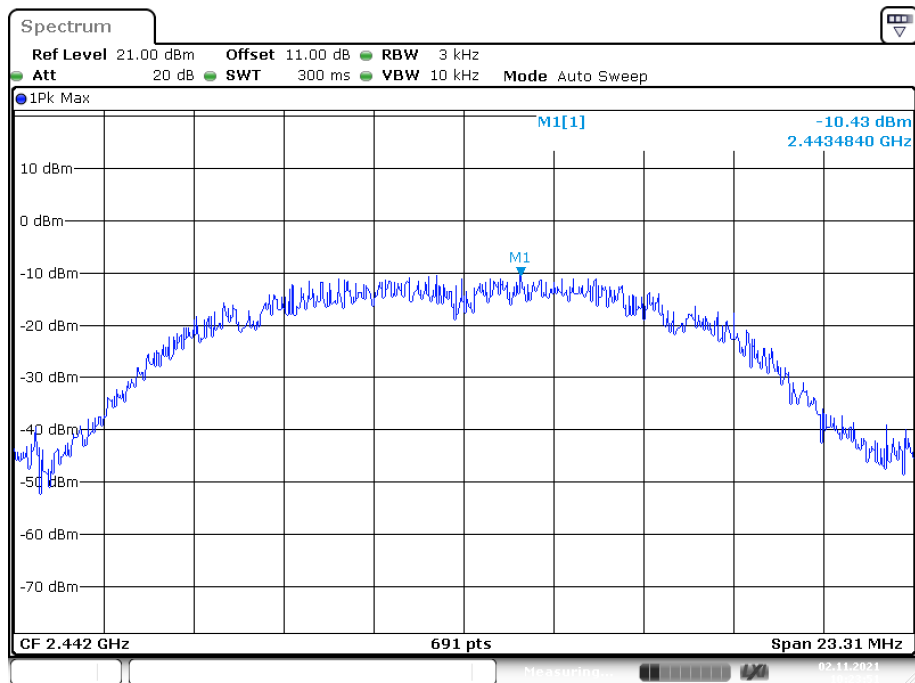


Date: 2.NOV.2021 10:23:52

Power Spectral Density, 802.11b High Channel

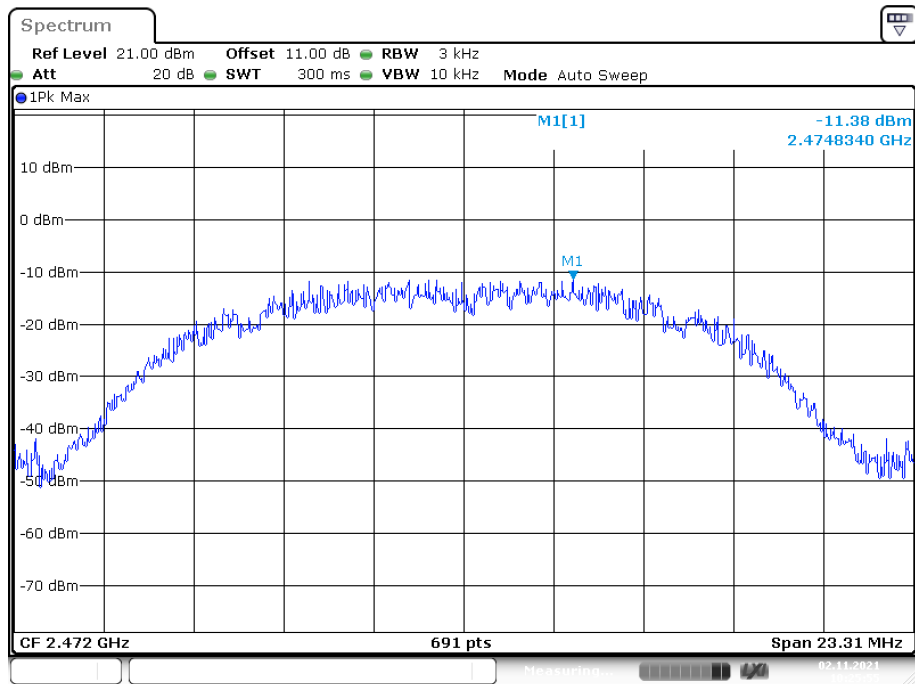


Date: 2.NOV.2021 10:25:55


Power Spectral Density, 802.11g Low Channel

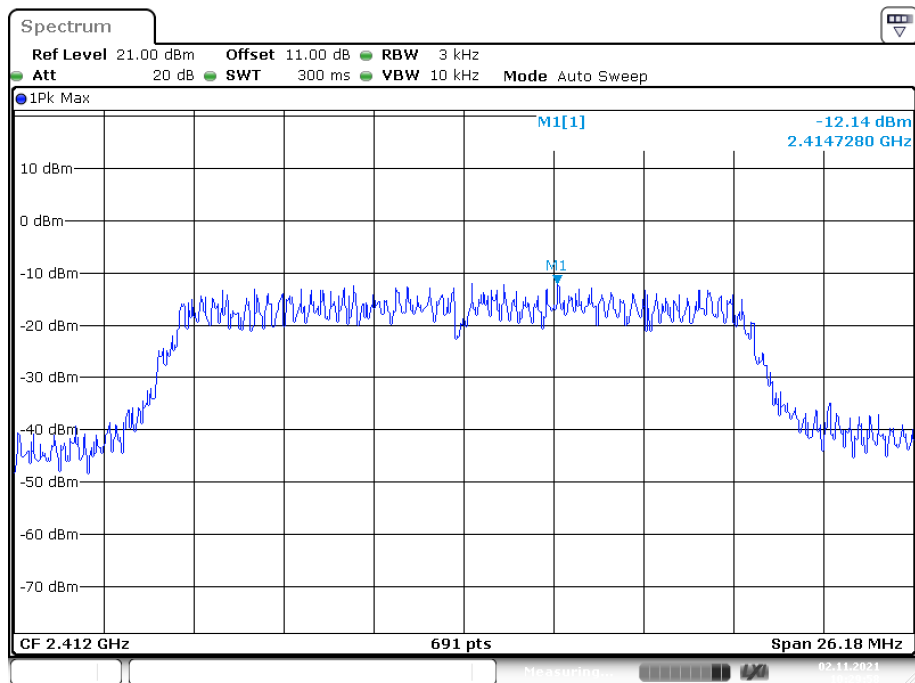

Date: 2.NOV.2021 10:29:58

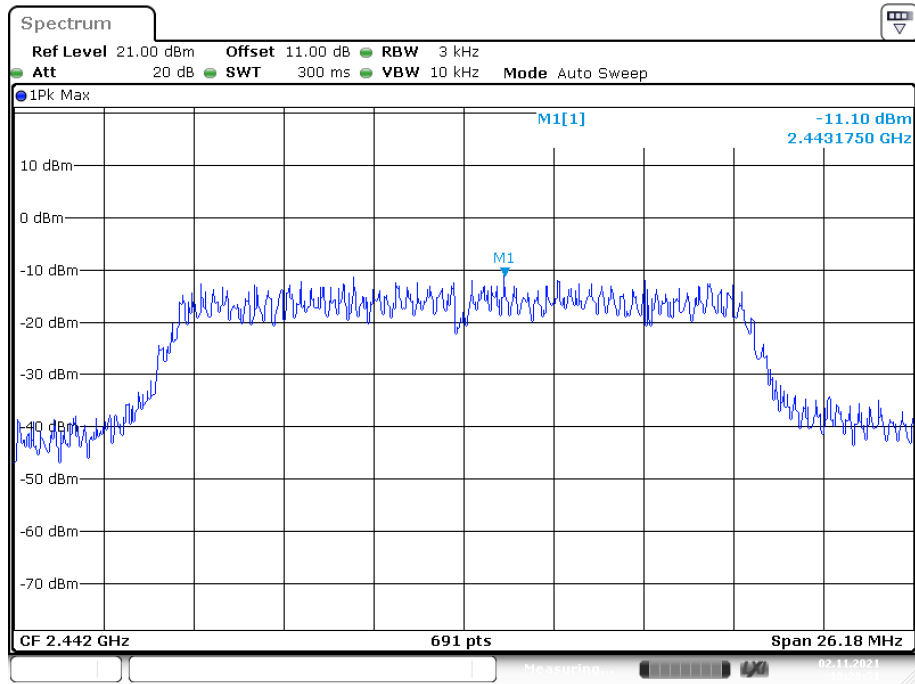
Power Spectral Density, 802.11g Middle Channel

Date: 2.NOV.2021 10:28:52

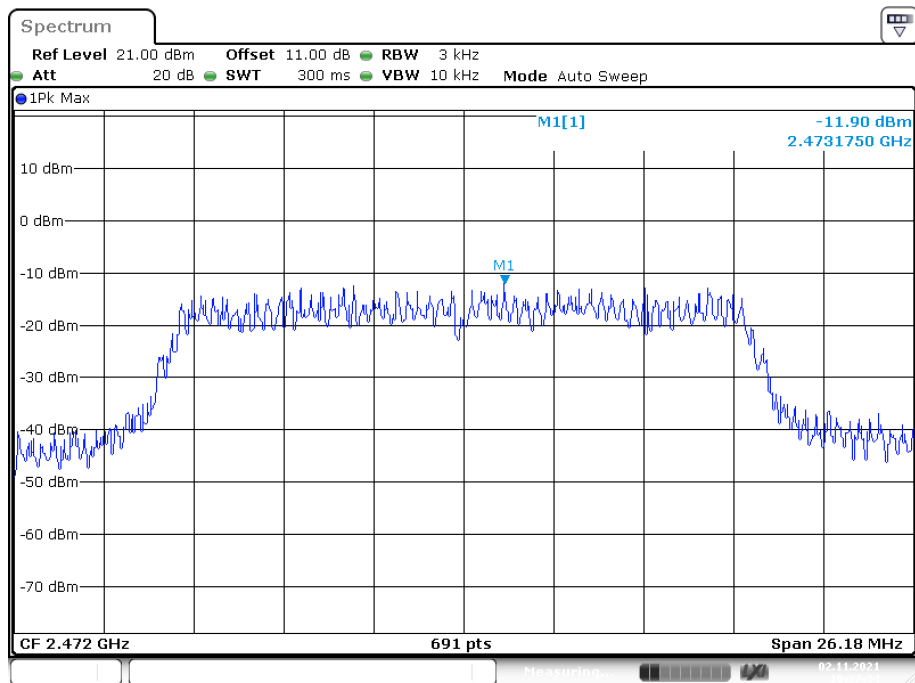Power Spectral Density, 802.11g High Channel


Date: 2.NOV.2021 10:27:35

Power Spectral Density, 802.11n-HT20 Low Channel

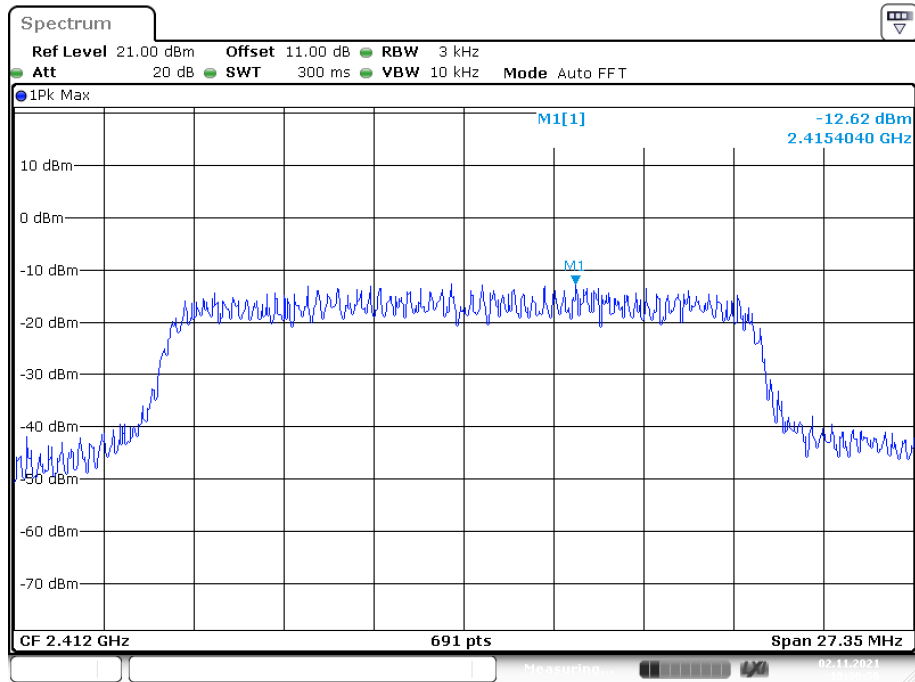


Date: 2.NOV.2021 10:30:56

Power Spectral Density, 802.11n-HT20 Middle Channel

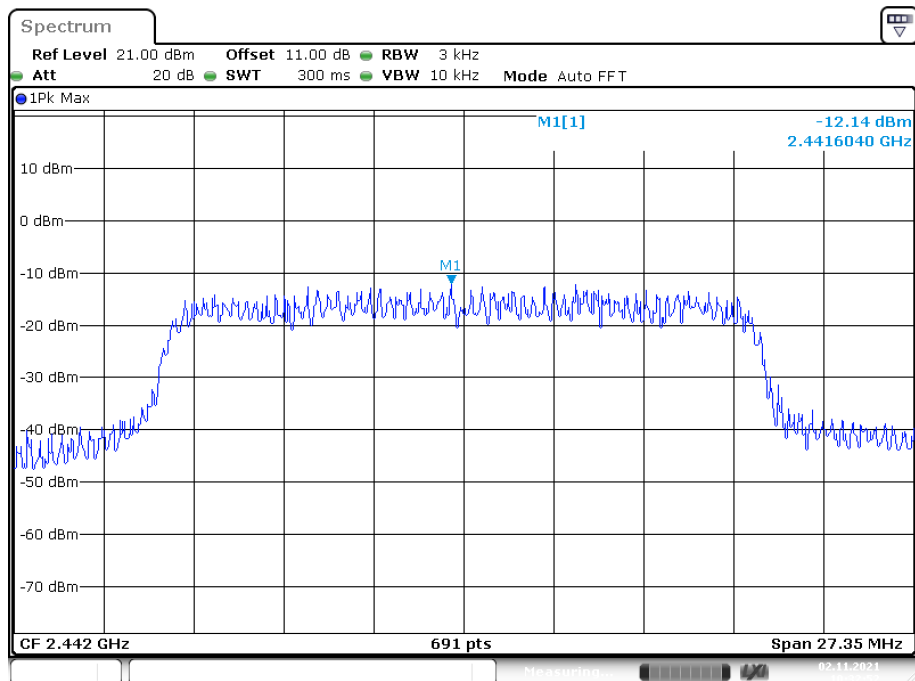

Date: 2.NOV.2021 10:32:52

Power Spectral Density, 802.11n-HT20 High Channel

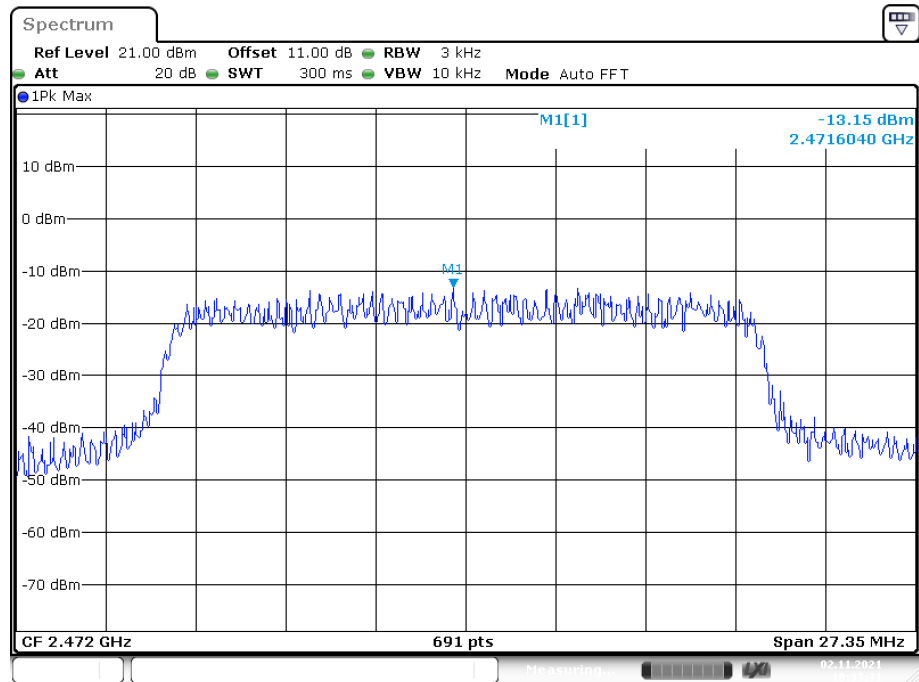

Date: 2.NOV.2021 10:33:31

***** END OF REPORT *****