



2.4/5/6 GHZ 8/10/10 DBI 10 ELEMENT TRI-BAND PATCH ANTENNA WITH SAMTEC CONNECTOR ATS-OP-2456-81010-10MC-36



ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.48/5.15-5.85/6-7.125 GHz
Gain: 8/10/10 dBi
Polarization: Vertical
Horizontal Beamwidth: 4 (65°/45°) 6 (65°/45°/40°)
Vertical Beamwidth: 4 (65°/45°) 6 (65°/45°/40°)
VSWR: <2.0



MECHANICAL SPECIFICATIONS

Dimensions: 15.4" x 15.4" x 2.24" (390x390x57mm)
Weight: 1.5 lb (0.68 kg)
Installation: Flush Mount to Wall

Radome Material: ABS
Connector: 4-Port Samtec / 6-Port Samtec
Number of Leads: 10
Cable Length: 36" (910mm)
Cable Type: LMR-100



ENVIRONMENTAL SPECIFICATIONS

Installation Environment: Indoor/Outdoor


WARRANTY

2 Year Limited Warranty




HORIZONTAL


VERTICAL




4-Port Horizontal

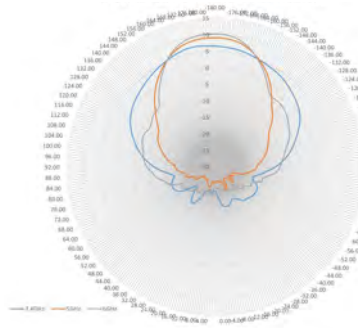

6-Port Horizontal



4-Port Vertical

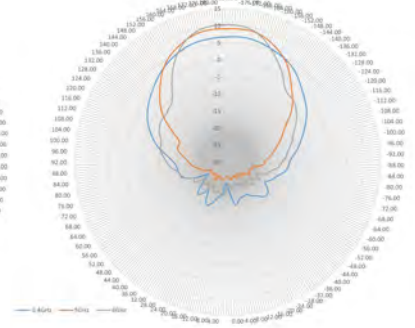

6-Port Vertical



2.4/5/6 GHZ 8/10/10 DBI 10 ELEMENT TRI-BAND PATCH ANTENNA WITH SAMTEC CONNECTOR ATS-OP-2456-81010-10MC-36

