




RADIO EXPOSURE TEST REPORT

FCC ID : 2AHBN-AP45
Equipment : 802.11ax 6E Wireless Access Point
Brand Name : Juniper
Model Name : AP45, AP45E
Applicant : Juniper Networks, Inc.
1133 Innovation Way Sunnyvale, California 94089 USA
Manufacturer : Juniper Networks, Inc.
1133 Innovation Way Sunnyvale, California 94089 USA
Standard : 47 CFR Part 2.1091

The product was received on Oct. 08, 2021, and testing was started from Oct. 14, 2021 and completed on Mar. 15, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

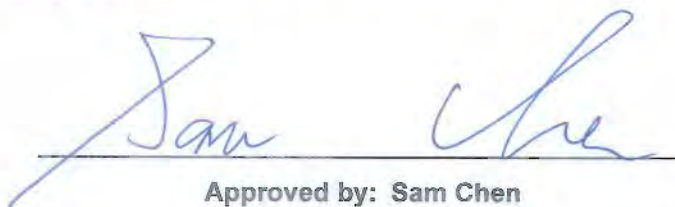

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Antenna Information	6
1.3 Table for Radio function	10
1.4 Accessories	11
1.5 Testing Location	11
2 Maximum Permissible Exposure	12
2.1 Limit of Maximum Permissible Exposure	12
2.2 MPE Calculation Method.....	12
2.3 Calculated Result and Limit.....	13

Photographs of EUT v01



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A1 1 Ver1.1



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Declaration of Conformity:

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Viola Huang



1 General Description

1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) VHT: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Bluetooth	2400-2483.5	2402-2480	LE: GFSK
6E WLAN	5925-7125	5955-7095	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)



1.2 Antenna Information

Ant.	Port							Brand Name	Model Name	Ant. Type	Connector	Equip EUT	Gain (dBi)
	WLAN 5GHz	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	WLAN 2.4GHz	WLAN 5GHz	BT						
	(Radio 1)	(Radio 2)	(Radio 2)	Radio 3)	(Radio 4)	(Radio 4)	(Radio 5)						
1	1	4	-	-	-	-	-	Juniper	AP45	PIFA	I-PEX	EUT 1	Note 1
2	2	3	-	-	-	-	-	Juniper	AP45	PIFA	I-PEX		
3	3	2	-	-	-	-	-	Juniper	AP45	PIFA	I-PEX		
4	4	1	-	-	-	-	-	Juniper	AP45	PIFA	I-PEX		
5	-	-	1	-	-	-	-	Juniper	AP45	PIFA	I-PEX		
6	-	-	2	-	-	-	-	Juniper	AP45	PIFA	I-PEX		
7	-	-	3	-	-	-	-	Juniper	AP45	PIFA	I-PEX		
8	-	-	4	-	-	-	-	Juniper	AP45	PIFA	I-PEX		
9	-	-	-	1	-	-	-	Juniper	AP45	PIFA	I-PEX		
10	-	-	-	2	-	-	-	Juniper	AP45	PIFA	I-PEX		
11	-	-	-	3	-	-	-	Juniper	AP45	PIFA	I-PEX		
12	-	-	-	4	-	-	-	Juniper	AP45	PIFA	I-PEX		
13	-	-	-	-	1	1	-	Juniper	AP45	PIFA	I-PEX		
14	-	-	-	-	2	2	-	Juniper	AP45	PIFA	I-PEX		
15	-	-	-	-	-	-	1	Juniper	AP45	PIFA	I-PEX	EUT 1/EUT 2	
16	1	4	-	-	-	-	-	Acce ITex	ATS-OO-2456-4 66-10MC-36	OMNI	4-Port connector	EUT 2	
	2	3	-	-	-	-	-						
	3	2	-	-	-	-	-						
	4	1	-	-	-	-	-						
17	1	4	-	-	-	-	-	Acce ITex	ATS-OP-2456-8 1010-10MC-36	Panel	4-Port connector		
	2	3	-	-	-	-	-						
	3	2	-	-	-	-	-						
	4	1	-	-	-	-	-						



Note 1:

Ant.	Antenna Gain (dBi)																
	WLAN 5GHz (Radio 1)				WLAN 2.4GHz (Radio 2)	WLAN 5GHz (Radio 2)		WLAN 6GHz (Radio 3)				WLAN 2.4GHz (Radio 4)	WLAN 5GHz (Radio 4)				Bluetooth (Radio 5)
	UNII 1	UNII 2A	UNII 2C	UNII 3		UNII 1	UNII 2A	UNII 5	UNII 6	UNII 7	UNII 8		UNII 1	UNII 2A	UNII 2C	UNII 3	
1	2.89	3.7	3.46	2.39	2.01	-	-	-	-	-	-	-	-	-	-	-	-
2	2.61	2.55	3.04	3.8	0.66	-	-	-	-	-	-	-	-	-	-	-	-
3	1.94	2.22	2.82	2.54	2.04	-	-	-	-	-	-	-	-	-	-	-	-
4	3.27	4.06	2.87	2.17	1.17	-	-	-	-	-	-	-	-	-	-	-	-
5	-	-	-	-	-	3.2	3.56	-	-	-	-	-	-	-	-	-	-
6	-	-	-	-	-	2.85	3.77	-	-	-	-	-	-	-	-	-	-
7	-	-	-	-	-	3.37	3.23	-	-	-	-	-	-	-	-	-	-
8	-	-	-	-	-	3.11	3.68	-	-	-	-	-	-	-	-	-	-
9	-	-	-	-	-	-	-	4.9	5.4	5.4	5.6	-	-	-	-	-	-
10	-	-	-	-	-	-	-	4.9	5.4	5.4	5.6	-	-	-	-	-	-
11	-	-	-	-	-	-	-	4.9	5.4	5.4	5.6	-	-	-	-	-	-
12	-	-	-	-	-	-	-	4.9	5.4	5.4	5.6	-	-	-	-	-	-
13	-	-	-	-	-	-	-	-	-	-	-	5.0	5.4	5.4	5.5	5.3	-
14	-	-	-	-	-	-	-	-	-	-	-	5.0	5.4	5.4	5.5	5.3	-
15	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.5
16	6	6	6	6	4	-	-	-	-	-	-	-	-	-	-	-	-
17	10	10	10	10	8	-	-	-	-	-	-	-	-	-	-	-	-



Ant.	Directional Gain (dBi)						
	WLAN 5GHz (Radio 1)				WLAN 2.4GHz (Radio 2)	WLAN 5GHz (Radio 2)	
	UNII 1	UNII 2A	UNII 2C	UNII 3		UNII 1	UNII 2A
1	6.44	6.41	7.19	6.67	4.23	-	-
2						-	-
3						-	-
4						-	-
5	-	-	-	-	-	7.7	8.16
6	-	-	-	-	-		
7	-	-	-	-	-		
8	-	-	-	-	-		

Note 2: The EUT has seventeen antennas. The ant.15 is BLE Array (Beam 1~Beam 9 and Omni).

Note 3: The above information was declared by manufacturer.

Note 4: For EUT 1:

Radio 1, 2: Maximum Directional Gain following KDB662911 D03. The antenna report is provided in the operational description for this application.

Radio 3: Maximum Directional Gain following KDB662911 D01.

For EUT 2: Maximum Directional Gain following KDB662911 D01.

For EUT 1

For Radio 2

For 2.4GHz:

For IEEE 802.11b/g/n/VHT/ax mode (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For Radio 1

For 5GHz UNII 1~3:

For IEEE 802.11a/n/ac/ax mode (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

**For Radio 2****For 5GHz UNII 1~2:****For IEEE 802.11a/n/ac/ax mode (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For Radio 3**For 6E UNII 5~8 (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For scanning Radio 4**For 2.4GHz:****For IEEE 802.11b/g/n/VHT/ax mode (1TX/2RX):****For 5GHz UNII 1~3:****For IEEE 802.11a/n/ac/ax mode (1TX/2RX):**

For 1TX

The EUT supports the antenna with TX diversity functions.

Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.

The Port 1 generated the worst case, so it was selected to test and record in the report.

For 2TX/2RX

The EUT supports the port 1 and port 2 with TX diversity function.

Port 1 generated the worst case than port 2, so it is tested and recorded in the report.

Port 1 and port 2 could receive simultaneously.

For Radio 5**Bluetooth (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

For EUT 2**For Radio 2****For 2.4GHz:****For IEEE 802.11b/g/n/VHT/ax mode (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.



For Radio 1

For 5GHz UNII 1~3:

For IEEE 802.11a/n/ac/ax mode (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For Radio 3: Disable by FW

For scanning Radio 4: Disable by FW

For Radio 5

Bluetooth (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

1.3 Table for Radio function

For EUT 1

Radio	WLAN 2.4GHz	5GHz UNII 1~2	5GHz UNII 1~3	6E (UNII 5~8)	Scanning radio (WLAN 2.4GHz / 5GHz UNII 1~3)	Bluetooth
1	-	-	V	-	-	-
2	V	V	-	-	-	-
3	-	-	-	V	-	-
4	-	-	-	-	V	-
5	-	-	-	-	-	V

For EUT 2

Radio	WLAN 2.4GHz	5GHz UNII 1~3	6E (UNII 5~8)	Scanning radio (WLAN 2.4GHz / 5GHz UNII 1~3)	Bluetooth
1	-	V	-	-	-
2	V	-	-	-	-
3	-	-	Disable by FW	-	-
4	-	-	-	Disable by FW	-
5	-	-	-	-	V

Note: The above information was declared by manufacturer.



1.4 Table for Multiple Listing

Model Name	EUT	Antenna	FEM of UNII high band of Radio 1	FEM of UNII low band of Radio 2	Radio 3 (6GHz)	Radio 4 (2.4/5GHz Scanning Radio)
AP45	1	Internal	V	V	V	V
AP45E	2	External	Removed	Removed	Disabled	Disabled

Note 1: FEM means Front End Module

Note 2: The above information was declared by manufacturer.

1.5 Accessories

Others
Antenna bracket*1 (Only for ant. 17 use)
Bracket*1

1.6 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at internal: 25 cm and external: 26 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For EUT 1

Radio 1

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.2G;D1D	6.44	25.90	32.34	0.50	32.84	1.92309	25	0.24485	1.00000
5.8G;D1D	6.67	26.92	33.59	0.50	34.09	2.56448	25	0.32651	1.00000

Radio 2

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;G1D	2.04	29.78	31.82	0.50	32.32	1.70608	25	0.21722	1.00000
5.2G;D1D	7.70	28.03	35.73	0.26	35.99	3.97192	25	0.50571	1.00000

Radio 3

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
6.2G;D1D	10.92	-	23.31	0.50	23.81	0.24044	25	0.03061	1.00000
6.4G;D1D	11.42	-	23.95	0.50	24.45	0.27861	25	0.03547	1.00000
6.7G;D1D	11.42	-	23.60	0.50	24.10	0.25704	25	0.03273	1.00000
7.0G;D1D	11.62	-	23.29	0.50	23.79	0.23933	25	0.03047	1.00000

Scanning radio 4

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;G1D	5.00	21.28	26.28	0.50	26.78	0.47643	25	0.06066	1.00000
5.2G;D1D	5.40	23.09	28.49	0.50	28.99	0.79250	25	0.10090	1.00000
5.8G;D1D	5.30	24.01	29.31	0.50	29.81	0.95719	25	0.12187	1.00000

Radio 5

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;BT-LE	4.50	7.93	12.43	0.50	12.93	0.01963	25	0.00250	1.00000

**For EUT 2****Radio 1**

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.2G;D1D	12.02	23.55	35.57	0.42	35.99	3.97192	26	0.46756	1.00000
5.8G;D1D	12.02	23.88	35.90	0.09	35.99	3.97192	26	0.46756	1.00000
5.2G;D1D	16.02	19.85	35.87	0.12	35.99	3.97192	26	0.46756	1.00000
5.8G;D1D	16.02	19.96	35.98	0.01	35.99	3.97192	26	0.46756	1.00000

Radio 2

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;D1D	10.02	23.99	34.01	0.50	34.51	2.82488	26	0.33253	1.00000
2.4G;D1D	14.02	21.95	35.97	0.02	35.99	3.97192	26	0.46756	1.00000

Radio 5

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;BT-LE	4.50	7.93	12.43	0.50	12.93	0.01963	26	0.00231	1.00000

Simultaneous Transmission Analysis Mode:

Test Mode 1: EUT 1-R1 5GHz band+R2 2.4GHz+R3 6E+R4 2.4GHz+R5 Bluetooth

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)	Ratio (S/Limit)
5.8G;D1D	6.67	26.92	33.59	0.50	34.09	2.56448	25	0.32651	1.00000	0.32651
2.4G;G1D	2.04	29.78	31.82	0.50	32.32	1.70608	25	0.21722	1.00000	0.21722
6.4G;D1D	11.42	-	23.95	0.50	24.45	0.27861	25	0.03547	1.00000	0.03547
2.4G;G1D	5.00	21.28	26.28	0.50	26.78	0.47643	25	0.06066	1.00000	0.06066
2.4G;BT-LE	4.50	7.93	12.43	0.50	12.93	0.01963	25	0.00250	1.00000	0.00250
									Sum Ratio	0.64236
									Ratio Limit	1

**Test Mode 2: EUT 1-R1 5GHz band+R2 2.4GHz+R3 6E+R4 5GHz+R5 Bluetooth**

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)	Ratio (S/Limit)
5.8G;D1D	6.67	26.92	33.59	0.50	34.09	2.56448	25	0.32651	1.00000	0.32651
2.4G;G1D	2.04	29.78	31.82	0.50	32.32	1.70608	25	0.21722	1.00000	0.21722
6.4G;D1D	11.42	-	23.95	0.50	24.45	0.27861	25	0.03547	1.00000	0.03547
5.8G;D1D	5.30	24.01	29.31	0.50	29.81	0.95719	25	0.12187	1.00000	0.12187
2.4G;BT-LE	4.50	7.93	12.43	0.50	12.93	0.01963	25	0.00250	1.00000	0.00250
									Sum Ratio	0.70357
									Ratio Limit	1

Test Mode 3: EUT 1-R1 5GHz high band+ R2 5GHz low band +R3 6E+R4 2.4GHz+R5 Bluetooth

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)	Ratio (S/Limit)
5.8G;D1D	6.67	26.92	33.59	0.50	34.09	2.56448	25	0.32651	1.00000	0.32651
5.2G;D1D	7.70	28.03	35.73	0.26	35.99	3.97192	25	0.50571	1.00000	0.50571
6.4G;D1D	11.42	-	23.95	0.50	24.45	0.27861	25	0.03547	1.00000	0.03547
2.4G;G1D	5.00	21.28	26.28	0.50	26.78	0.47643	25	0.06066	1.00000	0.06066
2.4G;BT-LE	4.50	7.93	12.43	0.50	12.93	0.01963	25	0.00250	1.00000	0.00250
									Sum Ratio	0.93085
									Ratio Limit	1

Test Mode 4: EUT 1-R1 5GHz high band+R2 5GHz low band+R3 6E+R4 5GHz+R5 Bluetooth

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)	Ratio (S/Limit)
5.8G;D1D	6.67	26.92	33.59	0.50	34.09	2.56448	25	0.32651	1.00000	0.32651
5.2G;D1D	7.70	28.03	35.73	0.26	35.99	3.97192	25	0.50571	1.00000	0.50571
6.4G;D1D	11.42	-	23.95	0.50	24.45	0.27861	25	0.03547	1.00000	0.03547
5.8G;D1D	5.30	24.01	29.31	0.50	29.81	0.95719	25	0.12187	1.00000	0.12187
2.4G;BT-LE	4.50	7.93	12.43	0.50	12.93	0.01963	25	0.00250	1.00000	0.00250
									Sum Ratio	0.99206
									Ratio Limit	1



Test Mode 5: EUT 2-R1 5GHz band (Ant. 16) + R2 2.4GHz (Ant. 16) + R5 Bluetooth (Ant. 15)

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)	Ratio (S/Limit)
5.8G;D1D	12.02	23.88	35.90	0.09	35.99	3.97192	26	0.46756	1.00000	0.46756
2.4G;D1D	10.02	23.99	34.01	0.50	34.51	2.82488	26	0.33253	1.00000	0.33253
2.4G;BT-LE	4.50	7.93	12.43	0.50	12.93	0.01963	26	0.00231	1.00000	0.00231
									Sum Ratio	0.80240
									Ratio Limit	1

Test Mode 6: EUT 2-R1 5GHz band (Ant. 17) + R2 2.4GHz (Ant. 17) + R5 Bluetooth (Ant. 15)

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)	Ratio (S/Limit)
5.8G;D1D	16.02	19.96	35.98	0.01	35.99	3.97192	26	0.46756	1.00000	0.46756
2.4G;D1D	14.02	21.95	35.97	0.02	35.99	3.97192	26	0.46756	1.00000	0.46756
2.4G;BT-LE	4.50	7.93	12.43	0.50	12.93	0.01963	26	0.00231	1.00000	0.00231
									Sum Ratio	0.93743
									Ratio Limit	1

Note: The above antenna gain was declared by manufacturer.

————THE END————