

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

 Report Reference No......
 MWR160118103

 FCC ID.....
 2AHBY-ET1

Compiled by

(position+printed name+signature)..: File administrators Martin Ao

Supervised by

(position+printed name+signature)... Test Engineer Yuchao Wang

Approved by

(position+printed name+signature)... Manager Dixon Hao

Date of issue...... Jan. 25, 2016

Representative Laboratory Name .: Maxwell International Co., Ltd.

Guangdong, China

Testing Laboratory Name Shenzhen CTL Testing Technology Co., Ltd.

Address Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,

Nanshan District, Shenzhen, China 518055

yuchao.wang

Applicant's name...... ALPHA EXPORT AND IMPORT CO.,LTD

Address 4D HUASHANG BUILDING, NORTH PORT RD, SHENZHEN

CHINA

Test specification:

Standard FCC Part 15.247: Operation within the bands 902-928 MHz,

2400-2483.5 MHz and 5725-5850 MHz

TRF Originator...... Maxwell International Co., Ltd.

Maxwell International Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Maxwell International Co., Ltd. as copyright owner and source of the material. Maxwell International Co., Ltd. takess no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Mobile Phone

Trade Mark ALPHARD

Manufacturer...... ALPHA EXPORT AND IMPORT CO.,LTD

Model/Type reference..... ET1

Listed Models ET2, ET3, ET4, ET5, ET6, ET7, ET8, ET9, ET10, ET11, ET12

 $Modulation \ Type GFSK, 8DPSK, \pi/4DQPSK$

Operation Frequency...... From 2402MHz to 2480MHz

Rating DC 3.70V

Hardware version V178 MB V2.0

 Page 2 of 50 Report No.: MWR160118103

TEST REPORT

Test Report No. :	MWR160118103	Jan. 25, 2016
	INIAN LION LIO 102	Date of issue

Equipment under Test : Mobile Phone

Model /Type : ET1

Listed Models : ET2, ET3, ET4, ET5, ET6, ET7, ET8, ET9, ET10, ET11,

ET12

Applicant : ALPHA EXPORT AND IMPORT CO.,LTD

Address : 4D HUASHANG BUILDING, NORTH PORT RD,

SHENZHEN CHINA

Manufacturer : ALPHA EXPORT AND IMPORT CO.,LTD

Address : 4D HUASHANG BUILDING, NORTH PORT RD,

SHENZHEN CHINA

Test Result: PASS

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u> </u>	TEST STANDARDS	<u> 4</u>
<u> </u>		
<u>2</u>	SUMMARY	<u>5</u>
2.1	General Remarks	5
2.2	Product Description	5
2.3	Equipment Under Test	6
2.4	Short description of the Equipment under Test (EUT)	6
2. 5	EUT operation mode	6
2.6	Internal Identification of AE used during the test	7
2.7	Related Submittal(s) / Grant (s)	7
2.8	Modifications	7
2.0	Modifications	,
<u>3</u>	TEST ENVIRONMENT	8
3.1	Address of the test laboratory	8
3.2	Test Facility	8
3.3	Environmental conditions	8
3.4	Test Conditions	8
3.5	Summary of measurement results	9
.6	Equipments Used during the Test	10
<u>.</u>	TEST CONDITIONS AND RESULTS	11
.1	AC Power Conducted Emission	11
.2	Radiated Emissions and Band Edge	14
.2 .3	Maximum Peak Output Power	22
. 3 .4	20dB Bandwidth	23
.5	Frequency Separation	27
.6	Number of hopping frequency	29
.7	Time of Occupancy (Dwell Time)	31
.8	Spurious RF Conducted Emission	35
.9	Pseudorandom Frequency Hopping Sequence	48
10	Antenna Requirement	49
<u>_</u>	TEST SETUP PHOTOS OF THE EUT	50
<u> </u>	EXTERNAL PHOTOS OF THE EUT	<u>50</u>
•	INTERNAL PHOTOS OF THE EUT	50
_		

1 TEST STANDARDS

The tests were performed according to following standards:

<u>FCC Rules Part 15.247</u>: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz. <u>ANSI C63.10-2013</u>: American National Standard for Testing Unlicensed Wireless Devices

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Jan. 11, 2016
Testing commenced on	:	Jan. 12, 2016
Testing concluded on	:	Jan. 25, 2016

2.2 Product Description

The **ALPHA EXPORT AND IMPORT CO.,LTD**'s Model: ET1 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Mobile Phone			
Model Number	ET1			
Modilation Type	GMSK for GSM/GPRS, 8-PSK for EDGE,QPSK for UMTS			
Antenna Type	Internal			
UMTS Operation Frequency Band	Device supported UMTS FDD Band V			
WLAN FCC Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz			
BT FCC Operation frequency	2402MHz-2480MHz			
HSDPA Release Version	Release 10			
HSUPA Release Version	Release 6			
DC-HSUPA Release Version	Not Supported			
WCDMA Release Version	R99			
WLAN FCC Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)			
BT Modulation Type	GFSK,8DPSK,π/4DQPSK(BT 3.0+EDR)			
Hardware version	V178 MB V2.0			
Software version	V2.0			
Android version	Android 4.4.2			
GPS function	Supported			
WLAN	Supported 802.11b/802.11g/802.11n			
Bluetooth	Supported BT 4.0/BT 3.0+EDR			
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE			
GSM/EDGE/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1			
GSM/EDGE/GPRS Operation Frequency	GSM850 :824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz			
GSM/EDGE/GPRS Operation Frequency Band	GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900			
GSM Release Version	R99			
GPRS/EDGE Multislot Class	GPRS/EDGE: Multi-slot Class 12			
Extreme temp. Tolerance	-30°C to +50°C			
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.70VDC)			
GPRS operation mode	Class B			

Page 6 of 50 Report No.: MWR160118103

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	0	120V / 60 Hz	0	115V / 60Hz
		0	12 V DC	0	24 V DC
		•	Other (specified in blank below)		

DC 3.70V

2.4 Short description of the Equipment under Test (EUT)

2.4.1 General Description

ET1 is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band I and Band V; The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band V and GSM850 and PCS1900 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

2.5 EUT operation mode

The EUT has been tested under typical operating condition. There are EDR (Enhanced Data Rate) and BDR (Basic Data Rate) mode. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. There are 79 channels of EUT, and the test carried out at the lowest channel, middle channel and highest channel.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467

Page 7 of 50 Report No.: MWR160118103

26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441		

2.6 Internal Identification of AE used during the test

AE ID*	Description
AE1	Charger

AE1

Model: GR∧ND

INPUT: AC180-240V~ 50/60Hz 0.15A

OUTPUT: DC 5.0V 1A

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AHBY-ET1** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.

^{*}AE ID: is used to identify the test sample in the lab internally.

Page 8 of 50 Report No.: MWR160118103

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4, CISPR 22/EN 55022 and CISPR16-4-1 SVSWR requirements.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4 Test Conditions

Took Coop	Test Conditions		
Test Case	Configuration	Description	
	Meas. Method	ANSI C63.10:2013	
20dB Emission	Test Environment	NTNV	
Bandwidth (EBW)	EUT Conf.	TM1_DH5_Ch00,TM1_DH5_Ch39,TM1_DH5_Ch78, TM3_3DH5_Ch00,TM3_3DH5_Ch39,TM3_3DH5_Ch78,	
Carrier Fraguency	Meas. Method	ANSI C63.10:2013	
Carrier Frequency Separation	Test Environment	NTNV	
Separation	EUT Conf.	TM1_DH5_Hop, TM3_3DH5_Hop,	
Number of Henning	Meas. Method	ANSI C63.10:2009	
Number of Hopping Channel	Test Environment	NTNV	
Chamilei	EUT Conf.	TM1_DH5_Hop,TM3_3DH5_Hop,	
Time of Occupancy	Meas. Method	ANSI C63.10:2009	
Time of Occupancy (Dwell Time)	Test Environment	NTNV	
(Dwell Tillle)	EUT Conf.	TM1_DH5_Ch39,TM3_3DH5_Ch39.	
	Meas. Method	ANSI C63.10:2013	
Maximum Peak	Test Environment	NTNV	
Conducted Output Power	EUT Conf.	TM1_DH3_Ch00,TM1_DH3_Ch39,TM1_DH3_Ch78,TM2 2DH3_Ch00,TM2_2DH3_Ch39,TM2_2DH3_Ch78,TM3	
Bandedge spurious Meas. Method		ANSI C63.10:2013	
emission	Test Environment	NTNV	
(Conducted and Radiated) EUT Conf.		TM1_DH3_Ch00,TM1_DH3_Ch78, TM1_DH3_Hop, TM3_3DH3_Ch00,TM3_3DH3_Ch78, TM2_3DH3_Hop,	

Page 9 of 50 Report No.: MWR160118103

	Meas. Method	ANSI C63.10:2013
Conducted RF Spurious	Test Environment	NTNV
Emission	EUT Conf.	TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, TM3_3DH5_Ch39, TM3_3DH5_Ch78.
Radiated Emissions in the Restricted Bands	Meas. Method	ANSI C63.10:2013 30 MHz to 1 GHz: Pre: RBW=100kHz; VBW=300kHz; Det. = Peak. Final: RBW=120kHz; Det. = CISPR Quasi-Peak. 1 GHz to 26.5GHz: Average: RBW=1 MHz; VBW= 10Hz; Det. = Peak; Sweep-time= Auto; Trace = Single. Peak: RBW=1 MHz; VBW= 3 MHz; Det. = Peak; Sweep-time= Auto; Trace≥ MaxHold * 100.
	Test Environment	NTNV
	EUT Conf.	30 MHz-1GHz TM1_DH5_Ch00 (Worst Conf.). 1-18 GHz: TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, (Worst Conf.).

Test Case	Test Conditions	
rest Case	Configuration	Description
AC Power Line Conducted Emissions	Measurement Method	AC mains conducted.
	Test Environment	NTNV
	EUT Configuration	TM1_DH5_Ch39. (Worst Conf.).

Note:

- 1. For Radiated Emissions, By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.
- 2. For $\pi/4$ QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worse case 8-DPSK and GFSK.

3.5 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Reco In Re	orded eport	Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	GFSK	☑ Lowest☑ Middle☑ Highest	GFSK	✓ Lowest✓ Middle✓ Highest	\boxtimes				complies
§15.247(e)	Power spectral density	-/-	-/-	-/-	-/-			\boxtimes		Not applicable for FHSS!
§15.247(a)(1)	Carrier Frequency separation	GFSK 8DPSK	⊠ Lowest ⊠ Middle ⊠ Highest	GFSK 8DPSK		\boxtimes				complies
§15.247(a)(1)	Number of Hopping channels	GFSK 8DPSK		GFSK 8DPSK		\boxtimes				complies
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK 8DPSK	☑ Lowest☑ Middle☑ Highest	GFSK 8DPSK	⊠ Middle	\boxtimes				complies
§15.247(a)(1)	Spectrum bandwidth of a FHSS system 20dB bandwidth	GFSK 8DPSK	 Lowest Middle Highest	GFSK 8DPSK	∠ Lowest∠ Middle∠ Highest	\boxtimes				complies
§15.247(b)(1)	Maximum output power	GFSK П/4DQPSK 8DPSK	⊠ Lowest ⊠ Middle ⊠ Highest	GFSK П/4DQPSK 8DPSK		\boxtimes				complies
§15.247(d)	Band edge compliance conducted	GFSK 8DPSK	✓ Lowest✓ Highest✓ Hopping	GFSK 8DPSK		\boxtimes				complies
§15.205	Band edge compliance radiated	GFSK 8DPSK	☑ Lowest☑ Highest☑ Hopping	GFSK		\boxtimes				complies

Page 10 of 50 Report No.: MWR160118103

§15.247(d)	TX spurious emissions conducted	GFSK 8DPSK	 Lowest Middle Highest	GFSK 8DPSK	 Lowest Middle Highest	\boxtimes		complies
§15.247(d)	TX spurious emissions radiated	GFSK 8DPSK	☑ Lowest☑ Middle☑ Highest	GFSK	 Lowest Middle Highest	\boxtimes		complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	\boxtimes		complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	GFSK	-/-	GFSK	-/-	\boxtimes		complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	GFSK	-/-	GFSK	-/-	\boxtimes		complies

Remark:

- The measurement uncertainty is not included in the test result.

 NA = Not Applicable; NP = Not Performed

 We tested all test mode and recorded worst case in report 1.
- 2.
- 3.


3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2015/06/02	2016/06/01
LISN	R&S	ESH2-Z5	860014/010	2015/06/02	2016/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	N9020A	MY49100067	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Temperature/ Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
High-Pass Filter	K&L	9SH10- 2700/X12750-O/O	N/A	2015/05/20	2016/05/19
High-Pass Filter	K&L	41H10- 1375/U12750-O/O	N/A	2015/05/20	2016/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2015/06/02	2016/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2015/06/02	2016/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2015/06/02	2016/06/01
RF Cable	Megalon	RF-A303	N/A	2015/06/02	2016/06/01
Power Sensor	R&S	NRP-Z4	823.3618.03	2015.06.02	2016.06.01
Power Meter	R&S	NRVS	1020.1809.02	2015.06.02	2016.06.01

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

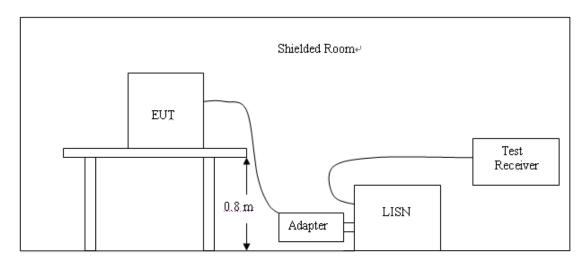

TEST PROCEDURE

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2. Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5. All support equipments received AC power from a second LISN, if any.
- 6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:


Eroguanav		Maximum RF Lin	e Voltage (dΒμV)			
Frequency (MHz)	CLA	SS A	CLA	SS B		
(IVITIZ)	Q.P.	Ave.	Q.P.	Ave.		
0.15 - 0.50	79	66	66-56*	56-46*		
0.50 - 5.00	73	60	56	46		
5.00 - 30.0	73	60	60	50		

^{*} Decreasing linearly with the logarithm of the frequency

TEST RESULTS

Note: We tested Conducted Emission of GFSK, $\pi/4$ DQPSK and 8DPSK mode from 0.15 KHz to 30MHz (DH1, DH3 and DH5) and all channels (low, middle and high), recorded the worst case data at GFSK DH5 middle channel.

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

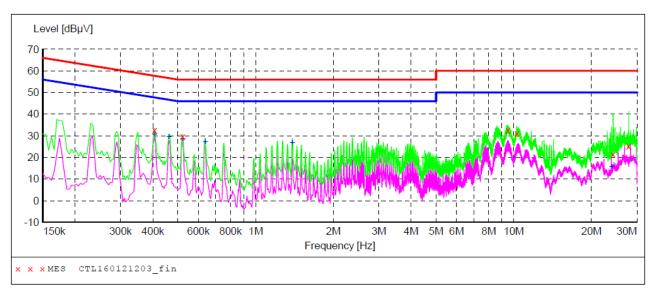


MEASUREMENT RESULT: "CTL160121203_fin"

1/21/2016	8:50PM						
Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.406000	32.60	10.6	58	25.1	QP	N	GND
0.522000	29.60	10.3	56	26.4	QP	N	GND
9.482000	32.50	10.7	60	27.5	QP	N	GND
10.294000	31.20	10.7	60	28.8	QP	N	GND
24.218000	21.40	11.1	60	38.6	QP	N	GND
27.866000	25.10	11.2	60	34.9	QP	N	GND

MEASUREMENT RESULT: "CTL160121203 fin2"

1/21/2016 8:	50PM						
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
MHz	dΒμV	dB	dBµV	dB			
0.406000	30.50	10.6	48	17.2	AV	N	GND
0.462000	29.40	10.4	47	17.3	AV	N	GND
0.522000	28.50	10.3	46	17.5	AV	N	GND
0.638000	27.00	10.4	46	19.0	AV	N	GND
1.386000	26.70	10.5	46	19.3	AV	N	GND
23.914000	15.60	11.1	50	34.4	AV	N	GND

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

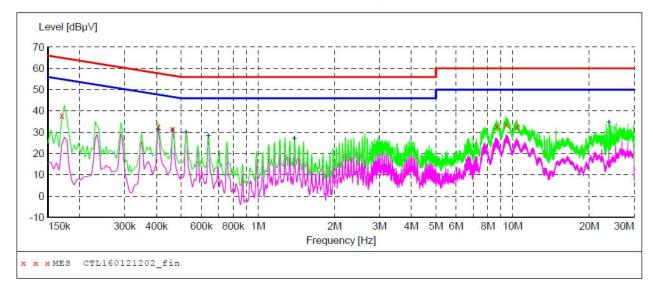

MEASUREMENT RESULT: "CTL160121202 fin"

1/21/2016	8:47PM						
Frequency MH:	•	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.17000	37.80	12.4	65	27.2	QP	L1	GND
0.40600	32.40	10.6	58	25.3	QP	L1	GND
0.46200	31.40	10.4	57	25.3	QP	L1	GND
8.67800	32.70	10.7	60	27.3	QP	L1	GND
9.43800	33.70	10.7	60	26.3	QP	L1	GND
10.42600	32.50	10.7	60	27.5	QP	L1	GND

MEASUREMENT RESULT: "CTL160121202 fin2"


47PM						
Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
31.20	10.6	48	16.5	AV	L1	GND
30.90	10.4	47	15.8	AV	L1	GND
30.00	10.3	46	16.0	AV	L1	GND
28.10	10.4	46	17.9	AV	L1	GND
26.90	10.5	46	19.1	AV	L1	GND
34.60	11.1	50	15.4	AV	L1	GND
	dBμV 31.20 30.90 30.00 28.10 26.90	Level Transd dB	Level Transd Limit dBµV dB dBµV 31.20 10.6 48 30.90 10.4 47 30.00 10.3 46 28.10 10.4 46 26.90 10.5 46	Level Transd Limit Margin dBμV dB dBμV dB dBμV dB 31.20 10.6 48 16.5 30.90 10.4 47 15.8 30.00 10.3 46 16.0 28.10 10.4 46 17.9 26.90 10.5 46 19.1	Level Transd dBμV Limit dBμV Margin dB Detector dB 31.20 10.6 48 16.5 AV 30.90 10.4 47 15.8 AV 30.00 10.3 46 16.0 AV 28.10 10.4 46 17.9 AV 26.90 10.5 46 19.1 AV	Level dBμV Transd dB dBμV Limit dB Margin dB Detector Line dBμV 31.20 10.6 48 16.5 AV L1 30.90 10.4 47 15.8 AV L1 30.00 10.3 46 16.0 AV L1 28.10 10.4 46 17.9 AV L1 26.90 10.5 46 19.1 AV L1

Page 14 of 50 Report No.: MWR160118103


4.2 Radiated Emissions and Band Edge

TEST CONFIGURATION


Frequency range 9 KHz - 30MHz

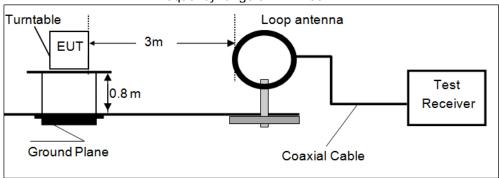

Frequency range 30MHz - 1000MHz

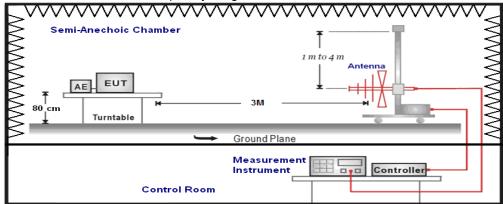

Frequency range above 1GHz-25GHz

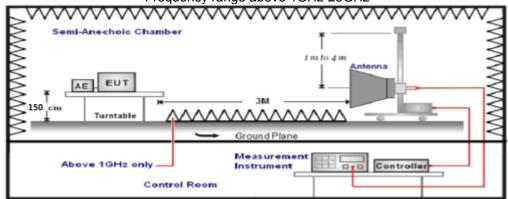

TEST PROCEDURE

- 1. The EUT was placed on a turn table which is 0.8m above ground plane for below 1GHz and 1.50m above ground plane for above 1GHz.
- 2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measurements have been completed.
- 5. The EUT minimum operation frequency was 32.768 KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9 KHz to 25GHz.
- 6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3

18GHz-25GHz	Horn Anternna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector	
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP	
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP	
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP	
	Peak Value: RBW=1MHz/VBW=3MHz,	Peak	
1GHz-40GHz	Sweep time=Auto	1 Call	
10112-400112	Average Value: RBW=1MHz/VBW=10Hz,		
	Sweep time=Auto	Peak	

More procudre as follows;

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- --- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- --- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- --- If the EUT is a floor standing device, it is placed on the ground.
- --- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- --- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- --- The measurement distance is 3 meter.
- --- The EUT was set into operation.

Premeasurement:

- --- The turntable rotates from 0° to 315° using 45° steps.
- --- The antenna height is 1.0 meter.
- --- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- --- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- --- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QP detector.
- --- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- --- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- --- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- --- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- --- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- --- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- --- The measurement distance is 3 meter.
- --- The EUT was set into operation.

Premeasurement:

- --- The turntable rotates from 0° to 315° using 45° steps.
- --- The antenna is polarized vertical and horizontal.
- --- The antenna height changes from 1 to 4 meter.
- --- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- --- The final measurement will be performed with minimum the six highest peaks.
- --- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position (± 45°) and antenna movement between 1 and 4 meter.
- --- The final measurement will be done with QP detector with an EMI receiver.

Page 16 of 50 Report No.: MWR160118103

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- --- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- --- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- --- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- --- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- --- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- --- The measurement distance is 3 meter.
- --- The EUT was set into operation.

Premeasurement:

- --- The turntable rotates from 0° to 315° using 45° steps.
- --- The antenna is polarized vertical and horizontal.
- --- The antenna height scan range is 1 meter to 2.5 meter.
- --- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- --- The final measurement will be performed with minimum the six highest peaks.
- --- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position (± 45°) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- --- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- --- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- --- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- --- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- --- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- --- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- --- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- --- The measurement distance is 1 meter.
- --- The EUT was set into operation.

Premeasurement:

--- The antenna is moved spherical over the EUT in different polarizations of the antenna. Final measurement:

- --- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- --- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency	FS	RA	AF	CL	AG	Transd
(MHz)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(dB)	(dB)
300.00	40	58.1	12.2	1.6	31.90	

Transd=AF +CL-AG

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	300	20log(2400/F(KHz))+80	2400/F(KHz)
0.49-1.705	30	20log(24000/F(KHz))+40	24000/F(KHz)
1.705-30	30	20log(30)+40	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark:

- 1. The radiated measurement are performed the each channel (low/mid/high) at all Packet type (DH1, DH3 and DH5) also for difference modulation type (GFSK, 8DPSK), recorded worst case at GFSK_DH5_Low channel (Channel 00) for below 1GHz and GFSK_DH5_Low channel (Channel 00), GFSK_DH5_Middle channel (Channel 39), GFSK_DH5_High channel (Channel 78).
- 2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.
- 3. HORN ANTENNA for the radiation emission test above 1G.
- 4. We tested both battery powered and powered by adapter charging mode at three orientate ones, recorded worst case at powered by adapter charging mode.
- 5. "---" means not recorded as emission levels lower than limit.
- 6. Margin= Limit Level

For 9KHz to 30MHz

I OI SIXIIZ TO SON	11 12				
Frequency (MHz)	Corrected Reading (dBµV/m)@3m	FCC Limit (dBµV/m) @3m	Margin (dB)	Detector	Result
15.26	48.59	69.54	20.95	QP	PASS
21.59	43.41	69.54	26.13	QP	PASS

For 30MHz to 1000MHz

Horizontal Polarization TABLE: "test (30M-1G)" Description: F: Stop Detector SWEEP TABLE: Short Descrip Field Strength Start Detector Transducer Meas. Frequency 30.0 MHz Frequency 1.0 GHz Time Bandw. MaxPeak Coupled 100 kHz VULB9163 Level [dBµV/m] 80 70 60 50 40 30 20 10 0 30M 300M 400M Frequency [Hz] CTL160121105_red CTL160121105_pre FCC ClassB F QP/AV x x x MES MES - LIM FCC ClassB, field strength 3m MEASUREMENT RESULT: "CTL160121105 red" 1/21/2016 8:57AM Level Limit Margin Frequency Transd Height Azimuth Polarization Det. cm deg MHz $\text{dB}\mu\text{V/m}$ dВ $dB\mu V/m$ dB 42.610000 28.90 -15.0 40.0 300.0 9.00 PK HORIZONTAL 156.10000 203.630000 215.270000 227.880000 28.90 29.40 31.40 30.30 31.90 34.80 14.1 12.1 13.2 14.1 216.00 239.00 229.00 239.00 -17.8 -14.7 43.5 PK PK 300.0 HORIZONTAL HORIZONTAL 43.5 100.0 100.0 100.0 -15.0 HORIZONTAL PK 46.0 -15.1 HORTZONTAL 952.470000 11.2 HORIZONTAL 135.00 Vertical Polarization SWEEP TABLE: "test (30M-1G)" Short Description: Fi Field Strength Meas. Stop Transducer Frequency 1.0 GHz Frequency Time Bandw. 30.0 MHz MaxPeak Coupled 100 kHz VIII.B9163 Level [dBµV/m] 80 70 60 50 40 30 20 10 O 50M 60M 70M 300M 30M Frequency [Hz] CTL160121106_red CTL160121106_pre FCC ClassB F QP/AV x x x MES MES FCC ClassB, field strength 3m MEASUREMENT RESULT: "CTL160121106_red" 1/21/2016 9:24AM Frequency Level Transd Limit Height Azimuth Polarization Margin Det. cm deg MHz $\text{dB}\mu\text{V/m}$ dВ dBµV/m dB 250.00 117.00 279.00 250.00 32.910000 40.0 100.0 VERTICAL 45.520000 60.070000 125.060000 143.490000 942.770000 5.5 10.2 13.2 13.7 11.8 100.0 100.0 100.0 100.0 34.50 29.80 30.30 29.80 -15.0 -15.7 -17.2 40.0 PK PK VERTICAL VERTICAL VERTICAL 43.5 PK -18.4 3.3 220.00 43.5 VERTICAL VERTICAL

For 1GHz to 25GHz

Note:We tested GFSK Mode and 8DPSK, rcorded the worst case at the GFSK (DH5) Mode.

	Frequency((MHz):		2402		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emissi Leve (dBuV/	I	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	89.56	PK			56.16	28.78	4.61	0.00	33.40
1	2402.00	80.25	ΑV			46.85	28.78	4.61	0.00	33.40
2	2390.00	37.45	PK	74	36.55	4.13	28.72	4.60	0.00	33.32
2	2390.00	I	ΑV	54		-		1		1
3	2400.00	37.26	PK	74	36.74	3.87	28.78	4.61	0.00	33.39
3	2400.00	-	ΑV	54				1		
4	4804.00	50.12	PK	74	23.88	45.61	33.49	6.91	35.89	4.51
4	4804.00	-	ΑV	54						
5	5075.50	42.54	PK	74	31.46	35.48	34.24	7.08	34.26	7.06
5	5075.50	I	ΑV	54				-		
6	7206.00	46.25	PK	74	27.75	35.14	36.95	9.18	35.03	11.11
6	7206.00	-	ΑV	54						

	Frequency(MHz):			240)2		Polarity:		VERTICAL	
No.	Frequency (MHz)	Emissi Leve (dBuV/	l	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	88.66	PK			55.26	28.78	4.61	0.00	33.40
1	2402.00	80.41	ΑV			47.01	28.78	4.61	0.00	33.40
2	2390.00	36.32	PK	74	37.68	3.00	28.72	4.60	0.00	33.32
2	2390.00		ΑV	54						
3	2400.00	37.85	PK	74	36.15	4.46	28.78	4.61	0.00	33.39
3	2400.00		ΑV	54						
4	4804.00	49.36	PK	74	24.64	44.85	33.49	6.91	35.89	4.51
4	4804.00		ΑV	54						
5	5315.75	42.41	PK	74	31.59	34.89	34.66	7.21	34.34	7.52
5	5315.75		ΑV	54						
6	7206.00	45.26	PK	74	28.74	34.15	36.95	9.18	35.03	11.11
6	7206.00		ΑV	54						

REMARKS:

- 1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 3. Margin value = Limit value- Emission level.
- 4. -- Mean the PK detector measured value is below average limit.
 5. The other emission levels were very low against the limit.
- 6. RBW=1MHz VBW=3MHz Peak detector is for PK value; RBW=1MHz VBW=10Hz Peak detector is for AV value.

	Frequency(2441		Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emissi Leve (dBuV/	l	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	89.41	PK			55.90	28.85	4.66	0.00	33.51
1	2441.00	80.14	ΑV			46.63	28.85	4.66	0.00	33.51
2	4505.50	38.65	PK	74	35.35	33.57	32.87	6.72	34.51	5.08
2	4505.50		ΑV	54						
3	4882.00	49.52	PK	74	24.48	43.26	33.60	6.95	34.30	6.26
3	4882.00		ΑV	54						
4	5211.75	40.45	PK	74	33.55	32.86	34.55	7.15	34.11	7.59
4	5211.75		ΑV	54						
5	7323.00	45.20	PK	74	28.8	33.50	37.46	9.23	35.00	11.70
5	7323.00		ΑV	54						

	Frequency((MHz):		244	11		Polarity:		VERTI	CAL
No.	Frequency (MHz)	Emissi Leve (dBuV/	l	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	88.32	PK			54.81	28.85	4.66	0.00	33.51
1	2441.00	80.21	ΑV			46.70	28.85	4.66	0.00	33.51
2	4105.75	38.45	PK	74	35.55	33.92	32.81	6.46	34.74	4.53
2	4105.75		ΑV	54						
3	4882.00	49.32	PK	74	24.68	43.06	33.60	6.95	34.30	6.26
3	4882.00		ΑV	54						
4	5055.50	40.22	PK	74	33.78	33.18	34.17	7.06	34.20	7.04
4	5055.50		ΑV	54						
5	7323.00	45.41	PK	74	28.59	33.71	37.46	9.23	35.00	11.70
5	7323.00		ΑV	54						

REMARKS:

- 1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 3. Margin value = Limit value- Emission level.
- 4. -- Mean the PK detector measured value is below average limit.
 5. The other emission levels were very low against the limit.
- 6. RBW=1MHz VBW=3MHz Peak detector is for PK value; RBW=1MHz VBW=10Hz Peak detector is for AV value.

	Frequency(MHz):		2480			Polarity:		HORIZONTAL	
No.	Frequency (MHz)	Emissi Leve (dBuV/	l	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	88.65	PK			55.03	28.92	4.70	0.00	33.62
1	2480.00	80.41	ΑV			46.79	28.92	4.70	0.00	33.62
2	2483.50	39.25	PK	74	34.75	5.62	28.93	4.70	0.00	33.63
2	2483.50		ΑV	54						
3	2500.00	37.26	PK	74	36.74	3.58	28.96	4.72	0.00	33.68
3	2500.00		ΑV	54						
4	4960.00	49.68	PK	74	24.32	44.76	33.84	7.00	35.92	4.92
4	4960.00		ΑV	54						
5	5122.50	44.25	PK	74	29.75	37.05	34.38	7.10	34.27	7.20
5	5122.50		ΑV	54						
6	7440.00	45.12	PK	74	28.88	33.17	37.64	9.28	34.97	11.95
6	7440.00		ΑV	54						

	Frequency(MHz):			248	30	I	Polarity:		VERTI	CAL
No.	Frequency (MHz)	Emissi Leve (dBuV/	l	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	89.63	PK			56.01	28.92	4.70	0.00	33.62
1	2480.00	80.45	ΑV			46.83	28.92	4.70	0.00	33.62
2	2483.50	39.22	PK	74	34.78	5.59	28.93	4.70	0.00	33.63
2	2483.50		ΑV	54						
3	2500.00	36.98	PK	74	37.02	3.30	28.96	4.72	0.00	33.68
3	2500.00	1	ΑV	54	1	-				
4	4960.00	49.75	PK	74	24.25	44.83	33.84	7.00	35.92	4.92
4	4960.00		ΑV	54						
5	5175.75	44.20	PK	74	29.8	36.88	34.49	7.13	34.29	7.32
5	5175.75		ΑV	54						
6	7440.00	45.49	PK	74	28.51	33.54	37.64	9.28	34.97	11.95
6	7440.00		ΑV	54						

REMARKS:

- 1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Limit value- Emission level.
 -- Mean the PK detector measured value is below average limit.
 The other emission levels were very low against the limit.
- 6. RBW=1MHz VBW=3MHz Peak detector is for PK value; RBW=1MHz VBW=10Hz Peak detector is for AV value.

Page 22 of 50 Report No.: MWR160118103

4.3 Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to ANSI C63.10:2013 Maximum peak conducted output power: Connent antenna port into power meter and reading Peak values.

LIMIT

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

TEST RESULTS

Remark: We test maximum peak output power at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5

4.3.1 GFSK Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	4.59	30	PASS
39	2441	4.67	30	PASS
78	2480	4.36	30	PASS

Note:

4.3.2 π/4 DQPSK Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	4.02	30	PASS
39	2441	4.13	30	PASS
78	2480	4.25	30	PASS

Note:

4.3.3 8DPSK Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	3.99	30	PASS
39	2441	4.00	30	PASS
78	2480	3.75	30	PASS

Note:


1. The test results including the cable lose.

^{1.} The test results including the cable lose.

^{1.} The test results including the cable lose.

4.4 20dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

LIMIT

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwith.

TEST RESULTS

4.4.1 GFSK Test Mode

A. Test Verdict

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot	Limits (MHz)	Verdict
00	2402	0.8258	Plot 4.4.1 A	/	PASS
39	2441	0.8261	Plot 4.4.1 B	/	PASS
78	2480	0.8219	Plot 4.4.1 C	1	PASS

Note: 1. The test results including the cable lose.



(Plot 4.4.1 A: Channel 00: 2402MHz @ GFSK)



(Plot 4.4.1 B: Channel 39: 2441MHz @ GFSK)

STATUS RF Alignment Failure



(Plot 4.4.1 C: Channel 78: 2480MHz @ GFSK)

4.4.2 8DPSKTest Mode

A. Test Verdict

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot	Limits (MHz)	Verdict
00	2402	1.1159	Plot 4.4.2 A	1	PASS
39	2441	1.1160	Plot 4.4.2 B	1	PASS
78	2480	1.1159	Plot 4.4.2 C	1	PASS

Note: 1.The test results including the cable lose.



(Plot 4.4.2 A: Channel 00: 2402MHz @ 8DPSK)




(Plot 4.4.2 B: Channel 39: 2441MHz @ 8DPSK)



(Plot 4.4.2 C: Channel 78: 2480MHz @ 8DPSK)

4.5 Frequency Separation

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz.

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

TEST RESULTS

Remark: 1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5) and all test channels, recorded worst case at DH5 and middle channel.

4.5.1 GFSK Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Channel Separation (MHz)	Refer to Plot	Limits (MHz)	Verdict
38	2440			25KHz or the	
39	2441	1.002	Plot 4.6.1 A	2/3*20dB bandwidth	PASS



(Plot 4.6.1 A: Channel 39: 2441MHz @ GFSK)

4.5.2 8DPSK Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Channel Separation (MHz)	Refer to Plot	Limits (MHz)	Verdict
38	2440			25KHz or the	
39	2441	1.002	Plot 4.6.2 A	2/3*20dB bandwidth	PASS



(Plot 4.6.2 A: Channel 39: 2441MHz @ 8DPSK)

4.6 Number of hopping frequency

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=100 KHz and VBW=300 KHz.

LIMIT

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

TEST RESULTS

Remark: 1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5.

4.6.1 GFSK Test Mode

A. Test Verdict

Hopping Channel Frequency Range (MHz)	Number of Hopping Channel	Refer to Plot	Limit	Verdict
2400-2483.5	79	Plot 4.7.1 A1	≥15	PASS



(Plot 4.7.1 A1: @ GFSK)

4.6.2 8DPSK Test Mode

A. Test Verdict

Hopping Channel Frequency Range (MHz)	Number of Hopping Channel	Refer to Plot	Limit	Verdict
2400-2483.5	79	Plot 4.7.2 A1	≥15	PASS



(Plot 4.7.2 A1: @ 8DPSK)

Page 31 of 50 Report No.: MWR160118103

4.7 Time of Occupancy (Dwell Time)

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=3MHz, Span=0Hz.

LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST RESULTS

The Dwell Time=Burst Width*Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation: 0.4[s]*hopping number=0.4[s]*79[ch]=31.6[s*ch];

The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.

The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is 1600/6=266.67 [ch*hop/s] The hops per second on one channel: 266.67 [ch*hops/s]/79 [ch]=3.38 [hop/s];

The total hops for all channels within the dwell time calculation duration: 3.38 [hop/s]*31.6[s*ch]=106.67 [hop*ch];

The dwell time for all channels hopping: 106.67 [hop*ch]*Burst Width [ms/hop/ch].

Remark: 1. We test Frequency Separation at all test channels, recorded worst case at middle channel.

A. Test Verdict

4.7.1 GFSK Test Mode

Mode	Frequency (MHz)	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Refer to Plot	Verdict	
DH1	2441	0.386	0.124	0.4	Plot 4.8.1 A	PASS	
ВП	Note: Dwell tin	ne=Pulse time (r	ns) × (1600 ÷ 2	÷ 79) ×31.6 Sec	ond		
DH3	2441	1.644	0.263	0.4	Plot 4.8.1 B	PASS	
рпз	Note: Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second						
DH5	2441	2.910	0.310	0.4	Plot 4.8.1 C	PASS	
рпэ	Note: Dwell tin	Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second					

4.7.2 8DPSK Test Mode

Mode	Frequency (MHz)	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Refer to Plot	Verdict
DH1	2441	0.385	0.123	0.4	Plot 4.8.2 A	PASS
וחט	Note: Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second					
DH3	2441	1.647	0.264	0.4	Plot 4.8.2 B	PASS
סחט	Note: Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second					
DH5	2441	2.905	0.310	0.4	Plot 4.8.2 C	PASS
рпэ	Note: Dwell tin	ne=Pulse Time (ms) × (1600 ÷ 6	÷ 79) ×31.6 Sec	cond	

(Plot 4.8.1.A: Channel 39: 2441MHz @ GFSK @ DH1)

STATUS RF Alignment Failure

#VBW 3.0 MHz



(Plot 4.8.1.B: Channel 39: 2441MHz @ GFSK @ DH3)

(Plot 4.8.1.C: Channel 39: 2441MHz @ GFSK @ DH5)

STATUS RF Alignment Failure

#VBW 3.0 MHz




(Plot 4.8.2.A: Channel 39: 2441MHz @ 8DPSK @ DH1)

(Plot 4.8.2.B: Channel 39: 2441MHz @ 8DPSK @ DH3)

#VBW 3.0 MHz

Sweep 3.000 ms (1001 pts)

STATUS RF Alignment Failure

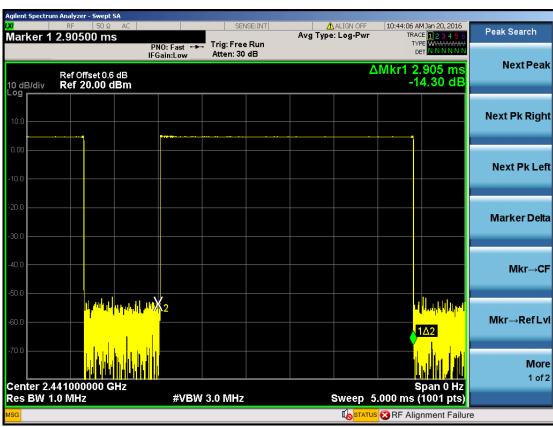

(Plot 4.8.2.C: Channel 39: 2441MHz @ 8DPSK @ DH5)

4.8 Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measurement frequency range from 9KHz to 26.5GHz.

LIMIT

- 1. Below -20dB of the highest emission level in operating band.
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

TEST RESULTS

Remark:

- 1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5.
- 2.For 9KHz -30MHz, Because there was only background, So We did not recorded data.

4.8.1 GFSK Test Mode


A. Test Verdict

Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
		2.402 GHz	Plot 4.9.1 A1		PASS
00	2402	30MHz-3GHz	Plot 4.9.1 A2	-20	PASS
	3GHz-25GHz	Plot 4.9.1 A3	-20	PASS	
		2.441 GHz	Plot 4.9.1 B1		PASS
39	2441	30MHz-3GHz	Plot 4.9.1 B2	-20	PASS
	3GHz-25GHz	Plot 4.9.1 B3	-20	PASS	
		2.480 GHz	Plot 4.9.1 C1		PASS
78	2480	30MHz-3GHz	Plot 4.9.1 C2	-20	PASS
		3GHz-25GHz	Plot 4.9.1 C3	-20	PASS

Conducted	Left Band edge hoping on	Plot 4.9.1 D1	-20	PASS
bandedge	Right Band edge hoping on	Plot 4.9.1 D2	-20	PASS

Note:

- 1. The test results including the cable lose.
- 2. For conducted bandedge both hoping mode and non-hoping mode were test ,and worst case recorded at hoping mode.
- B. Test Plots

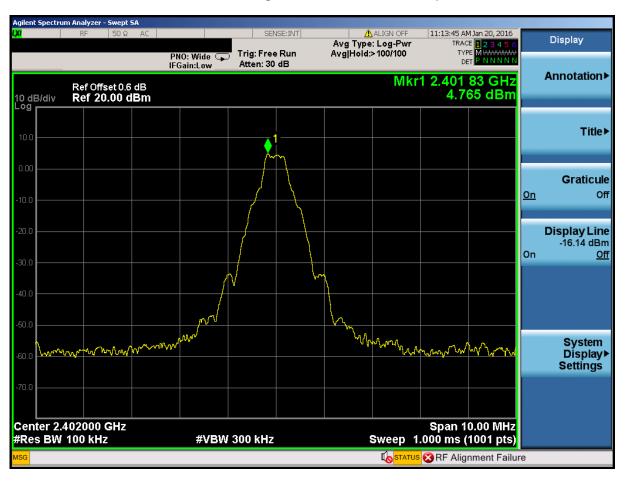


(Plot 4.9.1 A1: Channel 00: 2402MHz @ GFSK)




(Plot 4.9.1 A2: Channel 00: 2402MHz @ GFSK)



(Plot 4.9.1 A3: Channel 00: 2402MHz @ GFSK)

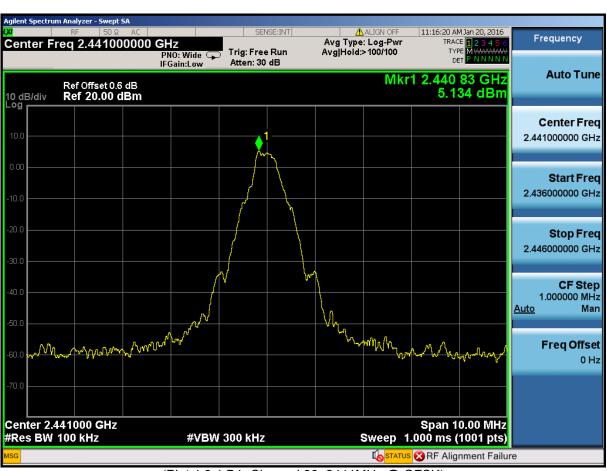

(Plot 4.9.1 B1: Channel 39: 2441MHz @ GFSK)

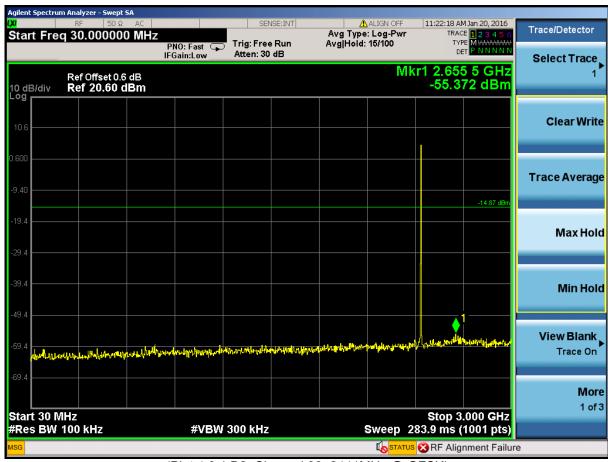


(Plot 4.9.1 B2: Channel 39: 2441MHz @ GFSK)



(Plot 4.9.1 B3: Channel 39: 2441MHz @ GFSK)




(Plot 4.9.1 C1: Channel 78: 2480MHz @ GFSK)

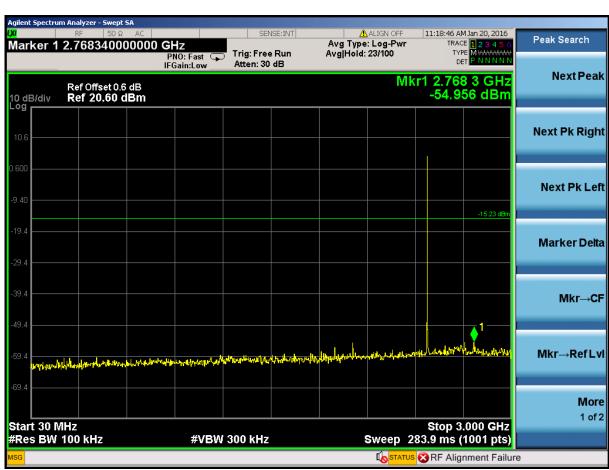


(Plot 4.9.1 C2: Channel 78: 2480MHz @ GFSK)



(Plot 4.9.1 C3: Channel 78: 2480MHz @ GFSK)

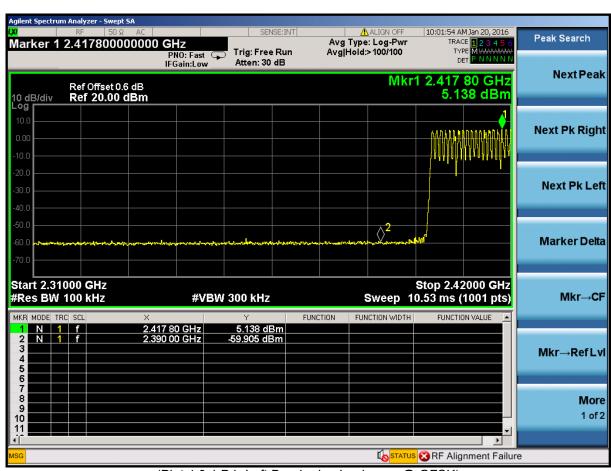

(Plot 4.9.1 D1: Left Band edge hoping on @ GFSK)

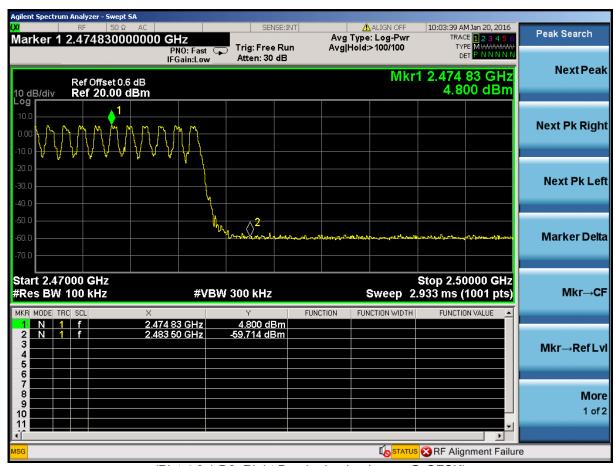

(Plot 4.9.1 D2: Right Band edge hoping on @ GFSK)

4.8.2 8DPSK Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
		2.402 GHz	Plot 4.9.2 A1		PASS
00	2402	30MHz-3GHz	Plot 4.9.2 A2	-20	PASS
		3GHz-25GHz	Plot 4.9.2 A3	-20	PASS
39	2441	2.441 GHz	Plot 4.9.2 B1		PASS
		30MHz-3GHz	Plot 4.9.2 B2	-20	PASS
		3GHz-25GHz	Plot 4.9.2 B3	-20	PASS
78	2480	2.480 GHz	Plot 4.9.2 C1		PASS
		30MHz-3GHz	Plot 4.9.2 C2	-20	PASS
		3GHz-25GHz	Plot 4.9.2 C3	-20	PASS

Conducted	Left Band edge hoping on	Plot 4.9.2 D1	-20	PASS
bandedge	Right Band edge hoping on	Plot 4.9.2 D2	-20	PASS

Note:

- 1. The test results including the cable lose.
- 2. For conducted bandedge both hoping mode and non-hoping mode were test ,and worst case recorded at hoping mode.

B. Test Plots



(Plot 4.9.2 A1: Channel 00: 2402MHz @ 8DPSK)




(Plot 4.9.2 A2: Channel 00: 2402MHz @ @ 8DPSK)



(Plot 4.9.2 A3: Channel 00: 2402MHz @ @ 8DPSK)




(Plot 4.9.2 B1: Channel 39: 2441MHz @ @ 8DPSK)

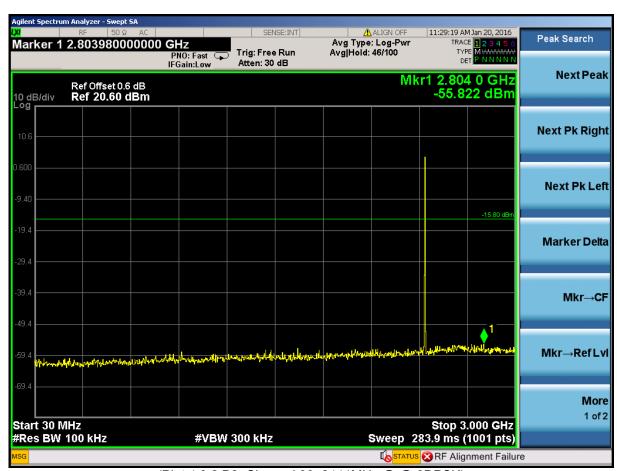

(Plot 4.9.2 B2: Channel 39: 2441 MHz @ @ 8DPSK)



(Plot 4.9.2 B3: Channel 39: 2441MHz @ @ 8DPSK)

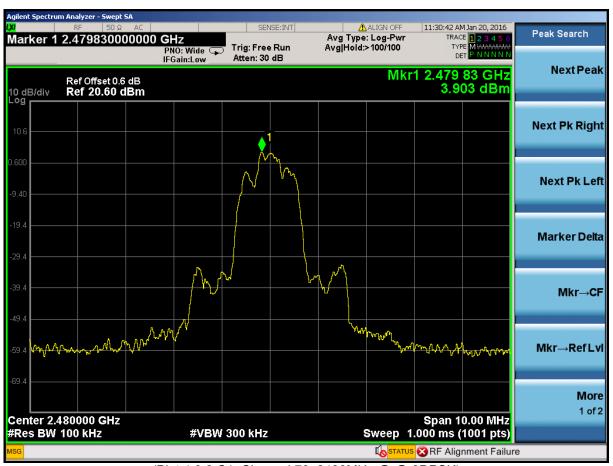


(Plot 4.9.2 C1: Channel 78: 2480MHz @ @ 8DPSK)




(Plot 4.9.2 C2: Channel 78: 2480MHz @ @ 8DPSK)



(Plot 4.9.2 C3: Channel 78: 2480MHz @ @ 8DPSK)

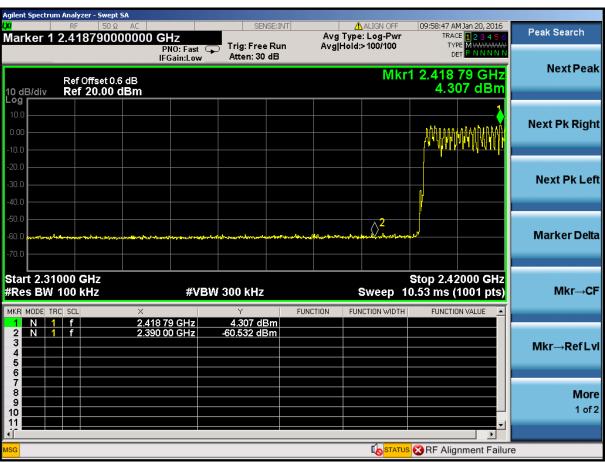

(Plot 4.9.2 D1: Left Band edge hoping on @ 8DPSK)

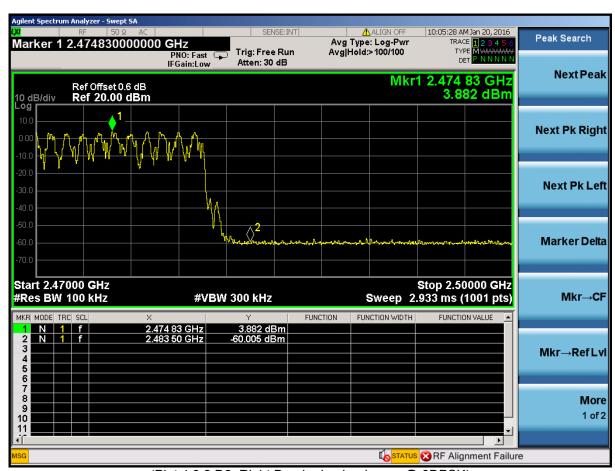

(Plot 4.9.2 D2: Right Band edge hoping on @ 8DPSK)

Report No.: MWR160118103

4.9 Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a)(1) requirement:

Frequency hopping systems shall have hopping channel carrier fre-quencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Al-ternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier fre-quencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo ran-domly ordered list of hopping fre-quencies. Each frequency must be used equally on the average by each trans-mitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their cor-responding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nice-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the frist stage. The sequence begins with the frist one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An explame of pseudorandom frequency hopping sequence as follows:



Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

4.10 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

Conducted power refer ANSI C63.10 :2013 Output power test procedure for frequency-hopping spreadspectrum (FHSS) devices

Radiated power refer to ANSI C63.10:2013 Radiated emissions tests.

Measurement parameters

Measurement parameter		
Detector:	Peak	
Sweep time:	Auto	
Resolution bandwidth:	1MHz	
Video bandwidth:	3MHz	
Trace-Mode:	Max hold	

Limits

FCC	IC			
Antenna Gain				
6 0	dBi			

Results

T _{nom}	V_{nom}	Lowest Channel 2402 MHz	Middle Channel 2441 MHz	Highest Channel 2480 MHz
Conducted power [dBm] Measured with GFSK modulation		4.52	4.61	4.29
Radiated power [dBm] Measured with GFSK modulation		3.61	4.24	4.01
	[dBi] ılated	-0.91	-0.37	-0.28
Measuremer	nt uncertainty	± 0.6	dB (cond.) / ± 2.56 dB	(rad.)

Report No.: MWR160118103

5 Test Setup Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

6	External	Photos	of the	EUT
---	----------	--------	--------	-----

Please refer to separated files for External Photos of the EUT.

7 Internal Photos of the EU

Please refer to separated files for Internal Photos of the EUT.
End of Report