

**Label material spec :** "Blank Label\_Serilux gloss white or Grey, 35MM X 14MM (RoHs)  
B-423 POLYESTER Comply to PGJI2 or PGDQ2 Marking & Labeling  
System"

Fasson white polyester

**Glue Specs :** Fasson S333 - High initial tack, ultimate adhesion and low adhesive ooze.


Type : Emulsion acrylic

Service temp range : -40 to +150 deg C

**Ribbon :** Thermal transfer ribbon : Resin eg : Zebra5095 or equivalent

Printing to withstand -40 to +150 deg C

Print must withstand Petroleum resistant

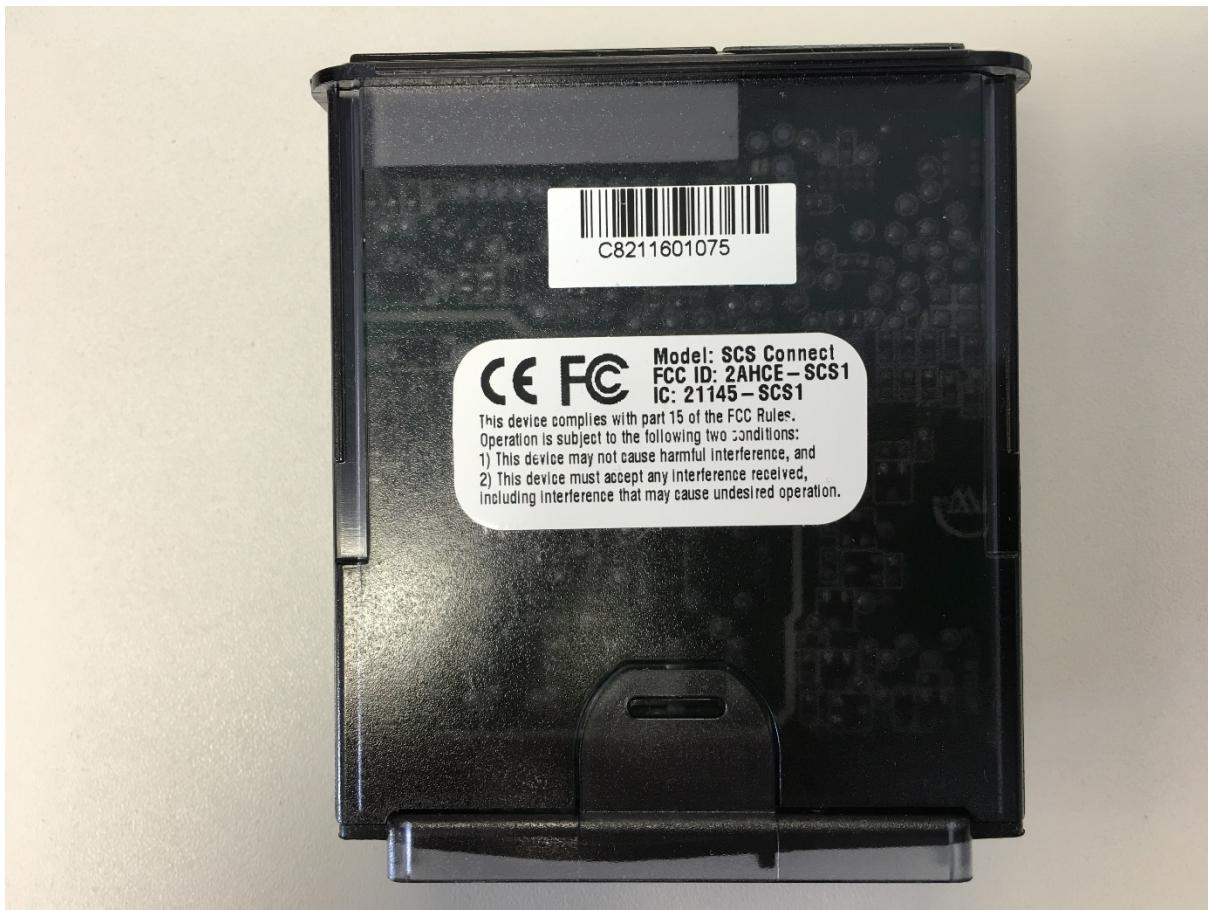



Model: SCS Connect  
FCC ID: 2AHCE-SCS1  
IC: 21145-SCS1

This device complies with part 15 of the FCC Rules.  
Operation is subject to the following two conditions:  
1) This device may not cause harmful interference, and  
2) This device must accept any interference received,  
including interference that may cause undesired operation.

