

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan  
District Shenzhen, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM151200759301  
Page: 1 of 20

## FCC Test Report

**Application No.:** SZEM1512007593PS

**Applicant:** Dong Guan Arun Industrial Co., Ltd

**Manufacturer/Factory:** Dong Guan Arun Industrial Co., Ltd

**Equipment Under Test (EUT):**

**EUT Name:** WIRELESS CHARGER

**Model No.:** WX0001

**Trade Mark:** ABS, ARUN

**FCC ID:** 2AHCLWX0001

**Standards:** 47 CFR PART 18: 2015

**Date of Receipt:** 2015-12-09

**Date of Test:** 2015-12-30 to 2016-01-14

**Date of Issue:** 2016-01-19

<b>Test Result :</b>	<b>PASS*</b>
----------------------	--------------

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

## 2 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Conducted Emission (150 kHz to 30 MHz)	47 CFR PART 18: 2015	FCC OST/ MP-5:1986	18.307(a)	Pass
Radiated Emission (9 kHz to 30MHz)	47 CFR PART 18: 2015	FCC OST/ MP-5:1986	18.305(b)	Pass

### **3 Contents**

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION.....</b>	<b>4</b>
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF EUT .....	4
4.3 DESCRIPTION OF SUPPORT UNITS .....	4
4.4 TEST LOCATION .....	5
4.5 TEST FACILITY.....	5
4.6 DEVIATION FROM STANDARDS.....	5
4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
<b>5 EQUIPMENT LIST .....</b>	<b>6</b>
<b>6 TEST RESULTS.....</b>	<b>8</b>
6.1 CONDUCTED EMISSIONS.....	8
6.2 RADIATED EMISSIONS .....	12
<b>7 PHOTOGRAPHS .....</b>	<b>16</b>
7.1 CONDUCTED EMISSION TEST SETUP .....	16
7.2 RADIATED EMISSION TEST SETUP .....	16
7.3 EUT CONSTRUCTIONAL DETAILS.....	17-20

## 4 General Information

### 4.1 Client Information

Applicant:	Dong Guan Arun Industrial Co., Ltd
Address of Applicant:	NO.18, Xinfeng Street, Changlong Village, HuangjiangTown, Dongguan City GuangDong
Manufacturer:	Dong Guan Arun Industrial Co., Ltd
Address of Manufacturer:	NO.18, Xinfeng Street, Changlong Village, HuangjiangTown, Dongguan City GuangDong
Factory:	Dong Guan Arun Industrial Co., Ltd
Address of Factory:	NO.18, Xinfeng Street, Changlong Village, HuangjiangTown, Dongguan City GuangDong

### 4.2 General Description of EUT

Product Name:	WIRELESS CHARGER
Model No.:	WX0001
Trade Mark:	ABS, ARUN
Sample Type:	Wireless charger
Operation Frequency:	110kHz-205kHz
Power Supply:	Input voltage: DC 5V 2A Output voltage: DC 5V 0.7A
Test Voltage:	AC 120V 60Hz
USB Cable:	150cm unshielded

### 4.3 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Cement resistor	Supplied by SGS	REF. No.:SEA0600
Adapter	Apple	A1357 W010A051
Wireless charging receiver	Supplied by client	N/A

#### **4.4 Test Location**

Only the Radiate emission(9kHz-30MHz) was test in SGS GZ, the other tests were performed at:  
SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,  
No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China  
518057.

Tel: +86 755 2601 2053      Fax: +86 755 2671 0594

#### **4.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- Industry Canada (IC)**

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

#### **4.6 Deviation from Standards**

None.

#### **4.7 Abnormalities from Standard Conditions**

None.

## 5 Equipment List

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2016-05-13
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2016-10-09
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2016-05-13
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	EMC0120	2016-08-30
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	EMC0121	2016-08-30
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2016-08-30
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2016-05-13
8	Coaxial Cable	SGS	N/A	SEL0025	2016-05-13


RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEL0303	2016-08-01
2	EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESCI	SEL0175	2016-05-13
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0288	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0275	2016-05-13
6	Coaxial cable	SGS	N/A	SEL0274	2016-05-13
7	BiConiLog Antenna (30M-1GHz)	Schwarzbeck	VULB9160	SEL0309	2018-10-17
8	Pre-amplifier	Sonoma Instrument Co	310N	SEL0298	2016-05-13
9	Loop Antenna	ETS-LINDGREN	6502	SEL0802	2016-08-14

General used equipment					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Humidity/ Temperature Indicator	Shang Hai Meteorological Industry Factory	ZJ1-2B	SEL0101	2016-10-12
2	Humidity/ Temperature Indicator	Shang Hai Meteorological Industry Factory	ZJ1-2B	SEL0102	2016-10-12
3	Humidity/ Temperature Indicator	Shang Hai Meteorological Industry Factory	ZJ1-2B	SEL0103	2016-10-12
4	Barometer	Chang Chun Meteorological Industry Factory	DYM3	SEL0088	2016-05-13

## 6 Test Results

### 6.1 Conducted Emissions


Test Requirement:	47 CFR PART 18		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"><li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li><li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li><li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li><li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li><li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement.</li></ol>		

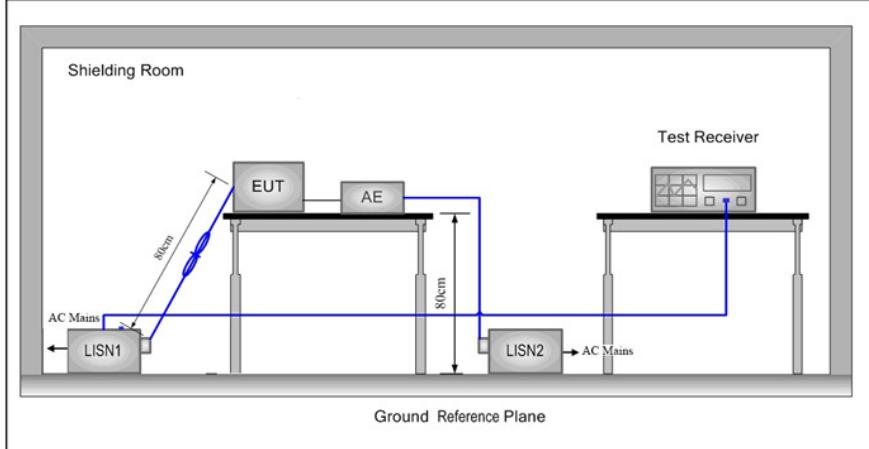Test Setup:	 <p>The diagram illustrates the test setup within a 'Shielding Room'. On the left, a 'EUT' (Equipment Under Test) is connected to an 'AE' (Antenna Equipment) and an 'LISN1' (Line Impedance Stabilization Network) which is connected to 'AC Mains'. On the right, a 'Test Receiver' is connected to an 'LISN2' (Line Impedance Stabilization Network) which is also connected to 'AC Mains'. A 'Ground Reference Plane' is indicated at the bottom. A blue line represents the signal path from the EUT to the Test Receiver, with a distance of '80cm' marked. A blue arrow indicates the signal path from the LISN1 to the LISN2.</p>
Test Mode:	Wireless charge mode. Keep EUT charging with full load and half load to find the worst cass. The compliance test performed at full load since no worst case was found.
Instruments Used:	Refer to section 5 for details
Test Results:	Pass

### Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

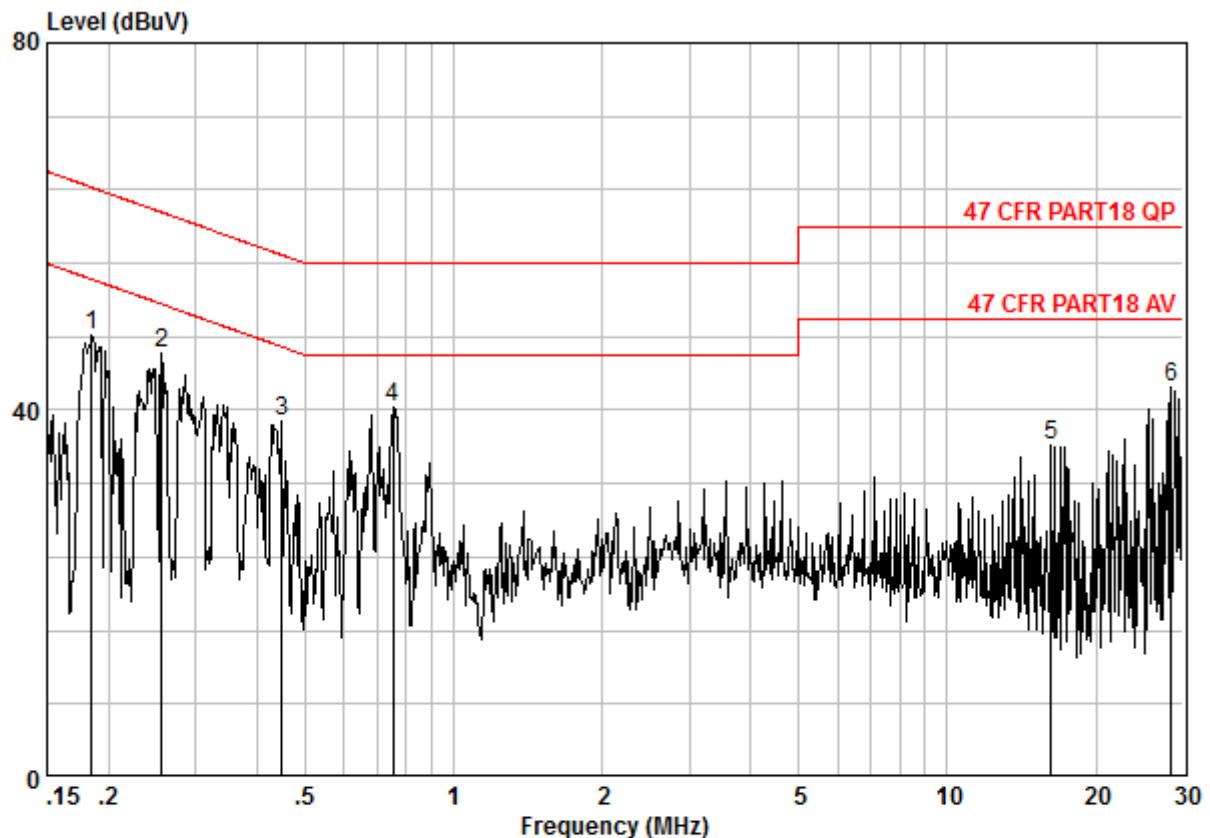**Live Line:**


Site : Shielding Room  
 Condition : 47 CFR PART18 AV CE LINE  
 Job No. : 7593PS  
 Test Mode : a

	Freq	Cable	LISN	Read	Limit	Over	Remark
		Loss	Factor	Level	Level	Line	
	MHz	dB	dB	dBuV	dBuV	dBuV	dB
1	0.18443	0.02	9.60	38.54	48.16	54.28	-6.13 Peak
2	0.25615	0.02	9.60	36.50	46.11	51.56	-5.45 Peak
3	0.44916	0.01	9.59	29.15	38.75	46.89	-8.14 Peak
4	0.75493	0.02	9.60	30.60	40.22	46.00	-5.78 Peak
5	16.226	0.02	9.77	26.41	36.20	50.00	-13.80 Peak
6	28.452	0.03	9.89	32.68	42.60	50.00	-7.40 Peak

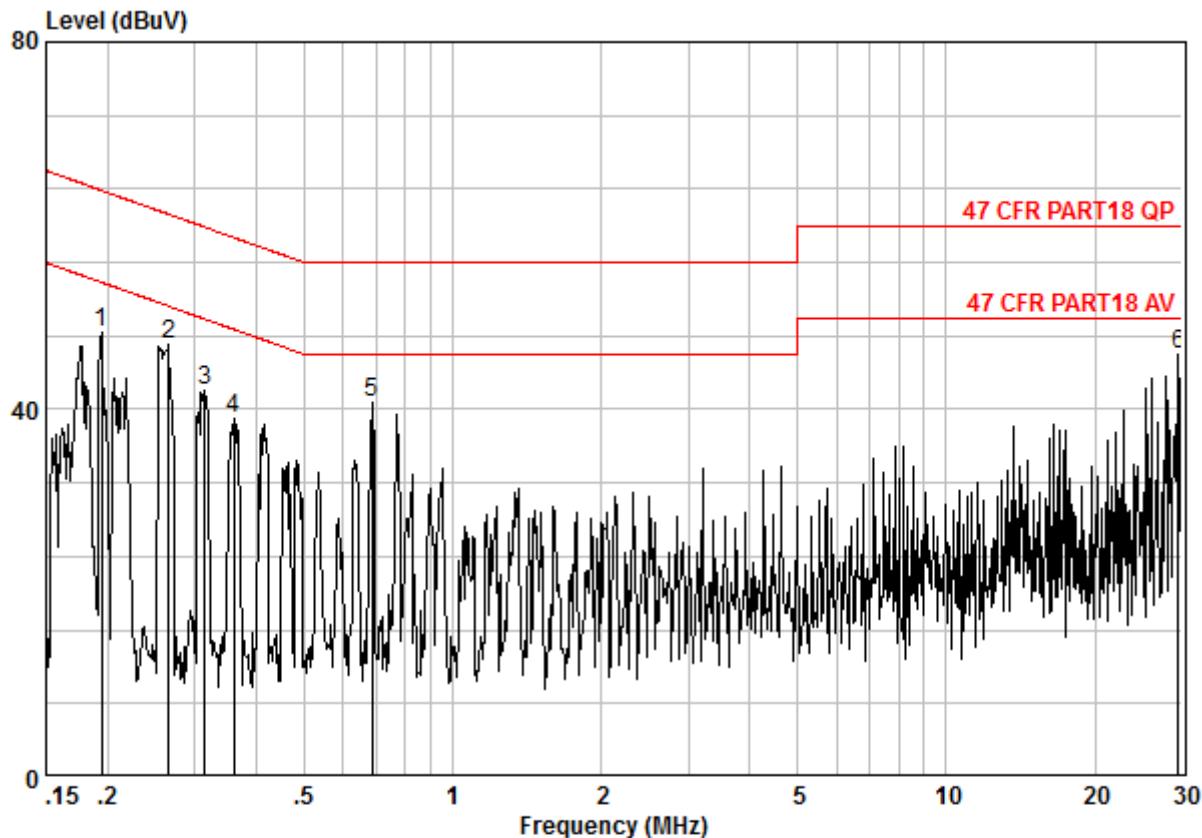**Neutral Line:**

Site : Shielding Room  
Condition : 47 CFR PART18 AV CE NEUTRAL  
Job No. : 7593PS  
Test Mode : a

	Freq	Cable	LISN	Read	Limit	Over	Remark	
		Freq	Loss	Factor	Level	Level	Line	Limit
1	0.19447	0.02	9.62	38.71	48.35	53.84	-5.50	Peak
2 @	0.26583	0.01	9.61	37.37	47.00	51.25	-4.25	Peak
3	0.31495	0.01	9.62	32.53	42.16	49.84	-7.68	Peak
4	0.35955	0.01	9.62	29.37	39.00	48.74	-9.74	Peak
5 @	0.68626	0.02	9.63	31.01	40.66	46.00	-5.34	Peak
6 @	29.527	0.03	10.22	35.70	45.95	50.00	-4.05	Peak




## 6.2 Radiated Emissions

Test Requirement:	47 CFR PART 18			
Test Site:	Measurement Distance: 10m (Semi-Anechoic Chamber)			
Receiver Setup:	Frequency	Detector	RBW	VBW
	9kHz~150kHz	Quasi-peak	200Hz	≥RBW
	150kHz~30MHz	Quasi-peak	9kHz	≥RBW
	30MHz~1GHz	Quasi-peak	100kHz	≥RBW
Limit:	Frequency	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009-30MHz	53.0	Quasi-peak	10
	30MHz-88MHz	40.0	Quasi-peak	3
	88MHz-216MHz	43.5	Quasi-peak	3
	216MHz-1000MHz	46.0	Quasi-peak	3
Remark: According to the article 18.305(b), The operating frequency is non-ISM frequency; the RF Power generated by equipment is below 500(watts); According to the clause 18.305(c), the EUT belongs to Consumer equipment.				
Test Setup:				
Figure 1. Below 30MHz				
Figure 2. 30MHz to 1GHz				
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber(30MHz-1000MHz) and 10 meter semi-anechoic chamber(9kHz-30MHz). The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters(30MHz-1000MHz) and 10 meter(9kHz-30MHz) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>Above 30MHz: The Analyzer/Receiver scanned from 30MHz to 1000MHz. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>Below 30MHz: The Analyzer/Receiver scanned from 9kHz to 30MHz. The antenna height is 2 meters above the ground to determine the maximum value of the field strength.</li> </ol>			


	<p>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 2 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>h. Repeat above procedures until all frequencies measured was complete.</p> <p>i. Measurement Requirement: According to the clause 18.305(c)notes 2. At frequencies at or above 30MHz: <math display="block">\text{Limit3m(dBuV)} = \text{Limitxm(dBuV)} + 20\log(xm/3m)</math> At frequencies below 30MHz: <math display="block">\text{Limit10m(dBuV)} = \text{Limitxm(dBuV)} + 20\log(xm/3m)</math> Remark: x replace the number 10,30,300.</p>
Test Mode:	Wireless charge mode. Keep EUT charging with full load and half load to find the worst case. The compliance test performed at full load since no worst case was found.
Instruments Used:	Refer to section 5 for details
Test Results:	Pass

0.009MHz-30MHz

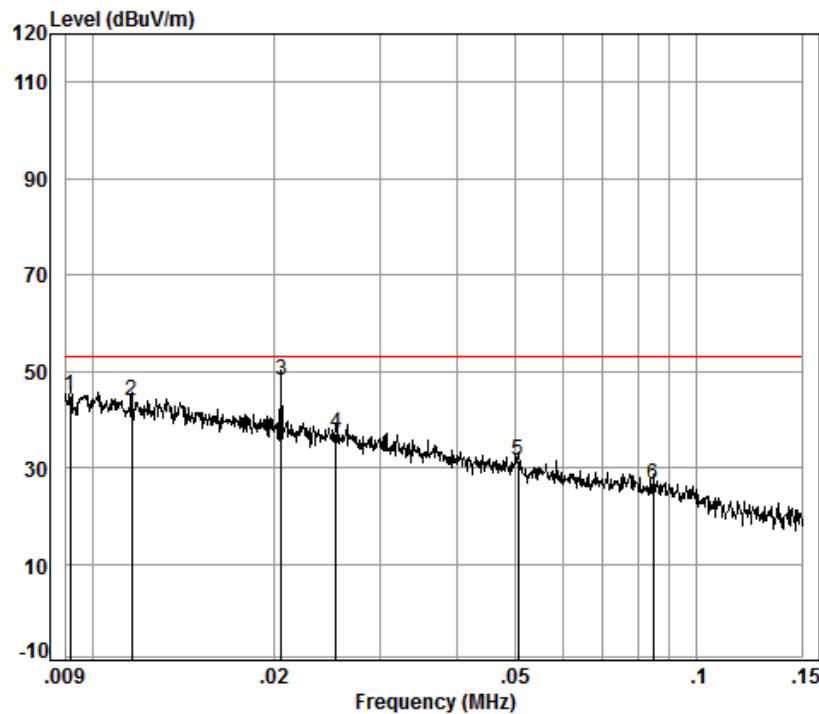

Condition: 10m  
Job No. : 7593CR  
Test Mode: a

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit
					MHz	dB	
						dB/m	dB
1	0.01	0.30	21.80	0.00	22.63	44.73	53.06 -8.33
2	0.01	0.27	20.73	0.00	22.70	43.70	53.06 -9.36
3 pp	0.02	0.21	16.78	0.00	31.20	48.19	53.06 -4.87
4	0.03	0.19	15.83	0.00	21.10	37.12	53.06 -15.94
5	0.05	0.12	12.71	0.00	18.50	31.33	53.06 -21.73
6	0.08	0.07	12.94	0.00	13.59	26.60	53.06 -26.46

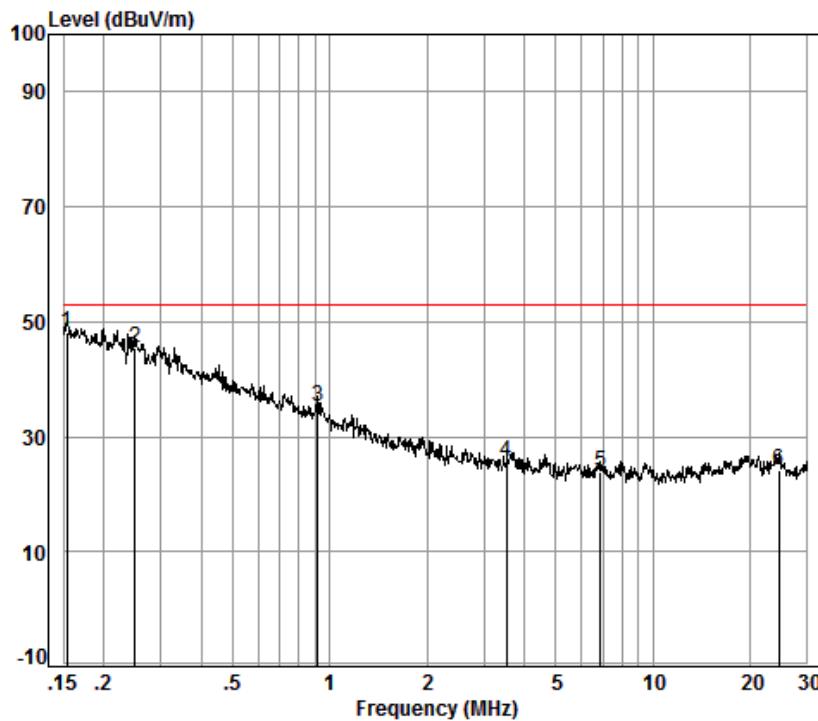

Condition: 10m  
Job No. : 7593CR  
Test Mode: a

Freq	Cable	Ant	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	0.15	0.07	12.80	0.00	35.42	48.29	53.06	-4.77
2	0.25	0.08	12.80	0.00	32.66	45.54	53.06	-7.52
3	0.92	0.22	12.74	0.00	22.18	35.14	53.06	-17.92
4	3.53	0.39	12.09	0.00	13.15	25.63	53.06	-27.43
5	6.88	0.46	10.82	0.00	12.51	23.79	53.06	-29.27
6	24.40	0.73	10.09	0.00	13.32	24.14	53.06	-28.92

Remark:

1:The loop antenna rotated about both Vertical and Horizontal to find the maximum emission,So only the worst position(Horizontal) was report.

2:According to the clause 2.3 of MP-5:1986, the hightest frequency is 205kHz, So the Range of frequency measurements is 9kHz to 30MHz.


## 7 Photographs

Test Model No.: WX0001

### 7.1 Conducted Emission Test Setup



### 7.2 Radiated Emission Test Setup

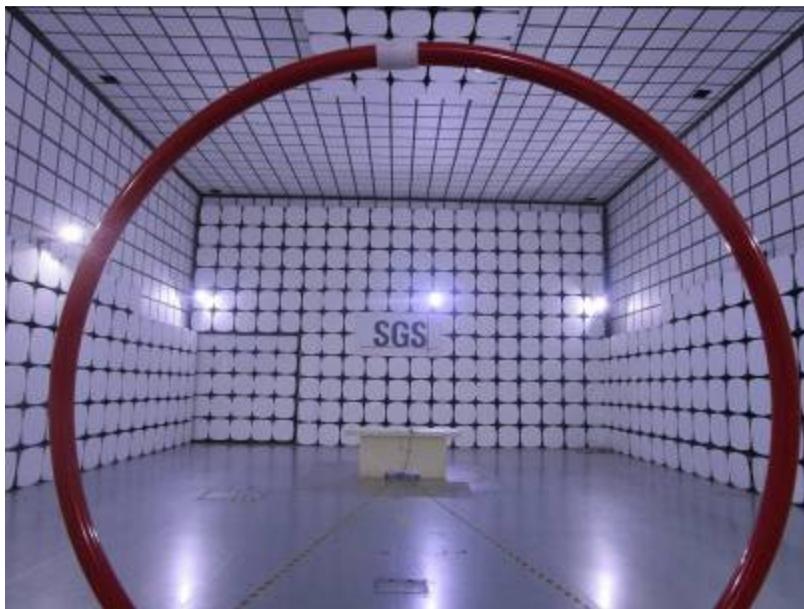

### 7.3 EUT Constructional Details

