



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



# TEST REPORT

**Applicant: AKUVOX (XIAMEN) NETWORKS CO., LTD.**

Address: 10/F, No.56, Software Park II , Xiamen, China

**FCC ID: 2AHCR-IT82X869**

**Product Name: Indoor Monitor**

**Model Number: IT82A(869)**

**Standard(s): 47 CFR Part 15, Subpart C(15.231)  
ANSI C63.10-2013**

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number: CR21110022-00C**

**Date Of Issue: 2022-06-29**

**Reviewed By: Sun Zhong**

*Sun Zhong*

Title: Manager

**Test Laboratory: China Certification ICT Co., Ltd (Dongguan)**

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China  
Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

<b>TEST FACILITY .....</b>	<b>2</b>
<b>DECLARATIONS.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>4</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>	<b>5</b>
1.2.1 EUT Operation Condition:.....	5
1.2.2 Support Equipment List and Details .....	5
1.2.3 Support Cable List and Details .....	5
1.2.4 Block Diagram of Test Setup.....	6
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>10</b>
<b>3.1 AC LINE CONDUCTED EMISSIONS .....</b>	<b>10</b>
3.1.1 Applicable Standard.....	10
3.1.2 EUT Setup.....	11
3.1.3 EMI Test Receiver Setup .....	11
3.1.4 Test Procedure .....	12
3.1.5 Corrected Amplitude & Margin Calculation.	12
<b>3.2 RADIATION SPURIOUS EMISSIONS .....</b>	<b>13</b>
3.2.1 Applicable Standard.....	13
3.2.2 EUT Setup.....	14
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....	15
3.2.4 Test Procedure .....	15
3.2.5 Corrected Amplitude & Margin Calculation.	15
<b>3.3 20 DB EMISSION BANDWIDTH: .....</b>	<b>16</b>
3.3.1 Applicable Standard.....	16
3.3.2 EUT Setup.....	16
3.3.3 Test Procedure .....	16
<b>3.4 DEACTIVATION TESTING.....</b>	<b>17</b>
3.4.1 Applicable Standard.....	17
3.4.2 EUT Setup.....	17
3.4.3 Test Procedure .....	17
<b>3.5 ANTENNA REQUIREMENT.....</b>	<b>18</b>
3.5.1 Applicable Standard.....	18
3.5.2 Judgment.....	18
<b>4. Test DATA AND RESULTS .....</b>	<b>19</b>
<b>4.1 AC LINE CONDUCTED EMISSIONS .....</b>	<b>19</b>
<b>4.2 RADIATION SPURIOUS EMISSIONS .....</b>	<b>24</b>
<b>4.3 20 DB EMISSION BANDWIDTH: .....</b>	<b>28</b>
<b>4.4 DEACTIVATION TESTING: .....</b>	<b>30</b>

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	Indoor Monitor
<b>EUT Model:</b>	IT82A(869)
<b>Operation Frequency:</b>	869 MHz
<b>Modulation Type:</b>	Lora
<b>Rated Input Voltage:</b>	DC 12V from adapter or 48V from POE
<b>Serial Number:</b>	CR21110022-RF-S1
<b>EUT Received Date:</b>	2021.11.18
<b>EUT Received Status:</b>	Good

### Antenna Information Detail▲:

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range	§15.203 Requirement
AKUVOX (XIAMEN) NETWORKS CO., LTD.	PCB	FPC	0 dBi/868~869MHz	Compliance

The Method of §15.203 Compliance:

Antenna must be permanently attached to the unit.  
 Antenna must use a unique type of connector to attach to the EUT.  
 Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### Accessory Information:

No.

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
<b>Equipment Modifications:</b>	No
<b>EUT Exercise Software:</b>	No
Engineering Mode was provided by manufacturer ▲. The maximum power was configured default setting.	

### 1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Ktec	Adapter	KSAS0121200100D5NS K	E215890
Akuvox	PoE Adapter	CN-05	CR21110022-RF-S2
TaoTimeClub	Load	100W40RJ	L03
TaoTimeClub	Load	100W40RJ	L02
TOTO LINK	Router	X5000R	X5000RK9T0560


### 1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	Yes	No	3	EUT	Router
RJ45 Cable	Yes	No	3	POE	Router
RJ45 Cable	No	No	1.2	EUT	PoE Adapter
Power Cable	Yes	No	1.4	EUT	Adapter
Cable	No	No	3	EUT	Load
Cable	No	No	3	EUT	Load


### 1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

Adapter mode:

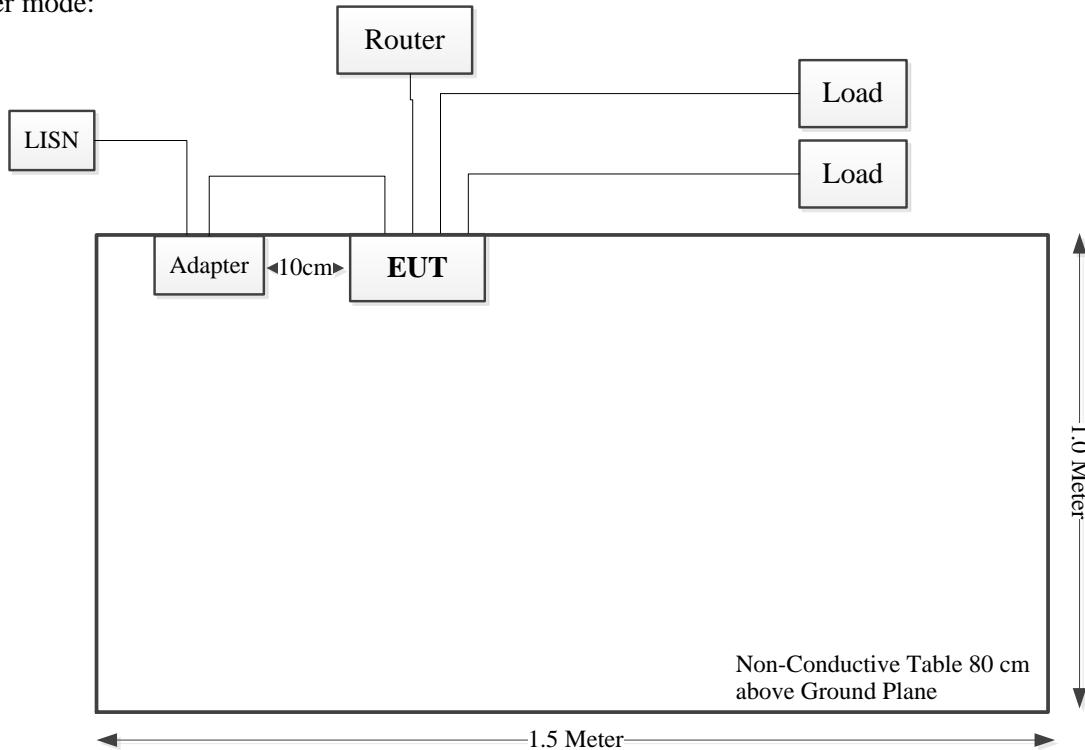


POE adapter mode:

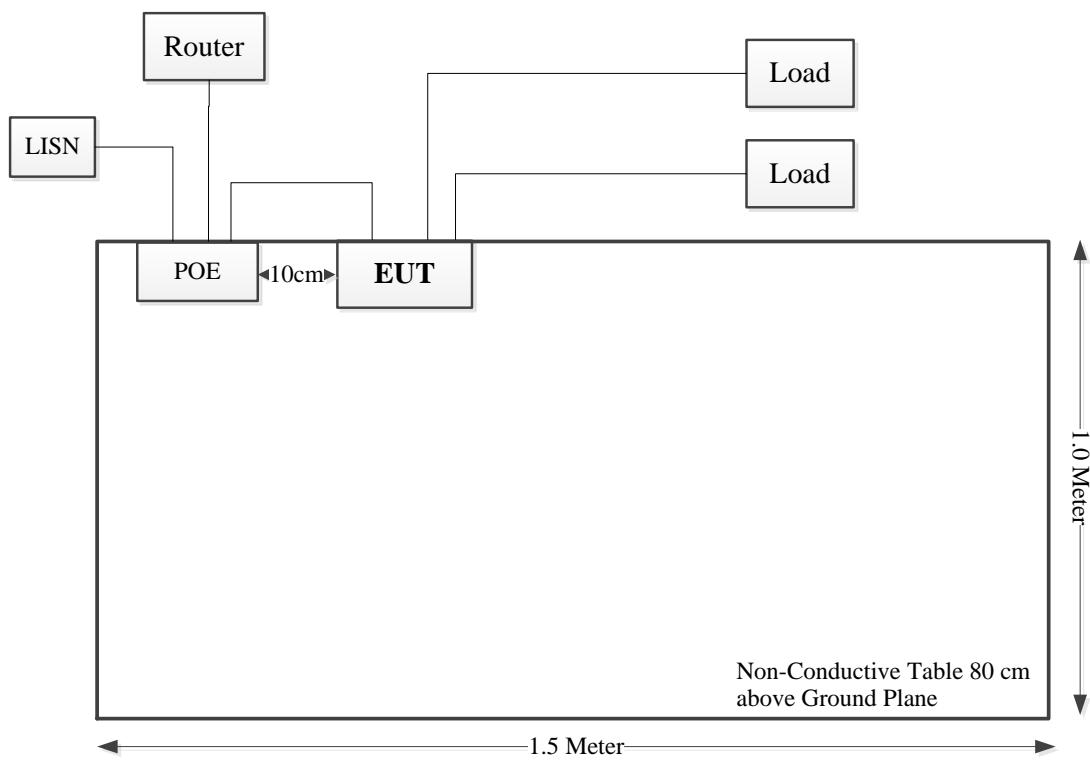

Radiated Spurious emissions:

Below 1GHz:

Adapter mode:

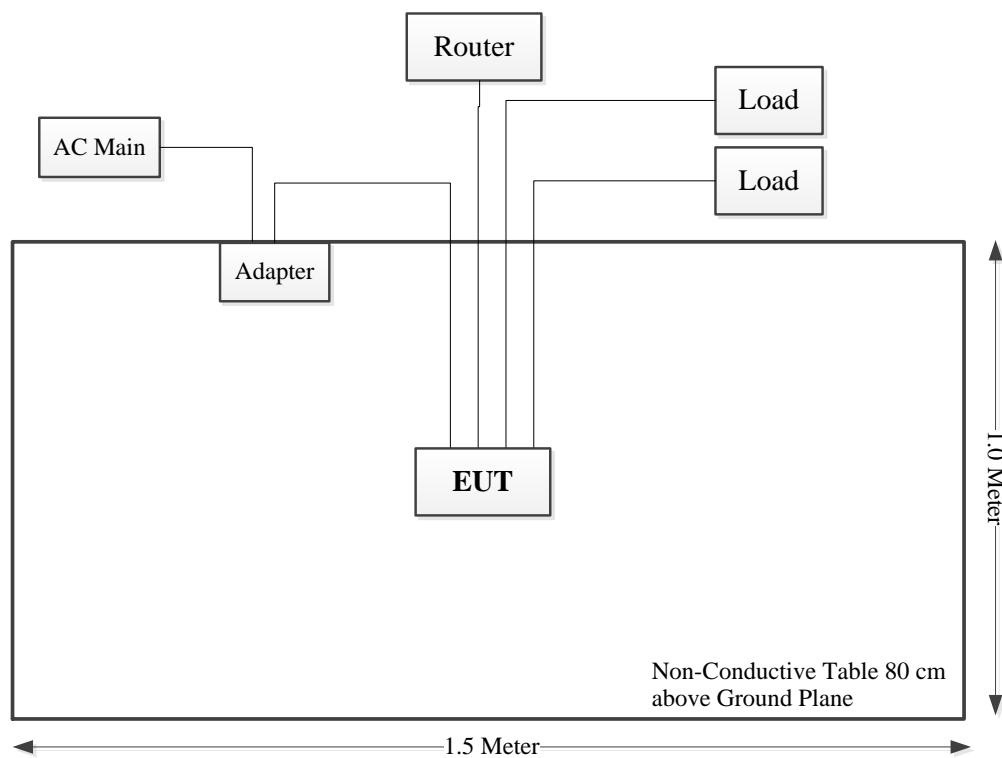

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	$\pm 1.26$ dB
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

## 2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.231 (b)	Radiated Emissions	Compliance
§15.231 (c)	20dB Bandwidth	Compliance
§15.231 (a)	Deactivation Testing	Compliance
§15.203	Antenna Requirement	Compliance

### **3. REQUIREMENTS AND TEST PROCEDURES**

#### **3.1 AC Line Conducted Emissions**

##### **3.1.1 Applicable Standard**

FCC §15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtainig their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### 3.1.2 EUT Setup

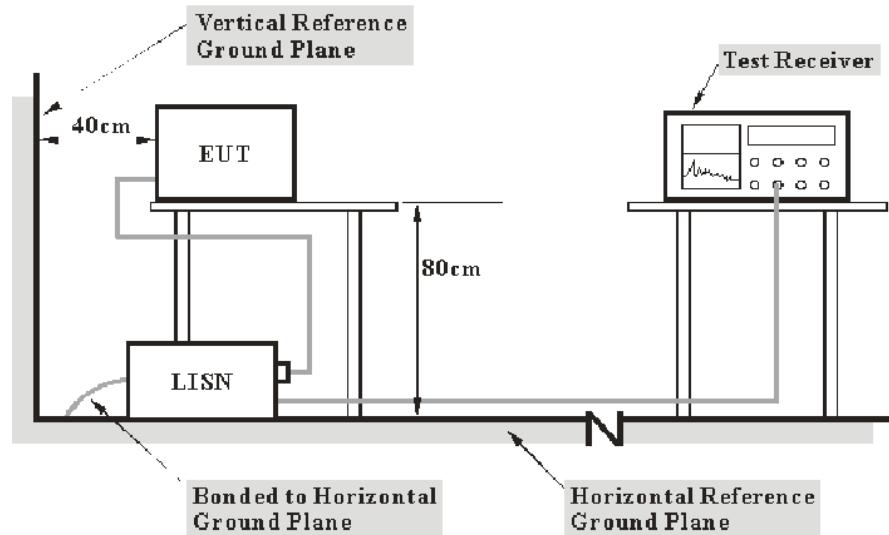

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

### 3.2 Radiation Spurious Emissions

#### 3.2.1 Applicable Standard

FCC §15.231 (b);

In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:


Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	<sup>1</sup> 1,250 to 3,750	<sup>1</sup> 125 to 375
174-260	3,750	375
260-470	<sup>1</sup> 3,750 to 12,500	<sup>1</sup> 375 to 1,250
Above 470	12,500	1,250

<sup>1</sup>Linear interpolations.


- (1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.
- (2) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in §15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.
- (3) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

### 3.2.2 EUT Setup

#### Below 1GHz:

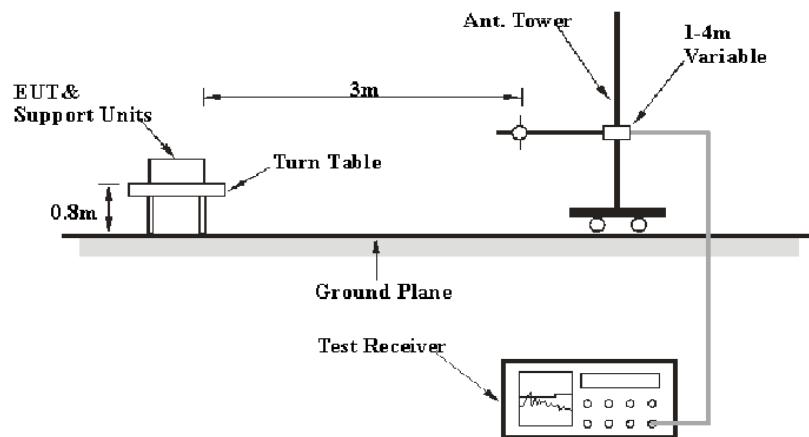

#### Above 1GHz:

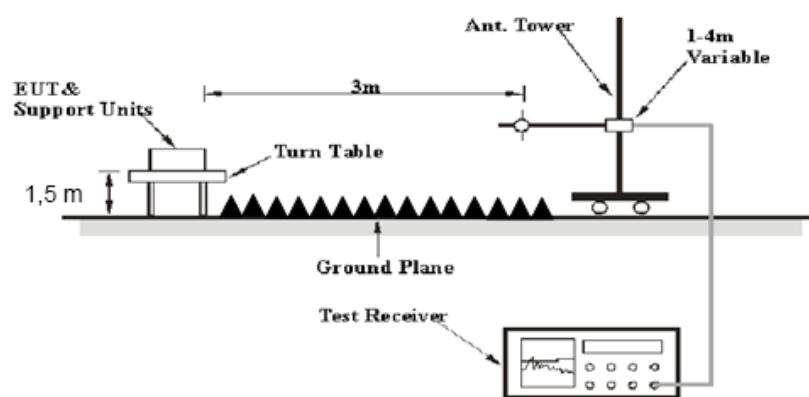

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.205, 15.209, and FCC 15.231 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For portable device, test should be performed at X.Y.Z Axis:

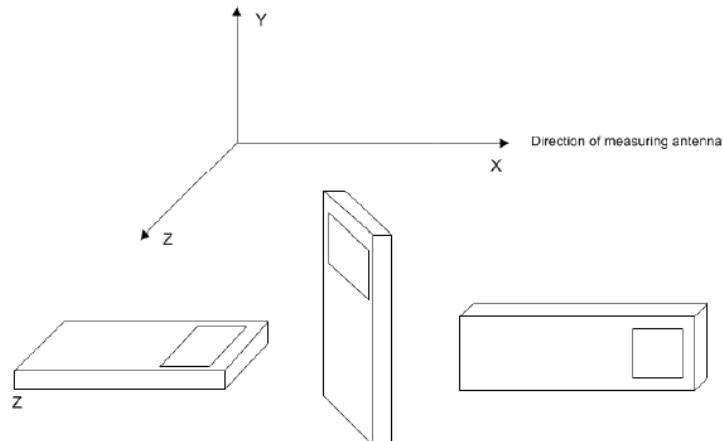


Figure 8—EUT configuration positions (see 6.3.1)

### 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	100 kHz	PK
Above 1 GHz	1 MHz	3 MHz	/	PK

### 3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

According to §15.231, Intentional radiators operating under the provisions of this Section shall demonstrate compliance with the limits on the field strength of emissions, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


### 3.3 20 dB Emission Bandwidth:

#### 3.3.1 Applicable Standard

FCC §15.231(c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

#### 3.3.2 EUT Setup

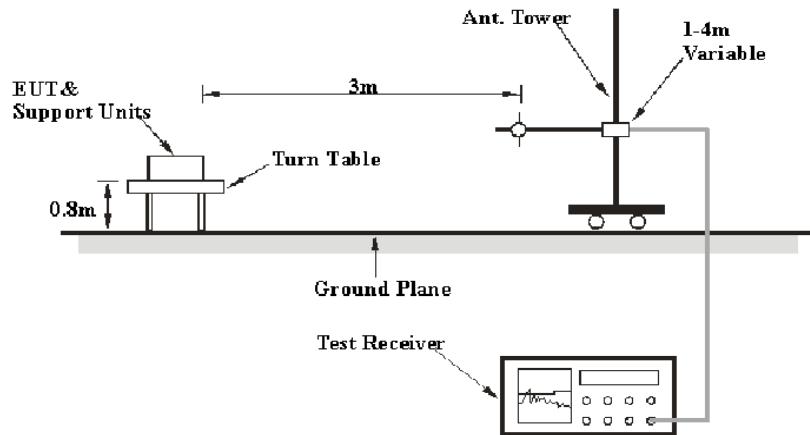

#### 3.3.3 Test Procedure

- a) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, unless otherwise specified by the applicable requirement.
- b) Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


### 3.4 DEACTIVATION TESTING

#### 3.4.1 Applicable Standard

FCC §15.231 (a)(1)

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

#### 3.4.2 EUT Setup

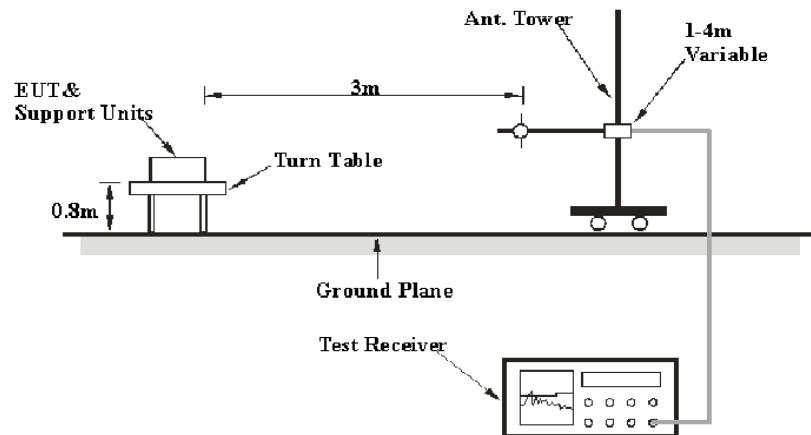

#### 3.4.3 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set  $RBW$  to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.

### **3.5 Antenna Requirement**

#### **3.5.1 Applicable Standard**

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

#### **3.5.2 Judgment**

Please refer to the Antenna Information detail in Section 1.

## 4. Test DATA AND RESULTS

### 4.1 AC Line Conducted Emissions

Serial Number:	CR21110022-RF-S1	Test Date:	2021-12-17
Test Site:	CE	Test Mode:	Transmitting
Tester:	Nick Tang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	22.5	Relative Humidity: (%)	69	ATM Pressure: (kPa)	101.1


### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2021-04-25	2022-04-24
R&S	EMI Test Receiver	ESR3	102726	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2021-08-08	2022-08-07
Audix	Test Software	E3	190306 (V9)	N/A	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Adapter mode:

Line:

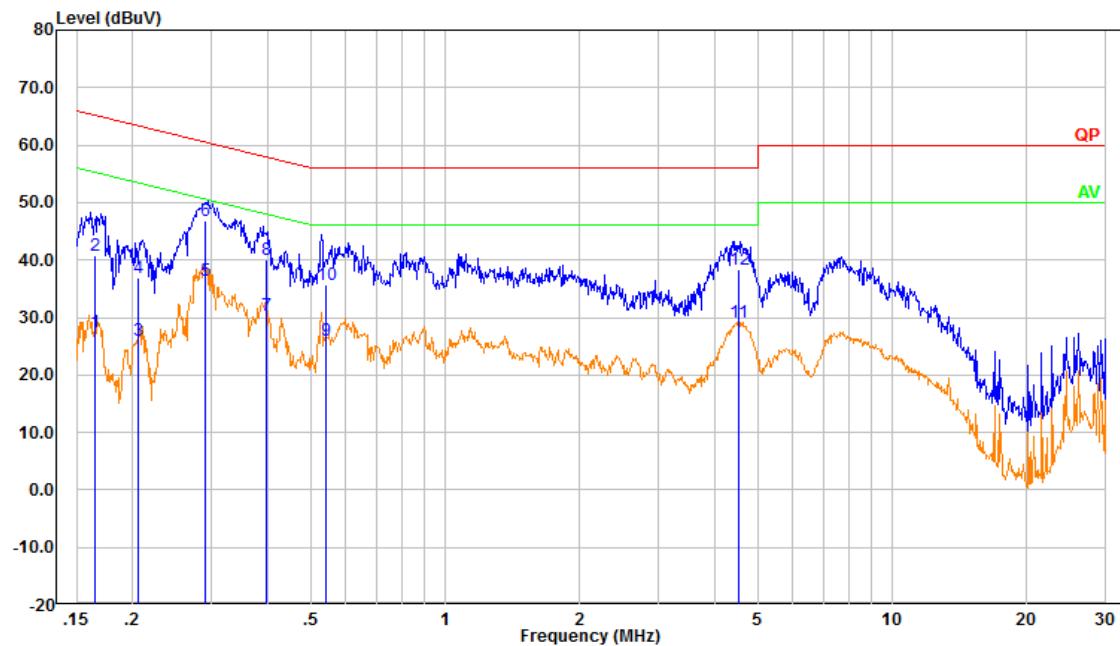

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.165	17.94	9.61	27.55	55.23	27.68	Average
2	0.165	31.07	9.61	40.68	65.23	24.55	QP
3	0.205	16.43	9.61	26.04	53.40	27.36	Average
4	0.205	27.38	9.61	36.99	63.40	26.41	QP
5	0.290	26.90	9.61	36.51	50.52	14.01	Average
6	0.290	37.24	9.61	46.85	60.52	13.67	QP
7	0.397	20.77	9.61	30.38	47.91	17.53	Average
8	0.397	30.55	9.61	40.16	57.91	17.75	QP
9	0.540	16.37	9.61	25.99	46.00	20.01	Average
10	0.540	25.98	9.61	35.60	56.00	20.40	QP
11	4.530	19.41	9.66	29.07	46.00	16.93	Average
12	4.530	28.76	9.66	38.41	56.00	17.59	QP


Neutral:

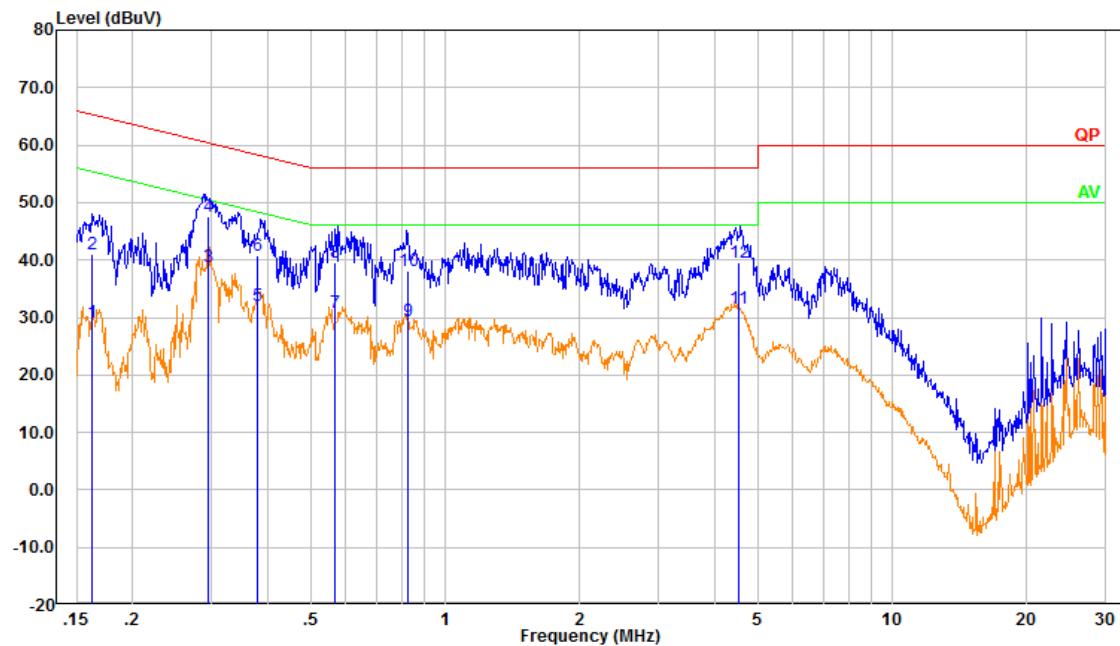

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.162	19.58	9.61	29.19	55.35	26.16	Average
2	0.162	31.47	9.61	41.08	65.35	24.27	QP
3	0.295	29.23	9.61	38.84	50.37	11.53	Average
4	0.295	37.98	9.61	47.59	60.37	12.78	QP
5	0.380	22.46	9.61	32.07	48.29	16.22	Average
6	0.380	31.26	9.61	40.87	58.29	17.42	QP
7	0.566	21.25	9.62	30.87	46.00	15.13	Average
8	0.566	29.95	9.62	39.57	56.00	16.43	QP
9	0.826	19.67	9.62	29.29	46.00	16.71	Average
10	0.826	28.48	9.62	38.10	56.00	17.90	QP
11	4.539	21.94	9.66	31.59	46.00	14.41	Average
12	4.539	29.88	9.66	39.54	56.00	16.46	QP


POE adapter mode:

Line:

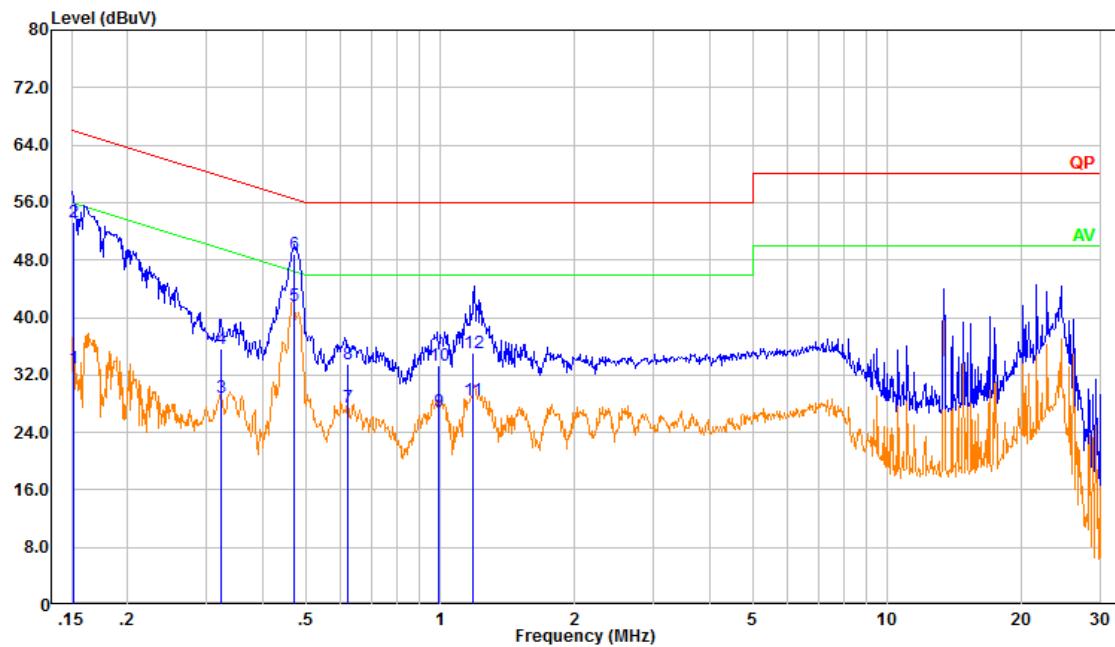

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.151	23.30	9.61	32.91	55.95	23.04	Average
2	0.151	43.70	9.61	53.31	65.95	12.64	QP
3	0.324	19.21	9.61	28.82	49.59	20.77	Average
4	0.324	26.03	9.61	35.64	59.59	23.95	QP
5	0.472	32.05	9.61	41.66	46.48	4.82	Average
6	0.472	39.21	9.61	48.82	56.48	7.66	QP
7	0.620	17.95	9.62	27.57	46.00	18.43	Average
8	0.620	23.86	9.62	33.48	56.00	22.52	QP
9	0.991	17.21	9.62	26.83	46.00	19.17	Average
10	0.991	23.60	9.62	33.22	56.00	22.78	QP
11	1.180	18.80	9.62	28.42	46.00	17.58	Average
12	1.180	25.52	9.62	35.14	56.00	20.86	QP

Neutral:

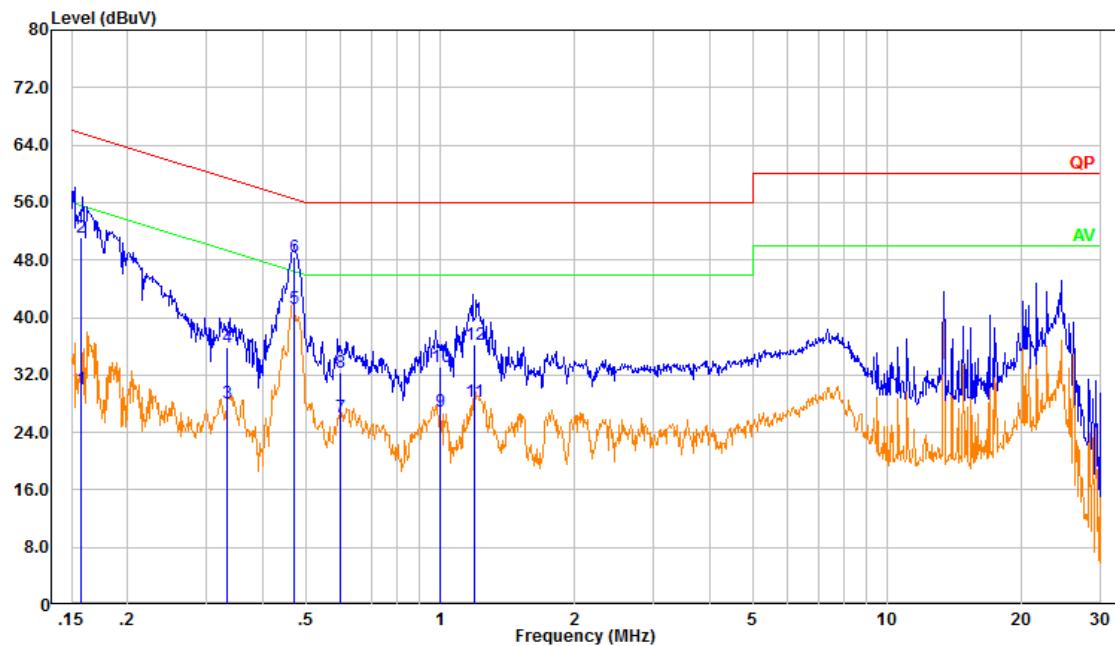

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.157	20.40	9.61	30.01	55.60	25.59	Average
2	0.157	41.44	9.61	51.05	65.60	14.55	QP
3	0.335	18.46	9.61	28.07	49.33	21.26	Average
4	0.335	26.15	9.61	35.76	59.33	23.57	QP
5	0.472	31.57	9.61	41.18	46.48	5.30	Average
6	0.472	38.84	9.61	48.45	56.48	8.03	QP
7	0.598	16.50	9.62	26.12	46.00	19.88	Average
8	0.598	22.72	9.62	32.34	56.00	23.66	QP
9	1.001	17.39	9.62	27.01	46.00	18.99	Average
10	1.001	23.58	9.62	33.20	56.00	22.80	QP
11	1.192	18.75	9.62	28.37	46.00	17.63	Average
12	1.192	26.58	9.62	36.21	56.00	19.79	QP

#### 4.2 Radiation Spurious Emissions

Serial Number:	CR21110022-RF-S1	Test Date:	2022-02-16~2022-04-26
Test Site:	966-2, 966-1	Test Mode:	Transmitting
Tester:	Tommy Luo, Great Qiao	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	19.1~23.4	Relative Humidity: (%)	55~68	ATM Pressure: (kPa)	100.8~101.1
-------------------	-----------	------------------------	-------	---------------------	-------------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
Audix	Test Software	E3	201021 (V9)	N/A	N/A
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
Audix	Test Software	E3	201021 (V9)	N/A	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

Please refer to the below table and plots.


Note: The device can be mounted in multiple orientations, test was performed with X, Y, Z Axis according to C63.10 Figure 8, the worst orientation was photographed and its data was recorded.


**Test Data:****Peak Strength:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
869	73.38	PK	H	-1.47	71.91	101.94	30.03
869	72.52	PK	V	-1.47	71.05	101.94	30.89
1738.00	36.21	PK	H	0.91	37.12	81.94	44.82
1738.00	36.36	PK	V	0.91	37.27	81.94	44.67
2607.00	37.65	PK	H	4.27	41.92	81.94	40.02
2607.00	34.91	PK	V	4.27	39.18	81.94	42.76
3476.00	34.15	PK	H	7.54	41.69	81.94	40.25
3476.00	34.46	PK	V	7.54	42.00	81.94	39.94
4345.00	35.82	PK	H	9.79	45.61	74.00	28.39
4345.00	36.18	PK	V	9.79	45.97	74.00	28.03
5214.00	33.79	PK	H	11.68	45.47	81.94	36.47
5214.00	33.74	PK	V	11.68	45.42	81.94	36.52
6083.00	34.27	PK	H	13.45	47.72	81.94	34.22
6083.00	34.75	PK	V	13.45	48.20	81.94	33.74
6952.00	35.79	PK	H	14.07	49.86	81.94	32.08
6952.00	36.19	PK	V	14.07	50.26	81.94	31.68
7821.00	33.56	PK	H	15.66	49.22	81.94	32.72
7821.00	33.67	PK	V	15.66	49.33	81.94	32.61
8690.00	32.10	PK	H	17.07	49.17	81.94	32.77
8690.00	32.88	PK	V	17.07	49.95	81.94	31.99

**Note:**

All the peak emissions are under the peak emission limit more than 20dB, comply with the average limit, therefore average detector is unnecessary.

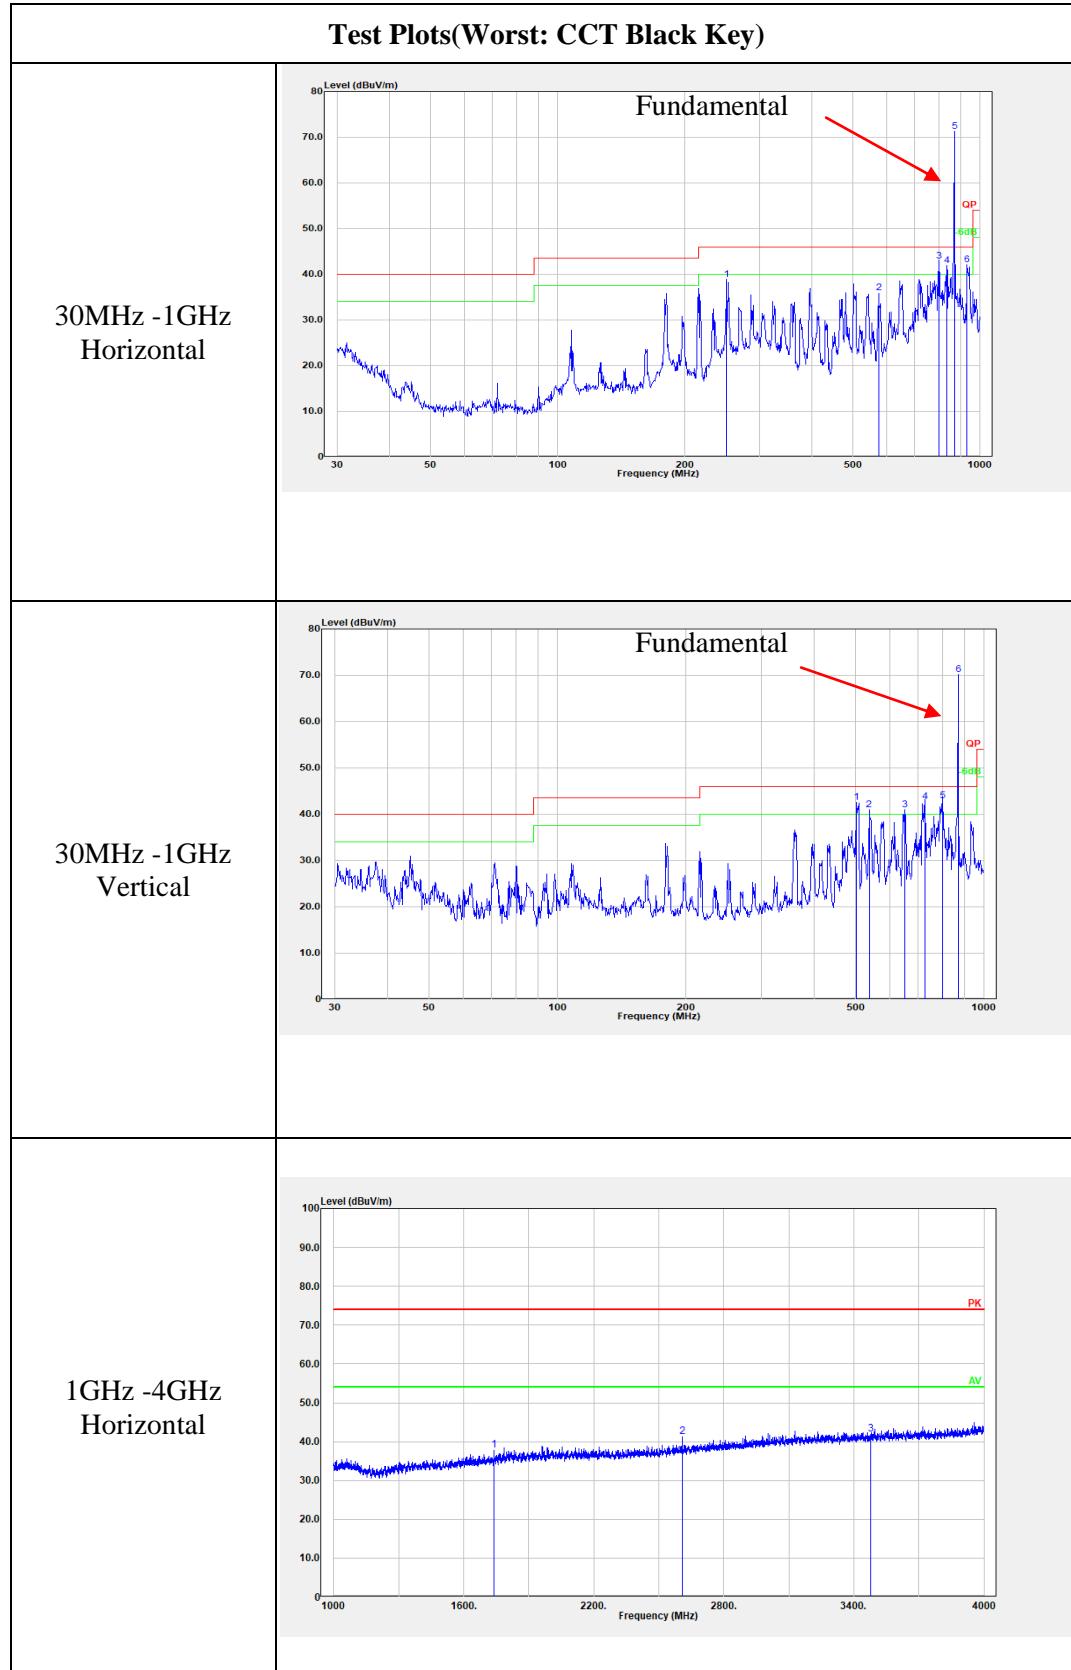

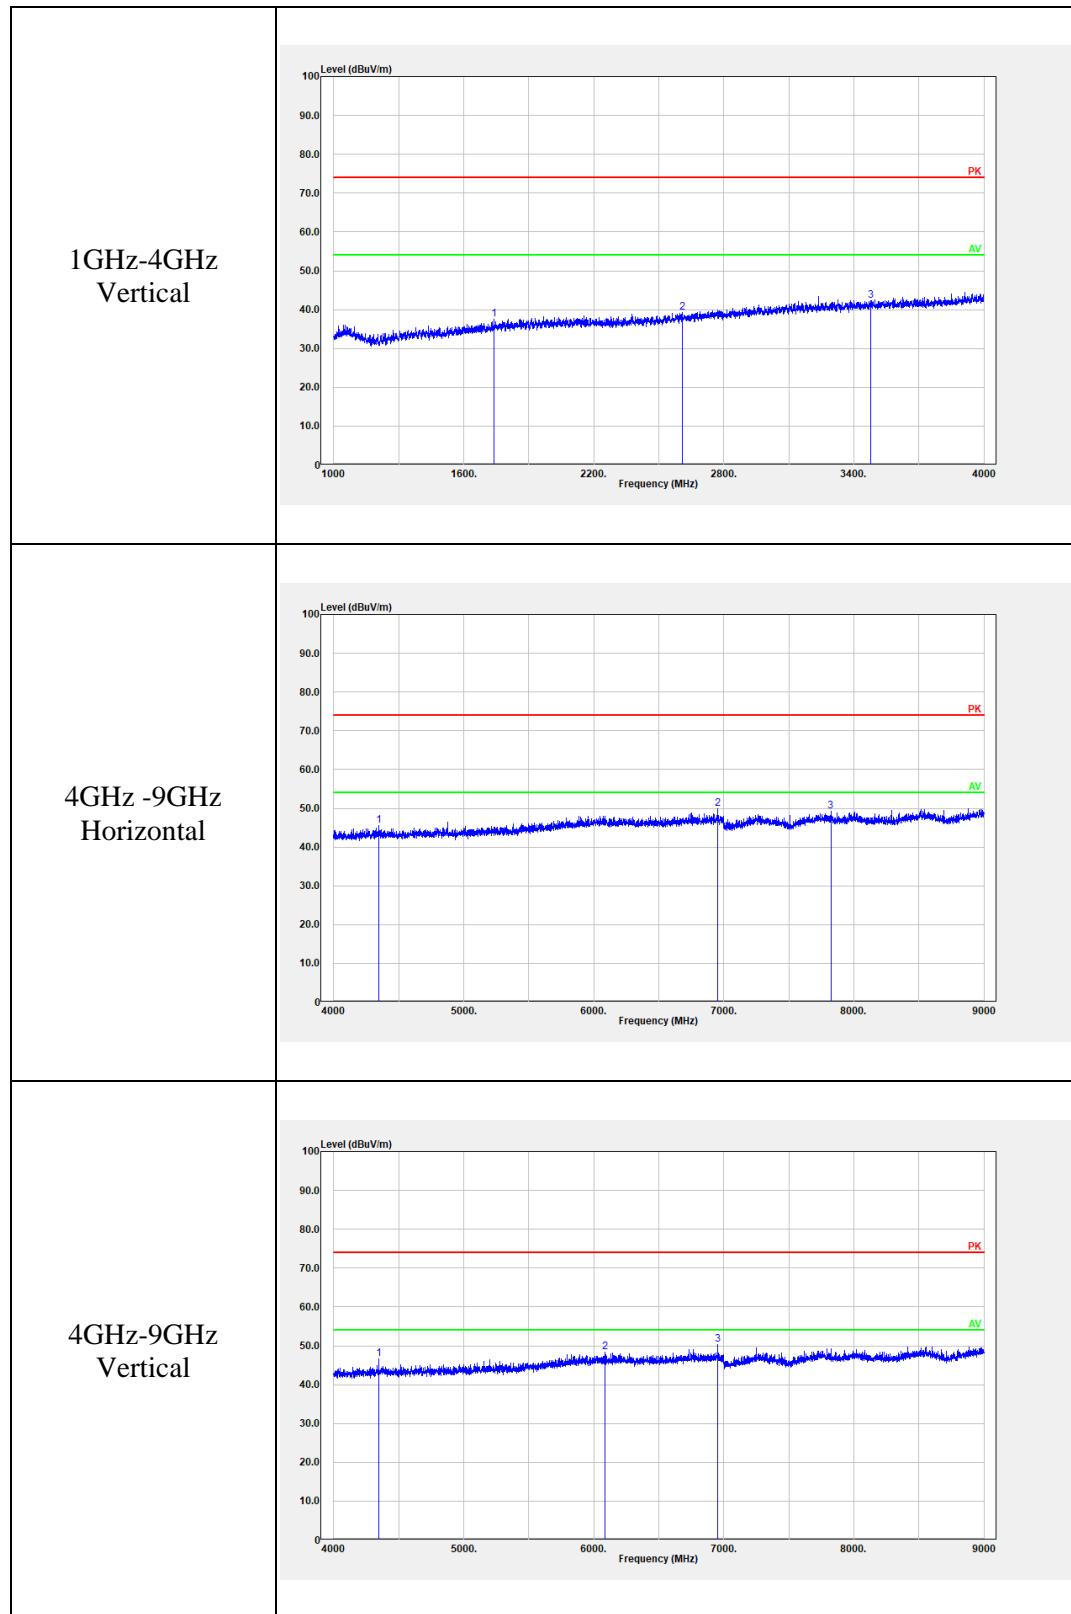

**4.3 20 dB Emission Bandwidth:**

Serial Number:	CR21110022-S1	Test Date:	2022-02-16
Test Site:	966-2	Test Mode:	Transmit
Tester:	Gary Ling	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	27.1	Relative Humidity: (%)	46	ATM Pressure: (kPa)	99.8
----------------------	------	---------------------------	----	------------------------	------


**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
Audix	Test Software	E3	201021 (V9)	N/A	N/A

\* **Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

Test Channel	Test Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
Middle	869	138.9	2172.500

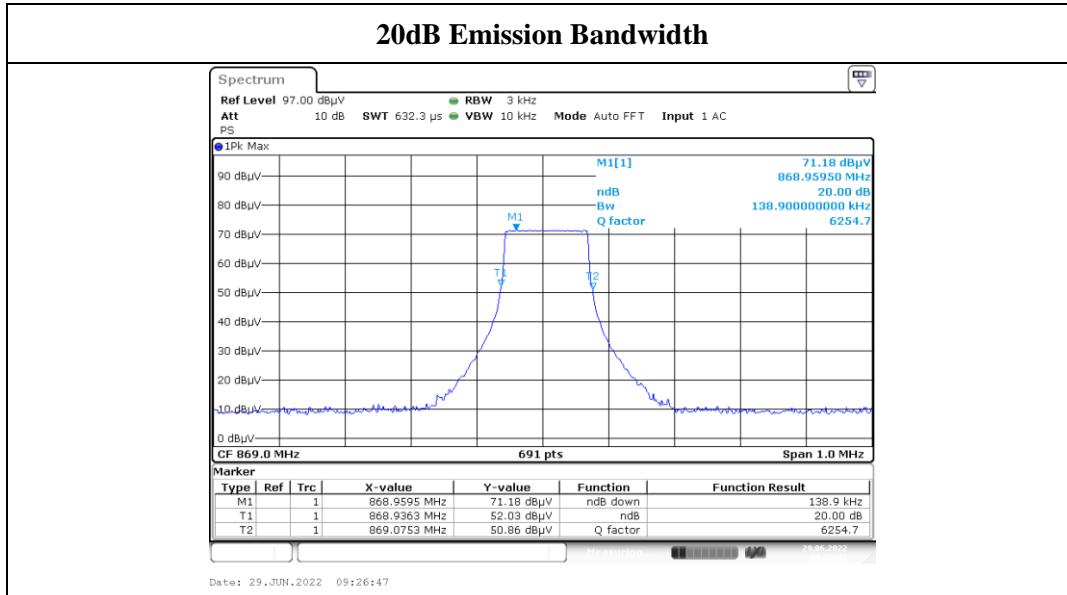

**4.4 DEACTIVATION TESTING:**

Serial Number:	CR21110022-S1	Test Date:	2022-06-29
Test Site:	966-2	Test Mode:	Transmit
Tester:	Gary Ling	Test Result:	Pass

<b>Environmental Conditions:</b>					
Temperature: (°C)	27.1	Relative Humidity: (%)	46	ATM Pressure: (kPa)	99.8


**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
Audix	Test Software	E3	201021 (V9)	N/A	N/A

**\* Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

Test Channel	Test Frequency (MHz)	Maximum Deactivate Time (s)	Limit (s)
Middle	869	0.478	<5

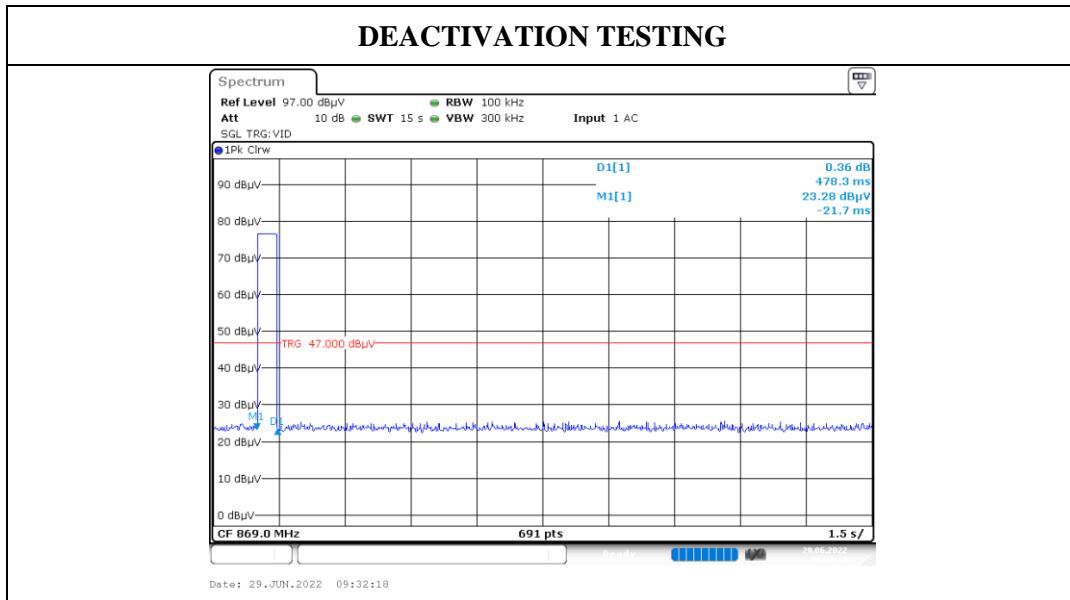

===== END OF REPORT =====