

Project No.: 2407T76694E-RF

Test Mode: 11a-5180


EUT Model: PH81

Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

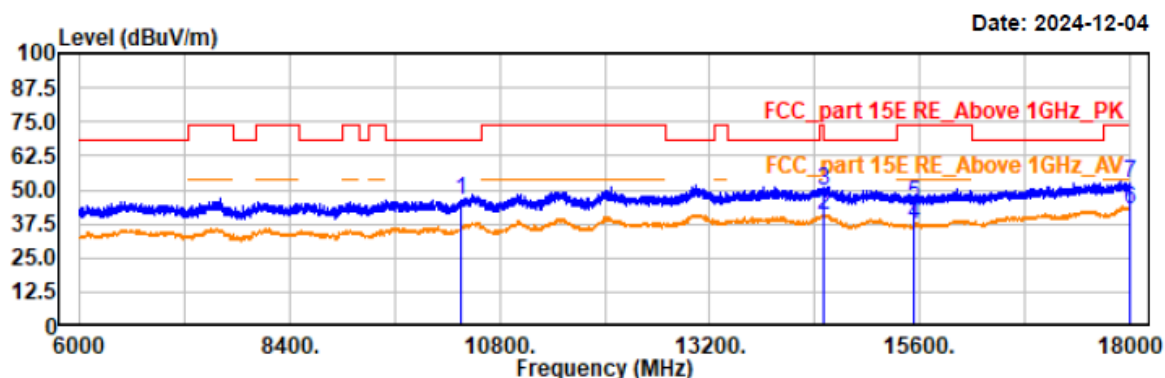

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	44.47	1.62	46.09	68.20	22.11	vertical	Peak
14498.40	35.82	4.98	40.80	54.00	13.20	vertical	Average
14498.40	44.91	4.98	49.89	74.00	24.11	vertical	Peak
15540.00	34.84	2.61	37.45	54.00	16.55	vertical	Average
15540.00	42.09	2.61	44.70	74.00	29.30	vertical	Peak
17997.60	35.30	7.74	43.04	54.00	10.96	vertical	Average
17997.60	44.64	7.74	52.38	74.00	21.62	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11a-5200
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

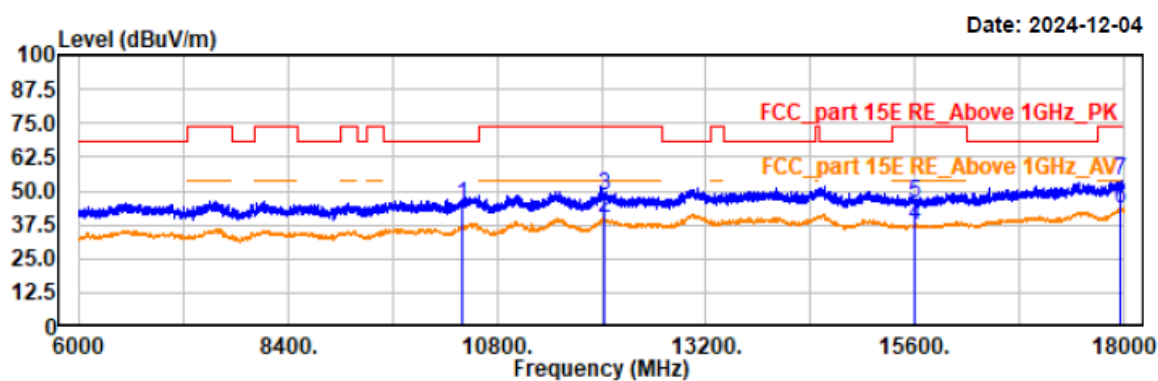**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	43.26	1.69	44.95	68.20	23.25	horizontal	Peak
12040.80	36.10	4.18	40.28	54.00	13.72	horizontal	Average
12040.80	43.88	4.18	48.06	74.00	25.94	horizontal	Peak
15600.00	34.60	2.51	37.11	54.00	16.89	horizontal	Average
15600.00	42.91	2.51	45.42	74.00	28.58	horizontal	Peak
17959.20	35.95	7.67	43.62	54.00	10.38	horizontal	Average
17959.20	46.31	7.67	53.98	74.00	20.02	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11a-5200
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

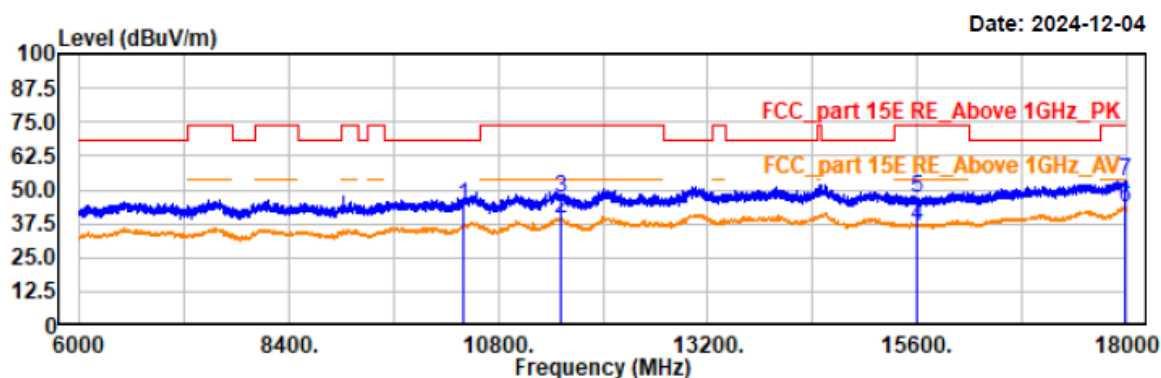**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.40	42.73	1.69	44.42	68.20	23.78	vertical	Peak
11509.20	36.44	3.16	39.60	54.00	14.40	vertical	Average
11509.20	43.91	3.16	47.07	74.00	26.93	vertical	Peak
15600.00	34.30	2.51	36.81	54.00	17.19	vertical	Average
15600.00	44.07	2.51	46.58	74.00	27.42	vertical	Peak
17982.00	36.00	7.71	43.71	54.00	10.29	vertical	Average
17982.00	45.58	7.71	53.29	74.00	20.71	vertical	Peak

Project No.: 2407T76694E-RF

Test Mode: 11a-5240


EUT Model: PH81

Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

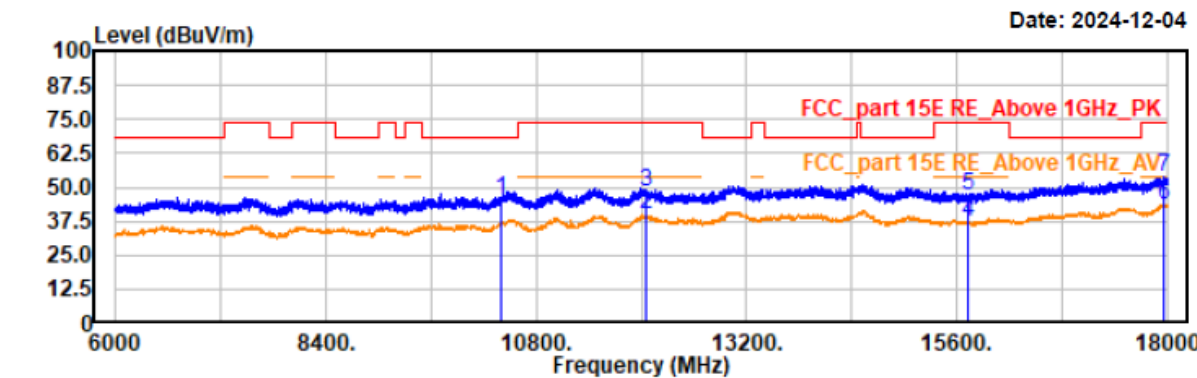

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	43.53	1.69	45.22	68.20	22.98	horizontal	Peak
12056.40	35.75	4.15	39.90	54.00	14.10	horizontal	Average
12056.40	44.34	4.15	48.49	74.00	25.51	horizontal	Peak
15720.00	34.73	2.35	37.08	54.00	16.92	horizontal	Average
15720.00	44.70	2.35	47.05	74.00	26.95	horizontal	Peak
17961.60	36.08	7.69	43.77	54.00	10.23	horizontal	Average
17961.60	46.02	7.69	53.71	74.00	20.29	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11a-5240
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

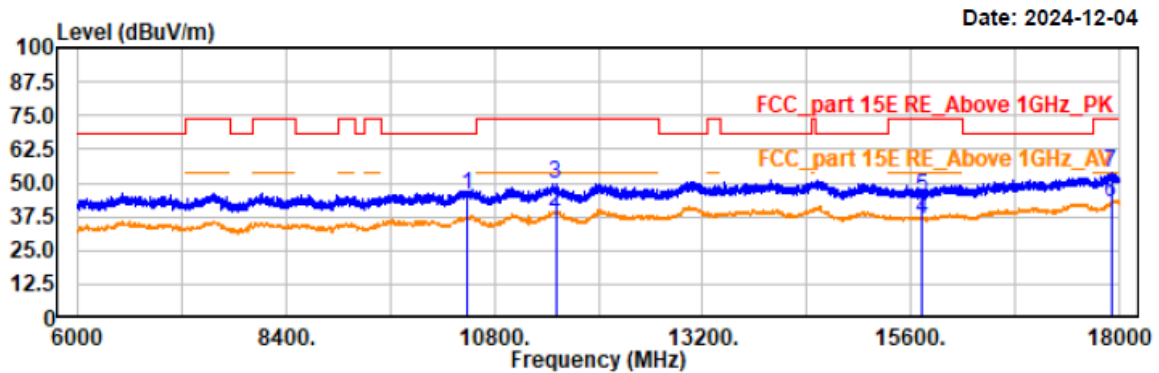**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10479.60	43.54	1.73	45.27	68.20	22.93	vertical	Peak
11506.80	36.41	3.15	39.56	54.00	14.44	vertical	Average
11506.80	46.62	3.15	49.77	74.00	24.23	vertical	Peak
15720.00	34.27	2.35	36.62	54.00	17.38	vertical	Average
15720.00	42.60	2.35	44.95	74.00	29.05	vertical	Peak
17907.60	34.83	7.60	42.43	54.00	11.57	vertical	Average
17907.60	46.29	7.60	53.89	74.00	20.11	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5180
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

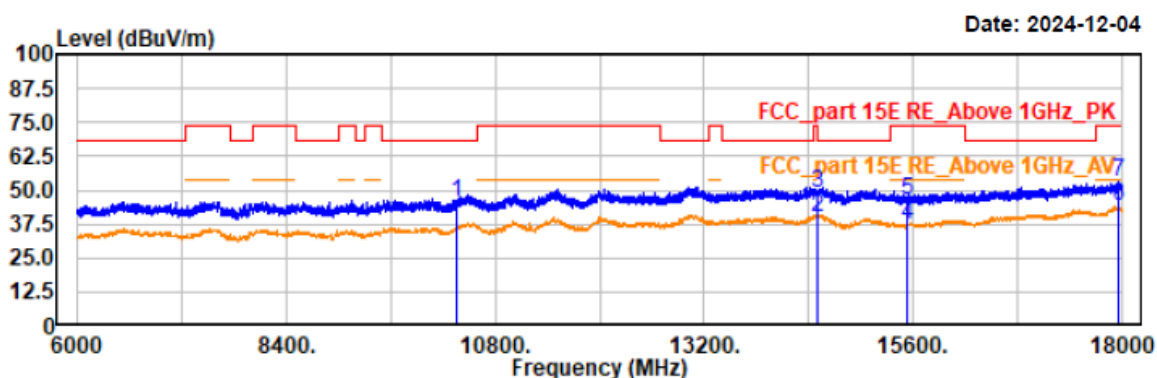


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	43.74	1.62	45.36	68.20	22.84	horizontal	Peak
14493.60	35.26	4.99	40.25	54.00	13.75	horizontal	Average
14493.60	44.21	4.99	49.20	74.00	24.80	horizontal	Peak
15540.00	34.41	2.61	37.02	54.00	16.98	horizontal	Average
15540.00	43.83	2.61	46.44	74.00	27.56	horizontal	Peak
17964.00	36.22	7.68	43.90	54.00	10.10	horizontal	Average
17964.00	45.37	7.68	53.05	74.00	20.95	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5180
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

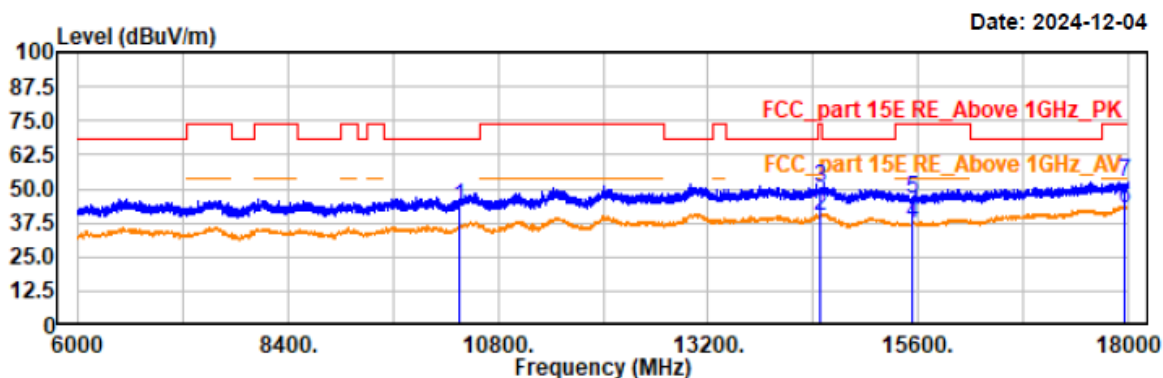**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10359.60	42.12	1.62	43.74	68.20	24.46	vertical	Peak
14485.20	35.03	5.00	40.03	54.00	13.97	vertical	Average
14485.20	45.46	5.00	50.46	74.00	23.54	vertical	Peak
15540.00	34.37	2.61	36.98	54.00	17.02	vertical	Average
15540.00	43.73	2.61	46.34	74.00	27.66	vertical	Peak
17962.80	35.16	7.68	42.84	54.00	11.16	vertical	Average
17962.80	44.83	7.68	52.51	74.00	21.49	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5200
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

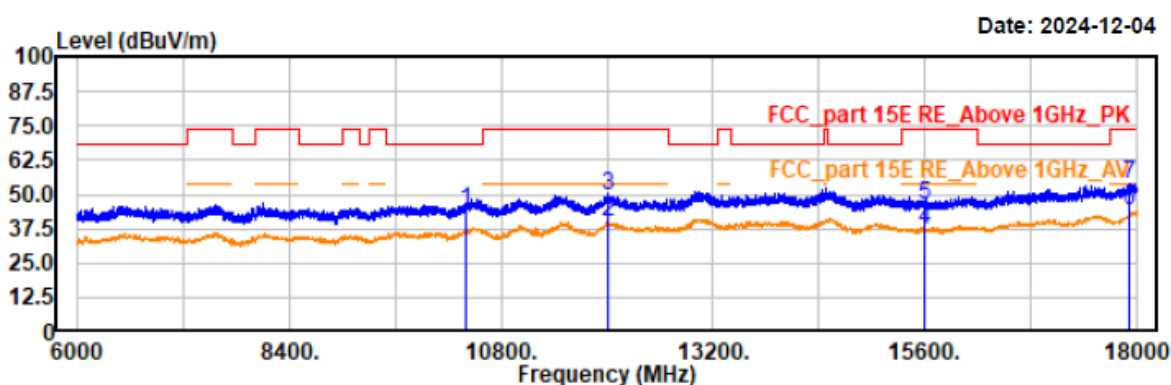

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	42.71	1.69	44.40	68.20	23.80	horizontal	Peak
12004.80	35.82	4.24	40.06	54.00	13.94	horizontal	Average
12004.80	45.70	4.24	49.94	74.00	24.06	horizontal	Peak
15600.00	34.43	2.51	36.94	54.00	17.06	horizontal	Average
15600.00	44.00	2.51	46.51	74.00	27.49	horizontal	Peak
17910.00	36.09	7.60	43.69	54.00	10.31	horizontal	Average
17910.00	46.33	7.60	53.93	74.00	20.07	horizontal	Peak

Project No.: 2407T76694E-RF

Test Mode: 11ac20-5200


EUT Model: PH81

Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

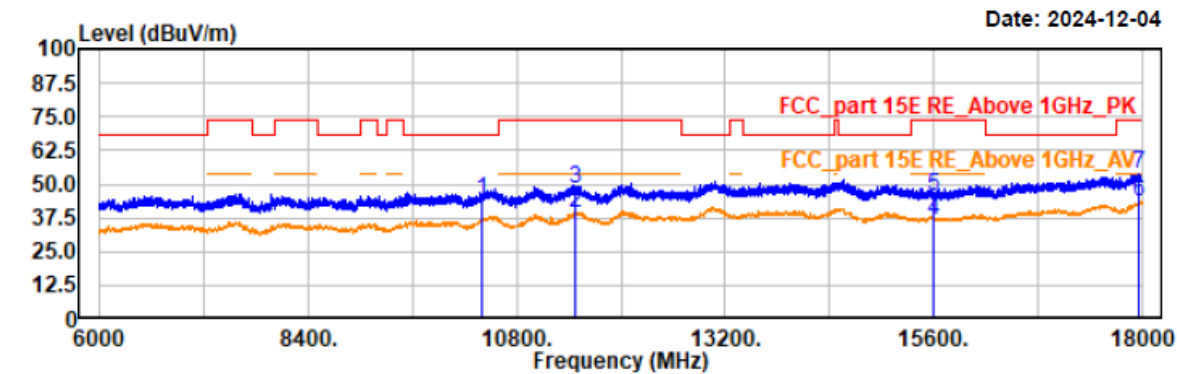

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.40	42.47	1.69	44.16	68.20	24.04	vertical	Peak
11472.00	36.31	3.10	39.41	54.00	14.59	vertical	Average
11472.00	44.96	3.10	48.06	74.00	25.94	vertical	Peak
15600.00	34.25	2.51	36.76	54.00	17.24	vertical	Average
15600.00	42.88	2.51	45.39	74.00	28.61	vertical	Peak
17965.20	35.98	7.69	43.67	54.00	10.33	vertical	Average
17965.20	46.05	7.69	53.74	74.00	20.26	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5240
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

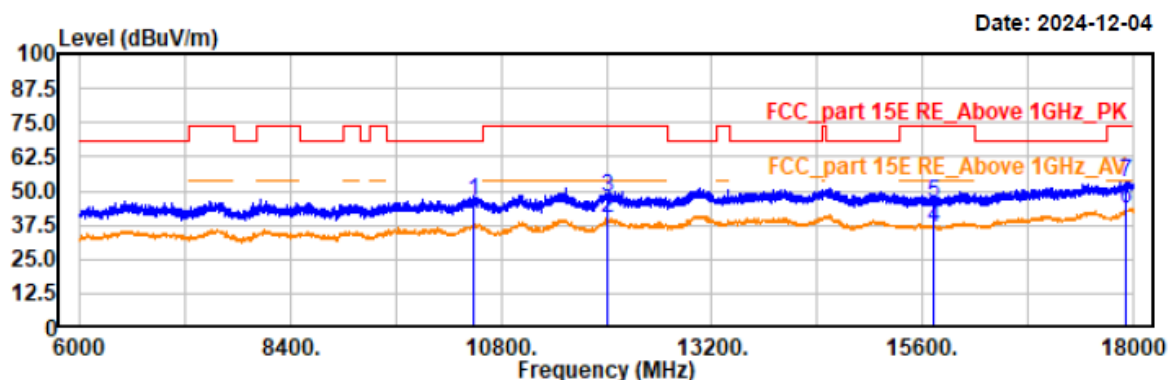

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	44.75	1.73	46.48	68.20	21.72	horizontal	Peak
12003.60	35.59	4.24	39.83	54.00	14.17	horizontal	Average
12003.60	43.40	4.24	47.64	74.00	26.36	horizontal	Peak
15720.00	34.22	2.35	36.57	54.00	17.43	horizontal	Average
15720.00	43.35	2.35	45.70	74.00	28.30	horizontal	Peak
17923.20	36.08	7.62	43.70	54.00	10.30	horizontal	Average
17923.20	45.31	7.62	52.93	74.00	21.07	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5240
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

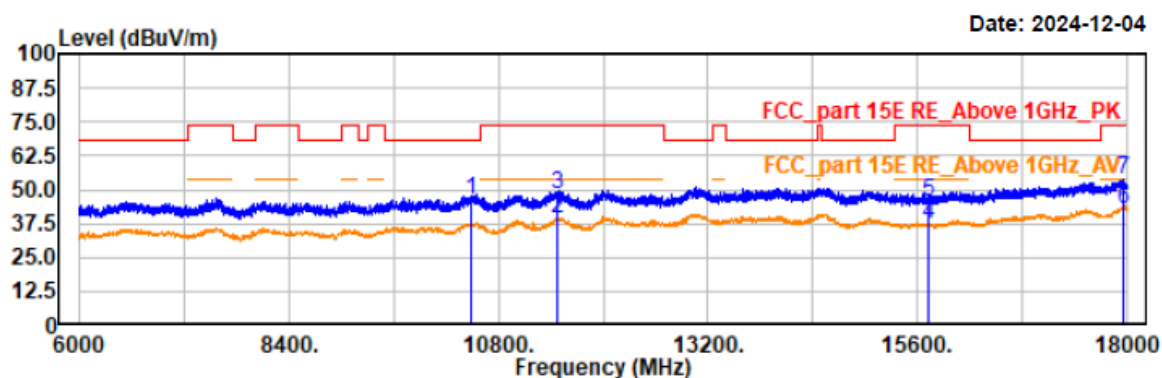**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10479.60	44.81	1.73	46.54	68.20	21.66	vertical	Peak
11472.00	36.39	3.10	39.49	54.00	14.51	vertical	Average
11472.00	45.07	3.10	48.17	74.00	25.83	vertical	Peak
15720.00	34.73	2.35	37.08	54.00	16.92	vertical	Average
15720.00	43.50	2.35	45.85	74.00	28.15	vertical	Peak
17953.20	35.10	7.67	42.77	54.00	11.23	vertical	Average
17953.20	46.07	7.67	53.74	74.00	20.26	vertical	Peak

Project No.: 2407T76694E-RF

Test Mode: 11ac40-5190


EUT Model: PH81

Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

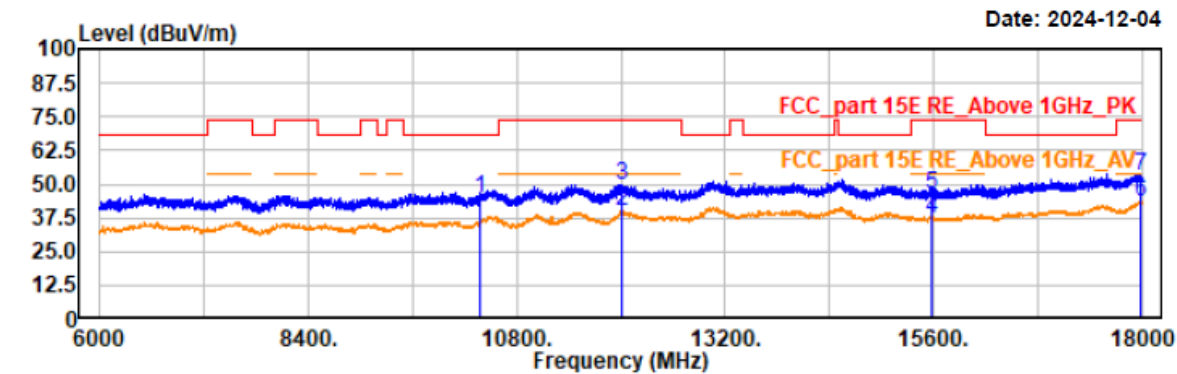

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10380.00	42.95	1.65	44.60	68.20	23.60	horizontal	Peak
12002.40	35.83	4.25	40.08	54.00	13.92	horizontal	Average
12002.40	45.64	4.25	49.89	74.00	24.11	horizontal	Peak
15570.00	34.48	2.55	37.03	54.00	16.97	horizontal	Average
15570.00	43.91	2.55	46.46	74.00	27.54	horizontal	Peak
17983.20	35.78	7.72	43.50	54.00	10.50	horizontal	Average
17983.20	45.41	7.72	53.13	74.00	20.87	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac40-5190
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

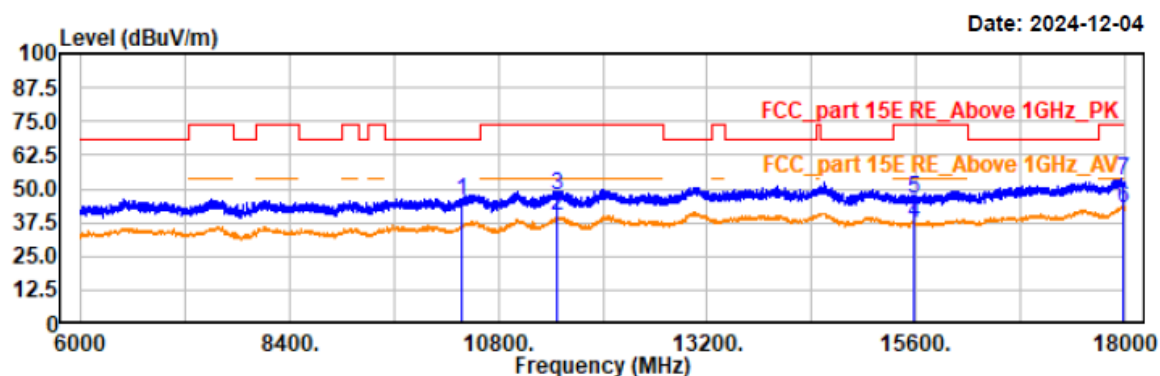

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10380.00	43.58	1.65	45.23	68.20	22.97	vertical	Peak
11476.80	36.79	3.10	39.89	54.00	14.11	vertical	Average
11476.80	44.83	3.10	47.93	74.00	26.07	vertical	Peak
15570.00	34.81	2.55	37.36	54.00	16.64	vertical	Average
15570.00	43.36	2.55	45.91	74.00	28.09	vertical	Peak
17988.00	34.95	7.72	42.67	54.00	11.33	vertical	Average
17988.00	45.59	7.72	53.31	74.00	20.69	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac40-5230
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

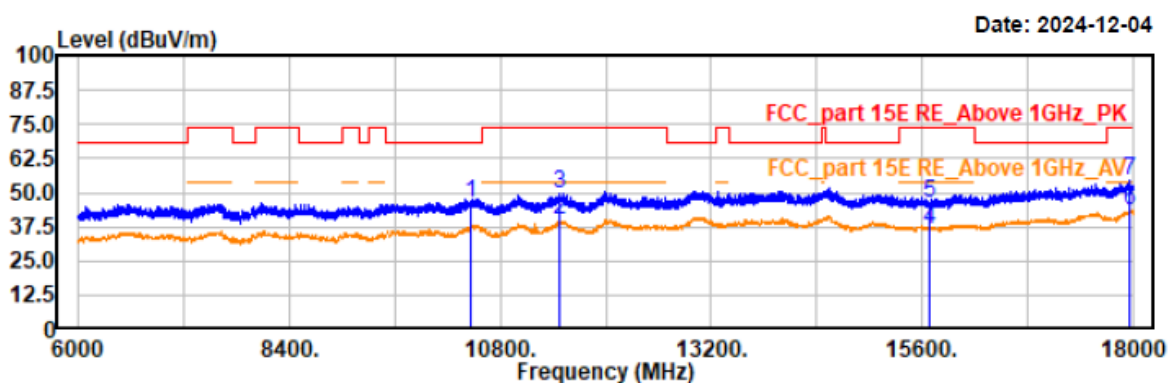

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10460.00	44.57	1.72	46.29	68.20	21.91	horizontal	Peak
11473.20	36.96	3.10	40.06	54.00	13.94	horizontal	Average
11743.20	46.68	3.10	49.78	74.00	24.22	horizontal	Peak
15690.00	33.91	2.37	36.28	54.00	17.72	horizontal	Average
15952.00	43.67	2.37	46.04	74.00	27.96	horizontal	Peak
17952.00	36.01	7.67	43.68	54.00	10.32	horizontal	Average
17952.00	46.58	7.67	54.25	74.00	19.75	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac40-5230
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

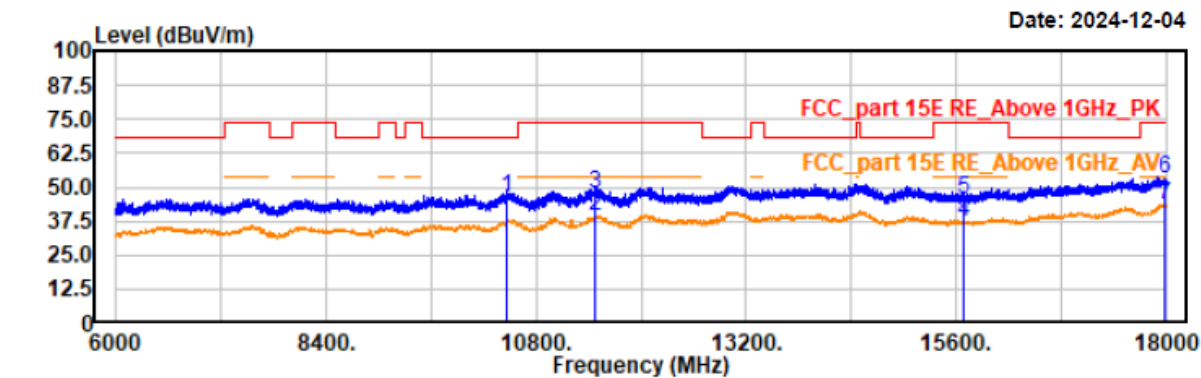


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10460.40	44.21	1.72	45.93	68.20	22.27	vertical	Peak
11480.40	36.28	3.11	39.39	54.00	14.61	vertical	Average
11480.40	44.74	3.11	47.85	74.00	26.15	vertical	Peak
15690.00	34.56	2.37	36.93	54.00	17.07	vertical	Average
15690.00	43.08	2.37	45.45	74.00	28.55	vertical	Peak
17989.00	45.64	7.72	53.36	74.00	20.64	vertical	Peak
17989.00	35.81	7.72	43.53	54.00	10.47	vertical	Average

Project No.: 2407T76694E-RF
Test Mode: 11ac80-5210
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

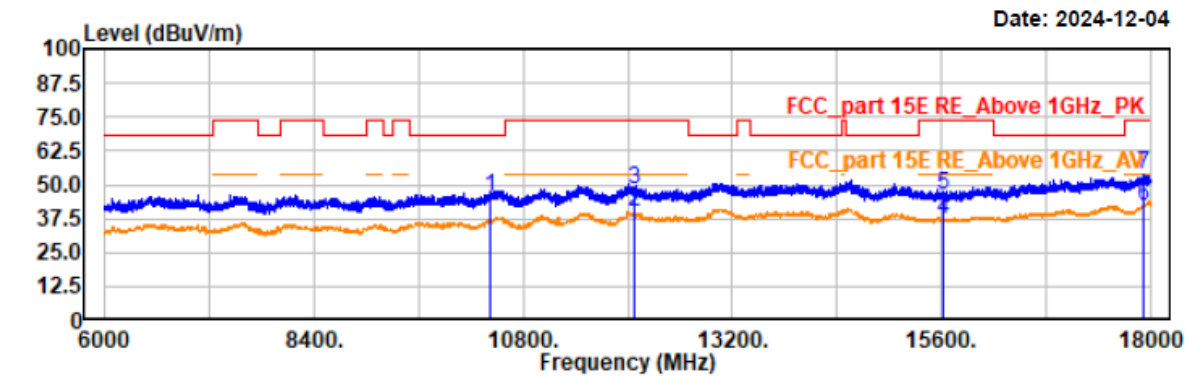

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10420.00	43.56	1.69	45.25	68.20	22.95	horizontal	Peak
12084.00	35.82	4.10	39.92	54.00	14.08	horizontal	Average
12084.00	44.12	4.10	48.22	74.00	25.78	horizontal	Peak
15630.00	34.72	2.47	37.19	54.00	16.81	horizontal	Average
15630.00	43.90	2.47	46.37	74.00	27.63	horizontal	Peak
17924.40	34.61	7.62	42.23	54.00	11.77	horizontal	Average
17924.40	46.09	7.62	53.71	74.00	20.29	horizontal	Peak

Project No.: 2407T76694E-RF

Test Mode: 11ac80-5210


EUT Model: PH81

Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

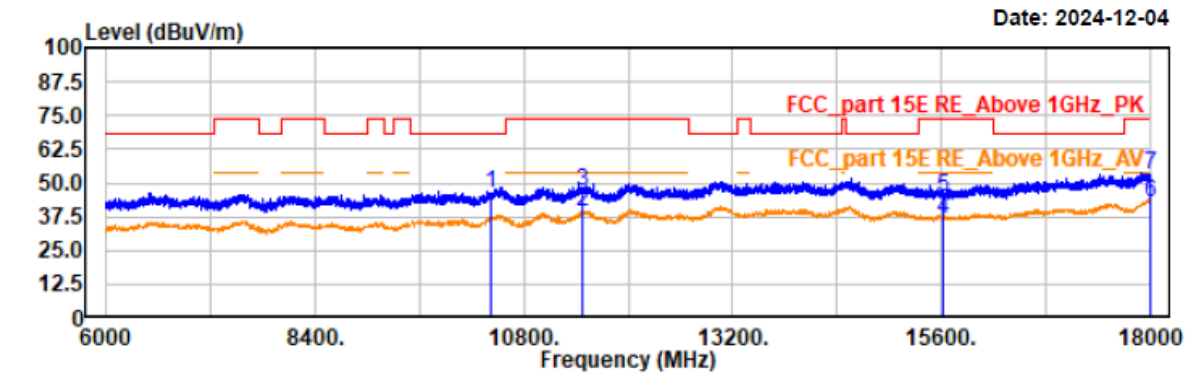

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10419.60	44.83	1.69	46.52	68.20	21.68	vertical	Peak
11475.60	36.42	3.10	39.52	54.00	14.48	vertical	Average
11475.60	43.96	3.10	47.06	74.00	26.94	vertical	Peak
15630.00	34.01	2.47	36.48	54.00	17.52	vertical	Average
15630.00	42.12	2.47	44.59	74.00	29.41	vertical	Peak
17997.60	34.78	7.74	42.52	54.00	11.48	vertical	Average
17997.60	45.38	7.74	53.12	74.00	20.88	vertical	Peak

For 5250-5350 MHz:

Project No.: 2407T76694E-RF
Test Mode: 11a-5260
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

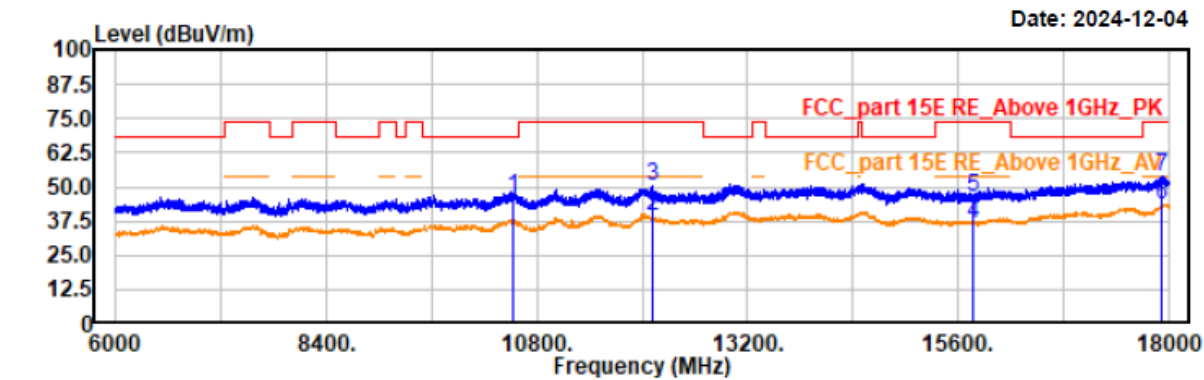

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	44.22	1.77	45.99	68.20	22.21	horizontal	Peak
12123.60	35.09	4.03	39.12	54.00	14.88	horizontal	Average
12123.60	46.09	4.03	50.12	74.00	23.88	horizontal	Peak
15780.00	34.38	2.39	36.77	54.00	17.23	horizontal	Average
15780.00	43.69	2.39	46.08	74.00	27.92	horizontal	Peak
17922.00	35.98	7.62	43.60	54.00	10.40	horizontal	Average
17922.00	46.35	7.62	53.97	74.00	20.03	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11a-5260
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

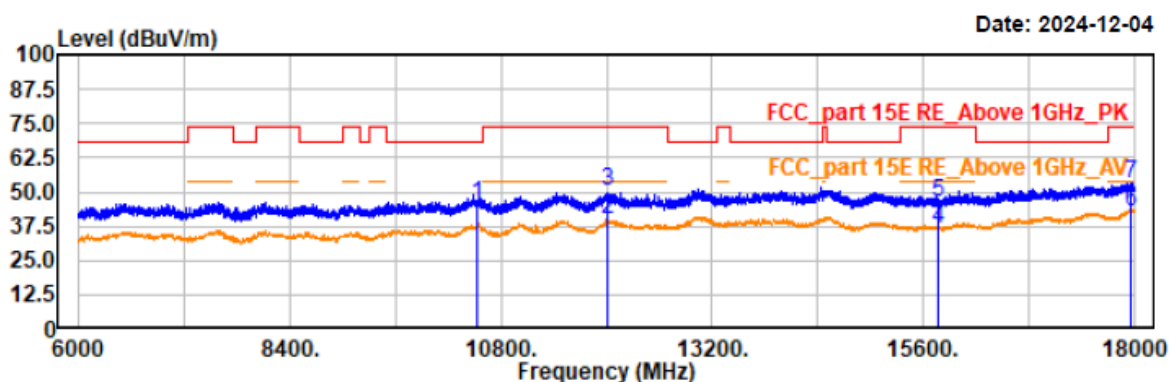

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.40	43.67	1.77	45.44	68.20	22.76	vertical	Peak
12003.60	35.74	4.24	39.98	54.00	14.02	vertical	Average
12003.60	45.79	4.24	50.03	74.00	23.97	vertical	Peak
15780.00	34.46	2.39	36.85	54.00	17.15	vertical	Average
15780.00	43.77	2.39	46.16	74.00	27.84	vertical	Peak
17952.00	35.12	7.67	42.79	54.00	11.21	vertical	Average
17952.00	45.74	7.67	53.41	74.00	20.59	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11a-5280
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

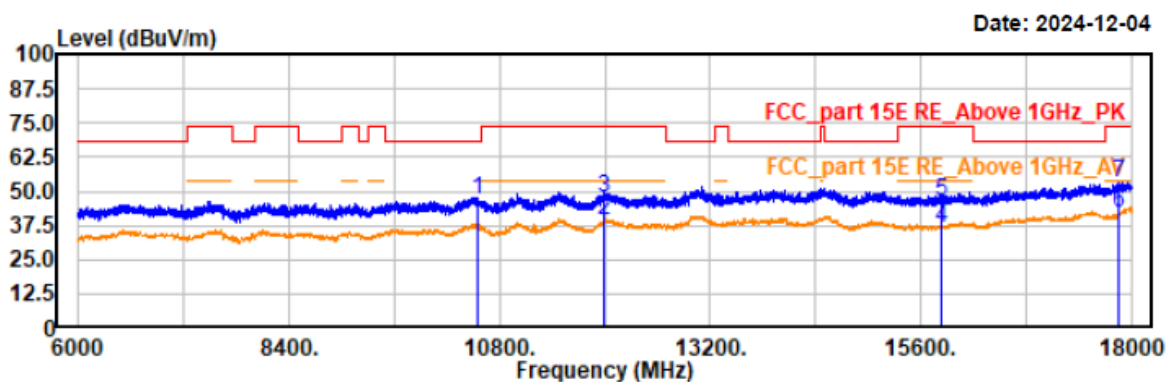

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	44.73	1.83	46.56	68.20	21.64	horizontal	Peak
11995.20	35.10	4.24	39.34	54.00	14.66	horizontal	Average
11995.20	43.64	4.24	47.88	74.00	26.12	horizontal	Peak
15840.00	34.12	2.37	36.49	54.00	17.51	horizontal	Average
15840.00	43.77	2.37	46.14	74.00	27.86	horizontal	Peak
17854.80	34.08	7.42	41.50	54.00	12.50	horizontal	Average
17854.80	45.80	7.42	53.22	74.00	20.78	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11a-5280
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

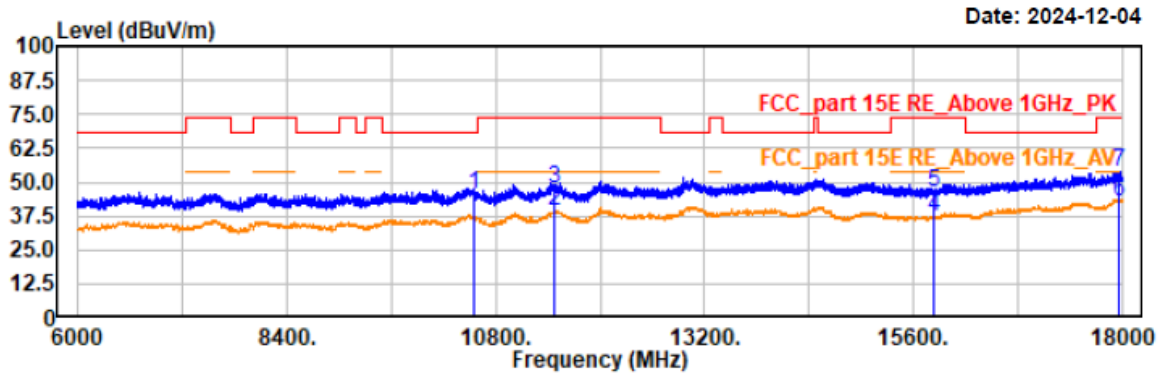

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	43.85	1.83	45.68	68.20	22.52	vertical	Peak
11469.60	35.96	3.10	39.06	54.00	14.94	vertical	Average
11469.60	44.44	3.10	47.54	74.00	26.46	vertical	Peak
15840.00	34.68	2.37	37.05	54.00	16.95	vertical	Average
15840.00	44.16	2.37	46.53	74.00	27.47	vertical	Peak
17956.80	35.38	7.68	43.06	54.00	10.94	vertical	Average
17956.80	46.06	7.68	53.74	74.00	20.26	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11a-5320
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

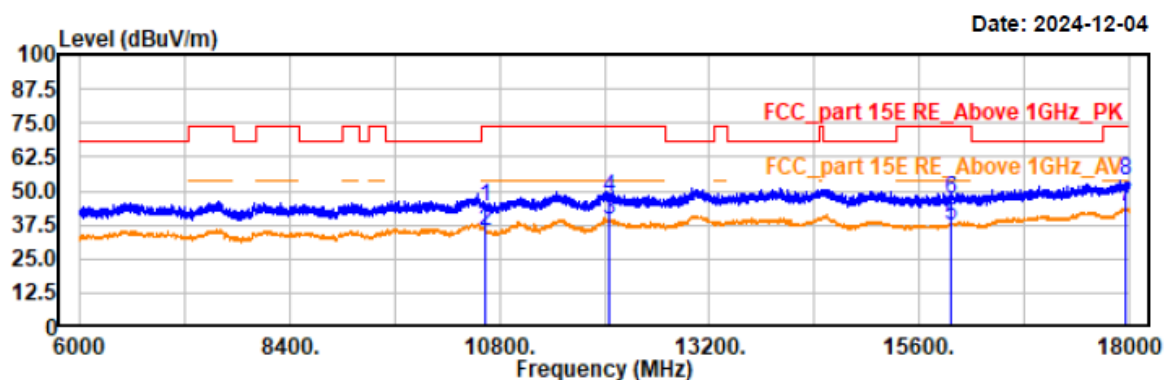**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	42.07	1.94	44.01	74.00	29.99	horizontal	Peak
10640.00	33.22	1.94	35.16	54.00	18.84	horizontal	Average
12055.20	34.95	4.15	39.10	54.00	14.90	horizontal	Average
12055.20	43.38	4.15	47.53	74.00	26.47	horizontal	Peak
15960.00	34.80	2.41	37.21	54.00	16.79	horizontal	Average
15960.00	44.23	2.41	46.64	74.00	27.36	horizontal	Peak
17962.80	36.14	7.68	43.82	54.00	10.18	horizontal	Average
17962.80	45.90	7.68	53.58	74.00	20.42	horizontal	Peak

Project No.: 2407T76694E-RF

Test Mode: 11a-5320

EUT Model: PH81


Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

Date: 2024-12-04

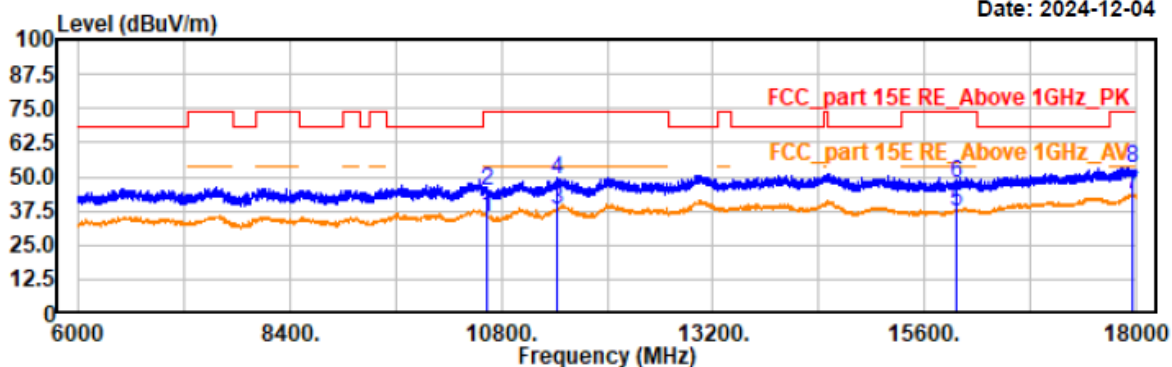

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	33.45	1.94	35.39	54.00	18.61	vertical	Average
10640.00	42.71	1.94	44.65	74.00	29.35	vertical	Peak
11434.80	35.10	3.06	38.16	54.00	15.84	vertical	Average
11434.80	46.00	3.06	49.06	74.00	24.94	vertical	Peak
15960.00	35.03	2.41	37.44	54.00	16.56	vertical	Average
15960.00	44.96	2.41	47.37	74.00	26.63	vertical	Peak
17952.00	35.47	7.67	43.14	54.00	10.86	vertical	Average
17952.00	45.69	7.67	53.36	74.00	20.64	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5260
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

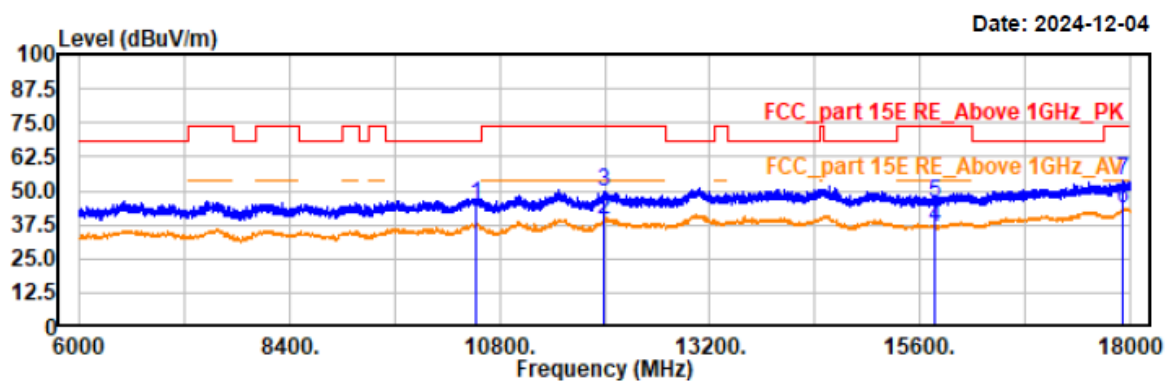

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	42.93	1.77	44.70	68.20	23.50	horizontal	Peak
11997.60	35.15	4.24	39.39	54.00	14.61	horizontal	Average
11997.60	45.68	4.24	49.92	74.00	24.08	horizontal	Peak
15780.00	34.00	2.39	36.39	54.00	17.61	horizontal	Average
15780.00	43.41	2.39	45.80	74.00	28.20	horizontal	Peak
17914.80	35.91	7.61	43.52	54.00	10.48	horizontal	Average
17914.80	45.88	7.61	53.49	74.00	20.51	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5260
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

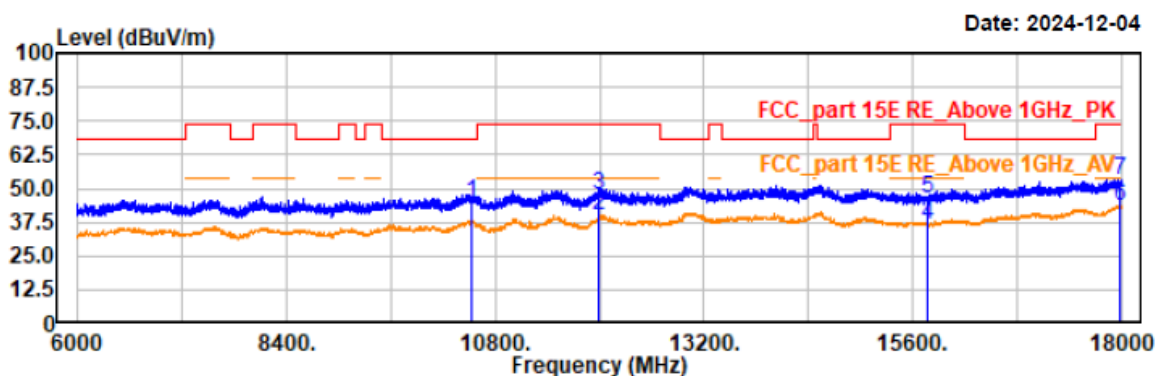

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.40	43.33	1.77	45.10	68.20	23.10	vertical	Peak
11997.60	35.48	4.24	39.72	54.00	14.28	vertical	Average
11997.60	43.59	4.24	47.83	74.00	26.17	vertical	Peak
15780.00	33.95	2.39	36.34	54.00	17.66	vertical	Average
15780.00	43.72	2.39	46.11	74.00	27.89	vertical	Peak
17992.80	35.90	7.72	43.62	54.00	10.38	vertical	Average
17992.80	45.44	7.72	53.16	74.00	20.84	vertical	Peak

Project No.: 2407T76694E-RF

Test Mode: 11ac20-5280


EUT Model: PH81

Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

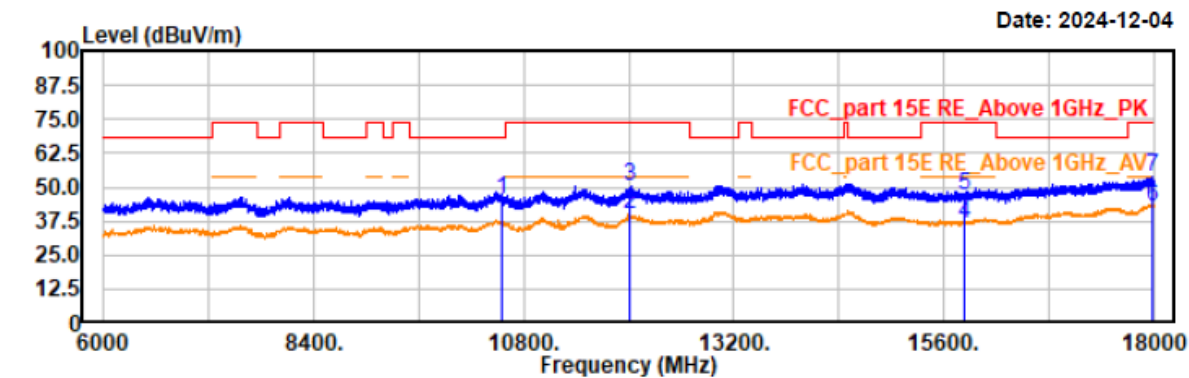

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	43.95	1.83	45.78	68.20	22.42	horizontal	Peak
12003.60	35.71	4.24	39.95	54.00	14.05	horizontal	Average
12003.60	45.94	4.24	50.18	74.00	23.82	horizontal	Peak
15840.00	33.85	2.37	36.22	54.00	17.78	horizontal	Average
15840.00	44.36	2.37	46.73	74.00	27.27	horizontal	Peak
17974.80	35.13	7.70	42.83	54.00	11.17	horizontal	Average
17974.80	46.09	7.70	53.79	74.00	20.21	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5280
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

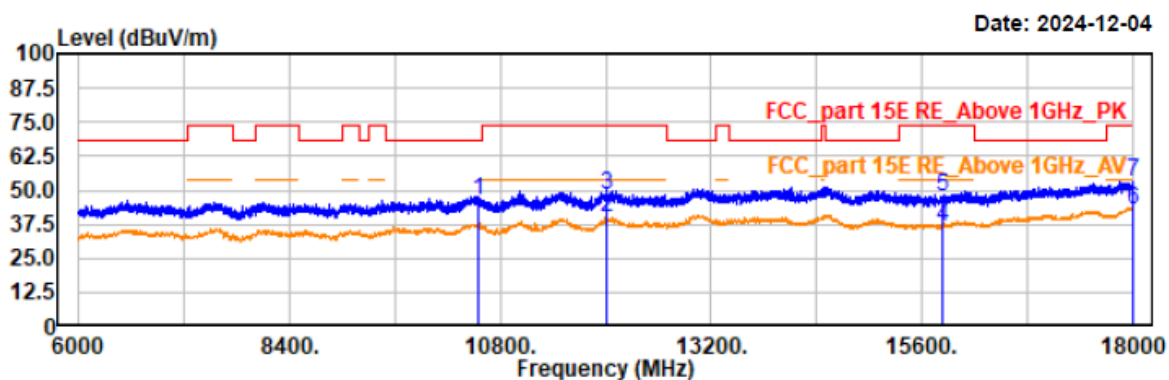**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	44.50	1.83	46.33	68.20	21.87	vertical	Peak
12001.20	35.87	4.25	40.12	54.00	13.88	vertical	Average
12001.20	44.33	4.25	48.58	74.00	25.42	vertical	Peak
15840.00	34.16	2.37	36.53	54.00	17.47	vertical	Average
15840.00	44.92	2.37	47.29	74.00	26.71	vertical	Peak
17997.60	34.68	7.74	42.42	54.00	11.58	vertical	Average
17997.60	45.08	7.74	52.82	74.00	21.18	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5320
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

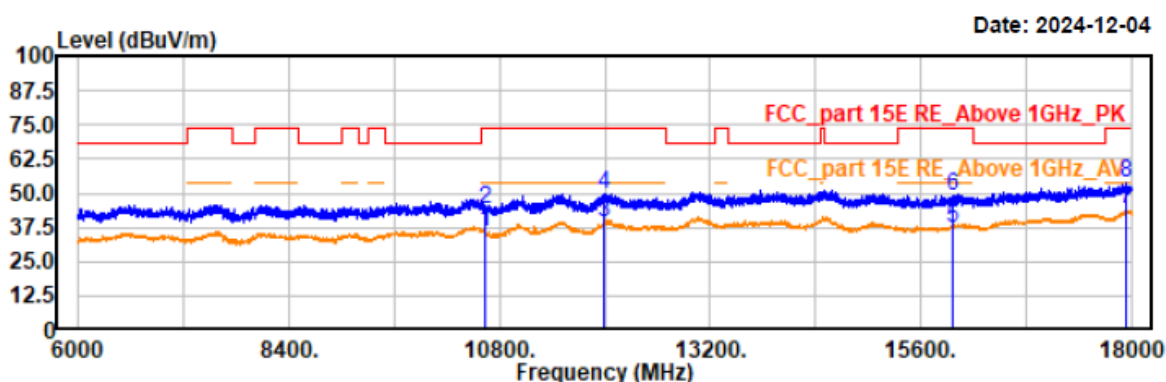

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	33.76	1.94	35.70	54.00	18.30	horizontal	Average
10640.00	42.35	1.94	44.29	74.00	29.71	horizontal	Peak
11995.20	34.84	4.24	39.08	54.00	14.92	horizontal	Average
11995.20	45.61	4.24	49.85	74.00	24.15	horizontal	Peak
15960.00	34.96	2.41	37.37	54.00	16.63	horizontal	Average
15960.00	46.63	2.41	49.04	74.00	24.96	horizontal	Peak
17949.60	36.54	7.67	44.21	54.00	9.79	horizontal	Average
17949.60	46.16	7.67	53.83	74.00	20.17	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5320
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

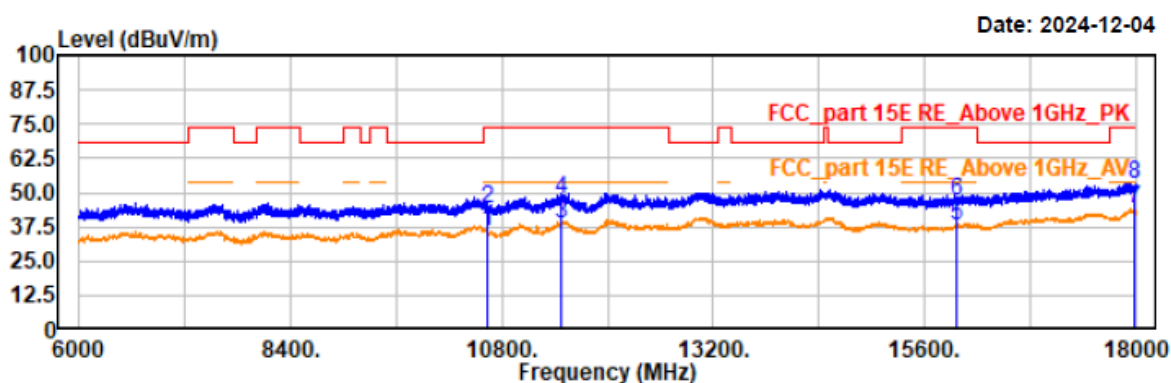


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.40	33.82	1.94	35.76	54.00	18.24	vertical	Average
10640.40	42.41	1.94	44.35	74.00	29.65	vertical	Peak
11478.00	35.81	3.10	38.91	54.00	15.09	vertical	Average
11478.00	44.64	3.10	47.74	74.00	26.26	vertical	Peak
15960.00	35.20	2.41	37.61	54.00	16.39	vertical	Average
15960.00	44.66	2.41	47.07	74.00	26.93	vertical	Peak
17991.60	36.23	7.72	43.95	54.00	10.05	vertical	Average
17991.60	45.08	7.72	52.80	74.00	21.20	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac40-5270
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

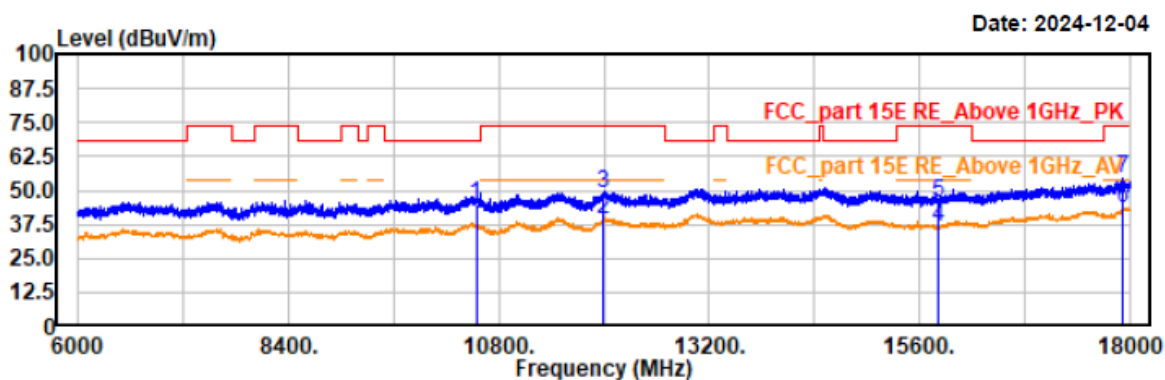

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10540.00	43.37	1.80	45.17	68.20	23.03	horizontal	Peak
11995.20	35.21	4.24	39.45	54.00	14.55	horizontal	Average
11995.20	44.48	4.24	48.72	74.00	25.28	horizontal	Peak
15810.00	34.17	2.38	36.55	54.00	17.45	horizontal	Average
15810.00	43.26	2.38	45.64	74.00	28.36	horizontal	Peak
17917.20	36.02	7.62	43.64	54.00	10.36	horizontal	Average
17917.20	46.67	7.62	54.29	74.00	19.71	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac40-5270
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

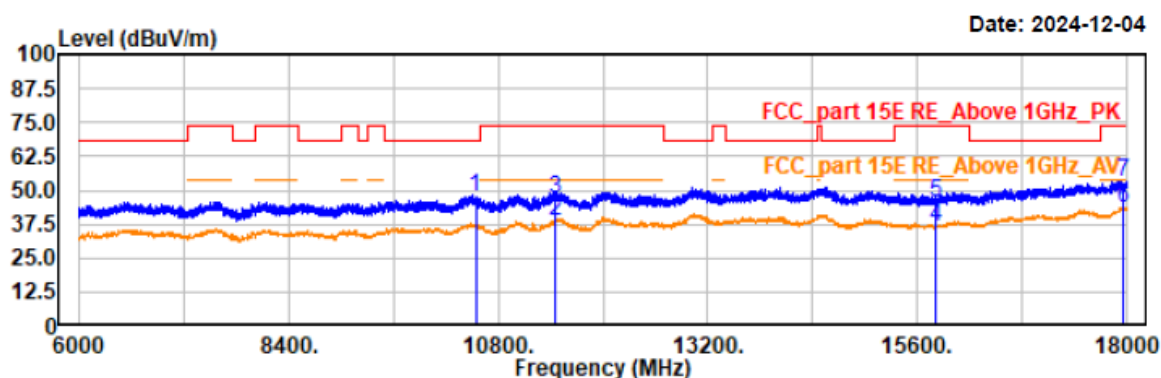**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10539.60	45.49	1.80	47.29	68.20	20.91	vertical	Peak
11460.00	35.62	3.08	38.70	54.00	15.30	vertical	Average
11460.00	44.09	3.08	47.17	74.00	26.83	vertical	Peak
15810.00	34.10	2.38	36.48	54.00	17.52	vertical	Average
15810.00	43.14	2.38	45.52	74.00	28.48	vertical	Peak
17961.60	36.00	7.68	43.68	54.00	10.32	vertical	Average
17961.60	45.11	7.68	52.79	74.00	21.21	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac40-5310
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

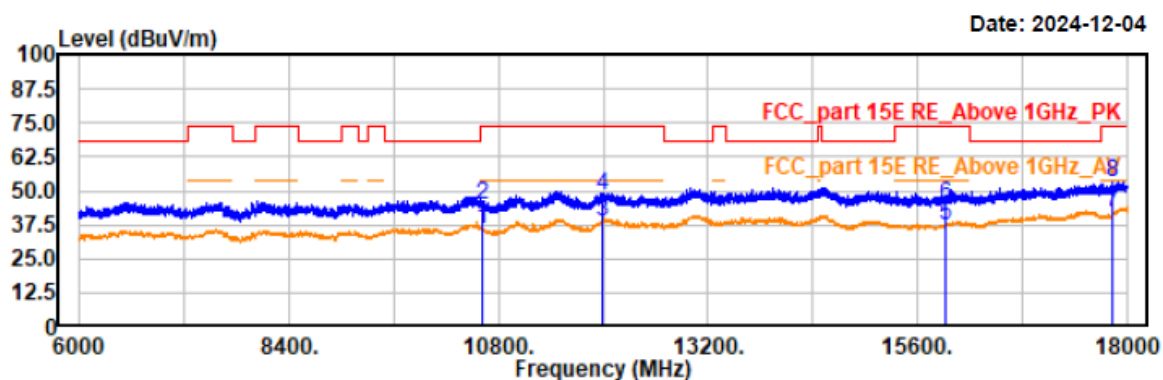


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	34.24	1.91	36.15	54.00	17.85	horizontal	Average
10620.00	43.05	1.91	44.96	74.00	29.04	horizontal	Peak
11986.80	34.57	4.22	38.79	54.00	15.21	horizontal	Average
11986.80	44.18	4.22	48.40	74.00	25.60	horizontal	Peak
15930.00	34.70	2.38	37.08	54.00	16.92	horizontal	Average
15930.00	42.73	2.38	45.11	74.00	28.89	horizontal	Peak
17830.80	34.09	7.34	41.43	54.00	12.57	horizontal	Average
17830.80	45.66	7.34	53.00	74.00	21.00	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac40-5310
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

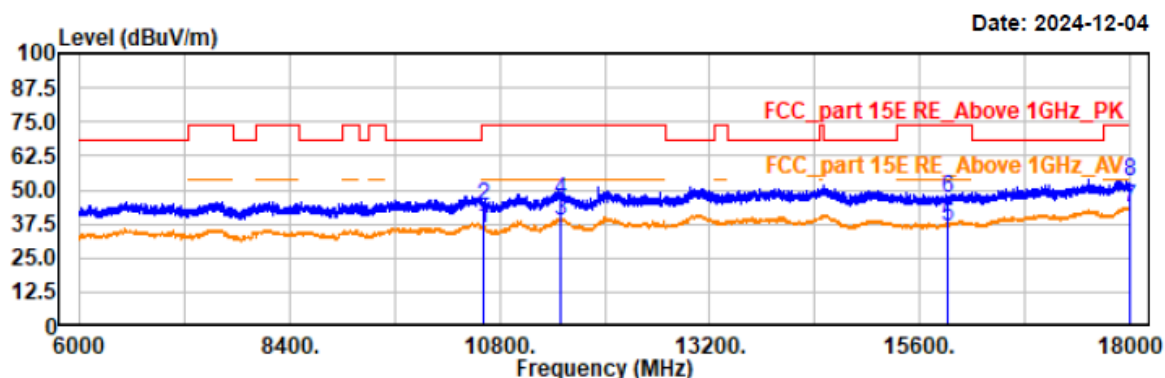**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	34.15	1.91	36.06	54.00	17.94	vertical	Average
10620.00	42.33	1.91	44.24	74.00	29.76	vertical	Peak
11486.40	35.61	3.12	38.73	54.00	15.27	vertical	Average
11486.40	43.41	3.12	46.53	74.00	27.47	vertical	Peak
15930.00	34.51	2.38	36.89	54.00	17.11	vertical	Average
15930.00	44.18	2.38	46.56	74.00	27.44	vertical	Peak
17995.20	35.74	7.74	43.48	54.00	10.52	vertical	Average
17995.20	45.46	7.74	53.20	74.00	20.80	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac80-5290
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

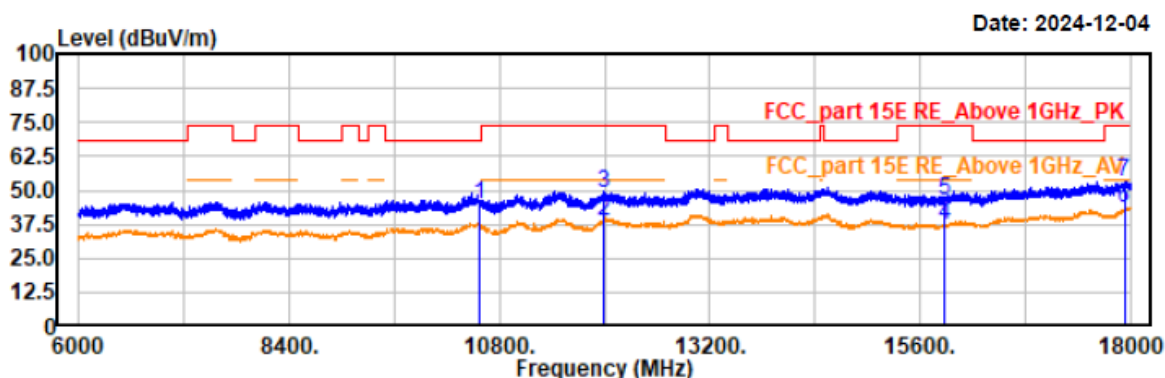
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10580.00	43.00	1.85	44.85	68.20	23.35	horizontal	Peak
11986.80	34.44	4.22	38.66	54.00	15.34	horizontal	Average
11986.80	44.57	4.22	48.79	74.00	25.21	horizontal	Peak
15870.00	34.60	2.34	36.94	54.00	17.06	horizontal	Average
15870.00	44.14	2.34	46.48	74.00	27.52	horizontal	Peak
17929.20	36.07	7.64	43.71	54.00	10.29	horizontal	Average
17929.20	45.79	7.64	53.43	74.00	20.57	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac80-5290
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 22.9°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

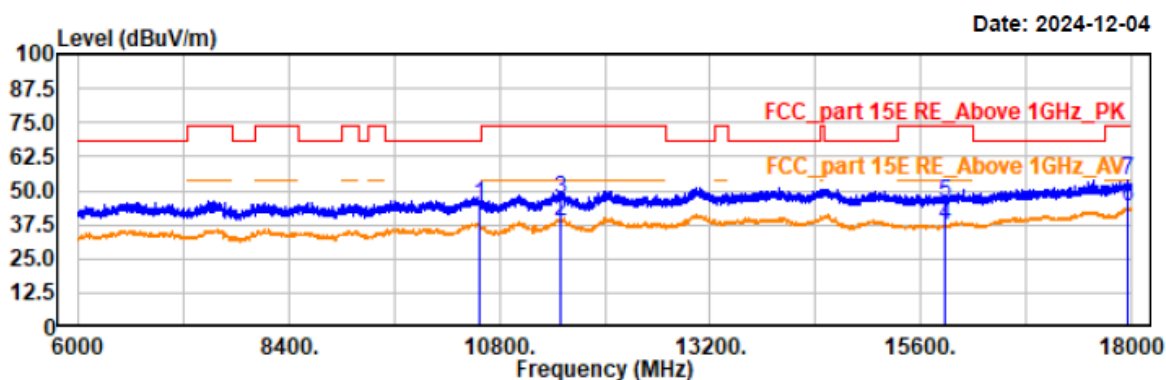**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10580.40	43.11	1.85	44.96	68.20	23.24	vertical	Peak
11486.40	35.78	3.12	38.90	54.00	15.10	vertical	Average
11486.40	43.84	3.12	46.96	74.00	27.04	vertical	Peak
15870.00	35.06	2.34	37.40	54.00	16.60	vertical	Average
15870.00	43.48	2.34	45.82	74.00	28.18	vertical	Peak
17958.00	36.36	7.68	44.04	54.00	9.96	vertical	Average
17958.00	46.02	7.68	53.70	74.00	20.30	vertical	Peak

For 5470-5725 MHz:

Project No.: 2407T76694E-RF
Test Mode: 11a-5500
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

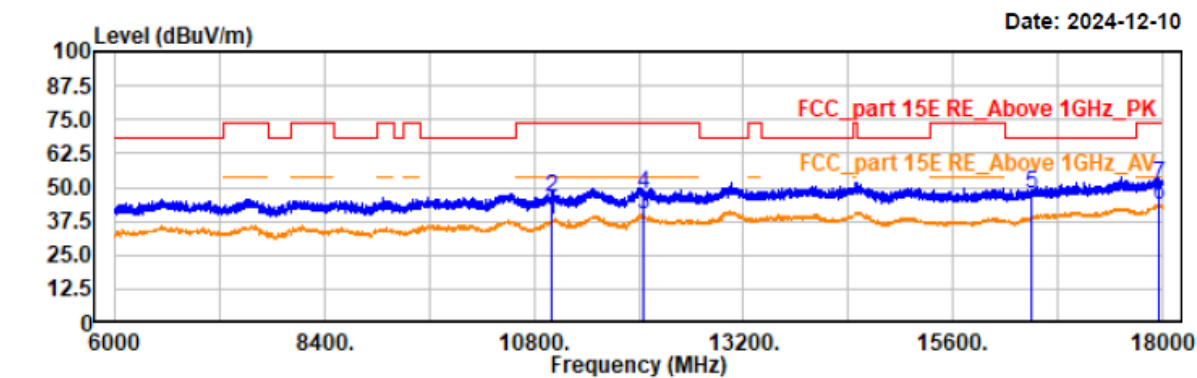


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	35.09	2.54	37.63	54.00	16.37	horizontal	Average
11000.00	43.66	2.54	46.20	74.00	27.80	horizontal	Peak
12045.60	36.01	4.17	40.18	54.00	13.82	horizontal	Average
12045.60	43.50	4.17	47.67	74.00	26.33	horizontal	Peak
16500.00	44.01	3.50	47.51	68.20	20.69	horizontal	Peak
17952.00	36.12	7.67	43.79	54.00	10.21	horizontal	Average
17952.00	43.20	7.67	50.87	74.00	23.13	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11a-5500
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

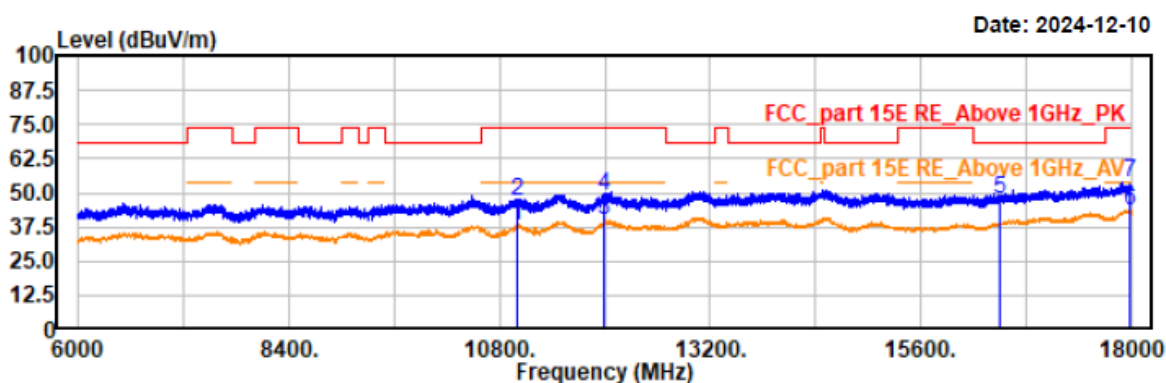

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.08	2.54	37.62	54.00	16.38	vertical	Average
11000.40	44.08	2.54	46.62	74.00	27.38	vertical	Peak
11998.80	35.75	4.25	40.00	54.00	14.00	vertical	Average
11998.80	44.44	4.25	48.69	74.00	25.31	vertical	Peak
16500.00	43.83	3.50	47.33	68.20	20.87	vertical	Peak
17992.80	35.87	7.72	43.59	54.00	10.41	vertical	Average
17992.80	46.39	7.72	54.11	74.00	19.89	vertical	Peak

Project No.: 2407T76694E-RF

Test Mode: 11a-5580


EUT Model: PH81

Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

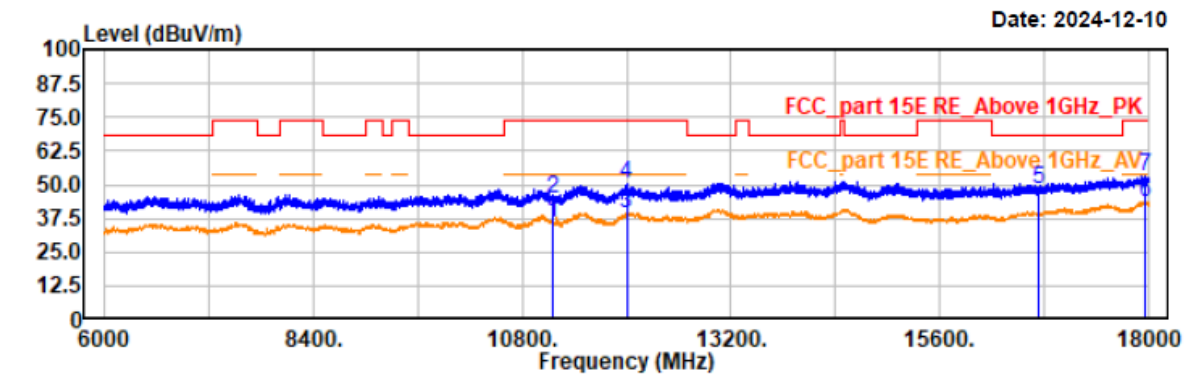

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.86	2.73	35.59	54.00	18.41	horizontal	Average
11160.00	42.24	2.73	44.97	74.00	29.03	horizontal	Peak
12000.00	35.34	4.25	39.59	54.00	14.41	horizontal	Average
12000.00	46.20	4.25	50.45	74.00	23.55	horizontal	Peak
16740.00	43.90	4.15	48.05	68.20	20.15	horizontal	Peak
17953.20	35.77	7.67	43.44	54.00	10.56	horizontal	Average
17953.20	45.24	7.67	52.91	74.00	21.09	horizontal	Peak

Project No.: 2407T76694E-RF

Test Mode: 11a-5580


EUT Model: PH81

Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa


Tested by: Wlif Wu

Power Source: AC 120V/60Hz

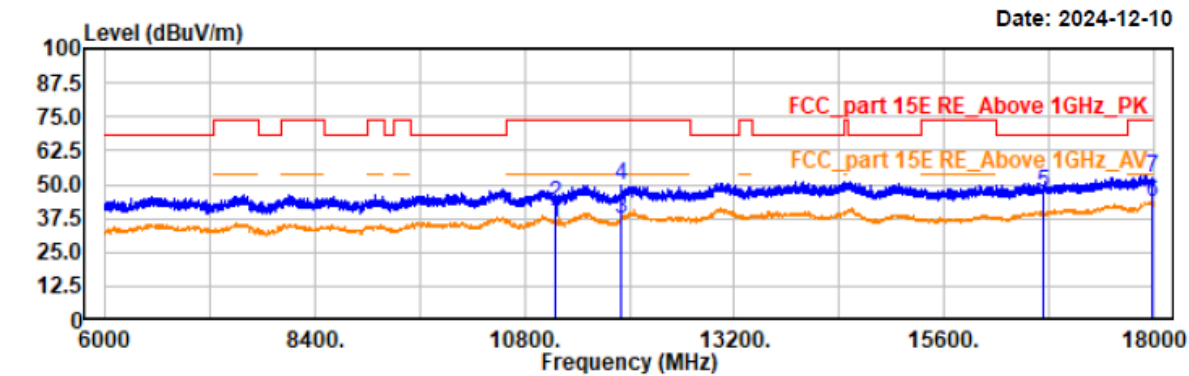

Project No.: 2407T76694E-RF
Test Mode: 11a-5700
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

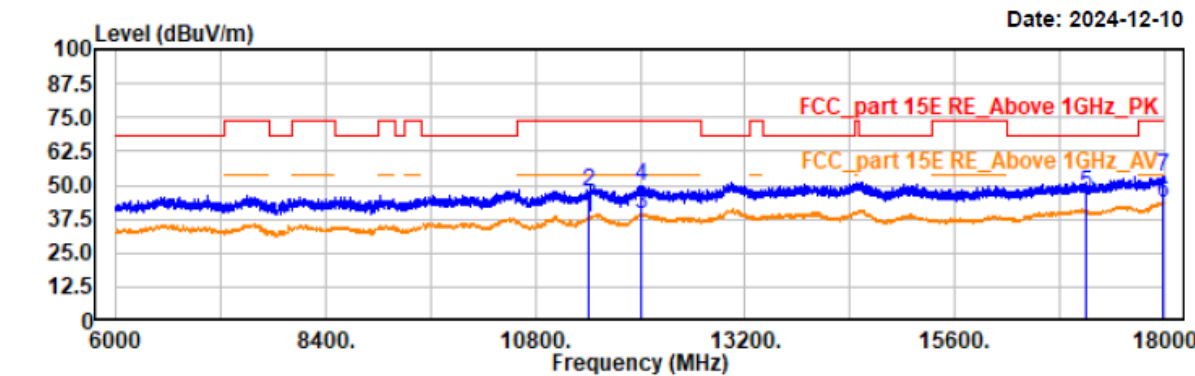


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.80	3.02	37.82	54.00	16.18	horizontal	Average
11400.00	44.31	3.02	47.33	74.00	26.67	horizontal	Peak
12007.20	35.11	4.24	39.35	54.00	14.65	horizontal	Average
12007.20	45.33	4.24	49.57	74.00	24.43	horizontal	Peak
17100.00	41.86	5.17	47.03	68.20	21.17	horizontal	Peak
17988.00	35.46	7.72	43.18	54.00	10.82	horizontal	Average
17988.00	45.34	7.72	53.06	74.00	20.94	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11a-5700
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

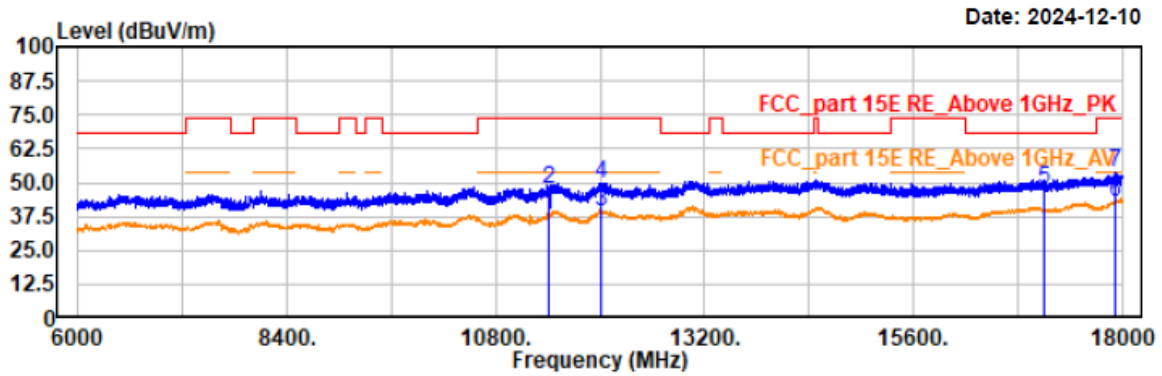**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	35.10	3.02	38.12	54.00	15.88	vertical	Average
11400.00	44.64	3.02	47.66	74.00	26.34	vertical	Peak
12003.60	35.38	4.24	39.62	54.00	14.38	vertical	Average
12003.60	45.63	4.24	49.87	74.00	24.13	vertical	Peak
17100.00	42.20	5.17	47.37	68.20	20.83	vertical	Peak
17923.20	35.35	7.62	42.97	54.00	11.03	vertical	Average
17923.20	45.95	7.62	53.57	74.00	20.43	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5500
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

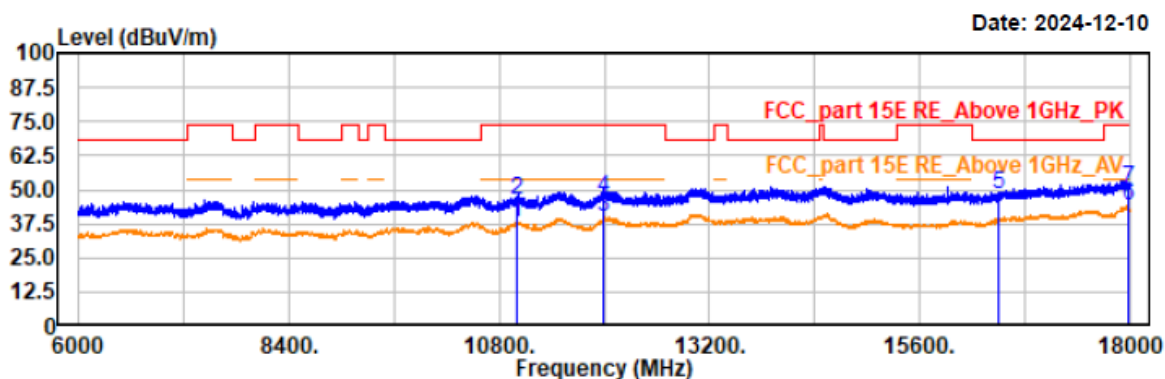

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.34	2.54	37.88	54.00	16.12	horizontal	Average
11000.40	43.55	2.54	46.09	74.00	27.91	horizontal	Peak
11995.20	35.68	4.24	39.92	54.00	14.08	horizontal	Average
11995.20	42.94	4.24	47.18	74.00	26.82	horizontal	Peak
16500.00	44.56	3.50	48.06	68.20	20.14	horizontal	Peak
17984.40	36.23	7.72	43.95	54.00	10.05	horizontal	Average
17984.40	42.83	7.72	50.55	74.00	23.45	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5500
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

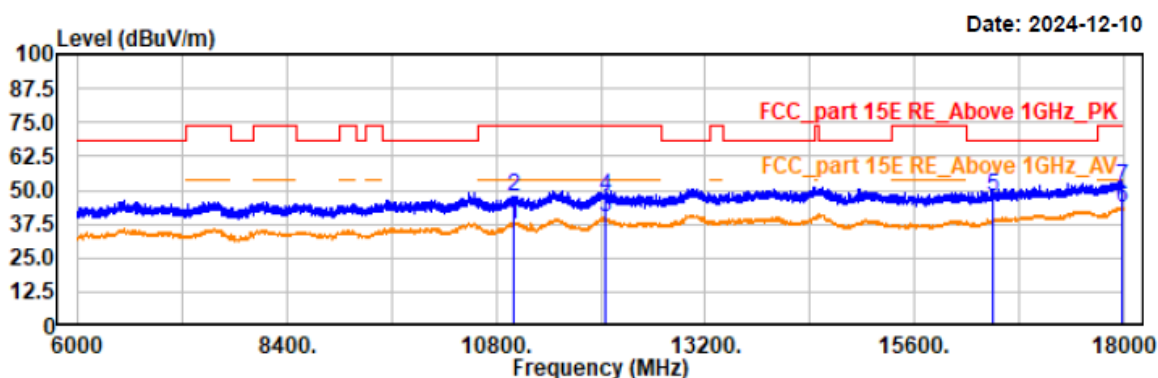
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	34.88	2.54	37.42	54.00	16.58	vertical	Average
11000.40	45.20	2.54	47.74	74.00	26.26	vertical	Peak
12051.60	35.99	4.16	40.15	54.00	13.85	vertical	Average
12051.60	43.15	4.16	47.31	74.00	26.69	vertical	Peak
16500.00	44.13	3.50	47.63	68.20	20.57	vertical	Peak
17989.20	35.90	7.72	43.62	54.00	10.38	vertical	Average
17989.20	43.43	7.72	51.15	74.00	22.85	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5580
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

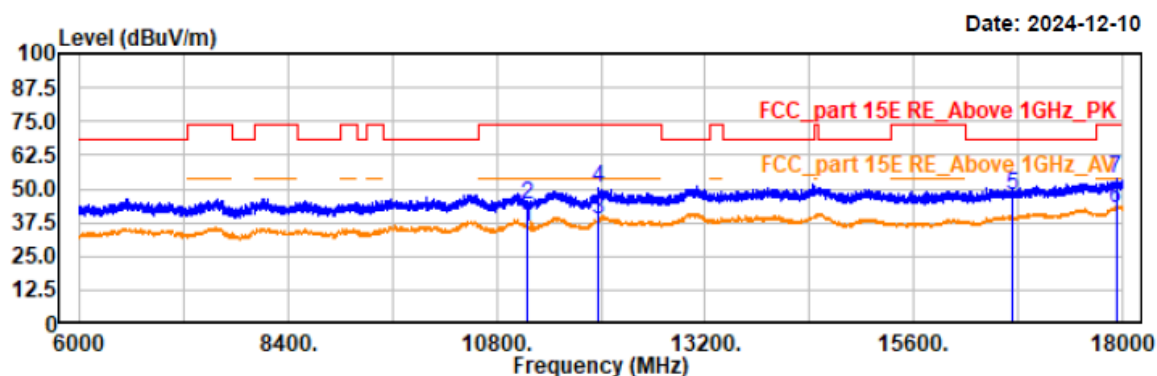


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.94	2.73	35.67	54.00	18.33	horizontal	Average
11160.00	41.32	2.73	44.05	74.00	29.95	horizontal	Peak
11964.00	34.15	4.17	38.32	54.00	15.68	horizontal	Average
11964.00	45.87	4.17	50.04	74.00	23.96	horizontal	Peak
16740.00	43.11	4.15	47.26	68.20	20.94	horizontal	Peak
17929.20	34.99	7.64	42.63	54.00	11.37	horizontal	Average
17929.20	45.98	7.64	53.62	74.00	20.38	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5580
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

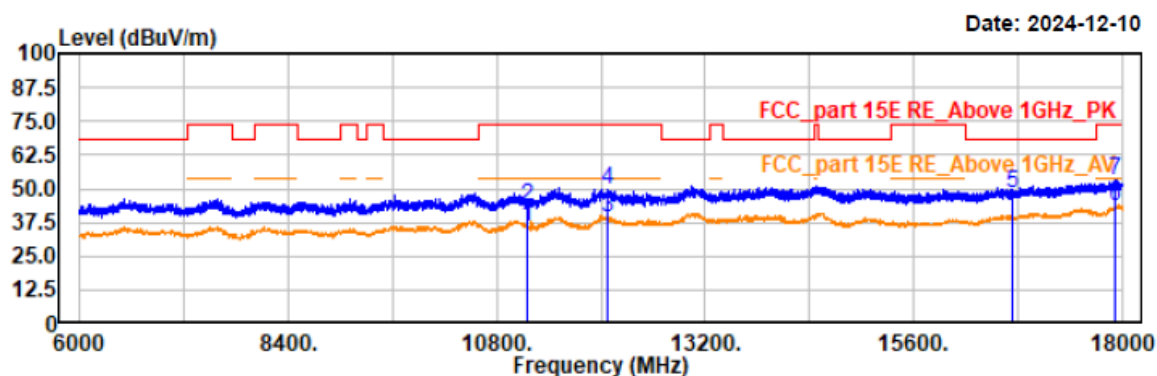

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.88	2.73	35.61	54.00	18.39	vertical	Average
11160.00	41.05	2.73	43.78	74.00	30.22	vertical	Peak
12070.80	34.91	4.12	39.03	54.00	14.97	vertical	Average
12070.80	45.51	4.12	49.63	74.00	24.37	vertical	Peak
16740.00	43.94	4.15	48.09	68.20	20.11	vertical	Peak
17922.00	35.69	7.62	43.31	54.00	10.69	vertical	Average
17922.00	45.75	7.62	53.37	74.00	20.63	vertical	Peak

Project No.: 2407T76694E-RF

Temp/Humi/ATM: 21.3°C/51%/100.1kPa


Test Mode: 11ac20-5700

Tested by: Wlif Wu

EUT Model: PH81

Power Source: AC 120V/60Hz

Test distance: 3m

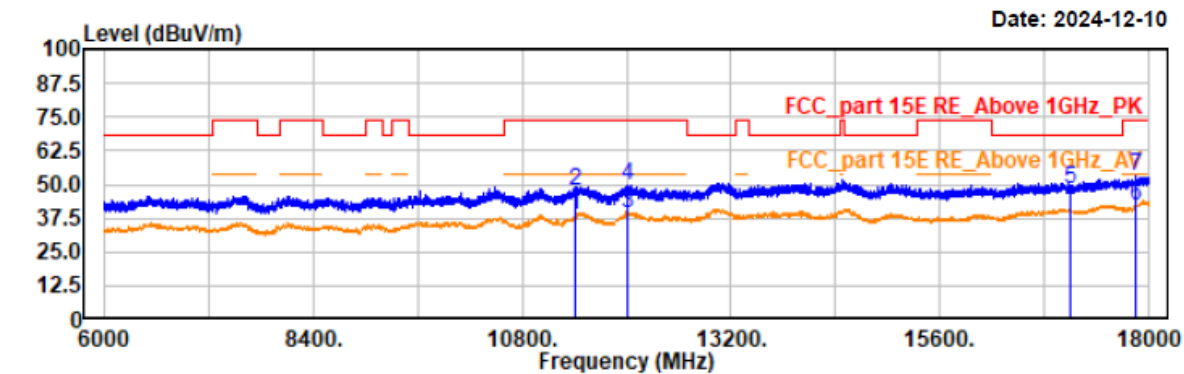


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	35.41	3.02	38.43	54.00	15.57	horizontal	Average
11400.00	44.75	3.02	47.77	74.00	26.23	horizontal	Peak
12014.40	34.75	4.22	38.97	54.00	15.03	horizontal	Average
12014.40	45.72	4.22	49.94	74.00	24.06	horizontal	Peak
17100.00	43.25	5.17	48.42	68.20	19.78	horizontal	Peak
17858.40	34.47	7.45	41.92	54.00	12.08	horizontal	Average
17858.40	45.45	7.45	52.90	74.00	21.10	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5700
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

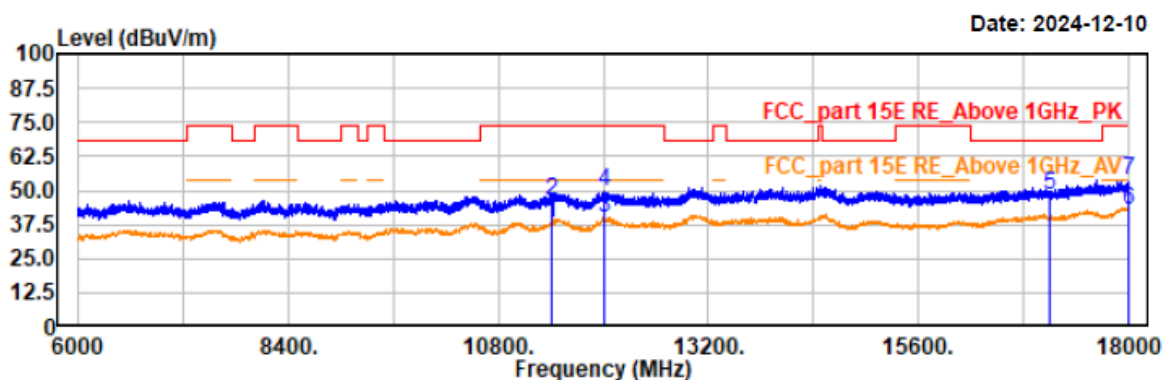**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.75	3.02	37.77	54.00	16.23	vertical	Average
11400.00	43.43	3.02	46.45	74.00	27.55	vertical	Peak
12001.20	35.80	4.25	40.05	54.00	13.95	vertical	Average
12001.20	45.18	4.25	49.43	74.00	24.57	vertical	Peak
17100.00	42.82	5.17	47.99	68.20	20.21	vertical	Peak
18000.00	34.84	7.74	42.58	54.00	11.42	vertical	Average
18000.00	45.83	7.74	53.57	74.00	20.43	vertical	Peak

Project No.: 2407T76694E-RF

Test Mode: 11ac40-5510


EUT Model: PH81

Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

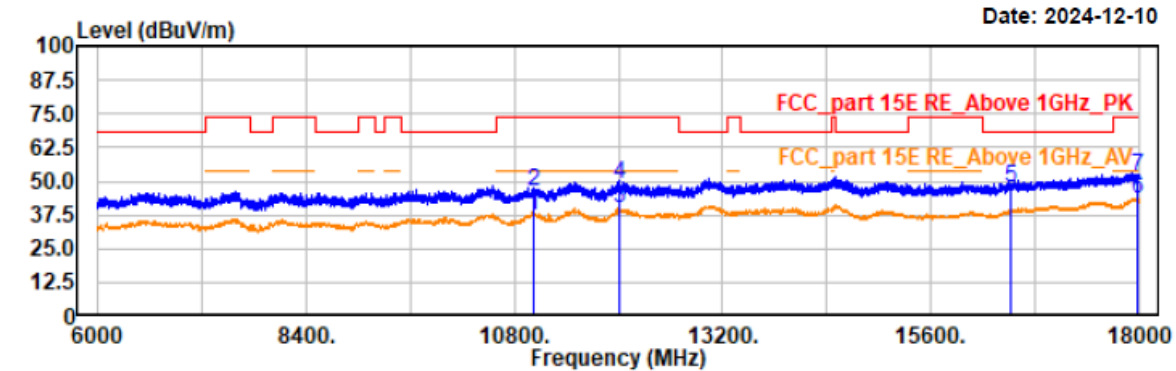

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11020.00	35.01	2.56	37.57	54.00	16.43	horizontal	Average
11020.00	43.74	2.56	46.30	74.00	27.70	horizontal	Peak
12001.20	35.72	4.25	39.97	54.00	14.03	horizontal	Average
12001.20	44.70	4.25	48.95	74.00	25.05	horizontal	Peak
16530.00	44.30	3.58	47.88	68.20	20.32	horizontal	Peak
17989.20	35.98	7.72	43.70	54.00	10.30	horizontal	Average
17989.20	43.85	7.72	51.57	74.00	22.43	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac40-5510
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

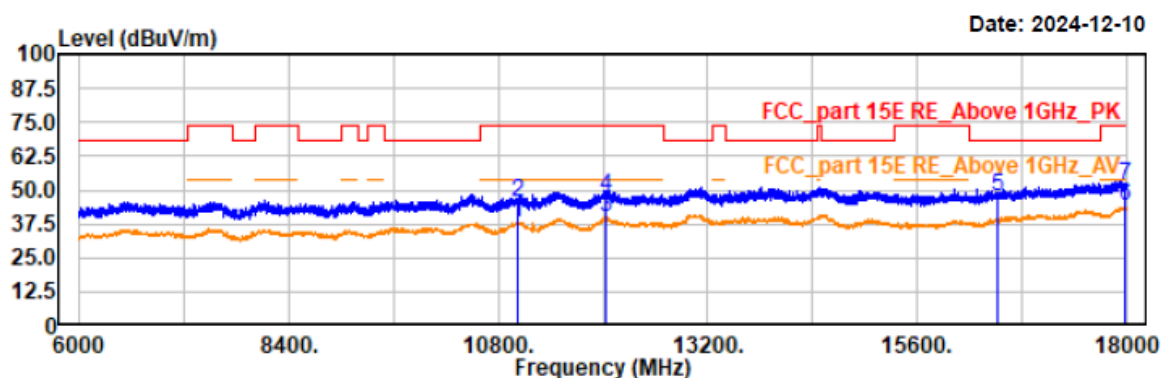**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11019.60	35.41	2.56	37.97	54.00	16.03	vertical	Average
11019.60	43.06	2.56	45.62	74.00	28.38	vertical	Peak
12038.40	35.82	4.18	40.00	54.00	14.00	vertical	Average
12038.40	43.56	4.18	47.74	74.00	26.26	vertical	Peak
16530.00	43.95	3.58	47.53	68.20	20.67	vertical	Peak
17989.20	36.13	7.72	43.85	54.00	10.15	vertical	Average
17989.20	43.92	7.72	51.64	74.00	22.36	vertical	Peak

Project No.: 2407T76694E-RF

Test Mode: 11ac40-5550


EUT Model: PH81

Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

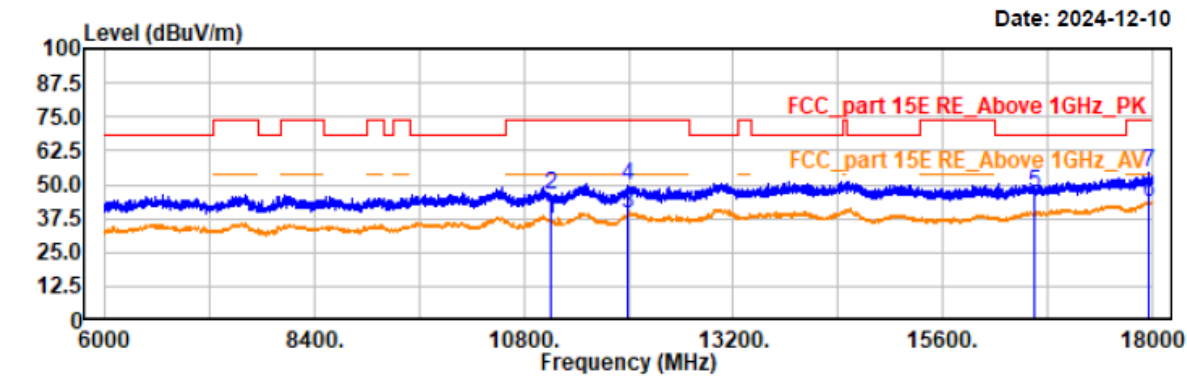

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	34.41	2.65	37.06	54.00	16.94	horizontal	Average
11100.00	43.72	2.65	46.37	74.00	27.63	horizontal	Peak
11998.80	35.13	4.25	39.38	54.00	14.62	horizontal	Average
11998.80	45.48	4.25	49.73	74.00	24.27	horizontal	Peak
16650.00	43.32	3.90	47.22	68.20	20.98	horizontal	Peak
17964.00	35.81	7.68	43.49	54.00	10.51	horizontal	Average
17964.00	46.47	7.68	54.15	74.00	19.85	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac40-5550
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

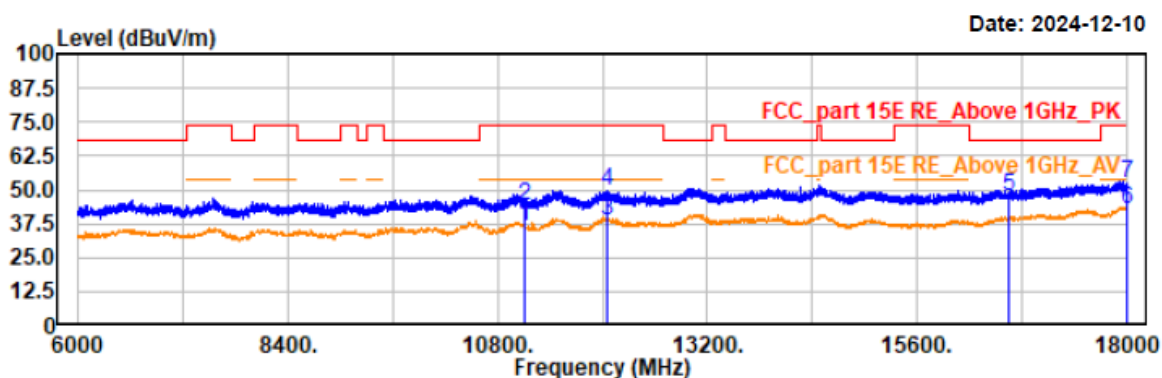**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	33.93	2.65	36.58	54.00	17.42	vertical	Average
11100.00	41.62	2.65	44.27	74.00	29.73	vertical	Peak
12061.20	34.81	4.14	38.95	54.00	15.05	vertical	Average
12061.20	45.21	4.14	49.35	74.00	24.65	vertical	Peak
16650.00	43.87	3.90	47.77	68.20	20.43	vertical	Peak
17995.20	35.34	7.74	43.08	54.00	10.92	vertical	Average
17995.20	45.02	7.74	52.76	74.00	21.24	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac40-5670
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

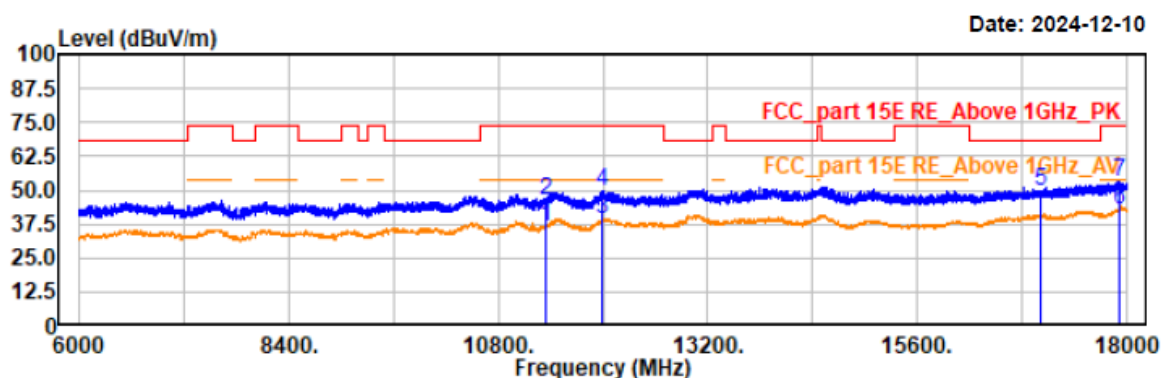
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	33.68	2.94	36.62	54.00	17.38	horizontal	Average
11340.00	43.44	2.94	46.38	74.00	27.62	horizontal	Peak
11997.60	35.06	4.24	39.30	54.00	14.70	horizontal	Average
11997.60	45.71	4.24	49.95	74.00	24.05	horizontal	Peak
17010.00	44.42	4.98	49.40	68.20	18.80	horizontal	Peak
17911.20	35.33	7.60	42.93	54.00	11.07	horizontal	Average
17911.20	45.47	7.60	53.07	74.00	20.93	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac40-5670
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

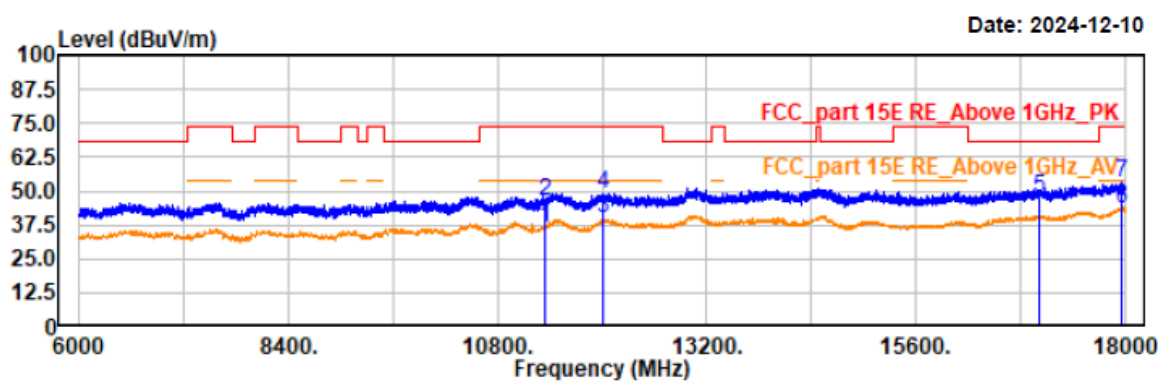

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	33.53	2.94	36.47	54.00	17.53	vertical	Average
11340.00	43.23	2.94	46.17	74.00	27.83	vertical	Peak
12009.60	35.43	4.23	39.66	54.00	14.34	vertical	Average
12009.60	44.94	4.23	49.17	74.00	24.83	vertical	Peak
17010.00	42.85	4.98	47.83	68.20	20.37	vertical	Peak
17964.00	35.51	7.68	43.19	54.00	10.81	vertical	Average
17964.00	45.31	7.68	52.99	74.00	21.01	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac80-5530
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

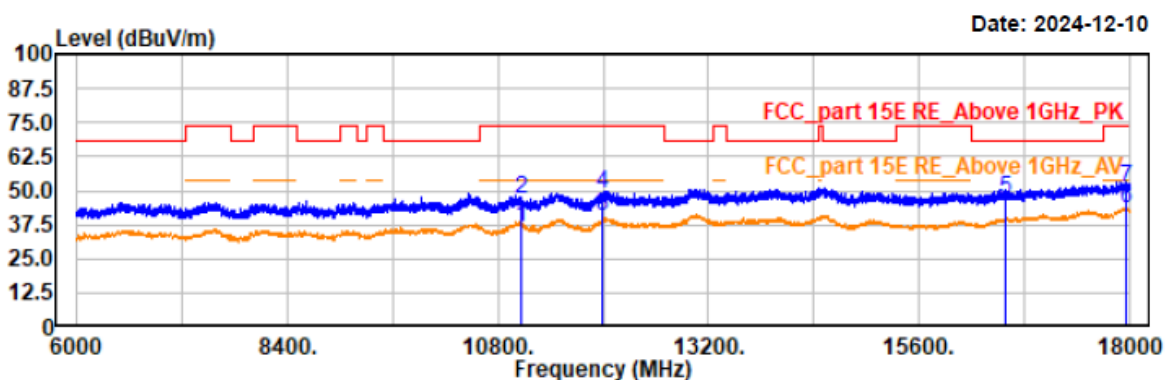


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.00	34.16	2.61	36.77	54.00	17.23	horizontal	Average
11060.00	43.95	2.61	46.56	74.00	27.44	horizontal	Peak
11998.80	36.10	4.25	40.35	54.00	13.65	horizontal	Average
11998.80	44.52	4.25	48.77	74.00	25.23	horizontal	Peak
16590.00	43.22	3.74	46.96	68.20	21.24	horizontal	Peak
17971.20	35.90	7.69	43.59	54.00	10.41	horizontal	Average
17971.20	43.01	7.69	50.70	74.00	23.30	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac80-5530
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

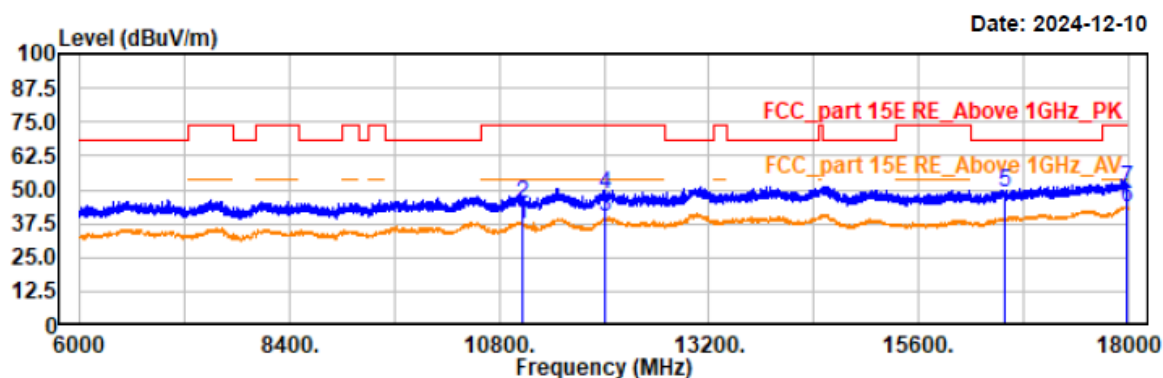**Trace: 1**


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.40	34.87	2.62	37.49	54.00	16.51	vertical	Average
11060.40	42.41	2.62	45.03	74.00	28.97	vertical	Peak
12001.20	35.85	4.25	40.10	54.00	13.90	vertical	Average
12001.20	44.08	4.25	48.33	74.00	25.67	vertical	Peak
16590.00	45.52	3.74	49.26	68.20	18.94	vertical	Peak
17992.80	36.07	7.72	43.79	54.00	10.21	vertical	Average
17992.80	42.83	7.72	50.55	74.00	23.45	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac80-5610
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

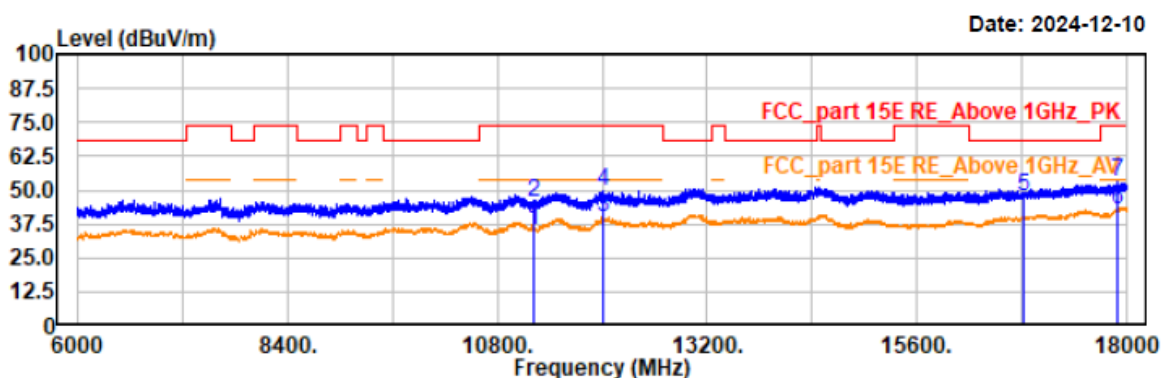
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	32.36	2.80	35.16	54.00	18.84	horizontal	Average
11220.00	42.39	2.80	45.19	74.00	28.81	horizontal	Peak
12001.20	35.49	4.25	39.74	54.00	14.26	horizontal	Average
12001.20	45.38	4.25	49.63	74.00	24.37	horizontal	Peak
16830.00	43.45	4.42	47.87	68.20	20.33	horizontal	Peak
17902.80	35.28	7.58	42.86	54.00	11.14	horizontal	Average
17902.80	45.32	7.58	52.90	74.00	21.10	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac80-5610
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

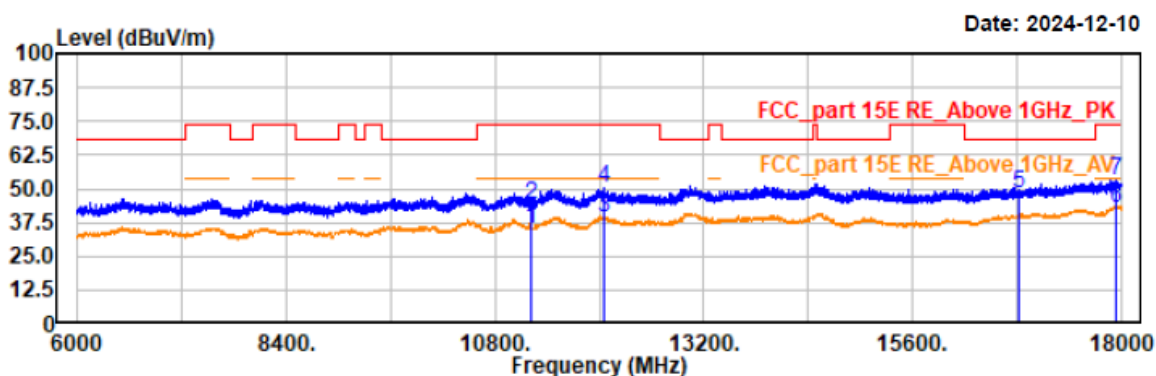

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	32.46	2.80	35.26	54.00	18.74	vertical	Average
11220.00	41.07	2.80	43.87	74.00	30.13	vertical	Peak
12060.00	35.11	4.14	39.25	54.00	14.75	vertical	Average
12060.00	46.15	4.14	50.29	74.00	23.71	vertical	Peak
16830.00	44.06	4.42	48.48	68.20	19.72	vertical	Peak
17936.40	35.41	7.64	43.05	54.00	10.95	vertical	Average
17936.40	45.13	7.64	52.77	74.00	21.23	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac80-5690
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

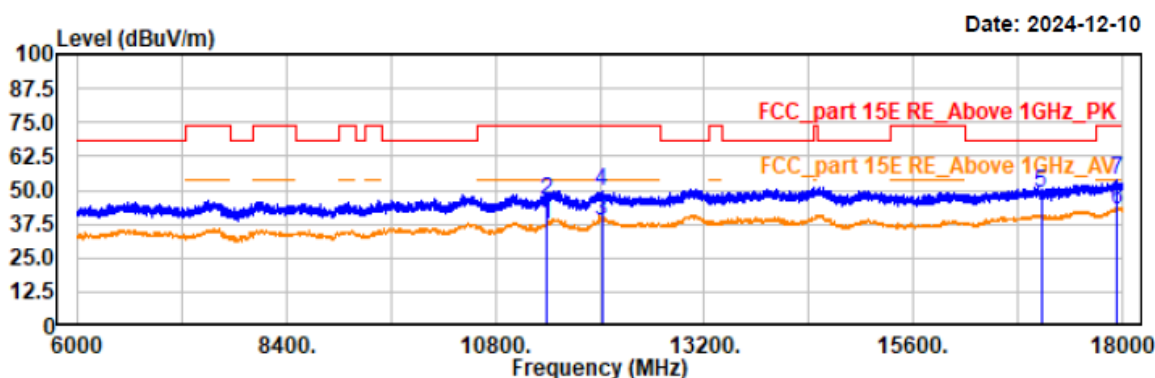
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11380.00	34.18	2.99	37.17	54.00	16.83	horizontal	Average
11380.00	43.07	2.99	46.06	74.00	27.94	horizontal	Peak
12021.60	34.59	4.21	38.80	54.00	15.20	horizontal	Average
12021.60	45.27	4.21	49.48	74.00	24.52	horizontal	Peak
17070.00	43.84	5.10	48.94	68.20	19.26	horizontal	Peak
17937.60	35.28	7.65	42.93	54.00	11.07	horizontal	Average
17937.60	45.93	7.65	53.58	74.00	20.42	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac80-5690
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

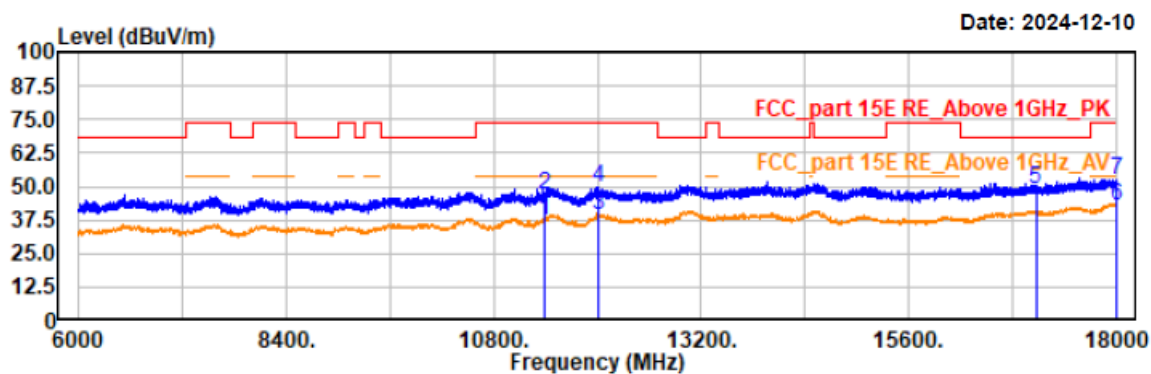

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11379.60	33.97	2.99	36.96	54.00	17.04	vertical	Average
11379.60	43.80	2.99	46.79	74.00	27.21	vertical	Peak
12002.40	35.28	4.25	39.53	54.00	14.47	vertical	Average
12002.40	45.66	4.25	49.91	74.00	24.09	vertical	Peak
17070.00	43.53	5.10	48.63	68.20	19.57	vertical	Peak
17996.40	34.89	7.74	42.63	54.00	11.37	vertical	Average
17996.40	44.82	7.74	52.56	74.00	21.44	vertical	Peak

For 5725-5850 MHz:

Project No.: 2407T76694E-RF
Test Mode: 11a-5745
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

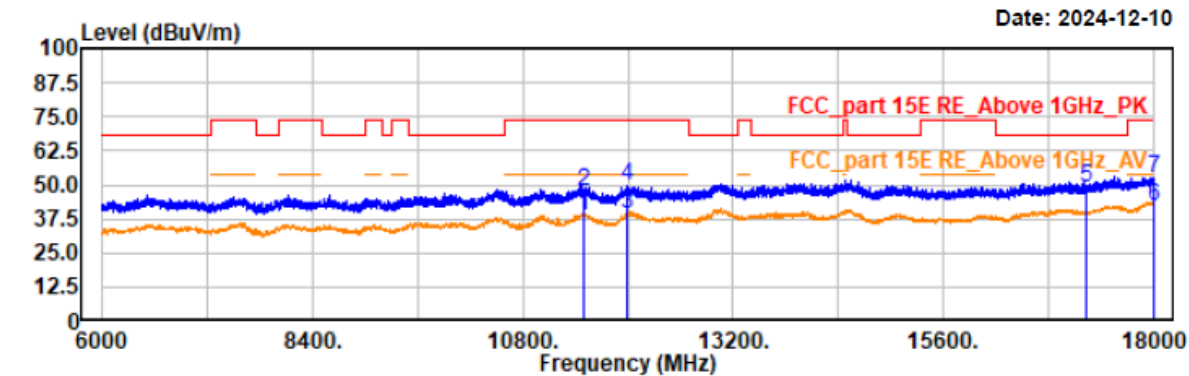

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.78	3.12	38.90	54.00	15.10	horizontal	Average
11490.00	44.25	3.12	47.37	74.00	26.63	horizontal	Peak
11996.40	35.39	4.24	39.63	54.00	14.37	horizontal	Average
11996.40	45.72	4.24	49.96	74.00	24.04	horizontal	Peak
17235.00	43.21	5.59	48.80	68.20	19.40	horizontal	Peak
17996.40	34.56	7.74	42.30	54.00	11.70	horizontal	Average
17996.40	44.98	7.74	52.72	74.00	21.28	horizontal	Peak

Project No.: 2407T76694E-RF

Test Mode: 11a-5745


EUT Model: PH81

Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

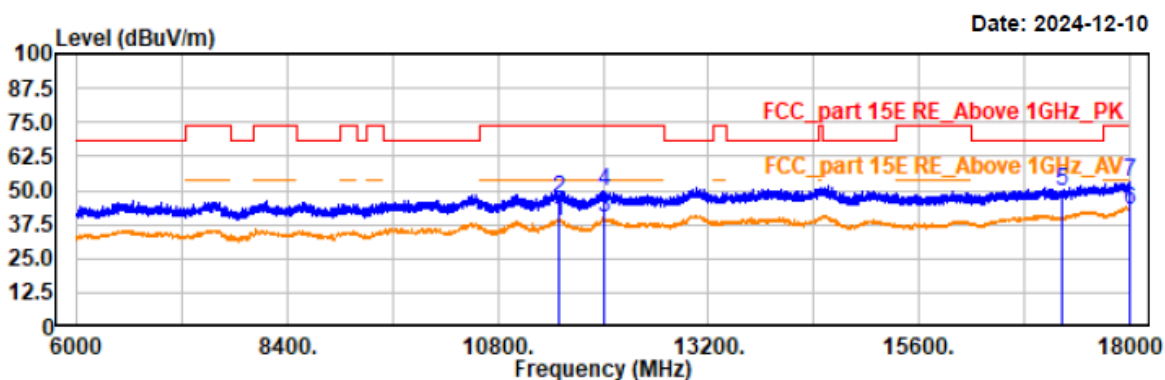

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.63	3.12	38.75	54.00	15.25	vertical	Average
11490.00	43.78	3.12	46.90	74.00	27.10	vertical	Peak
12003.60	35.98	4.24	40.22	54.00	13.78	vertical	Average
12003.60	45.23	4.24	49.47	74.00	24.53	vertical	Peak
17235.00	44.20	5.59	49.79	68.20	18.41	vertical	Peak
17997.60	34.70	7.74	42.44	54.00	11.56	vertical	Average
17997.60	45.09	7.74	52.83	74.00	21.17	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11a-5785
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

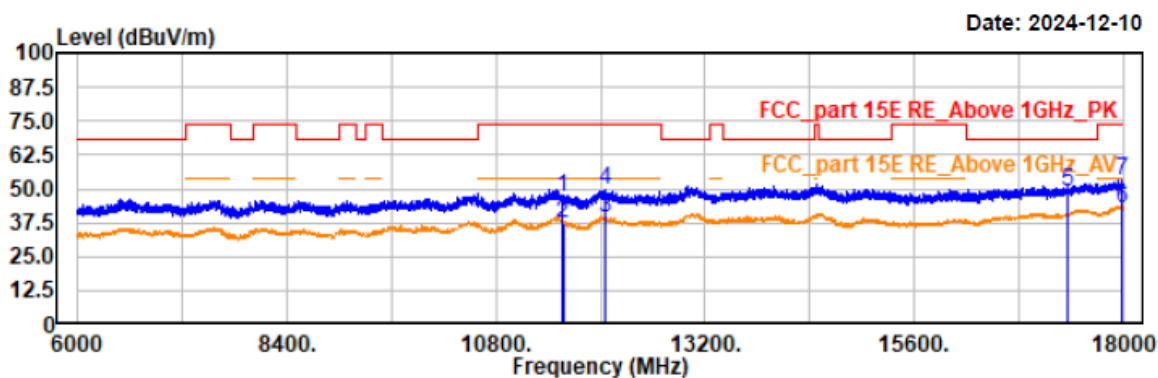


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	43.41	3.34	46.75	74.00	27.25	horizontal	Peak
11570.40	34.22	3.34	37.56	54.00	16.44	horizontal	Average
12054.00	35.07	4.15	39.22	54.00	14.78	horizontal	Average
12054.00	45.33	4.15	49.48	74.00	24.52	horizontal	Peak
17354.40	43.09	5.91	49.00	68.20	19.20	horizontal	Peak
17973.60	35.23	7.70	42.93	54.00	11.07	horizontal	Average
17973.60	45.31	7.70	53.01	74.00	20.99	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11a-5785
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

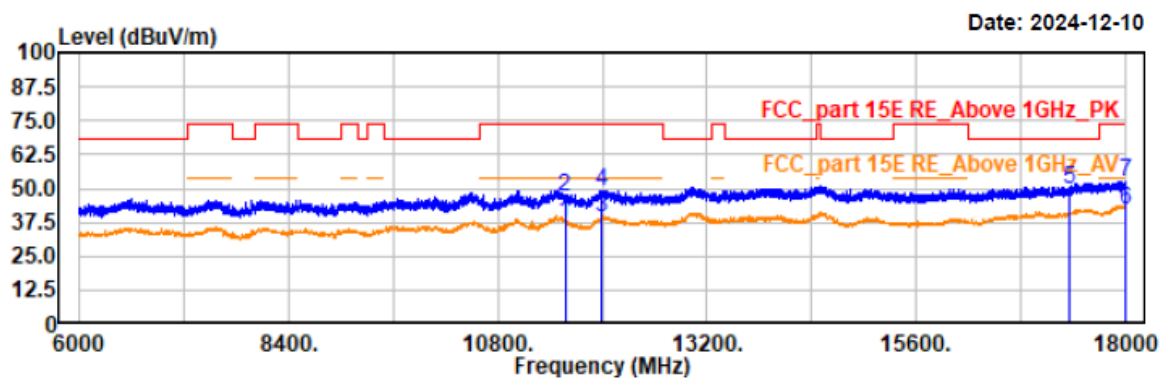**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.40	34.18	3.34	37.52	54.00	16.48	vertical	Average
11570.40	43.46	3.34	46.80	74.00	27.20	vertical	Peak
11991.60	34.74	4.23	38.97	54.00	15.03	vertical	Average
11991.60	45.02	4.23	49.25	74.00	24.75	vertical	Peak
17355.00	43.68	5.91	49.59	68.20	18.61	vertical	Peak
17997.60	34.62	7.74	42.36	54.00	11.64	vertical	Average
17997.60	44.69	7.74	52.43	74.00	21.57	vertical	Peak

Project No.: 2407T76694E-RF

Test Mode: 11a-5825


EUT Model: PH81

Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

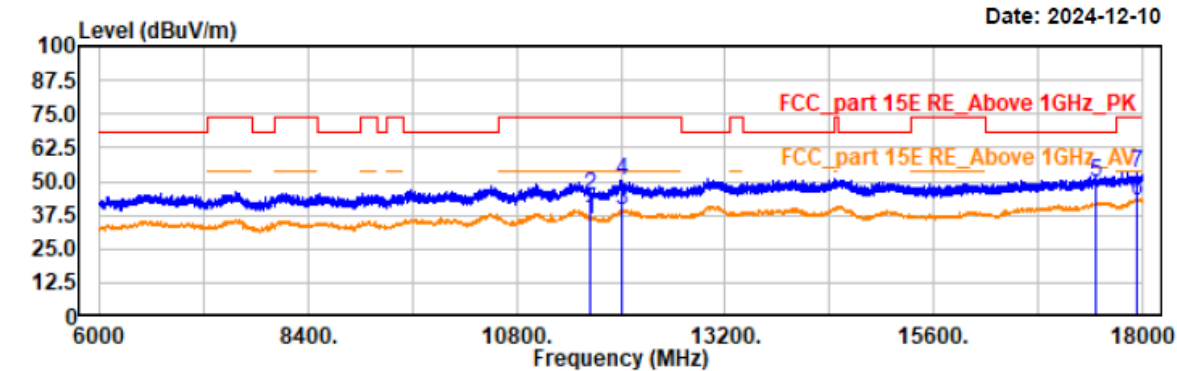


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	32.40	3.53	35.93	54.00	18.07	horizontal	Average
11650.00	41.55	3.53	45.08	74.00	28.92	horizontal	Peak
12007.20	35.33	4.24	39.57	54.00	14.43	horizontal	Average
12007.20	46.15	4.24	50.39	74.00	23.61	horizontal	Peak
17475.00	43.21	6.23	49.44	68.20	18.76	horizontal	Peak
17948.40	35.37	7.66	43.03	54.00	10.97	horizontal	Average
17948.40	45.20	7.66	52.86	74.00	21.14	horizontal	Peak

Project No.: 2407T76694E-RF
Test Mode: 11a-5825
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

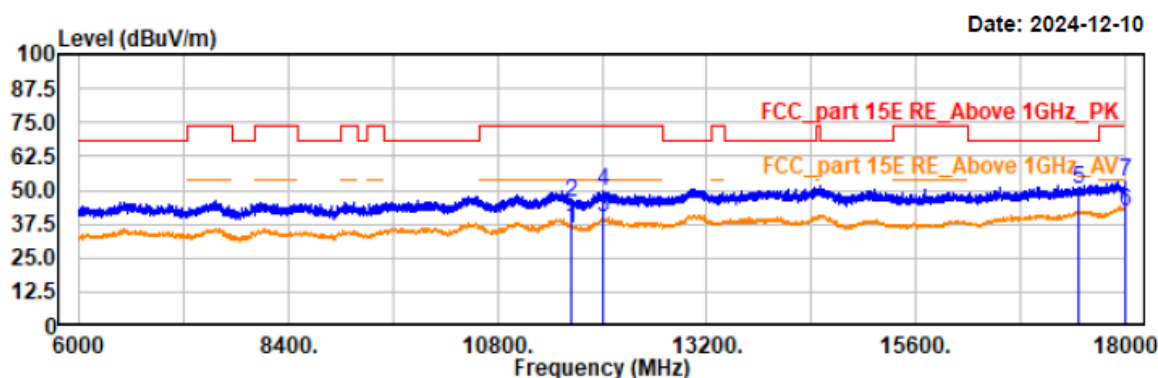
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	32.66	3.53	36.19	54.00	17.81	vertical	Average
11649.60	41.96	3.53	45.49	74.00	28.51	vertical	Peak
12004.80	35.69	4.24	39.93	54.00	14.07	vertical	Average
12004.80	45.14	4.24	49.38	74.00	24.62	vertical	Peak
17475.00	44.01	6.23	50.24	68.20	17.96	vertical	Peak
17997.60	34.46	7.74	42.20	54.00	11.80	vertical	Average
17997.60	45.23	7.74	52.97	74.00	21.03	vertical	Peak

Project No.: 2407T76694E-RF
Test Mode: 11ac20-5745
EUT Model: PH81
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

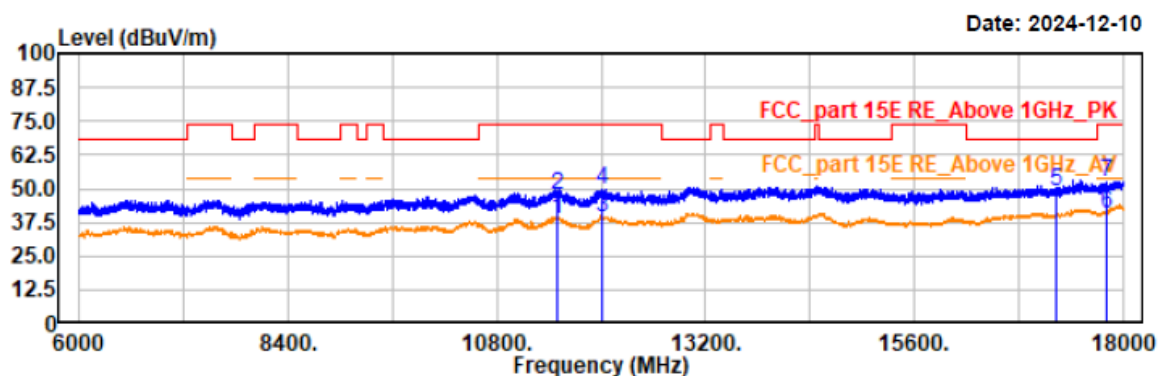

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.51	3.12	38.63	54.00	15.37	horizontal	Average
11490.00	44.71	3.12	47.83	74.00	26.17	horizontal	Peak
12003.60	35.26	4.24	39.50	54.00	14.50	horizontal	Average
12003.60	45.47	4.24	49.71	74.00	24.29	horizontal	Peak
17234.40	43.63	5.58	49.21	68.20	18.99	horizontal	Peak
17816.40	33.72	7.30	41.02	54.00	12.98	horizontal	Average
17816.40	45.26	7.30	52.56	74.00	21.44	horizontal	Peak