



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: AKUVOX (XIAMEN) NETWORKS CO., LTD.

Address: 10/F, No.56 Guanri Road, Software Park II, Xiamen 361009, China

FCC ID: 2AHCR-X912S

Product Name: Door Phone

Model Number: X912S

Standard(s): 47 CFR Part 15 Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR22080044-00A

Date Of Issue: 2022-10-09

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 DESCRIPTION OF TEST CONFIGURATION	5
1.2.1 EUT Operation Condition:.....	5
1.2.2 Support Equipment List and Details	5
1.2.3 Support Cable List and Details	5
1.2.4 Block Diagram of Test Setup.....	6
1.3 MEASUREMENT UNCERTAINTY	8
2. SUMMARY OF TEST RESULTS	9
3. REQUIREMENTS AND TEST PROCEDURES	10
3.1 AC LINE CONDUCTED EMISSIONS	10
3.1.1 EUT Setup.....	10
3.1.2 EMI Test Receiver Setup	10
3.1.3 Test Procedure	11
3.1.4 Corrected Amplitude & Margin Calculation.....	11
3.2 RADIATION SPURIOUS EMISSIONS	12
3.2.1 EUT Setup.....	12
3.2.2 EMI Test Receiver Setup	13
3.2.3 Test Procedure	13
3.2.4 Corrected Amplitude & Margin Calculation.....	13
4. TEST DATA AND RESULTS.....	14
4.1 AC LINE CONDUCTED EMISSIONS	14
4.2 RADIATION SPURIOUS EMISSIONS	19

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Door Phone
EUT Model:	X912S
Highest Operation Frequency:	2480 MHz
Rated Input Voltage:	DC 12V from adapter or DC 48V from POE
Serial Number:	CR22080044-RF-S1
EUT Received Date:	2022.08.27
EUT Received Status:	GOOD

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Typical Use Mode, which was provided by the manufacturer. Test Mode: Operating
Equipment Modifications:	No
EUT Exercise Software:	No

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Huntkey	AC/DC Adapter	HKA01105021-XE	0D1805002143
TP-link	PoE Adapter	TL-SF1005P	1167604001685
AKUVOX	SIP Video Phone Terminal	AIO-211	J5ZPL85148360
DELL	Laptop	E6410	G4JJPM1
TaoTimeClub	Load	100W40RJ	100W40RJ

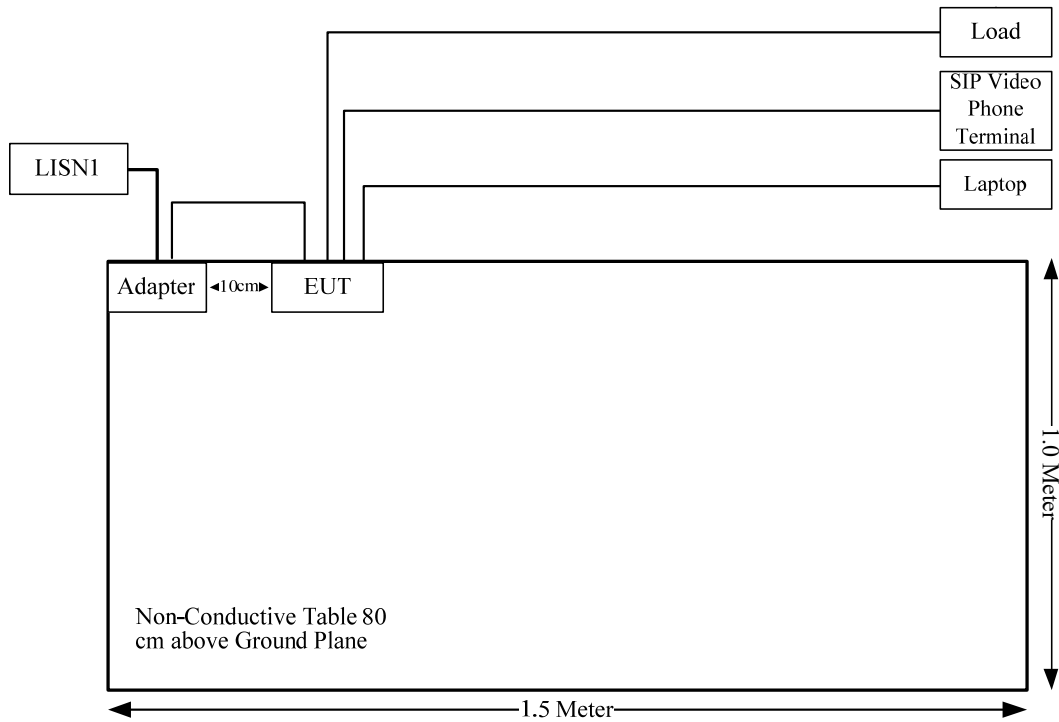
1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Signal Cable	No	No	10	EUT	SIP Video Phone Terminal
Signal Cable	No	No	10	EUT	Load
RJ45 Cable	No	No	3	POE	EUT
RJ45 Cable	No	No	10	EUT/PoE	Laptop
Power Line	No	No	1.5	Adapter	EUT

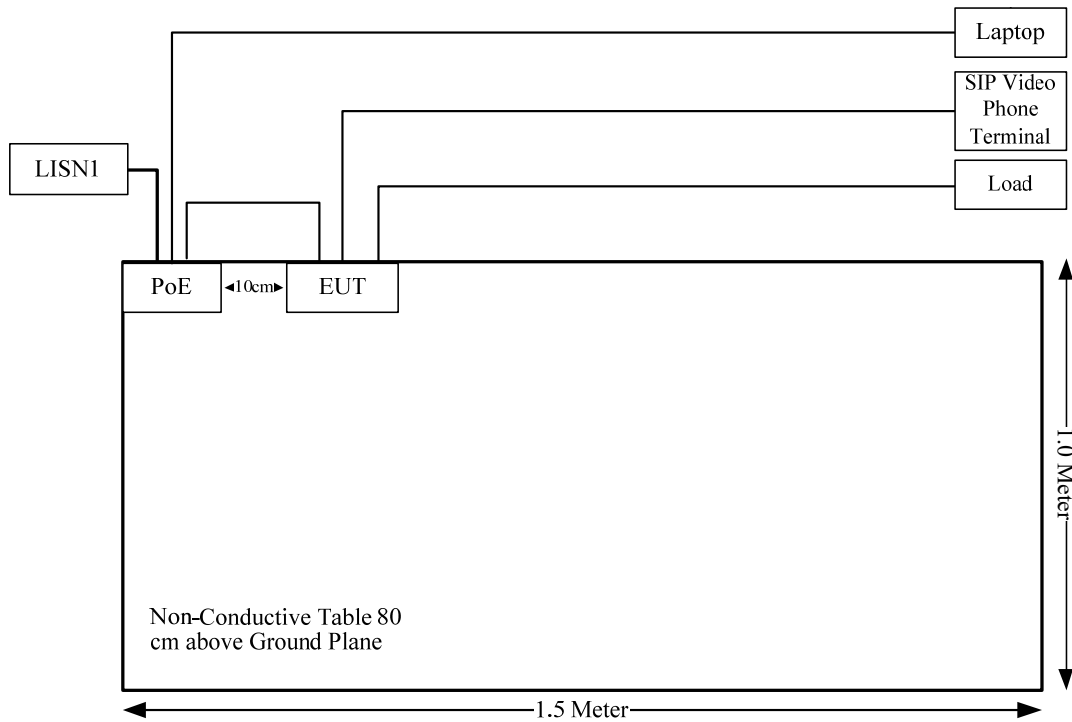
1.2.4 Block Diagram of Test Setup

Conducted emissions:

Adapter mode:

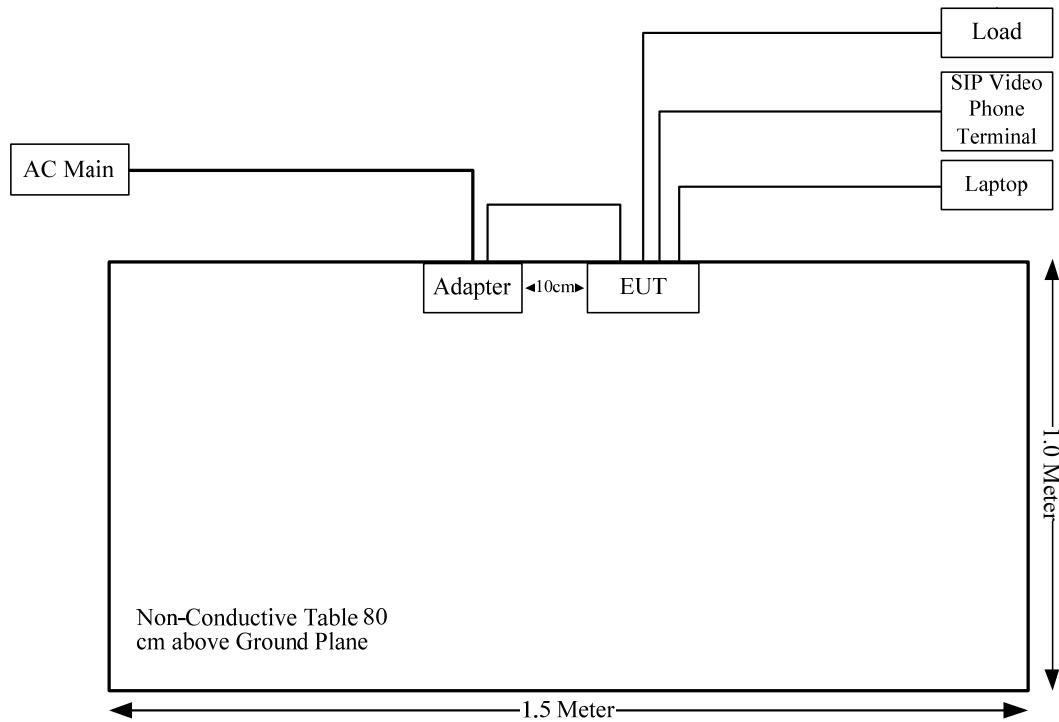


POE mode:

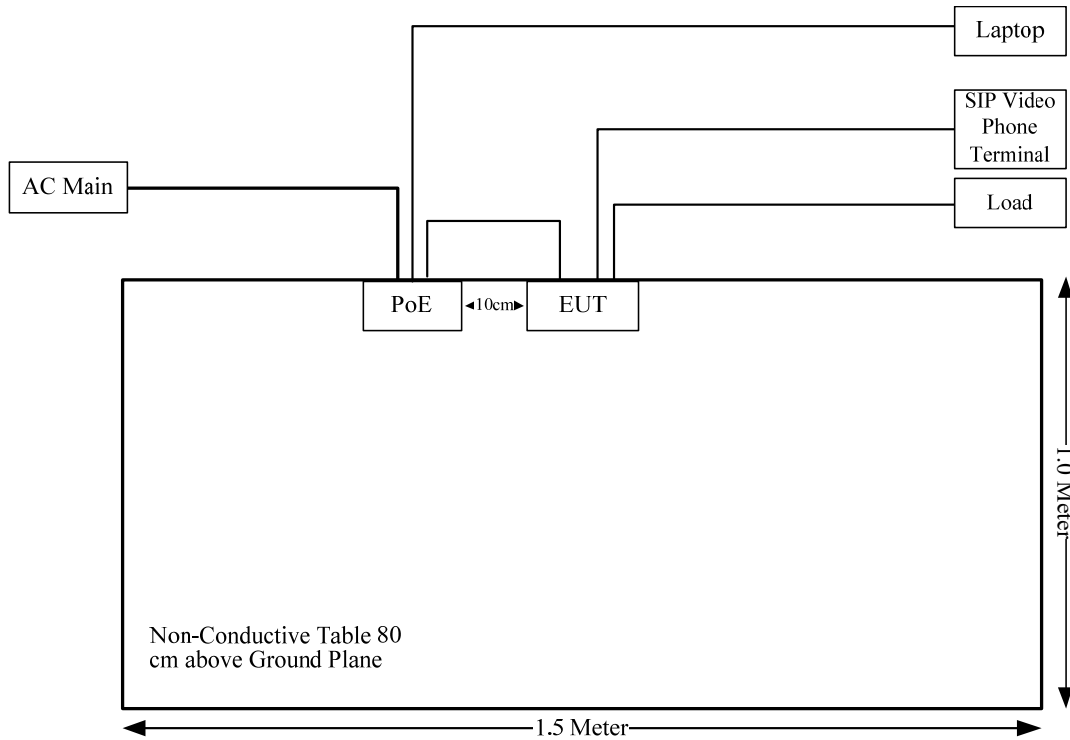


Radiated emissions:

Adapter mode:



POE mode:



1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

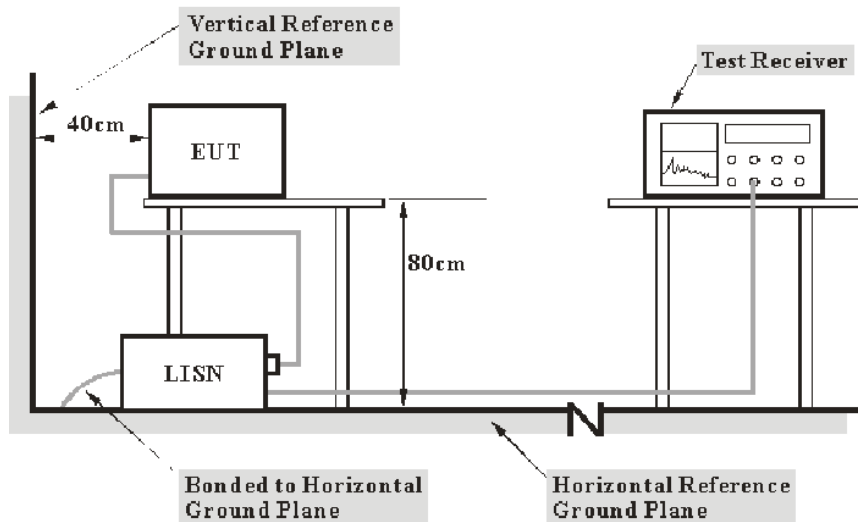
2. SUMMARY OF TEST RESULTS

Standard(s) Section	Description of Test	Result
§15.107	Conducted emissions	Compliant
§15.109	Radiated emissions	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

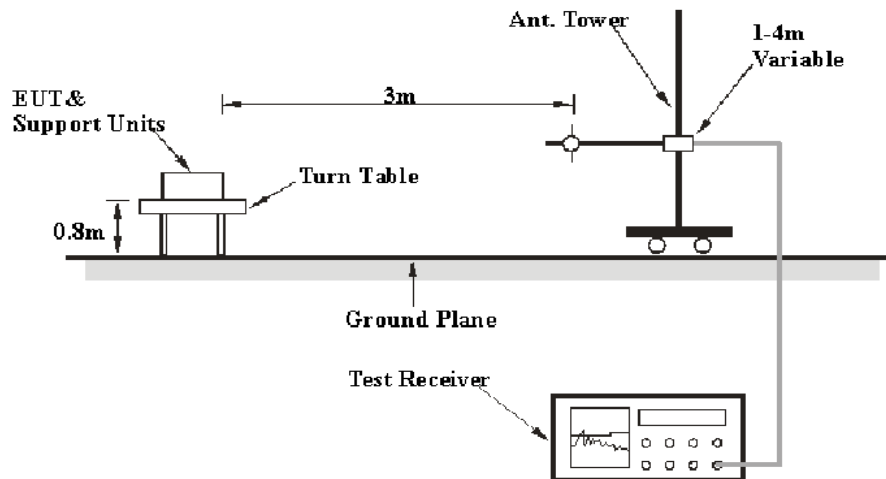
The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

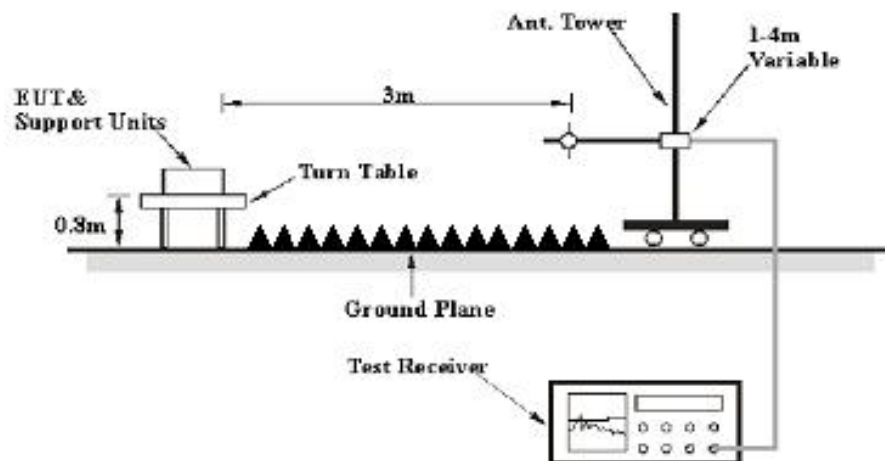
3.2 Radiation Spurious Emissions

3.2.1 EUT Setup

Below 1GHz:



Above 1GHz:



The radiated emissions were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

3.2.2 EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	3 MHz	/	AVG

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.3 Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR22080044-RF-S1	Test Date:	2022-08-30
Test Site:	CE	Test Mode:	Operating
Tester:	Vic Du	Test Result:	Pass

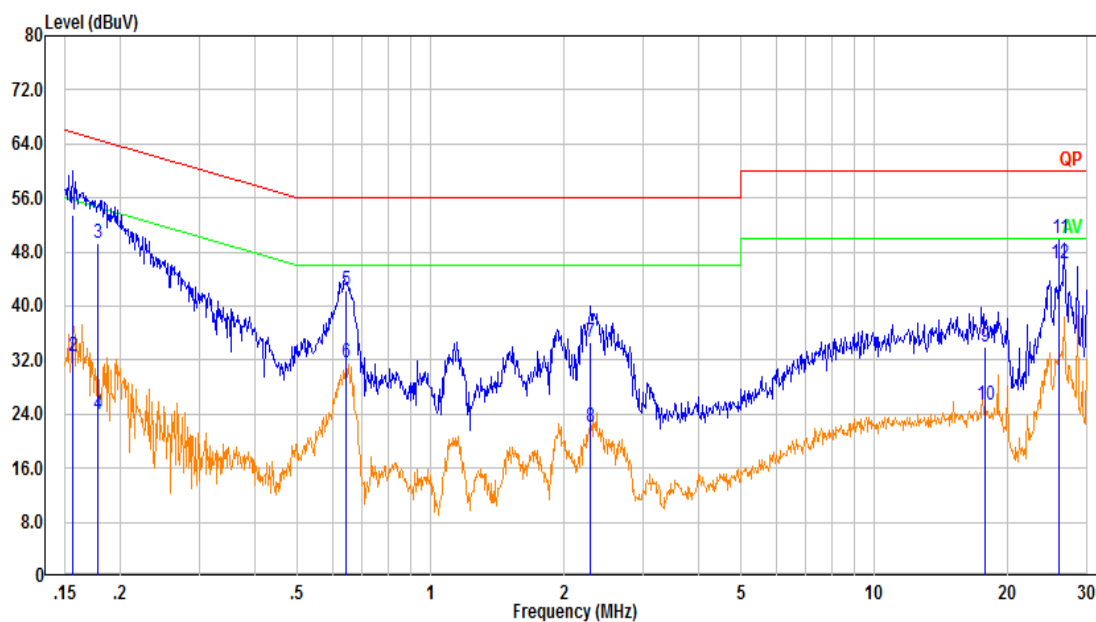
Environmental Conditions:

Temperature: (°C)	27.7	Relative Humidity: (%)	69	ATM Pressure: (kPa)	100.4
----------------------	------	------------------------------	----	------------------------	-------

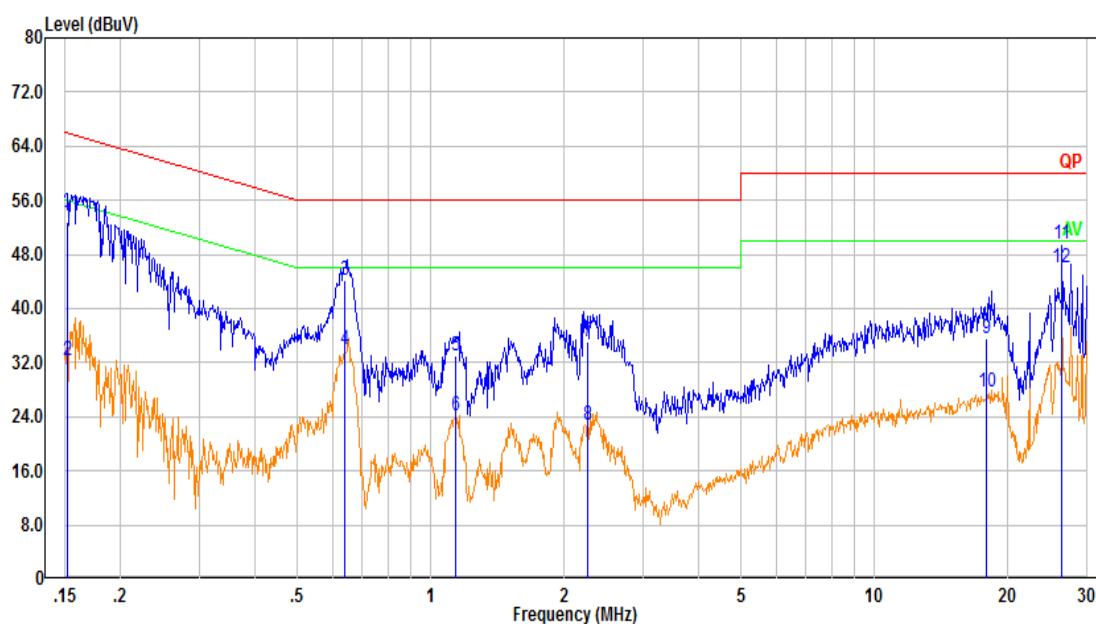
Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2022-04-01	2023-03-31
R&S	EMI Test Receiver	ESR3	102726	2022-07-15	2023-07-14
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2022-08-07	2023-08-06
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

POE Power mode:**Line:**

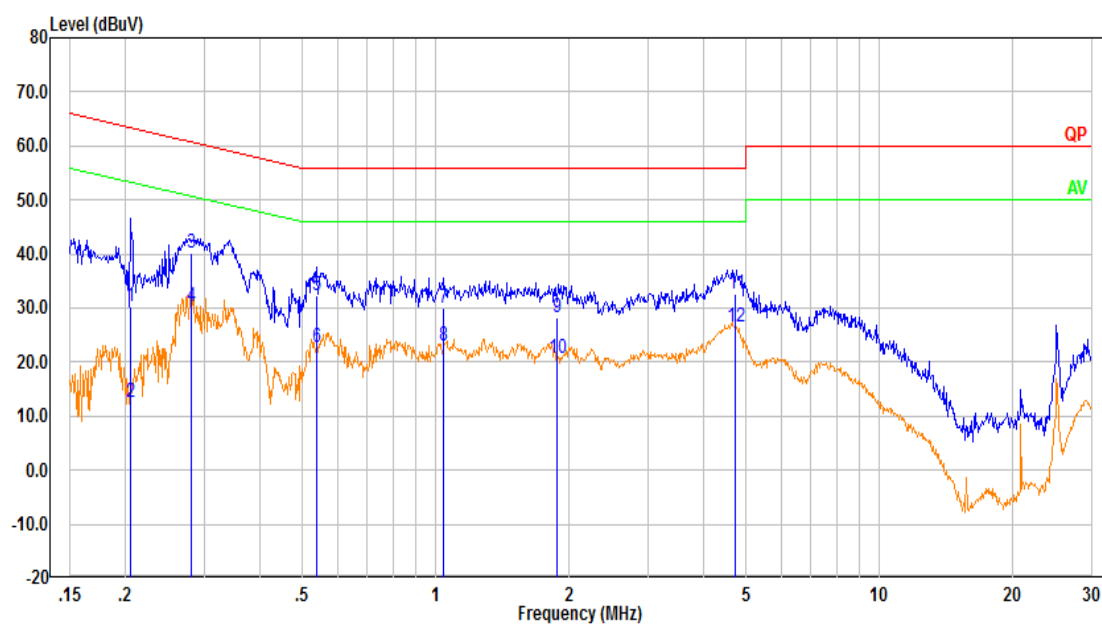
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	43.81	9.61	53.42	65.70	12.28	QP
2	0.156	22.93	9.61	32.54	55.70	23.16	Average
3	0.178	39.71	9.61	49.32	64.59	15.27	QP
4	0.178	14.37	9.61	23.98	54.59	30.61	Average
5	0.644	32.60	9.62	42.22	56.00	13.78	QP
6	0.644	22.00	9.62	31.62	46.00	14.38	Average
7	2.295	24.98	9.64	34.61	56.00	21.39	QP
8	2.295	12.38	9.64	22.01	46.00	23.99	Average
9	17.741	24.23	9.74	33.97	60.00	26.03	QP
10	17.741	15.67	9.74	25.42	50.00	24.58	Average
11	26.100	40.20	9.82	50.02	60.00	9.98	QP
12	26.100	36.38	9.82	46.20	50.00	3.80	Average

Neutral:

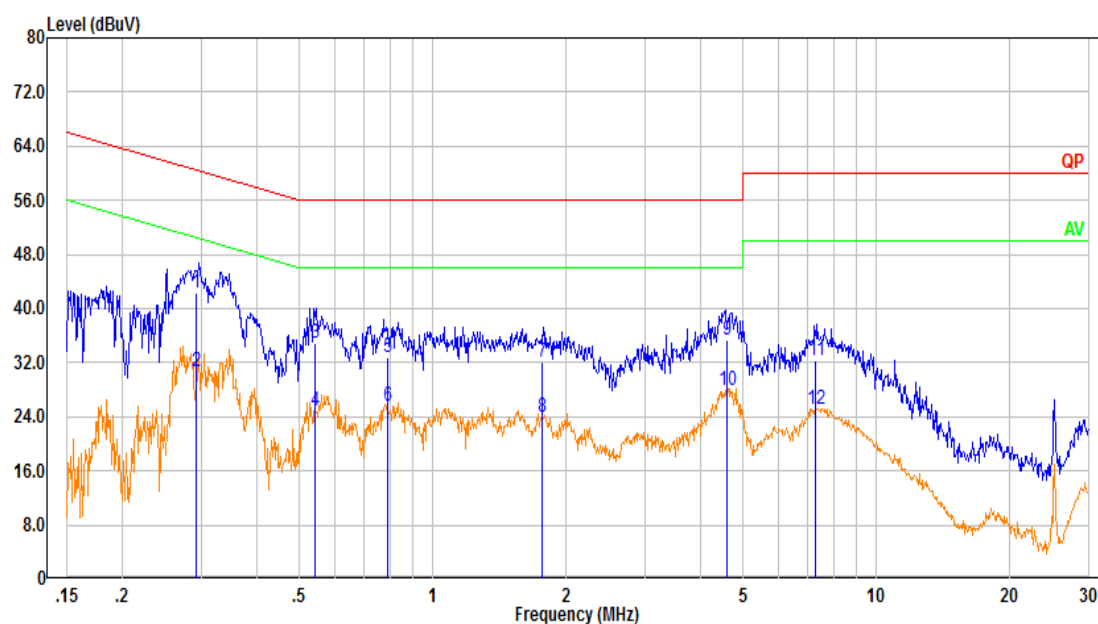
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	43.09	9.61	52.70	65.92	13.22	QP
2	0.152	22.62	9.61	32.23	55.92	23.69	Average
3	0.639	34.47	9.62	44.09	56.00	11.91	QP
4	0.639	24.25	9.62	33.87	46.00	12.13	Average
5	1.140	23.42	9.62	33.04	56.00	22.96	QP
6	1.140	14.60	9.62	24.22	46.00	21.78	Average
7	2.262	25.43	9.64	35.06	56.00	20.94	QP
8	2.262	13.19	9.64	22.83	46.00	23.17	Average
9	17.864	25.92	9.69	35.61	60.00	24.39	QP
10	17.864	18.08	9.69	27.77	50.00	22.23	Average
11	26.336	39.65	9.79	49.43	60.00	10.57	QP
12	26.336	36.37	9.79	46.15	50.00	3.85	Average

Adapter Power mode:

Line:



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.205	20.69	9.61	30.30	63.40	33.10	QP
2	0.205	2.85	9.61	12.46	53.40	40.94	Average
3	0.281	30.55	9.61	40.16	60.80	20.64	QP
4	0.281	20.80	9.61	30.41	50.80	20.39	Average
5	0.538	22.69	9.61	32.30	56.00	23.70	QP
6	0.538	13.04	9.61	22.65	46.00	23.35	Average
7	1.041	20.45	9.62	30.07	56.00	25.93	QP
8	1.041	13.34	9.62	22.96	46.00	23.04	Average
9	1.880	18.71	9.63	28.34	56.00	27.66	QP
10	1.880	11.16	9.63	20.79	46.00	25.21	Average
11	4.738	22.85	9.66	32.51	56.00	23.49	QP
12	4.738	16.72	9.66	26.38	46.00	19.62	Average

Neutral:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.292	32.71	9.61	42.32	60.45	18.13	QP
2	0.292	21.02	9.61	30.63	50.45	19.82	Average
3	0.542	25.34	9.61	34.95	56.00	21.05	QP
4	0.542	15.17	9.61	24.78	46.00	21.22	Average
5	0.789	23.07	9.62	32.69	56.00	23.31	QP
6	0.789	15.85	9.62	25.47	46.00	20.53	Average
7	1.768	22.37	9.63	32.00	56.00	24.00	QP
8	1.768	14.30	9.63	23.93	46.00	22.07	Average
9	4.598	25.74	9.66	35.39	56.00	20.61	QP
10	4.598	18.14	9.66	27.79	46.00	18.21	Average
11	7.301	22.55	9.66	32.21	60.00	27.79	QP
12	7.301	15.55	9.66	25.21	50.00	24.79	Average

4.2 Radiation Spurious Emissions

Serial Number:	CR22080044-RF-S1	Test Date:	2022-09-07~2022-09-12
Test Site:	966-1, 966-2	Test Mode:	Operating
Tester:	Carl Xue, Mack Huang	Test Result:	Pass

Environmental Conditions:

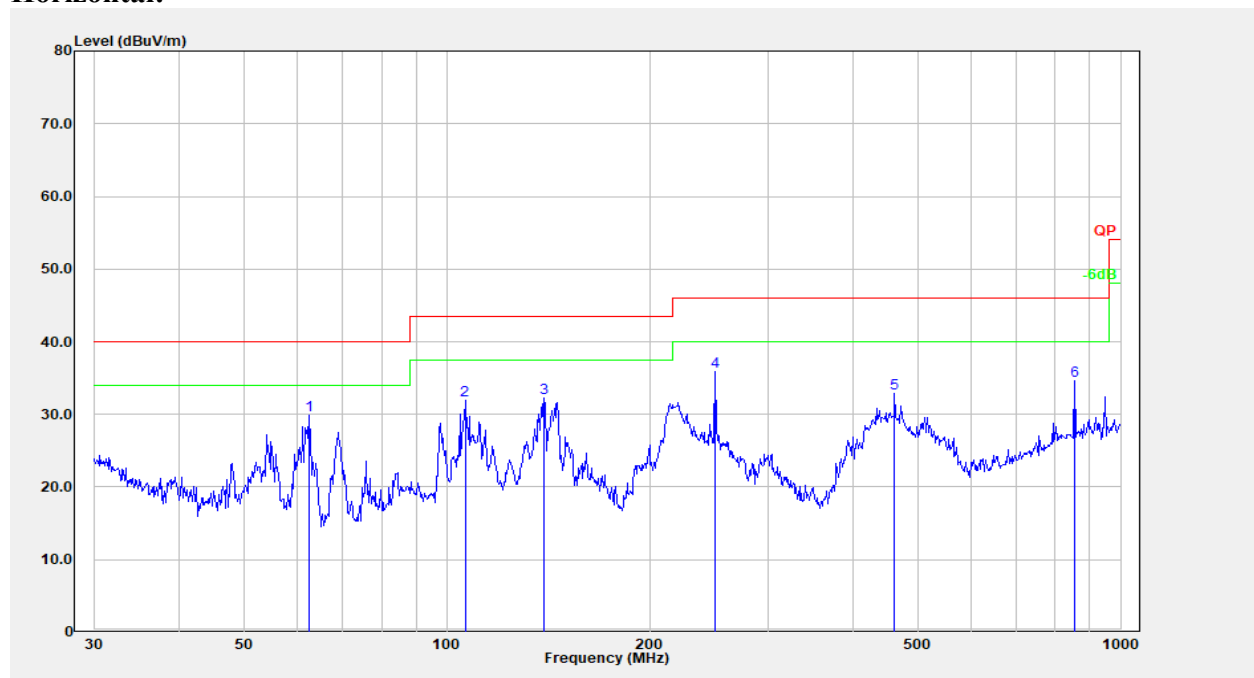
Temperature: (°C)	26.3~27.1	Relative Humidity: (%)	54	ATM Pressure: (kPa)	100.2~100.7
----------------------	-----------	------------------------------	----	------------------------	-------------

Test Equipment List and Details:

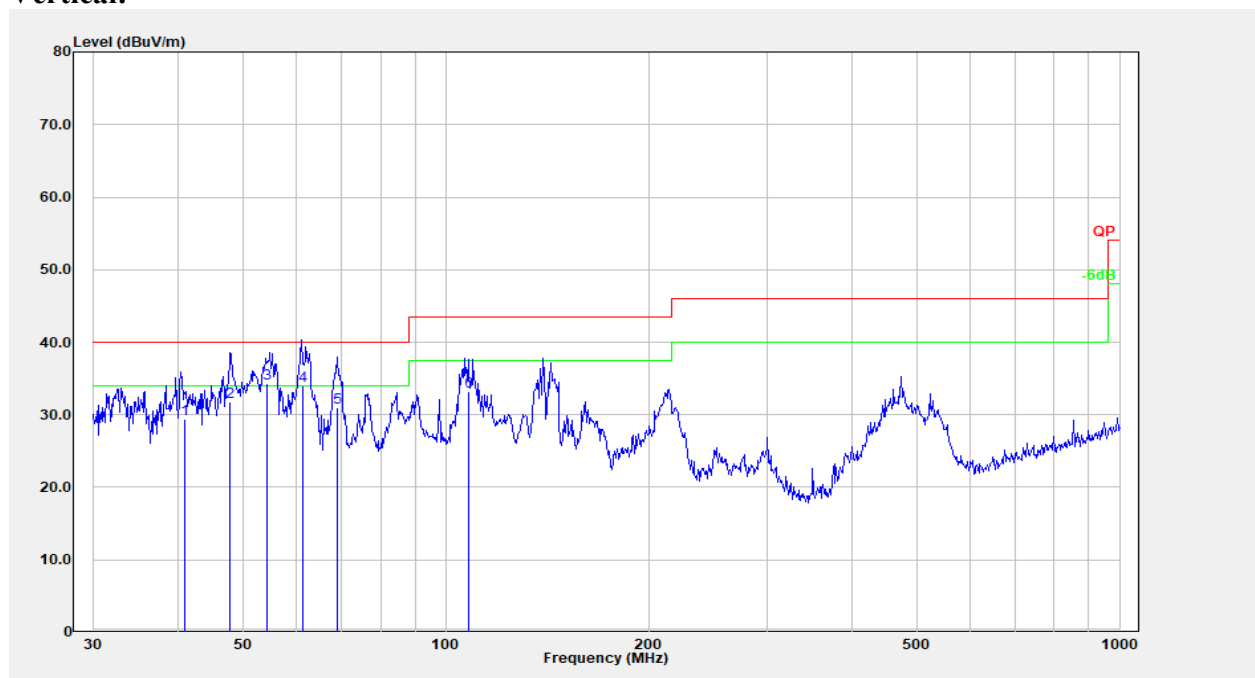
Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2022-07-15	2023-07-14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022-07-17	2023-07-16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022-07-17	2023-07-16
Sonoma	Amplifier	310N	186165	2022-07-17	2023-07-16
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2022-07-15	2023-07-14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022-08-07	2023-08-06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022-08-07	2023-08-06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2022-08-07	2023-08-06
Mini Circuits	High Pass Filter	VHF-6010+	31119	2022-08-07	2023-08-06

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

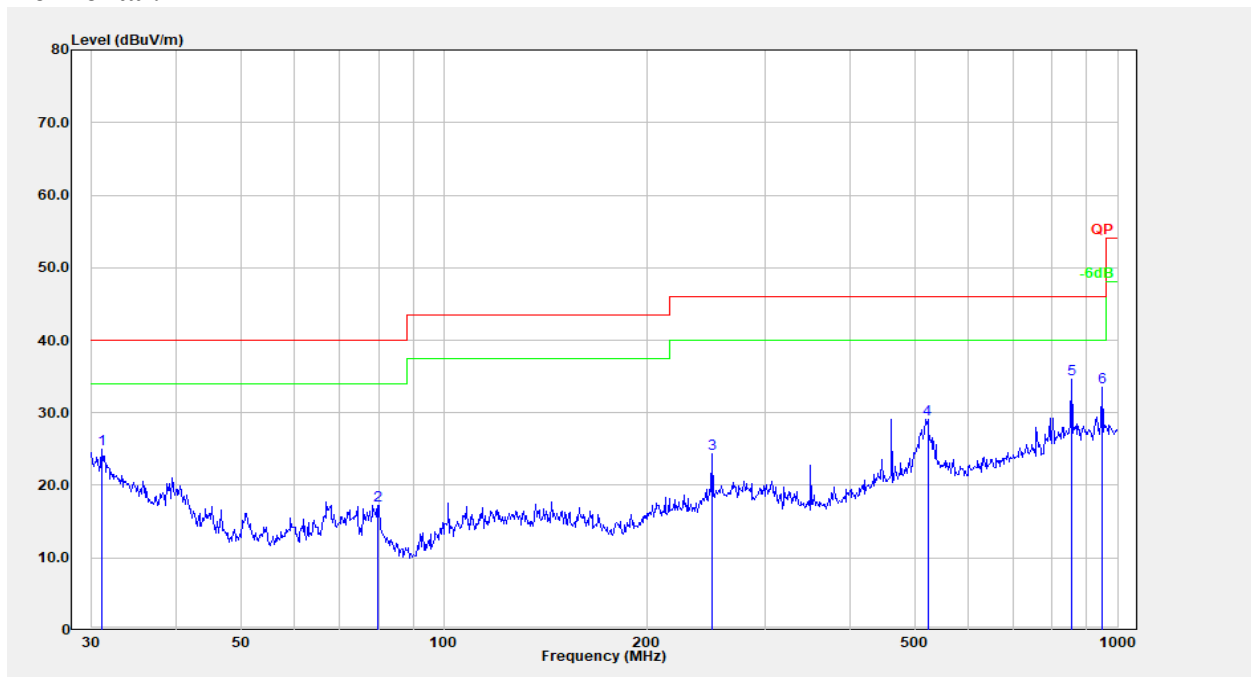
1) 30MHz-1GHz:

POE Power mode:**Horizontal:**

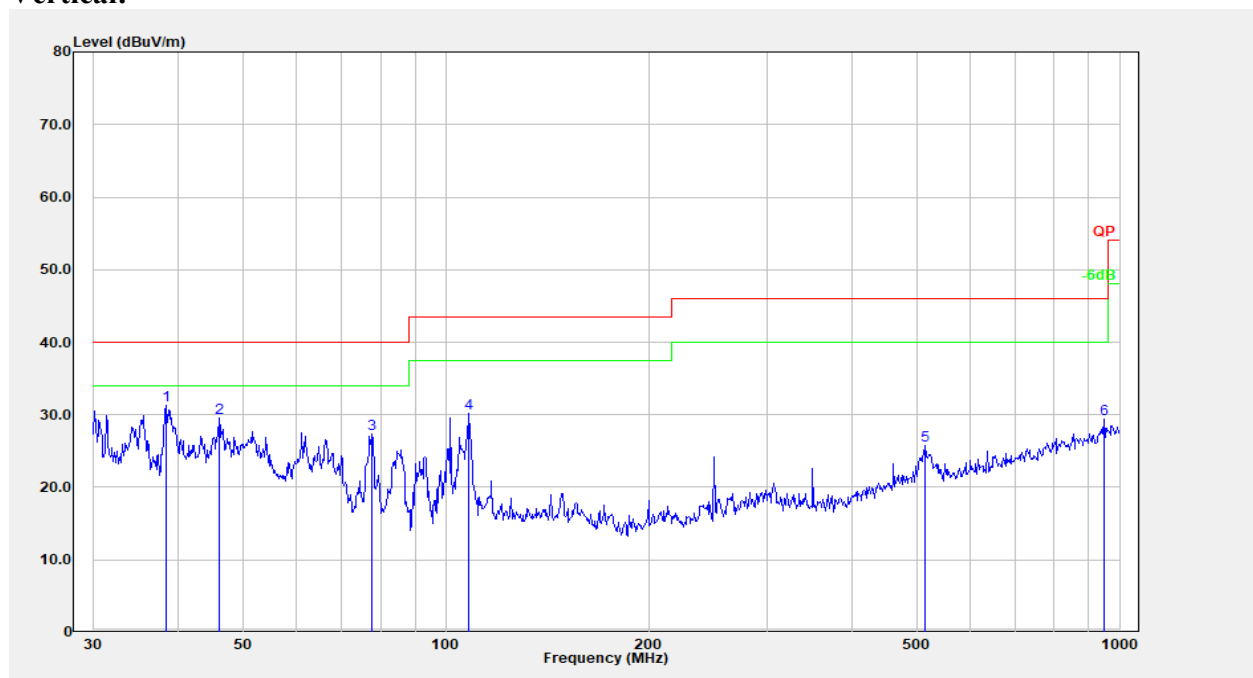
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	62.431	47.28	-17.43	29.86	40.00	10.14	Peak
2	106.385	45.22	-13.32	31.90	43.50	11.60	Peak
3	139.361	44.30	-12.09	32.21	43.50	11.29	Peak
4	250.301	49.18	-13.25	35.92	46.00	10.08	Peak
5	462.346	39.74	-6.84	32.90	46.00	13.10	Peak
6	854.025	36.24	-1.65	34.59	46.00	11.41	Peak

Vertical:

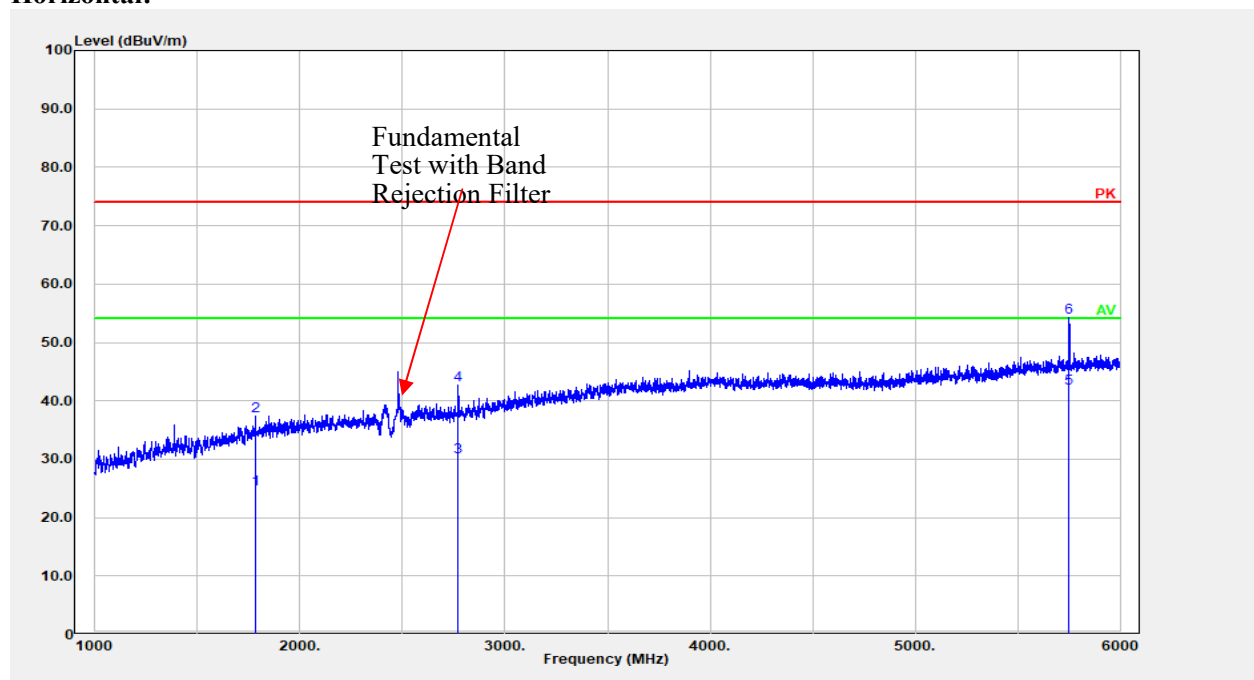
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	40.973	41.51	-12.10	29.41	40.00	10.59	QP
2	47.826	47.96	-16.14	31.82	40.00	8.18	QP
3	54.234	51.74	-17.48	34.26	40.00	5.74	QP
4	61.398	51.60	-17.54	34.06	40.00	5.94	QP
5	68.977	47.80	-16.84	30.96	40.00	9.04	QP
6	108.034	46.21	-12.96	33.25	43.50	10.25	QP

Adapter Power mode:**Horizontal:**

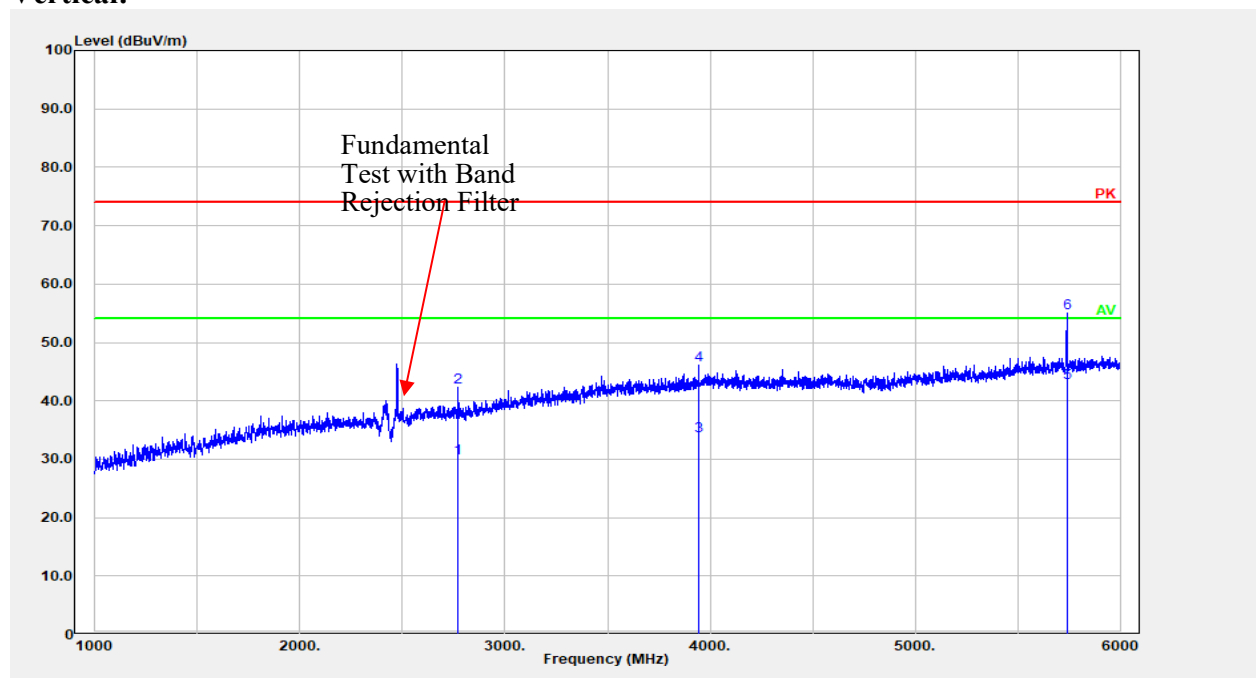
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.071	29.52	-4.61	24.90	40.00	15.10	Peak
2	79.800	34.96	-17.69	17.28	40.00	22.72	Peak
3	250.301	37.68	-13.25	24.43	46.00	21.57	Peak
4	522.718	35.24	-6.10	29.14	46.00	16.86	Peak
5	854.025	36.20	-1.65	34.55	46.00	11.45	Peak
6	948.761	33.97	-0.42	33.55	46.00	12.45	Peak

Vertical:

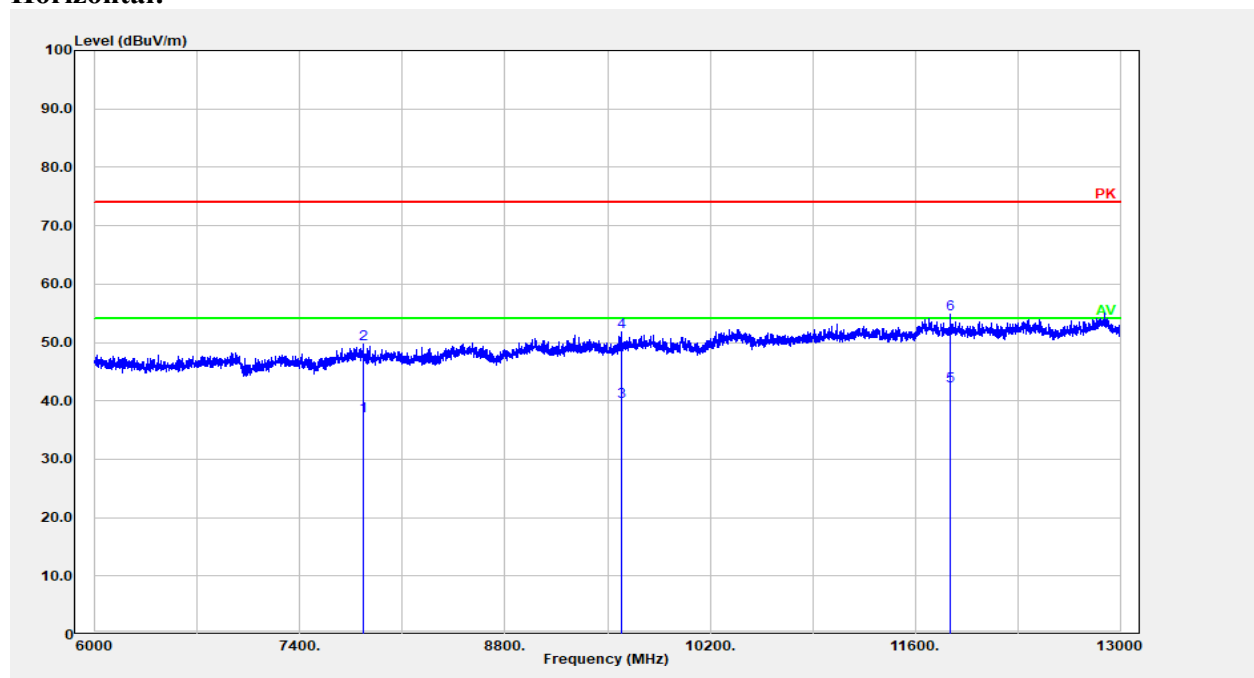
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	38.481	41.66	-10.30	31.36	40.00	8.64	Peak
2	46.016	44.59	-15.08	29.51	40.00	10.49	Peak
3	77.593	44.78	-17.46	27.33	40.00	12.67	Peak
4	107.888	43.16	-12.99	30.16	43.50	13.34	Peak
5	515.437	31.78	-6.07	25.71	46.00	20.29	Peak
6	948.761	29.89	-0.42	29.47	46.00	16.53	Peak

2) Above 1GHz**POE Power mode:****Horizontal:**

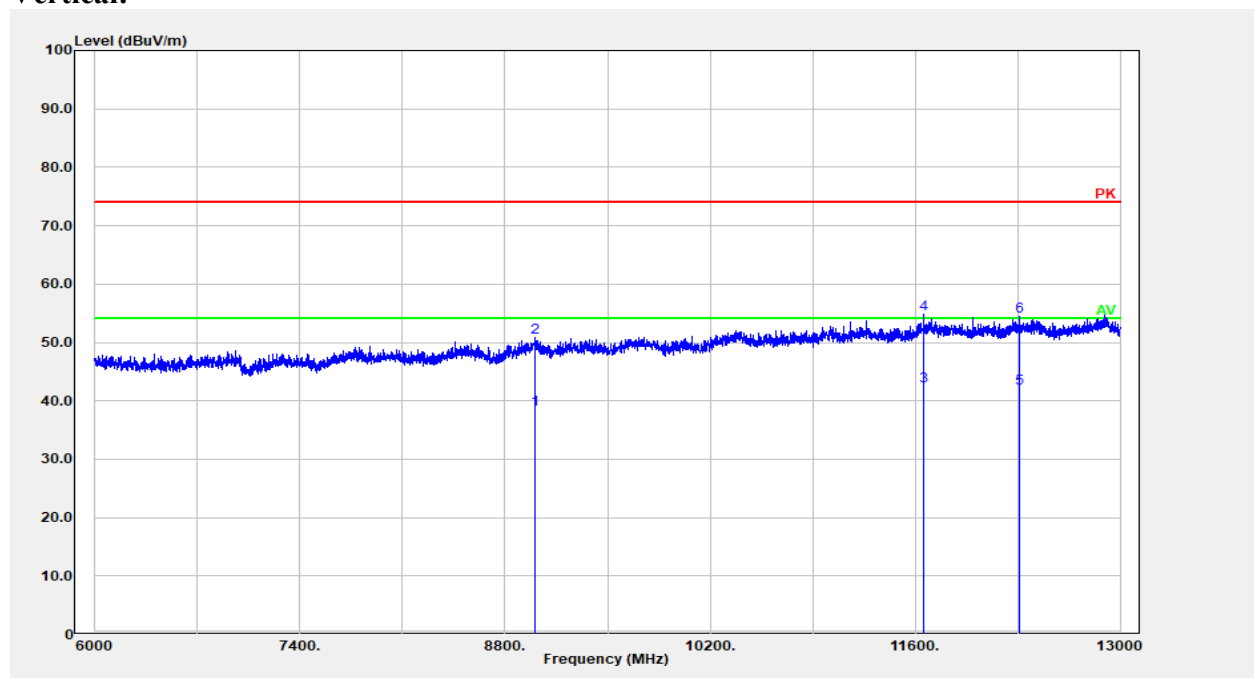
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	1782.156	23.49	1.38	24.87	54.00	29.13	Average
2	1782.156	35.98	1.38	37.36	74.00	36.64	Peak
3	2772.354	25.29	5.07	30.36	54.00	23.64	Average
4	2772.354	37.57	5.07	42.64	74.00	31.36	Peak
5	5751.950	29.20	12.95	42.15	54.00	11.85	Average
6	5751.950	41.40	12.95	54.35	74.00	19.65	Peak

Vertical:

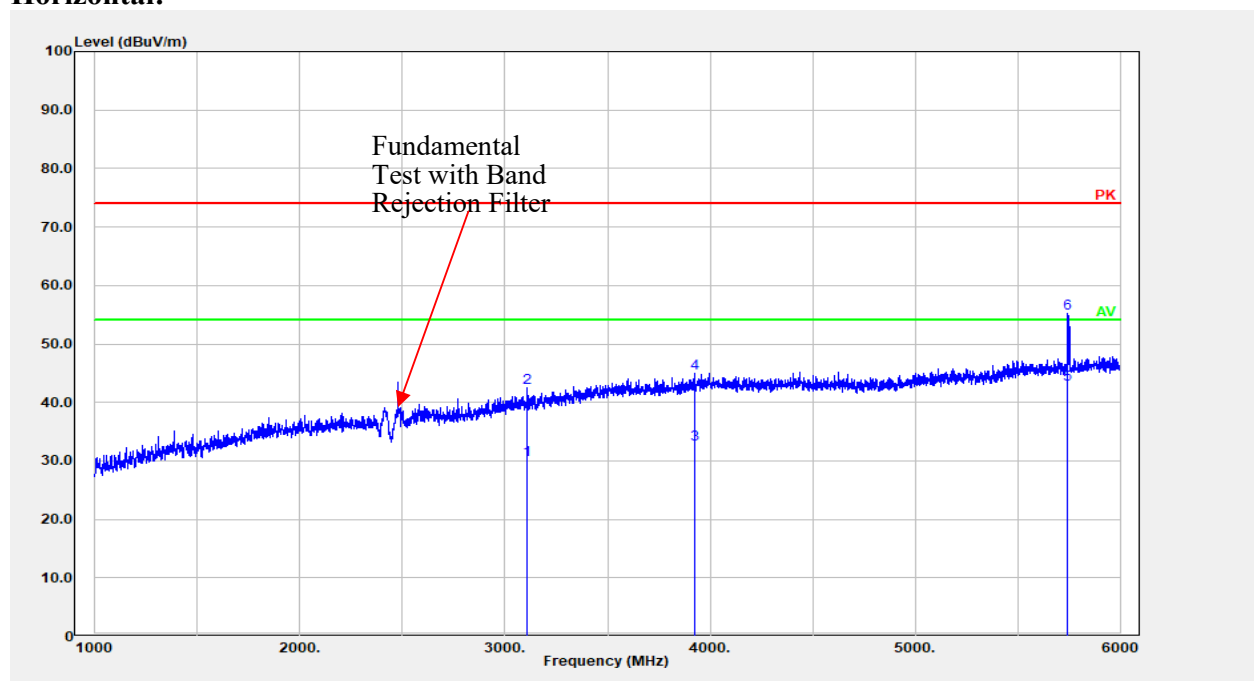
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2771.354	25.12	5.06	30.18	54.00	23.82	Average
2	2771.354	37.24	5.06	42.30	74.00	31.70	Peak
3	3946.589	24.10	9.84	33.94	54.00	20.06	Average
4	3946.589	36.20	9.84	46.04	74.00	27.96	Peak
5	5740.948	30.07	12.97	43.04	54.00	10.96	Average
6	5740.948	42.00	12.97	54.97	74.00	19.03	Peak

Horizontal:

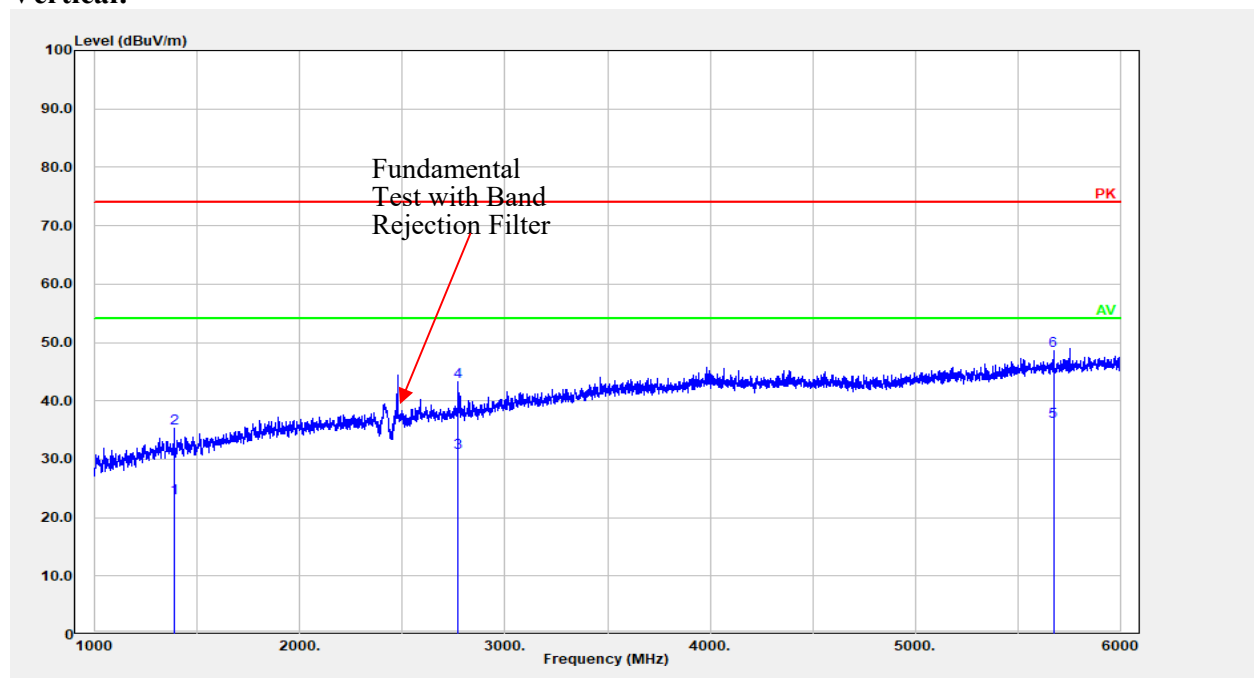
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7832.967	22.19	15.26	37.45	54.00	16.55	Average
2	7832.967	34.39	15.26	49.65	74.00	24.35	Peak
3	9595.919	22.09	17.69	39.78	54.00	14.22	Average
4	9595.919	34.18	17.69	51.87	74.00	22.13	Peak
5	11840.570	22.30	20.20	42.50	54.00	11.50	Average
6	11840.570	34.61	20.20	54.81	74.00	19.19	Peak

Vertical:

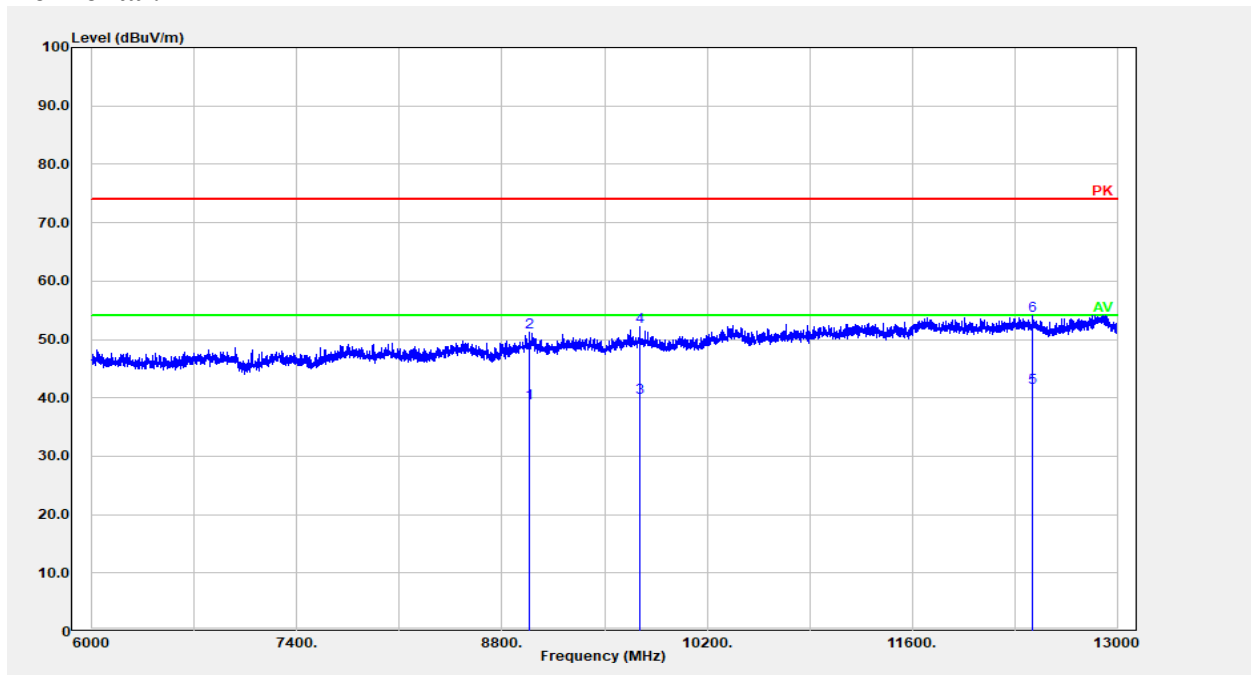
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	9007.802	21.30	17.18	38.48	54.00	15.52	Average
2	9007.802	33.61	17.18	50.79	74.00	23.21	Peak
3	11659.930	22.34	20.15	42.49	54.00	11.51	Average
4	11659.930	34.69	20.15	54.84	74.00	19.16	Peak
5	12313.860	21.39	20.66	42.05	54.00	11.95	Average
6	12313.860	33.79	20.66	54.45	74.00	19.55	Peak

Adapter Power mode:**Horizontal:**

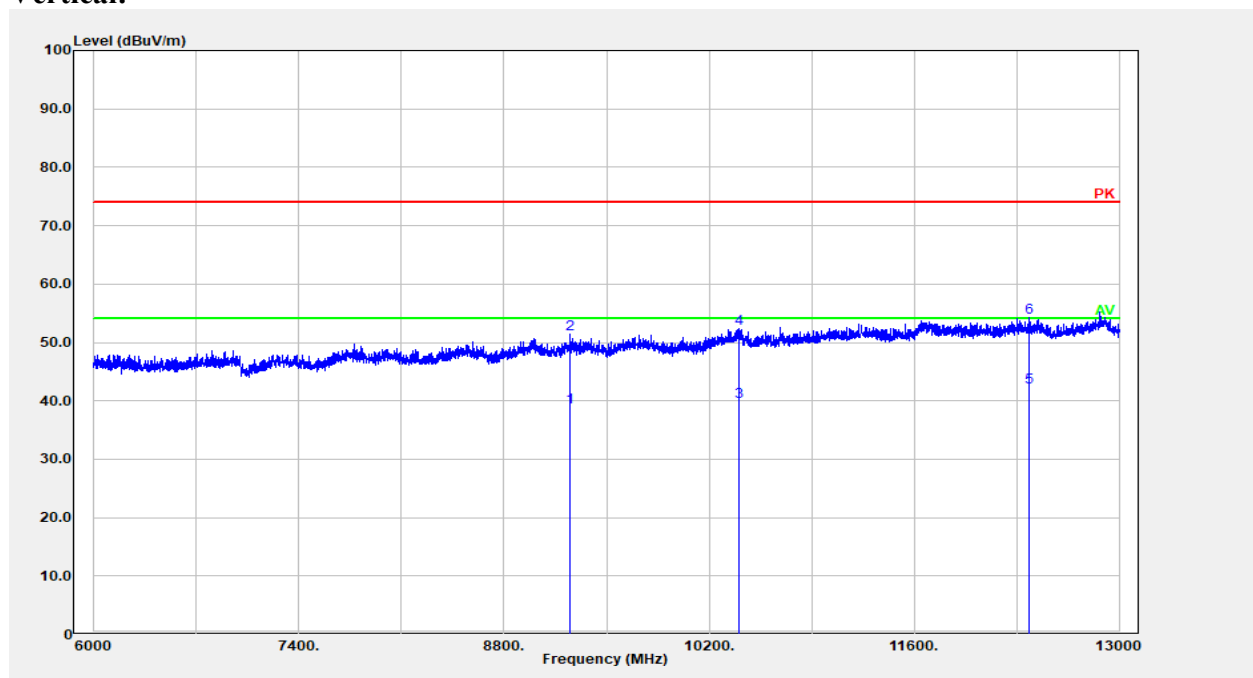
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	3108.422	23.24	6.96	30.20	54.00	23.80	Average
2	3108.422	35.48	6.96	42.44	74.00	31.56	Peak
3	3923.585	23.14	9.72	32.86	54.00	21.14	Average
4	3923.585	35.28	9.72	45.00	74.00	29.00	Peak
5	5745.949	30.13	12.96	43.09	54.00	10.91	Average
6	5745.949	42.26	12.96	55.22	74.00	18.78	Peak

Vertical:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	1385.077	24.04	-0.77	23.27	54.00	30.73	Average
2	1385.077	36.07	-0.77	35.30	74.00	38.70	Peak
3	2772.354	26.09	5.07	31.16	54.00	22.84	Average
4	2772.354	38.18	5.07	43.25	74.00	30.75	Peak
5	5674.935	23.32	13.02	36.34	54.00	17.66	Average
6	5674.935	35.64	13.02	48.66	74.00	25.34	Peak

Horizontal:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	8986.797	22.07	17.09	39.16	54.00	14.84	Average
2	8986.797	34.14	17.09	51.23	74.00	22.77	Peak
3	9741.548	22.12	17.93	40.05	54.00	13.95	Average
4	9741.548	34.24	17.93	52.17	74.00	21.83	Peak
5	12423.080	21.40	20.31	41.71	54.00	12.29	Average
6	12423.080	33.80	20.31	54.11	74.00	19.89	Peak

Vertical:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	9251.450	21.47	17.40	38.87	54.00	15.13	Average
2	9251.450	33.94	17.40	51.34	74.00	22.66	Peak
3	10405.280	21.47	18.45	39.92	54.00	14.08	Average
4	10405.280	33.94	18.45	52.39	74.00	21.61	Peak
5	12385.280	22.08	20.22	42.30	54.00	11.70	Average
6	12385.280	34.02	20.22	54.24	74.00	19.76	Peak

===== END OF REPORT =====