

## SAR EVALUATION REPORT

For

# **Shenzhen Topwell Wireless Communication Co Ltd**

5F,10Building,Changyuan New Material Port,No.2,Middle Road 1,High Tech Park,Nanshan District,Shenzhen,China

FCC ID: 2AHDDPCDPH3501

Report Type: Original Report		Product Type: smart phone	
Test Engineer:	Rocky Xiao	pocky	xiao
Report Number:	RDG160316008-	-20	
Report Date:	2016-03-23		
Reviewed By:	Jerry Zhang EMC Manager	Jerry	Zhang
Test Laboratory:	No.69 Pulongcur	858891	

**Note**: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

	At	testation of Test Results					
	Company Name	Shenzhen Topwell Wireless Communication Co	Ltd				
	EUT Description	smart phone					
EUT	FCC ID	2AHDDPCDPH3501					
Information	Tested Model	PCD PH3501					
	Serial Number	160316008					
	Test Date	2016-03-21 ,2016-03-22					
MOI	-	Max. SAR Level(s) Reported(W/Kg)	Limit(W/Kg)				
CCD F OFO	1g Head SAR	0.304	, O				
GSM 850	1g Body SAR	0.704					
T CC 1000	1g Head SAR	0.563					
PCS 1900	1g Body SAR	0.769					
***********	1g Head SAR	0.310					
WCDMA 850	1g Body SAR	0.535					
	1g Head SAR	0.804	1.6				
WCDMA 1900	1g Body SAR	0.883					
	1g Head SAR	0.242					
WLAN	1g Body SAR	0.147					
	1g Head SAR	1.046					
Simultaneous	1g Body SAR	1.03					
Hotspot							
Hotspot  Ig Body SAR  I.03  ANSI / IEEE C95.1 : 2005  IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fileds, 3 kHz to 300 GHz.  ANSI / IEEE C95.3 : 2002  IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to SuchFields, 100 kHz—300 GHz.  FCC 47 CFR part 2.1093  Radiofrequency radiation exposure evaluation: portable devices  IEEE 1528:2013  IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques  IEC 62209-2:2010  Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices-Human models, instrumentation, and procedures-Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)  KDB procedures  KDB 447498 D01 General RF Exposure Guidance v06  KDB 648474 D04 Handset SAR v01r03  KDB 865664 D02 RF Exposure Reporting v01r02  KDB 841225 D01 3G SAR Procedures v03r01  KDB 941225 D06 Hotspot Mode v02r01							

Report No: RDG160316008-20

**Note:** This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.

The results and statements contained in this report pertain only to the device(s) evaluated.

SAR Evaluation Report 2 of 66

# **TABLE OF CONTENTS**

DOCUMENT REVISION HISTORY	4
EUT DESCRIPTION	5
TECHNICAL SPECIFICATION	5
REFERENCE, STANDARDS, AND GUILDELINES	6
SAR LIMITS	
FACILITIES	
DESCRIPTION OF TEST SYSTEM	
EQUIPMENT LIST AND CALIBRATION	
EQUIPMENTS LIST & CALIBRATION INFORMATION	
SAR MEASUREMENT SYSTEM VERIFICATION	
LIQUID VERIFICATION	
SYSTEM ACCURACY VERIFICATION.	
SAR SYSTEM VALIDATION DATA	18
EUT TEST STRATEGY AND METHODOLOGY	24
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON'S EAR	24
CHEEK/TOUCH POSITION	
EAR/TILT POSITION	
SAR EVALUATION PROCEDURE	
Test methodology	
CONDUCTED OUTPUT POWER MEASUREMENT	28
Provision Applicable	28
Test Procedure	
RADIO CONFIGURATION	
MAXIMUM TARGET OUTPUT POWER TEST RESULTS:	
SAR MEASUREMENT RESULTS	
SAR TEST DATA	
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	
SAR PLOTS (SUMMARY OF THE HIGHEST SAR VALUES)	48
APPENDIX A MEASUREMENT UNCERTAINTY	58
APPENDIX B EUT TEST POSITION PHOTOS	60
BODY-WORN BACK SETUP PHOTO	60
BODY-WORN LEFT SETUP PHOTO	61
BODY-WORN RIGHT SETUP PHOTO	
BODY-WORN HEADSET SETUP PHOTO	
BODY-WORN BOTTOM SETUP PHOTO	
LEFT HEAD TOUCH SETUP PHOTO	
LEFT HEAD TILT SETUP PHOTO	
RIGHT HEAD TOUCH SETUP PHOTO	65
RIGHT HEAD TILT SETUP PHOTO	65
APPENDIX D CALIBRATION CERTIFICATES	66

## **DOCUMENT REVISION HISTORY**

Revision Number	Report Number	Description of Revision	Date of Revision
0	RDG160316008-20	Original Report	2016-03-23

Report No: RDG160316008-20

SAR Evaluation Report 4 of 66

## **EUT DESCRIPTION**

This report has been prepared on behalf of *Shenzhen Topwell Wireless Communication Co Ltd* and their product, Model: PCD PH3501, FCC ID: 2AHDDPCDPH3501 or the EUT (Equipment under Test) as referred to in the rest of this report.

Report No: RDG160316008-20

## **Technical Specification**

Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Multi-slot Class:	Class12
	GSM Voice, GPRS/EDGE Data,
	WCDMA R99 (Voice + Data),HSUPA Rel 6,HSDPA Rel 7,
Operation Mode :	DC-HSDPA Rel 8, HSPA+ Rel 8
	WLAN
	Bluetooth
	GSM 850 : 824-849 MHz(TX) ; 869-894 MHz(RX)
	PCS 1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX)
	WCDMA850: 824-849 MHz(TX) ; 869-894 MHz(RX)
Frequency Band:	WCDMA1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX)
	WLAN: 2412MHz-2462 MHz
	Bluetooth: 2402MHz-2480 MHz
	GSM 850 : 32.00 dBm
	PCS 1900: 29.00 dBm
	WCDMA 850: 22.14 dBm
Conducted RF Power:	WCDMA 1900: 21.95 dBm
	WLAN: 14.89 dBm
	Bluetooth(BDR/EDR): 5.81 dBm
	BLE:-2.22 dBm
Dimensions (L*W*H):	$11.9 \text{ cm (L)} \times 6.2 \text{ cm (W)} \times 1.0 \text{ cm (H)}$
Power Source:	3.7 VDC Rechargeable Battery
Normal Operation:	Head and Body-worn

SAR Evaluation Report 5 of 66

#### REFERENCE, STANDARDS, AND GUILDELINES

## FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

Report No: RDG160316008-20

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

#### CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Evaluation Report 6 of 66

## **SAR Limits**

#### FCC Limit

Report No: RDG160316008-20

	SAR (W/kg)				
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

#### CE Limit

	SAR (W/kg)				
	(General Population /	(Occupational /			
EXPOSURE LIMITS	Uncontrolled Exposure	Controlled Exposure			
	Environment)	Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 10 g of tissue)	2.0	10			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

SAR Evaluation Report 7 of 66

## **FACILITIES**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Report No: RDG160316008-20

SAR Evaluation Report 8 of 66


## **DESCRIPTION OF TEST SYSTEM**

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



## **DASY5 System Description**

The DASY5 system for performing compliance tests consists of the following items:

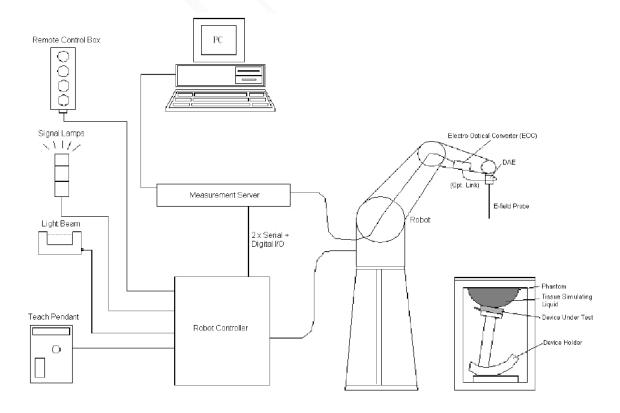

SAR Evaluation Report 9 of 66

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

#### **DASY5** Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz Intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical



Report No: RDG160316008-20

processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.

#### **Data Acquisition Electronics**

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

SAR Evaluation Report 10 of 66

#### **EX3DV4 E-Field Probes**

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	$10~\mu W/g$ to $>100~mW/g$ Linearity: $\pm~0.2~dB$ (noise: typically $<1~\mu W/g)$
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

#### **SAM Twin Phantom**

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness

increases to 6 mm). The phantom has three measurement areas:

- \_ Left hand
- \_ Right hand
- Flat phantom

The phantom table for the DASY systems based on the TX90XL and RX160L robots have the size of 100 x 50 x 85 cm (L x W x H).

The phantom table for the compact DASY systems based on the RX60L robot have the size of 100 x 75 x 91 cm (L x W x H); these tables are reinforced for mounting of the robot onto the table.

For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)

A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.



Report No: RDG160316008-20

SAR Evaluation Report 11 of 66

#### **Robots**

The DASY5 system uses the high precision industrial robots TX90XL from Staubli SA (France). The TX robot family is the successor of the well known RX robot family and offers the same features important for our application:

Report No: RDG160316008-20

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

#### **Area Scans**

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

#### **Zoom Scan (Cube Scan Averaging)**

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of  $1000~\rm kg/m^3$  is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is  $10~\rm mm$ , with the side length of the  $10~\rm g$  cube is  $21.5~\rm mm$ .

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

SAR Evaluation Report 12 of 66

## Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Report No: RDG160316008-20

#### Recommended Tissue Dielectric Parameters for Head and Body

Frequency	Head T	Гissue	Body	Tissue
(MHz)	Er	O'(S/m)	Er	O (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

SAR Evaluation Report 13 of 66

## **EQUIPMENT LIST AND CALIBRATION**

## **Equipments List & Calibration Information**


Equipment	Model	S/N	Calibration Date	Calibration Due Date
Robot	RX90	D03636	N/A	N/A
DASY5 Test Software	DASY52.8	N/A	N/A	N/A
DASY5 Measurement Server	DASY5 4.5.12	1470	N/A	N/A
Data Acquisition Electronics	DAE4	1459	2015/9/18	2016/9/18
E-Field Probe	EX3DV4	7329	2016/2/19	2017/2/19
Dipole, 900 MHz	D900V2	1d183	2015/7/14	2018/7/14
Dipole,1900MHz	D1900V2	5d206	2015/7/14	2018/7/14
Dipole,2450MHz	D2450V3	971	2015/7/8	2018/7/8
R&S, universal Radio Communication Tester	CMU200	109038	2015/7/28	2016/7/27
8960 Series 10 Wireless Communication Test Set	E5515C	MY50266471	2016/1/13	2017/1/13
Mounting Device	MD4HHTV5	SD 000 H01 KA	N/A	N/A
Twin SAM	Twin SAM V5.0	1874	N/A	N/A
Simulated Tissue 835 MHz Head	TS-835-H	1512083501	Each Time	/
Simulated Tissue 835 MHz Body	TS-835-B	1512083502	Each Time	/
Simulated Tissue 1900 MHz Head	TS-1900-H	1512190001	Each Time	/
Simulated Tissue 1900 MHz Body	TS-1900-B	1512190002	Each Time	/
Simulated Tissue 2450 MHz Head	TS-2450-H	1512245001	Each Time	/
Simulated Tissue 2450 MHz Body	TS-2450-B	1512245002	Each Time	/
Network Analyzer	8752C	3140A02356	2015/6/5	2016/6/4
Dielectric probe kit	85070B	US33020324	2015/6/13	2016/6/13
Signal Generator	E4422B	MY41000355	2015/11/23	2016/11/22
Power Meter	EPM-441A	GB37481494	2015/11/3	2016/11/3
Power Meter Sensor	8481A	T-03-EM-127	2015/11/3	2016/11/3
Power Amplifier	5205PE	1015	N/A	N/A
Directional Coupler	488Z	N/A	N/A	N/A
Attenuator	20dB, 100W	N/A	N/A	N/A

Report No: RDG160316008-20

SAR Evaluation Report 14 of 66

## SAR MEASUREMENT SYSTEM VERIFICATION

## **Liquid Verification**

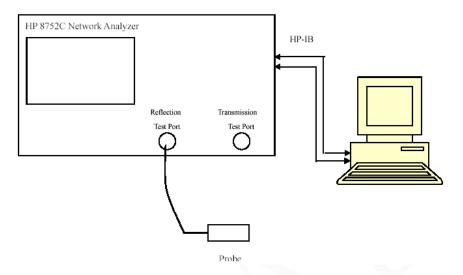

Report No: RDG160316008-20

Liquid Verification Setup Block Diagram

## **Liquid Verification Results**

Frequency	I i was id Trans	Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz)	Liquid Type	$\epsilon_{ m r}$	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
824.2	Simulated Tissue 835 MHz Head	42.924	0.877	41.5	0.9	3.43	-2.56	±5
024.2	Simulated Tissue 835 MHz Body	55.157	0.963	55.2	0.97	-0.08	-0.72	±5
926.4	Simulated Tissue 835 MHz Head	42.874	0.88	41.5	0.9	3.31	-2.22	±5
826.4	Simulated Tissue 835 MHz Body	55.149	0.967	55.2	0.97	-0.09	-0.31	±5
836.6	Simulated Tissue 835 MHz Head	42.849	0.892	41.5	0.9	3.25	-0.89	±5
830.0	Simulated Tissue 835 MHz Body	55.097	0.976	55.2	0.97	-0.19	0.62	±5
846.6	Simulated Tissue 835 MHz Head	42.804	0.896	41.5	0.9	3.14	-0.44	±5
840.0	Simulated Tissue 835 MHz Body	55.023	0.986	55.2	0.97	-0.32	1.65	±5
0.40.0	Simulated Tissue 835 MHz Head	42.706	0.895	41.5	0.9	2.91	-0.56	±5
848.8	Simulated Tissue 835 MHz Body	54.992	0.987	55.2	0.97	-0.38	1.75	±5
000	Simulated Tissue 835 MHz Head	42.96	0.892	41.5	0.9	3.52	-0.89	±5
900	Simulated Tissue 835 MHz Body	55.119	0.972	55.2	0.97	-0.15	0.21	±5

<sup>\*</sup>Liquid Verification above was performed on 2016-03-21.

SAR Evaluation Report 15 of 66

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz)	Liquiu Type	$\epsilon_{ m r}$	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
1950.2	Simulated Tissue 1900 MHz Head	39.823	1.359	40	1.4	-0.44	-2.93	±5
1850.2	Simulated Tissue 1900 MHz Body	55.27	1.477	53.3	1.52	3.7	-2.83	±5
1952 4	Simulated Tissue 1900 MHz Head	39.847	1.354	40	1.4	-0.38	-3.29	±5
1852.4	Simulated Tissue 1900 MHz Body	55.224	1.476	53.3	1.52	3.61	-2.89	±5
1880	Simulated Tissue 1900 MHz Head	39.764	1.384	40	1.4	-0.59	-1.14	±5
1000	Simulated Tissue 1900 MHz Body	53.755	1.543	53.3	1.52	0.85	1.51	±5
1900	Simulated Tissue 1900 MHz Head	39.667	1.408	40	1.4	-0.83	0.57	±5
1900	Simulated Tissue 1900 MHz Body	54.196	1.515	53.3	1.52	1.68	-0.33	±5
1907.6	Simulated Tissue 1900 MHz Head	39.583	1.413	40	1.4	-1.04	0.93	±5
1907.6	Simulated Tissue 1900 MHz Body	53.589	1.494	53.3	1.52	0.54	-1.71	±5
1909.8	Simulated Tissue 1900 MHz Head	39.602	1.413	40	1.4	-1	0.93	±5
1909.8	Simulated Tissue 1900 MHz Body	53.371	1.493	53.3	1.52	0.13	-1.78	±5
2412	Simulated Tissue 2450 MHz Head	39.351	1.793	39.2	1.8	0.39	-0.39	±5
2412	Simulated Tissue 2450 MHz Body	53.254	1.94	52.7	1.95	1.05	-0.51	±5
2437	Simulated Tissue 2450 MHz Head	39.167	1.821	39.2	1.8	-0.08	1.17	±5
2437	Simulated Tissue 2450 MHz Body	51.658	1.981	52.7	1.95	-1.98	1.59	±5
2450	Simulated Tissue 2450 MHz Head	39.128	1.828	39.2	1.8	-0.18	1.56	±5
2430	Simulated Tissue 2450 MHz Body	52.199	2.029	52.7	1.95	-0.95	4.05	±5
2462	Simulated Tissue 2450 MHz Head	39.011	1.839	39.2	1.8	-0.48	2.17	±5
2402	Simulated Tissue 2450 MHz Body	52.181	1.982	52.7	1.95	-0.98	1.64	±5

<sup>\*</sup>Liquid Verification above was performed on 2016-03-22.


SAR Evaluation Report 16 of 66

## **System Accuracy Verification**

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

Report No: RDG160316008-20

## **System Verification Setup Block Diagram**

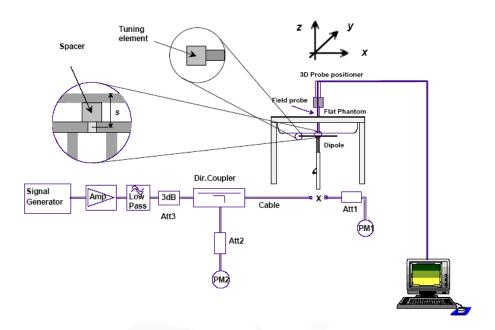

## **System Accuracy Check Results**

Date	Frequency Band	Liquid Type		ired SAR V/Kg)	Target Value (W/Kg)	Delta (%)	Tolerance (%)
2016-03-21	900	835MHz Head	1g	10.52	10.6	-0.75	±10
2010-05-21	900	835MHz Body	1g	10.64	10.6	0.38	±10
	1900	1900MHz Head	1g	41.8	40.7	2.70	±10
2016-03-22		1900MHz Body	1g	42.5	40.8	4.17	±10
2010-03-22		2450MHz Head	1g	54.6	53.3	2.44	±10
	2450	2450MHz Body	1g	53.2	50.6	5.14	±10

<sup>\*</sup>All SAR values are normalized to 1 Watt forward power.

SAR Evaluation Report 17 of 66

#### SAR SYSTEM VALIDATION DATA

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 900 MHz Head

DUT: D900V2; Type: 900 MHz; Serial: 1d183

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 900 MHz;  $\sigma = 0.892 \text{ S/m}$ ;  $\varepsilon_r = 42.96$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7329; ConvF(9.37, 9.37, 9.37); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

**System Performance 900 MHz Head /Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 15.8 W/kg


**System Performance 900 MHz Head /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 114.8 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 10.52 W/kg; SAR(10 g) = 6.14 W/kg

Maximum value of SAR (measured) = 14.8 W/kg

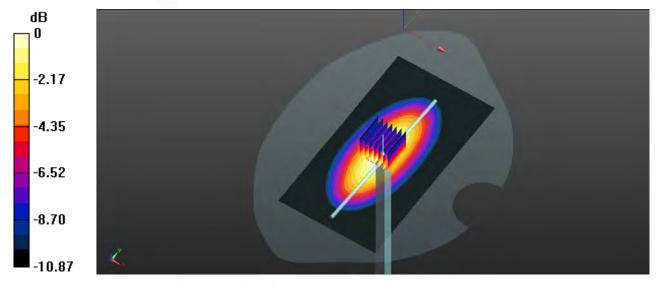

0 dB = 14.8 W/kg = 11.70 dBW/kg

SAR Evaluation Report 18 of 66

#### System Performance 900 MHz Body

#### **DUT: D900V2; Type: 900 MHz; Serial: 1d183**

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 900 MHz;  $\sigma = 0.972$  S/m;  $\varepsilon_r = 55.119$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7329; ConvF(9.42, 9.42, 9.42); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

**System Performance 900 MHz Body /Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 18.5 W/kg


**System Performance 900 MHz Body /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 114.6 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 10.64 W/kg; SAR(10 g) = 6.33 W/kg

Maximum value of SAR (measured) = 14.83 W/kg

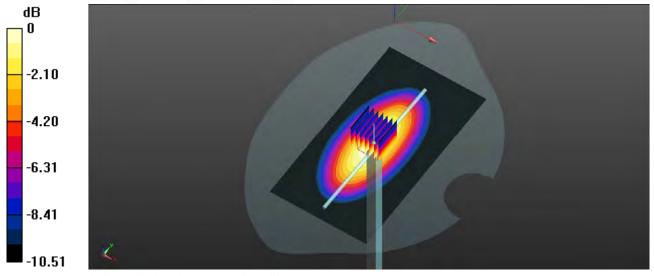

0 dB = 14.83 W/kg = 11.71 dBW/kg

SAR Evaluation Report 19 of 66

#### System Performance 1900 MHz Head

**DUT: D1900V2; Type: 1900 MHz; Serial: 5d206** 

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz;  $\sigma = 1.408 \text{ S/m}$ ;  $\varepsilon_r = 39.667$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7329; ConvF(7.94, 7.94, 7.94); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

**System Performance 1900 MHz Head /Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 51.4 W/kg


**System Performance 1900 MHz Head /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 176.6 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 75.7 W/kg

SAR(1 g) = 41.8 W/kg; SAR(10 g) = 20.5 W/kg

Maximum value of SAR (measured) = 47.3 W/kg

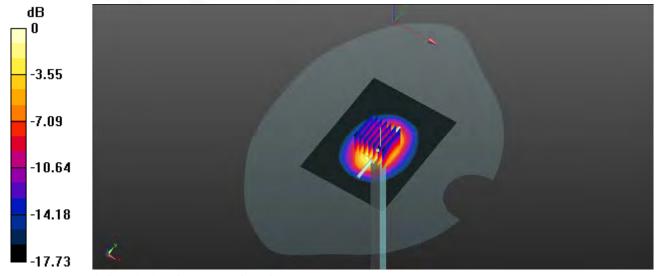

0 dB = 47.3 W/kg = 16.75 dBW/kg

SAR Evaluation Report 20 of 66

#### System Performance 1900 MHz Body

**DUT: D1900V2; Type: 1900 MHz; Serial: 5d206** 

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz;  $\sigma = 1.515$  S/m;  $\varepsilon_r = 54.196$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7329; ConvF(7.52, 7.52, 7.52); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

**System Performance 1900 MHz Body /Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 52.3 W/kg


**System Performance 1900 MHz Body /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 174.3 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 77.4 W/kg

SAR(1 g) = 42.5 W/kg; SAR(10 g) = 21.1 W/kg

Maximum value of SAR (measured) = 48.4 W/kg

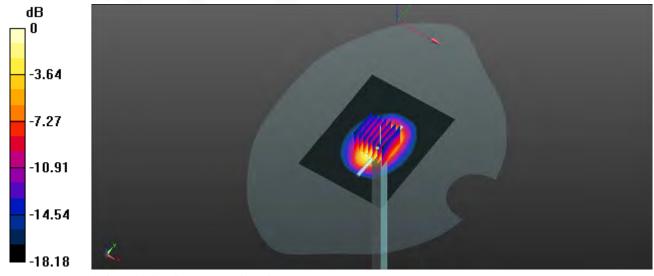

0 dB = 48.4 W/kg = 16.85 dBW/kg

SAR Evaluation Report 21 of 66

#### System Performance 2450 MHz Head

DUT: D2450V3; Type: 2450 MHz; Serial: 971

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz;  $\sigma = 1.828 \text{ S/m}$ ;  $\varepsilon_r = 39.128$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7329; ConvF(7.21, 7.21, 7.21); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

**System Performance 2450 MHz Head /Area Scan (61x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm Maximum value of SAR (interpolated) = 69.5 W/kg


**System Performance 2450 MHz Head /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 190.6 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 115 W/kg

SAR(1 g) = 54.6 W/kg; SAR(10 g) = 21.8 W/kg

Maximum value of SAR (measured) = 62.3 W/kg

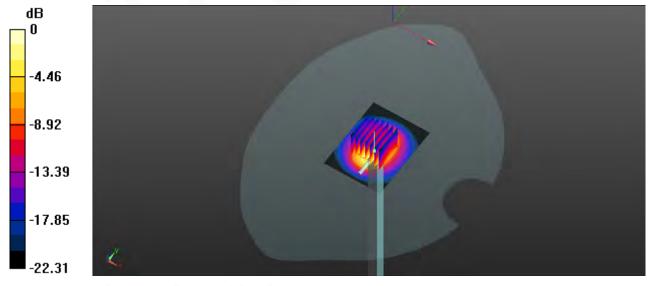

0 dB = 62.3 W/kg = 17.94 dBW/kg

SAR Evaluation Report 22 of 66

#### System Performance 2450 MHz Body

DUT: D2450V3; Type: 2450 MHz; Serial: 971

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz;  $\sigma = 2.029 \text{ S/m}$ ;  $\varepsilon_r = 52.199$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7329; ConvF(7.26, 7.26, 7.26); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

**System Performance 2450 MHz Body /Area Scan (61x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm Maximum value of SAR (interpolated) = 67.6 W/kg


**System Performance 2450 MHz Body /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 188.7 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 119 W/kg

SAR(1 g) = 53.2 W/kg; SAR(10 g) = 25.7 W/kg

Maximum value of SAR (measured) = 60.6 W/kg

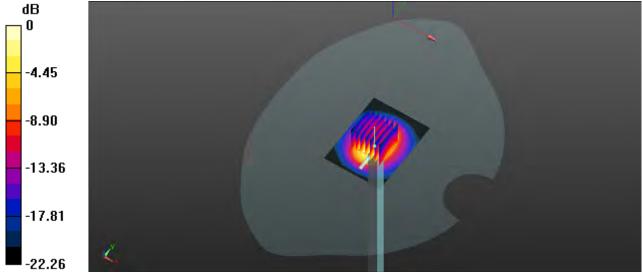

0 dB = 60.6 W/kg = 17.82 dBW/kg

SAR Evaluation Report 23 of 66


#### EUT TEST STRATEGY AND METHODOLOGY

## Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ½ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth.

Report No: RDG160316008-20

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

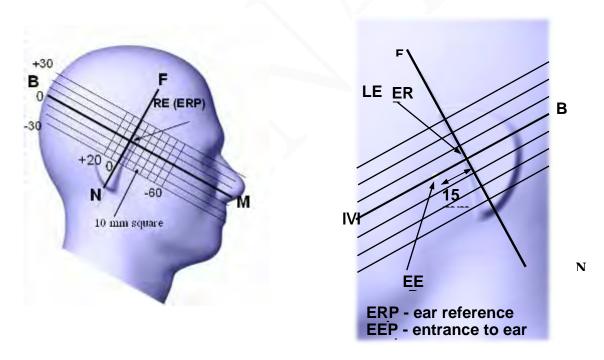

SAR Evaluation Report 24 of 66

#### **Cheek/Touch Position**

The device is brought toward the mouth of the head phantom by pivoting against the "ear reference point" or along the "N-F" line for the SCC-34/SC-2 head phantom.

This test position is established:


When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.

Report No: RDG160316008-20

(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

#### **Cheek / Touch Position**

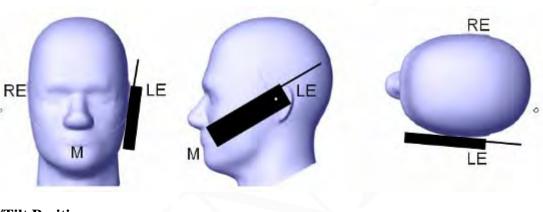

## **Ear/Tilt Position**


With the handset aligned in the "Cheek/Touch Position":

- 1) If the earpiece of the handset is not in full contact with the phantom's ear spacer (in the "Cheek/Touch position") and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.
- 2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both "ear reference points" (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the "test device reference point" until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the "Cheek/Touch" and "Ear/Tilt" positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

SAR Evaluation Report 25 of 66

#### Ear /Tilt 15° Position

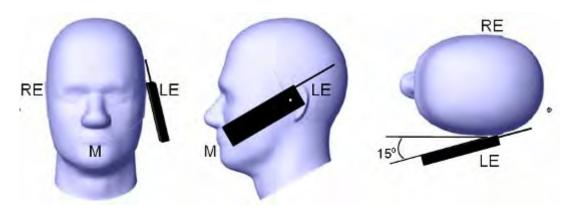

#### Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

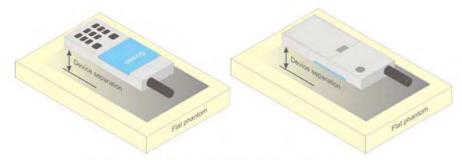


Figure 5 - Test positions for body-worn devices

SAR Evaluation Report 26 of 66

#### **SAR Evaluation Procedure**

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Report No: RDG160316008-20

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

#### **Test methodology**

KDB 447498 D01 General RF Exposure Guidance v06

KDB 648474 D04 Handset SAR v01r03

KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04

KDB 865664 D02 RF Exposure Reporting v01r02

KDB 941225 D01 3G SAR Procedures v03r01

KDB 941225 D06 Hotspot Mode v02r01

KDB 248227 D01 802.11 Wi-Fi SAR v02r02

SAR Evaluation Report 27 of 66

#### CONDUCTED OUTPUT POWER MEASUREMENT


#### **Provision Applicable**

The measured peak output power should be greater and within 5% than EMI measurement.

#### **Test Procedure**

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

Report No: RDG160316008-20

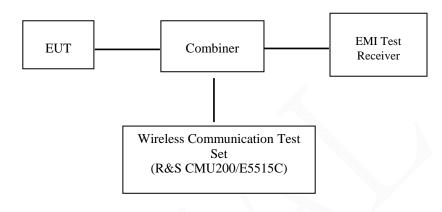

#### **GSM/WCDMA**

## **Radio Configuration**

The power measurement was configured by the Wireless Communication Test Set CMU200 for all Radio configurations except the HSPA+/DC-HSDPA configured by E5515C.

#### **GSM/GPRS/EGPRS**

Menu select > GSM Mobile Station > GSM 850/1900 Function:

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

 $\begin{array}{c} \textbf{Connection} & \textbf{Press Signal Off to turn off the signal and change settings} \\ \textbf{Network Support} > \textbf{GSM} + \textbf{GPRS or GSM} + \textbf{EGSM} \end{array}$ 

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of

time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850 > 30 dBm for GPRS 1900 > 27 dBm for EGPRS 850 > 26 dBm for EGPRS 1900

**BS** Signal Enter the same channel number for TCH channel (test channel) and BCCH

channel

Frequency Offset > +0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stabe)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel

(test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

SAR Evaluation Report 28 of 66 Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)
Bit Stream > 2E9-1 PSR Bit Stream

Report No: RDG160316008-20

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

#### **WCDMA Release 99**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

	Loopback Mode	Test Mode 1			
WCDMA	Rel99 RMC	12.2kbps RMC			
General Settings	Power Control Algorithm	Algorithm2			
	$\beta_c/\beta_d$	8/15			

#### **HSDPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA	
	Subset	1	2	3	4	
	Loopback Mode			Test Mode	1	
	Rel99 RMC			12.2kbps RM	1C	
	HSDPA FRC			H-Set1		
WCDMA	Power Control Algorithm			Algorithm2	2	
General	$eta_{ m c}$	2/15	12/15	15/15	15/15	
Settings	$\beta_{d}$	15/15	15/15	8/15	4/15	
	$\beta_d(SF)$	64				
	$\beta_{\rm c}/\beta_{\rm d}$	2/15	12/15	15/8	15/4	
	$eta_{ m hs}$	4/15	24/15	30/15	30/15	
	MPR(dB)	0	0	0.5	0.5	
	DACK			8		
	DNAK			8		
HSDPA	DCQI	8				
Specific Settings	Ack-Nack repetition factor			3		
Settings	CQI Feedback			4ms		
	CQI Repetition Factor			2		
	Ahs= $\beta$ hs/ $\beta$ c			30/15		

SAR Evaluation Report 29 of 66

## **HSUPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

Report No: RDG160316008-20

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA			
	Subset	1	2	3	4	5			
	Loopback Mode								
	Rel99 RMC	12.2kbps RMC							
	HSDPA FRC H-Set1 HSUPA Test HSUPA Loopback								
	ack								
	Power Control	Power Control Algorithm?							
WCDMA	Algorithm								
General	$\beta_{\rm c}$	11/15	6/15	15/15	2/15	15/15			
Settings	$\beta_d$	15/15	15/15	9/15	15/15	0			
	$\beta_{ec}$	209/225	12/15	30/15	2/15	5/15			
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	-			
	$eta_{ m hs}$	22/15	12/15	30/15	4/15	5/15			
	CM(dB)	1.0	3.0	2.0	3.0	1.0			
	MPR(dB)	0	2	1	2	0			
	DACK			8					
	DNAK			8					
	DCQI			8					
HSDPA	Ack-Nack			3					
Specific	repetition factor			3					
Settings	CQI Feedback			4ms					
	CQI Repetition			2					
	Factor								
	Ahs= $\beta_{hs}/\beta_{c}$			30/15					
	DE-DPCCH	6	8	8	5	7			
	DHARQ	0	0	0	0	0			
	AG Index	20	12	15	17	21			
	ETFCI	75	67	92	71	81			
	Associated Max	242.1	174.9	482.8	205.8	308.9			
	UL Data Rate kbps	2-72.1	174.5	402.0	203.0	300.7			
HSUPA Specific Settings	Reference E_FCls	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI PO26 E-TFCI PO27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27				

SAR Evaluation Report 30 of 66

#### HSPA+

Sub- test	β <sub>c</sub> (Note3)	β <sub>d</sub>	βнs (Note1)	β <sub>ec</sub>	β <sub>ed</sub> (2xSF2) (Note 4)	β <sub>ed</sub> (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β <sub>ed</sub> 1: 30/15 β <sub>ed</sub> 2: 30/15	β <sub>ed</sub> 3: 24/15 β <sub>ed</sub> 4: 24/15	3.5	2.5	14	105	105

Report No: RDG160316008-20

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_{c}$ .

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the  $\beta_c$  is set to 1 and  $\beta_d$  = 0 by default.

Note 4: β<sub>ed</sub> can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

#### **DC-HSDPA**

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces	6
	ses	0
Information Bit Payload ( $N_{\mathit{INF}}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK

Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.

Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.

SAR Evaluation Report 31 of 66

## **Maximum Target Output Power**

Max Target Power(dBm)							
34.15	Channel						
Mode/Band	Low	Middle	High				
GSM 850	32.1	32.1	32.1				
GPRS 1 TX Slot	32.1	32.1	32.1				
GPRS 2 TX Slot	31	31	31				
GPRS 3 TX Slot	29.1	29.1	29.1				
GPRS 4 TX Slot	28.2	28.2	28.2				
EDGE 1 TX Slot	28.6	28.6	28.6				
EDGE 2 TX Slot	27.3	27.3	27.3				
EDGE 3 TX Slot	25.2	25.2	25.2				
EDGE 4 TX Slot	23.9	23.9	23.9				
PCS 1900	29.1	29.1	29.1				
GPRS 1 TX Slot	29.2	29.2	29.2				
GPRS 2 TX Slot	27.8	27.8	27.8				
GPRS 3 TX Slot	25.7	25.7	25.7				
GPRS 4 TX Slot	24.9	24.9	24.9				
EDGE 1 TX Slot	24.7	24.7	24.7				
EDGE 2 TX Slot	23.5	23.5	23.5				
EDGE 3 TX Slot	21.2	21.2	21.2				
EDGE 4 TX Slot	19.6	19.6	19.6				
WCDMA850	22.2	22.2	22.2				
HSDPA	21.2	21.2	21.2				
HSUPA	21.2	21.2	21.2				
DC-HSDPA	21.3	21.3	21.3				
HSPA+	21.2	21.2	21.2				
WCDMA1900	22.1	22.1	22.1				
HSDPA	20.9	20.9	20.9				
HSUPA	20.9	20.9	20.9				
DC-HSDPA	21	21	21				
HSPA+	20.9	20.9	20.9				
WLAN	15	15	15				
Bluetooth BDR/EDR	5.9	5.9	5.9				
Bluetooth LE	-2.1	-2.1	-2.1				

Report No: RDG160316008-20

SAR Evaluation Report 32 of 66

## **Test Results:**

#### GSM:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)
	128	824.2	32
GSM 850	190	836.6	31.8
	251	848.8	32
	512	1850.2	29
PCS 1900	661	1880	28.9
	810	1909.8	28.6

Report No: RDG160316008-20

## **GPRS:**

Dond	Channel	Frequency	]	RF Output P	ower (dBm)	
Band	No.	(MHz)	1 slot	2 slots	3 slots	4 slots
	128	824.2	32.03	30.91	28.93	28.13
GSM 850	190	836.6	31.82	30.72	28.73	27.87
	251	848.8	31.97	30.92	28.97	28.06
	512	1850.2	29.08	27.74	25.62	24.82
PCS 1900	661	1880	28.87	27.56	25.46	24.69
	810	1909.8	28.61	27.34	25.16	24.25

## **EGPRS**:

Band	Channel	Frequency	]	RF Output Po	ower (dBm)	
Danu	No.	(MHz)	1 slot	2 slots	3 slots	4 slots
	128	824.2	28.49	27.22	25.07	23.8
GSM 850	190	836.6	28.41	27.19	24.97	23.62
	251	848.8	28.2	26.98	24.69	23.36
	512	1850.2	24.59	23.36	21.06	19.52
PCS 1900	661	1880	24.27	22.95	20.62	19.1
	810	1909.8	23.76	22.43	20.04	18.59

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

SAR Evaluation Report 33 of 66

### The time based average power for GPRS

Report No: RDG160316008-20

Dond	Channel	Frequency	Time	e based avera	ge Power (dB	m)
Band	No.	(MHz)	1 slot	2 slot	3 slots	4 slots
	128	824.2	23.03	24.91	24.68	25.13
GSM 850	190	836.6	22.82	24.72	24.48	24.87
	251	848.8	22.97	24.92	24.72	25.06
	512	1850.2	20.08	21.74	21.37	21.82
PCS 1900	661	1880	19.87	21.56	21.21	21.69
	810	1909.8	19.61	21.34	20.91	21.25

#### The time based average power for EGPRS

Dand	Channel	Frequency (MHz)	Time based average Power (dBm)				
Band	No.		1 slot	2 slot	3 slots	4 slots	
GSM 850	128	824.2	19.49	21.22	20.82	20.8	
	190	836.6	19.41	21.19	20.72	20.62	
	251	848.8	19.2	20.98	20.44	20.36	
PCS 1900	512	1850.2	15.59	17.36	16.81	16.52	
	661	1880	15.27	16.95	16.37	16.1	
	810	1909.8	14.76	16.43	15.79	15.59	

#### Note:

- 1.Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
- 2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
- 3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
- 4.According to KDB941225D06-SAR for EGPRS mode are not required when the source-based time-averaged output power for data mode is lower than that in the normal GPRS mode

SAR Evaluation Report 34 of 66

## Results (12.2kbps RMC)

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)
	4132	826.4	21.88
WCDMA 850	4183	836.6	22.14
	4233	846.6	21.89
WCDMA 1900	9262	1852.4	21.84
	9400	1880	21.95
	9538	1907.6	21.59

Report No: RDG160316008-20

## **Results (HSDPA)**

D J	Charact Na	Frequency	RF Output Power (dBm)				
Band	Channel No.	(MHz)	Subset 1	Subset 2	Subset 3	Subset 4	
WCDMA	4132	826.4	20.95	20.92	20.97	21	
WCDMA 850	4183	836.6	21.06	21.12	20.92	21.05	
	4233	846.6	20.75	20.66	20.78	20.69	
WGD) (	9262	1852.4	20.62	20.72	20.76	20.58	
WCDMA 1900	9400	1880	20.75	20.78	20.81	20.74	
	9538	1907.6	20.48	20.55	20.46	20.36	

## Results (HSUPA)

	47	Total Control					
D 1	Channel	Frequency	RF Output Power (dBm)				
Band	No.	(MHz)	Subset 1	Subset 2	Subset 3	Subset 4	Subset 5
WCDMA 850	4132	826.4	20.96	20.97	20.95	20.92	21.05
	4183	836.6	21.03	20.93	21.07	20.89	21.14
	4233	846.6	20.73	20.75	20.67	20.59	20.74
WCDMA1900	9262	1852.4	20.69	20.73	20.61	20.74	20.62
	9400	1880	20.76	20.67	20.81	20.7	20.77
	9538	1907.6	20.56	20.58	20.62	20.54	20.7

SAR Evaluation Report 35 of 66

D d	CI IN	Frequency	RF Output Power (dBm)			
Band	Channel No.	(MHz)	Subset 1	Subset 2	Subset 3	Subset 4
WCDMA 850	4132	826.4	21.08	20.99	21.06	20.96
	4183	836.6	21.03	21.15	21.05	21.1
	4233	846.6	20.66	20.75	20.83	20.73
WCDMA 1900	9262	1852.4	20.8	20.58	20.56	20.78
	9400	1880	20.83	20.87	20.69	20.75
	9538	1907.6	20.54	20.6	20.47	20.43

Report No: RDG160316008-20

#### **Results (HSPA+)**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
	4132	826.4	21.06			
WCDMA 850	4183	836.6	21.08			
	4233	846.6	20.8			
WCDMA 1900	9262	1852.4	20.61			
	9400	1880	20.83			
	9538	1907.6	20.53			

#### Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1. 2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+/DC-HSDPA when the maximum average output of each RF channel is less than  $\frac{1}{4}$  dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

SAR Evaluation Report 36 of 66

## Bluetooth

Mode	Channel	Channel frequency	RF Output Power
Mode	No.	(MHz)	(dBm)
	0	2402	5.66
BDR(GFSK)	39	2441	5.81
	78	2480	5.66
	0	2402	4.68
EDR(4-DQPSK)	39	2441	4.95
	78	2480	4.89
	0	2402	4.74
EDR(8-DPSK)	39	2441	5.01
	78	2480	4.74
	0	2402	-2.34
Bluetooth LE	19	2440	-2.22
	39	2480	-2.8

Report No: RDG160316008-20

# WLAN

Mode	Mode Channel Channel fr No. (MH		RF Output Power (dBm)
	1	2412	14.89
802.11b	6	2437	14.87
	11	2462	14.43
	1	2412	13.76
802.11g	6	2437	13.70
	11	2462	13.63
002.11	1	2412	11.97
802.11n HT20	6	2437	11.87
11120	11	2462	11.81

**Note:** The output power was tested under data rate 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n HT20.

**SAR** Evaluation Report 37 of 66

## SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

The EUT is capable of function as a WLAN to cellular mobile hotspot. Additional SAR test was performed according to KDB941225 D06. Test was performed with a separation of 1cm between the EUT and the flat phantom. The EUT was positioned for SAR tests with the front and back surfaces facing the edge. Each transmit band was utilized for SAR testing. The tested mode has been selected within each band that exhibits the highest time average output power.

Report No: RDG160316008-20

#### **SAR Test Data**

#### **Environmental Conditions**

Temperature:	22.7-23.7 °C	23.2-24.5 °C
Relative Humidity:	30 %	28 %
ATM Pressure:	1009 mbar	1007 mbar
Test Date:	2016-03-21	2016-03-22

Testing was performed by Rocky Xiao

SAR Evaluation Report 38 of 66

#### **GSM 850:**

DUC	E	Toot	Power	Max. Meas.	Max.	1	lg SAR (V	V/Kg)	
EUT Position		Test Mode			Rated Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	824.2	GSM	/	/	/	/	/	/	/
Left Head Cheek	836.6	GSM	0.17	31.8	32.1	1.072	0.236	0.253	/
	848.8	GSM	/	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/	/
Left Head Tilt	836.6	GSM	-0.09	31.8	32.1	1.072	0.153	0.164	/
	848.8	GSM	/	/	/	/	/	/	/
	824.2	GSM	0.06	32	32.1	1.023	0.297	0.304	1#
Right Head Cheek	836.6	GSM	0.06	31.8	32.1	1.072	0.277	0.297	/
	848.8	GSM	0.14	32	32.1	1.023	0.288	0.295	/
	824.2	GSM	/	/	/	/	/	/	/
Right Head Tilt	836.6	GSM	0.06	31.8	32.1	1.072	0.177	0.19	/
	848.8	GSM	/	/	/	/	1	/	/
	824.2	GSM	1	/	1	/	/	/	/
Body-Back-Headset (10mm)	836.6	GSM	0.18	31.8	32.1	1.072	0.541	0.58	/
(Tollin)	848.8	GSM	/	/	/	/	/	/	/
	824.2	GPRS	-0.14	28.13	28.2	1.016	0.693	0.704	2#
Body-Back (10mm)	836.6	GPRS	0.13	27.87	28.2	1.079	0.628	0.678	/
(Tollill)	848.8	GPRS	0.03	28.06	28.2	1.033	0.652	0.674	/
	824.2	GPRS	/	/	/	/	/	/	/
Body-Left (10mm)	836.6	GPRS	0.08	27.87	28.2	1.079	0.181	0.195	/
(Tollill)	848.8	GPRS	/	/	/	/	/	/	/
	824.2	GPRS	/	/	/	/	/	/	/
Body-Right (10mm)	836.6	GPRS	-0.16	27.87	28.2	1.079	0.574	0.619	/
(1011111)	848.8	GPRS	/	/	/	/	/	/	/
	824.2	GPRS	/	/	/	/	/	/	/
Body-Bottom (10mm)	836.6	GPRS	0.17	27.87	28.2	1.079	0.589	0.636	/
(1011111)	848.8	GPRS	/	/	/	/	/	/	/

#### Note:

- 1. When the 1-g SAR is  $\leq$  0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same GSM antenna while testing SAR.
- 3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
- 4. When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.
- 5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.

SAR Evaluation Report 39 of 66

#### PCS 1900:

TO LIED	E	Tr4	Power	Max.	Max.	1	lg SAR (V	V/Kg)	
EUT Position	Frequency (MHz)	Test Mode	Drift (dB)	Meas. Power (dBm)	Rated Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1850.2	GSM	0.16	29	29.1	1.023	0.55	0.563	3#
Left Head Cheek	1880	GSM	0.06	28.9	29.1	1.047	0.524	0.549	/
	1909.8	GSM	0.09	28.6	29.1	1.122	0.488	0.548	/
	1850.2	GSM	/	/	/	/	/	/	/
Left Head Tilt	1880	GSM	-0.08	28.9	29.1	1.047	0.329	0.344	/
	1909.8	GSM	/	/	/	/	/	/	/
	1850.2	GSM	/	/	/	/	/	/	/
Right Head Cheek	1880	GSM	-0.1	28.9	29.1	1.047	0.466	0.488	/
	1909.8	GSM	/	/	1	/	/	/	/
	1850.2	GSM	/	/	/	/	/	/	/
Right Head Tilt	1880	GSM	-0.19	28.9	29.1	1.047	0.312	0.327	/
	1909.8	GSM	/	/	1	/	1	/	/
	1850.2	GSM	1	/	1	/	/	/	/
Body-Back-Headset (10mm)	1880	GSM	-0.14	28.9	29.1	1.047	0.604	0.632	/
(Tomm)	1909.8	GSM	/	/	/	/	/	/	/
	1850.2	GPRS	-0.01	24.82	24.9	1.019	0.755	0.769	4#
Body-Back (10mm)	1880	GPRS	0.11	24.69	24.9	1.05	0.717	0.753	/
(1011111)	1909.8	GPRS	0.17	24.25	24.9	1.161	0.645	0.749	/
	1850.2	GPRS	/	/	/	/	/	/	/
Body-Left (10mm)	1880	GPRS	0.17	24.69	24.9	1.05	0.21	0.221	/
(1011111)	1909.8	GPRS	/	/	/	/	/	/	/
	1850.2	GPRS	/	/	/	/	/	/	/
Body-Right (10mm)	1880	GPRS	-0.11	24.69	24.9	1.05	0.641	0.673	/
(10/11111)	1909.8	GPRS	/	/	/	/	/	/	/
	1850.2	GPRS	/	/	/	/	/	/	/
Body-Bottom (10mm)	1880	GPRS	0.16	24.69	24.9	1.05	0.662	0.695	/
(10/11111)	1909.8	GPRS	/	/	/	/	/	/	/

#### Note:

- 1. When the 1-g SAR is  $\leq$  0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same GSM antenna while testing SAR.
- 3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
- 4. When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.
- 5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.

SAR Evaluation Report 40 of 66

#### **WCDMA 850:**

EUT	Frequency Test		Power	Max. Meas.	Max. Rated	1	lg SAR (V	V/Kg)	
Position	(MHz)	Mode	Drift (dB)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	826.4	RMC	/	/	/	/	/	/	/
Left Head Cheek	836.6	RMC	-0.2	22.14	22.2	1.014	0.261	0.265	/
	846.6	RMC	/	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/	/
Left Head Tilt	836.6	RMC	-0.05	22.14	22.2	1.014	0.175	0.177	/
	846.6	RMC	/	/	/	/	/	/	/
	826.4	RMC	0.01	21.88	22.2	1.076	0.281	0.302	/
Right Head Cheek	836.6	RMC	-0.06	22.14	22.2	1.014	0.306	0.31	5#
	846.6	RMC	0.15	21.89	22.2	1.074	0.278	0.299	/
	826.4	RMC	/	/	/	/	/	/	/
Right Head Tilt	836.6	RMC	-0.2	22.14	22.2	1.014	0.188	0.191	/
	846.6	RMC	/	/	/	/	1	/	/
	826.4	RMC	0.17	21.88	22.2	1.076	0.482	0.519	/
Body-Back (10mm)	836.6	RMC	0.12	22.14	22.2	1.014	0.528	0.535	6#
(1011111)	846.6	RMC	0.15	21.89	22.2	1.074	0.487	0.523	/
	826.4	RMC	/	/	/	/	/	/	/
Body-Left (10mm)	836.6	RMC	-0.07	22.14	22.2	1.014	0.144	0.146	/
(1011111)	846.6	RMC	/	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/	/
Body-Right (10mm)	836.6	RMC	-0.13	22.14	22.2	1.014	0.391	0.396	/
(1011111)	846.6	RMC	/	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/	/
Body-Bottom (10mm)	836.6	RMC	0.01	22.14	22.2	1.014	0.461	0.467	/
(1011111)	846.6	RMC	/	/	/	/	/	/	/

## Note:

- 1. When the 1-g SAR is≤0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same antenna while testing SAR.
- 3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
- 4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+/DC-HSDPA when the maximum average output of each RF channel is less than ½ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
- 5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

SAR Evaluation Report 41 of 66

#### **WCDMA 1900:**

EUT	Frequency	Test	Power	Max. Meas.	Max. Rated	1	lg SAR (V	V/Kg)	
Position	(MHz)	Mode	Drift (dB)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1852.4	RMC	0.14	21.84	22.1	1.062	0.741	0.787	/
Left Head Cheek	1880	RMC	0.12	21.95	22.1	1.035	0.777	0.804	7#
	1907.6	RMC	0.17	21.59	22.1	1.125	0.69	0.776	/
	1852.4	RMC	/	/	/	/	/	/	/
Left Head Tilt	1880	RMC	0.05	21.95	22.1	1.035	0.543	0.562	/
	1907.6	RMC	/	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/	/
Right Head Cheek	1880	RMC	-0.14	21.95	22.1	1.035	0.665	0.688	/
	1907.6	RMC	/	/	1	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/	/
Right Head Tilt	1880	RMC	0.15	21.95	22.1	1.035	0.406	0.42	/
	1907.6	RMC	/	/	/	/	1	/	/
	1852.4	RMC	0.07	21.84	22.1	1.062	0.792	0.841	/
Body-Back (10mm)	1880	RMC	0.02	21.95	22.1	1.035	0.853	0.883	8#
(Tomm)	1907.6	RMC	0.1	21.59	22.1	1.125	0.763	0.858	/
	1852.4	RMC	/	/	1	/	/	/	/
Body-Left (10mm)	1880	RMC	-0.12	21.95	22.1	1.035	0.236	0.244	/
(Tomm)	1907.6	RMC	1	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/	/
Body-Right (10mm)	1880	RMC	0.02	21.95	22.1	1.035	0.613	0.634	/
(1011111)	1907.6	RMC	/	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/	/
Body-Bottom (10mm)	1880	RMC	0.12	21.95	22.1	1.035	0.687	0.711	/
(1011111)	1907.6	RMC	/	/	/	/	/	/	/

## Note:

- 1. When the 1-g SAR is≤0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same antenna while testing SAR.
- 3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
- 4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+/DC-HSDPA when the maximum average output of each RF channel is less than ½ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
- 5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

SAR Evaluation Report 42 of 66

#### WLAN:

EUT	Enggyonov	Test	Power	Max. Meas.	Max. Rated		1g SAR (	W/Kg)	
Position	Frequency (MHz)	Mode	Drift (dB)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	2412	802.11b	-0.01	14.89	15	1.026	0.236	0.242	9#
Left Head Cheek	2437	802.11b	0.05	14.87	15	1.03	0.225	0.232	/
	2462	802.11b	0.03	14.43	15	1.14	0.202	0.23	/
	2412	802.11b	/	/	/	/	/	/	/
Left Head Tilt	2437	802.11b	-0.05	14.87	15	1.03	0.144	0.148	/
	2462	802.11b	/	/	/	/	/	/	/
	2412	802.11b	/	/	/	/	/	/	/
Right Head Cheek	2437	802.11b	0.15	14.87	15	1.03	0.186	0.192	/
	2462	802.11b	/	/	/	/	/	/	/
	2412	802.11b	/	/	/	/	/	/	/
Right Head Tilt	2437	802.11b	0.06	14.87	15	1.03	0.127	0.131	/
	2462	802.11b	/	/	/	/	1	/	/
	2412	802.11b	0.18	14.89	15	1.026	0.143	0.147	10#
Body-Back (10mm)	2437	802.11b	0.17	14.87	15	1.03	0.138	0.142	/
(Tomm)	2462	802.11b	0.04	14.43	15	1.14	0.123	0.14	/
	2412	802.11b	/	/	/	/	/	/	/
Body-Left (10mm)	2437	802.11b	-0.08	14.87	15	1.03	0.087	0.090	/
(1011111)	2462	802.11b	/	/	/	/	/	/	/
	2412	802.11b	/	/	/	/	/	/	/
Body-Right (10mm)	2437	802.11b	-0.08	14.87	15	1.03	0.022	0.023	/
(Tollill)	2462	802.11b	/	/	/	/	/	/	/
	2412	802.11b	/	/	/	/	/	/	/
Body-Top (10mm)	2437	802.11b	-0.08	14.87	15	1.03	0.095	0.098	/
(1011111)	2462	802.11b	/	/	/	/	/	/	/

#### Note:

SAR Evaluation Report 43 of 66

<sup>1.</sup> When the 1-g SAR is  $\leq$  0.8 W/Kg, testing for other channels are optional.

<sup>2.</sup> When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

<sup>3.</sup>KDB248227-SAR is not required for 802.11g channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

# SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Report No: RDG160316008-20

# BT&WLAN and GSM&WCDMA Antennas Location:



## **Simultaneous Transmission:**

Description of Simul	Description of Simultaneous Transmit Capabilities							
Transmitter Combination	Simultaneous?	Antennas Distance (mm)						
GSM + WCDMA	×	×	0					
GSM + Bluetooth	$\sqrt{}$	×	80					
GSM + WLAN	$\sqrt{}$	√	80					
WCDMA + Bluetooth	$\sqrt{}$	×	80					
WCDMA + WLAN	$\sqrt{}$	$\sqrt{}$	80					

SAR Evaluation Report 44 of 66

#### Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
Bluetooth	2480	5.9	3.89	0	1.2	3	YES

Report No: RDG160316008-20

#### NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

[( max. power of channel, including tune-up tolerance, mW )/( min. test separation distance, mm)] ·

 $[\sqrt{f(GHz)}] \le 3.0$  for 1-g SAR and  $\le 7.5$  for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

#### **Standalone SAR estimation:**

Mode	Frequency (GHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Estimated 1-g (W/kg)
BT Head	2480	5.9	3.89	0	0.16
BT Body	2480	5.9	3.89	10	0.08

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

[( max. power of channel, including tune-up tolerance , mW)/( min. test separation distance, mm)]  $\cdot [\sqrt{f(GHz)/x}]$ 

W/kg for test separation distances ≤50 mm;

where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

SAR Evaluation Report 45 of 66

# Simultaneous and Hotspot SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported S	SAR(W/kg)	ΣSAR < 1.6W/kg
		SAR1	SAR2	J
	Left Head Cheek	0.253	0.16	0.413
	Left Head Tilt	0.164	0.16	0.324
GSM 850+Bluetooth	Right Head Cheek	0.304	0.16	0.464
	Right Head Tilt	0.19	0.16	0.35
	Body-Back-Headset	0.58	0.08	0.66
	Body-Back	0.704	0.08	0.784
CDDC 950 + Dlustooth	Body- Left	0.195	0.08	0.275
GPRS 850 + Bluetooth	Body- Right	0.619	0.08	0.699
	Body-Bottom	0.636	0.08	0.716
	Left Head Cheek	0.563	0.16	0.723
	Left Head Tilt	0.344	0.16	0.504
PCS1900 +Bluetooth	Right Head Cheek	0.488	0.16	0.648
	Right Head Tilt	0.327	0.16	0.487
	Body-Back-Headset	0.632	0.08	0.712
	Body-Back	0.769	0.08	0.849
CDDC 1000 + Dlunts of	Body- Left	0.221	0.08	0.301
GPRS 1900 + Bluetooth	Body- Right	0.673	0.08	0.753
	Body-Bottom	0.695	0.08	0.775
	Left Head Cheek	0.265	0.16	0.425
	Left Head Tilt	0.177	0.16	0.337
	Right Head Cheek	0.31	0.16	0.47
WCDMA 950   Dlasto of	Right Head Tilt	0.191	0.16	0.351
WCDMA 850+Bluetooth	Body-Back	0.535	0.08	0.615
	Body- Left	0.146	0.08	0.226
	Body- Right	0.396	0.08	0.476
	Body-Bottom	0.467	0.08	0.547
	Left Head Cheek	0.804	0.16	0.964
	Left Head Tilt	0.562	0.16	0.722
	Right Head Cheek	0.688	0.16	0.848
WCDMA 1000   Dlusto stl	Right Head Tilt	0.42	0.16	0.58
WCDMA 1900+Bluetooth	Body-Back	0.883	0.08	0.963
	Body- Left	0.244	0.08	0.324
	Body- Right	0.634	0.08	0.714
	Body-Bottom	0.711	0.08	0.791

Report No: RDG160316008-20

SAR Evaluation Report 46 of 66

Mode(SAR1+SAR2)	Position	Reported S	ΣSAR <		
, ,		SAR1	SAR2	1.6W/kg	
GSM 850+ WLAN	Left Head Cheek	0.253	0.242	0.495	
	Left Head Tilt	0.164	0.148	0.312	
	Right Head Cheek	0.304	0.192	0.496	
	Right Head Tilt	0.19	0.131	0.321	
	Body-Back-Headset	0.58	0.147	0.727	
GPRS 850 + WLAN (Hotspot)	Body-Back	0.704	0.147	0.851	
	Body- Left	0.195	0.09	0.285	
	Body- Right	0.619	0.023	0.642	
PCS1900 + WLAN	Left Head Cheek	0.563	0.242	0.805	
	Left Head Tilt	0.344	0.148	0.492	
	Right Head Cheek	0.488	0.192	0.68	
	Right Head Tilt	0.327	0.131	0.458	
	Body-Back-Headset	0.632	0.147	0.779	
GPRS 1900 + WLAN (Hotspot)	Body-Back	0.769	0.147	0.916	
	Body- Left	0.221	0.09	0.311	
	Body- Right	0.673	0.023	0.696	
WCDMA 850+ WLAN	Left Head Cheek	0.265	0.242	0.507	
	Left Head Tilt	0.177	0.148	0.325	
	Right Head Cheek	0.31	0.192	0.502	
	Right Head Tilt	0.191	0.131	0.322	
WCDMA 850+ WLAN (Hotspot)	Body-Back	0.535	0.147	0.682	
	Body- Left	0.146	0.09	0.236	
	Body- Right	0.396	0.023	0.419	
A	Left Head Cheek	0.804	0.242	1.046	
WCDMA 1900+ WLAN	Left Head Tilt	0.562	0.148	0.71	
	Right Head Cheek	0.688	0.192	0.88	
	Right Head Tilt	0.42	0.131	0.551	
	Body-Back	0.883	0.147	1.03	
WCDMA 1900+ WLAN (Hotspot)	Body- Left	0.244	0.09	0.334	
(Hotspot)	Body- Right	0.634	0.023	0.657	

## **Conclusion:**

 $\Sigma$  SAR < 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not** required.

**SAR** Evaluation Report 47 of 66

<sup>1.</sup> Hotspot mode SAR is only required for the edges within 25mm from the transmitting antenna located.

2. Hotspot mode SAR is applicable for data transmission mode not for voice call mode, therefor, head use condition is not required for hotspot mode.

# Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 1#: GSM 850 Right Cheek Low Channel

DUT: smart phone; Type: PCD PH3501;

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8 Medium parameters used: f = 824.2 MHz;  $\sigma = 0.877$  S/m;  $\epsilon_r = 42.924$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7329; ConvF(9.37, 9.37, 9.37); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

**Head/GSM 850 Right Cheek/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 0.318 W/kg


Head/GSM 850 Right Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.91 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

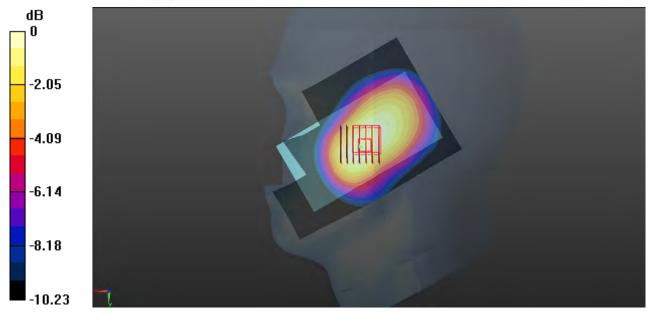

0 dB = 0.314 W/kg = -5.03 dBW/kg

SAR Evaluation Report 48 of 66

#### Test Plot 2#: GSM 850 Back Low Channel

### DUT: smart phone; Type: PCD PH3501;

Communication System: Generic GPRS-4 slots; Frequency: 824.2 MHz; Duty Cycle: 1:2 Medium parameters used: f = 824.2 MHz;  $\sigma = 0.963$  S/m;  $\epsilon_r = 55.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7329; ConvF(9.42, 9.42, 9.42); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

Body/GSM 850 Back/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.734 W/kg


Body/GSM 850 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.53 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.878 W/kg

SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.514 W/kg

Maximum value of SAR (measured) = 0.731 W/kg

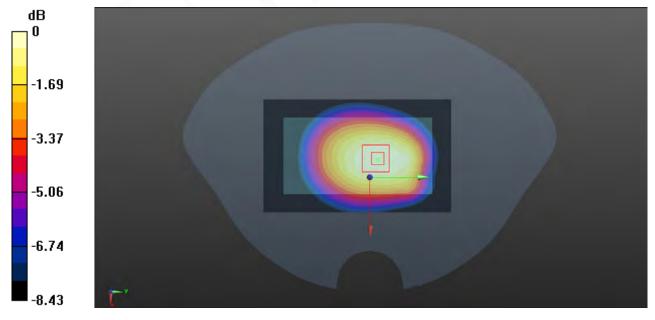

0 dB = 0.731 W/kg = -1.36 dBW/kg

SAR Evaluation Report 49 of 66

#### Test Plot 3#: PCS 1900 Left Cheek Low Channel

### DUT: smart phone; Type: PCD PH3501;

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8 Medium parameters used: f = 1850.2 MHz;  $\sigma = 1.359$  S/m;  $\varepsilon_r = 39.823$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN7329; ConvF(7.94, 7.94, 7.94); Calibrated: 2016/2/19;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

**Head/PCS 1900 Left Cheek/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 0.595 W/kg


Head/PCS 1900 Left Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.569 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.787 W/kg

SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 0.595 W/kg

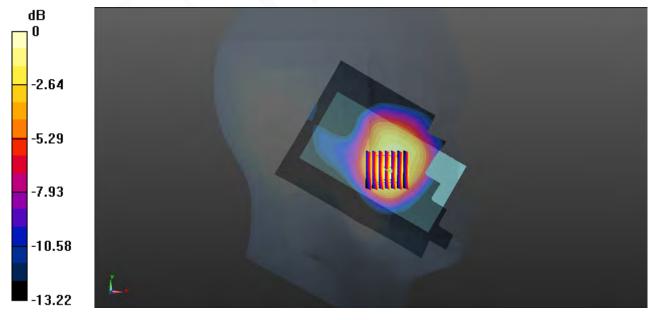

0 dB = 0.595 W/kg = -2.25 dBW/kg

SAR Evaluation Report 50 of 66

#### Test Plot 4#: PCS 1900 Back Low Channel

### DUT: smart phone; Type: PCD PH3501;

Communication System: Generic GPRS-4 slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2 Medium parameters used: f=1850.2 MHz;  $\sigma=1.477$  S/m;  $\epsilon_r=55.27$ ;  $\rho=1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN7329; ConvF(7.52, 7.52, 7.52); Calibrated: 2016/2/19;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

Body/PCS 1900 Back/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.876 W/kg


Body/PCS 1900 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.04 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.755 W/kg; SAR(10 g) = 0.452 W/kg

Maximum value of SAR (measured) = 0.830 W/kg

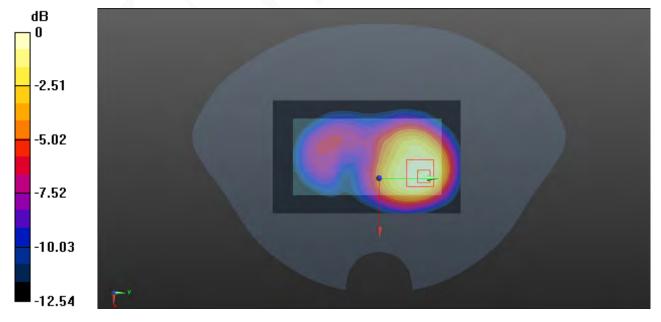

0 dB = 0.830 W/kg = -0.81 dBW/kg

SAR Evaluation Report 51 of 66

#### Test Plot 5#: WCDMA 850 Right Cheek Middle Channel

# DUT: smart phone; Type: PCD PH3501;

Communication System: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: f = 836.6 MHz;  $\sigma = 0.892 \text{ S/m}$ ;  $\varepsilon_r = 42.849$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7329; ConvF(9.37, 9.37, 9.37); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

**Head/WCDMA 850 Right Cheek/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 0.333 W/kg


Head/WCDMA 850 Right Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.54 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

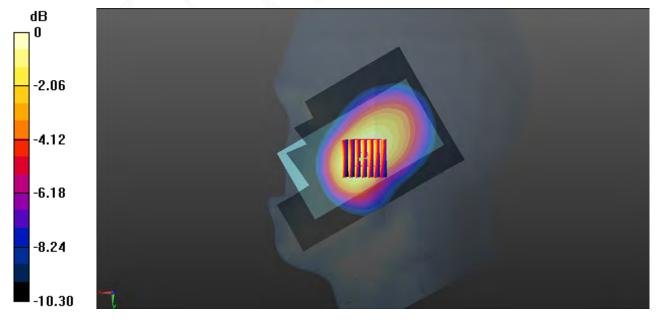

0 dB = 0.328 W/kg = -4.84 dBW/kg

SAR Evaluation Report 52 of 66

#### Test Plot 6#: WCDMA 850 Back Middle Channel

### DUT: smart phone; Type: PCD PH3501;

Communication System: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: f = 836.6 MHz;  $\sigma = 0.976 \text{ S/m}$ ;  $\varepsilon_r = 55.097$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7329; ConvF(9.42, 9.42, 9.42); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

#### Body/WCDMA 850 Back/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.554 W/kg


#### Body/WCDMA 850 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.62 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.672 W/kg

SAR(1 g) = 0.528 W/kg; SAR(10 g) = 0.392 W/kg

Maximum value of SAR (measured) = 0.555 W/kg

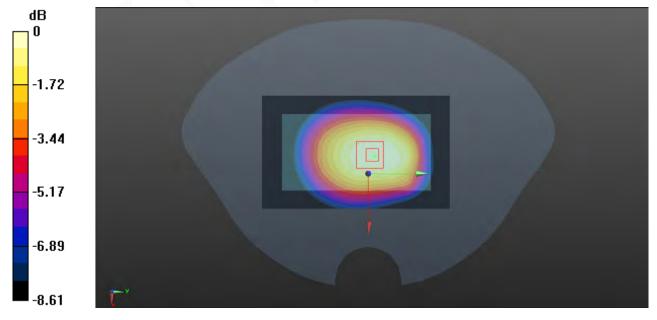

0 dB = 0.555 W/kg = -2.56 dBW/kg

SAR Evaluation Report 53 of 66

#### Test Plot 7#: WCDMA 1900 Left Cheek Middle Channel

### DUT: smart phone; Type: PCD PH3501;

Communication System: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1880 MHz;  $\sigma = 1.384 \text{ S/m}$ ;  $\varepsilon_r = 39.764$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7329; ConvF(7.94, 7.94, 7.94); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

**Head/WCDMA 1900 Left Cheek/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 0.872 W/kg


Head/WCDMA 1900 Left Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.438 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.495 W/kg

Maximum value of SAR (measured) = 0.836 W/kg

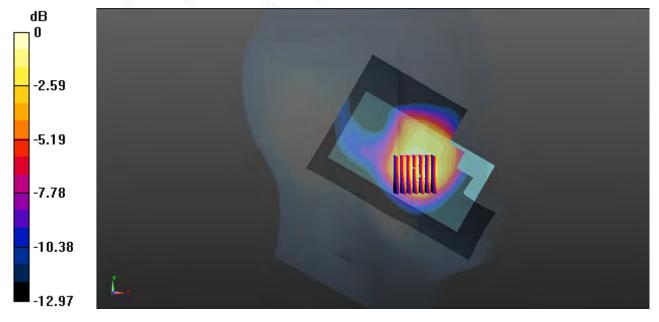

0 dB = 0.836 W/kg = -0.78 dBW/kg

SAR Evaluation Report 54 of 66

#### Test Plot 8#: WCDMA 1900 Back Middle Channel

### DUT: smart phone; Type: PCD PH3501;

Communication System: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1880 MHz;  $\sigma = 1.543 \text{ S/m}$ ;  $\varepsilon_r = 53.755$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7329; ConvF(7.52, 7.52, 7.52); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

Body/WCDMA 1900 Back/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg


Body/WCDMA 1900 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.02 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.853 W/kg; SAR(10 g) = 0.500 W/kg

Maximum value of SAR (measured) = 0.939 W/kg

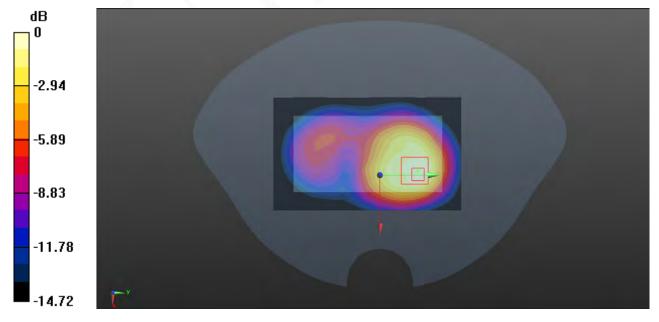

0 dB = 0.939 W/kg = -0.27 dBW/kg

SAR Evaluation Report 55 of 66

#### Test Plot 9#: WLAN Mode B Left Cheek Low Channel

## DUT: smart phone; Type: PCD PH3501;

Communication System: CW; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz;  $\sigma = 1.793$  S/m;  $\varepsilon_r = 39.351$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7329; ConvF(7.21, 7.21, 7.21); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

**Head/WLAN Mode B Left Cheek/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 0.750 W/kg


Head/WLAN Mode B Left Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.051 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.560 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.347 W/kg

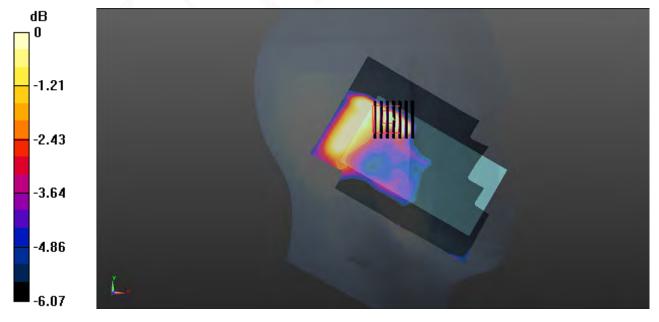

0 dB = 0.347 W/kg = -4.60 dBW/kg

SAR Evaluation Report 56 of 66

#### Test Plot 10#: WLAN Mode B Back Low Channel

### DUT: smart phone; Type: PCD PH3501;

Communication System: CW; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz;  $\sigma = 1.94$  S/m;  $\epsilon_r = 53.254$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

• Probe: EX3DV4 - SN7329; ConvF(7.26, 7.26, 7.26); Calibrated: 2016/2/19;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2015/9/18

Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874

Report No: RDG160316008-20

• Measurement SW: DASY52, Version 52.8 (8);

Body/WLAN Mode B Back/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.133 W/kg


Body/WLAN Mode B Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.827 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.179 W/kg

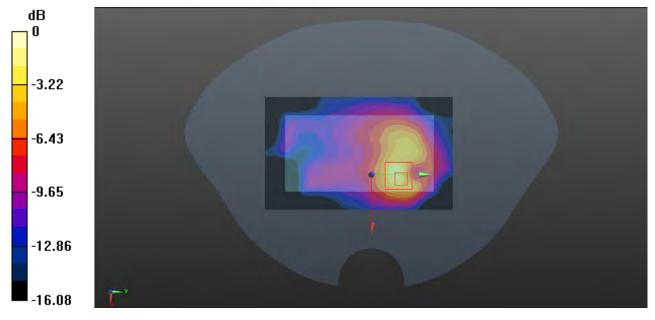

0 dB = 0.179 W/kg = -7.47 dBW/kg

SAR Evaluation Report 57 of 66

# APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Report No: RDG160316008-20

# Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)	
Measurement system								
Probe calibration	6.55	N	1	1	1	6.6	6.6	
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7	
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0	
Boundary effect	1.0	R	√3	1	1	0.6	0.6	
Linearity	4.7	R	√3	1	1	2.7	2.7	
Detection limits	1.0	R	√3	1	1	0.6	0.6	
Readout electronics	0.3	N	1	1	1	0.3	0.3	
Response time	0.0	R	√3	1	1	0.0	0.0	
Integration time	0.0	R	√3	1	1	0.0	0.0	
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6	
RF ambient conditions–reflections	1.0	R	√3	1	1	0.6	0.6	
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5	
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9	
Post-processing	2.0	R	√3	1	1	1.2	1.2	
		Test sample	e related					
Test sample positioning	2.8	N	1	1	1	2.8	2.8	
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3	
Drift of output power	5.0	R	√3	1	1	2.9	2.9	
		Phantom an	d set-up					
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3	
Liquid conductivity target)	5.0	R	√3	0.64	0.43	1.8	1.2	
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1	
Liquid permittivity target)	5.0	R	√3	0.6	0.49	1.7	1.4	
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2	
Combined standard uncertainty		RSS				12.2	12.0	
Expanded uncertainty 95 % confidence interval)						24.3	23.9	

SAR Evaluation Report 58 of 66

# Measurement uncertainty evaluation for IEC62209-2 SAR test

Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0
Linearity	4.7	R	√3	1	1	2.7	2.7
Modulation Response	0.0	R	√3	1	1	0.0	0.0
Detection limits	1.0	R	√3	1	1	0.6	0.6
Boundary effect	1.0	R	√3	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	√3	1	1	0.0	0.0
Integration time	0.0	R	√3	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	√3	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9
Post-processing	2.0	R	√3	1	1	1.2	1.2
Test sample related							
Device holder Uncertainty	6.3	N	1	1	1	6.3	6.3
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Power scaling	4.5	R	√3	1	1	2.6	2.6
Drift of output power	5.0	R	√3	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.1	0.9
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Temp. unc Conductivity	1.7	R	√3	0.78	0.71	0.8	0.7
Temp. unc Permittivity	0.3	R	√3	0.23	0.26	0.0	0.0
Combined standard uncertainty		RSS				12.2	12.1
Expanded uncertainty 95 % confidence interval)						24.5	24.2

SAR Evaluation Report 59 of 66

# APPENDIX B EUT TEST POSITION PHOTOS

Liquid depth  $\geq 15$ cm




**Body-worn Back Setup Photo** 



SAR Evaluation Report 60 of 66

# **Body-worn Left Setup Photo**

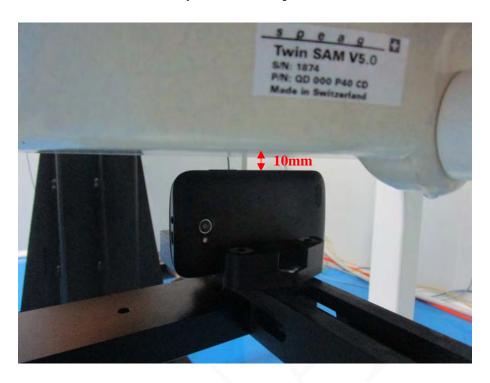


**Body-worn Right Setup Photo** 



SAR Evaluation Report 61 of 66

# **Body-worn Headset Setup Photo**

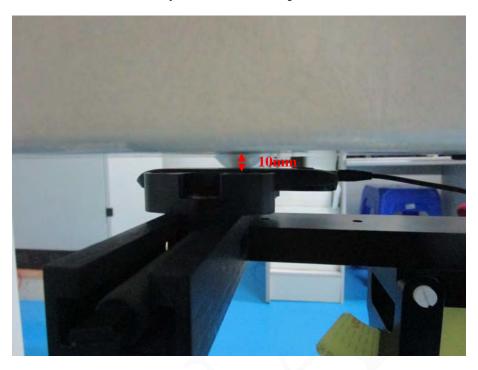

**Body-worn Bottom Setup Photo** 




SAR Evaluation Report 62 of 66

# **Body-worn Top Setup Photo**




SAR Evaluation Report 63 of 66

# **Left Head Touch Setup Photo**

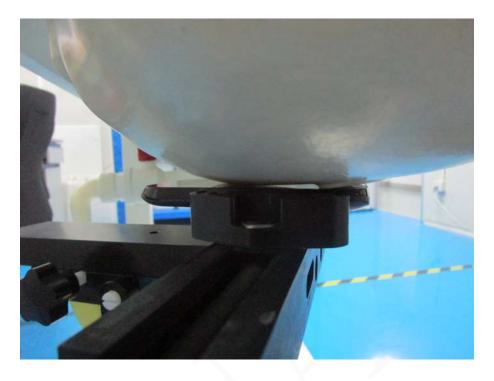


**Left Head Tilt Setup Photo** 

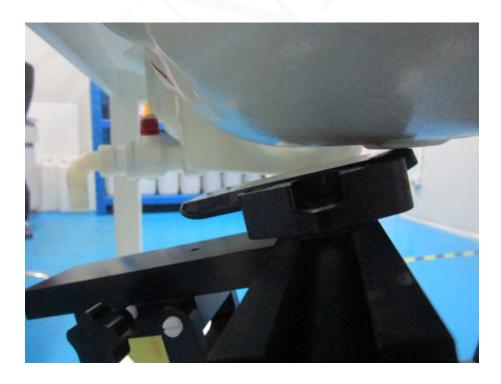

SAR Evaluation Report 64 of 66

**Right Head Touch Setup Photo** 

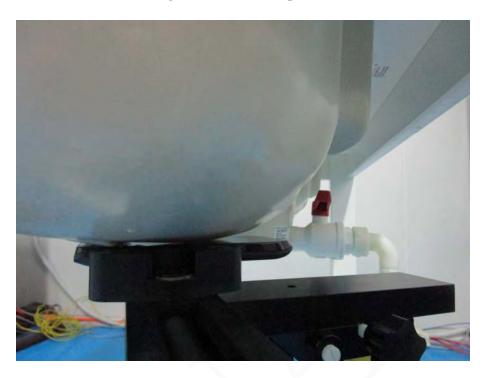

**Right Head Tilt Setup Photo** 



SAR Evaluation Report 65 of 66

# APPENDIX D CALIBRATION CERTIFICATES

Please Refer to the Attachment.

\*\*\*\*\* END OF REPORT \*\*\*\*\*

Report No: RDG160316008-20

SAR Evaluation Report 66 of 66