


**FCC ID: 2AHDLNGCR
Model No. VR10S-MF**

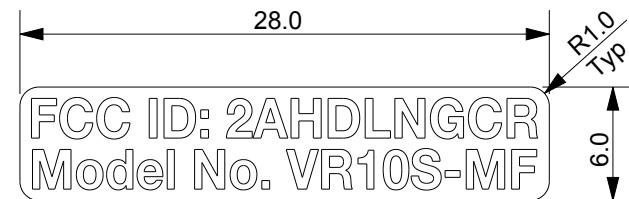

Text: Black
Background: Clear


Material: Avery 500 Event Film Gloss
Description:
Facefilm: 70 micron, monomerically plasticised vinyl
Adhesive: permanent, acrylic based
Backing paper: one sided coated bleached kraft paper, 125 g/m sq.

Note: The Label is required to be applied permanently to a Zinc casting with a Satin Chrome Finish. The text will remain legible for the lifetime of the product.

TITLE:	Label FCC ID VR10S-MF		PROJ:		DIMS: mm
PART No.:	440-00049	REVISION:	2.1		
DRAWN:	B. Dolan	DATE:	03.10.17		
PRO-E FILE	LABEL_FCC_VR10S_MF				

VANDERBILT

FCC ID: 2AHDLNGCR
Model No. VR40S-MF

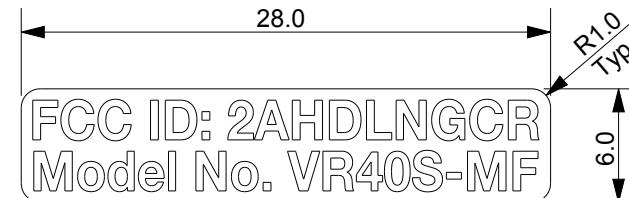

Text: Black
Background: Clear


Material: Avery 500 Event Film Gloss
Description:
Facefilm: 70 micron, monomerically plasticised vinyl
Adhesive: permanent, acrylic based
Backing paper: one sided coated bleached kraft paper, 125 g/m sq.

Note: The Label is required to be applied permanently to a Zinc casting with a Satin Chrome Finish. The text will remain legible for the lifetime of the product.

TITLE:	Label FCC ID VR40S-MF		PROJ:		DIMS: mm
PART No.:	440-00051	REVISION:	2.1		
DRAWN:	B. Dolan	DATE:	03.10.17		
PRO-E FILE	LABEL_FCC_VR40S_MF				

VANDERBILT

**FCC ID: 2AHDLNGCR
Model No. AR10S-MF**

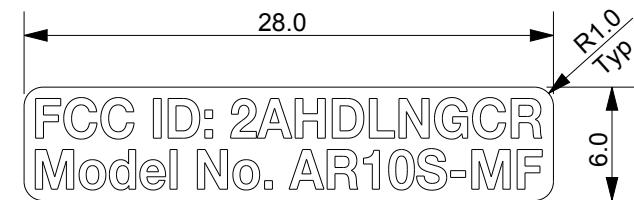

Text: Black
Background: Clear

Material: Avery 500 Event Film Gloss

Description:

Facefilm: 70 micron, monomerically plasticised vinyl

Adhesive: permanent, acrylic based


Backing paper: one sided coated bleached kraft paper, 125 g/m sq.

Note: The Label is required to be applied permanently to a Zinc casting with a Satin Chrome Finish. The text will remain legible for the lifetime of the product.

TITLE:	Label FCC ID AR10S-MF		PROJ:		DIMS: mm
PART No.:	440-00050	REVISION:	2.1		
DRAWN:	B. Dolan	DATE:	03.10.17		
PRO-E FILE	LABEL_FCC_AR10S_MF				

VANDERBILT

FCC ID: 2AHDLNGCR
Model No. AR40S-MF

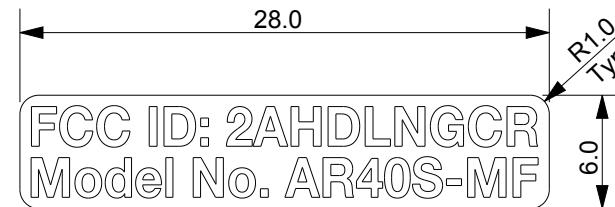

Text: Black
Background: Clear

Material: Avery 500 Event Film Gloss
Description:
Facefilm: 70 micron, monomerically plasticised vinyl
Adhesive: permanent, acrylic based
Backing paper: one sided coated bleached kraft paper, 125 g/m sq.

Note: The Label is required to be applied permanently to a Zinc casting with a Satin Chrome Finish. The text will remain legible for the lifetime of the product.

TITLE: Label FCC ID AR40S-MF		PROJ: 	DIMS: mm
PART No.:	440-00052	REVISION:	2.1
DRAWN:	B. Dolan	DATE:	03.10.17
PRO-E FILE LABEL_FCC_AR40S_MF			VANDERBILT