



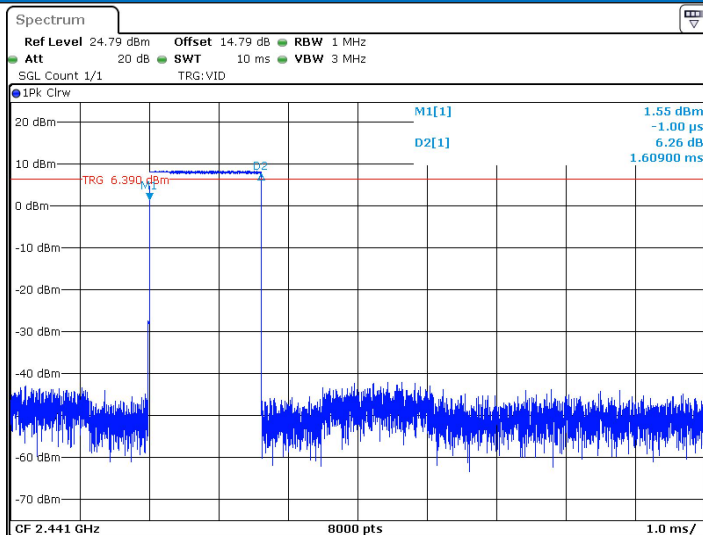


Date: 9 JAN 2025 14:12:00

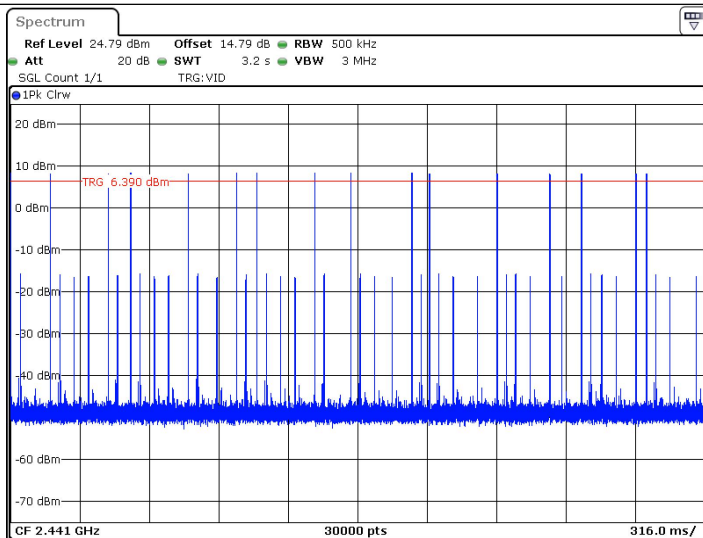


Date: 9 JAN 2025 14:12:05

DH5_Ant1_Hop

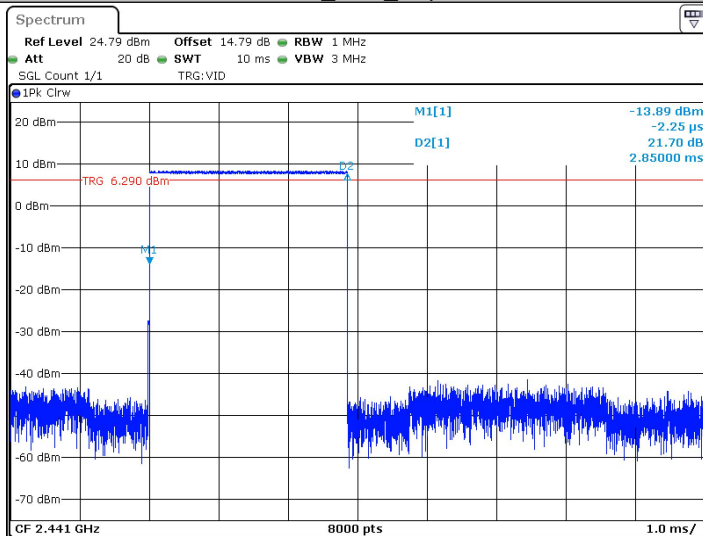


Date: 9 JAN 2025 14:06:31

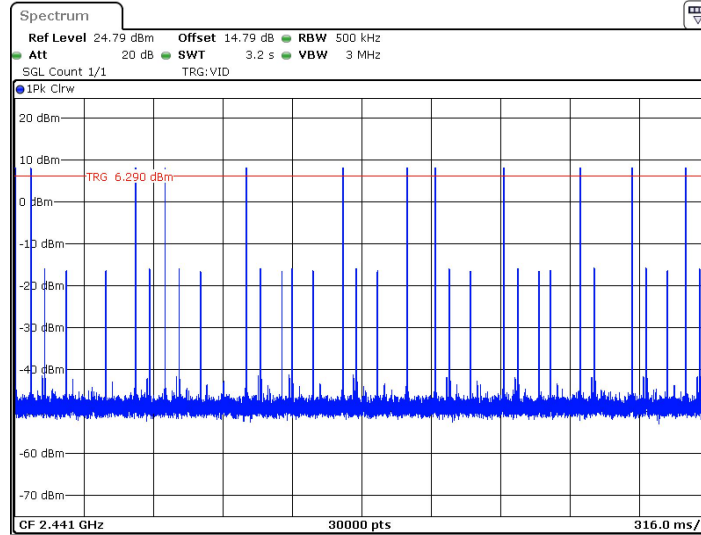


Date: 9 JAN 2025 14:06:37

2DH1_Ant1_Hop

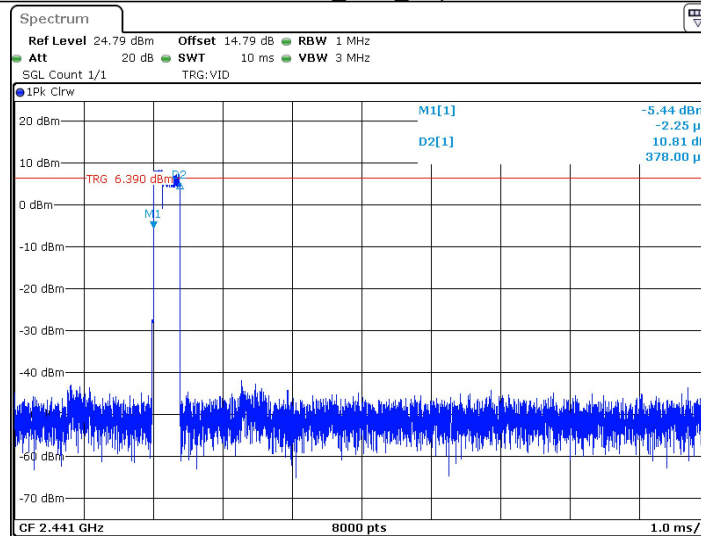


Date: 9 JAN 2025 14:26:35

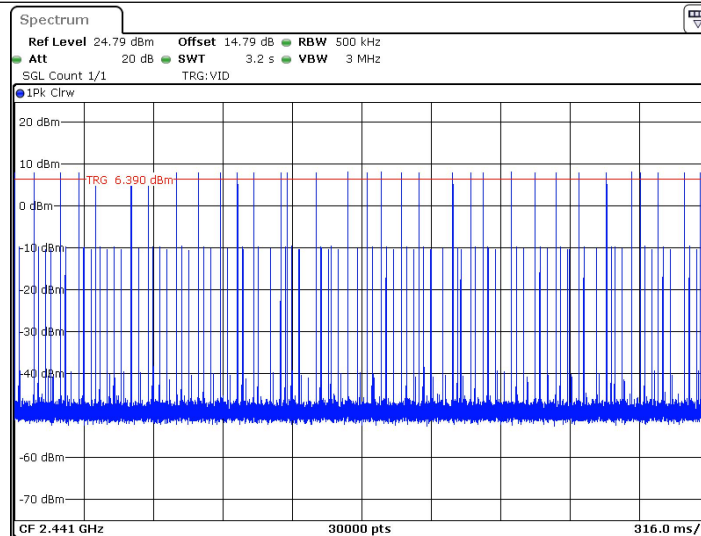


Date: 9 JAN 2025 14:26:40

2DH3_Ant1_Hop

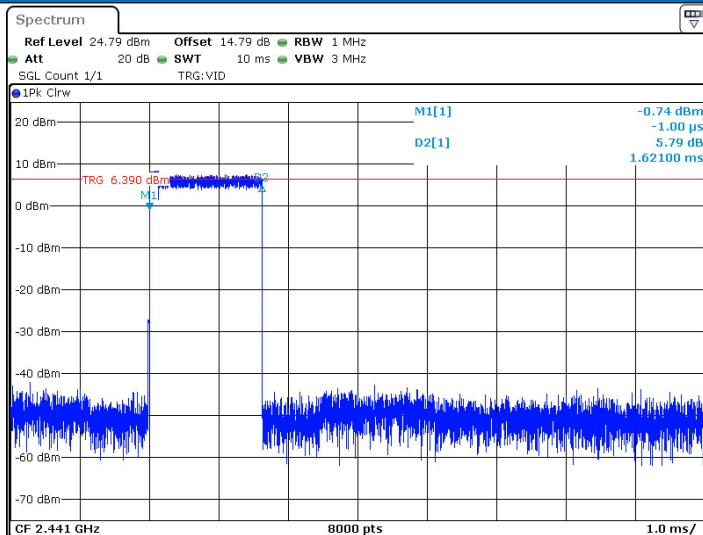


Date: 9 JAN 2025 14:27:13

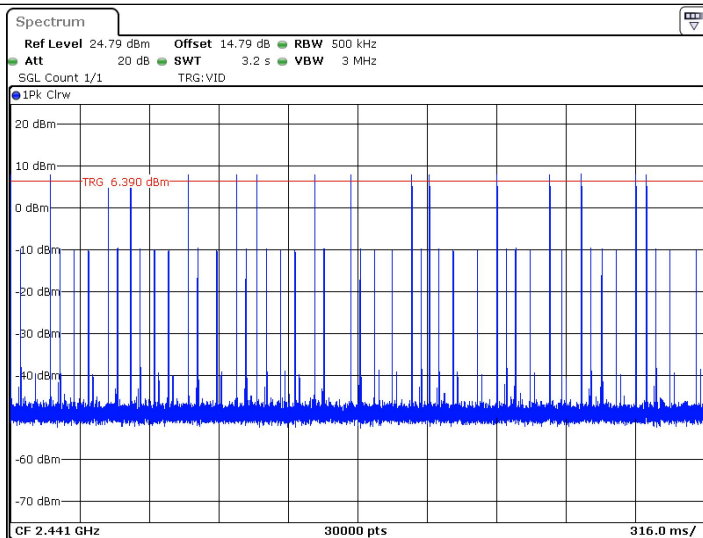


Date: 9 JAN 2025 14:27:19

2DH5_Ant1_Hop

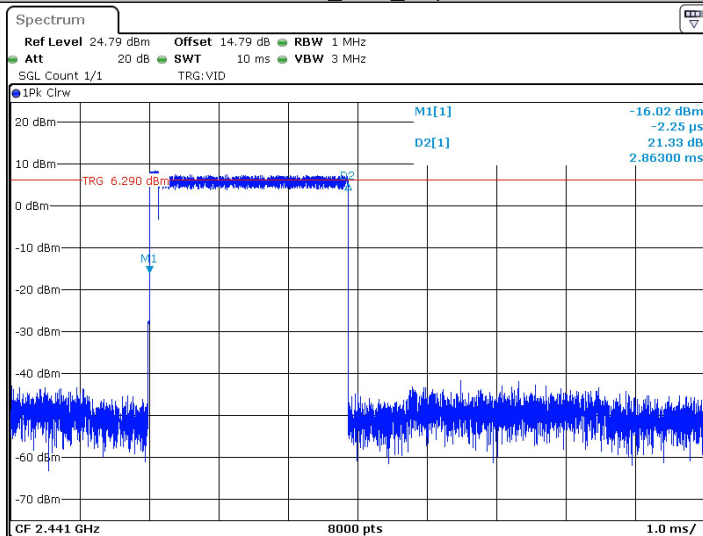


Date: 9 JAN 2025 14:22:25

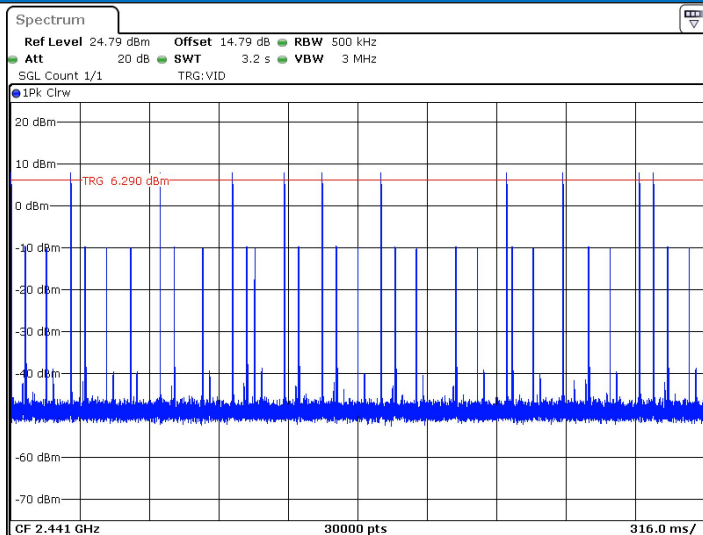


Date: 9 JAN 2025 14:22:30

3DH1_Ant1_Hop

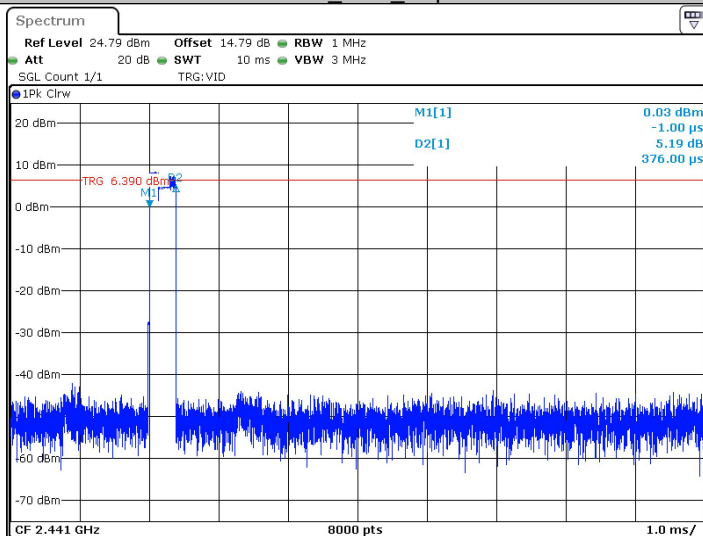


Date: 9 JAN 2025 14:46:47

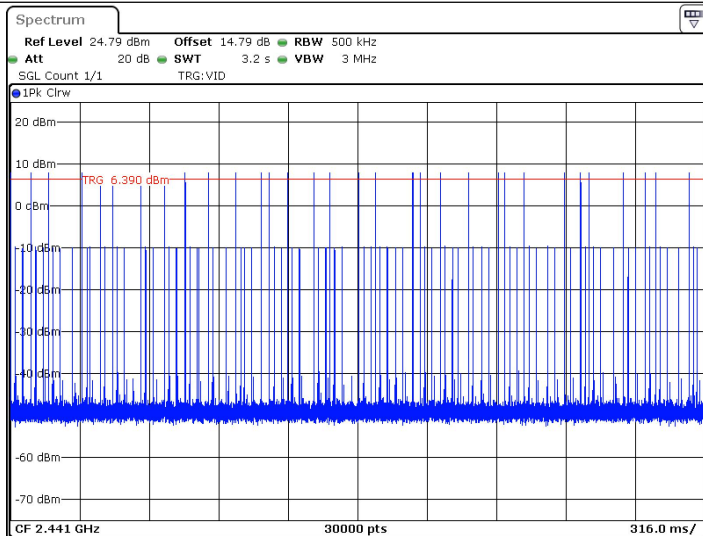


Date: 9 JAN 2025 14:46:53

3DH3_Ant1_Hop

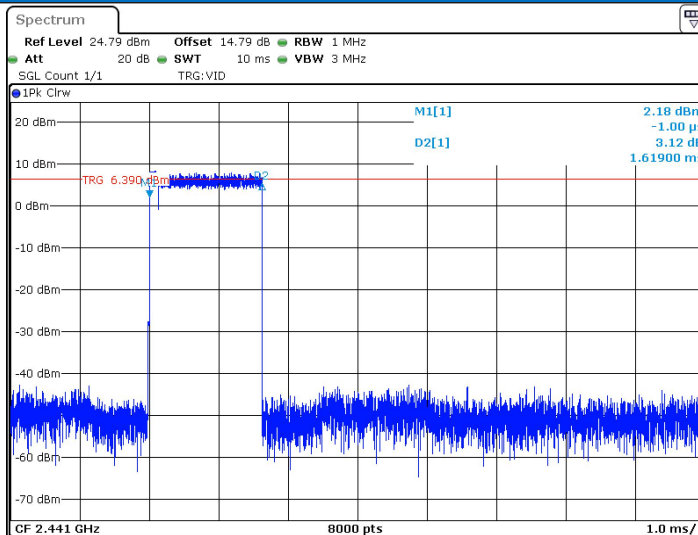


Date: 9 JAN 2025 14:47:19

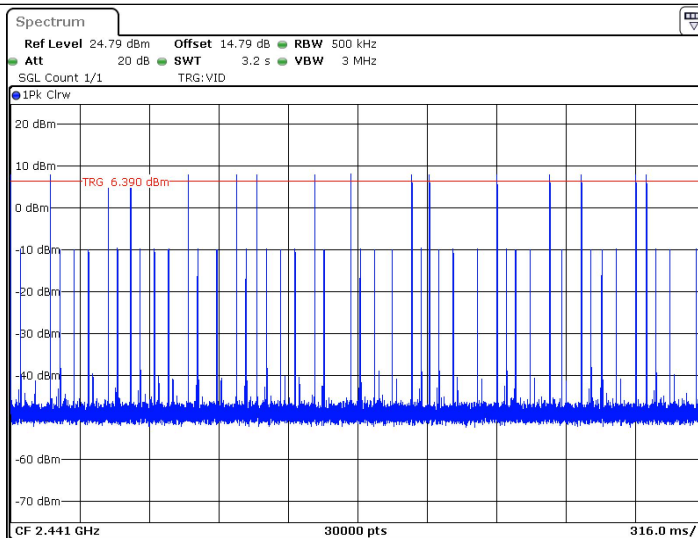


Date: 9 JAN 2025 14:47:24

3DH5_Ant1_Hop

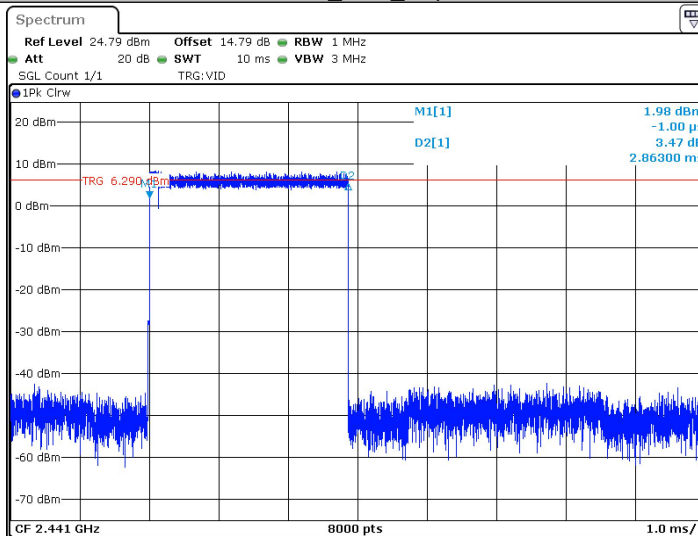


Date: 9 JAN 2025 14:41:43

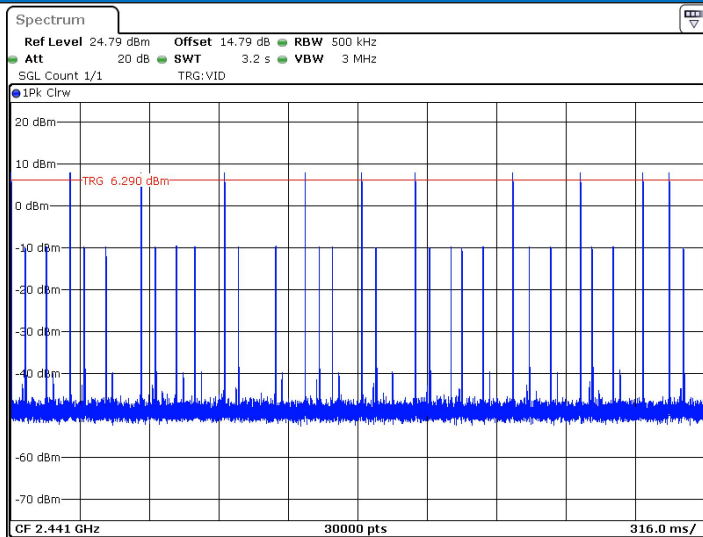

Date: 9 JAN 2025 14:41:49


4.8 Band-edge for RF Conducted Emissions

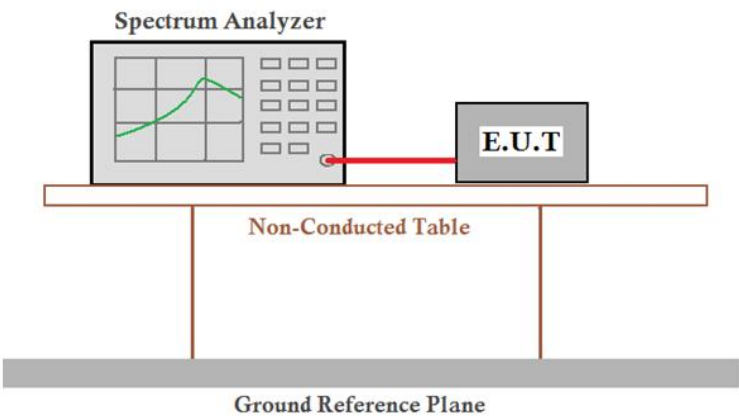
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 <i>Remark: Offset=cable loss+ attenuation factor.</i>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data

TestMode	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Low	2402	8.38	-47.86	≤ -11.62	PASS
	High	2480	8.29	-50.53	≤ -11.71	PASS
	Low	Hop_2402	7.26	-50.25	≤ -12.74	PASS
	High	Hop_2480	7.81	-51.38	≤ -12.19	PASS
2DH5	Low	2402	6.94	-47.47	≤ -13.06	PASS
	High	2480	7.62	-51.73	≤ -12.38	PASS
	Low	Hop_2402	5.72	-50.03	≤ -14.28	PASS
	High	Hop_2480	7.45	-51.72	≤ -12.55	PASS
3DH5	Low	2402	8.22	-46.98	≤ -11.78	PASS
	High	2480	8.32	-51.82	≤ -11.68	PASS
	Low	Hop_2402	6.67	-47.93	≤ -13.33	PASS
	High	Hop_2480	7.19	-51.23	≤ -12.81	PASS


Test plot as follows:

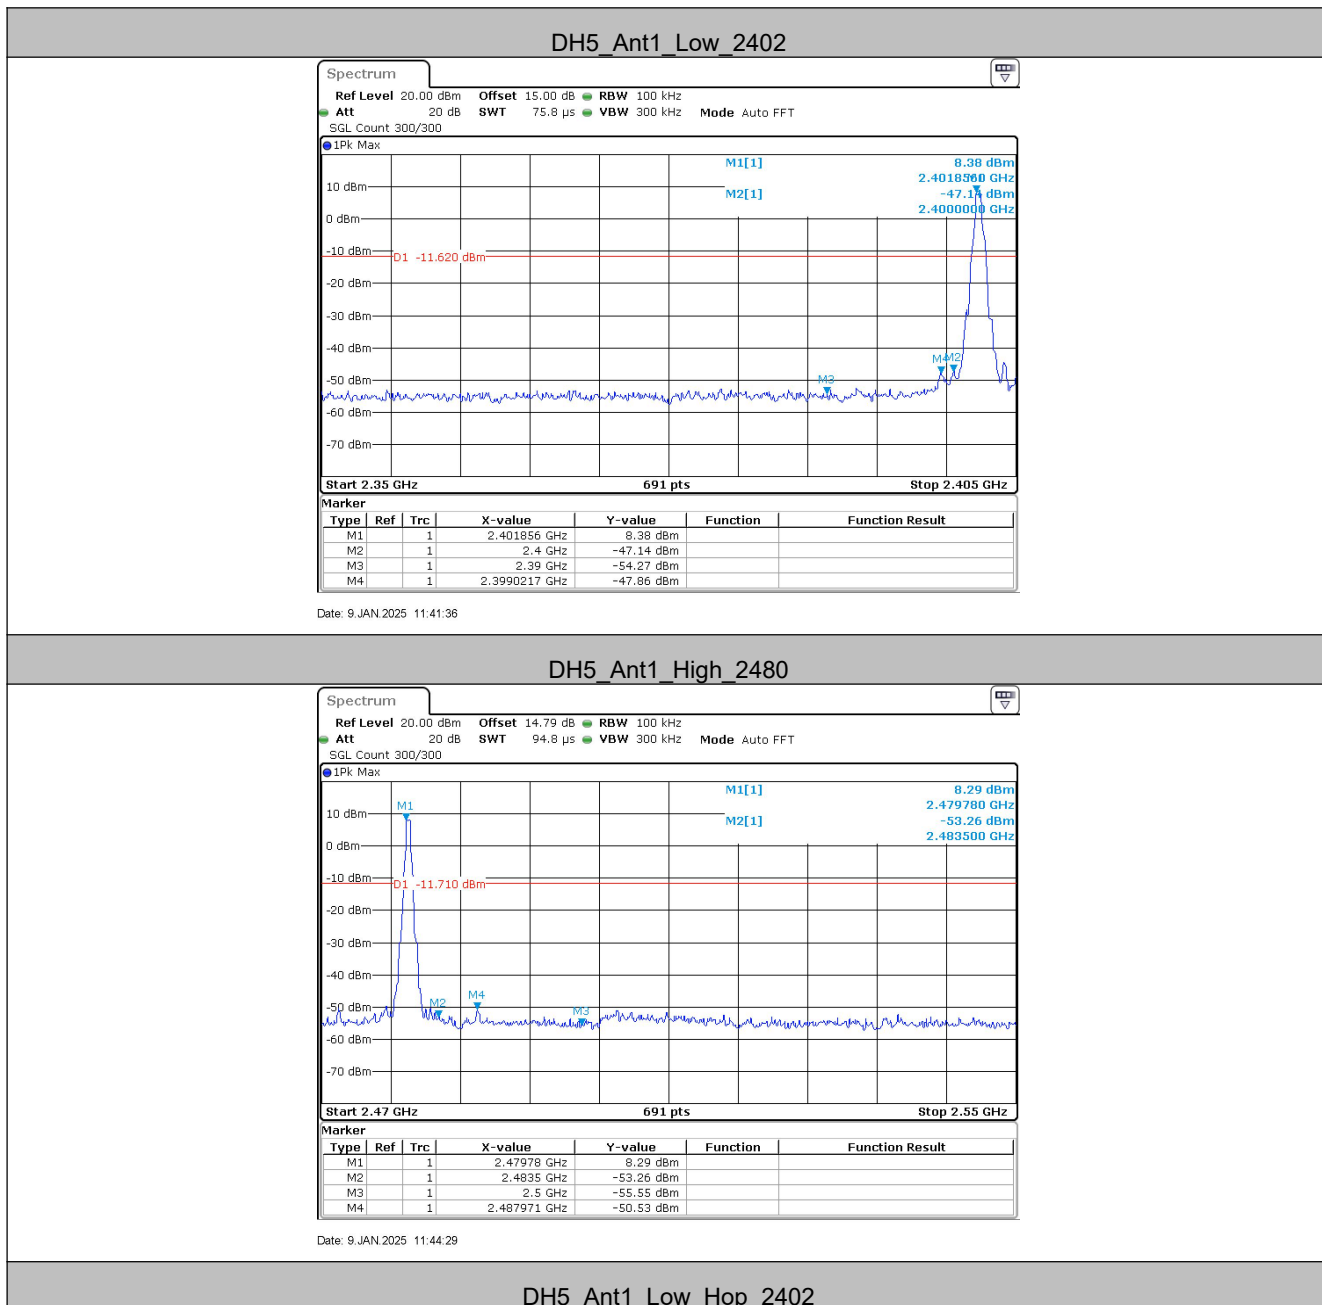

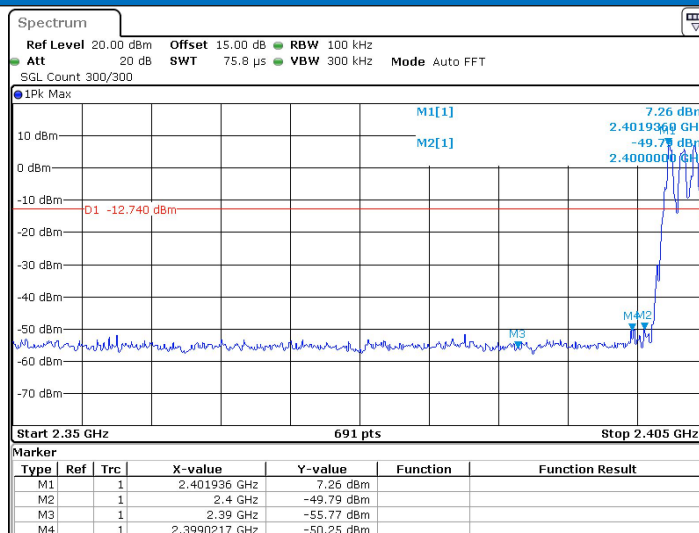


Date: 9 JAN 2025 14:01:59

DH5_Ant1_High_Hop_2480

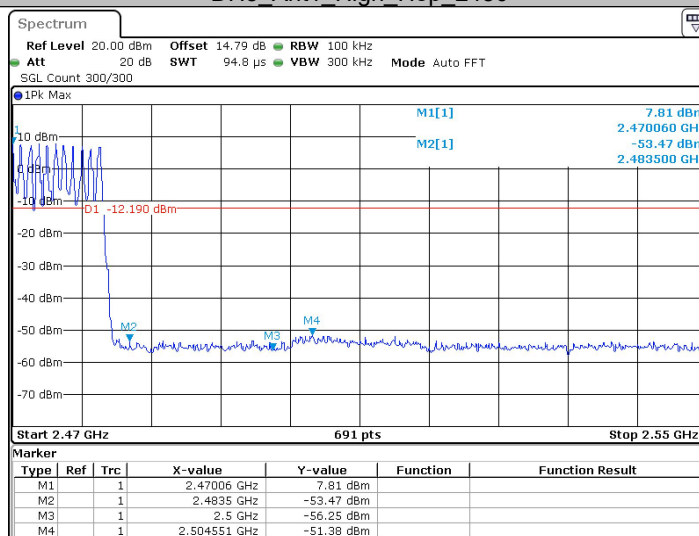


Date: 9 JAN 2025 14:13:39

2DH5_Ant1_Low_2402

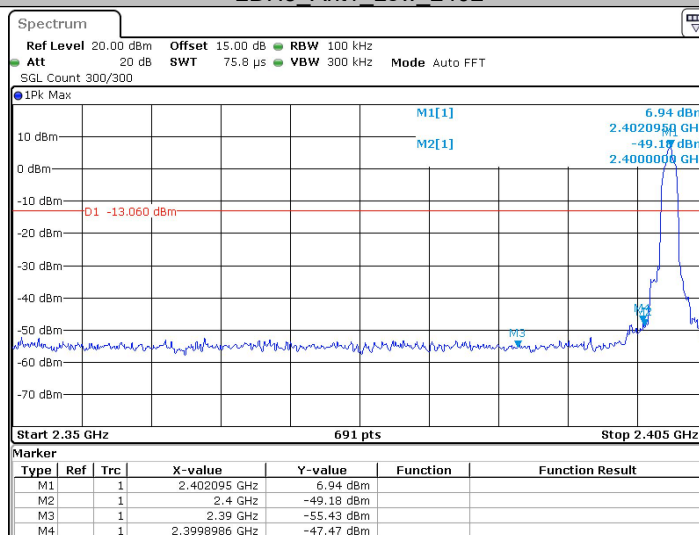


Date: 9 JAN 2025 11:48:06

2DH5_Ant1_High_2480

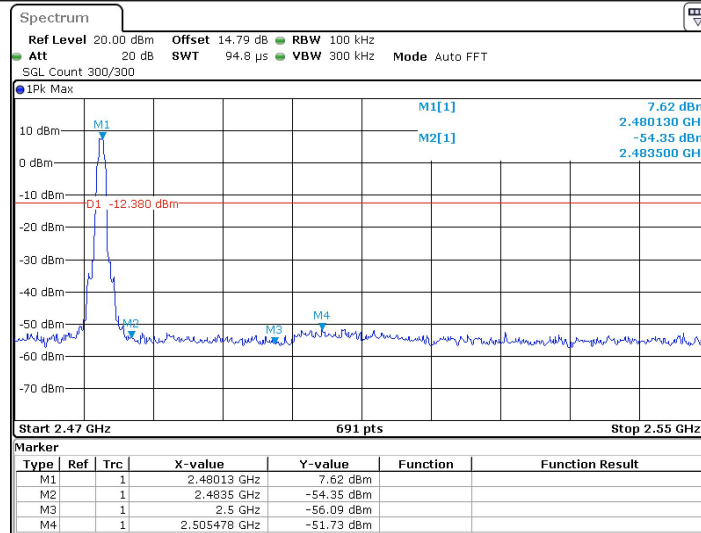


Date: 9 JAN 2025 12:01:18

2DH5_Ant1_Low_Hop_2402

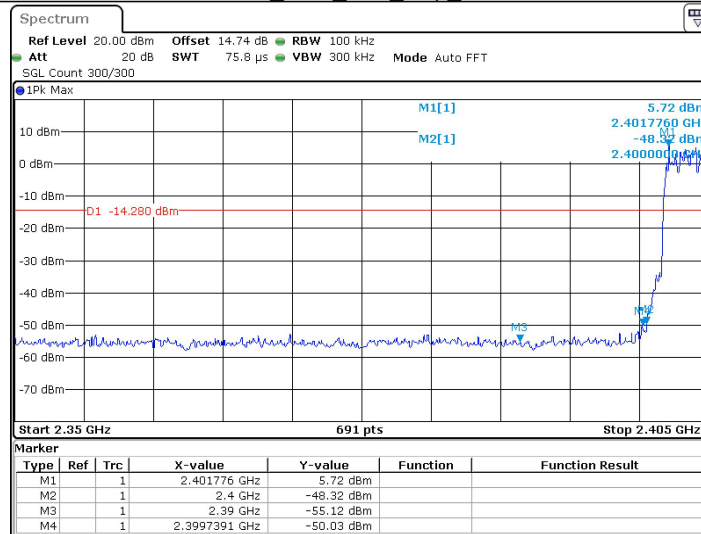


Date: 13 JAN 2025 16:48:39

2DH5_Ant1_High_Hop_2480

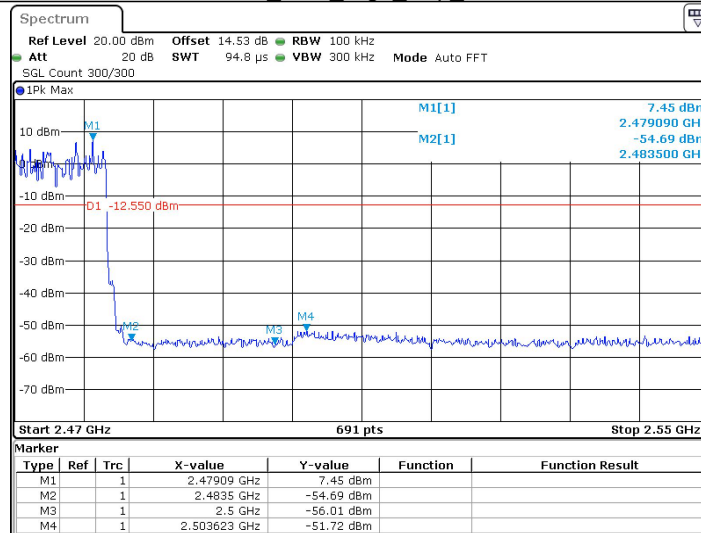


Date: 13 JAN 2025 16:46:21

3DH5_Ant1_Low_2402

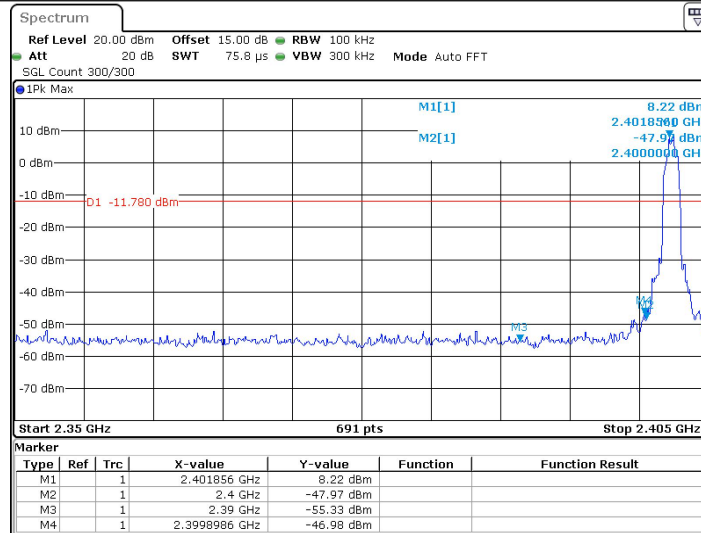


Date: 9 JAN 2025 12:10:11

3DH5_Ant1_High_2480

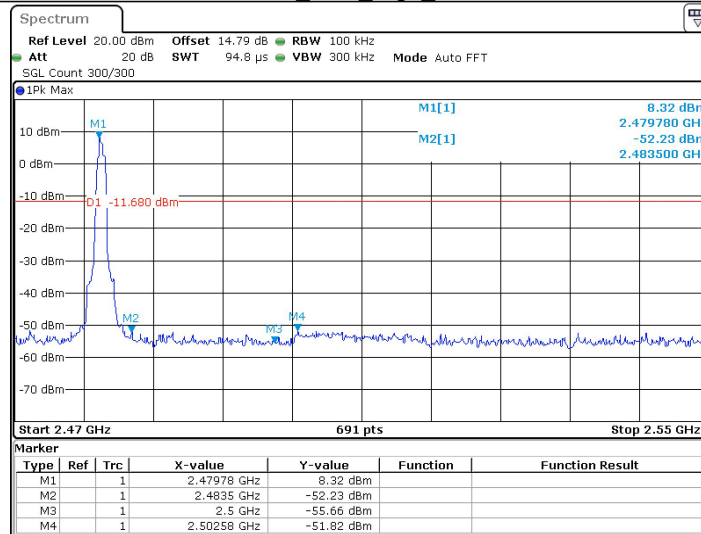


Date: 9 JAN 2025 14:00:13

3DH5_Ant1_Low_Hop_2402

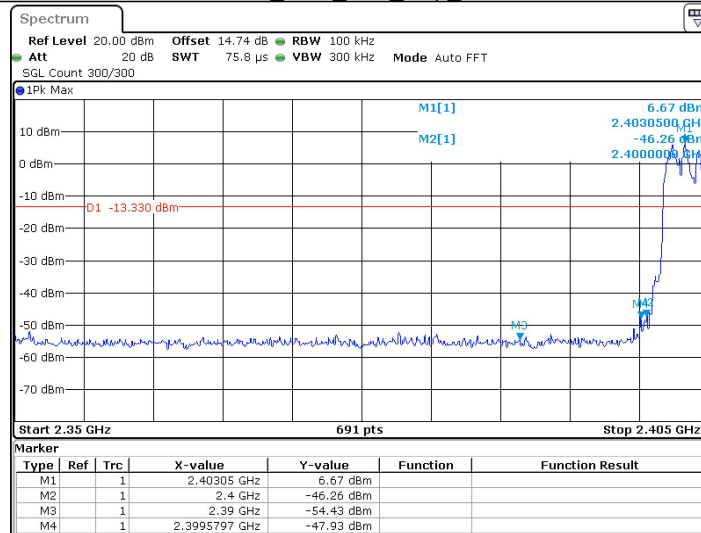


Date: 13 JAN 2025 16:48:10

3DH5_Ant1_High_Hop_2480

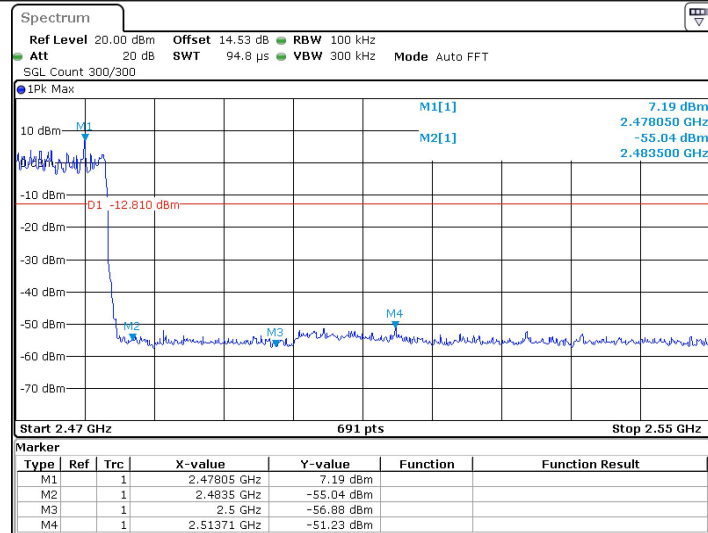

Date: 13. JAN 2025 16:47:02

4.9 Spurious RF Conducted Emissions

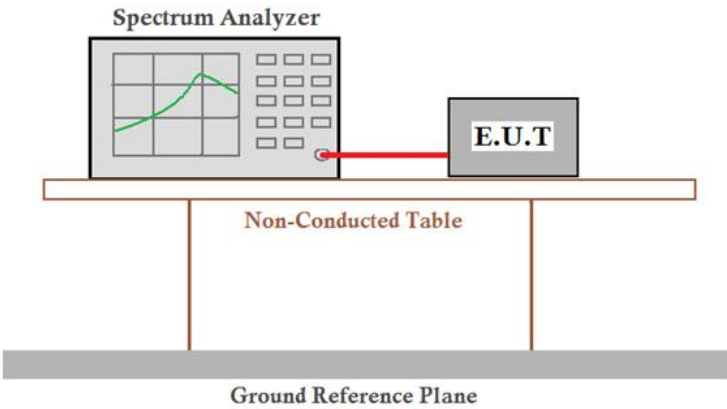Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=cable loss+ attenuation factor.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Pass