

Appendix B

BLE

Test Laboratory: TOWE Lab

Measurement Report for Bright, FRONT, ISM 2.4 GHz Band, Bluetooth Low Energy, Channel 19 (2440.000 MHz)

Device Under Test Properties

Model	Dimensions [mm]
Bright	48.0 x 42.0 x 12.5

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 10.00	ISM 2.4 GHz Band	Bluetooth, 10670-AAA	2440.000, 19	1.77	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-24, 17:16	2025-03-24, 17:27
psSAR1g [W/Kg]	0.014	0.013
psSAR10g [W/Kg]	0.008	0.007
Power Drift [dB]	0.02	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.8
Dist 3dB Peak [mm]		12.7

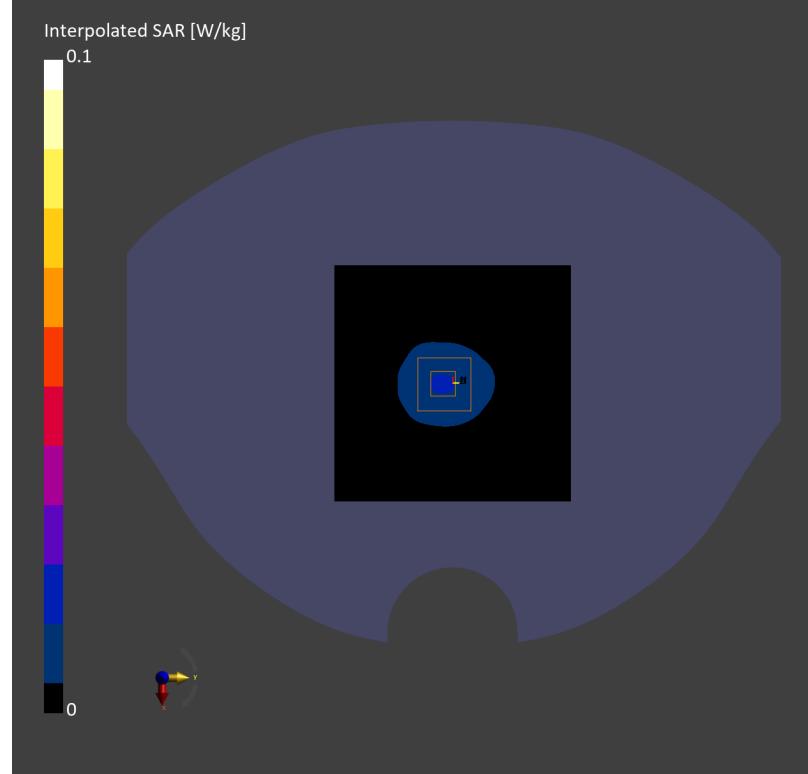

Test Laboratory: TOWE Lab

Measurement Report for Bright, BACK, ISM 2.4 GHz Band, Bluetooth Low Energy, Channel 39 (2480.000 MHz)

Device Under Test Properties

Model	Dimensions [mm]
Bright	48.0 x 42.0 x 12.5

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	ISM 2.4 GHz Band	Bluetooth, 10670-AAA	2480.000, 39	1.81	38.5

Hardware Setup

Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-24, 16:07	2025-03-24, 16:13
psSAR1g [W/Kg]	0.076	0.073
psSAR10g [W/Kg]	0.032	0.028
Power Drift [dB]	-0.09	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		42.3
Dist 3dB Peak [mm]		8.6

