

acknowledgement

product description:

Manufacturer: Shenzhen Yusheng Communication Equipment Co., LTD

Material Name: BT-FPC

Material Code: R:a

version number:

Project model: DR03

Specifications / Colors:

Date of signature:

Note: (This cover requires supplier seal)

appendix:

☐ Electrical and mechanical performance description (specifications)

☐ manufacturing flow chart

☐ CPK Report the

☐ full-size measurement report

☐ List of raw materials / RoHS Report / HF / REACH

☐ QC engineering drawing

☐ sample

☐ Reliability test report

☐ Packaging mode

(Everything needs to be provided)

Add: 407-411, Floor 4, Building 2, Yuntai Chuanggu Park, southeast of the intersection of Guangming Avenue and Dongchang Road, Guangming District, Shenzhen

Approval:

	department	Confirm content				Confirm the results	Valfirm person / date
Technical confirmation field	Supplier quality	☐ RoHS material ☐ Non-RoHS materials	☐ Compliance with the REACH requirements	☐ Meet the halogen-free requirements	☐ Other environmental protection requirements		
	Design department ID:	☐ Customer request ID	☐ color confirmation	☐ Surface process validation	☐ Shell, hardware, key material		
	construction engineer	☐ 2D drawing file dimensional confirmation ☐ Specification and technical requirements	☐ Focus on controlling the dimension labeling ☐ electrical performance parameters	☐ adaptation validation ☐ function	☐ Shell, hardware, key material ☐ effect		
	hardware engineer	☐ 2D drawing file dimensional confirmation ☐ Specification and technical requirements	☐ Focus on controlling the dimension labeling ☐ electrical performance parameters	☐ adaptation validation ☐ function	☐ Shell, hardware, key material ☐ effect		
	Research and development quality:	☐ Test criteria confirm the appearance	☐ Normative dimension labeling (key ruler cun)	☐ reliability verification ☐ adaptation validation	☐ Function ☐ effect		

Final Confirmation of the Project Manager:

☐ Acknowledge the integrity of the documents	☐ Specification and technical requirements	☐ Electrical performance parameters	☐ function	☐ effect
☐ Normalization of dimensions (key dimensions)	☐ appearance			

Conditions of recognition: ☐ formal recognition

☐ limited recognition

☐ disallow

Distribution department: ☐ IQC ☐ supplier ☐ customer ☐ after-sales ☐ SQE / text control

☐ other_____

QF -QMP -QA 01-01

catalogue

1. OVERVIEW	4
1.1 SCOPE OF APPLICATION	4
2. TECHNICAL INDEX REQUIREMENTS	4
2.1 INTRODUCTION OF TEST ITEMS AND EQUIPMENT	4
2.2 ACTIVE REPORTING	4
2.2.1 TEST INSTRUCTIONS	4
2.2.2 ANTENNA S11 PASSIVE PARAMETERS	5
2.2.3 BT ANTENNA PASSIVE PARAMETER -FS	5
2.2.4 BT ANTENNA PASSIVE PARAMETERS -ARM	6
2.2.5 ANTENNA PATTERN -BT	6
2.2.6 ANTENNA PLAN -BT-ARM	7
2.2.7 ANTENNA LOADING COIL	7
2.2.8 ANTENNA TEST ENVIRONMENT	8
3. ENGINEERING DRAWING FILE	9
4. BILL OF MATERIAL	10
5. PACKAGING INFORMATION	11

1. Overview

1.1 Scope of application

This requirement specifies the antenna technical requirements and material requirements specifications for DR03 products.

This requirement applies to the selection, testing and acceptance of DR03 antennas.

2. Technical index requirements

2.1 Introduction of test items and equipment

inventory	test item	equipment
S11 parameter	Standing wave ratio, echo loss	network analyzer
Active test	TRP,TIS	Integrated tester, microwave darkroom
Passive test	Gain, efficiency	network analyzer

2.2 Active Reporting

2.2.1 Test instructions


Test tools: Agilent8960 instrument, R & SCMW500, full wave far field ETS dark room, high precision positioning system and its controller and computer with automatic test program

Test environment: temperature $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$, humidity $50\% \pm 15\%$

Test method: DUT is fixed in the center of the turntable with H plane, on the same horizontal line as the center of the horn antenna.

The positioning system enables the DUT to rotate in the whole sphere to satisfy the high-precision 3 D positioning. Each RF instrument and turntable controller communicate with PC with automatic test software through GPIB interface.

2.2.2 Antenna S11 passive parameters

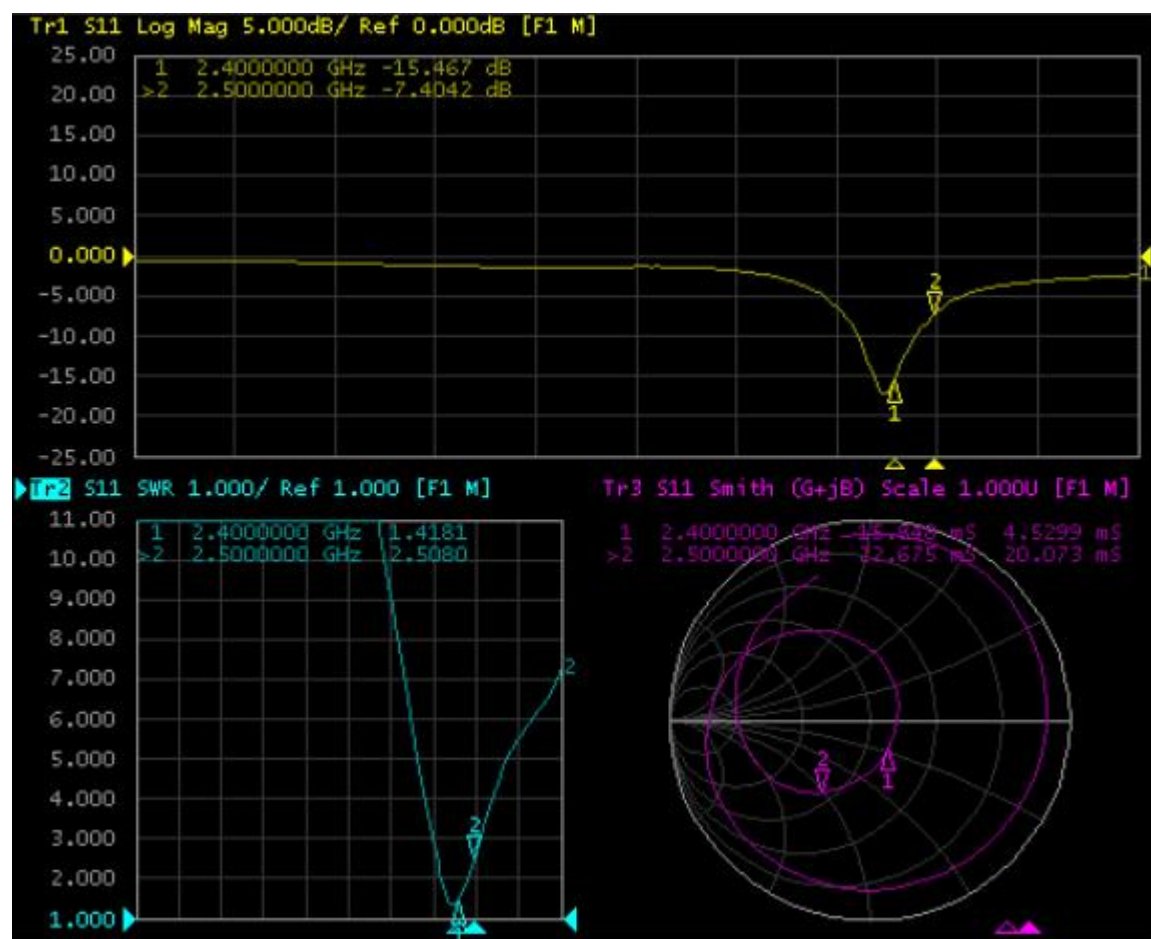

2.2.3 BT antenna Passive parameter -FS


Test	Free-space								
Test Point ID	1	2	3	4	5	6	7	8	9
Freq.(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480
Efficiency (%)	20.5	20.8	21.5	21.7	22.6	22.8	22.3	21.7	21.4
productiveness (dB)	-6.88	-6.82	-6.68	-6.64	-6.46	-6.52	-6.64	-6.70	-6.51
gain (dBi)	-3.45	-3.32	-3.22	-2.88	-2.72	-2.73	-2.52	-2.74	-2.98

2.2.4 BT antenna Passive parameters -ARM


Test	ARM								
Test Point ID	1	2	3	4	5	6	7	8	9
Freq. (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480
Efficiency (%)	8.5	8.8	9.3	9.7	10.3	10.6	10.1	9.5	8.8
productiveness (dB)	-10.71	-10.56	-10.32	-10.13	-9.87	-9.75	-9.96	-10.22	-10.56
gain (dBi)	-5.94	-5.73	-5.71	-5.65	-5.56	-5.54	-5.77	-5.74	-5.87

2.2.5 Antenna pattern -BT

FS



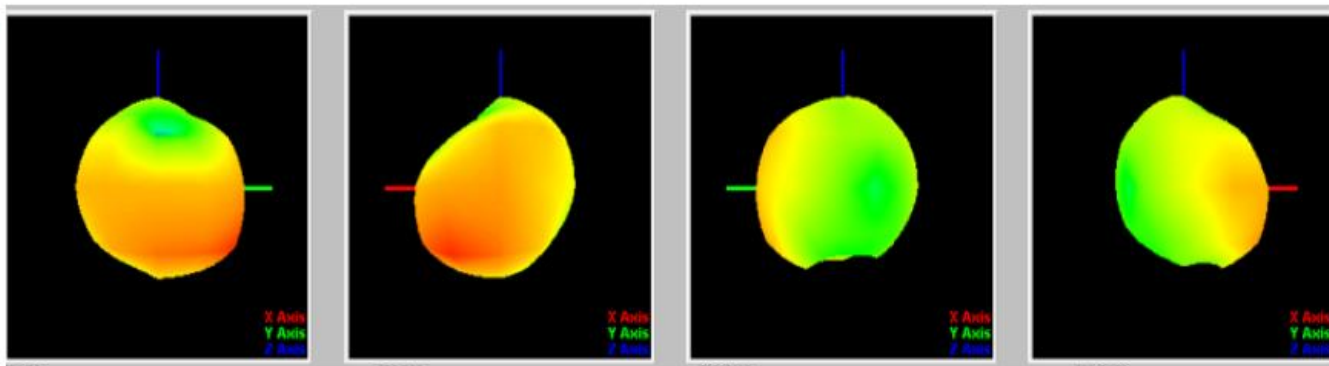


ARM



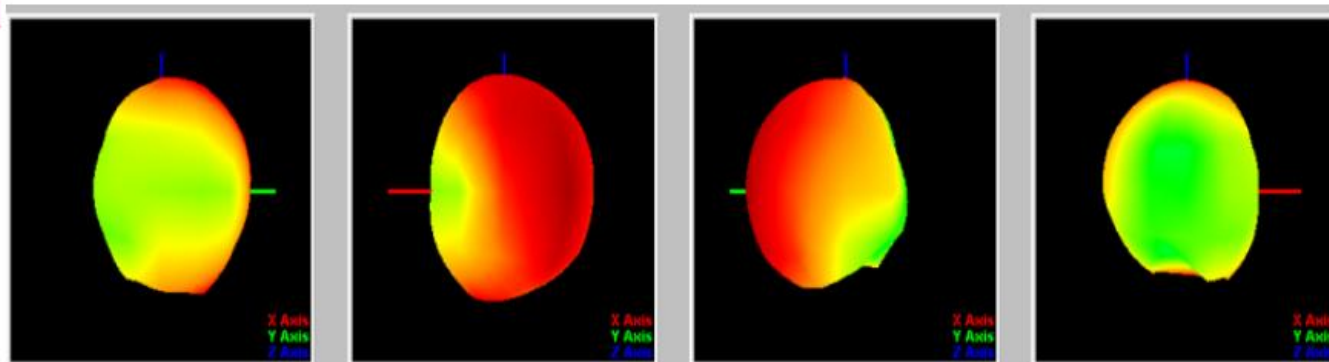


2.2.6 Antenna plan -BT-ARM


FS

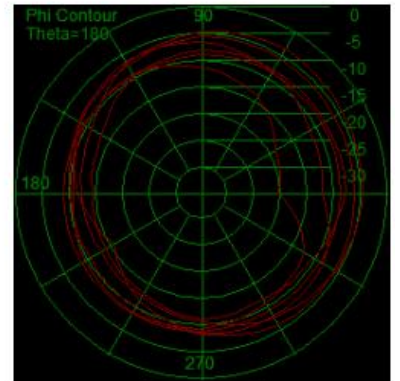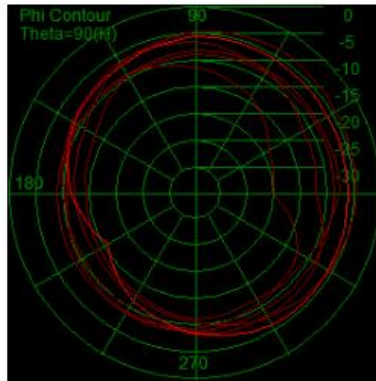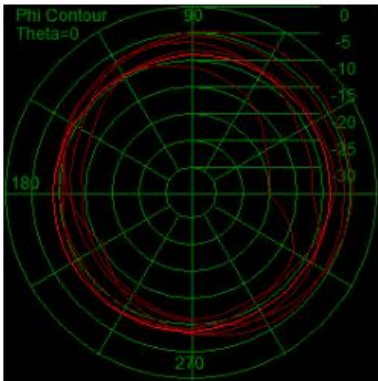


ARM

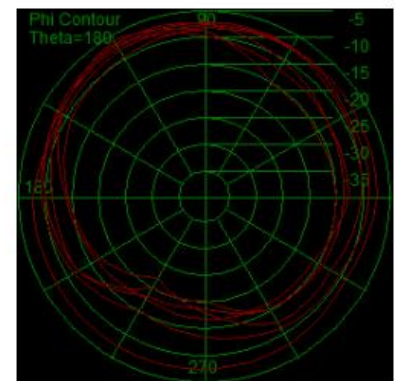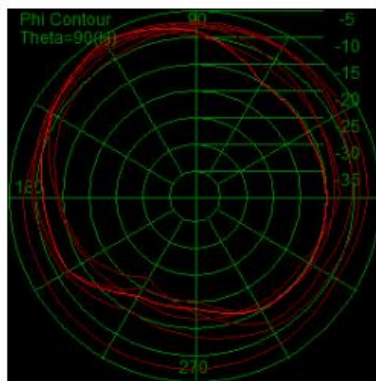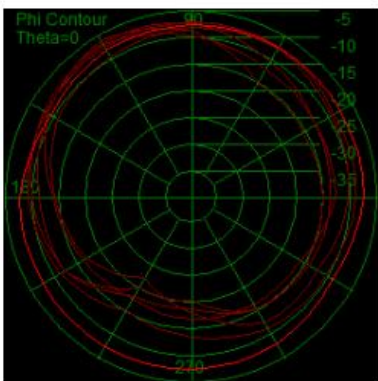

2.2.7 antenna loading coil

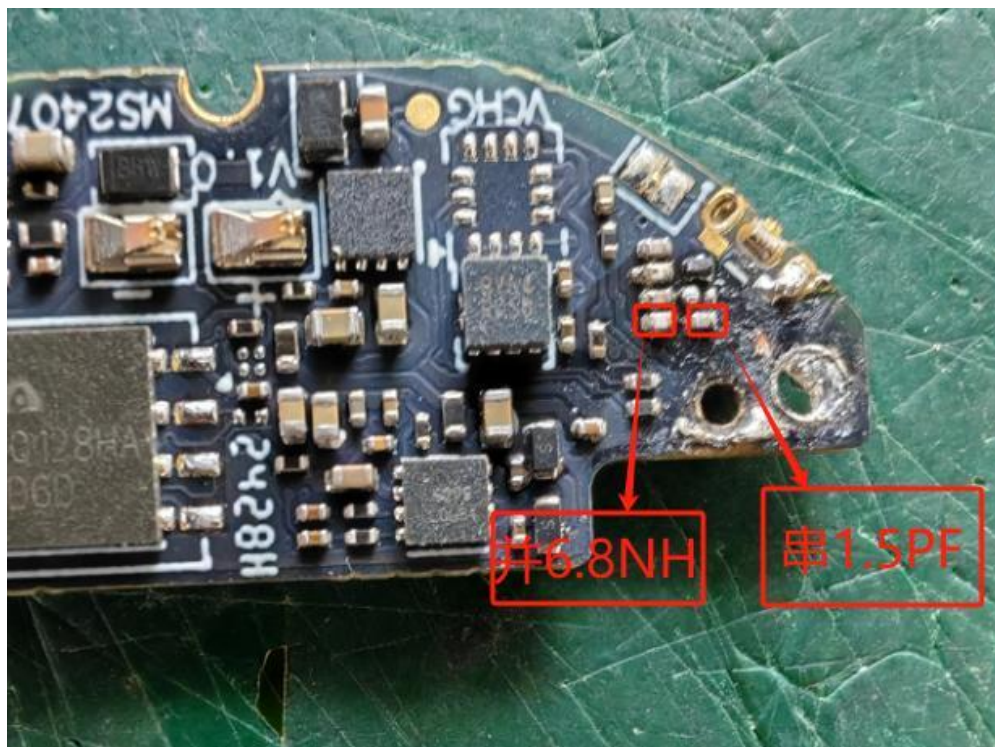


2.2.8 Antenna test environment

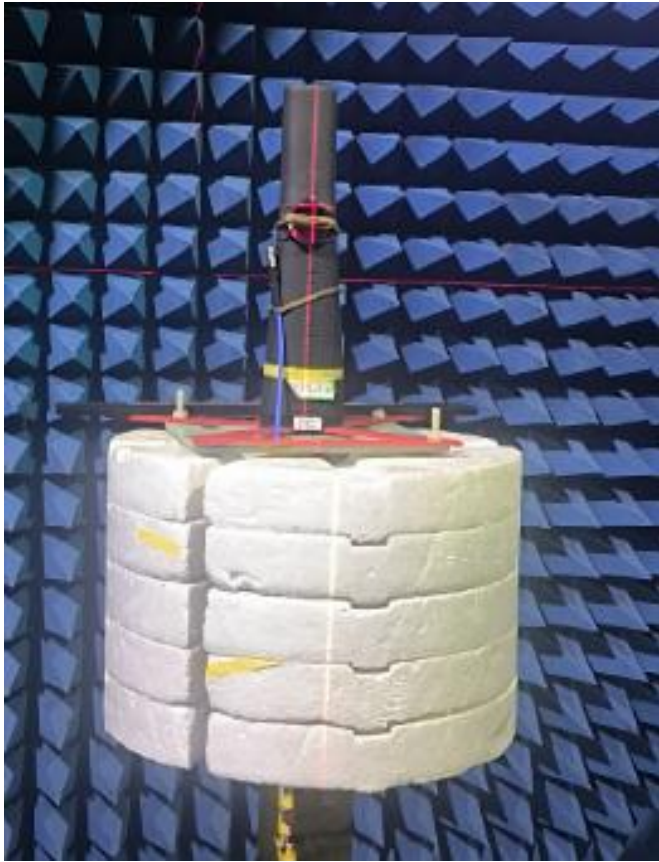

3.Engineering drawing file

A						
B	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"> skill's requirement: </td> <td style="width: 50%;"> PI substrate: 0.5mm Electrolytic copper: 0.5oz (35) Double-sided tape: 3M-4711S Nickel plated: 38um Gildes: 0.025um Surface ink color: Black matt Printing font color: Bright White Printing font height: According to drawings </td> </tr> </table>				skill's requirement:	PI substrate: 0.5mm Electrolytic copper: 0.5oz (35) Double-sided tape: 3M-4711S Nickel plated: 38um Gildes: 0.025um Surface ink color: Black matt Printing font color: Bright White Printing font height: According to drawings
skill's requirement:	PI substrate: 0.5mm Electrolytic copper: 0.5oz (35) Double-sided tape: 3M-4711S Nickel plated: 38um Gildes: 0.025um Surface ink color: Black matt Printing font color: Bright White Printing font height: According to drawings					
C	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"> 4.Reliability requirements: </td> <td style="width: 50%;"> 1. Reliability test: salt spray test/rodder friction test/alkali resistance test/100 grid test. 2. The front ink, the surface of the ink is required to be folded in half without cracking, scratching, etc. </td> </tr> </table>				4.Reliability requirements:	1. Reliability test: salt spray test/rodder friction test/alkali resistance test/100 grid test. 2. The front ink, the surface of the ink is required to be folded in half without cracking, scratching, etc.
4.Reliability requirements:	1. Reliability test: salt spray test/rodder friction test/alkali resistance test/100 grid test. 2. The front ink, the surface of the ink is required to be folded in half without cracking, scratching, etc.					
D	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"> 5.Tolerance requirements: </td> <td style="width: 50%;"> 1. Shape tolerance ± 0.15; 2. Copper foil circuit tolerance ± 0.05; 3. The position of the copper foil to the shape is ± 0.15; 4. Hole-to-hole position tolerance ± 0.10; hole-to-shape position tolerance ± 0.15; 5. The size tolerance of gold finger is ± 0.20; 6. For other unnamed dimensions, refer to 2D drawings. </td> </tr> </table>				5.Tolerance requirements:	1. Shape tolerance ± 0.15; 2. Copper foil circuit tolerance ± 0.05; 3. The position of the copper foil to the shape is ± 0.15; 4. Hole-to-hole position tolerance ± 0.10; hole-to-shape position tolerance ± 0.15; 5. The size tolerance of gold finger is ± 0.20; 6. For other unnamed dimensions, refer to 2D drawings.
5.Tolerance requirements:	1. Shape tolerance ± 0.15; 2. Copper foil circuit tolerance ± 0.05; 3. The position of the copper foil to the shape is ± 0.15; 4. Hole-to-hole position tolerance ± 0.10; hole-to-shape position tolerance ± 0.15; 5. The size tolerance of gold finger is ± 0.20; 6. For other unnamed dimensions, refer to 2D drawings.					

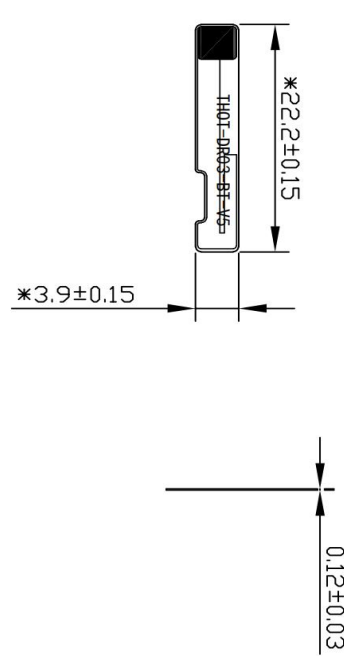

Shenzhen Yu Sheng Communication Equipment Co., Ltd.									
DATE	Model	Name	Part NO	Material quality	Hole surface treatment	Approval	Design	Review	Confirm
20240807	IM03	RF Antenna	338044-1A-1A	Electrolytic copper			MD	BYZ	
							RF	CXH	

1	2	3	4	5	6	7	8
Modify the content	Version	Revise					



Shenzhen Yusheng Communication Equipment Co., LTD

4. Bill Of Material



Shenzhen Yu Sheng communication preparation Co., LTD

063044 (DR03) -BOM

edition: R:A


client: 063

Type of aircraft: 063044

Set a date: 2024/10/24

Ite	*Material code	*Material name	name	*Machine type	Specification and model	colour	*UNIT.	dosage	remark
1	063044-IA-TA	BT-FPC		DR03	FPC electrolytic copper half-on-half pressure film 22.2*3.9*0.12MM	black	PCS	1	
1.1	063044-IA-01-TA	BT-FPC		DR03	FPC electrolytic copper half-on-half pressure film 22.2*3.9*0.12MM	black	PCS	1	
verify: examine: manufacture: BYZ									

5. Packaging information

Packaging method diagram		
product name	FPC antenna	
P / N	063044	
Project model	DR03	
File details	Carton Size 1: 270*260*200MM Carton Size 2: 260*200*200MM Carton Size 3: Depending on the order quantity / volume	
	Boating method	Packaging by order quantity
	Total number of binning	Packaging by order quantity
labeling requirement	Tag Size 1: Universal use 100 * 100mm Tag Size 2: According to customer requirements	
matters need attention		
1. Due to the limitation of order quantity, the packing method of each material is the size of the box according to the total quantity of the order or the physical volume		
2. Storage temperature: room temperature		
3. Preservation conditions: store them in a cool and dry place		