


Test mode:	Transmitting	Horizontal
------------	--------------	------------

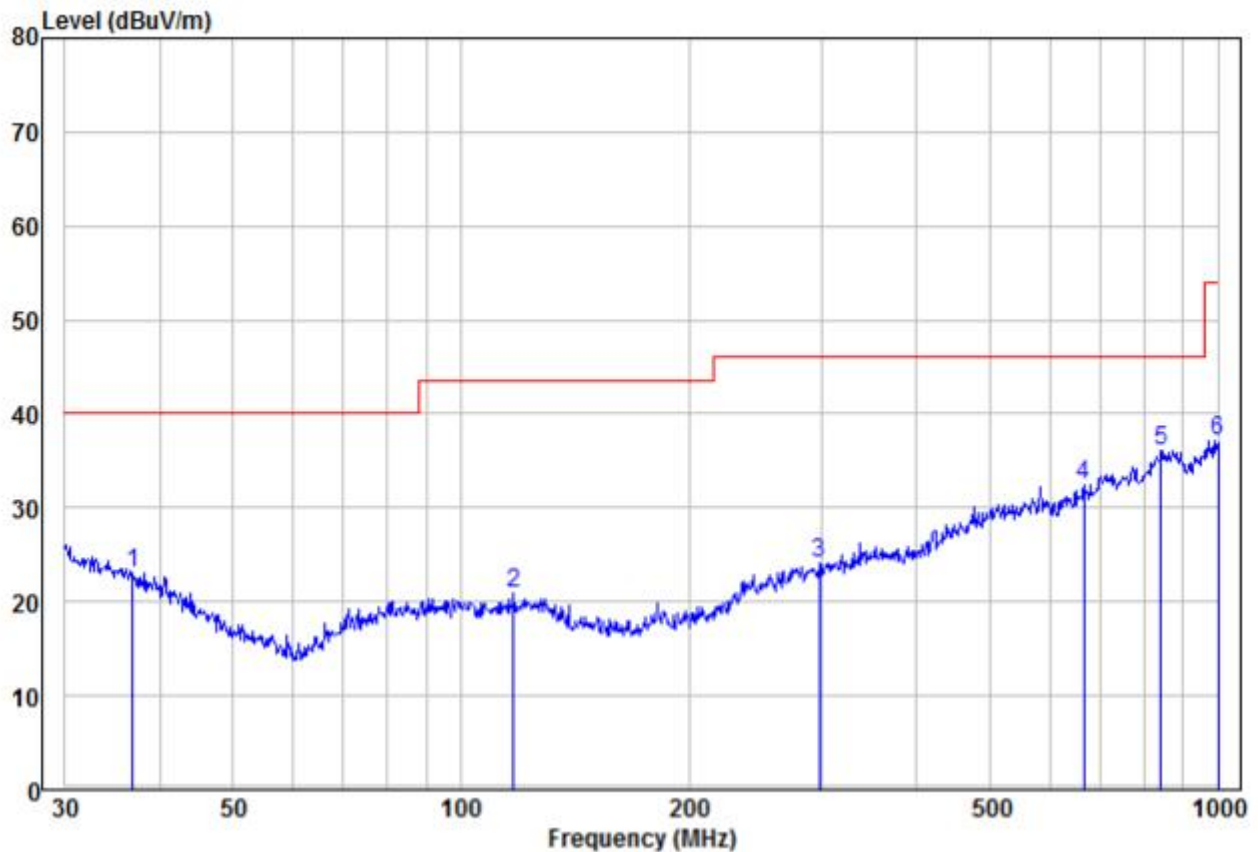

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	36.90	9.12	13.90	23.02	40.00	-16.98 Peak	HORIZONTAL
2	117.36	9.76	11.07	20.83	43.50	-22.67 Peak	HORIZONTAL
3	297.22	9.62	14.47	24.09	46.00	-21.91 Peak	HORIZONTAL
4	665.80	10.92	21.55	32.47	46.00	-13.53 Peak	HORIZONTAL
5 pp	842.13	10.15	25.97	36.12	46.00	-9.88 Peak	HORIZONTAL
6	1000.00	10.19	27.00	37.19	54.00	-16.81 Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

3# Li-ion battery DC 3.85V 350mAh(551925 04)

30MHz~1GHz		
Test mode:	Transmitting	Vertical

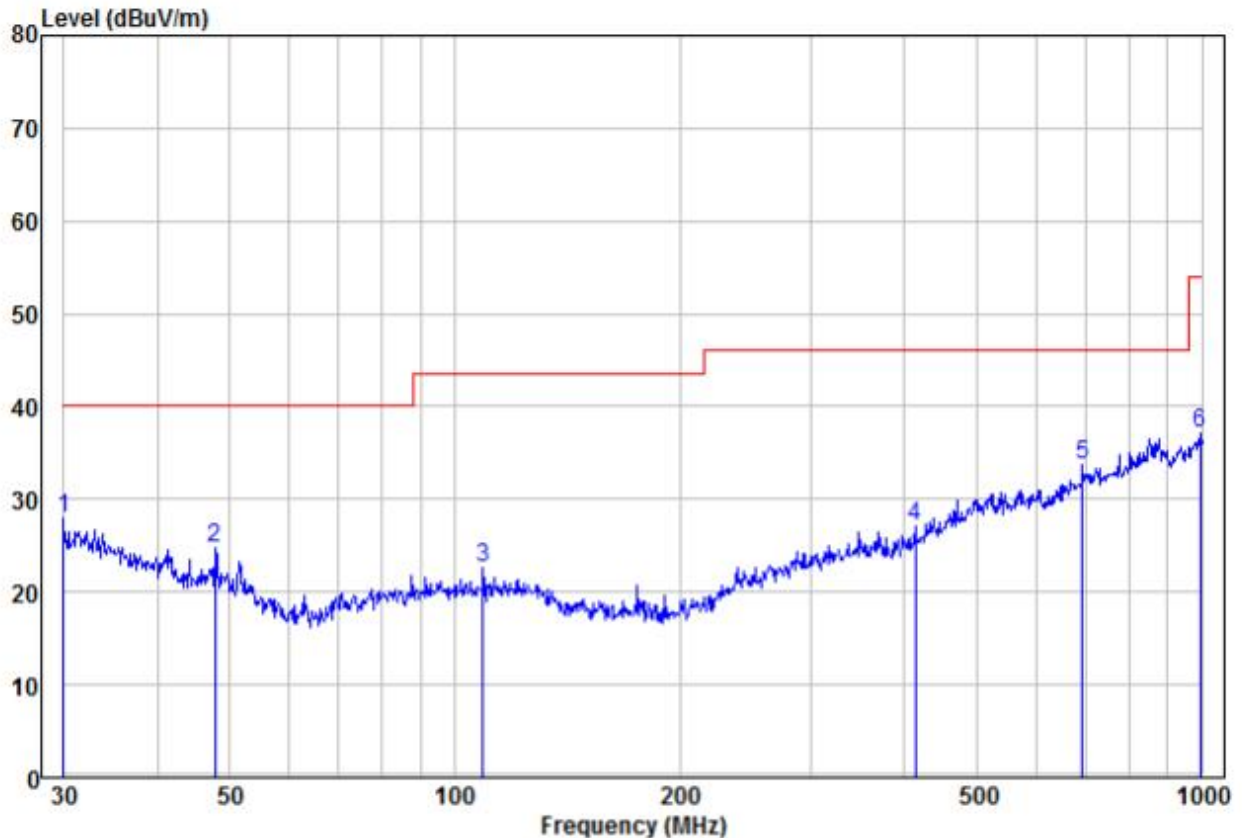

		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	pp	30.00	12.23	15.71	27.94	40.00	-12.06 Peak
2		47.83	15.66	9.19	24.85	40.00	-15.15 Peak
3		109.03	11.85	10.69	22.54	43.50	-20.96 Peak
4		413.27	10.49	16.63	27.12	46.00	-18.88 Peak
5		691.99	11.24	22.51	33.75	46.00	-12.25 Peak
6		996.50	10.19	26.91	37.10	54.00	-16.90 Peak

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

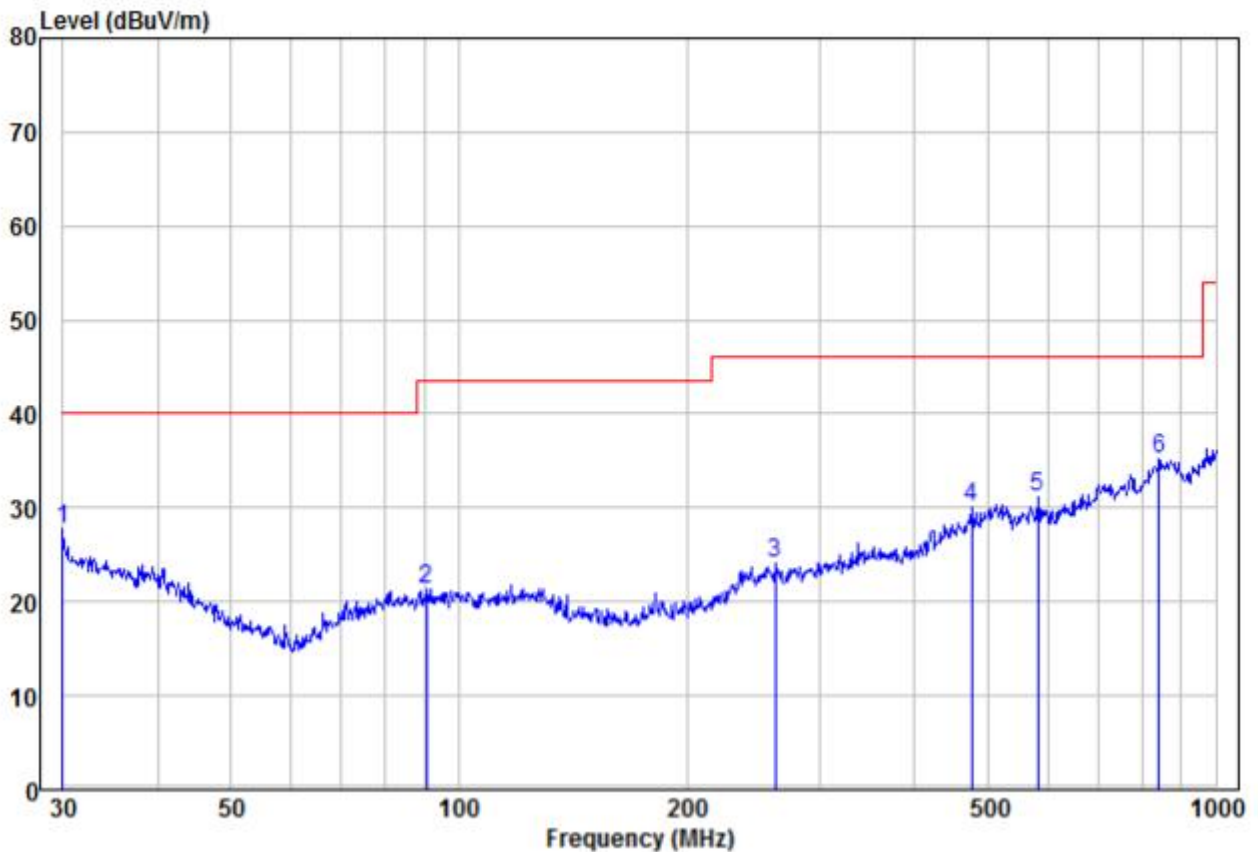

	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	30.00	12.06	15.71	27.77	40.00	-12.23	Peak	HORIZONTAL
2	90.54	10.86	10.44	21.30	43.50	-22.20	Peak	HORIZONTAL
3	261.98	10.79	13.28	24.07	46.00	-21.93	Peak	HORIZONTAL
4	475.50	11.02	18.97	29.99	46.00	-16.01	Peak	HORIZONTAL
5	582.74	11.09	20.07	31.16	46.00	-14.84	Peak	HORIZONTAL
6 pp	842.13	9.15	25.97	35.12	46.00	-10.88	Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

4# Li-ion battery DC 3.85V 350mAh(551925 16)

30MHz~1GHz		
Test mode:	Transmitting	Vertical

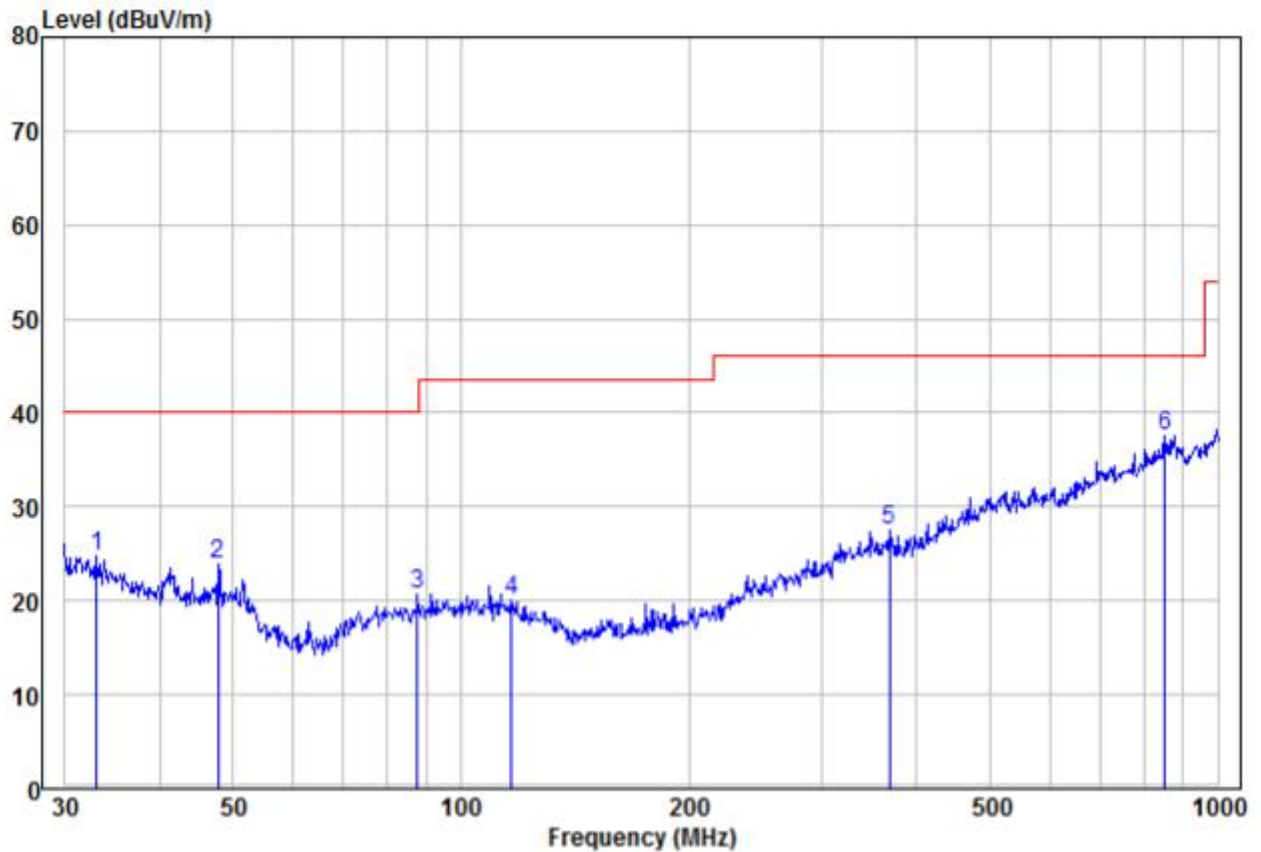

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	32.98	9.68	15.01	24.69	40.00	-15.31	Peak	VERTICAL
2	47.83	14.66	9.19	23.85	40.00	-16.15	Peak	VERTICAL
3	87.72	10.39	10.32	20.71	40.00	-19.29	Peak	VERTICAL
4	116.54	9.12	11.02	20.14	43.50	-23.36	Peak	VERTICAL
5	368.11	11.16	16.36	27.52	46.00	-18.48	Peak	VERTICAL
6 pp	851.04	11.57	25.95	37.52	46.00	-8.48	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

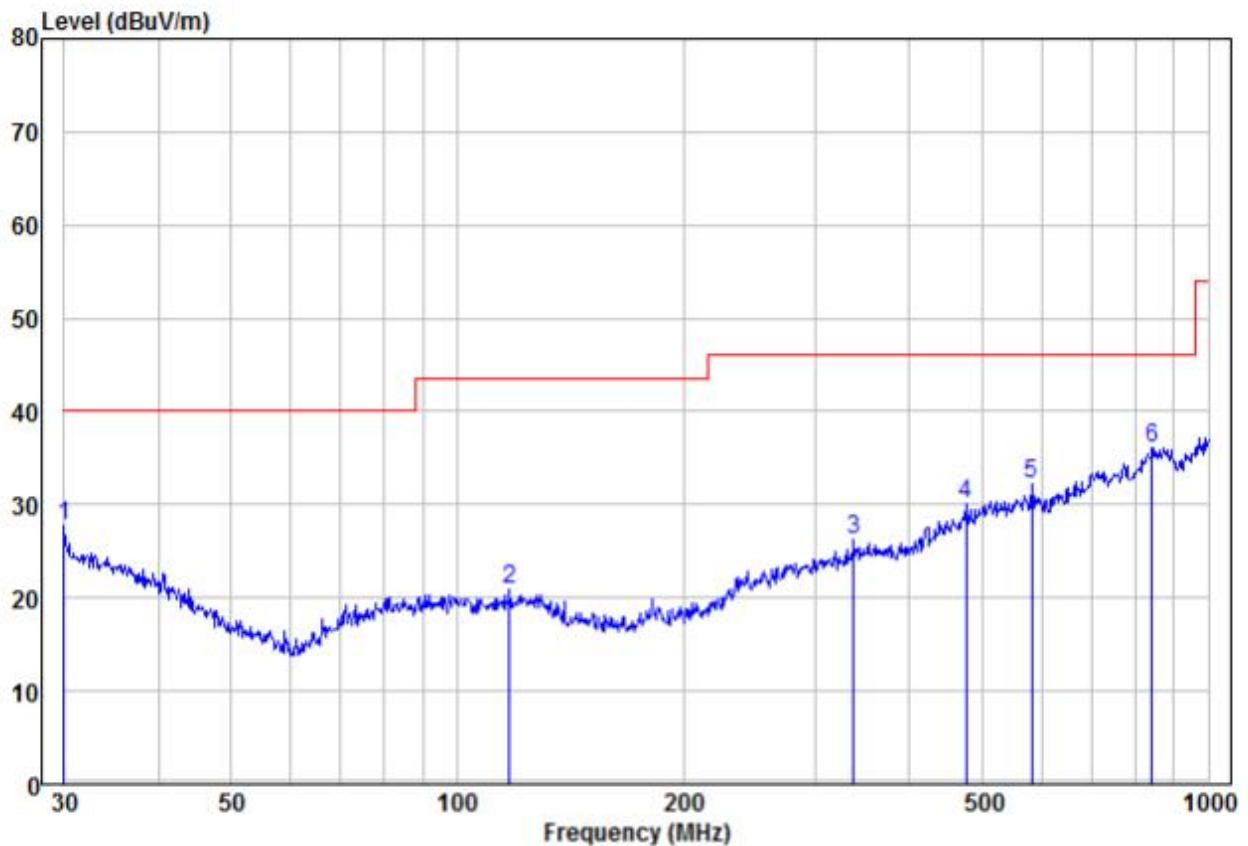

	Freq	Read Level	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	30.00	12.06	15.71	27.77	40.00	-12.23	Peak	HORIZONTAL
2	117.36	9.76	11.07	20.83	43.50	-22.67	Peak	HORIZONTAL
3	337.22	10.61	15.56	26.17	46.00	-19.83	Peak	HORIZONTAL
4	475.50	11.02	18.97	29.99	46.00	-16.01	Peak	HORIZONTAL
5	582.74	12.09	20.07	32.16	46.00	-13.84	Peak	HORIZONTAL
6 pp	842.13	10.15	25.97	36.12	46.00	-9.88	Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5# Li-ion battery DC 3.85V 350mAh(551925 04)

30MHz~1GHz		
Test mode:	Transmitting	Vertical

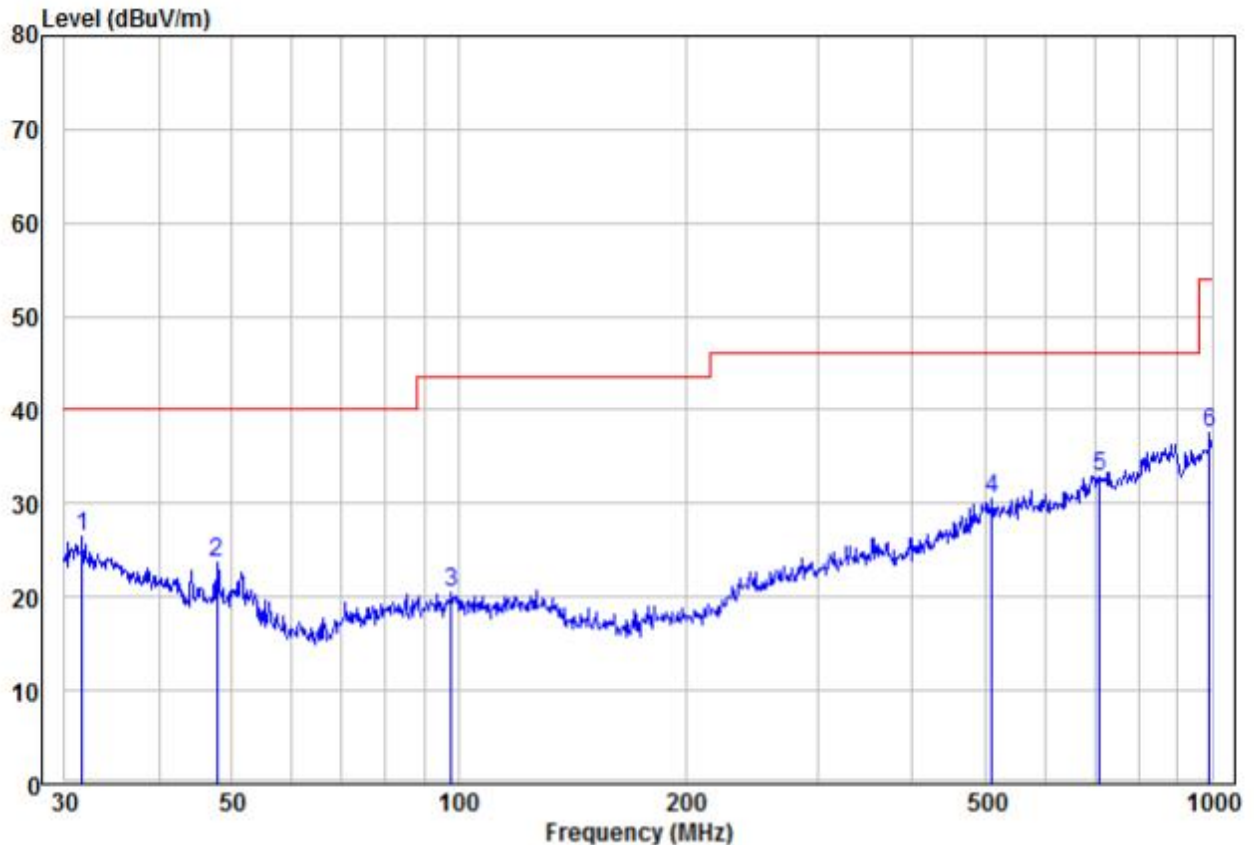

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	31.62	11.14	15.33	26.47	40.00	-13.53	Peak	VERTICAL
2	47.83	14.41	9.19	23.60	40.00	-16.40	Peak	VERTICAL
3	97.80	9.47	10.93	20.40	43.50	-23.10	Peak	VERTICAL
4	510.04	10.45	20.06	30.51	46.00	-15.49	Peak	VERTICAL
5 pp	709.18	10.20	22.71	32.91	46.00	-13.09	Peak	VERTICAL
6	993.01	10.74	26.81	37.55	54.00	-16.45	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

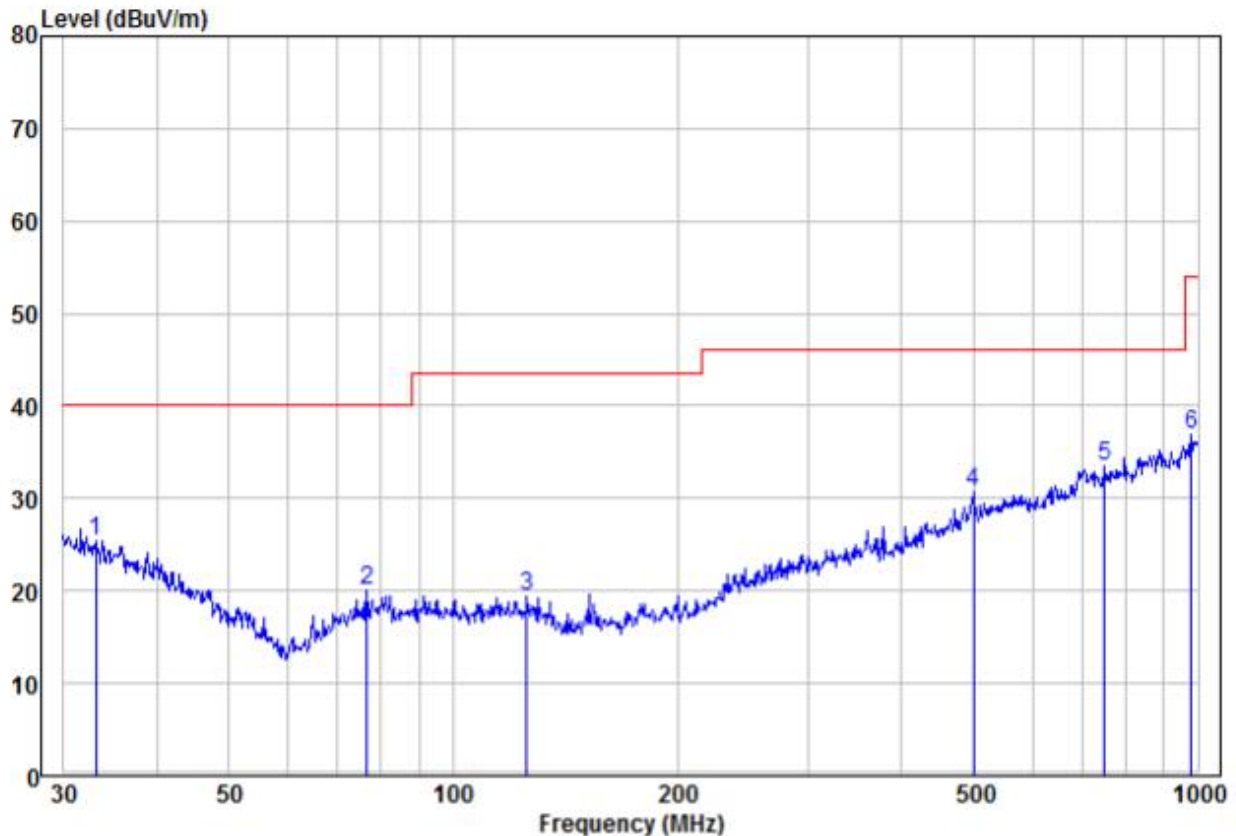

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	33.09	10.48	14.98	25.46	40.00	-14.54 Peak	HORIZONTAL
2	76.51	10.56	9.47	20.03	40.00	-19.97 Peak	HORIZONTAL
3	125.45	8.32	11.03	19.35	43.50	-24.15 Peak	HORIZONTAL
4	499.42	10.61	20.00	30.61	46.00	-15.39 Peak	HORIZONTAL
5 pp	750.11	10.01	23.45	33.46	46.00	-12.54 Peak	HORIZONTAL
6	979.18	10.37	26.44	36.81	54.00	-17.19 Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

6# Li-ion battery DC 3.85V 350mAh(551925 16)

30MHz~1GHz		
Test mode:	Transmitting	Vertical

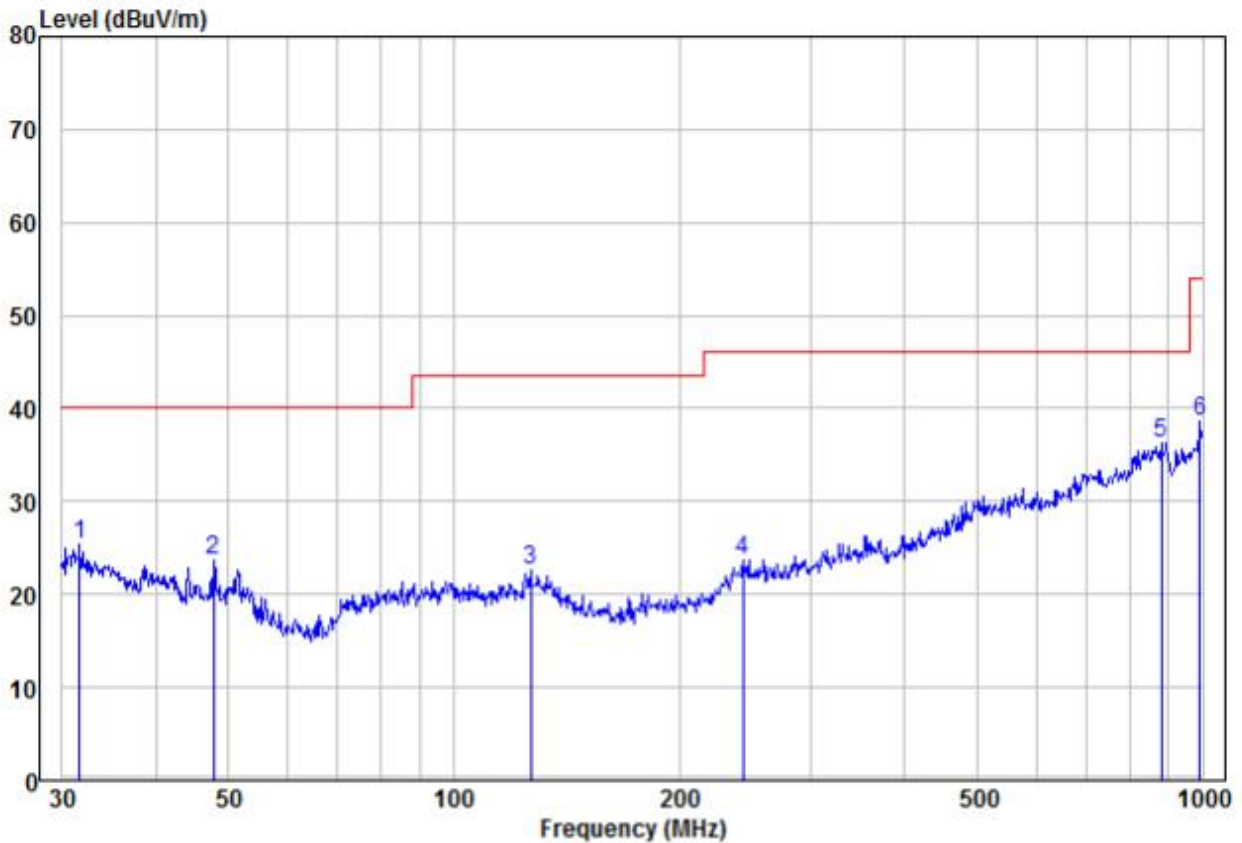

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	31.62	10.14	15.33	25.47	40.00	-14.53	Peak	VERTICAL
2	47.83	14.41	9.19	23.60	40.00	-16.40	Peak	VERTICAL
3	126.77	11.63	10.99	22.62	43.50	-20.88	Peak	VERTICAL
4	243.38	11.13	12.59	23.72	46.00	-22.28	Peak	VERTICAL
5 pp	881.41	10.42	25.92	36.34	46.00	-9.66	Peak	VERTICAL
6	993.01	11.74	26.81	38.55	54.00	-15.45	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

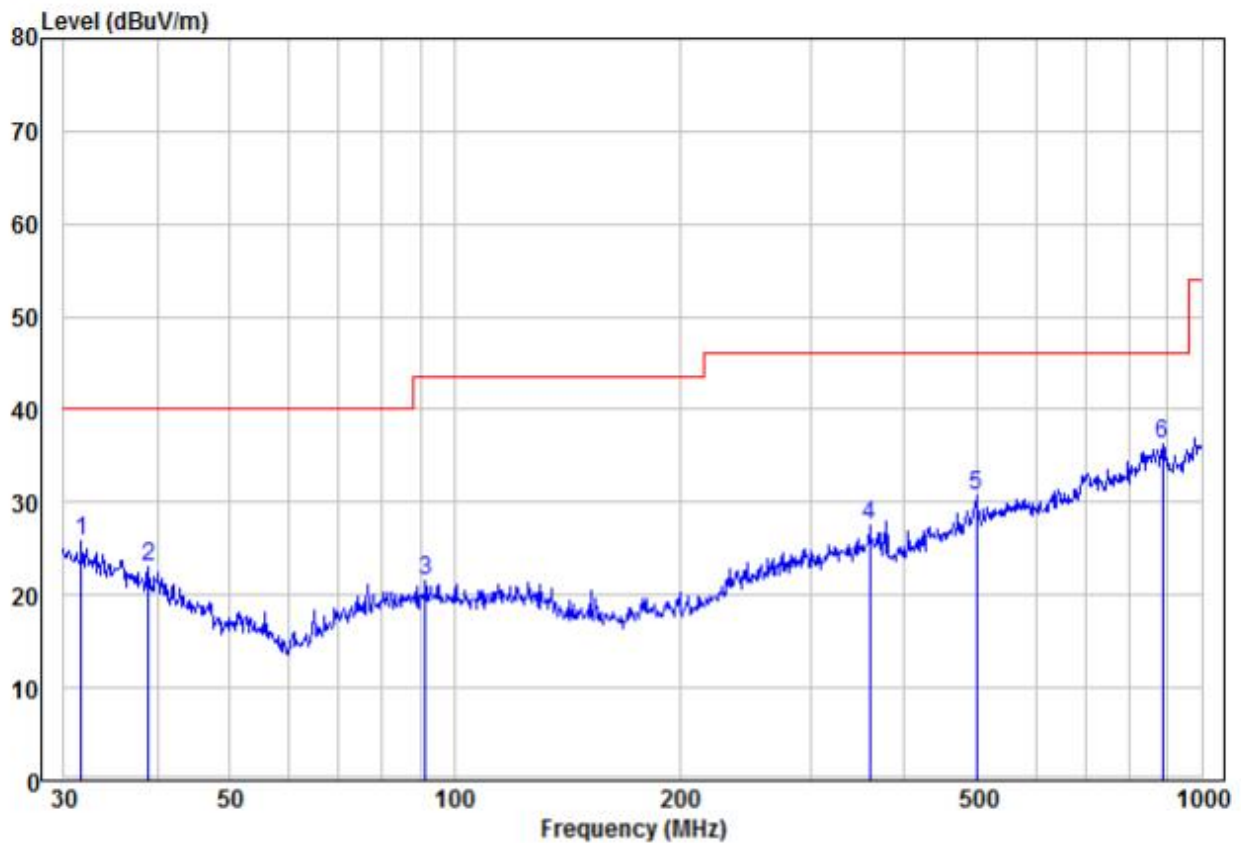

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	31.62	10.41	15.33	25.74	40.00	-14.26	Peak	HORIZONTAL
2	38.89	9.86	13.22	23.08	40.00	-16.92	Peak	HORIZONTAL
3	91.49	10.93	10.51	21.44	43.50	-22.06	Peak	HORIZONTAL
4	359.19	11.31	16.13	27.44	46.00	-18.56	Peak	HORIZONTAL
5	499.42	10.61	20.00	30.61	46.00	-15.39	Peak	HORIZONTAL
6 pp	887.61	10.32	25.91	36.23	46.00	-9.77	Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.11.2 Transmitter Emission above 1GHz

Worse case mode:		GFSK(DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	54.78	-9.2	45.58	74	-28.42	Peak	H
2400	55.76	-9.39	46.37	74	-27.63	Peak	H
4804	52.05	-4.33	47.72	74	-26.28	Peak	H
7206	48.53	1.01	49.54	74	-24.46	Peak	H
2390	53.81	-9.2	44.61	74	-29.39	Peak	V
2400	55.89	-9.39	46.50	74	-27.50	Peak	V
4804	55.15	-4.33	50.82	74	-23.18	Peak	V
7206	50.71	1.01	51.72	74	-22.28	Peak	V

Worse case mode:		GFSK(DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4882	52.72	-4.11	48.61	74	-25.39	peak	H
7323	50.98	1.51	52.49	74	-21.51	peak	H
4882	52.68	-4.11	48.57	74	-25.43	peak	V
7323	48.55	1.51	50.06	74	-23.94	peak	V

Worse case mode:		GFSK(DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	55.97	-9.29	46.68	74	-27.32	Peak	H
4960	51.38	-4.04	47.34	74	-26.66	Peak	H
7440	49.71	1.57	51.28	74	-22.72	Peak	H
2483.5	55.88	-9.29	46.59	74	-27.41	Peak	V
4960	48.86	-4.04	44.82	74	-29.18	Peak	V
7440	50.76	1.57	52.33	74	-21.67	Peak	V

Worse case mode:		π /4DQPSK (2DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2390	54.41	-9.2	45.21	74	-28.79	Peak	H
2400	55.22	-9.39	45.83	74	-28.17	Peak	H
4804	54.12	-4.33	49.79	74	-24.21	Peak	H
7206	49.00	1.01	50.01	74	-23.99	Peak	H
2390	54.66	-9.2	45.46	74	-28.54	Peak	V
2400	54.60	-9.39	45.21	74	-28.79	Peak	V
4804	54.97	-4.33	50.64	74	-23.36	Peak	V
7206	50.86	1.01	51.87	74	-22.13	Peak	V

Worse case mode:		π /4DQPSK (2DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
4882	50.97	-4.11	46.86	74	-27.14	peak	H
7323	50.95	1.51	52.46	74	-21.54	peak	H
4882	53.95	-4.11	49.84	74	-24.16	peak	V
7323	48.73	1.51	50.24	74	-23.76	peak	V

Worse case mode:		π /4DQPSK (2DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2483.5	55.65	-9.29	46.36	74	-27.64	Peak	H
4960	53.17	-4.04	49.13	74	-24.87	Peak	H
7440	49.30	1.57	50.87	74	-23.13	Peak	H
2483.5	56.17	-9.29	46.88	74	-27.12	Peak	V
4960	50.08	-4.04	46.04	74	-27.96	Peak	V
7440	48.82	1.57	50.39	74	-23.61	Peak	V

Worse case mode:		8DPSK (3DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	56.15	-9.2	46.95	74	-27.05	Peak	H
2400	57.01	-9.39	47.62	74	-26.38	Peak	H
4804	53.59	-4.33	49.26	74	-24.74	Peak	H
7206	49.98	1.01	50.99	74	-23.01	Peak	H
2390	54.72	-9.2	45.52	74	-28.48	Peak	V
2400	56.60	-9.39	47.21	74	-26.79	Peak	V
4804	53.24	-4.33	48.91	74	-25.09	Peak	V
7206	50.08	1.01	51.09	74	-22.91	Peak	V

Worse case mode:		8DPSK (3DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4882	52.44	-4.11	48.33	74	-25.67	peak	H
7323	50.43	1.51	51.94	74	-22.06	peak	H
4882	54.23	-4.11	50.12	74	-23.88	peak	V
7323	49.85	1.51	51.36	74	-22.64	peak	V

Worse case mode:		8DPSK (3DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	54.64	-9.29	45.35	74	-28.65	Peak	H
4960	52.32	-4.04	48.28	74	-25.72	Peak	H
7440	49.11	1.57	50.68	74	-23.32	Peak	H
2483.5	54.21	-9.29	44.92	74	-29.08	Peak	V
4960	49.69	-4.04	45.65	74	-28.35	Peak	V
7440	49.86	1.57	51.43	74	-22.57	Peak	V


Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6 Photographs - EUT Test Setup

6.1 Radiated Emission

9kHz~30MHz:

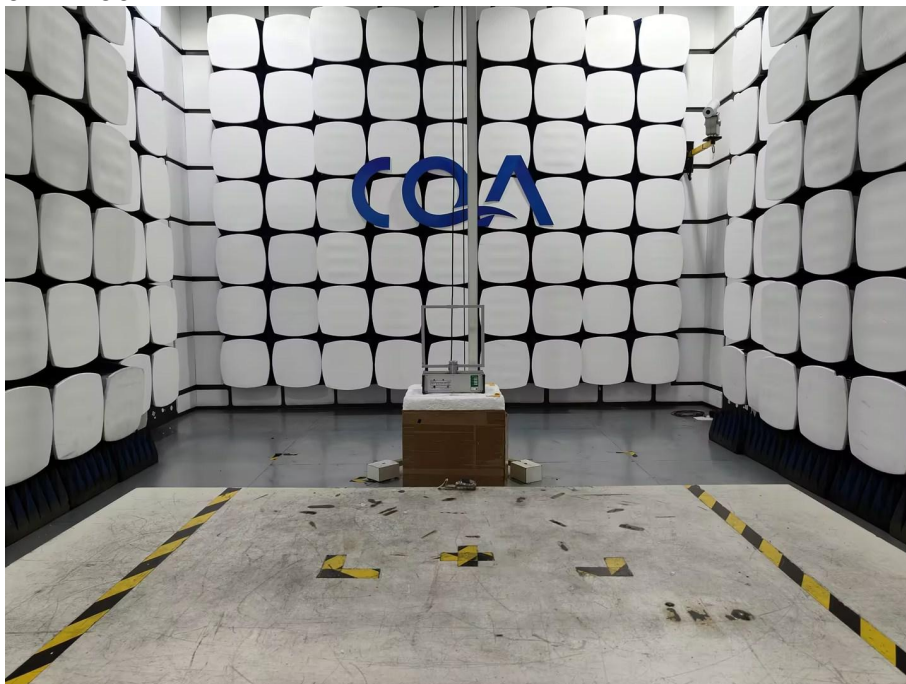

30MHz~1GHz:



Above 1GHz:



6.2 Conducted Emissions Test Setup



7 Photographs - EUT Constructional Details

Refer to Photographs - EUT Constructional Details OF EUT for CQASZ20250200188E-01.

*** END OF REPORT ***