



FCC PART 15B, CLASS B TEST REPORT

For

JM Manufacturing Limited

Justen Centre, 1-3/F, 46-52 Wai Ching Street, Jordan Road, Kowloon, Hong Kong

FCC ID: 2AHGJJMSYZ0388-49

Report Type: Product Type:

Original Report 2CH Wall Climber rc car

Report Number: RSZ170822832-00

Report Date: 2017-09-25

Seal Deng

Reviewed By: EMC Engineer

Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone,

Seal Deng

Shenzhen, Guangdong, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★". This report may contain data were produced under the subcontractor and shall be marked with an asterisk "△".

TABLE OF CONTENTS

GENERAL INFORMATION	······
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	3
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT Exercise Software	5
SPECIAL ACCESSORIES	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	
External I/O Cable	5
BLOCK DIAGRAM OF TEST SETUP	6
	7
SUMMARY OF TEST RESULTS	· • • • • • • • • • • • • • • • • • • •
SUMMARY OF TEST RESULTS TEST EQUIPMENT LIST FCC §15.107 – AC LINE CONDUCTED EMISSIONS	8
TEST EQUIPMENT LISTFCC §15.107 – AC LINE CONDUCTED EMISSIONS	8
FCC §15.107 – AC LINE CONDUCTED EMISSIONS	9 9
TEST EQUIPMENT LISTFCC §15.107 – AC LINE CONDUCTED EMISSIONS	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS APPLICABLE STANDARD EUT SETUP	
TEST EQUIPMENT LIST FCC §15.107 – AC LINE CONDUCTED EMISSIONS	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS APPLICABLE STANDARD EUT SETUP EMI TEST RECEIVER SETUP TEST PROCEDURE CORRECTED FACTOR & MARGIN CALCULATION TEST RESULTS SUMMARY	
TEST EQUIPMENT LIST FCC §15.107 – AC LINE CONDUCTED EMISSIONS	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS APPLICABLE STANDARD EUT SETUP EMI TEST RECEIVER SETUP TEST PROCEDURE CORRECTED FACTOR & MARGIN CALCULATION TEST RESULTS SUMMARY	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS APPLICABLE STANDARD EUT SETUP EMI TEST RECEIVER SETUP TEST PROCEDURE CORRECTED FACTOR & MARGIN CALCULATION TEST RESULTS SUMMARY TEST DATA	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS APPLICABLE STANDARD EUT SETUP EMI TEST RECEIVER SETUP TEST PROCEDURE CORRECTED FACTOR & MARGIN CALCULATION TEST RESULTS SUMMARY TEST DATA FCC §15.109 - RADIATED SPURIOUS EMISSIONS	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS APPLICABLE STANDARD EUT SETUP EMI TEST RECEIVER SETUP TEST PROCEDURE CORRECTED FACTOR & MARGIN CALCULATION TEST RESULTS SUMMARY TEST DATA FCC §15.109 - RADIATED SPURIOUS EMISSIONS APPLICABLE STANDARD	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS APPLICABLE STANDARD EUT SETUP EMI TEST RECEIVER SETUP TEST PROCEDURE CORRECTED FACTOR & MARGIN CALCULATION TEST RESULTS SUMMARY TEST DATA FCC §15.109 - RADIATED SPURIOUS EMISSIONS APPLICABLE STANDARD EUT SETUP EMI TEST RECEIVER SETUP TEST PROCEDURE	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS APPLICABLE STANDARD EUT SETUP EMI TEST RECEIVER SETUP TEST PROCEDURE CORRECTED FACTOR & MARGIN CALCULATION TEST RESULTS SUMMARY TEST DATA FCC §15.109 - RADIATED SPURIOUS EMISSIONS APPLICABLE STANDARD EUT SETUP EMI TEST RECEIVER SETUP TEST PROCEDURE CORRECTED AMPLITUDE & MARGIN CALCULATION	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS APPLICABLE STANDARD EUT SETUP EMI TEST RECEIVER SETUP TEST PROCEDURE CORRECTED FACTOR & MARGIN CALCULATION TEST RESULTS SUMMARY TEST DATA FCC §15.109 - RADIATED SPURIOUS EMISSIONS APPLICABLE STANDARD EUT SETUP EMI TEST RECEIVER SETUP TEST PROCEDURE	

Report No.: RSZ170822832-00

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *JM Manufacturing Limited*'s product, model number: *JMSYZ0388 (FCC ID: 2AHGJJMSYZ0388-49,UPC Number:#400028858612)* or the "EUT" in this report is a receiver of the *2CH Wall Climber rc car*, which measures approximately: 13.0 cm (L) x 6.9 cm (W) x 5.0 cm (H), rated input voltage: DC 3.7V from battery. The highest operating frequency is 49.865 MHz.

Report No.: RSZ170822832-00

* All measurement and test data in this report was gathered from production sample serial number: 20170822 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2017-08-22.

Objective

This test report is prepared on behalf of *JM Manufacturing Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

Related Submittal(s)/Grant(s)

FCC PART 15.235 DXX submissions with FCC ID: 2AHGJJMSYZ0388-491

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will be taken into consideration for the test data recorded in the report

Item			Expanded Measurement uncertainty
AC Power Line Conducted Emissions			2.20 dB (k=2, 95% level of confidence)
	30MHz~200MHz	Horizontal	4.58 dB (k=2, 95% level of confidence)
Radiated emission		30WITIZ~200WITIZ	Vertical
Radiated emission	200MI 1 CH	Horizontal	4.83 dB (k=2, 95% level of confidence)
	200MHz~1 GHz	Vertical	5.85 dB (k=2, 95% level of confidence)

FCC Part 15B, Class B Page 3 of 17

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

Report No.: RSZ170822832-00

Bay Area Compliance Laboratories Corp. (Shenzhen) has been accredited to ISO/IEC 17025 by CNAS (Lab code: L2408). And accredited to ISO/IEC 17025 by NVLAP (Lab code: 200707-0), the FCC Designation No.CN5001 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Shenzhen) was registered with ISED Canada under ISED Canada Registration Number 3062B.

FCC Part 15B, Class B Page 4 of 17

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a manufacturer testing fashion.

EUT Exercise Software

No exercise software was used.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
N/A	Adapter	M4	N/A
N/A	Socket	N/A	N/A
Agilent	Signal Generator	8665B	3744A01692

Report No.: RSZ170822832-00


External I/O Cable

Cable Description	Length (m)	From/Port	То
Un-shielded Un-detachable AC Cable	0.5	Mains	Socket


FCC Part 15B, Class B Page 5 of 17

Block Diagram of Test Setup

Charging

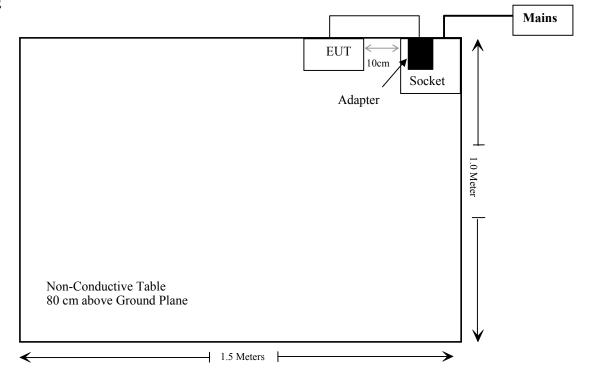

Receving: Super-regenerative receiver

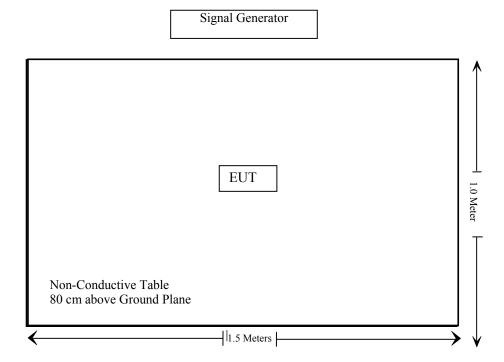

FCC Part 15B, Class B Page 6 of 17

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Spurious Emissions	Compliance

Report No.: RSZ170822832-00

FCC Part 15B, Class B Page 7 of 17

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
	AC Line Conducted Emission Test				
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2016-10-19	2017-10-19
Rohde & Schwarz	LISN	ENV216	3560.6650.12- 101613-Yb	2016-12-07	2017-12-07
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2017-05-21	2017-11-19
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
N/A	Conducted Emission Cable	N/A	UF A210B-1- 0720-504504	2017-05-12	2017-11-12
	R	Radiated Emissio	n Test		
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2016-12-07	2017-12-07
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-17	2017-12-17
TDK	Chamber	Chamber A	2#	2016-12-05	2019-12-05
НР	Amplifier	HP8447E	1937A01046	2017-05-21	2017-11-19
R&S	Auto test Software	EMC32	V9.10	NCR	NCR

Report No.: RSZ170822832-00

FCC Part 15B, Class B Page 8 of 17


^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.107

EUT Setup

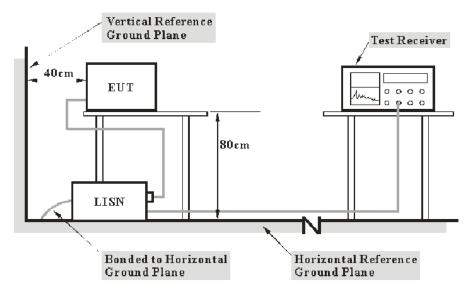

Report No.: RSZ170822832-00

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the host PC was connected to the first LISN and the other relevant equipments were connected to the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

FCC Part 15B, Class B Page 9 of 17

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Report No.: RSZ170822832-00

Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL., $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	26 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2017-08-26.

FCC Part 15B, Class B Page 10 of 17

EUT Operation Mode: Charging

AC 120V/60 Hz, Line

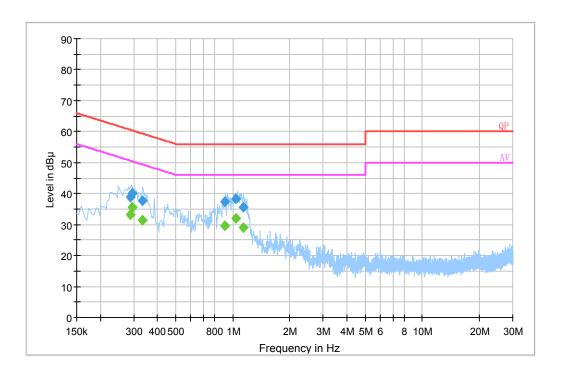


Report No.: RSZ170822832-00

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.286500	38.9	20.2	60.6	21.7	QP
0.293500	40.1	20.2	60.4	20.4	QP
0.332990	37.8	20.2	59.4	21.6	QP
0.908290	37.4	20.1	56.0	18.6	QP
1.042130	38.3	20.1	56.0	17.7	QP
1.132870	35.5	20.1	56.0	20.5	QP
0.286500	33.1	20.2	50.6	17.5	Ave.
0.293500	35.5	20.2	50.4	14.9	Ave.
0.332990	31.4	20.2	49.4	18.0	Ave.
0.908290	29.5	20.1	46.0	16.5	Ave.
1.042130	31.9	20.1	46.0	14.1	Ave.
1.132870	29.0	20.1	46.0	17.0	Ave.

FCC Part 15B, Class B Page 11 of 17

AC 120V/60 Hz, Neutral

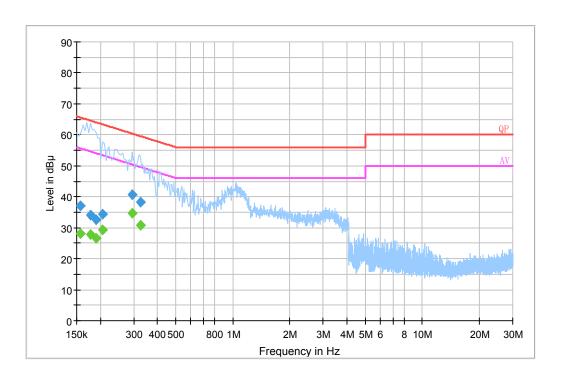

Report No.: RSZ170822832-00

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.157500	37.2	20.2	65.6	28.4	QP
0.177500	34.2	20.2	64.6	30.4	QP
0.190501	32.7	20.2	64.0	31.3	QP
0.205500	34.5	20.2	63.4	28.9	QP
0.293500	40.8	20.2	60.4	19.6	QP
0.326830	38.4	20.2	59.5	21.2	QP
0.157500	28.0	20.2	55.6	27.6	Ave.
0.177500	27.9	20.2	54.6	26.7	Ave.
0.190501	26.7	20.2	54.0	27.3	Ave.
0.205500	29.4	20.2	53.4	24.0	Ave.
0.293500	34.7	20.2	50.4	15.7	Ave.
0.326830	30.7	20.2	49.5	18.9	Ave.

Note:

- 1) Correction Factor =LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
 3) Margin = Limit Corrected Amplitude

FCC Part 15B, Class B Page 12 of 17


FCC §15.109 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §15.109

EUT Setup

Below 1GHz:

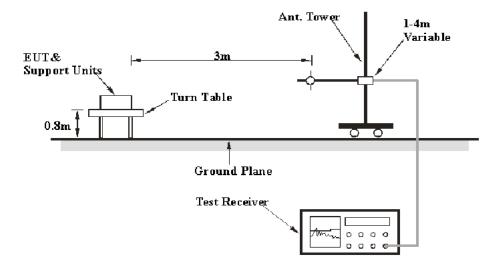

Report No.: RSZ170822832-00

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 1 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP

FCC Part 15B, Class B Page 13 of 17

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Report No.: RSZ170822832-00

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109 Class B,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2017-09-01 to 2017-09-25.

EUT Operation Mode: Charging & Receiving

FCC Part 15B, Class B Page 14 of 17

30 MHz – 1GHz:

Charging

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected		FCC Part 15B	
	Reading (dBµV)	Detector (PK/QP/Ave.)	Degree	Height (m)	Polar (H/V)	Factor (dB/m)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
30.309500	22.13	QP	124.0	2.23	V	0.1	22.23	40.00	17.77
36.904750	22.30	QP	351.0	1.12	V	-4.2	18.10	40.00	21.90
549.009000	22.01	QP	223.0	3.71	V	4.9	26.91	46.00	19.09
700.185500	21.81	QP	98.0	3.16	Н	6.7	28.51	46.00	17.49
806.693750	21.93	QP	245.0	1.84	Н	9.0	30.93	46.00	15.07
858.046000	21.98	QP	233.0	2.03	Н	9.2	31.18	46.00	14.82

Report No.: RSZ170822832-00

Receiving (As Super-regenerative receiver)

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected		FCC Part 15B	
	Reading (dBµV)	Detector (PK/QP/Ave.)	Degree	Height (m)	Polar (H/V)	Factor (dB/m)	Amplitude (dBμV/m)	Limit (dBµV/m)	Margin (dB)
99.730550	40.51	QP	88.0	2.06	Н	-9.3	31.21	43.50	12.29
436.424550	22.33	QP	300.0	2.16	V	0.2	22.53	46.00	23.47
547.207525	21.83	QP	78.0	2.74	V	4.8	26.63	46.00	19.37
703.736950	21.98	QP	190.0	4.01	V	6.8	28.78	46.00	17.22
744.295550	22.27	QP	164.0	2.08	V	7.5	29.77	46.00	16.23
956.793400	21.53	QP	280.0	3.19	V	8.5	29.93	46.00	16.07

Note:

- 1) Corrected Amplitude = Correction Factor + Reading
- 2) Margin = Limit Corrected Amplitude

***** END OF REPORT *****

FCC Part 15B, Class B Page 15 of 17