

FCC TEST REPORT

FCC ID: 2AHH9-JCHP4A

On Behalf of

Kaba Ilco Corp

Remote Key

Model No.: PRX-JEEP-3B1, CY24P21, PRX-JEEP-4B1, CY24P23, PRX-JEEP-5B1, CY24P24, PRX-JEEP-4B2, CY24P22

Prepared for : Kaba Ilco Corp

Address : 400 Jeffreys Road Rocky Mount, NC 27804 United States

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,

Shenzhen, Guangdong, China

Report Number : T1905176-C01-R01

Date of Receipt : May 29, 2019

Date of Test : May 29, 2019 – June 06, 2019

Date of Report : June 10, 2019

Version Number : V0

Contents

1.	Ge	neral Information	5
	1.1.	Description of Device (EUT)	5
	1.2.	Accessories of Device (EUT)	6
	1.3.	Tested Supporting System Details	6
	1.4.	Test Facility	6
2.	Su	mmary of test	7
	2.1.	Summary of test result	7
	2.2.	Block Diagram	8
	2.3.	Test mode	8
	2.4.	Test Conditions	8
	2.5.	Measurement Uncertainty (95% confidence levels, k=2)	8
	2.6.	Test Equipment	9
3.	Ra	diation Emission	10
	3.1.	Radiation Emission Limits(15.209&231)	10
	3.2.	Test Setup	10
	3.3.	Test Procedure	12
	3.4.	Test Equipment Setting For emission test.	12
	3.5.	Test Condition	12
	3.6.	Test Result	12
4.	PO	OWER LINE CONDUCTED EMISSION	17
	4.1.	Conducted Emission Limits (15.207)	17
	4.2.	Test Setup	17
	4.3.	Test Procedure	18
	4.4.	Test Results	18
5.	Oc	cupied bandwidth	19
	5.1.	Test limit	19
	5.2.	Method of measurement	19
	5.3.	Test Setup	19
	5.4.	Test Results	19
6.	Tra	ansmission time	21
	6.1.	Test limit	21
	6.2.	Method of measurement	21
	6.3.	Test Setup	21
	6.4.	Test Results	22
7.	An	tenna Requirement	23
	7.1.	Standard Requirement	23
	7.2.	Antenna Connected Construction	23
		Result	
8.	Tes	st setup photo	24
9.	Ph	otos of EUT	25

TEST REPORT DECLARATION

Applicant : Kaba Ilco Corp

Address : 400 Jeffreys Road Rocky Mount, NC 27804 United States

Manufacturer : Qinuo Electronics Co., Ltd

3/F, Bldg.A, Yucheng Base, Keji Rd., High-tech Industrial Park, Fengze, Quanzhou,

Fujian 362000, P.R. China

EUT Description : Remote Key

Date of issue....:

(A) Model No. : PRX-JEEP-3B1, CY24P21, PRX-JEEP-4B1, CY24P23, PRX-JEEP-5B1, CY24P24, PRX-JEEP-4B2, CY24P22

(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.231

ANSI C63.10-2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature):	Project Engineer	tha liarg
Approved by (name + signature):	Simple Guan Project Manager	Sy G

June 10, 2019

Revision History

Revision Issue Date		Revisions	Revised By
V0	June 10, 2019	Initial released Issue	Simple Guan

1. General Information

1.1. Description of Device (EUT)

EUT : Remote Key

Model No. : PRX-JEEP-3B1, CY24P21, PRX-JEEP-4B1, CY24P23,

PRX-JEEP-5B1, CY24P24, PRX-JEEP-4B2, CY24P22

DIFF.

There is no difference between all the models, except the appearance key

and model numbers, this report performs the model PRX-JEEP-5B1.

Trade mark : N/A

Power supply : DC 3V by button cell

Operation frequency : 433.92MHz

Modulation : ASK

Antenna Type : Internal Antenna, Maximum Gain is 0dBi

1.2. Accessories of Device (EUT)

Accessories 1 : /
Manufacturer : /
Model : /
Power supply : /

1.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
/	/	/	/	/	/

1.4. Test Facility

Shenzhen Alpha Product Testing Co., Ltd Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961 July 25, 2017 Certificated by IC Registration Number: 12135A

2. Summary of test

2.1. Summary of test result

Description of Test Item	Standard	Results				
Spurious Emission	Section 15.231&15.209	PASS				
Conduction Emission	Section 15.207	N/A				
Occupied bandwidth	Section 15.231	PASS				
Transmission time	Section 15.231	PASS				
Band Edge	Section 15.231	N/A				
Antenna Requirement	Section 15.203	PASS				
Note: Test according to ANSI C63.10-2013						

2.2. Block Diagram

1. For radiated emissions test: EUT was placed on a turn table, which is 0.8 meters high above ground for below 1 GHz test and 1.5 meters high above ground for below 1 GHz test . EUT was set into test mode before test. New battery is used during all test

EUT

2.3. Test mode

EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information						
Mode Channel Frequency						
	(MHz)					
ASK	433.92					

2.4. Test Conditions

Temperature range	21-25℃
Humidity range	40-75%
Pressure range	86-106kPa

2.5. Measurement Uncertainty (95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber	2.13 dB(Polarize: V)
(below 30MHz)	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber	3.77dB(Polarize: V)
(30MHz to 1GHz)	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber	4.16dB(Polarize: H)
(1GHz to 25GHz)	4.13dB(Polarize: V)
Uncertainty for radio frequency	5.4×10-8
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2℃
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

Equipment Manufacture Model No. Serial No. Last cal. **Cal Interval** 9*6*6 anechoic **CHENYU** 9*6*6 N/A 2018.09.21 1Year chamber ROHDE&SCHW Spectrum analyzer **FSU** 1166.1660.26 2018.09.21 1Year ARZ Spectrum analyzer Agilent N9020A MY499100060 2018.09.11 1Year ROHDE&SCHW 1316.3003K03-10208 Receiver **ESR** 2018.09.21 1 Year ARZ 2-Wa Receiver R&S **ESCI** 101165 2018.09.21 1Year Bilog Antenna Schwarzbeck **VULB 9168** VULB9168-438 2Year 2018.04.13 **SCHWARZBEC** Horn Antenna BBHA 9120 D BBHA 9120 D(1201) 2Year 2018.04.13 K **SCHWARZBEC** Active Loop FMZB 1519B 00059 2Year 2018.09.26 Antenna K Cable Resenberger N/A 1Year No.1 2018.09.21 Cable Resenberger N/A No.2 2018.09.21 1Year Cable Resenberger N/ANo.3 2018.09.21 1Year Pre-amplifier HP HP8347A 2834A00455 2018.09.21 1Year Pre-amplifier 8449B 3008A02664 2018.09.21 1 Year Agilent 20db Attenuator **ICPROBING** IATS1 82347 2018.09.21 1 Year Horn Antenna A-INFOMW LB-180100-KF J211020657 2018.09.21 2 Year LNPA_1840-50 Preamplifier **SKET** SK2018101801 2018.09.21 1 Year Power Meter E9300A MY41496625 2018.09.21 Agilent 1 Year WHTH-1000-40-8 Temp. & Humid. Weihuang 2018.9.11 100631 1 Year Chamber 80 Switching Mode **JUNKE** JK12010S 20140927-6 2018.09.11 1 Year Power Supply

Page 9 of 31

3. Radiation Emission

3.1. Radiation Emission Limits(15.209&231)


Frequency	Field Strength						
(MHz)	Limits at 3 metres (watts, e.i.r.p.)						
	uV/m	dB uV/m	Measurement distance(m)				
0.009-0.490	2400/F(kHz)	XX	300				
0.490-1.705	24000/F(kHz)	XX	30				
1.705-30	30	29.5	30				
30~88	100(3nW)	40	3				
88~216	150(6.8nW)	43.5	3				
216~960	200(12nW)	46	3				
Above960	500(75nW)	54	3				
Fundamental		80.83(AV)	3				
frequency		100.83(PK)					
spurious		60.83(AV)	3				
emissions		80.83(PK)					
frequencies							

NOTE:


- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(Uv/m)

3.2. Test Setup


See the next page.

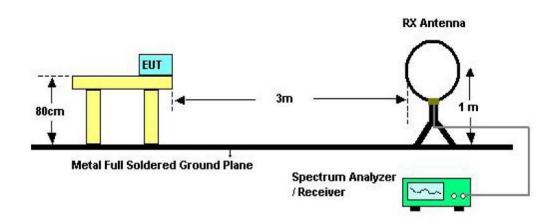

Below 30MHz Test Setup

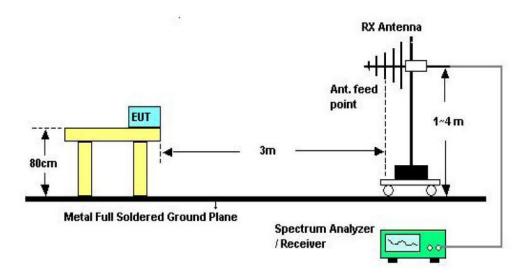

Above 30MHz Test Setup

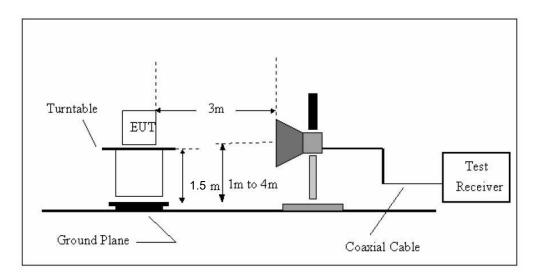

Report No.: T1905176-C01-R01

Above 1GHz Test Setup

3.3. Test Procedure

- a) The measureing distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground, The table was rotated 360 degrees to determine the position of the highest radiation
- b) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.
- c) The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significent Peaks are then marked, and then Qusia Peak Detector mode remeasured
- d) If Peak value comply with QP limit Below 1GHz. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.
- e) For the actual test configuration, please see the test setup photo.
- 3.4. Test Equipment Setting For emission test.

9KHz~150KHz	RBW 200Hz	VBW1KHz
150KHz~30MHz	RBW 9KHz	VBW 30KHz
30MHz~1GHz	RBW 120KHz	VBW 300KHz
Above 1GHz	RBW 1MHz	VBW 3MHz

3.5. Test Condition

Continual Transmitting in maximum power(The new battery be used during Test)

3.6. Test Result

We have scanned the 10th harmonic from 9KHz to the EUT. Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor


Margin=Measurement Result-Limit

- 2 –Spectrum setting:
 - a. Peak setting 30MHz-1GHz, RBW=100KHz, VBW=300KHz.
- 3- PK measure result values is less than the AVG limit values, so AV measure result values test not applicable.

Radiated Emissions Result of Inside band

Below 1GHz

EUT Description	Remote Key	Model No.	PRX-JEEP-5B1
Temperature	24℃	Humidity	56%
Pol	Vertical	Distance	3M
Test Voltage	DC 3V by button cell	Test date	June 02, 2019
Test mode	TX 433.92MHz		

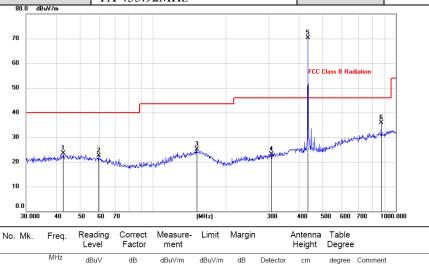


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		42.8997	9.65	13.95	23.60	40.00	-16.40	peak			
2		59.6493	9.57	13.02	22.59	40.00	-17.41	peak			
3		151.0665	10.63	14.56	25.19	43.50	-18.31	peak			
4		306.7537	9.60	13.59	23.19	46.00	-22.81	peak			
5	*	434.0650	53.87	16.37	70.24	46.00	24.24	peak			
6		869.1302	13.20	22.69	35.89	46.00	-10.11	peak			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	434.0650	53.87	16.37	70.24	100.83	-30.59	PK
2	434.0650	/	/	/	80.83	/	AV

Note:

- 1. When the PK measure result value is less than the AVG limit value, the AV measure result values test not applicable.
- 2. Margin = Result (Result = Reading + Factor)—Limit

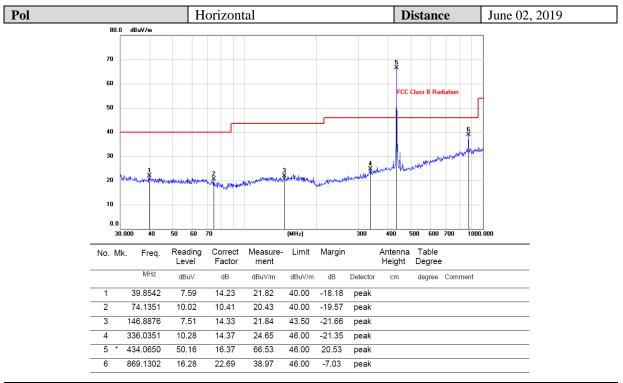


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	434.0650	50.16	16.37	66.53	100.83	-34.30	PK
2	434.0650	/	/	/	80.83	/	AV

Note:

- 1. When the PK measure result value is less than the AVG limit value, the AV measure result values test not applicable.
- 2. Margin = Result (Result = Reading + Factor)—Limit


Above 1GHz

EUT Description	Remote Key	Model No.	PRX-JEEP-5B1
Temperature	24°C	Humidity	56%
Pol	Vertical	Distance	3M
Test Voltage	DC 3V by button cell	Test date	June 02, 2019
Test mode	TX 433.92MHz		

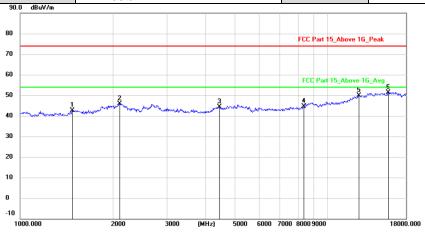

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		1477.276	49.69	-7.01	42.68	74.00	-31.32	peak			
2		2107.950	50.01	-4.06	45.95	74.00	-28.05	peak			
3		4443.453	48.46	-3.99	44.47	74.00	-29.53	peak			
4		8368.070	41.30	3.37	44.67	74.00	-29.33	peak			
5		12651.12	44.59	5.35	49.94	74.00	-24.06	peak			
6	*	15759.04	47.44	4.04	51.48	74.00	-22.52	peak			

PolHorizontalTest dateJune 02, 2019

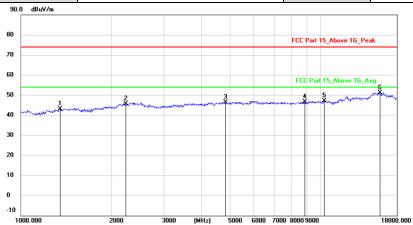

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		1354.577	50.25	-7.15	43.10	74.00	-30.90	peak			
2		2239.861	49.02	-3.32	45.70	74.00	-28.30	peak			
3		4831.962	49.34	-2.86	46.48	74.00	-27.52	peak			
4		8866.061	42.95	3.71	46.66	74.00	-27.34	peak			
5		10303.97	42.17	4.94	47.11	74.00	-26.89	peak			
6	*	15804.66	47.44	3.80	51.24	74.00	-22.76	peak			

4. POWER LINE CONDUCTED EMISSION


4.1. Conducted Emission Limits (15.207)

Frequency	Limits $dB(\mu V)$				
MHz	Quasi-peak Level	Average Level			
0.15 -0.50	66 -56*	56 - 46*			
0.50 -5.00	56	46			
5.00 -30.00	60	50			

Notes: 1. *Decreasing linearly with logarithm of frequency.

- 2. The lower limit shall apply at the transition frequencies.
- 3. The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

4.2. Test Setup

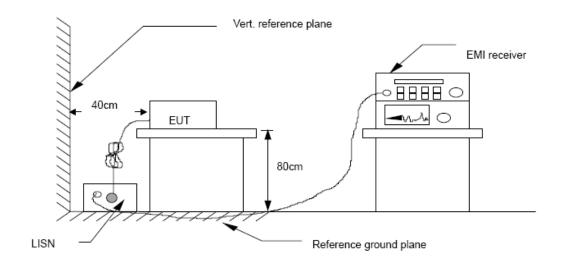

4.3. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCI) is set at 9 kHz.

4.4. Test Results

EUT power supply by battery, so the test not applicable.

Report No.: T1905176-C01-R01

5. Occupied bandwidth

5.1. Test limit

Please refer section RSS-210 & 15.231


According to §15.231(C), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.

5.2. Method of measurement

a)The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b)The test receiver RBW set 30KHz,VBW set 30KHz,Sweep time set auto.

5.3. Test Setup



5.4. Test Results

Mode	Freq (MHz)	20dB Bandwidth (KHz)	99% Bandwidth	Limit (kHz)	Conclusion
ASK	433.92	125.8	/	1084.8	PASS

Note: Limit = 433.92MHz *0.25% = 1084.8 kHz

433.92MHz



Report No.: T1905176-C01-R01

6. Transmission time

6.1. Test limit


Please refer sectionRSS-210 & 15.231

According to §15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

6.2. Method of measurement

- 6.2.1. Place the EUT on the table and set it in transmitting mode.
- 6.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 6.2.3. Set spectrum analyzer Center= 433.92MHz, Span = 0MHz, Sweep = 5s.
- 6.2.4. Set the spectrum analyzer as RBW, VBW=1MHz,
- 6.2.5. Max hold, view and count how many channel in the band.

6.3. Test Setup




6.4. Test Results

Freq (MHz)	Test Result(s)	Limit (s)	Conclusion
433.92	0.530	< 5s	PASS

EUT After Release the button, EUT emission Continue 0.53seconds, Compliance with 15.231 a(1) section.

Page 22 of 31

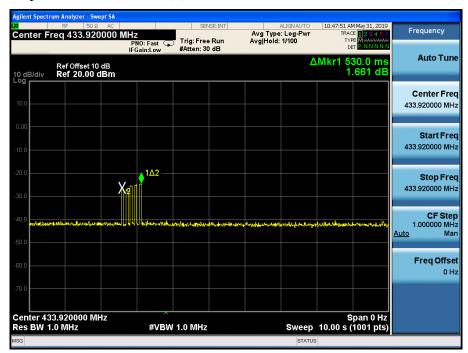

Report No.: T1905176-C01-R01

7. Antenna Requirement

7.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

7.2. Antenna Connected Construction


The directional gains of antenna used for transmitting is 0 dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

7.3. Result

The EUT antenna is Internal antenna. It comply with the standard requirement.

8. Test setup photo

Photos of Radiated emission

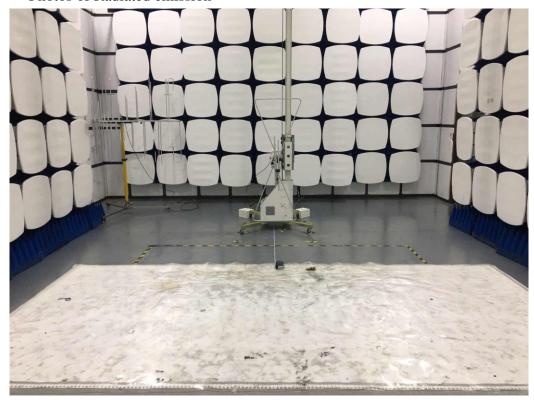



9. Photos of EUT


























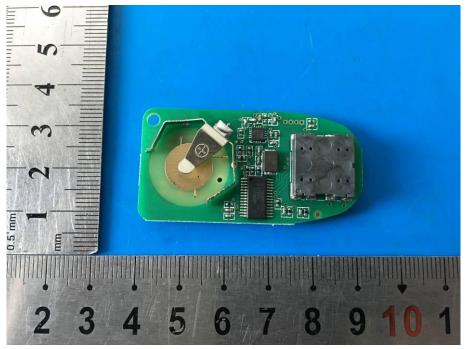

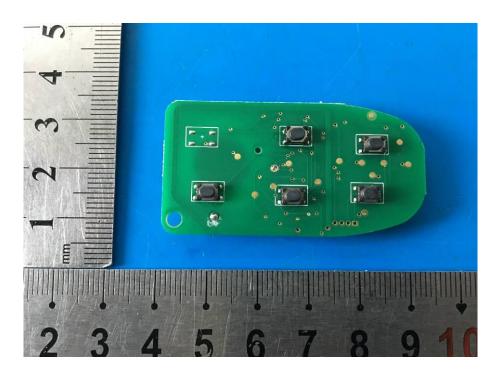

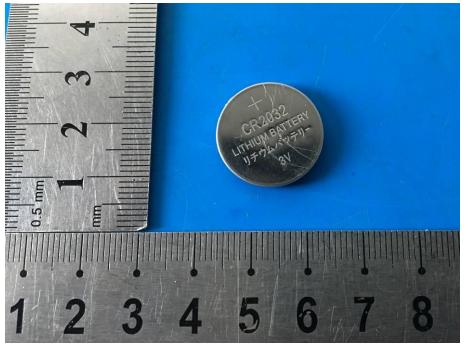

-----END OF THE REPORT-----