



# RADIO TEST REPORT FCC ID: 2AHHW-SMARTQQ200

**Product:** Bluetooth speaker

Trade Mark: Neus

Model No.: Smart QQ200

Serial Model: W2S, Smart QQ300, smart CC500

**Report No.:** NTEK-2017NT07134870F2

**Issue Date:** 28 Jul. 2017

# **Prepared for**

Neusound Co., Ltd
A Zone Floor5th Building 4 JuHui Industrial Area TianLiao Town
GuangMing District, Shenzhen City, China

# Prepared by

Shenzhen NTEK Testing Technology Co., Ltd. 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 9388 Fax.: +86-755-6115 6599 Website:http://www.ntek.org.cn

Version.1.2 Page 1 of 42





# **TABLE OF CONTENTS**

1 TE	EST RESULT CERTIFICATION	3
2 SI	JMMARY OF TEST RESULTS	4
3 FA	ACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES	5
3.2 3.3	LABORATORY ACCREDITATIONS AND LISTINGS MEASUREMENT UNCERTAINTY	
4 GI	ENERAL DESCRIPTION OF EUT	6
5 DE	ESCRIPTION OF TEST MODES	8
6 SE	ETUP OF EQUIPMENT UNDER TEST	9
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	
6.2 6.3	SUPPORT EQUIPMENT EQUIPMENTS LIST FOR ALL TEST ITEMS	10 11
7 TE	ST REQUIREMENTS	13
7.1	CONDUCTED EMISSIONS TEST	13
7.2 7.3	RADIATED SPURIOUS EMISSION6DB BANDWIDTH	
7.3 7.4	PEAK OUTPUT POWER	
7.5	POWER SPECTRAL DENSITY	33
7.6 7.7	CONDUCTED BAND EDGE MEASUREMENTSPURIOUS RF CONDUCTED EMISSIONS	
7.8	ANTENNA APPLICATION	





# 1 TEST RESULT CERTIFICATION

	,	
Applicant's name:	Neusound Co., Ltd	
Address:	A Zone Floor5th Building 4 JuHui Industrial Area TianLiao Town	
	GuangMing District, Shenzhen City,China	
Manufacturer's Name:	Neusound Co., Ltd	
Address:	A Zone Floor5th Building 4 JuHui Industrial Area TianLiao Town	
	GuangMing District, Shenzhen City,China	
Product description		
Product name:	Bluetooth speaker	
Model and/or type reference:	Smart QQ200	
Serial Model:	W2S, Smart QQ300, smart CC500	

#### Measurement Procedure Used:

APPLICABLE STANDARDS				
APPLICABLE STANDARD/ TEST PROCEDURE TEST RESULT				
FCC 47 CFR Part 2, Subpart J:2016				
FCC 47 CFR Part 15, Subpart C:2016				
KDB 174176 D01 Line Conducted FAQ v01r01	Complied			
ANSI C63.10-2013				
FCC KDB 558074 D01 DTS Meas Guidance v04				

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test	: 13 Jul. 2017 ~ 28 Jul. 2017
Testing Engineer	Susan Su
	(Susan Su)
Technical Manager	Jason chen
_	(Jason Chen)
	Sam. Chen
Authorized Signatory	I
	(Sam Chen)

Version.1.2 Page 3 of 42





# 2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C					
Standard Section Test Item Verdict Rema					
15.207	Conducted Emission	PASS			
15.247 (a)(2)	6dB Bandwidth	PASS			
15.247 (b)	Peak Output Power	PASS			
15.247 (c)	Radiated Spurious Emission	PASS			
15.247 (d)	Power Spectral Density	PASS			
15.205	Band Edge Emission	PASS			
15.203	Antenna Requirement	PASS			

# Remark:

- 1. "N/A" denotes test is not applicable in this Test Report.
- 2. All test items were verified and recorded according to the standards and without any deviation during the test.

Version.1.2 Page 4 of 42





### 3 FACILITIES AND ACCREDITATIONS

#### 3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

#### 3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : Accredited by CNAS, 2014.09.04

The Laboratory has been assessed and proved to be in compliance with

CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L5516.

IC-Registration Accredited by Industry Canada, August 29, 2012

The Certificate Registration Number is 9270A-1.

FCC- Accredited Test Firm Registration Number: 463705.

Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for

the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang

Street, Bao'an District, Shenzhen 518126 P.R. China.

# 3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	±2.80dB
2	RF power, conducted	±0.16dB
3	Spurious emissions, conducted	±0.21dB
4	All emissions, radiated(30MHz~1GHz)	±2.64dB
5	All emissions, radiated(1GHz~6GHz)	±2.40dB
6	All emissions, radiated(>6GHz)	±2.52dB
7	Temperature	±0.5°C
8	Humidity	±2%

Version.1.2 Page 5 of 42





# 4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification				
Equipment	Bluetooth speaker			
Trade Mark	Neus			
FCC ID	2AHHW-SMARTQQ200			
Model No.	Smart QQ200			
Serial Model	W2S, Smart QQ300, smart CC500			
Model Difference	All the model are the same circuit and RF module, except the model No			
Operating Frequency	2402MHz~2480MHz			
Modulation	GFSK			
Number of Channels	40 Channels			
Bluetooth Version	BT V4.0(BLE)			
Antenna Type	PCB Antenna			
Antenna Gain	1 dBi			
Power supply	⊠DC supply: DC 7.4V 2200mAh			
. 2 барр.,	☐Adapter supply:			
HW Version	REV:1.1			
SW Version	ATS2825_W-V1.01			

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Version.1.2 Page 6 of 42





# **Revision History**

Report No.	Version	Description	Issued Date
NTEK-2017NT07134870F2	Rev.01	Initial issue of report	Jul 28, 2017

Version.1.2 Page 7 of 42





# 5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Channel	Frequency(MHz)
0	2402
1	2404
	•••
19	2440
20	2442
38	2478
39	2480

Note:  $fc=2402MHz+k\times 2MHz$  k=0 to 39

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Test Cases				
Test Item	Data Rate/ Modulation			
rest item	Bluetooth 4.0_LE / GFSK			
AC Conducted Emission	Mode 1: normal link mode			
	Mode 1: normal link mode			
Radiated Test	Mode 2: Bluetooth Tx Ch00_2402MHz_1Mbps			
Cases	Mode 3: Bluetooth Tx Ch19_2440MHz_1Mbps			
	Mode 4: Bluetooth Tx Ch39_2480MHz_1Mbps			
Conducted Test	Mode 2: Bluetooth Tx Ch00_2402MHz_1Mbps			
Conducted Test Cases	Mode 3: Bluetooth Tx Ch19_2440MHz_1Mbps			
Cases	Mode 4: Bluetooth Tx Ch39_2480MHz_1Mbps			

### Note:

- The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
- 2. AC power line Conducted Emission was tested under maximum output power.
- 3. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.
- 4. EUT is set to continuous transmission mode. duty cycle greater than 98%.


Version.1.2 Page 8 of 42







# **6 SETUP OF EQUIPMENT UNDER TEST**

# 6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

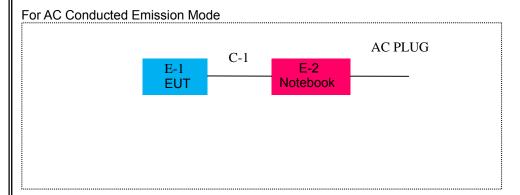

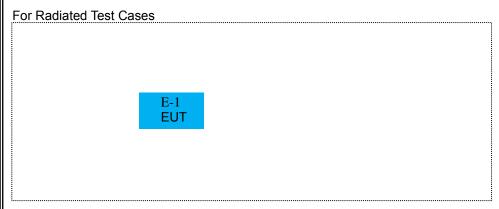

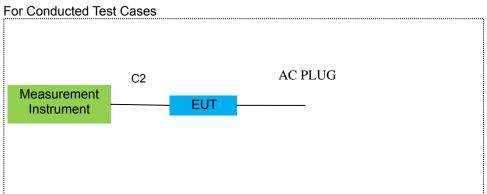

Note:The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Version.1.2 Page 9 of 42





#### **6.2 SUPPORT EQUIPMENT**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

icolo.					
Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
E-1	Bluetooth speaker	N/A	Smart QQ200	2AHHW-SMARTQ Q200	EUT
E-2	Notebook	Lenovo	Thinkpad Edge E430	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	NO	NO	1.2m
C-2	RF Cable	NO	NO	0.5m

#### Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

Version.1.2 Page 10 of 42





# 6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

<u> Radiatio</u>	on Test equipmer	זנ					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibrati on period
1	Spectrum Analyzer	Aglient	E4407B	MY45108040	2017.06.06	2018.06.05	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2016.11.10	2017.11.09	1 year
3	EMI Test Receiver	Agilent	N9038A	MY53227146	2017.06.06	2018.06.05	1 year
4	Test Receiver	R&S	ESPI	101318	2017.06.06	2018.06.05	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2017.04.09	2018.04.08	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2017.06.06	2018.06.05	1 year
7	Horn Antenna	EM	EM-AH-1018 0	2011071402	2017.04.09	2018.04.08	1 year
8	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2017.07.06	2018.07.05	1 year
9	Amplifier	EMC	EMC051835 SE	980246	2016.08.09	2017.08.08	1 year
10	Amplifier	MITEQ	TTA1840-35- HG	177156	2017.06.06	2018.06.05	1 year
11	Loop Antenna	ARA	PLA-1030/B	1029	2017.06.06	2018.06.05	1 year
12	Power Meter	DARE	RPR3006W	15I00041SN O84	2016.08.09	2017.08.08	1 year
13	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year
14	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2017.04.21	2020.04.20	3 year
16	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2017.04.21	2020.04.20	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

# Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test And this temporary antenna connector is listed within the instrument list

Version.1.2 Page 11 of 42





Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2017.06.06	2018.06.05	1 year
2	LISN	R&S	ENV216	101313	2017.04.19	2018.04.18	1 year
3	LISN	SCHWARZBE CK	NNLK 8129	8129245	2017.06.06	2018.06.05	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2017.06.06	2018.06.05	1 year
5	Test Cable (9KHz-30MH z)	N/A	C01	N/A	2017.04.21	2020.04.20	3 year
6	Test Cable (9KHz-30MH z)	N/A	C02	N/A	2017.04.21	2020.04.20	3 year
7	Test Cable (9KHz-30MH z)	N/A	C03	N/A	2017.04.21	2020.04.20	3 year

1	Filter	TRILTHIC	2400MHz	29	2017.04.19	2018.04.18	1 year
---	--------	----------	---------	----	------------	------------	--------

Note: Each piece of equipment is scheduled for calibration once a year.

Version.1.2 Page 12 of 42





#### 7 TEST REQUIREMENTS

#### 7.1 CONDUCTED EMISSIONS TEST

#### 7.1.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01

#### 7.1.2 Conformance Limit

Fragueney/MLI=)	Conducted Emission Limit				
Frequency(MHz)	Quasi-peak	Average			
0.15-0.5	66-56*	56-46*			
0.5-5.0	56	46			
5.0-30.0	60	50			


Note: 1. \*Decreases with the logarithm of the frequency

- 2. The lower limit shall apply at the transition frequencies
- 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.1.4 Test Configuration

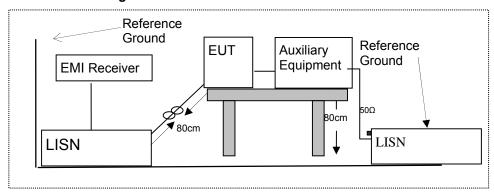

#### 7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
- 2. The EUT was placed on a table which is 0.8m above ground plane.
- 3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- 4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
- 5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 6. LISN at least 80 cm from nearest part of EUT chassis.
- 7. The frequency range from 150KHz to 30MHz was searched.
- Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
- 9. For the actual test configuration, please refer to the related Item -EUT Test Photos.

Version.1.2 Page 13 of 42






#### 7.1.6 **Test Results**

EUT:	Bluetooth speaker	Model Name:	Smart QQ200
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
LIACT VALIDAA .	DC 5V from Notebook AC 120V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Damada
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.178	30.33	9.7	40.03	64.57	-24.54	QP
0.178	20.69	9.7	30.39	54.57	-24.18	AVG
0.478	35.33	9.71	45.04	56.37	-11.33	QP
0.478	33.09	9.71	42.8	46.37	-3.57	AVG
1.066	28.3	9.81	38.11	56.00	-17.89	QP
1.066	9.29	9.81	19.1	46.00	-26.90	AVG
1.478	29.58	9.77	39.35	56.00	-16.65	QP
1.478	25.34	9.77	35.11	46.00	-10.89	AVG
2.282	29.82	9.8	39.62	56.00	-16.38	QP
2.282	17.77	9.8	27.57	46.00	-18.43	AVG
13.4619	33.22	10.07	43.29	60.00	-16.71	QP
13.4619	19.65	10.07	29.72	50.00	-20.28	AVG

# Remark:

- All readings are Quasi-Peak and Average values.
   Factor = Insertion Loss + Cable Loss.

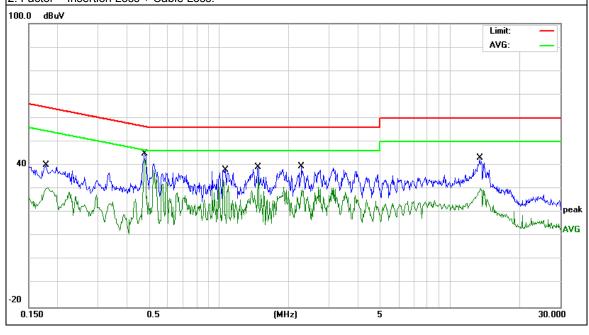

Version.1.2 Page 14 of 42






EUT:	Bluetooth speaker	Model Name:	Smart QQ200
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage:	DC 5V from Notebook AC 120V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Damanda
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.4711	33.26	9.81	43.07	56.49	-13.42	QP
0.4711	27.12	9.81	36.93	46.49	-9.56	AVG
0.522	31	9.81	40.81	56.00	-15.19	QP
0.522	27.62	9.81	37.43	46	-8.57	AVG
1.07	26.24	9.82	36.06	56.00	-19.94	QP
1.07	5.4	9.82	15.22	46.00	-30.78	AVG
1.414	23.97	9.82	33.79	56.00	-22.21	QP
1.414	19.04	9.82	28.86	46.00	-17.14	AVG
3.478	25.33	9.85	35.18	56.00	-20.82	QP
3.478	16.34	9.85	26.19	46.00	-19.81	AVG
13.5139	33.47	10.13	43.6	60.00	-16.40	QP
13.5139	19.84	10.13	29.97	50.00	-20.03	AVG

- All readings are Quasi-Peak and Average values.
   Factor = Insertion Loss + Cable Loss.

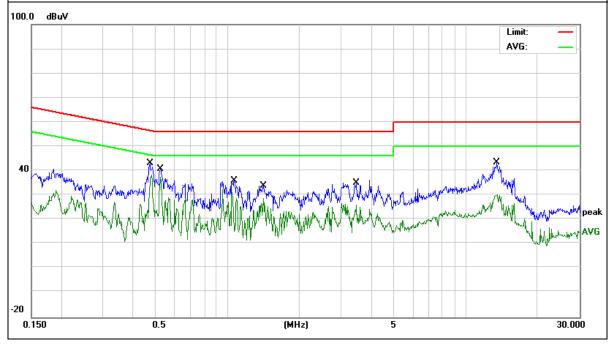

Version.1.2 Page 15 of 42






EUT:	Bluetooth speaker	Model Name:	Smart QQ200
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Llest Voltage .	DC 5V from Notebook AC 240V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.4819	34.51	9.71	44.22	56.31	-12.09	QP
0.4819	26.5	9.71	36.21	46.31	-10.10	AVG
0.534	32.53	9.71	42.24	56.00	-13.76	QP
0.534	27.45	9.71	37.16	46	-8.84	AVG
0.81	29.21	9.75	38.96	56.00	-17.04	QP
0.81	16.59	9.75	26.34	46.00	-19.66	AVG
1.2419	28.82	9.8	38.62	56.00	-17.38	QP
1.2419	20.34	9.8	30.14	46.00	-15.86	AVG
2.7459	30.52	9.89	40.41	56.00	-15.59	QP
2.7459	19.72	9.89	29.61	46.00	-16.39	AVG
3.79	30.24	9.96	40.2	56.00	-15.80	QP
3.79	19	9.96	28.96	46.00	-17.04	AVG

- All readings are Quasi-Peak and Average values.
   Factor = Insertion Loss + Cable Loss.

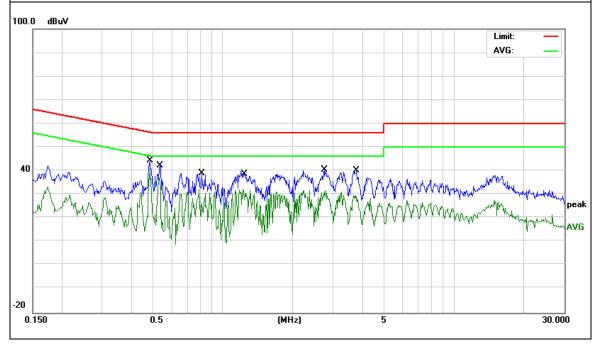

Version.1.2 Page 16 of 42






EUT:	Bluetooth speaker	Model Name:	Smart QQ200
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage:	DC 5V from Notebook AC 240V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Damanis
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.1739	31.11	9.8	40.91	64.77	-23.86	QP
0.1739	24.91	9.8	34.71	54.77	-20.06	AVG
0.4859	34.09	9.81	43.9	56.24	-12.34	QP
0.4859	31.04	9.81	40.85	46.24	-5.39	AVG
0.5264	33.04	9.81	42.85	56.00	-13.15	QP
0.5264	30.91	9.81	40.72	46	-5.28	AVG
1.546	29.53	9.83	39.36	56.00	-16.64	QP
1.546	12.02	9.83	21.85	46.00	-24.15	AVG
3.262	29.14	9.85	38.99	56.00	-17.01	QP
3.262	17.4	9.85	27.25	46.00	-18.75	AVG
14.9739	28.35	10.17	38.52	60.00	-21.48	QP
14.9739	17.56	10.17	27.73	50.00	-22.27	AVG

- All readings are Quasi-Peak and Average values.
   Factor = Insertion Loss + Cable Loss.

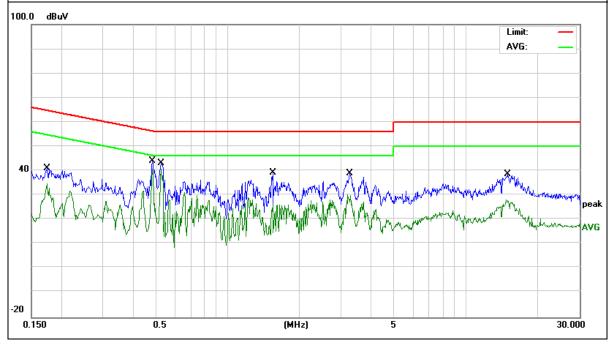

Version.1.2 Page 17 of 42





#### 7.2 RADIATED SPURIOUS EMISSION

### 7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

#### 7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). According to FCC Part15.205, Restricted bands

According to FCC Fart 15.205, Restricted bands						
MHz	MHz	MHz	GHz			
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15			
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46			
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75			
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5			
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2			
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5			
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7			
6.26775-6.26825	123-138	2200-2300	14.47-14.5			
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2			
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4			
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12			
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0			
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8			
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5			
12.57675-12.57725	322-335.4	3600-4400	(2)			
13.36-13.41						

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

(- //	. ` '	
Field Strength (µV/m)	Field Strength (dB <sub>µ</sub> V/m)	Measurement Distance
2400/F(KHz)	20 log (uV/m)	300
2400/F(KHz)	20 log (uV/m)	30
30	29.5	30
100	40	3
150	43.5	3
200	46	3
500	54	3
	Field Strength (µV/m)  2400/F(KHz)  2400/F(KHz)  30  100  150  200	Field Strength (μV/m)       Field Strength (dBμV/m)         2400/F(KHz)       20 log (uV/m)         2400/F(KHz)       20 log (uV/m)         30       29.5         100       40         150       43.5         200       46

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)				
r requericy(ivii iz)	PEAK AVERAGE				
Above 1000	74	54			

Remark :1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.

Version.1.2 Page 18 of 42






# 7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

# 7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

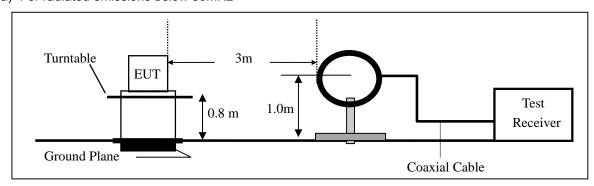

(b) For radiated emissions from 30MHz to 1000MHz

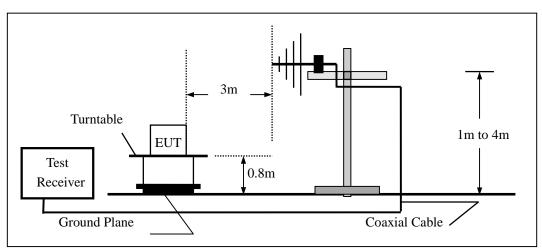

(c) For radiated emissions above 1000MHz

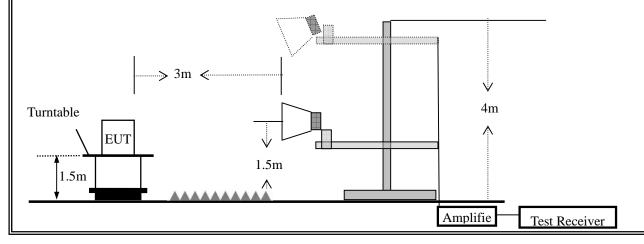

Version.1.2 Page 19 of 42





#### 7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

eco are renewing opeourant analyzer countries	<i>7</i> .
Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For the radiated emission test above 1GHz:
  - Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- g. For the actual test configuration, please refer to the related Item -EUT Test Photos.

#### Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

Version.1.2 Page 20 of 42





During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
Above 1000	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10\*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

# 7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	Bluetooth speaker	Model No.:	Smart QQ200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Susan Su

Freq.	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK AV		PK	AV	PK	AV

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =20log(Specific distance/ test distance)( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

Version.1.2 Page 21 of 42






Spurious Emission below 1GHz (30MHz to 1GHz)
 All the modulation modes have been tested, and the worst result was report as below:

7 111 1110 1110 0101010101	The tite interest and the test to the test tite in the test to the						
EUT:	Bluetooth speaker	Model Name:	Smart QQ200				
Temperature:	20 ℃	Relative Humidity:	48%				
Pressure:	1010hPa	Test Mode:	Mode 1				
Test Voltage:	DC 7.4V from Battery						

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	32.634	4.66	20.04	24.7	40	-15.3	QP
V	37.8121	6.63	17.57	24.2	40	-15.8	QP
V	82.0704	18.73	10.77	29.5	40	-10.5	QP
V	105.6414	10.45	10.35	20.8	43.5	-22.7	QP
V	183.8437	6.42	12.71	19.13	43.5	-24.37	QP
V	297.2241	4.14	14.66	18.8	46	-27.2	QP

# Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

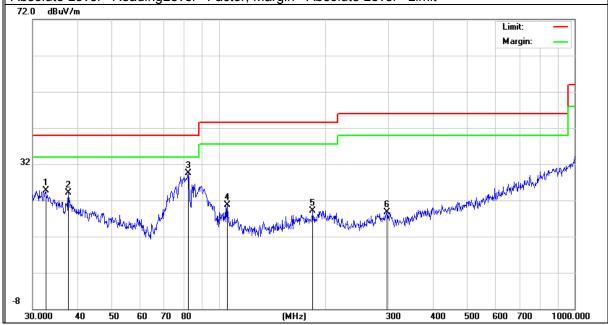


Version.1.2 Page 22 of 42





Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Н	36.7661	4.45	18.09	22.54	40	-17.46	QP
Н	76.7806	16.64	11.56	28.2	40	-11.8	QP
Н	80.9274	17.48	11.22	28.7	40	-11.3	QP
Н	176.2684	8.91	12.66	21.57	43.5	-21.93	QP
Н	329.0389	7.9	13.84	21.74	46	-24.26	QP
Н	419.108	7.35	16.59	23.94	46	-22.06	QP

# Remark:

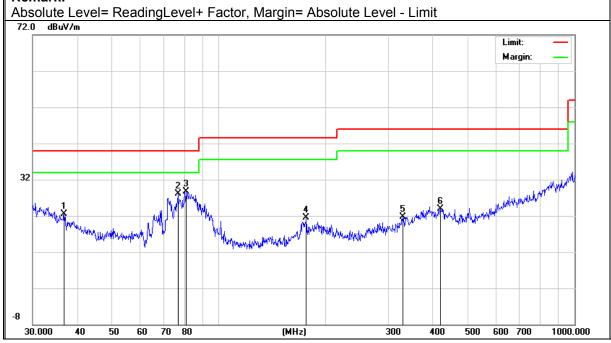

Version.1.2 Page 23 of 42







Spurious Emission Above 1GHz (1GHz to 25GHz)

EUT:	Bluetooth speaker	Model No.:	Smart QQ200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Susan Su

Frequency	Read	Cable	Antenna	Preamp	Emission	Limits	Marain				
Frequency	Level	loss	Factor	Factor	Level	Liiiiis	Margin	Remark	Comment		
(MHz)	(dBµV)	(dB)	dB/m	(dB)	(dBµV/m)	(dBµV/m)	(dB)				
	Low Channel (2402 MHz)-Above 1G										
4804.338	61.72	5.21	35.59	44.30	58.22	74.00	-15.78	Pk	Vertical		
4804.338	42.88	5.21	35.59	44.30	39.38	54.00	-14.62	AV	Vertical		
7206.107	60.55	6.48	36.27	44.60	58.70	74.00	-15.30	Pk	Vertical		
7206.107	42.50	6.48	36.27	44.60	40.65	54.00	-13.35	AV	Vertical		
4804.169	62.87	5.21	35.55	44.30	59.33	74.00	-14.67	Pk	Horizontal		
4804.169	43.46	5.21	35.55	44.30	39.92	54.00	-14.08	AV	Horizontal		
7206.214	62.63	6.48	36.27	44.52	60.86	74.00	-13.14	Pk	Horizontal		
7206.214	40.79	6.48	36.27	44.52	39.02	54.00	-14.98	AV	Horizontal		
			Mid	d Channel (2	2440 MHz)-A	bove 1G					
4880.473	63.43	5.21	35.66	44.20	60.10	74.00	-13.90	Pk	Vertical		
4880.473	42.86	5.21	35.66	44.20	39.53	54.00	-14.47	AV	Vertical		
7320.265	65.94	7.10	36.50	44.43	65.11	74.00	-8.89	Pk	Vertical		
7320.265	42.21	7.10	36.50	44.43	41.38	54.00	-12.62	AV	Vertical		
4880.366	62.42	5.21	35.66	44.20	59.09	74.00	-14.91	Pk	Horizontal		
4880.366	41.32	5.21	35.66	44.20	37.99	54.00	-16.01	AV	Horizontal		
7320.234	61.19	7.10	36.50	44.43	60.36	74.00	-13.64	Pk	Horizontal		
7320.234	44.69	7.10	36.50	44.43	43.86	54.00	-10.14	AV	Horizontal		
			Hig	h Channel (2	2480 MHz)-	Above 1G					
4960.482	62.84	5.21	35.52	44.21	59.36	74.00	-14.64	Pk	Vertical		
4960.482	42.76	5.21	35.52	44.21	39.28	54.00	-14.72	AV	Vertical		
7440.131	65.42	7.10	36.53	44.60	64.45	74.00	-9.55	Pk	Vertical		
7440.131	48.64	7.10	36.53	44.60	47.67	54.00	-6.33	AV	Vertical		
4960.326	63.89	5.21	35.52	44.21	60.41	74.00	-13.59	Pk	Horizontal		
4960.326	44.15	5.21	35.52	44.21	40.67	54.00	-13.33	AV	Horizontal		
7440.199	63.94	7.10	36.53	44.60	62.97	74.00	-11.03	Pk	Horizontal		
7440.199	45.97	7.10	36.53	44.60	45.00	54.00	-9.00	AV	Horizontal		

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz). (2) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(3)All other emissions more than 20dB below the limit.

Version.1.2 Page 24 of 42





T t	00 %	Deletion Homeista	400/					
EUT:	Bluetooth speaker	Model No.:	Smart QQ200					
■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz								

remperature.	20 0	relative Humbarty.	70
Test Mode:	Mode2/ Mode4	Test By:	Susan Su

Frequenc	Meter	Cable	Antenna	Preamp	Emission	Lingita	Manain	Detector	
у	Reading	Loss	Factor	Factor	Level	Limits	Margin	Detector	Comment
(MHz)	(dBµV)	(dB)	dB/m	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type	
				GF	SK				
2310.00	63.77	2.97	27.80	43.80	50.74	74	-23.26	Pk	Horizontal
2310.00	43.75	2.97	27.80	43.80	30.72	54	-23.28	AV	Horizontal
2310.00	61.20	2.97	27.80	43.80	48.17	74	-25.83	Pk	Vertical
2310.00	43.12	2.97	27.80	43.80	30.09	54	-23.91	AV	Vertical
2390.00	64.52	3.14	27.21	43.80	51.07	74	-22.93	Pk	Vertical
2390.00	42.56	3.14	27.21	43.80	29.11	54	-24.89	AV	Vertical
2390.00	64.71	3.14	27.21	43.80	51.26	74	-22.74	Pk	Horizontal
2390.00	42.16	3.14	27.21	43.80	28.71	54	-25.29	AV	Horizontal
2483.50	63.15	3.58	27.70	44.00	50.43	74	-23.57	Pk	Vertical
2483.50	42.36	3.58	27.70	44.00	29.64	54	-24.36	AV	Vertical
2483.50	65.46	3.58	27.70	44.00	52.74	74	-21.26	Pk	Horizontal
2483.50	44.03	3.58	27.70	44.00	31.31	54	-22.69	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.

Version.1.2 Page 25 of 42





# ■ Spurious Emission in Restricted Band 3260MMHz-18000MHz

EUT:	Bluetooth speaker	Model No.:	Smart QQ200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/ Mode4	Test By:	Susan Su

Frequenc	Readin	Cable	Antenn	Preamp	Emission	Limits	Margin	Detect	
у	g Level	Loss	а	Factor	Level	Liiillo	wargiii	or	Comment
(MHz)	(dBµV)	(dB)	dB/m	(dB)	(dBµ V/m)	(dBµ V/m)	(dB)	Туре	Comment
3260	61.96	4.04	29.57	44.70	50.87	74	-23.13	Pk	Vertical
3260	55.61	4.04	29.57	44.70	44.52	54	-9.48	AV	Vertical
3260	64.95	4.04	29.57	44.70	53.86	74	-20.14	Pk	Horizontal
3260	57.10	4.04	29.57	44.70	46.01	54	-7.99	AV	Horizontal
3332	64.57	4.26	29.87	44.40	54.30	74	-19.70	Pk	Vertical
3332	56.28	4.26	29.87	44.40	46.01	54	-7.99	AV	Vertical
3332	65.24	4.26	29.87	44.40	54.97	74	-19.03	Pk	Horizontal
3332	51.20	4.26	29.87	44.40	40.93	54	-13.07	AV	Horizontal
17797	43.39	10.99	43.95	43.50	54.83	74	-19.17	Pk	Vertical
17797	33.91	10.99	43.95	43.50	45.35	54	-8.65	AV	Vertical
17788	43.89	11.81	43.69	44.60	54.79	74	-19.21	Pk	Horizontal
17788	35.03	11.81	43.69	44.60	45.93	54	-8.07	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.

Version.1.2 Page 26 of 42





#### 7.3 6DB BANDWIDTH

# 7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v04

#### 7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

#### 7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

#### 7.3.5 Test Procedure

The testing follows KDB 558074 DTS 01 Meas. Guidance v04

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

 $VBW \geq 3^*RBW$ 

Sweep = auto

Detector function = peak

Trace = max hold

#### 7.3.6 Test Results


EUT:	Bluetooth speaker	Model No.:	Smart QQ200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Susan Su

Channel	Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
Low	2402	703.675	≥500	Pass
Middle	2440	707.641	≥500	Pass
High	2480	719.289	≥500	Pass

Version.1.2 Page 27 of 42






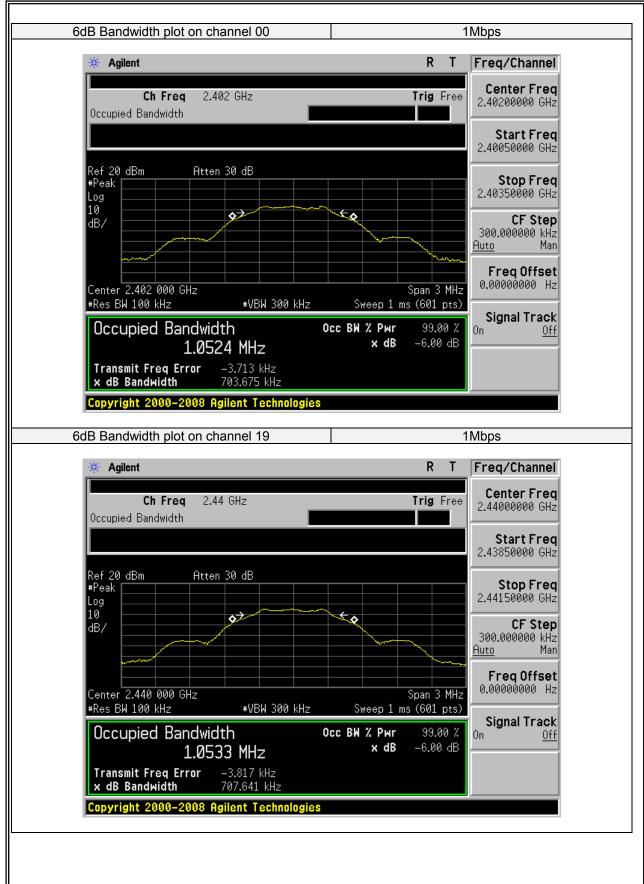

Version.1.2 Page 28 of 42





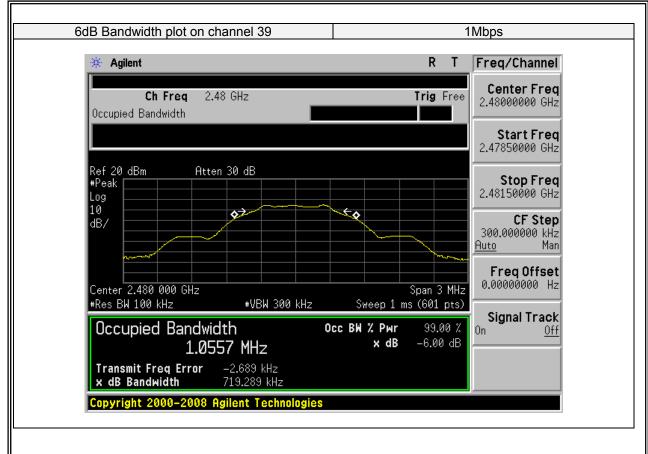

Version.1.2 Page 29 of 42





#### 7.4 PEAK OUTPUT POWER

### 7.4.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v04

#### 7.4.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

#### 7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

#### 7.4.5 Test Procedure

The testing follows KDB 558074 DTS 01 Meas. Guidance v04

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Set the RBW ≥ DTS bandwidth(about 1MHz).

Set VBW =3\*RBW(about 3MHz)

Set the span ≥3\*RBW

Set Sweep time = auto couple.

Set Detector = peak.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

#### 7.4.6 Test Results


EUT:	Bluetooth speaker	Model No.:	Smart QQ200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Susan Su

Test Channel	Frequency (MHz)	Power Setting	Peak Output Power (dBm)	LIMIT (dBm)	Verdict			
1Mbps								
00	2402	Default	-5.9	30	PASS			
19	2440	Default	-4.43	30	PASS			
39	2480	Default	-4.78	30	PASS			

Version.1.2 Page 30 of 42






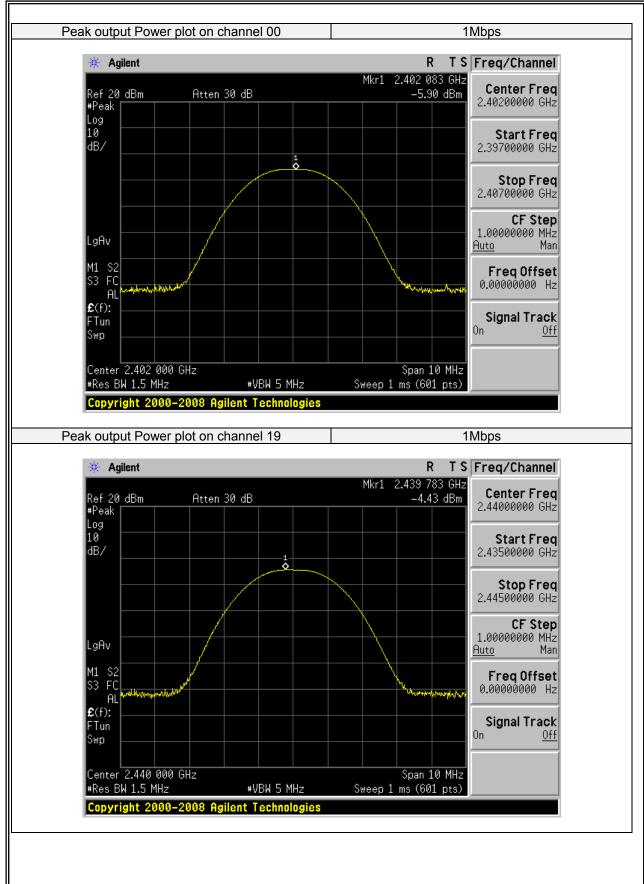

Version.1.2 Page 31 of 42





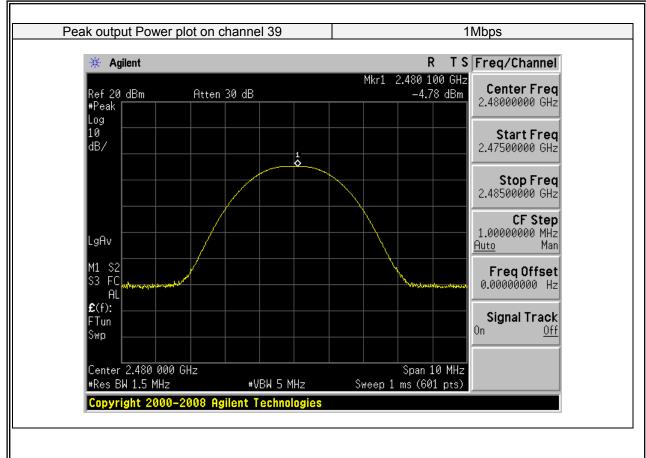

Version.1.2 Page 32 of 42





#### 7.5 POWER SPECTRAL DENSITY

### 7.5.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v04

#### 7.5.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

#### 7.5.5 Test Procedure

The testing follows Measurement Procedure 10.3 Method AVGPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04

This procedure may be used when the maximum (average) conducted output power was used to demonstrate compliance to the output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has an RMS power averaging detector, it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously (duty cycle ≥ 98%); otherwise sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter off time is to be considered).

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set VBW ≥3 x RBW.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing

Version.1.2 Page 33 of 42






# 7.5.6 Test Results

EUT:	Bluetooth speaker	Model No.:	Smart QQ200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Susan Su


Test Channel	Frequency (MHz)	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Verdict					
	1Mbps								
00	2402	-20.97	8	PASS					
19	2440	-19.34	8	PASS					
39	2480	-19.8	8	PASS					

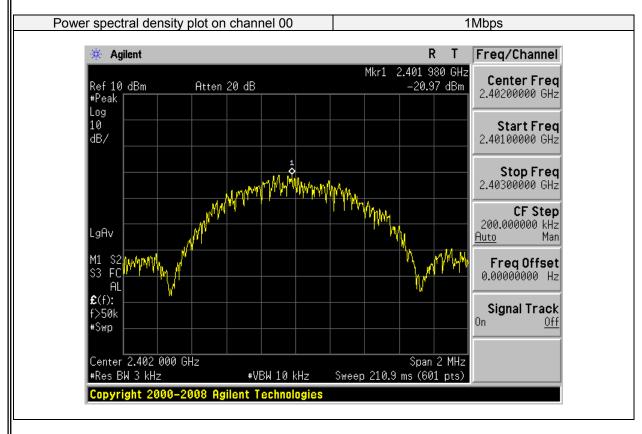

Version.1.2 Page 34 of 42





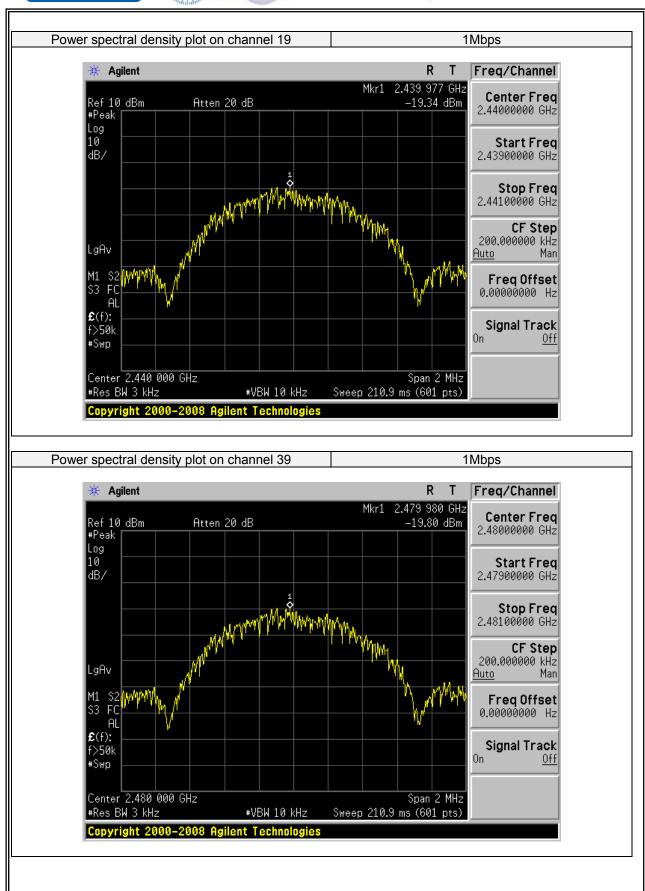

Version.1.2 Page 35 of 42





#### 7.6 CONDUCTED BAND EDGE MEASUREMENT

# 7.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v04

#### 7.6.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### 7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

# 7.6.5 Test Procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.


#### 7.6.6 Test Results

EUT:	Bluetooth speaker	Model No.:	Smart QQ200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode4	Test By:	Susan Su

Version.1.2 Page 36 of 42





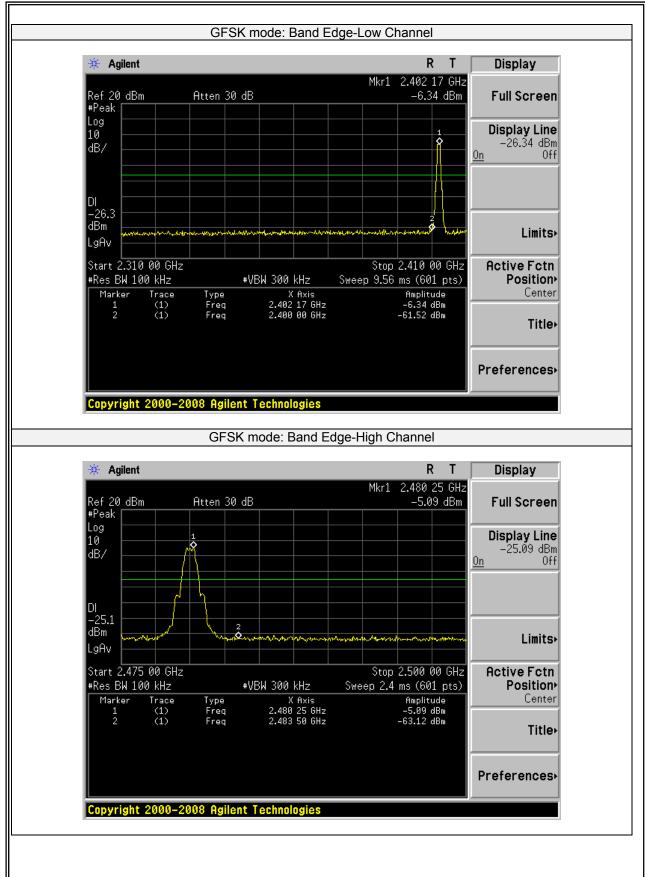

Version.1.2 Page 37 of 42





#### 7.7 SPURIOUS RF CONDUCTED EMISSIONS

#### 7.7.1 Conformance Limit

- 1. Below -20dB of the highest emission level in operating band.
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### 7.7.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.7.3 Test Setup

Please refer to Section 6.1 of this test report.

# 7.7.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequeny range from 9KHz to 26.5GHz.

#### 7.7.5 Test Results

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.


Version.1.2 Page 38 of 42









#### GFSK on channel 00




#### GFSK on channel 00



#### GFSK on channel 00



#### GFSK on channel 00




Version.1.2 Page 39 of 42






#### **Test Plot**


#### GFSK on channel 19




#### GFSK on channel 19



#### GFSK on channel 19



#### GFSK on channel 19




Version.1.2 Page 40 of 42









#### GFSK on channel 39




#### GFSK on channel 39



#### GFSK on channel 39



#### GFSK on channel 39



Version.1.2 Page 41 of 42





# 7.8 ANTENNA APPLICATION

# 7.8.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

# 7.8.2 Result

The EUT antenna is permanent attached PCB antenna(Gain:1dBi). If	It compl	v with the standa	rd requirement
--	----------	-------------------	----------------

**END OF REPORT** 

Version.1.2 Page 42 of 42