


Radio Testing of the

Vayyar Imaging LTD

60GHz fixed field-disturbance sensor or a short-range device for interactive-motion sensing

Models: vStraw_CTPB2, vStraw_CTPB4 and vStraw_CTPB4_I

In accordance with FCC Part 15 Subpart C §15.255

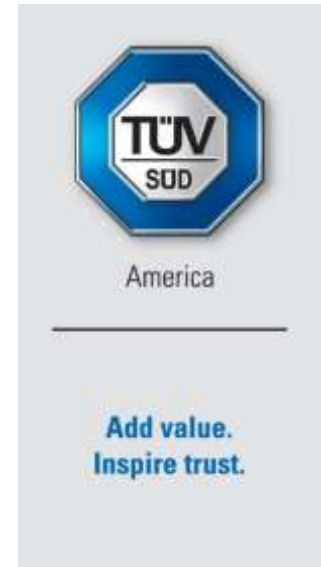

Vayyar Imaging LTD
3 Avramham Giron
Yehud TA 5621717

COMMERCIAL-IN-CONFIDENCE

Date: December 2020
Document Number: 72164880 | Version Number: 01

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Authorized Signatory	Ferdinand S. Custodio	January 03, 2021	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

EXECUTIVE SUMMARY

A sample of this product was tested and found to be in compliance with FCC Part 15 Subpart C §15.255.



DISCLAIMER AND COPYRIGHT

This report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America.

ACCREDITATION

Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.

A2LA Cert. No. 2955.13

TÜV SÜD America, Inc.
10040 Mesa Rim Road
San Diego, CA 92121-2912

TÜV SÜD America, Inc.
Rancho Bernardo Facility
16936 Via Del Campo
San Diego, CA 92127

Phone: 858 678 1400
www.tuv-sud-america.com



REPORT ON	Radio Testing of the Vayyar Imaging LTD Models: vStraw_CTPB2, vStraw_CTPB4 and vStraw_CTPB4_I 60GHz fixed field-disturbance sensor or a short-range device for interactive-motion sensing
TEST REPORT NUMBER	72164880
TEST REPORT DATE	December 2020
PREPARED FOR	Vayyar Imaging LTD 3 Avramham Giron Yehud TA 5621717
CONTACT PERSON	Naftali Chayat Chief Technology Officer naftali.chayat@vayyar.com +972-544-225549
PREPARED BY	 _____ Alex Chang Name Authorized Signatory Title: Senior EMC/RF Wireless Test Engineer
APPROVED BY	 _____ Ferdinand S. Custodio Name Authorized Signatory Title: Senior EMC Test Engineer / Wireless Team Lead
DATED	_____ January 03, 2021



Revision History

72164880 Vayyar Imaging LTD Models: vStraw_CTPB2, vStraw_CTPB4 and vStraw_CTPB4_I 60GHz fixed field-disturbance sensor or a short-range device for interactive-motion sensing					
DATE	OLD REVISION	NEW REVISION/ISSUE NUMBER	REASON	PAGES AFFECTED	APPROVED BY
01/03/2021	—	Initial Release			Ferdinand Custodio



CONTENTS

1	REPORT SUMMARY	5
1.1	Introduction	6
1.2	Brief Summary Of Results	7
1.3	Product Information	8
1.4	EUT Test Configuration	10
1.5	Deviations From The Standard	12
1.6	Modification Record	12
1.7	Test Methodology	12
1.8	Test Facility Location	12
1.9	Test Facility Registration	13
2	TEST DETAILS	14
2.1	Transmitter Power	15
2.2	Conducted Emissions	26
2.3	Frequency Stability	32
2.4	Occupied Bandwidth	36
2.5	Field Strength Of Spurious Radiation	39
3	TEST EQUIPMENT USED	81
3.1	Test Equipment Used (vStraw_CTPB2)	82
3.2	Test Equipment Used (vStraw_CTPB4)	84
3.3	Test Equipment Used (vStraw_CTPB4_I)	86
3.4	Measurement Uncertainty	88
4	DIAGRAM OF TEST SETUP	91
4.1	Test Setup Diagram	92
5	ACCREDITATION, DISCLAIMERS AND COPYRIGHT	96
5.1	Accreditation, Disclaimers And Copyright	97



SECTION 1

1 REPORT SUMMARY

Radio Testing of the
Vayyar Imaging LTD
Models: vStraw_CTPB2, vStraw_CTPB4 and vStraw_CTPB4_I
60GHz fixed field-disturbance sensor or a short-range device for interactive-motion sensing



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Vayyar Imaging LTD Models: vStraw_CTPB2, vStraw_CTPB4 and vStraw_CTPB4_I 60GHz fixed field-disturbance sensor or a short-range device for interactive-motion sensing to the requirements of FCC Part 15 Subpart C §15.255.

Objective	To perform radio testing to determine the Equipment Under Test's (EUT's) compliance with the test specification, for the series of tests carried out. The EUT is part of the V60GHOME family of modules operating at 59 to 64GHz and 61 to 61.5 GHz.
Manufacturer	Vayyar Imaging LTD
EUT	60GHz fixed field-disturbance sensor or a short-range device for interactive-motion sensing
Trade Name	vStraw_CTPB2, vStraw_CTPB4 and vStraw_CTPB4_I
Model Name	vStraw_CTPB2, vStraw_CTPB4 and vStraw_CTPB4_I
FCC ID	2AHIS-V60G-HOME-I
Serial Number(s)	STRBAB2N399U0063 and STRBAB2N399U0032 for Model vStraw_CTPB2 STRBAB4N479U0047 (24 Transmitters) and STRA1B4N030U0070 (12 Transmitters) for model vStraw_CTPB4 STRA1B4N030U0068 and STRA1B4N030U0064 for model vStraw_CTPB4_I
Number of Samples Tested	6
Test Specification/Issue/Date	FCC Part 15 Subpart C §15.255 (October 1, 2019).
Start of Test / Finish of Test (vStraw_CTPB2)	October 30, 2019 to November 24, 2019
Start of Test / Finish of Test (vStraw_CTPB4)	February 02, 2020 to February 12, 2020
Start of Test / Finish of Test (vStraw_CTPB4_I)	August 20, 2020 to August 27, 2020
Name of Engineer(s)	Ferdinand Custodio
Related Document(s)	72152870A Issue 2/Version Number 1 Vayyar Starw FCC IC Part 15.255 Test Report (Issue by TÜV SÜD America on November 27, 2019)



- 72156288 Issue 3/Version Number 1 Vayyar vStraw FCC IC Part 15.255 Test Report (Issued by TÜV SÜD America on February 19, 2020)
- 72162382 Issue 2/Version Number 01 Vayyar vStraw FCC IC Part 15.255 Test Report (Issued by TÜV SÜD America on October 02, 2020)
- ANSI C63.10-2013. American National Standard of Procedures for Compliance testing of Unlicensed Wireless Devices.
- MPR for b2vStraw – Manual_23Oct19.pdf
- Supporting documents for EUT certification are separate exhibits.



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC Part 15 Subpart C §15.255 are shown below:

Section	§15.255 Spec Clause	Test Description	Result	Comments/Base Standard
2.1	§15.255(c)(2)(3) and (e)	Transmitter Power	Compliant*	
2.2	§15.207(a)	Conducted Emissions	Compliant*	
2.3	§15.255(f)	Frequency Stability	Compliant*	
2.4	§15.255(e)	Occupied Bandwidth	Compliant*	
2.5	§15.255(d)(1)(2) and (3)	Field Strength of Spurious Radiation	Compliant*	

Compliant* Test results were referenced from the original test reports issued by TÜV SÜD America combining each models into a single test report with new FCC ID. Therefore, no further testing considered necessary. The original test reports are:

- 72152870A issue 2/version number 01 issued on November 27, 2019
- 72156288 issue 03/version number 01 issued on February 19, 2020
- 72162382 issue 02/version number 01 issued on October 02, 2020

1.3 PRODUCT INFORMATION

1.3.1 Technical Description

The Equipment Under Test (EUT) is a Vayyar Imaging LTD, model: vStraw_CTPB4 and vStraw_CTPB4_I 60GHz fixed field-disturbance sensor or a short-range device for interactive-motion sensing. The EUT is part of the V60GHOME family of modules operating at 60GHz - acting as either fixed field-disturbance sensor or a short-range device for interactive-motion sensing. The DUT was tested using two transmission profiles: one utilizing 12 simultaneous transmitters, and the other 24 simultaneous transmitters. The frequency modulation method and grid remain similar.

The models certified under this family are intended to be certified as modules, under modular approval, to be integrated in multiple products, or operated with a host-PC. The family will include, but not restricted to, the following members, having the same RF components, antennas type and array, RF layout and stack-up and same transmissions profile within 57-71GHz – differ only by their DC and digital interfaces:

- vBLU_OK_CTPB2, vBLU_MW_CTPB2 – SPI interface, 30-pin DC\digital connector (2 types)
- vStraw_CTPB2 – USB + SPI interface and connector

The V60G-HOME-I family will include, but not restricted to, the following members, having the same RF components, antennas type and array, RF layout and stack-up and same transmission profiles within the 57-71GHz and 61-61.5GHz bands – differ only by their DC and digital interfaces:

- vBLU_OK_CTPB4, vBLU_MW_CTPB4 – SPI interface, 30-pin DC/digital connector (2 types)



- vStraw_CTPB4 – USB + SPI interface and connector





Summary of the differences between the models:

	vStraw_CTPB4	vBLU_OK_CTPB4	vBLU_MW_CTPB4
Interface	USB through CYUSB2014	SPI	SPI
Voltage supply	5V for RF and I/O	5V for RF & Digital 3.3V for external I/O	5V for RF & Digital 3.3V for external I/O
Connector	uUSB	OK-06F030-04	2BBDVM-F-30pin

Note: vStraw_CTPB4_I model operates from 61 to 61.5GHz instead of 59 to 64GHz.

1.3.2 EUT General Description

EUT Description	60GHz fixed field-disturbance sensor or a short-range device for interactive-motion sensing
Trade Name	vStraw_CTPB2, vStraw_CTPB4 and vStraw_CTPB4_I
Model Name	vStraw_CTPB2, vStraw_CTPB4 and vStraw_CTPB4_I
Rated Voltage	USB powered (5VDC)
Mode Verified	60GHz radar
Capability	60GHz radar
Frequency Range	59-64GHz(vStraw_CTPB2) and 59-64GHz(vStraw_CTPB4) 61-61.5GHz(vStraw_CTPB4_I)
Primary Unit (EUT)	☐ Production ☒ Pre-Production ☐ Engineering
Transmission Mode	MIMO (24 x 22)
Number of TX Outputs	8 – 24 (transmitting each time in parallel with 12 or 24 TX-ports each one connected to a separate TX-antennas (MIMO), switching the phase at a high-rate (~1usec rate), changing the momentary beam-form)
Antenna Type	PCB embedded
Manufacturer	Vayyar Imaging LTD.
Single Antenna Gain	5.7 dBi
Effective Gain	16.5 dBi (5.7 dBi + 10*log10(12)) for 12 TX configuration 19.5 dBi (5.7 dBi + 10*log10(24)) for 24 TX configuration



1.4 EUT TEST CONFIGURATION

1.4.1 Test Configuration Description

Test Configuration	Description
A	EUT model vStraw_CTPB2 The EUT was connected to a support laptop via a short USB cable. Vayyar Multiport Recorder 2.1.1 was used to configure the EUT for verifications. The manufacturer provided detailed instructions to exercise the EUT (MPR for b2vStraw - Manual_23Oct19.pdf). For power measurement, the manufacturer provided a separate test profile in order to stop the sweep. The EUT is capable of both chirp and stepped CW transmissions modes. Default power setting used was -10dBm.
B	EUT model vStraw_CTPB4: The EUT was connected to a support laptop via a short USB cable. Vayyar Multiport Recorder 2.1.10 was used to configure the EUT for verifications. The manufacturer provided detailed instructions to exercise the EUT (MPR for b2vStraw - Manual_23Oct19.pdf). For power measurement, the manufacturer provided a separate test profile transmitting a representing state of a fixed frequency and waveform at high duty-cycle. Default power setting used was -10dBm. The measurements were taken at DUT board-temperature of 60°C and 48°C for the 12-transmitters and 24-transmitters, respectively, referring to potential typical conditions of the PCB in a product.
C	EUT model vStraw_CTPB4_I: The EUT was connected to a support laptop via a short USB cable. Vayyar Multiport Recorder 2.4.7 was used to configure the EUT for verifications. The manufacturer provided detailed instructions to exercise the EUT (MPR for b2vStraw - Manual_23Oct19.pdf). The manufacturer provided four separate test profiles for verifications: • bpsk12 – full sweep • bpsk12 – single frequency • bpsk24 – full sweep • bpsk24 – single frequency

1.4.2 EUT Exercise Software

EUT model vStraw_CTPB2: Vayyar Multiport recorder 2.1.1

EUT model vStraw_CTPB4: Vayyar Multiport recorder 2.1.10

EUT model vStraw_CTPB4_I: Vayyar Multiport Recorder 2.4.7




1.4.3 Support Equipment and I/O cables

Model vStraw_CTPB2 and vStraw_CTPB4		
Manufacturer	Equipment/Cable	Description
Lenovo	Laptop Thinkpad T440S	Type: 20AR-S4250S S/N PC-03BBGR
Lenovo	Laptop Power Supply	Model ADLX45NCC2A S/N 10E75794C1SG7B84A60
Vention	USB Type A to Type B micro cable	2-meters, USB 2.0 cable

Model vStraw_CTPB4_I		
Manufacturer	Equipment/Cable	Description
Lenovo	Laptop Thinkpad T440S	Type: 20AR-S4250S S/N PC-03BBGR
Lenovo	Laptop Power Supply	Model ADLX45NCC2A S/N 10E75794C1SG7B84A60
LINDY	USB Type A to Type B micro cable	1-meter, USB 2.0 cable

1.4.4 Simplified Test Configuration Diagram

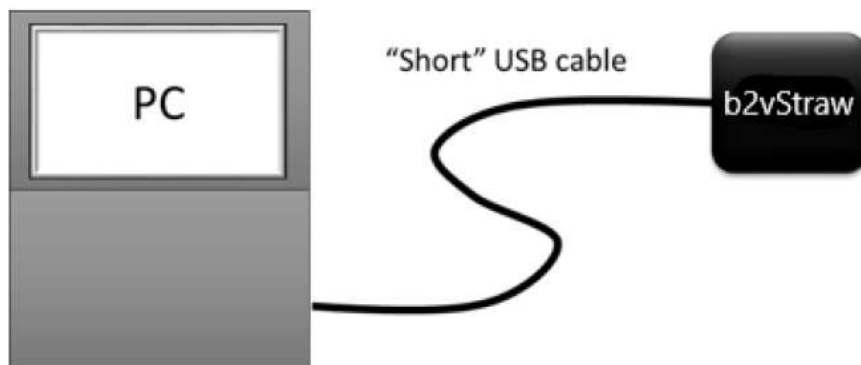



1.5 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.6 MODIFICATION RECORD

Description of Modification	Modification Fitted By	Date Modification Fitted
Model: vStraw_CTPB2		
Serial Number: STRBAB2N399U0063 and STRBAB2N399U0032		
None	—	—
Model: vStraw_CTPB4		
Serial Number: STRBAB4N479U0047 (24 Transmitters) and STRA1B4N030U0070 (12 Transmitters)		
None	—	—
Model: vStraw_CTPB4_I		
Serial Number: STRA1B4N030U0068 and STRA1B4N030U0064		
None	—	—

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

1.7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

For conducted and radiated emissions, the equipment under test (EUT) was configured to measure its highest possible emission level. This level was based on the maximized cable configuration from exploratory testing per ANSI C63.10-2013. The test modes were adapted according to the Operating Instructions provided by the manufacturer/client.

1.8 TEST FACILITY LOCATION

1.8.1 TÜV SÜD America Inc. (Mira Mesa)

10040 Mesa Rim Road, San Diego, CA 92121-2912 (32.901268,-117.177681). Phone: (858) 678 1400 Fax: (858) 546 0364

1.8.2 TÜV SÜD America Inc. (Rancho Bernardo)

16936 Via Del Campo, San Diego, CA 92127-1708 (33.018644,-117.092409). Phone: (858) 678 1400 Fax: (858) 546 0364.



1.9 TEST FACILITY REGISTRATION

1.9.1 FCC – Designation No.: US1146

TÜV SÜD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.948 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Designation is US1146.

1.9.2 Innovation, Science and Economic Development Canada (ISED) Registration No.: 3067A-1 & 22806-1

The 10m Semi-anechoic chamber of TÜV SÜD America Inc. (San Diego Rancho Bernardo) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 3067A-1.

The 3m Semi-anechoic chamber of TÜV SÜD America Inc. (San Diego Mira Mesa) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 22806-1.

1.9.3 BSMI – Laboratory Code: SL2-IN-E-028R (US0102)

TÜV Product Service Inc. (San Diego) is a recognized EMC testing laboratory by the BSMI under the MRA (Mutual Recognition Arrangement) with the United States. Accreditation includes CNS 13438 up to 6GHz.

1.9.4 NCC (National Communications Commission - US0102)

TÜV SÜD America Inc. (San Diego) is listed as a Foreign Recognized Telecommunication Equipment Testing Laboratory and is accredited to ISO/IEC 17025 (A2LA Certificate No.2955.13) which under APEC TEL MRA Phase 1 was designated as a Conformity Assessment Body competent to perform testing of equipment subject to the Technical Regulations covered under its scope of accreditation including RTTE01, PLMN01 and PLMN08 for TTE type of testing and LP0002 for Low-Power RF Device type of testing.

1.9.5 VCCI – Registration No. A-0280 and A-0281

TÜV SÜD America Inc. (San Diego) is a VCCI registered measurement facility which includes radiated field strength measurement, radiated field strength measurement above 1GHz, mains port interference measurement and telecommunication port interference measurement.

1.9.6 RRA – Identification No. US0102

TÜV SÜD America Inc. (San Diego) is National Radio Research Agency (RRA) recognized laboratory under Phase I of the APEC Tel MRA.

1.9.7 OFCA – U.S. Identification No. US0102

TÜV SÜD America Inc. (San Diego) is recognized by Office of the Communications Authority (OFCA) under Appendix B, Phase I of the APEC Tel MRA.



SECTION 2

2 TEST DETAILS

Radio Testing of the
Vayyar Imaging LTD

Models: vStraw_CTPB2, vStraw_CTPB4 and vStraw_CTPB4_I
60GHz fixed field-disturbance sensor or a short-range device for interactive-motion sensing



2.1 Transmitter Power

2.1.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.255(c)(3) and (e)

2.1.2 Standard Applicable

(c) Within the 57-71 GHz band, emission levels shall not exceed the following equivalent isotropically radiated power (EIRP):

(2) For fixed field disturbance sensors that occupy 500 MHz or less of bandwidth and that are contained wholly within the frequency band 61.0-61.5 GHz, the average power of any emission, measured during the transmit interval, shall not exceed 40 dBm, and the peak power of any emission shall not exceed 43 dBm. In addition, the average power of any emission outside of the 61.0-61.5 GHz band, measured during the transmit interval, but still within the 57-71 GHz band, shall not exceed 10 dBm, and the peak power of any emission shall not exceed 13 dBm.

(3) For fixed field disturbance sensors other than those operating under the provisions of paragraph (c)(2) of this section, and short-range devices for interactive motion sensing, the peak transmitter conducted output power shall not exceed -10 dBm and the peak EIRP level shall not exceed 10 dBm.

(e) Except as specified paragraph (e)(1) of this section, the peak transmitter conducted output power shall not exceed 500 mW. Depending on the gain of the antenna, it may be necessary to operate the intentional radiator using a lower peak transmitter output power in order to comply with the EIRP limits specified in paragraph (c) of this section.

2.1.3 Equipment Under Test and Modification State

Serial No: STRBAB2N399U0063 / Test Configuration A

Serial No: STRBAB4N479U0047 and STRA1B4N030U0070 / Test Configuration B

Serial No: STRA1B4N030U0068 and STRA1B4N030U0064 / Test Configuration C

2.1.4 Date of Test/Initial of test personnel who performed the test

November 24, 2019 / FSC (vStraw_CTPB2)

February 03, 2020 / FSC (vStraw_CTPB4)

August 24, 2020 / FSC (vStraw_CTPB4_I)

2.1.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo / Mira Mesa facility

Ambient Temperature	22.8 °C	23.5 °C
Relative Humidity	33.8 %	36.4 %
ATM Pressure	99.4 kPa	99.8 kPa



2.1.7 Additional Observations

Model: vStraw_CTPB2

- This is a radiated test.
- Test methodology is per Section 9.11 of ANSI C63.10-2013.
- The EUT is capable of both Chirp and Stepped CW transmission modes (59-64GHz). The sweep was stopped and only the worst transmission mode presented (single CW).
- The manufacturer provided a test profile with the highest possible duty cycle and the longest burst (10-100msec).
- Test performed using a RF detector, low noise amplifier, active multiplier chain, direct reading attenuator and corresponding horn antenna.
- Multiple frequencies were verified and only the worst presented. It was observed that single CW modes are highest at the middle as verified by using the traditional harmonic mixer method.
- Once the EUT profile was determined using a RF detector, The EUT was replaced with a known source with a variable attenuator. Starting at the max attenuation, the attenuator was adjusted until identical profile of the EUT was achieved. The EIRP at this point was calculated.

Model: vStraw_CTPB4

- This is a radiated test.
- Test methodology is per Section 9.11 of ANSI C63.10-2013.
- The EUT is capable of both Chirp and Stepped CW transmission modes (59-64GHz). The sweep was stopped and only the worst transmission mode presented (single CW).
- The manufacturer provided a test profile with the highest possible duty cycle and the longest burst (10-100msec).
- Test performed using a RF detector, low noise amplifier, active multiplier chain, direct reading attenuator and corresponding horn antenna.
- 62GHz was used on the original filing as worst-case CW mode, 63GHz was used as worst-case power estimation per RFIC inherent slope of power vs frequency, affected by updated gain settings for this test to meet the required mask.
- Once the EUT profile was determined using a RF detector, The EUT was replaced with a known source with a variable attenuator. Starting at the max attenuation, the attenuator was adjusted until identical profile of the EUT was achieved. The EIRP at this point was calculated.

Model: vStraw_CTPB4_I

- This is a radiated test.
- Test methodology is per Section 9.11 of ANSI C63.10-2013.
- During initial investigation using RF detector, it was verified that full sweep profiles are worse case than the single frequency test profiles. Only full sweep test results presented.
- Test performed using a RF detector, active multiplier chain, direct reading attenuator and corresponding horn antenna.
- Once the EUT profile was determined using a RF detector, The EUT was replaced with a known source with a variable attenuator. Starting at the max attenuation, the attenuator was adjusted until identical profile of the EUT was achieved. The EIRP at this point was calculated.




2.1.8 Test Result for vStraw_CTPB2 (worst case stopped CW mode)

Frequency	Peak Power (EIRP)	Conducted Peak Power
62 GHz (representative TX)	5.74 dBm	-10.76 dBm
EUT sweeps from 59GHz to 64GHz. Only the worst frequency presented using RF Detector method.		

2.1.9 Sample Calculation


Active Multiplier Chain power output @ 62GHz	= 13.50 dBm
Gain Horn -WR15/HO15R (SDGE09004)	= 23.24 dBi
Direct Reading Attenuator setting to replicate EUT profile	= 31.00 dB
Substitution Peak EIRP	= 5.74 dBm

2.1.10 Sample Test Plots

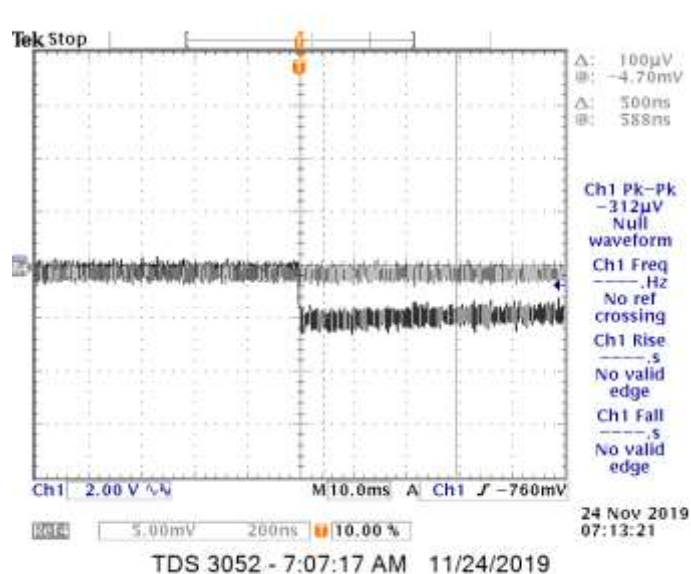


EUT profile using a RF detector



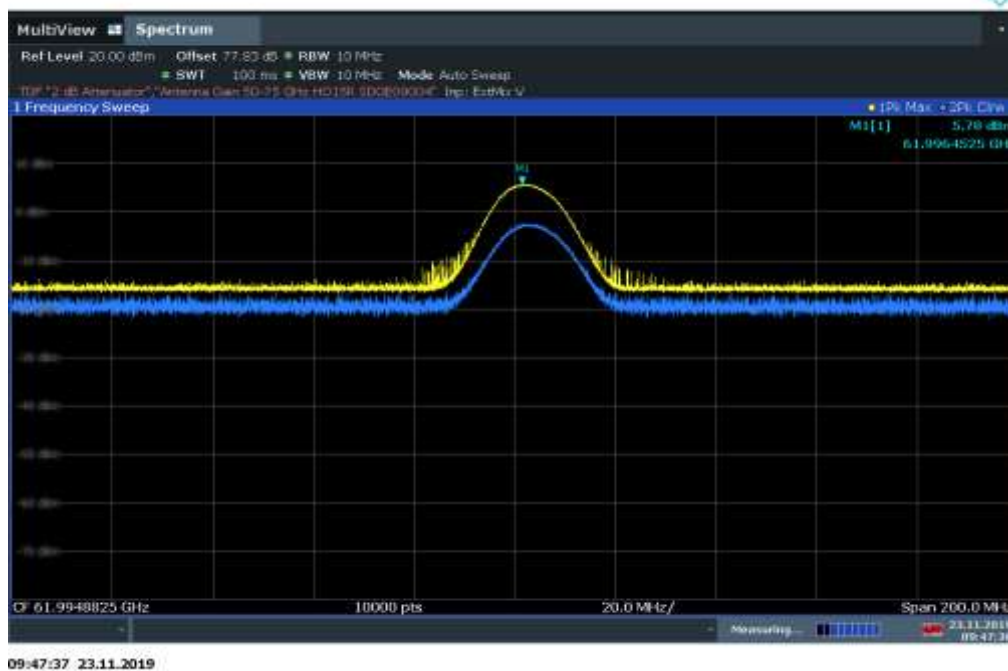

Peak Verification using Harmonic Mixer (Middle Range)

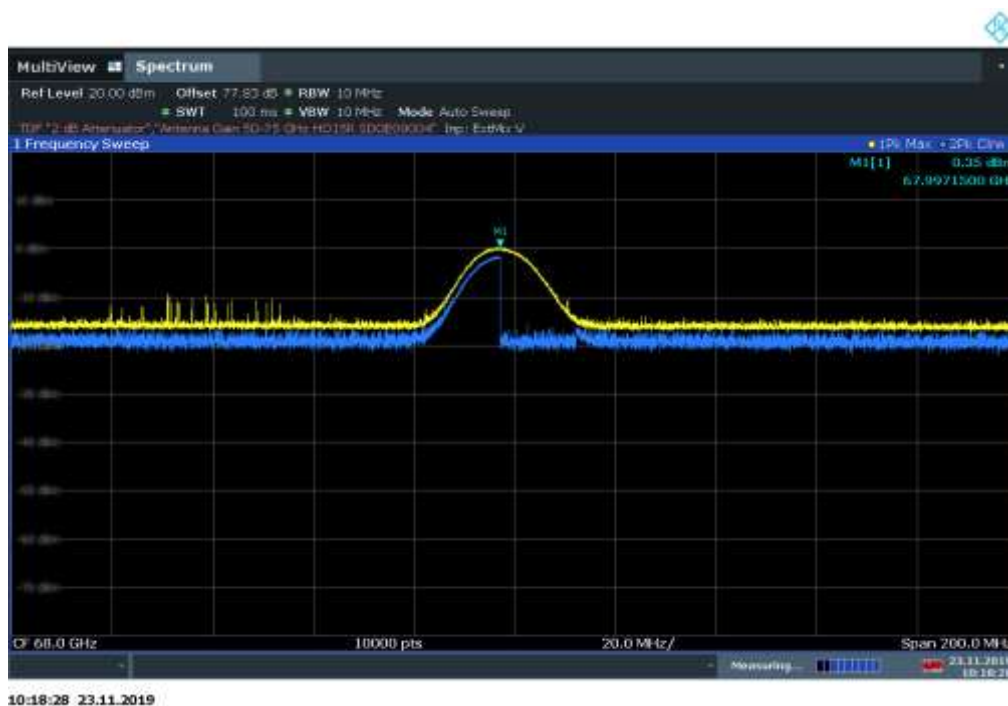

Peak Verification using Harmonic Mixer (High Range)



2.1.11 Test Result for vStraw_CTPB4 (worst case stopped CW mode)

Frequency	Peak Power (EIRP)	Conducted Peak Power
63 GHz (12 Transmitters)	5.74 dBm	-10.06 dBm
63 GHz (24 Transmitters)	8.74 dBm	-10.06 dBm
EUT sweeps from 59GHz to 64GHz. Only the worst frequency presented using RF Detector method.		

	12 Transmitter	24 Transmitters	§15.255 Requirements
$P_{\text{Conducted}}$	-10.7 dBm	-10.7 dBm	≤ -10 dBm
$\text{Gain}_{\text{Total}}$	16.5 dBi	19.5 dBi	
EIRP_{MAX}	5.8 dBm	8.8 dBm	≤ 10 dBm

2.1.12 12 Transmitters Calculation


Active Multiplier Chain power output @ 63GHz = 13.00 dBm
Gain Horn -WR15/HO15R (SDGE09004) = 23.24 dBi
Direct Reading Attenuator setting to replicate EUT profile = 30.50 dB

Substitution Peak EIRP = 5.74 dBm


2.1.13 24 Transmitters Calculation

Active Multiplier Chain power output @ 63GHz = 13.00 dBm
Gain Horn -WR15/HO15R (SDGE09004) = 23.24 dBi
Direct Reading Attenuator setting to replicate EUT profile = 27.50 dB


Substitution Peak EIRP = 8.74 dBm

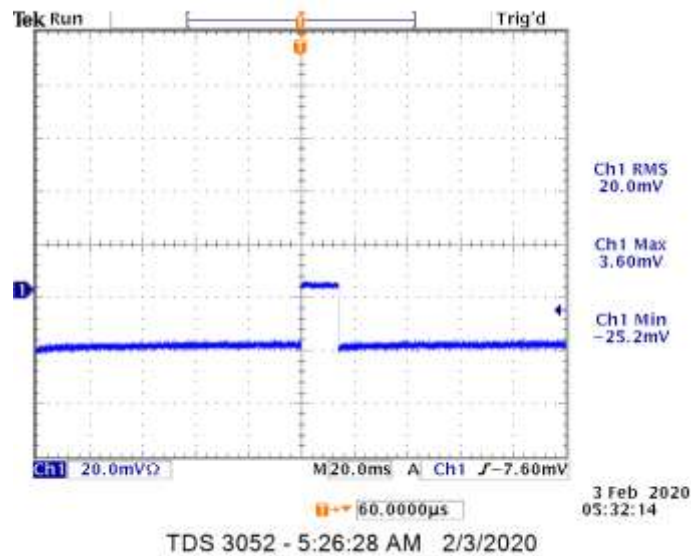


EUT (12 Transmitter) profile using a RF detector

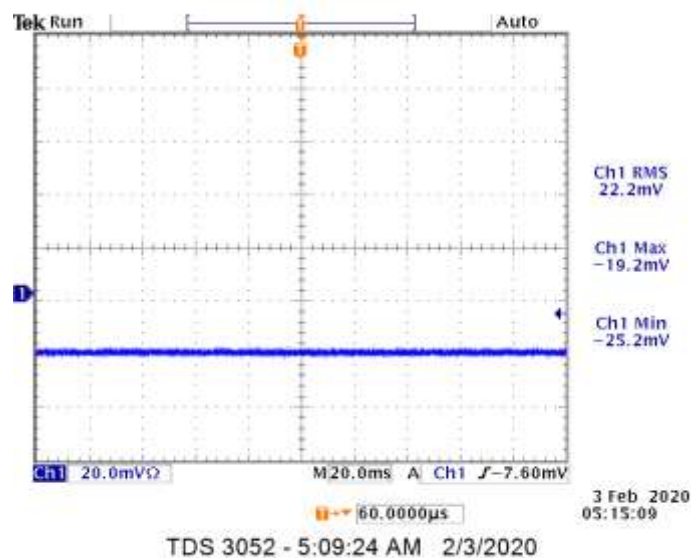

Profile using a known source (active multiplier chain with a direct reading attenuator)

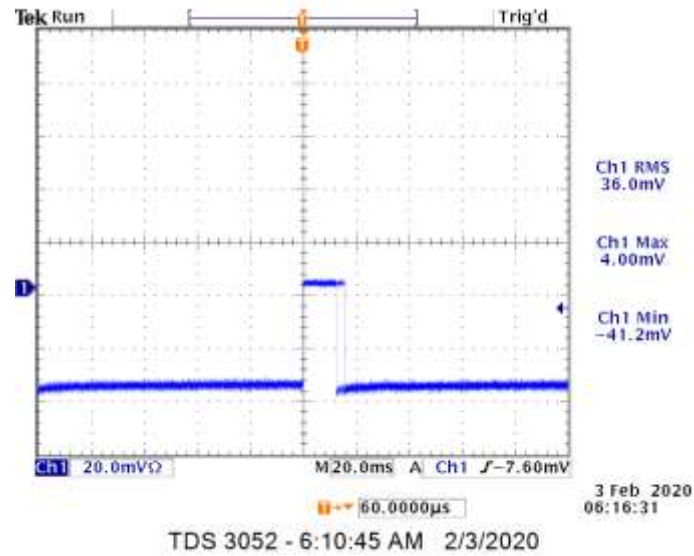

EUT (24 Transmitter) profile using a RF detector

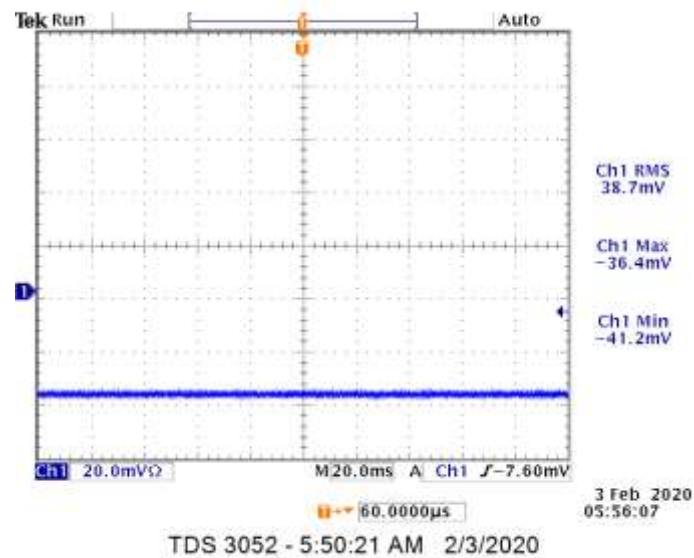

Profile using a known source (active multiplier chain with a direct reading attenuator)



2.1.14 Test Result for vStraw_CTPB4_I (worst case mode – full sweep)

Frequency	Peak Power (EIRP)	Conducted Peak Power
61 to 61.5 GHz (12 Transmitters)	26.71 dBm	10.21 dBm
61 to 61.5 GHz (24 Transmitters)	24.06 dBm	4.56 dBm


	12 Transmitters	24 Transmitters	§15.255 Requirements
Peak _{Conducted}	10.21 dBm	4.56 dBm	≤ 27 dBm
Peak _{EIRP}	26.71 dBm	24.06 dBm	≤ 43 dBm
Average _{EIRP}	N/A (Peak complies with Average limits)		≤ 40 dBm

2.1.15 12 Transmitters Calculation

Active Multiplier Chain power output @ 61GHz	= 13.25 dBm
Gain Horn -WR15/HO15R (SDGE09004)	= 23.21 dBi
Direct Reading Attenuator setting to replicate EUT profile	= 09.75 dB
Substitution Peak EIRP	= 26.71 dBm


2.1.16 24 Transmitters Calculation

Active Multiplier Chain power output @ 61GHz	= 13.25 dBm
Gain Horn -WR15/HO15R (SDGE09004)	= 23.21 dBi
Direct Reading Attenuator setting to replicate EUT profile	= 12.40 dB
Substitution Peak EIRP	= 24.06 dBm

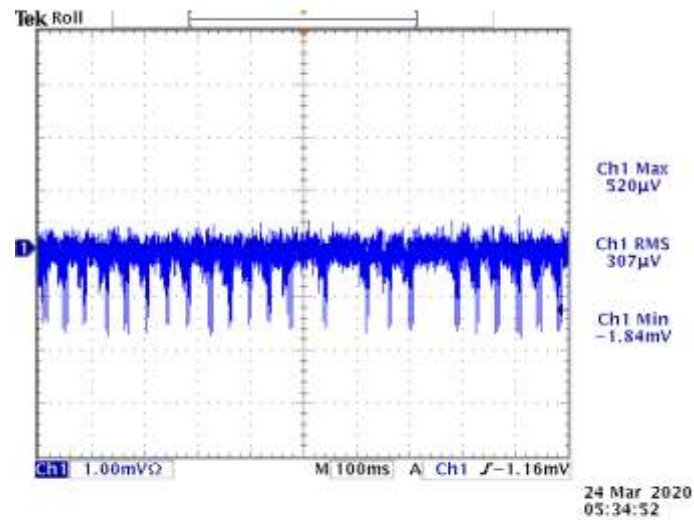


TDS 3054 - 2:03:06 PM 8/24/2020

EUT (12 Transmitter) profile using a RF detector

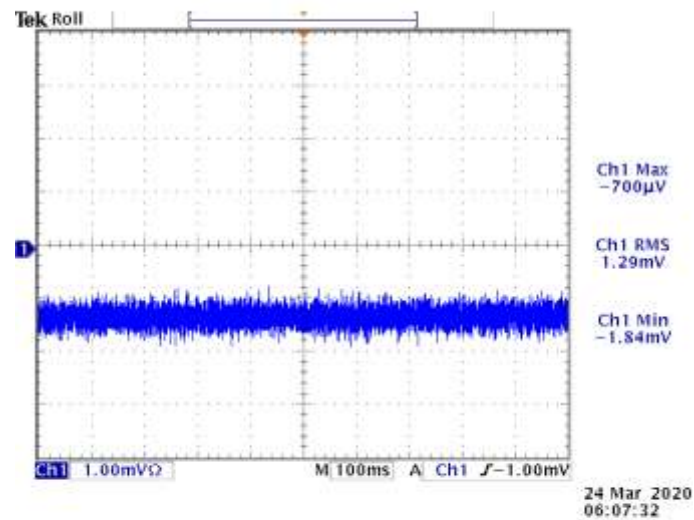


TDS 3054 - 2:35:45 PM 8/24/2020

Profile using a known source (active multiplier chain with a direct reading attenuator)

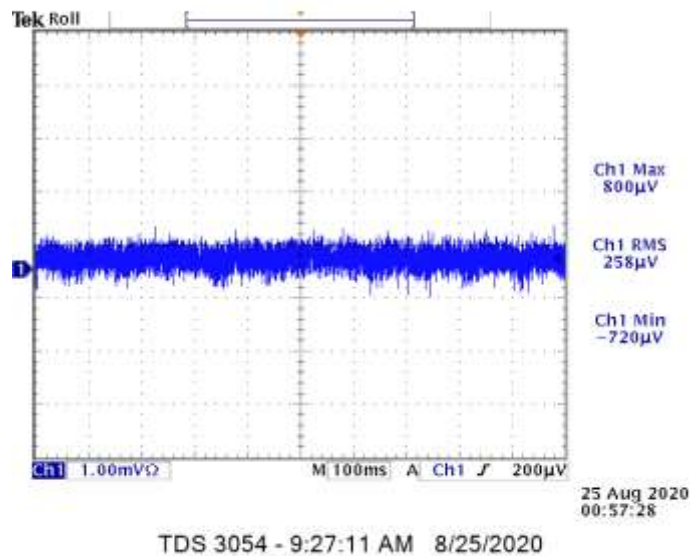

EUT (24 Transmitter) profile using a RF detector

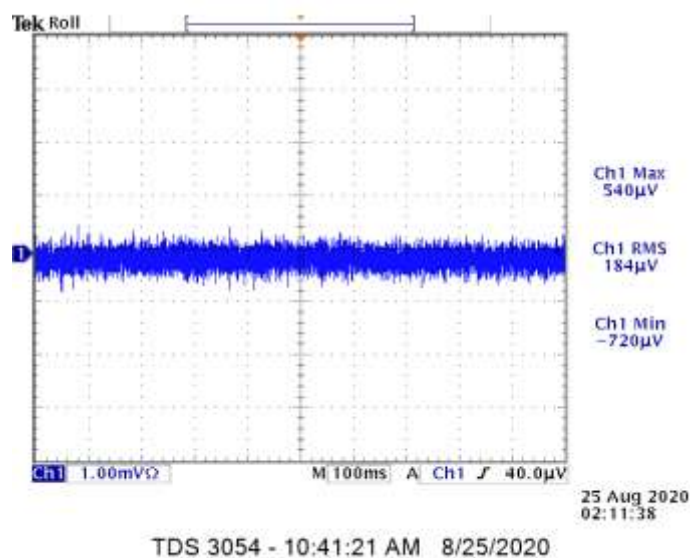

Profile using a known source (active multiplier chain with a direct reading attenuator)



2.2 Conducted Emissions

2.2.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.207(a)

2.2.2 Standard Applicable

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

2.2.3 Equipment Under Test and Modification State

Serial No: STRBAB2N399U0063 / Test Configuration A
Serial No: STRA1B4N030U0068 / Test Configuration C

2.2.4 Date of Test/Initial of test personnel who performed the test

November 24, 2019 / FSC (vStraw_CTPB2)
August 20, 2020 / FSC (vStraw_CTPB4_I)

2.2.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo / Mira Mesa facility

Ambient Temperature	22.8 °C	22.6 °C
Relative Humidity	33.8 %	61.2 %
ATM Pressure	99.4 kPa	100.0 kPa



2.2.7 Additional Observations

Model: vStraw_CTPB2

- EUT is USB powered and does not have provision to be connected with the public AC mains. Test was performed only to show general compliance of the EUT with the requirement with a representative support equipment powering the EUT.
- Measurement was done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.2.8 for sample computation

Model: vStraw_CTPB4_I

- EUT is USB powered. Test performed with a representative support laptop providing power.
- Measurement was done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.2.8 for sample computation.

2.2.8 Sample Computation (Conducted Emission – Quasi Peak)


Measuring equipment raw measurement (dBμV) @ 150kHz			5.5
Correction Factor (dB)	Asset# 8607 (20 dB attenuator)	19.9	20.7
	Asset# 1177 (cable)	0.15	
	Asset# 1176 (cable)	0.35	
	Asset# 7568 (LISN)	0.30	
Reported QuasiPeak Final Measurement (dBμV) @ 150kHz			26.2

2.2.9 Test Results

Compliant. See attached plots and tables.



2.2.10 Model: vStraw_CTPB2
Line 1 on the support laptop (representative configuration powering the EUT)

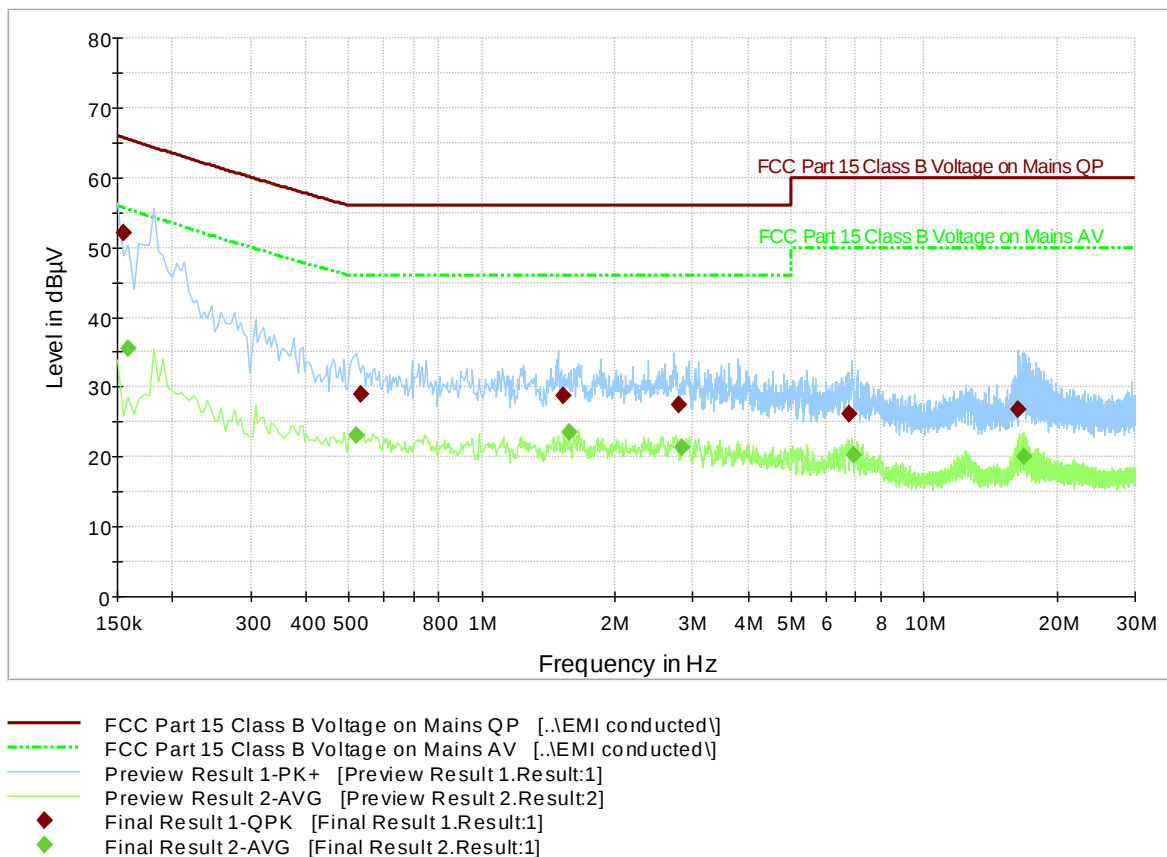

Quasi Peak


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV)
0.154500	52.1	1000.0	9.000	Off	L1	20.1	13.6	65.7
0.532500	28.9	1000.0	9.000	Off	L1	19.9	27.1	56.0
1.531500	28.8	1000.0	9.000	Off	L1	19.8	27.2	56.0
2.778000	27.6	1000.0	9.000	Off	L1	20.4	28.4	56.0
6.792000	26.2	1000.0	9.000	Off	L1	20.4	33.8	60.0
16.242000	26.8	1000.0	9.000	Off	L1	20.5	33.2	60.0

Average

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - Ave (dB)	Limit - Ave (dBμV)
0.159000	35.6	1000.0	9.000	Off	L1	20.1	19.8	55.5
0.519000	23.1	1000.0	9.000	Off	L1	19.9	22.9	46.0
1.572000	23.6	1000.0	9.000	Off	L1	19.8	22.4	46.0
2.832000	21.4	1000.0	9.000	Off	L1	20.4	24.6	46.0
6.949500	20.2	1000.0	9.000	Off	L1	20.4	29.8	50.0
16.768500	20.1	1000.0	9.000	Off	L1	20.5	29.9	50.0



2.2.11 Model: vStraw_CTPB2
Line 2 on the support laptop (representative configuration powering the EUT)

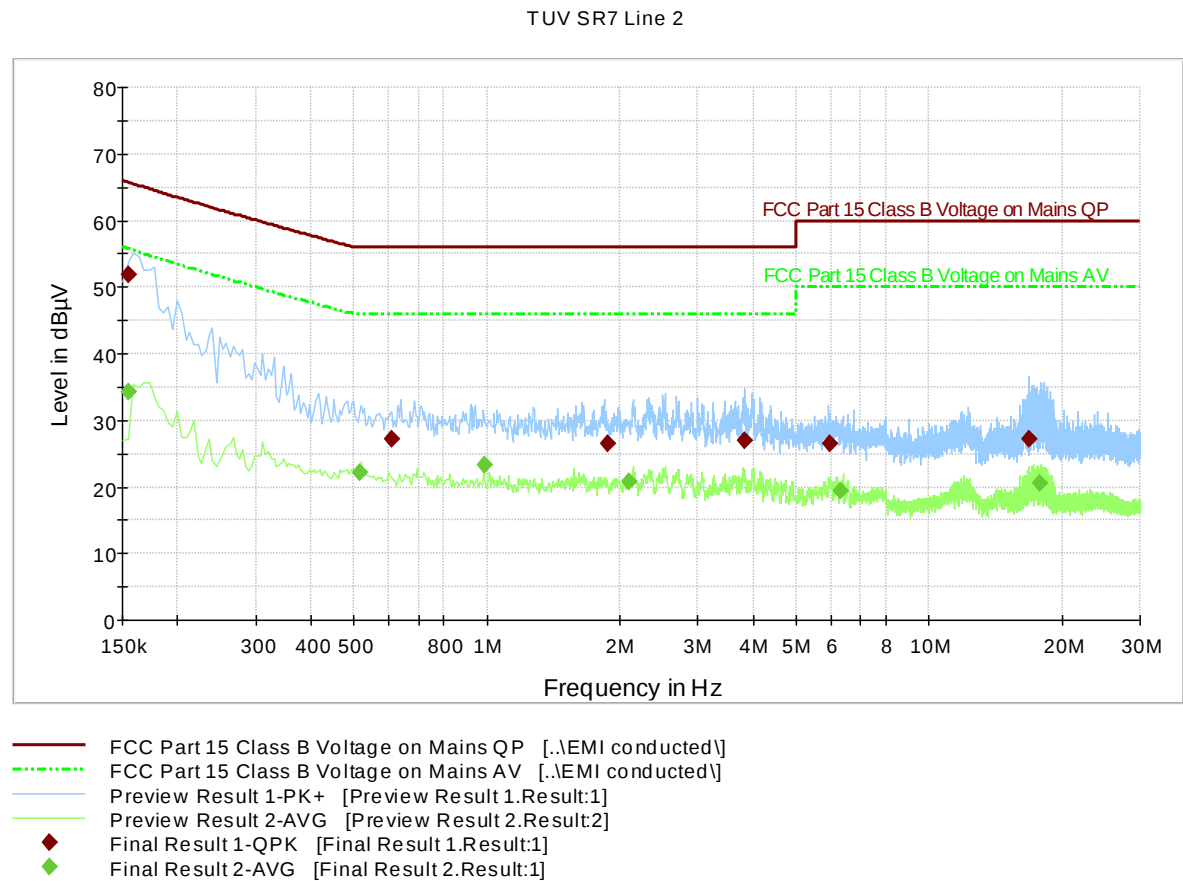

Quasi Peak


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV)
0.154500	51.9	1000.0	9.000	Off	N	20.1	13.9	65.7
0.609000	27.3	1000.0	9.000	Off	N	19.8	28.7	56.0
1.873500	26.6	1000.0	9.000	Off	N	19.9	29.4	56.0
3.835500	26.9	1000.0	9.000	Off	N	20.3	29.1	56.0
5.968500	26.4	1000.0	9.000	Off	N	20.3	33.6	60.0
16.795500	27.2	1000.0	9.000	Off	N	20.6	32.8	60.0

Average

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - Ave (dB)	Limit - Ave (dBμV)
0.154500	34.3	1000.0	9.000	Off	N	20.1	21.4	55.7
0.514500	22.3	1000.0	9.000	Off	N	19.8	23.7	46.0
0.987000	23.2	1000.0	9.000	Off	N	19.8	22.8	46.0
2.098500	20.8	1000.0	9.000	Off	N	20.0	25.2	46.0
6.306000	19.5	1000.0	9.000	Off	N	20.3	30.5	50.0
17.794500	20.6	1000.0	9.000	Off	N	20.6	29.4	50.0



2.2.12 Model: vStraw_CTPB4_I
Line 1 on the support laptop (representative configuration powering the EUT)

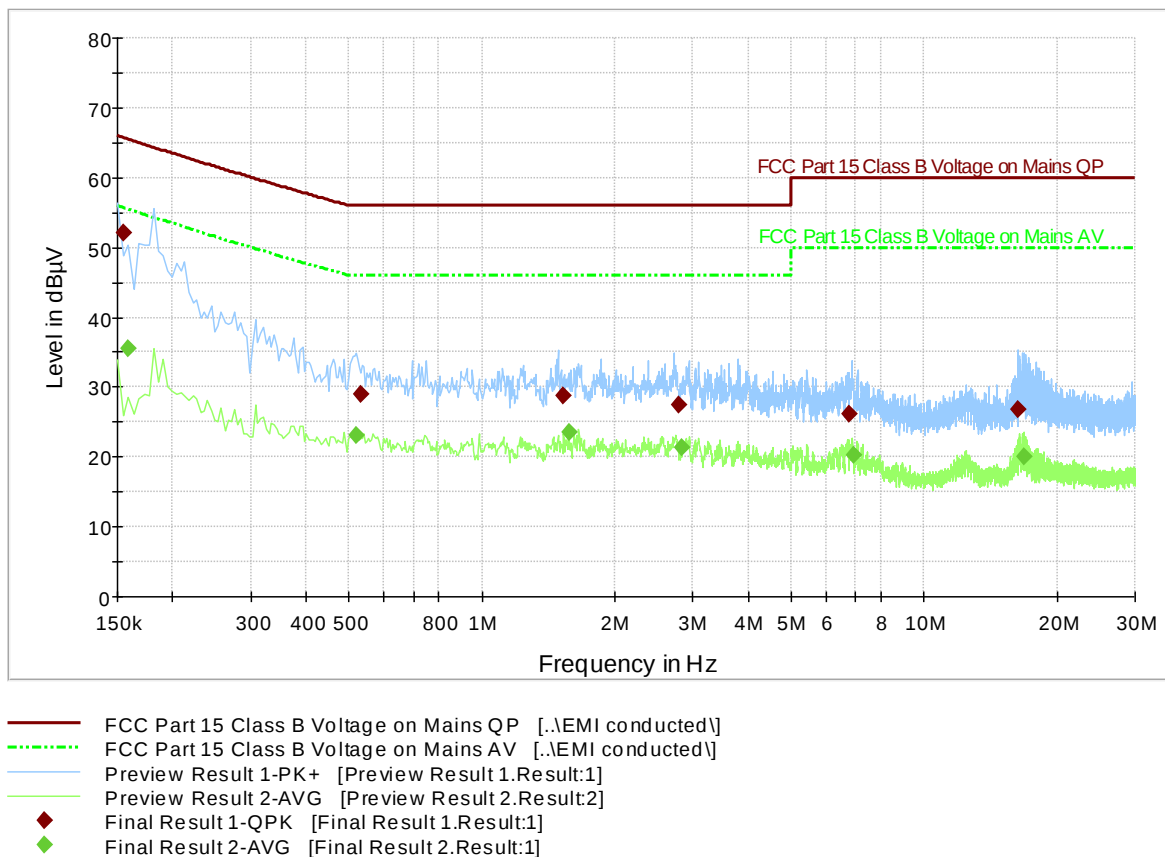

Quasi Peak


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV)
0.154500	52.1	1000.0	9.000	Off	L1	20.1	13.6	65.7
0.532500	28.9	1000.0	9.000	Off	L1	19.9	27.1	56.0
1.531500	28.8	1000.0	9.000	Off	L1	19.8	27.2	56.0
2.778000	27.6	1000.0	9.000	Off	L1	20.4	28.4	56.0
6.792000	26.2	1000.0	9.000	Off	L1	20.4	33.8	60.0
16.242000	26.8	1000.0	9.000	Off	L1	20.5	33.2	60.0

Average

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - Ave (dB)	Limit - Ave (dBμV)
0.159000	35.6	1000.0	9.000	Off	L1	20.1	19.8	55.5
0.519000	23.1	1000.0	9.000	Off	L1	19.9	22.9	46.0
1.572000	23.6	1000.0	9.000	Off	L1	19.8	22.4	46.0
2.832000	21.4	1000.0	9.000	Off	L1	20.4	24.6	46.0
6.949500	20.2	1000.0	9.000	Off	L1	20.4	29.8	50.0
16.768500	20.1	1000.0	9.000	Off	L1	20.5	29.9	50.0



2.2.13 Model: vStraw_CTPB4_I
Line 2 on the support laptop (representative configuration powering the EUT)

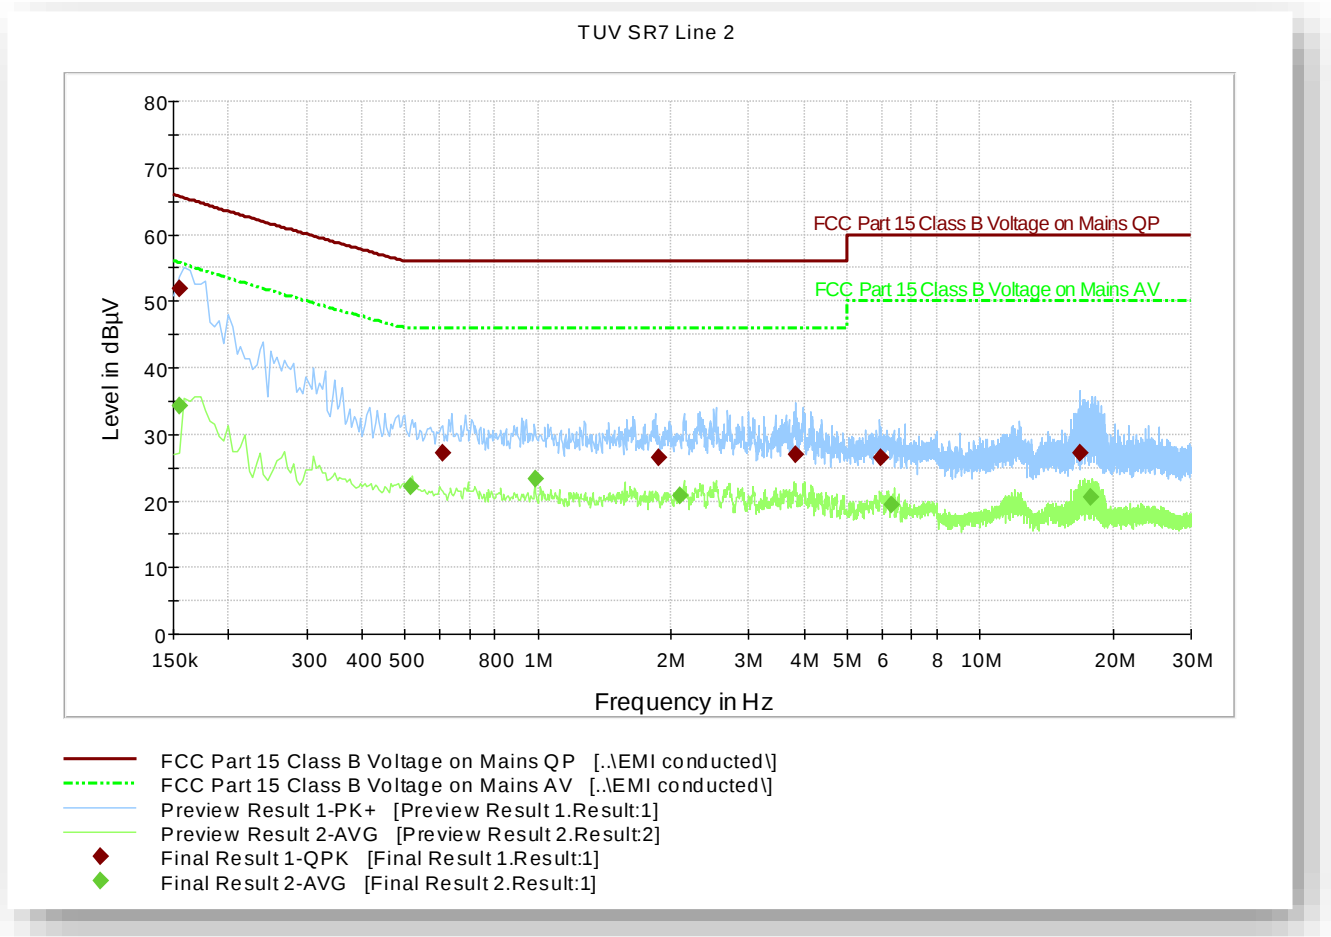

Quasi Peak

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154500	51.9	1000.0	9.000	Off	N	20.1	13.9	65.7
0.609000	27.3	1000.0	9.000	Off	N	19.8	28.7	56.0
1.873500	26.6	1000.0	9.000	Off	N	19.9	29.4	56.0
3.835500	26.9	1000.0	9.000	Off	N	20.3	29.1	56.0
5.968500	26.4	1000.0	9.000	Off	N	20.3	33.6	60.0
16.795500	27.2	1000.0	9.000	Off	N	20.6	32.8	60.0

Average

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - Ave (dB)	Limit - Ave (dBµV)
0.154500	34.3	1000.0	9.000	Off	N	20.1	21.4	55.7
0.514500	22.3	1000.0	9.000	Off	N	19.8	23.7	46.0
0.987000	23.2	1000.0	9.000	Off	N	19.8	22.8	46.0
2.098500	20.8	1000.0	9.000	Off	N	20.0	25.2	46.0
6.306000	19.5	1000.0	9.000	Off	N	20.3	30.5	50.0
17.794500	20.6	1000.0	9.000	Off	N	20.6	29.4	50.0



2.3 Frequency Stability

2.3.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.255(f)

2.3.2 Standard Applicable

(f) Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to + 50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

2.3.3 Equipment Under Test and Modification State

Serial No: STRBAB2N399U0063 / Test Configuration A
Serial No: STRA1B4N030U0068 / Test Configuration C

2.3.4 Date of Test/Initial of test personnel who performed the test

October 31, 2019 / FSC (vStraw_CTPB2)
August 27, 2020 / FSC (vStraw_CTPB4_I)

2.3.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	24.8 °C	26.2 °C
Relative Humidity	12.7 %	53.6 %
ATM Pressure	99.5 kPa	98.1 kPa

2.3.7 Additional Observations

Model: vStraw_CTPB2

- The EUT is USB powered (5VDC). Since USB power is regulated, input voltage variation was not performed.
- The temperature chamber has a window, the receive antenna was placed outside the chamber at a distance greater than $2D^2/\lambda$. Where D is the longest single dimension of the receive antenna and λ is the wavelength.
- The EUT was verified without an enclosure (bare board). At $\geq 40^\circ\text{C}$, the EUT requires a heatsink. The manufacturer provided a representative heatsink for this purpose. The manufacturer declared that on actual installation, the metal back enclosure will provide identical heat dissipation on the main chip and immediate vicinity of the main board.
- Test methodology is per Section 9.14 of ANSI C63.10-2013.



Model: vStraw_CTPB4_I

- The EUT is USB powered (5VDC). Since USB power is regulated, input voltage variation was not performed.
- The temperature chamber has a window, the receive antenna was placed outside the chamber at a distance greater than $2D^2/\lambda$. Where D is the longest single dimension of the receive antenna and λ is the wavelength.
- The 99% OBW was monitored for this test.
- Worst case RBW of 10MHz was used for this test.
- Test methodology is per Section 9.14 of ANSI C63.10-2013.

2.3.8 Test Results


Model: vStraw_CTPB2

EUT **complies**. The spectrum mask of the EUT emissions (max hold) stayed within the frequency band 57GHz to 71GHz on all conditions of operation. Operation of the EUT is >1GHz from the edge of the frequency band (57GHz-71GHz).

Model: vStraw_CTPB4_I

EUT **complies**. The 99% OBW of the EUT stayed within the frequency band 61GHz to 61.5GHz on all conditions of operation

2.3.9 Sample Test Plots for Model vStraw_CTPB2

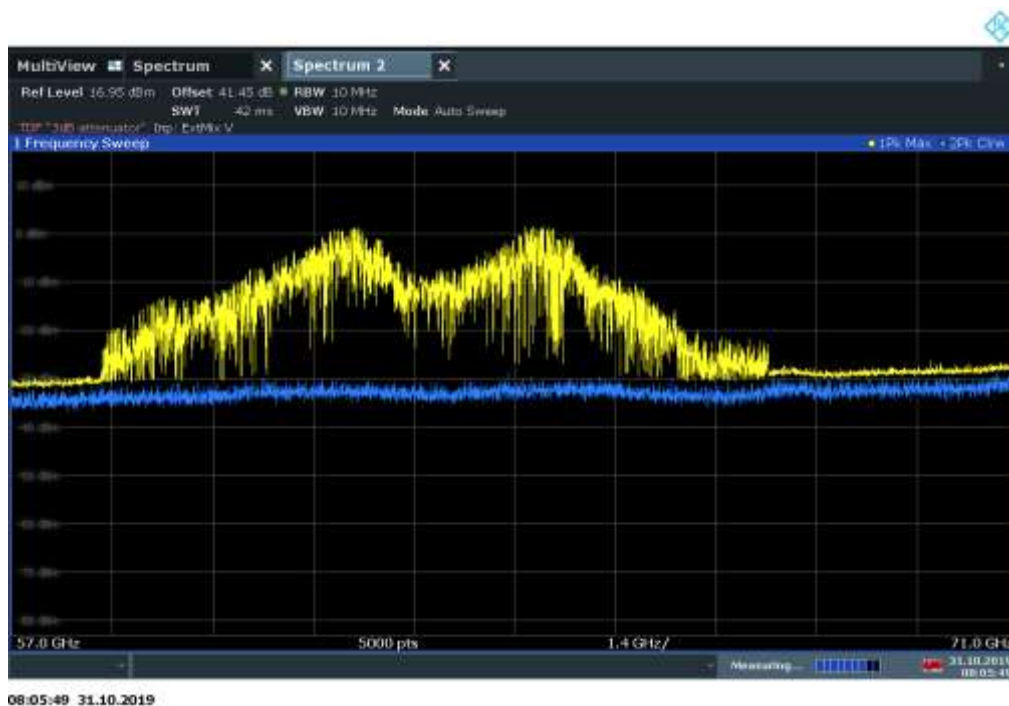

Spectrum Mask @ 50°C



Spectrum Mask @ -20°C



2.3.10 Sample Test Plots for Model vStraw_CTPB4_I



99% OBW @ 50°C



99% OBW @ -20°C



2.4 Occupied Bandwidth

2.4.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.255(e)(1)

2.4.2 Standard Applicable

(1) Transmitters with an emission bandwidth of less than 100 MHz must limit their peak transmitter conducted output power to the product of 500 mW times their emission bandwidth divided by 100 MHz. For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices).

2.4.3 Equipment Under Test and Modification State

Serial No: STRBAB2N399U0063 / Test Configuration A
Serial No: STRA1B4N030U0068 / Test Configuration C

2.4.4 Date of Test/Initial of test personnel who performed the test

November 06, 2019 / FSC (vStraw_CTPB2)
August 24, 2020 / FSC (vStraw_CTPB4_I)

2.4.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	25.8 °C	26.1 °C
Relative Humidity	23.9 %	48.5 %
ATM Pressure	99.6 kPa	100.1 kPa

2.4.7 Additional Observations

Model: vStraw_CTPB2


- 6dB BW of the EUT is >100MHz when measured using 100kHz RBW. Therefore, the additional bandwidth requirement per §15.255(e)(1) does not apply.
- Worst case 99% OBW reported as 8.26GHz.
- Plots presented for reference only.

Model: vStraw_CTPB4_I


- 6dB BW of the EUT is >100MHz when measured using 100kHz RBW. Therefore, the additional bandwidth requirement per §15.255(e)(1) does not apply.
- Worst case 99% OBW reported as 483MHz.
- Plots presented for reference only.



2.4.8 Test Verifications Plots for Model vStraw_CTPB2

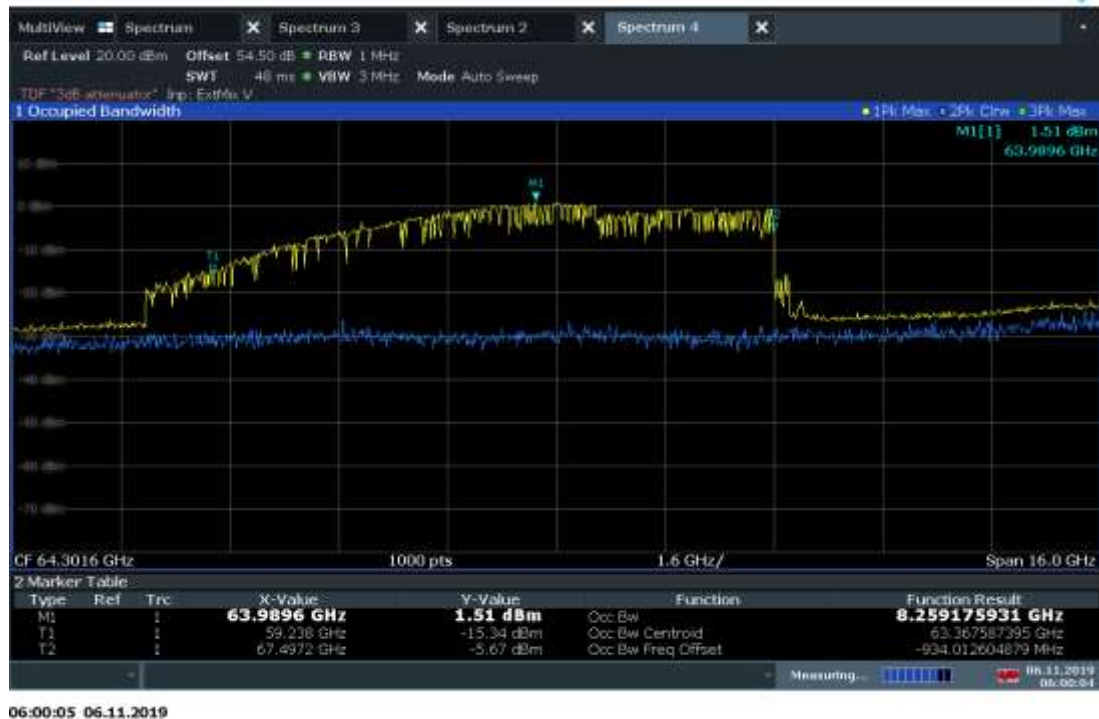

99% OBW

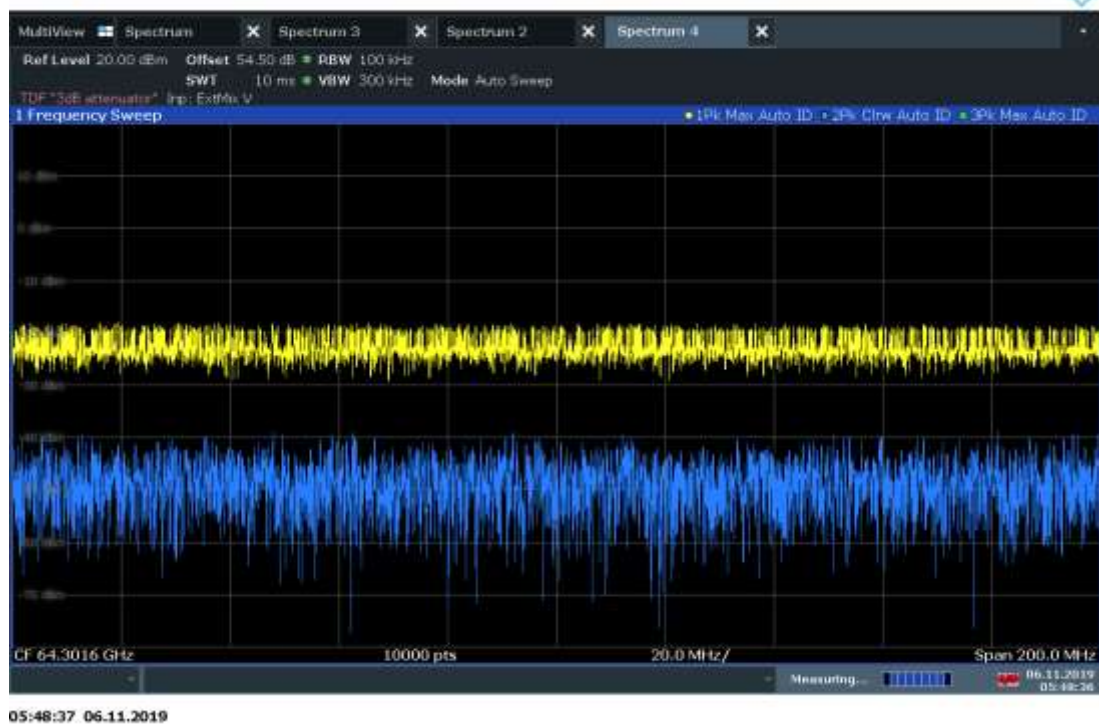


>100MHz 6dB BW verification using 100kHz RBW



2.4.9 Test Verifications Plots for Model vStraw_CTPB4_I



99% OBW

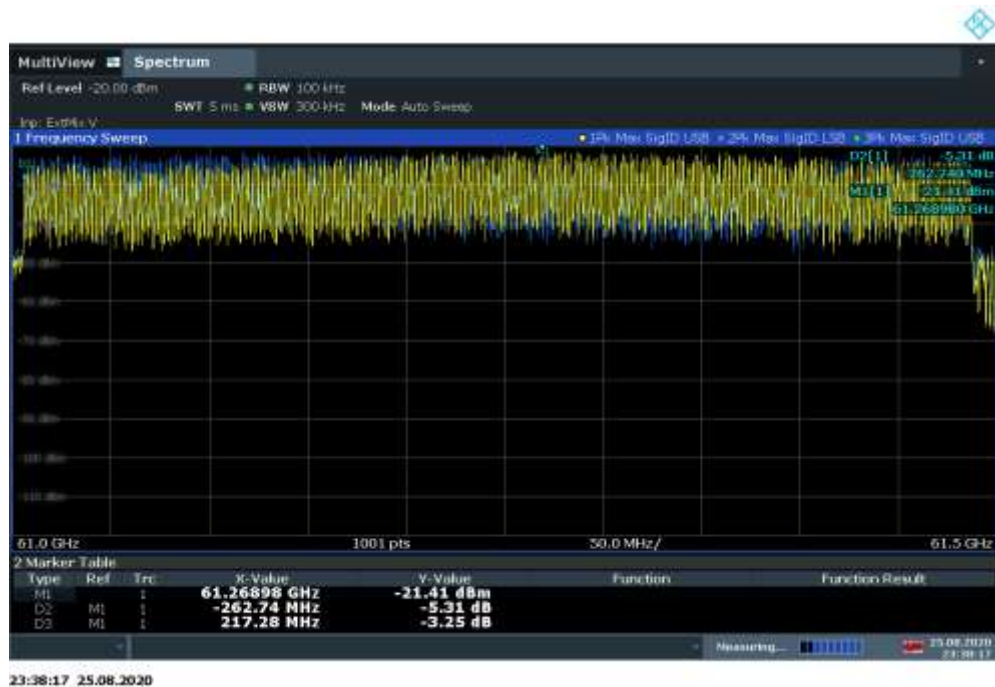

>100MHz 6dB BW verification

Sample Calculation: $D3 - D2 = 6\text{dB BW}$
 $217.28\text{ MHz} - (-262.74\text{ MHz}) = 480.02\text{ MHz}$



2.5 Field Strength of Spurious Radiation

2.5.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.255(d)(1)(2) and (3)

2.5.2 Standard Applicable

(d) Limits on spurious emissions:

- (1) The power density of any emissions outside the 57-71 GHz band shall consist solely of spurious emissions.
- (2) Radiated emissions below 40 GHz shall not exceed the general limits in §15.209.
- (3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm² (85.3dBμV/m / -9.93dBm EIRP) at a distance of 3 meters.

2.5.3 Equipment Under Test and Modification State

Serial No: STRBAB2N399U0032 / Test Configuration A
Serial No: STRA1B4N030U0070 / Test Configuration B
Serial No: STRA1B4N030U0064 / Test Configuration C

2.5.4 Date of Test/Initial of test personnel who performed the test

September 10, 2019 / FSC (vStraw_CTPB2)
September 12, 2020 / FSC (vStraw_CTPB4)
August 21, 2020 / FSC (vStraw_CTPB4_I)

2.5.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo / Mira Mesa facility

Ambient Temperature	26.2 °C	24.7 °C	27.3 °C
Relative Humidity	42.1 %	37.7 %	46.7 %
ATM Pressure	98.6 kPa	100.6 kPa	100.3 kPa



2.5.7 Additional Observations

Model: vStraw_CTPB2

- This is a radiated test. The spectrum was searched from 9kHz to 200GHz.
- Only the worst-case profile for spurious emissions presented (Stepped CW).
- In-band measurements are covered under Section 2.1 of this test report.
- Measurements below 40GHz were done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.5.8 for sample computation.
- Measurement above 40GHz are done using harmonic mixers. Corresponding TDF (Transducer Factor) are programmed for each range.
- Tests distance and frequency ranges performed are summarized below:

Frequency Range	Test Distance
9 kHz to 30 MHz	3 meters
30 MHz to 1GHz	3 meters
1 GHz to 18 GHz	3 meters
18 GHz to 26.5 GHz	3 meters
26 GHz to 40 GHz	3 meters
40 GHz to 57 GHz	3 meters
57 GHz to 71 GHz	3 meters
71 GHz to 75 GHz	1 meter
75 GHz to 110 GHz	1 meter
110 GHz to 140 GHz	1 meter
140 GHz to 200 GHz	0.5 meter



Model: vStraw_CTPB4

- This is a radiated test. The spectrum was searched from 9kHz to 200GHz.
- Only the worst-case profile for spurious emissions presented (Stepped CW).
- Both 12 and 24 Transmitters data presented above 26GHz. Below 26GHz, the emission profile between the two configurations are identical. Only the worst configuration presented.
- In-band measurements are covered under Section 2.1 of this test report.
- Measurements below 40GHz were done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.5.8 for sample computation.
- Measurement above 40GHz were done using harmonic mixers. Corresponding TDF (Transducer Factor) are programmed for each range.
- Tests distances and frequency ranges performed are summarized below:

Frequency Range	Test Distance
9 kHz to 30 MHz	3 meters
30 MHz to 1GHz	3 meters
1 GHz to 18 GHz	3 meters
18 GHz to 26.5 GHz	3 meters
26 GHz to 40 GHz	3 meters
40 GHz to 57 GHz	3 meters
57 GHz to 71 GHz	3 meters
71 GHz to 75 GHz	1 meter
75 GHz to 110 GHz	1 meter
110 GHz to 140 GHz	1 meter
140 GHz to 200 GHz	0.5 meter



Model: vStraw_CTPB4_I

- This is a radiated test. The spectrum was searched from 9kHz to 200GHz.
- Only the worst-case profile for spurious emissions presented (Full Sweep).
- Both 12 and 24 Transmitters data presented above 40GHz. Below 40GHz, the emission profile between 12 and 24 Transmitters are identical. Only the worst configuration presented (12 TX/Ports).
- Measurements below 40GHz were done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.5.8 for sample computation.
- Measurement above 40GHz were done using harmonic mixers. Corresponding TDF (Transducer Factor) are programmed for each range.
- Some plots presented above 40GHz were using Signal ID, this is to verify precision of Auto ID function used on the rest of the plots. Signals not common between Trace 1 and Trace 2 using Signal ID are mixer by-products.
- Tests distances and frequency ranges performed are summarized below:

Frequency Range	Test Distance
9 kHz to 30 MHz	3 meters
30 MHz to 1GHz	3 meters
1 GHz to 18 GHz	3 meters
18 GHz to 26.5 GHz	3 meters
26 GHz to 40 GHz	3 meters
40 GHz to 57 GHz	3 meters
57 GHz to 71 GHz	3 meters
71 GHz to 75 GHz	1 meter
75 GHz to 110 GHz	1 meter
110 GHz to 140 GHz	1 meter
140 GHz to 200 GHz	0.5 meter

2.5.8 Sample Computation (Radiated Emission)

Measuring equipment raw measurement (dbμV) @ 30 MHz			24.4
Correction Factor (dB)	Asset# 1066 (cable)	0.3	-12.6
	Asset# 1172 (cable)	0.3	
	Asset# 1016 (preamplifier)	-30.7	
	Asset# 1175(cable)	0.3	
	Asset# 1002 (antenna)	17.2	
Reported QuasiPeak Final Measurement (dbμV/m) @ 30MHz			11.8




2.5.9 Test Results

Compliant. See attached plots and tables.



2.5.10 Below 30MHz Radiated Emission Test (vStraw_CTPB2)

Discrete Rotation TUV 3m Radiated 9kHz to 30MHz..

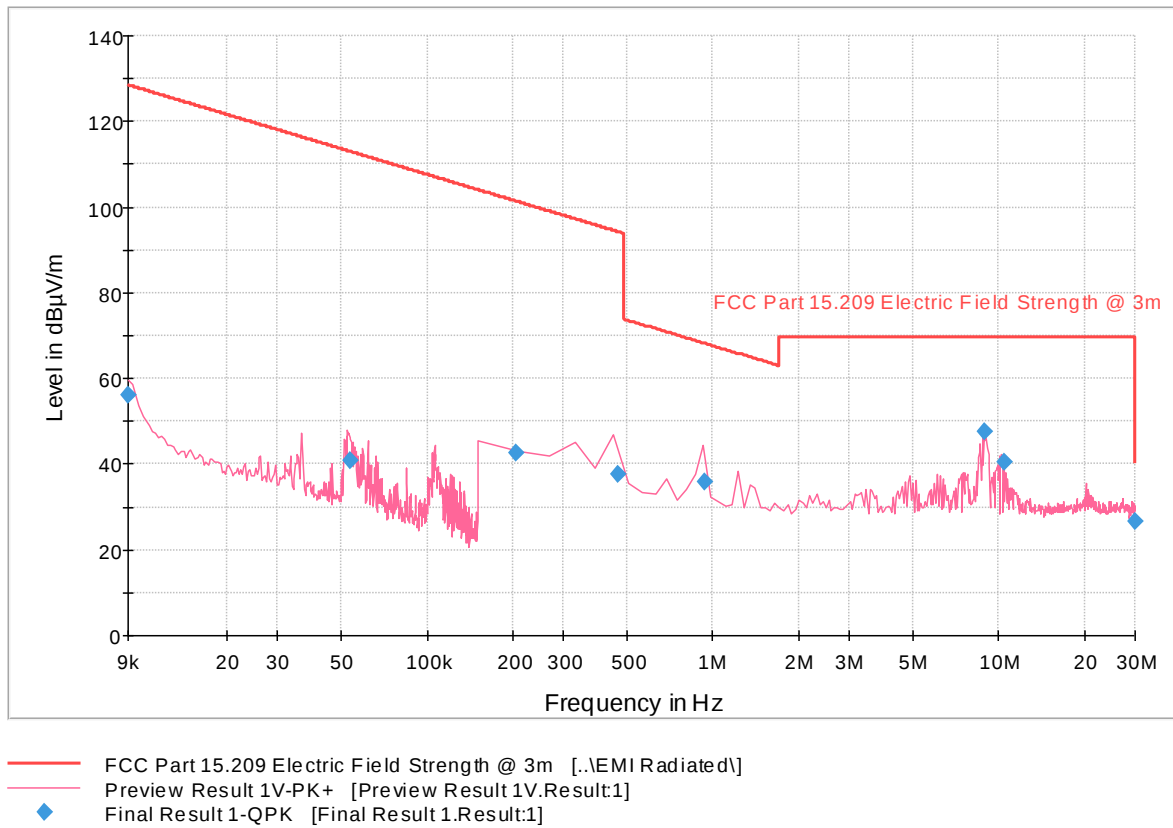


Quasi-Peak Data

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
0.009000	56.3	1000.0	0.200	100.0	V	50.0	25.0	72.2	128.5
0.053798	40.9	1000.0	0.200	100.0	V	189.0	20.2	72.1	113.0
0.205000	42.8	1500.0	9.000	100.0	V	190.0	19.6	58.6	101.4
0.465918	37.8	1500.0	9.000	100.0	V	213.0	19.7	56.4	94.2
0.936655	36.1	1500.0	9.000	100.0	V	57.0	19.9	32.1	68.2
8.872667	47.6	1500.0	9.000	100.0	V	299.0	20.8	22.0	69.5
10.439978	40.6	1500.0	9.000	100.0	V	286.0	21.2	29.0	69.5
29.993000	26.6	1500.0	9.000	100.0	V	59.0	25.1	42.9	69.5



2.5.11 Below 1GHz Radiated Emission Test (vStraw_CTPB2)

Continuous Rotation TUV 3m Radiated 30 to 1000MHz

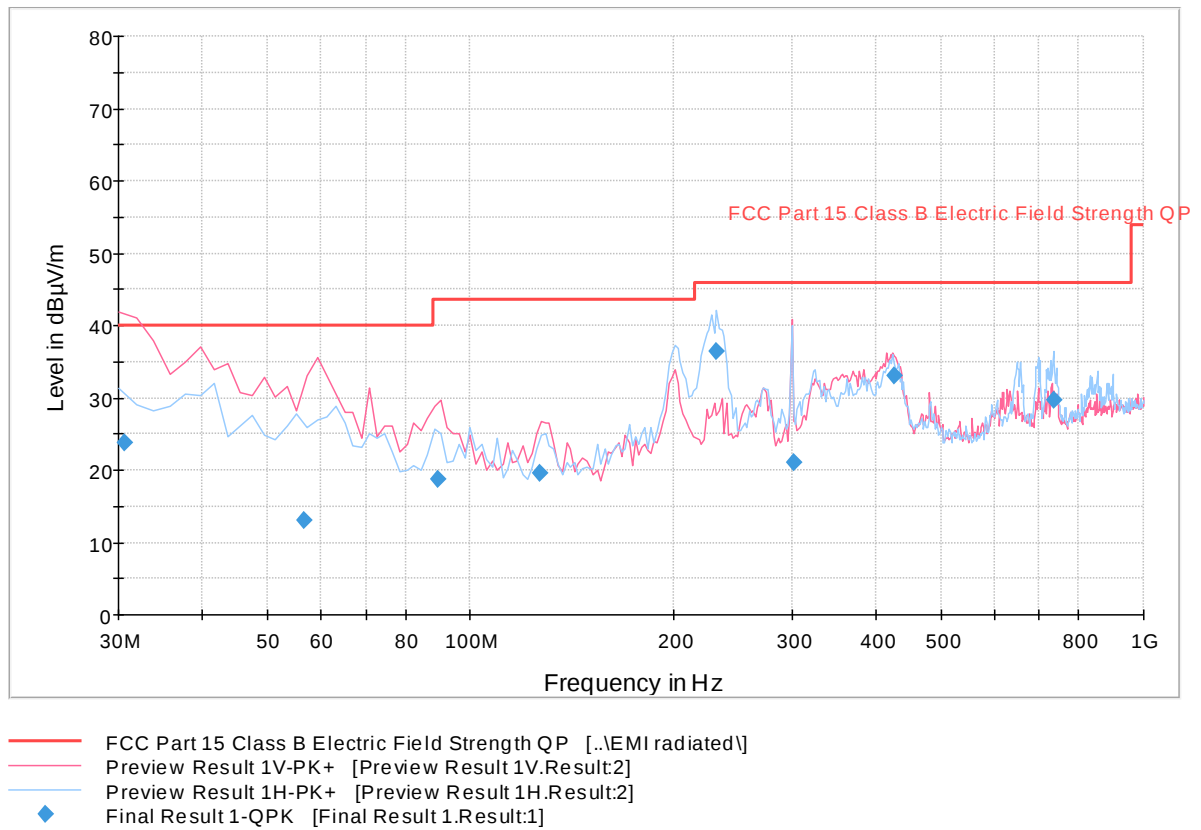


Quasi-Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
30.680000	23.8	1000.0	120.000	100.0	V	104.0	-8.7	16.2	40.0
56.718317	13.1	1000.0	120.000	100.0	V	122.0	-16.2	26.9	40.0
89.572745	18.8	1000.0	120.000	100.0	V	193.0	-16.0	24.7	43.5
126.434389	19.5	1000.0	120.000	100.0	V	37.0	-16.0	24.0	43.5
231.604329	36.4	1000.0	120.000	100.0	H	342.0	-10.4	9.6	46.0
302.120401	21.0	1000.0	120.000	150.0	V	230.0	-7.5	25.0	46.0
425.769218	33.1	1000.0	120.000	105.0	V	106.0	-4.9	12.9	46.0
735.351263	29.6	1000.0	120.000	109.0	H	33.0	1.7	16.4	46.0



2.5.12 Above 1GHz (up to 18GHz) Radiated Emission Test (vStraw_CTPB2)

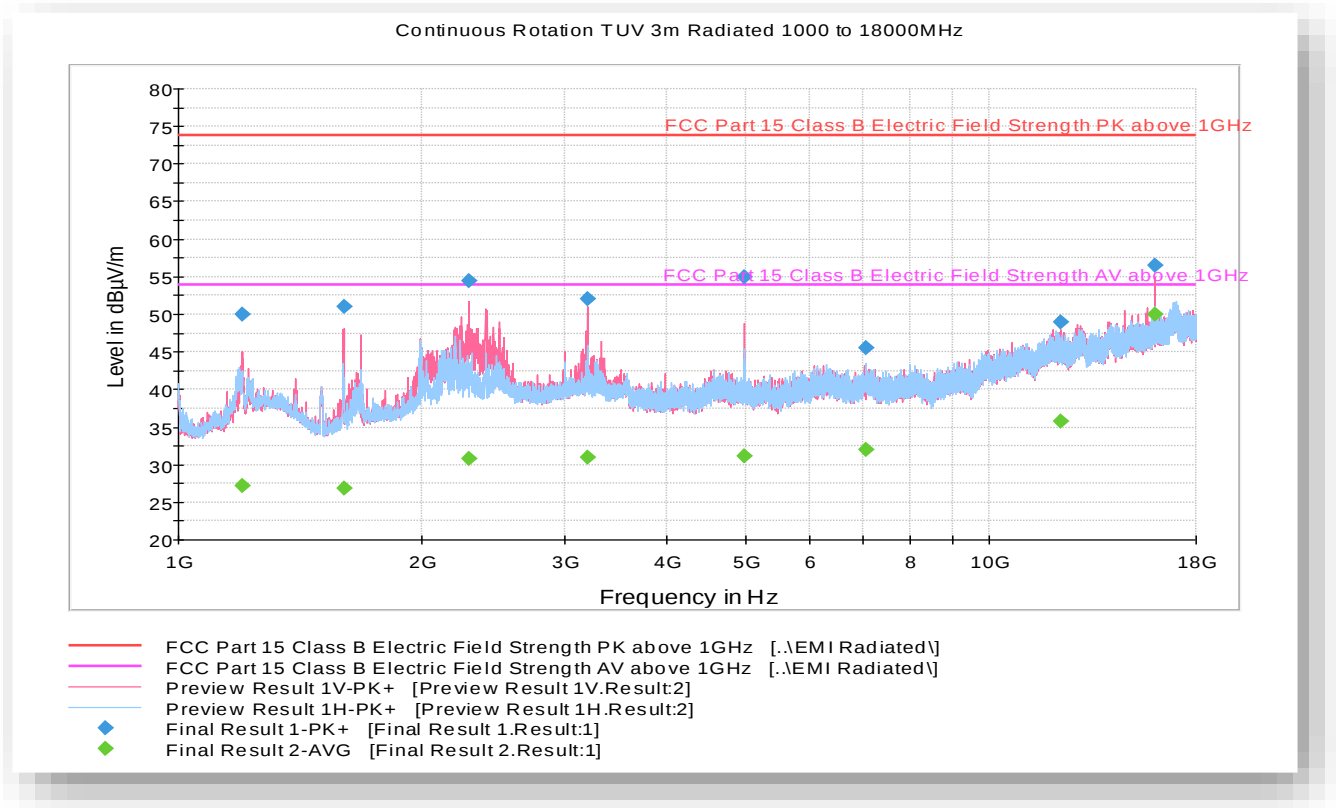

Peak Data

Frequency (MHz)	Max Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1198.700000	50.1	1000.0	1000.000	123.0	V	69.0	-6.4	23.8	73.9
1599.333333	51.0	1000.0	1000.000	150.0	V	89.0	-5.8	22.9	73.9
2285.766667	54.5	1000.0	1000.000	406.9	V	177.0	-1.2	19.4	73.9
3194.366667	52.1	1000.0	1000.000	142.0	V	82.0	1.0	21.8	73.9
4981.633333	54.9	1000.0	1000.000	100.0	V	98.0	3.6	19.0	73.9
7059.733333	45.5	1000.0	1000.000	379.0	H	4.0	6.9	28.4	73.9
12231.333333	48.9	1000.0	1000.000	386.0	V	23.0	13.5	25.0	73.9
15998.900000	56.6	1000.0	1000.000	123.0	V	166.0	16.3	17.3	73.9


Average Data

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1198.700000	27.3	1000.0	1000.000	123.0	V	69.0	-6.4	26.6	53.9
1599.333333	26.9	1000.0	1000.000	150.0	V	89.0	-5.8	27.0	53.9
2285.766667	30.7	1000.0	1000.000	406.9	V	177.0	-1.2	23.2	53.9
3194.366667	30.9	1000.0	1000.000	142.0	V	82.0	1.0	23.0	53.9
4981.633333	31.1	1000.0	1000.000	100.0	V	98.0	3.6	22.8	53.9
7059.733333	32.1	1000.0	1000.000	379.0	H	4.0	6.9	21.8	53.9
12231.333333	35.8	1000.0	1000.000	386.0	V	23.0	13.5	18.1	53.9
15998.900000	50.0	1000.0	1000.000	123.0	V	166.0	16.3	3.9	53.9



2.5.13 18GHz to 26.5GHz Radiated Emission Test (vStraw_CTPB2)

Continuous Rotation TUV 3m Radiated 18G to 26.5GHz

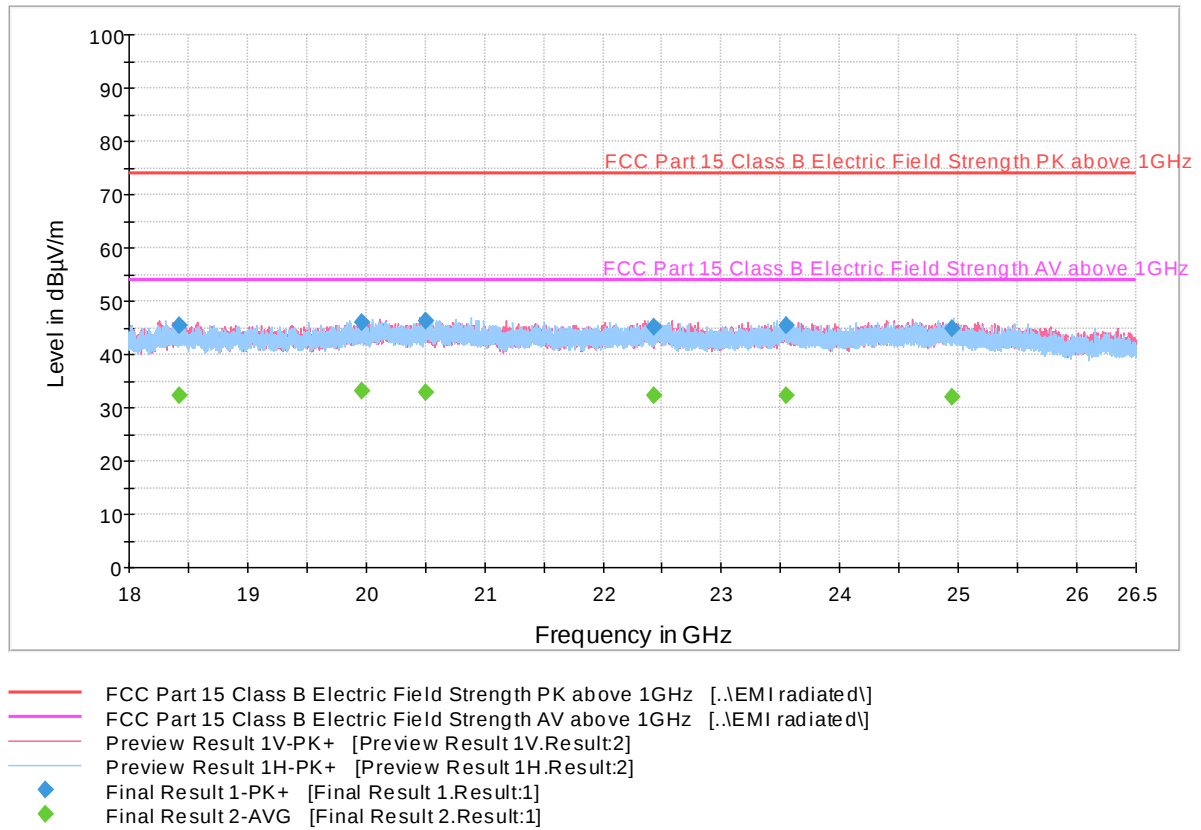

Peak Data


Frequency (MHz)	Max Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
18426.216667	45.3	1000.0	1000.000	115.0	V	224.0	-0.4	28.6	73.9
19967.666667	45.9	1000.0	1000.000	115.0	H	160.0	-0.6	28.0	73.9
20507.416667	46.3	1000.0	1000.000	103.0	H	151.0	-0.3	27.6	73.9
22430.883333	45.0	1000.0	1000.000	108.0	H	173.0	0.8	28.9	73.9
23542.516667	45.3	1000.0	1000.000	100.0	H	-7.0	1.0	28.6	73.9
24952.400000	44.8	1000.0	1000.000	105.0	H	340.0	2.0	29.1	73.9

Average Data

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
18426.216667	32.4	1000.0	1000.000	115.0	V	224.0	-0.4	21.5	53.9
19967.666667	33.1	1000.0	1000.000	115.0	H	160.0	-0.6	20.8	53.9
20507.416667	33.0	1000.0	1000.000	103.0	H	151.0	-0.3	20.9	53.9
22430.883333	32.4	1000.0	1000.000	108.0	H	173.0	0.8	21.5	53.9
23542.516667	32.2	1000.0	1000.000	100.0	H	-7.0	1.0	21.7	53.9
24952.400000	32.1	1000.0	1000.000	105.0	H	340.0	2.0	21.8	53.9



2.5.14 26GHz to 40GHz Radiated Emission Test (vStraw_CTPB2)

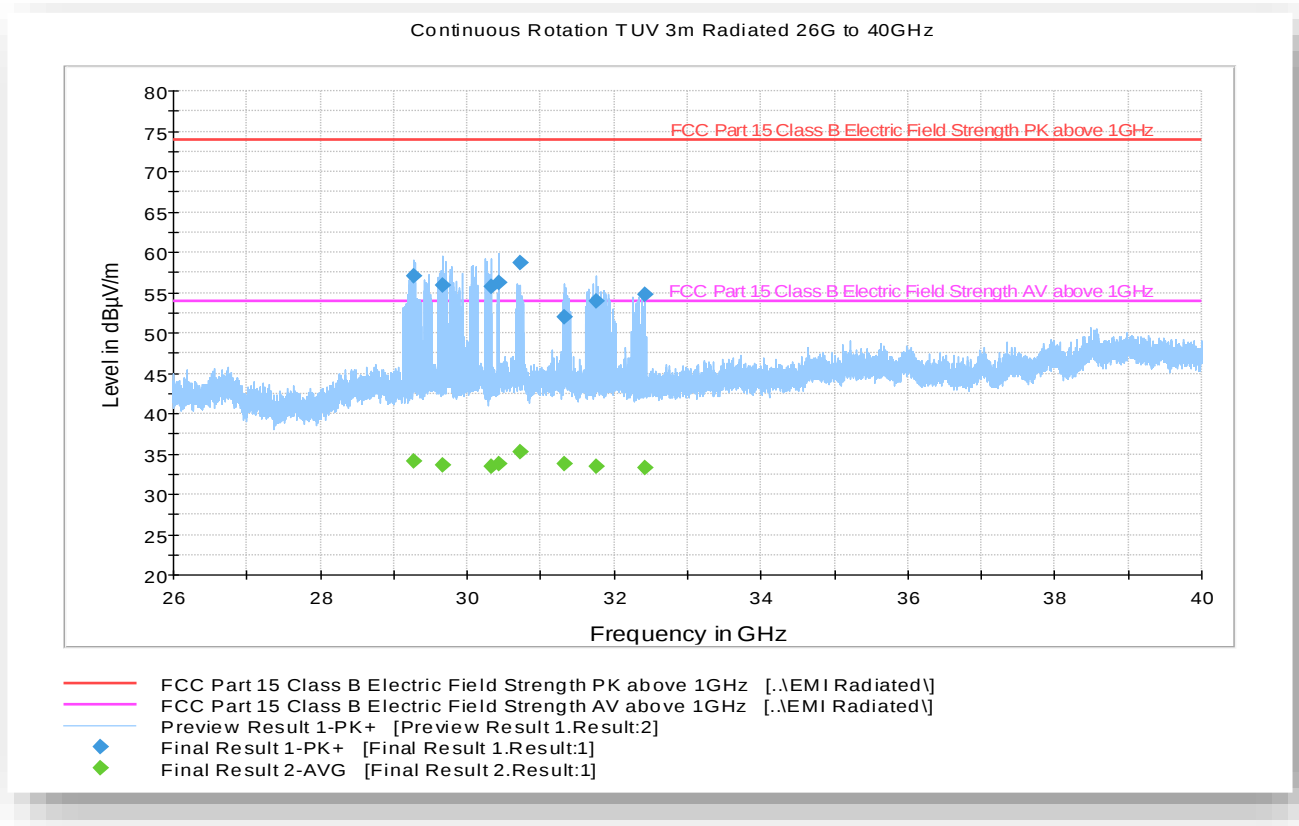


Peak Data

Frequency (MHz)	Max Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
29270.333333	57.1	1000.0	1000.000	100.0	V	202.0	3.4	16.8	73.9
29674.333333	55.9	1000.0	1000.000	125.0	V	156.0	3.4	18.0	73.9
30329.533333	55.7	1000.0	1000.000	125.0	V	158.0	3.8	18.2	73.9
30427.666667	56.2	1000.0	1000.000	125.0	V	153.0	3.8	17.7	73.9
30715.600000	58.6	1000.0	1000.000	100.0	H	193.0	4.1	15.3	73.9
31320.266667	52.0	1000.0	1000.000	139.0	V	213.0	4.3	21.9	73.9
31749.600000	53.9	1000.0	1000.000	125.0	V	171.0	4.2	20.0	73.9
32429.933333	54.8	1000.0	1000.000	155.0	H	119.0	4.5	19.1	73.9

Average Data


Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
29270.333333	34.1	1000.0	1000.000	100.0	V	202.0	3.4	19.8	53.9
29674.333333	33.6	1000.0	1000.000	125.0	V	156.0	3.4	20.3	53.9
30329.533333	33.5	1000.0	1000.000	125.0	V	158.0	3.8	20.4	53.9
30427.666667	33.8	1000.0	1000.000	125.0	V	153.0	3.8	20.1	53.9
30715.600000	35.2	1000.0	1000.000	100.0	H	193.0	4.1	18.7	53.9
31320.266667	33.8	1000.0	1000.000	139.0	V	213.0	4.3	20.1	53.9
31749.600000	33.5	1000.0	1000.000	125.0	V	171.0	4.2	20.4	53.9
32429.933333	33.3	1000.0	1000.000	155.0	H	119.0	4.5	20.6	53.9

2.5.15 40GHz to 200GHz Maximized Plots (vStraw_CTPB2)

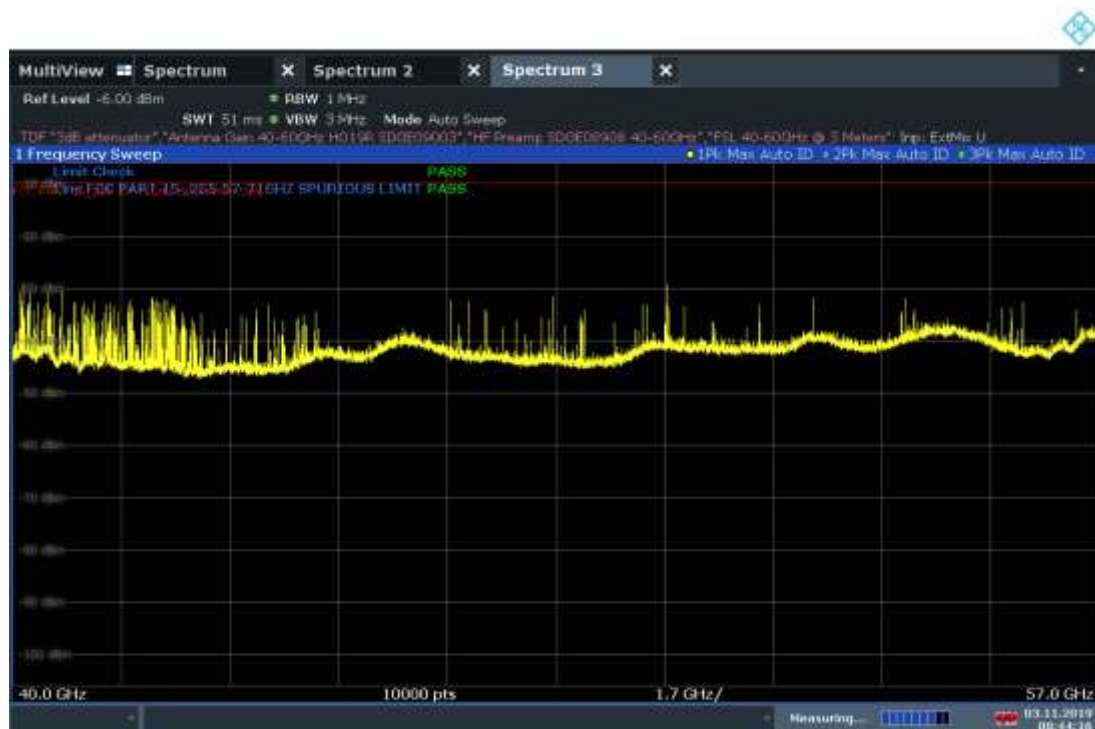


08:44:17 03.11.2019

40GHz to 57GHz Plot

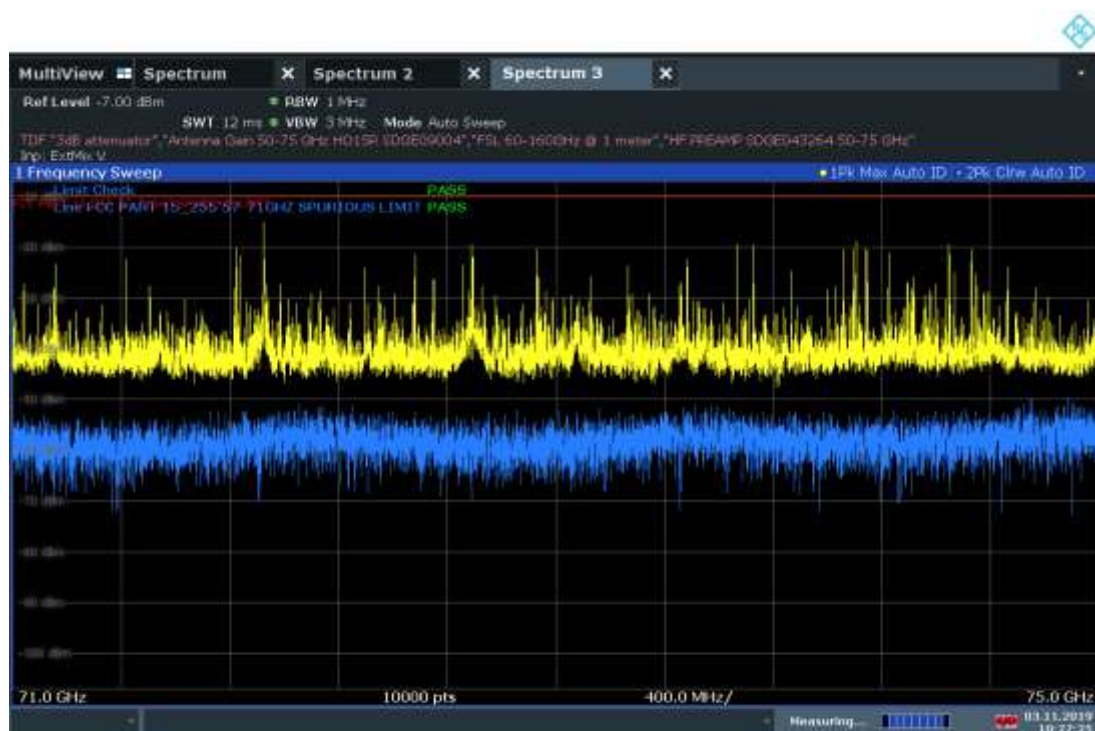


10:27:25 03.11.2019

71GHz to 75GHz Plot

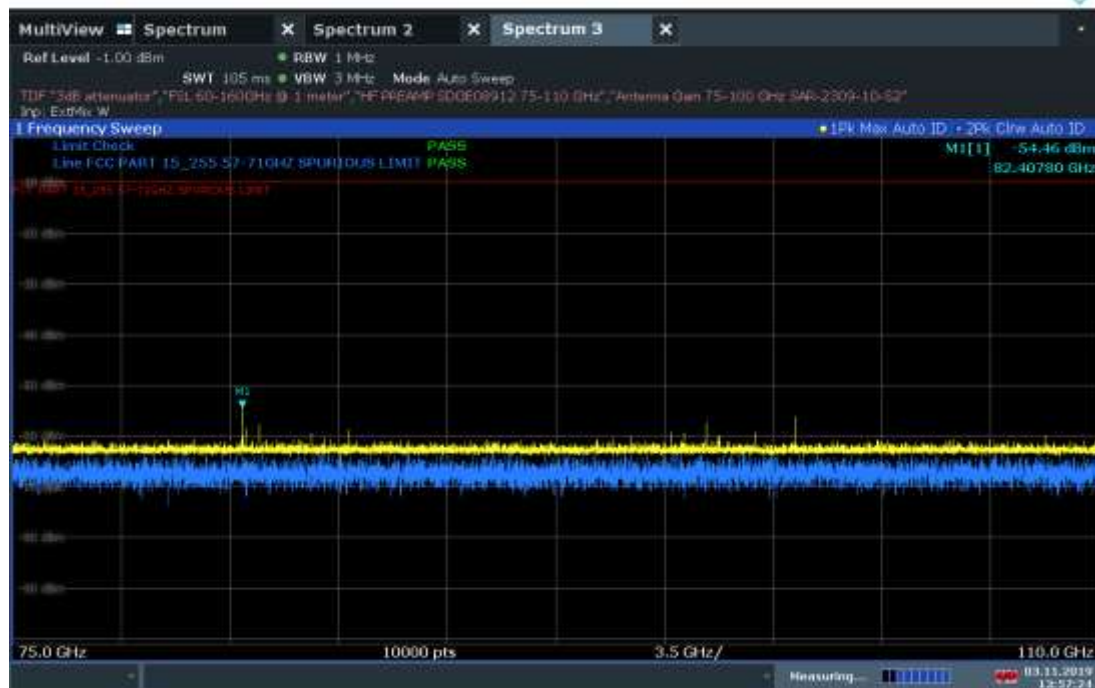


13:57:24 03.11.2019

75GHz to 110GHz Plot

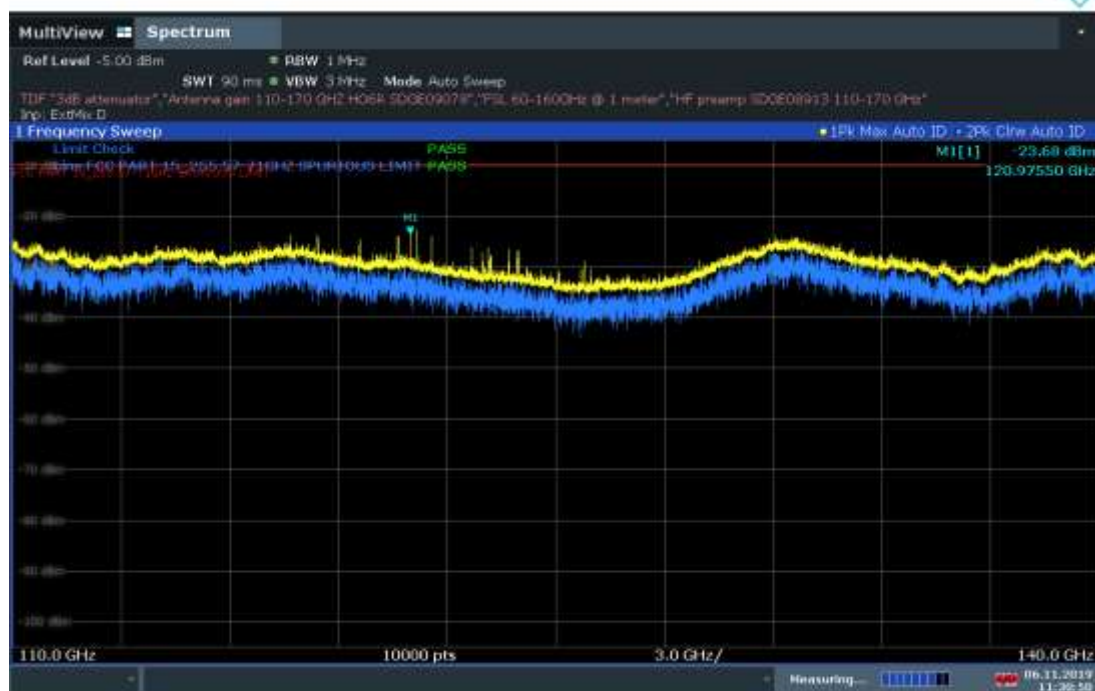

11:30:50 06.11.2019

110GHz to 140GHz Plot

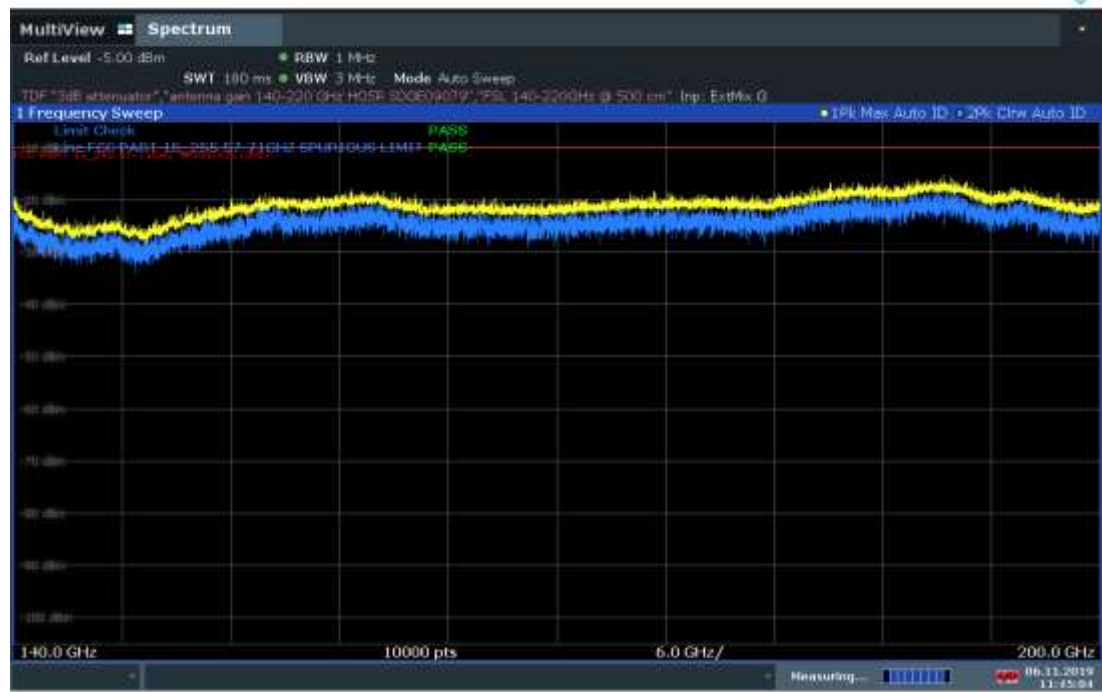


11:45:04 06.11.2019

140GHz to 200GHz Plot



2.5.16 Below 30MHz Radiated Emission Test (vStraw_CTPB4)

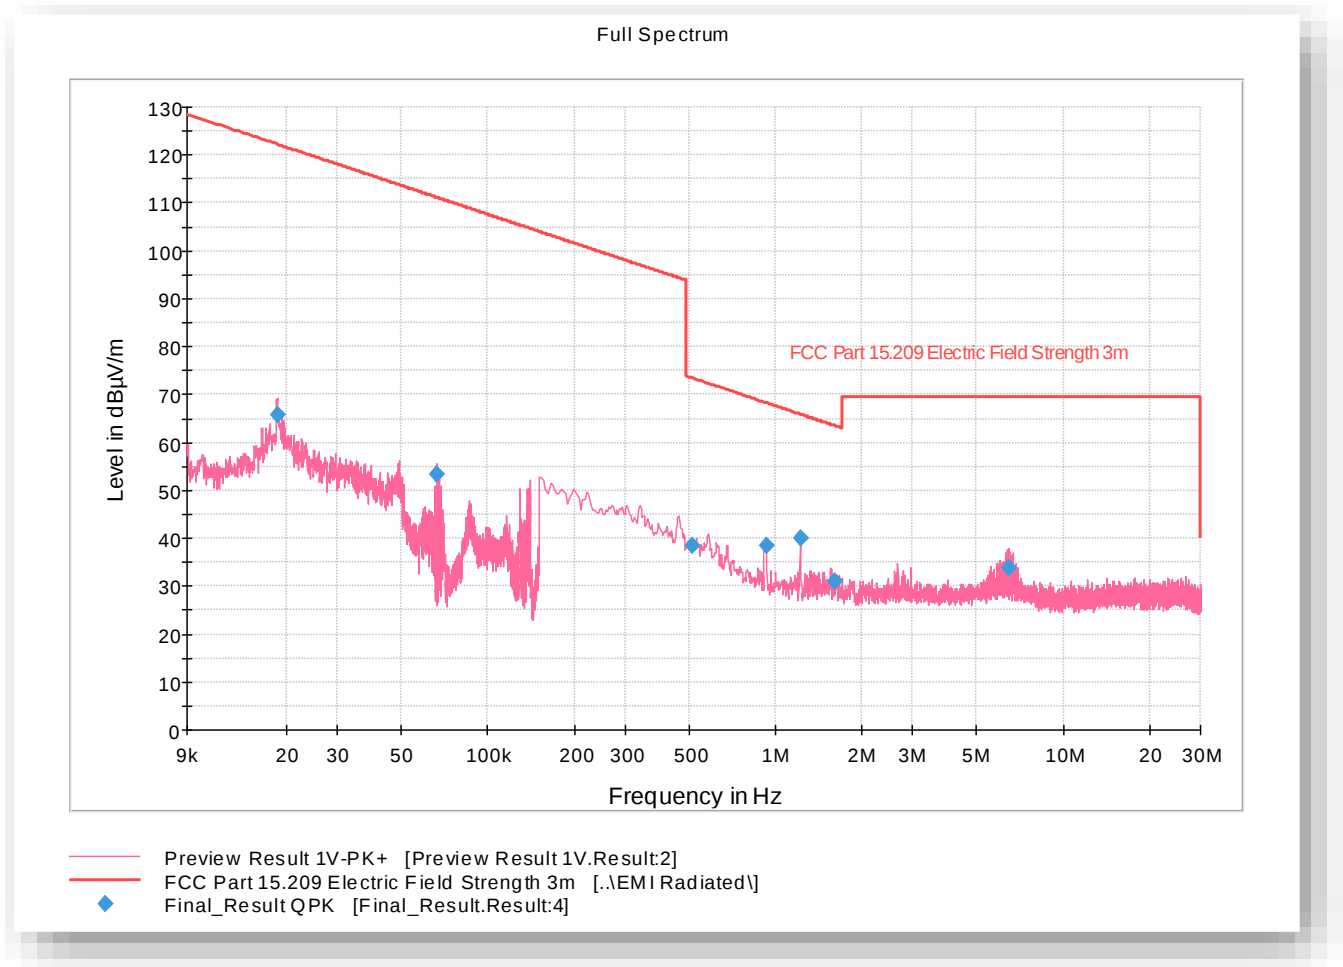


Quasi-Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
0.018570	65.74	1000.0	0.200	100.0	H	239.0	21	56.48	122.22
0.066502	53.40	1000.0	0.200	100.0	H	168.0	19	57.75	111.14
0.515310	38.37	1000.0	9.000	100.0	H	172.0	19	34.99	73.36
0.926480	38.54	1000.0	9.000	100.0	H	103.0	19	29.72	68.26
1.223502	39.87	1000.0	9.000	100.0	H	114.0	19	25.97	65.85
1.613846	31.02	1000.0	9.000	100.0	H	160.0	19	32.42	63.44
6.439019	33.94	1000.0	9.000	100.0	H	253.0	19	35.56	69.50



2.5.17 Below 1GHz Radiated Emission Test (vStraw_CTPB4)

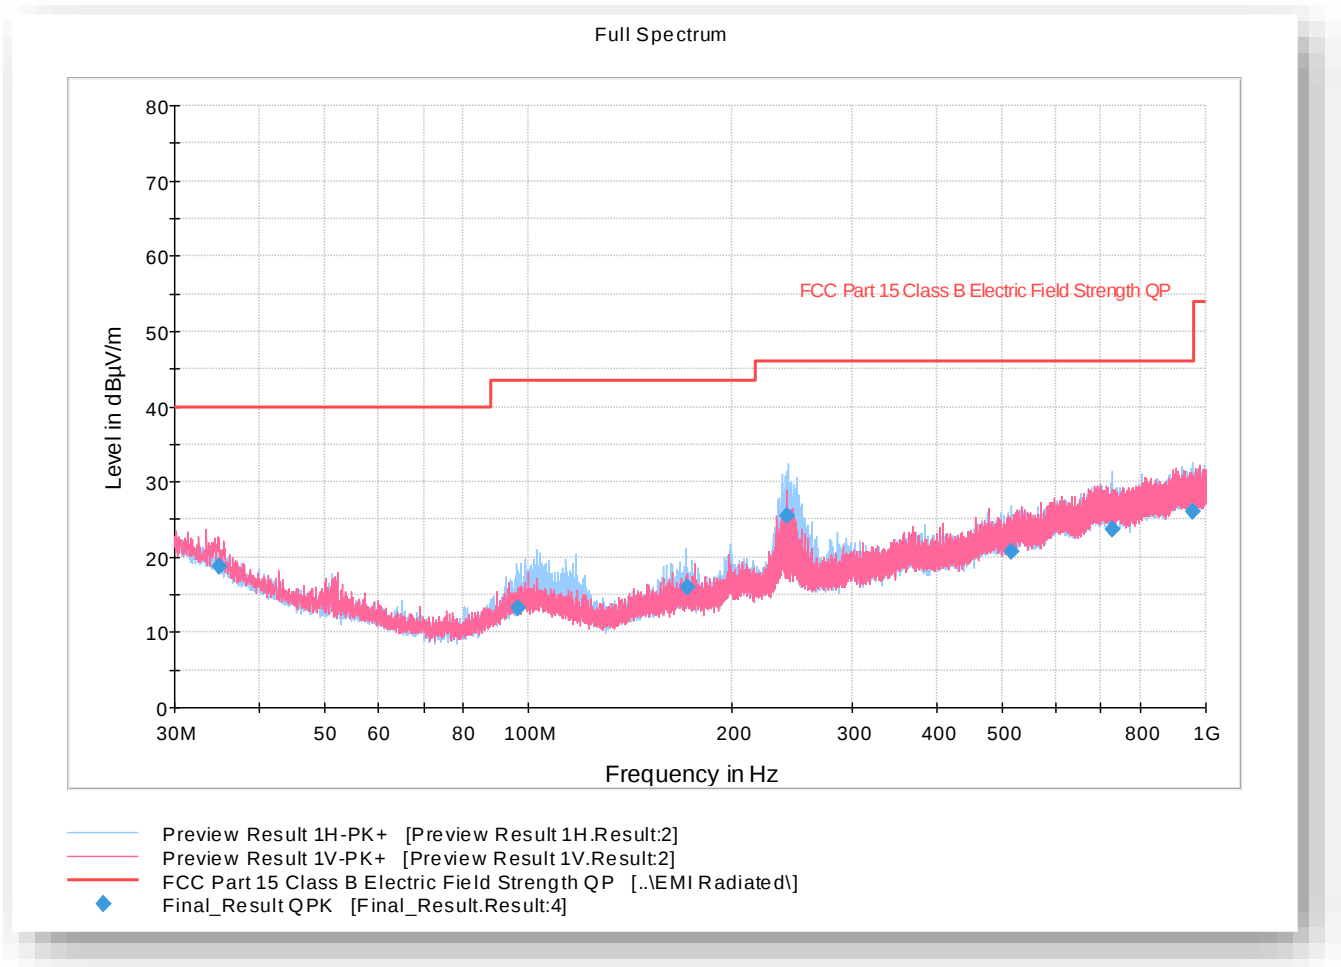


Quasi-Peak Data

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.867333	18.72	40.00	21.28	1000.0	120.000	100.0	V	166.0	-11
96.601667	13.17	43.50	30.33	1000.0	120.000	206.0	H	37.0	-16
171.471333	16.02	43.50	27.48	1000.0	120.000	182.0	H	287.0	-14
240.012667	25.41	46.00	20.59	1000.0	120.000	219.0	H	-18.0	-12
515.927333	20.77	46.00	25.23	1000.0	120.000	325.0	H	70.0	-5
727.631667	23.70	46.00	22.30	1000.0	120.000	220.0	H	6.0	-2
955.286333	26.06	46.00	19.94	1000.0	120.000	183.0	H	248.0	1



2.5.18 Above 1GHz (up to 18GHz) Radiated Emission Test (vStraw_CTPB4)

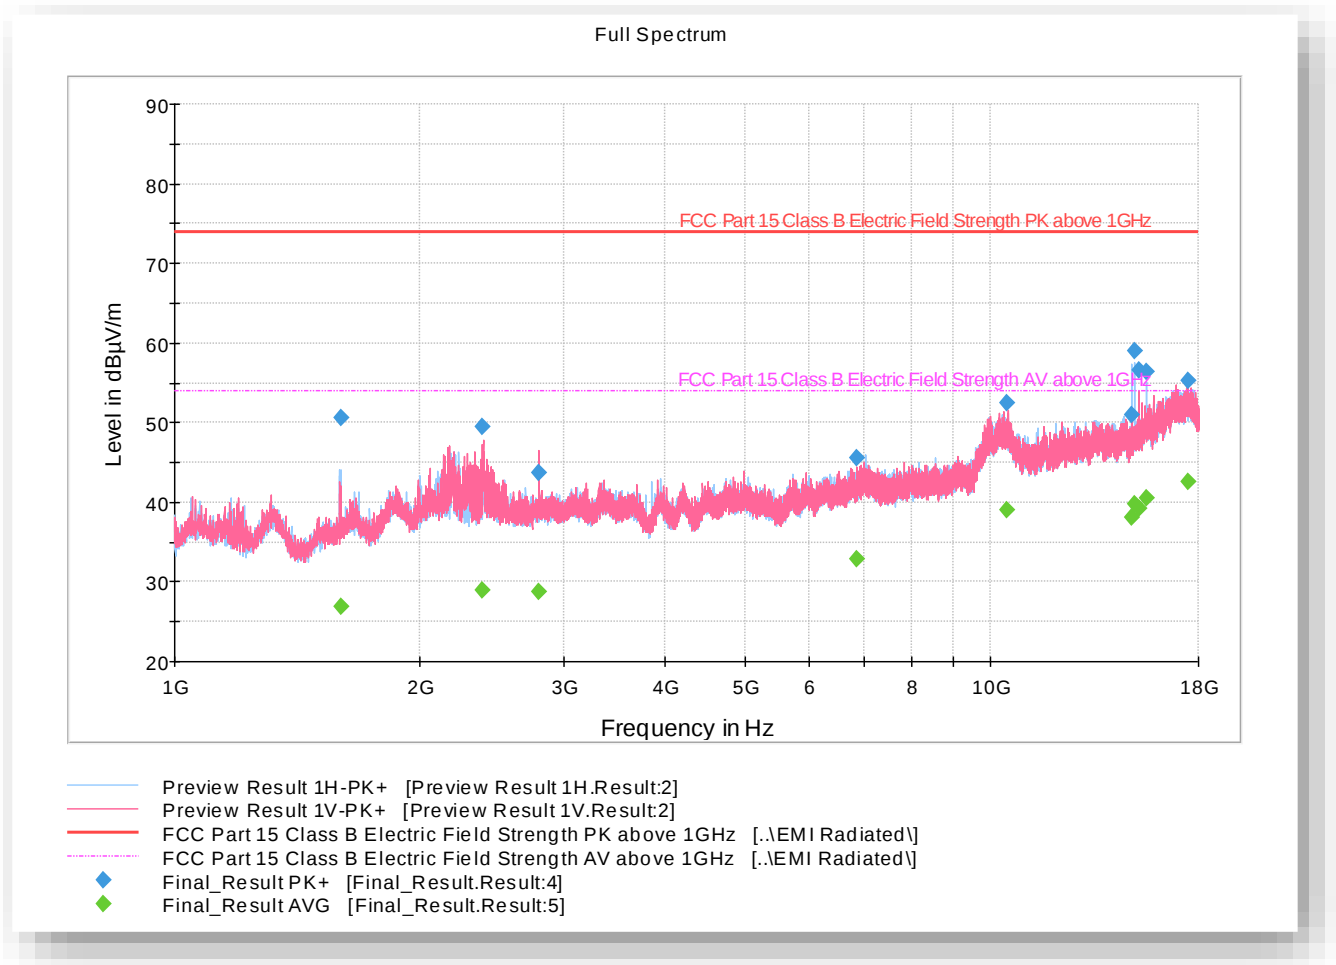

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1598.233333	50.68	73.90	23.22	1000.0	1000.000	139.0	H	219.0	0
2380.533333	49.44	73.90	24.46	1000.0	1000.000	253.0	V	97.0	3
2795.933333	43.68	73.90	30.22	1000.0	1000.000	369.0	V	147.0	4
6862.500000	45.54	73.90	28.36	1000.0	1000.000	175.0	V	74.0	11
10496.433333	52.48	73.90	21.42	1000.0	1000.000	175.0	V	109.0	19
14877.966667	50.91	73.90	22.99	1000.0	1000.000	126.0	H	7.0	18
15038.966667	58.99	73.90	14.91	1000.0	1000.000	175.0	H	24.0	19
15198.933333	56.66	73.90	17.24	1000.0	1000.000	257.0	V	17.0	19
15518.933333	56.34	73.90	17.56	1000.0	1000.000	328.0	H	316.0	19
17503.000000	55.27	73.90	18.63	1000.0	1000.000	330.0	V	236.0	22




Average Data

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1598.233333	26.87	53.90	27.03	1000.0	1000.000	139.0	H	219.0	0
2380.533333	28.97	53.90	24.93	1000.0	1000.000	253.0	V	97.0	3
2795.933333	28.82	53.90	25.08	1000.0	1000.000	369.0	V	147.0	4
6862.500000	32.86	53.90	21.04	1000.0	1000.000	175.0	V	74.0	11
10496.433333	39.01	53.90	14.89	1000.0	1000.000	175.0	V	109.0	19
14877.966667	38.17	53.90	15.73	1000.0	1000.000	126.0	H	7.0	18
15038.966667	39.80	53.90	14.10	1000.0	1000.000	175.0	H	24.0	19
15198.933333	39.32	53.90	14.58	1000.0	1000.000	257.0	V	17.0	19
15518.933333	40.58	53.90	13.32	1000.0	1000.000	328.0	H	316.0	19
17503.000000	42.50	53.90	11.40	1000.0	1000.000	330.0	V	236.0	22



2.5.19 18GHz to 26GHz Radiated Emission Test (vStraw_CTPB4)

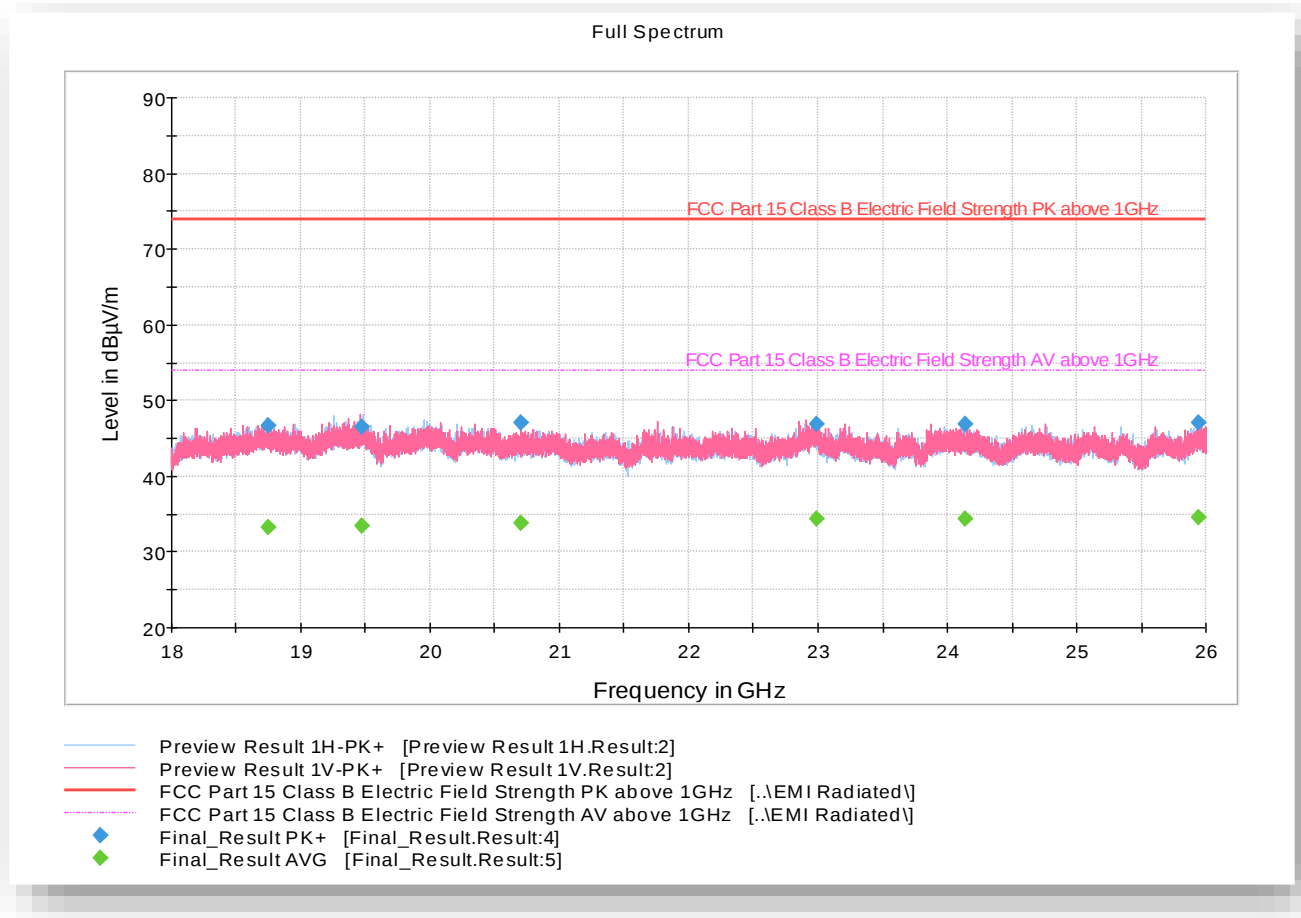

Peak Data


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18750.580000	46.76	73.90	27.14	1000.0	1000.000	162.0	V	346.0	0
19467.052500	46.55	73.90	27.35	1000.0	1000.000	154.0	V	213.0	-1
20703.361500	47.11	73.90	26.79	1000.0	1000.000	263.0	H	47.0	0
22993.678000	46.90	73.90	27.00	1000.0	1000.000	301.0	H	67.0	2
24137.513500	46.93	73.90	26.97	1000.0	1000.000	187.0	H	131.0	2
25945.842500	47.06	73.90	26.84	1000.0	1000.000	262.0	V	110.0	2

Average Data

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18750.580000	33.21	53.90	20.69	1000.0	1000.000	162.0	V	346.0	0
19467.052500	33.42	53.90	20.48	1000.0	1000.000	154.0	V	213.0	-1
20703.361500	33.75	53.90	20.15	1000.0	1000.000	263.0	H	47.0	0
22993.678000	34.45	53.90	19.45	1000.0	1000.000	301.0	H	67.0	2
24137.513500	34.38	53.90	19.52	1000.0	1000.000	187.0	H	131.0	2
25945.842500	34.49	53.90	19.41	1000.0	1000.000	262.0	V	110.0	2



2.5.20 26GHz to 40GHz Radiated Emission Test (12 Transmitters) (vStraw_CTPB4)

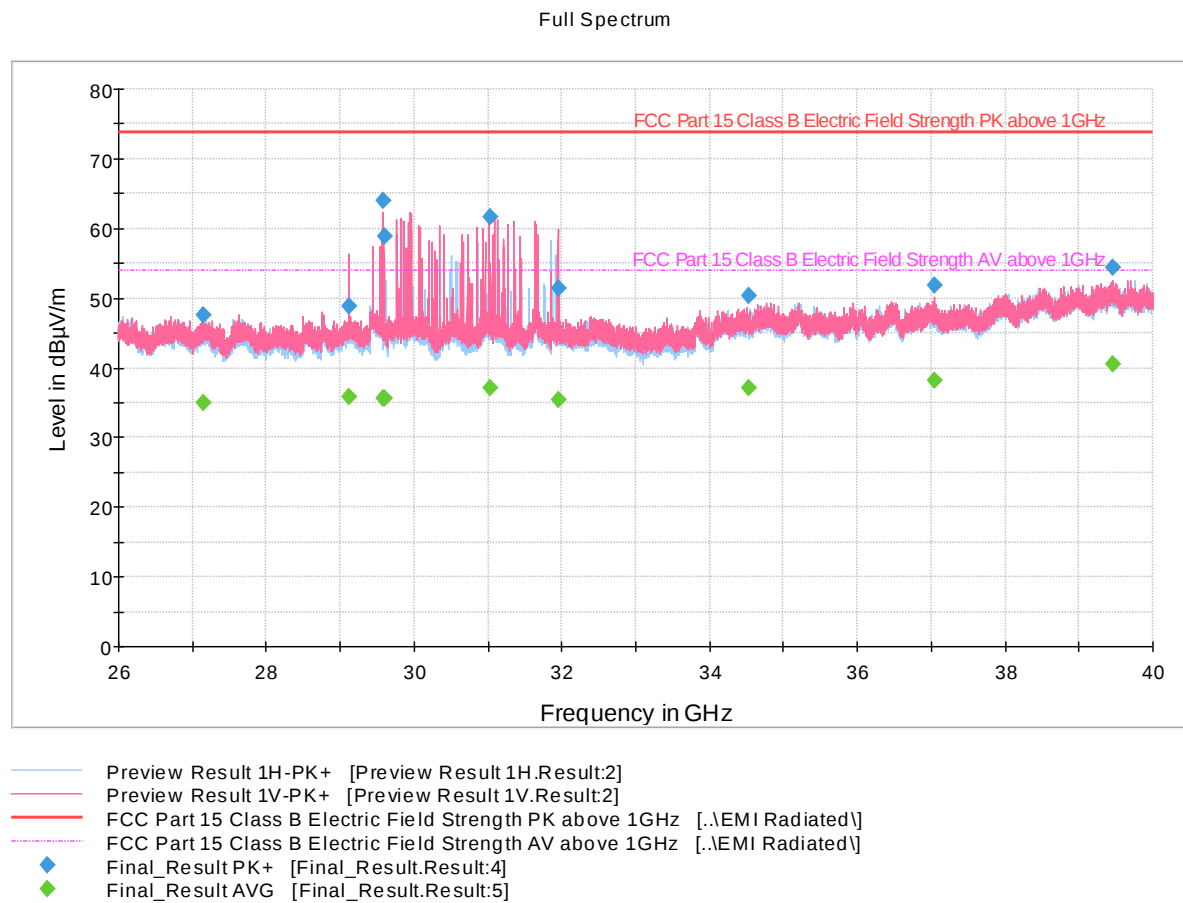

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
27137.578077	47.57	73.90	26.33	1000.0	1000.000	275.0	V	233.0	3
29122.739231	48.84	73.90	25.06	1000.0	1000.000	243.0	V	74.0	4
29590.338846	63.97	73.90	9.93	1000.0	1000.000	209.0	V	26.0	4
29590.784231	58.84	73.90	15.06	1000.0	1000.000	207.0	V	26.0	4
31020.262307	61.62	73.90	12.28	1000.0	1000.000	325.0	V	320.0	6
31954.308077	51.44	73.90	22.46	1000.0	1000.000	225.0	V	37.0	5
34520.133461	50.37	73.90	23.53	1000.0	1000.000	190.0	V	33.0	7
37038.680000	51.76	73.90	22.14	1000.0	1000.000	325.0	V	214.0	7
39461.146153	54.43	73.90	19.47	1000.0	1000.000	242.0	H	208.0	10




Average Data

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
27137.578077	34.91	53.90	18.99	1000.0	1000.000	275.0	V	233.0	3
29122.739231	35.75	53.90	18.15	1000.0	1000.000	243.0	V	74.0	4
29590.338846	35.69	53.90	18.21	1000.0	1000.000	209.0	V	26.0	4
29590.784231	35.61	53.90	18.29	1000.0	1000.000	207.0	V	26.0	4
31020.262307	37.03	53.90	16.87	1000.0	1000.000	325.0	V	320.0	6
31954.308077	35.32	53.90	18.58	1000.0	1000.000	225.0	V	37.0	5
34520.133461	37.12	53.90	16.78	1000.0	1000.000	190.0	V	33.0	7
37038.680000	38.11	53.90	15.79	1000.0	1000.000	325.0	V	214.0	7
39461.146153	40.45	53.90	13.45	1000.0	1000.000	242.0	H	208.0	10



2.5.21 26GHz to 40GHz Radiated Emission Test (24 Transmitters) (vStraw_CTPB4)

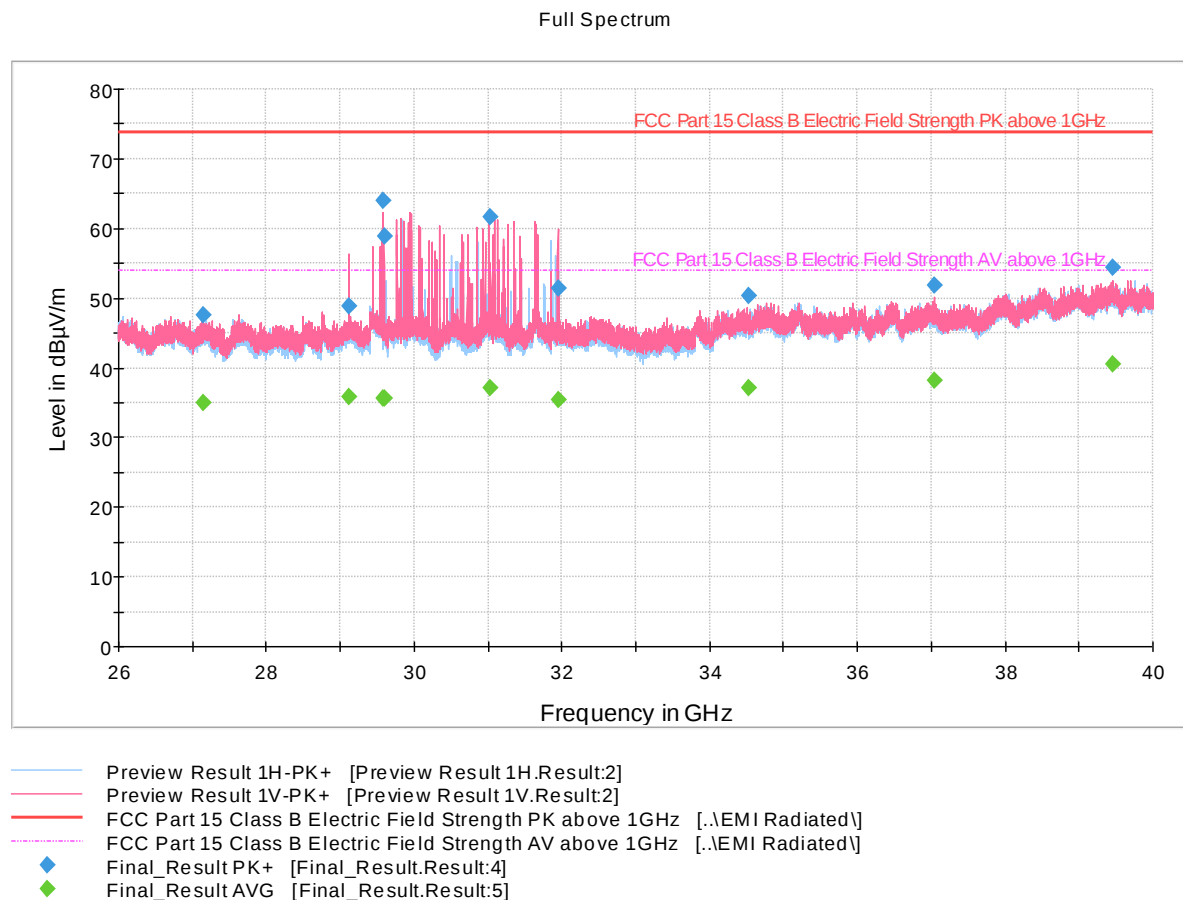

Peak Data


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
26038.608462	48.12	73.90	25.78	1000.0	1000.000	320.0	H	14.0	3
29432.305385	48.92	73.90	24.98	1000.0	1000.000	194.0	V	60.0	4
29440.761538	49.08	73.90	24.82	1000.0	1000.000	192.0	V	36.0	4
30074.608847	63.03	73.90	10.87	1000.0	1000.000	275.0	V	82.0	4
30803.975385	50.86	73.90	23.04	1000.0	1000.000	176.0	V	105.0	5
31655.325000	65.24	73.90	8.66	1000.0	1000.000	256.0	V	318.0	6
34649.402693	49.96	73.90	23.94	1000.0	1000.000	175.0	V	191.0	7
36801.016922	49.82	73.90	24.08	1000.0	1000.000	227.0	V	315.0	7
39512.818462	52.71	73.90	21.19	1000.0	1000.000	179.0	V	288.0	10




Average Data

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
26038.608462	35.01	53.90	18.89	1000.0	1000.000	320.0	H	14.0	3
29432.305385	36.22	53.90	17.68	1000.0	1000.000	194.0	V	60.0	4
29440.761538	36.34	53.90	17.56	1000.0	1000.000	192.0	V	36.0	4
30074.608847	35.82	53.90	18.08	1000.0	1000.000	275.0	V	82.0	4
30803.975385	36.90	53.90	17.00	1000.0	1000.000	176.0	V	105.0	5
31655.325000	36.69	53.90	17.21	1000.0	1000.000	256.0	V	318.0	6
34649.402693	37.11	53.90	16.79	1000.0	1000.000	175.0	V	191.0	7
36801.016922	36.83	53.90	17.07	1000.0	1000.000	227.0	V	315.0	7
39512.818462	40.05	53.90	13.85	1000.0	1000.000	179.0	V	288.0	10


2.5.22 40GHz to 200GHz Maximized Plots (vStraw_CTPB4)

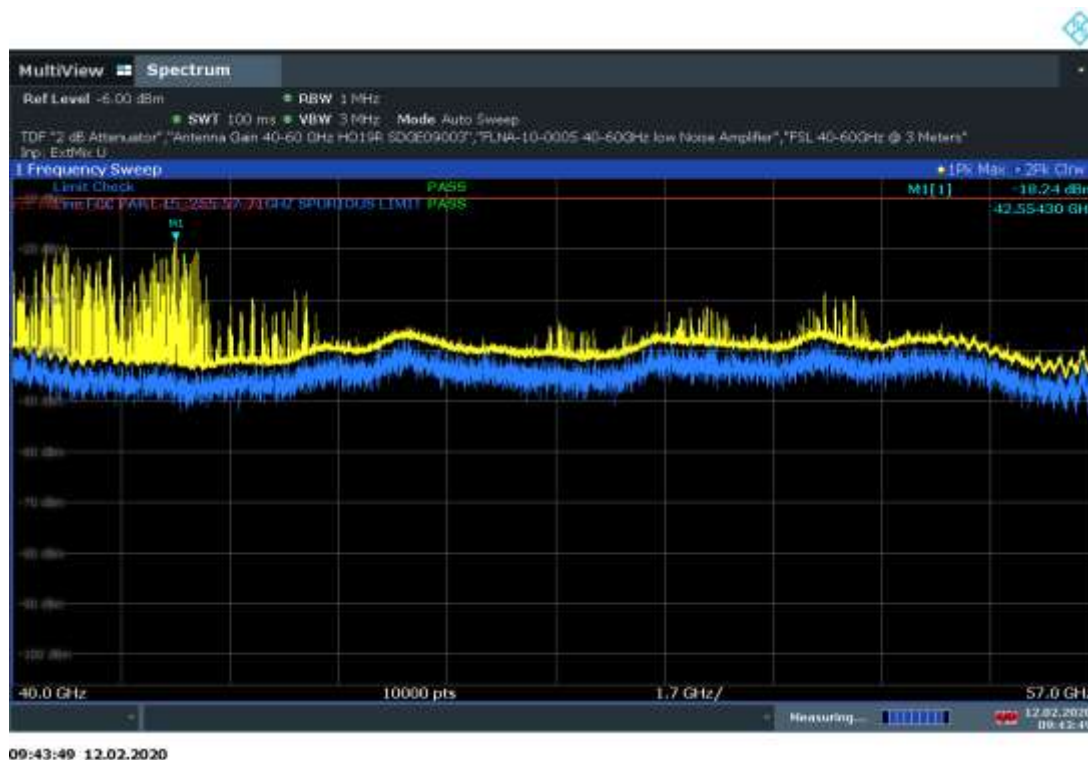


40GHz to 57GHz Plot (12 Transmitters)

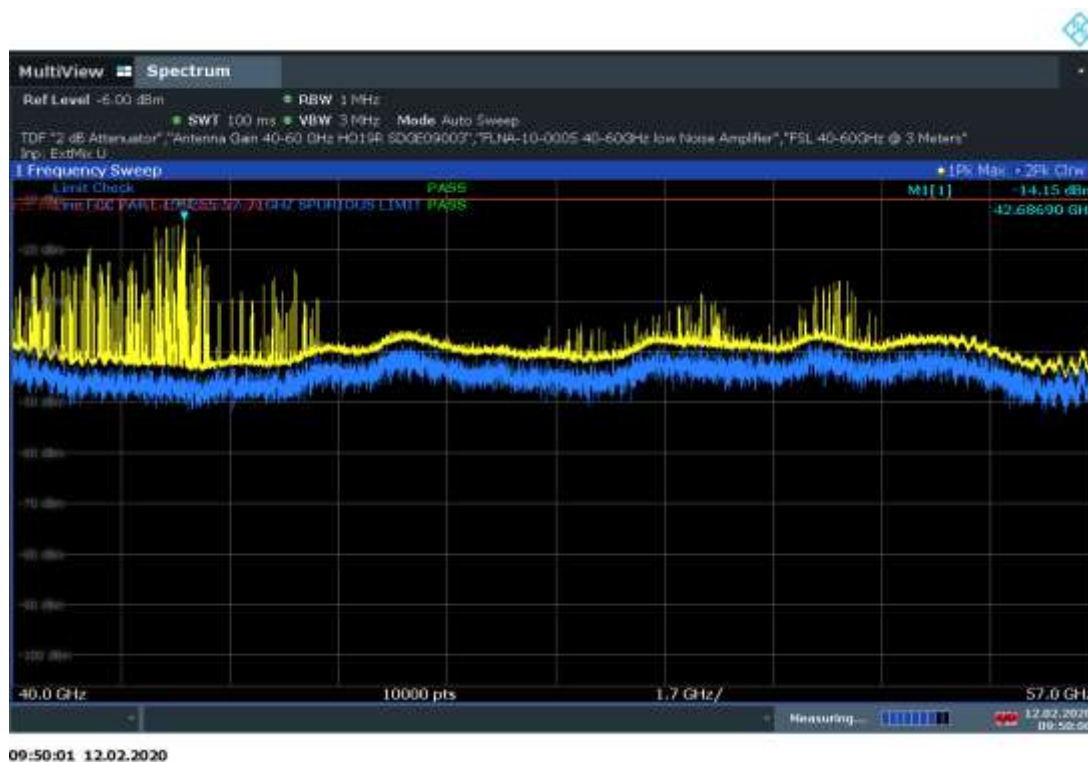

40GHz to 57GHz Plot (24 Transmitters)

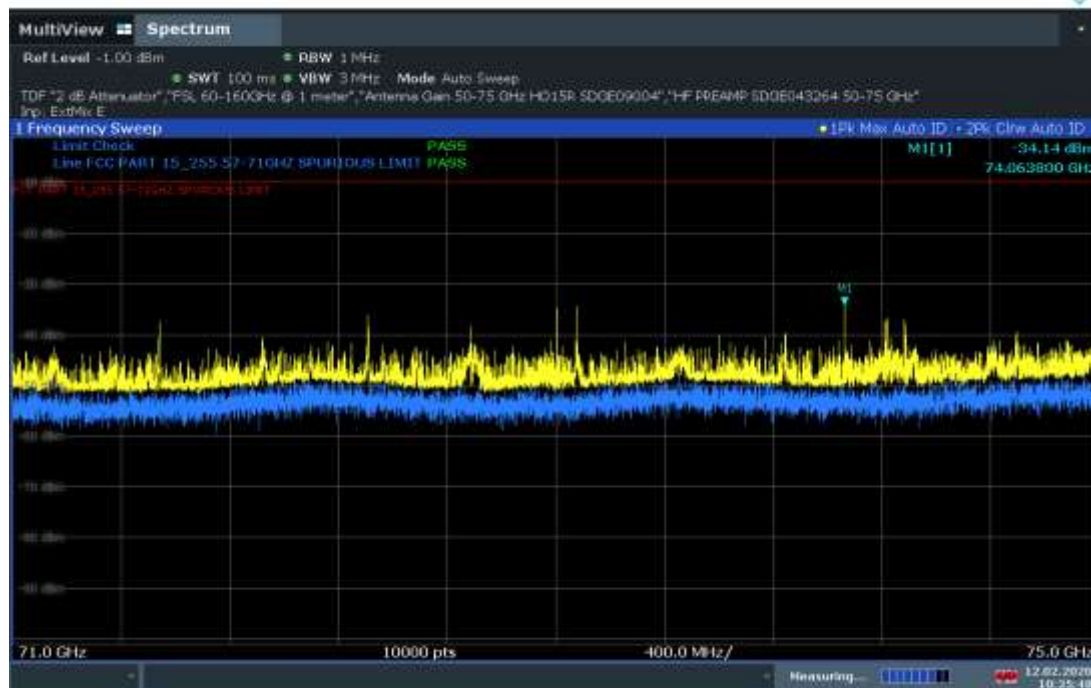

71GHz to 75GHz Plot (12 Transmitters)

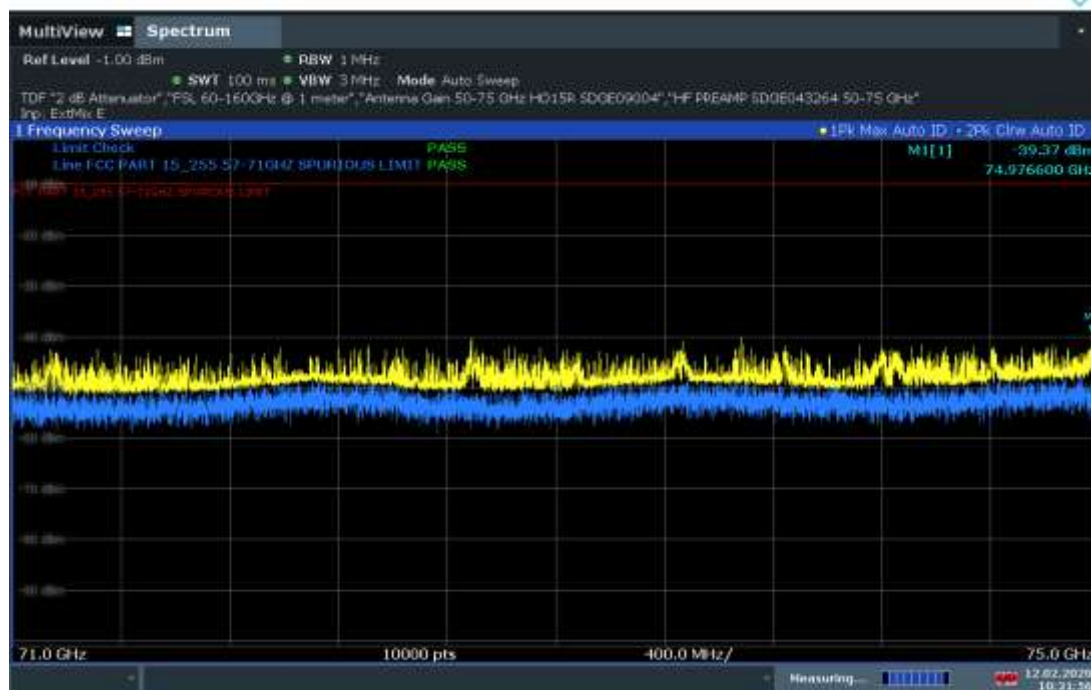

71GHz to 75GHz Plot (24 Transmitters)




75GHz to 110GHz Plot (12 Transmitters)




75GHz to 110GHz Plot (24 Transmitters)



110GHz to 140GHz Plot (12 Transmitters)

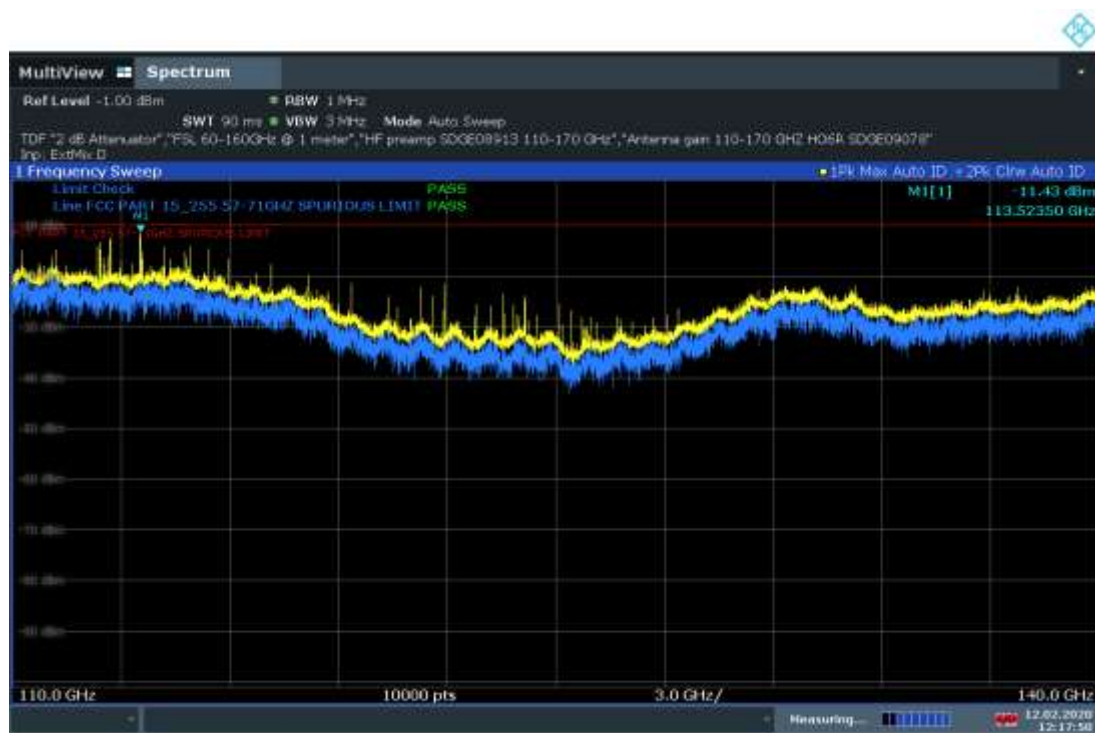


110GHz to 140GHz Plot (24 Transmitters)

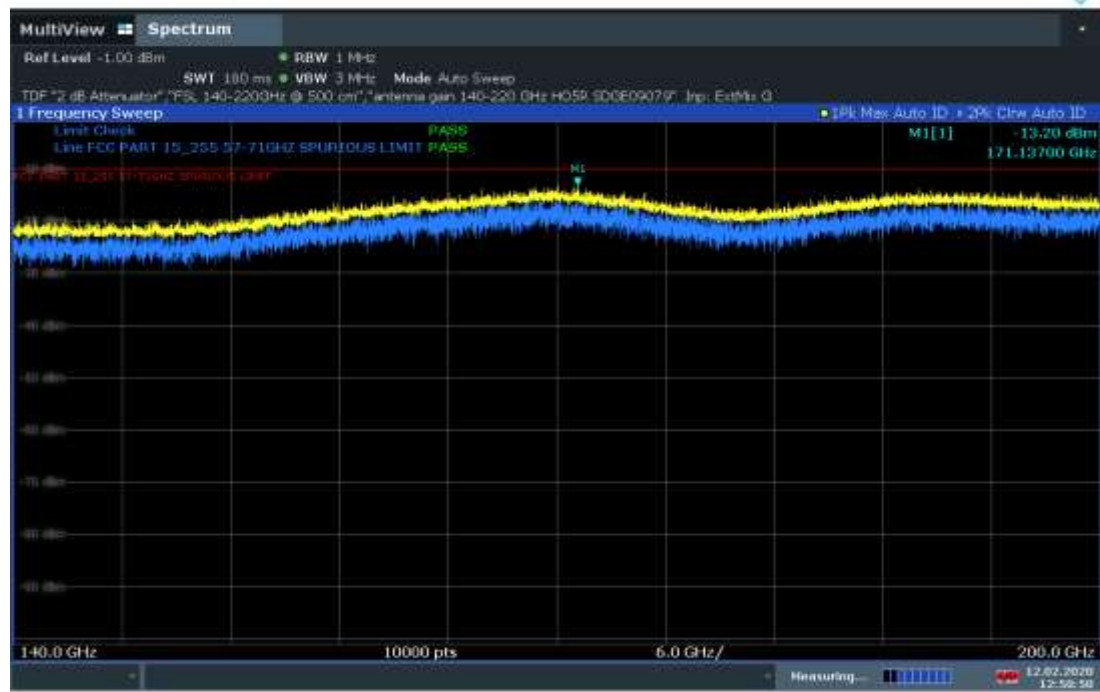

12:50:50 12.02.2020


140GHz to 200GHz Plot (12 Transmitters)

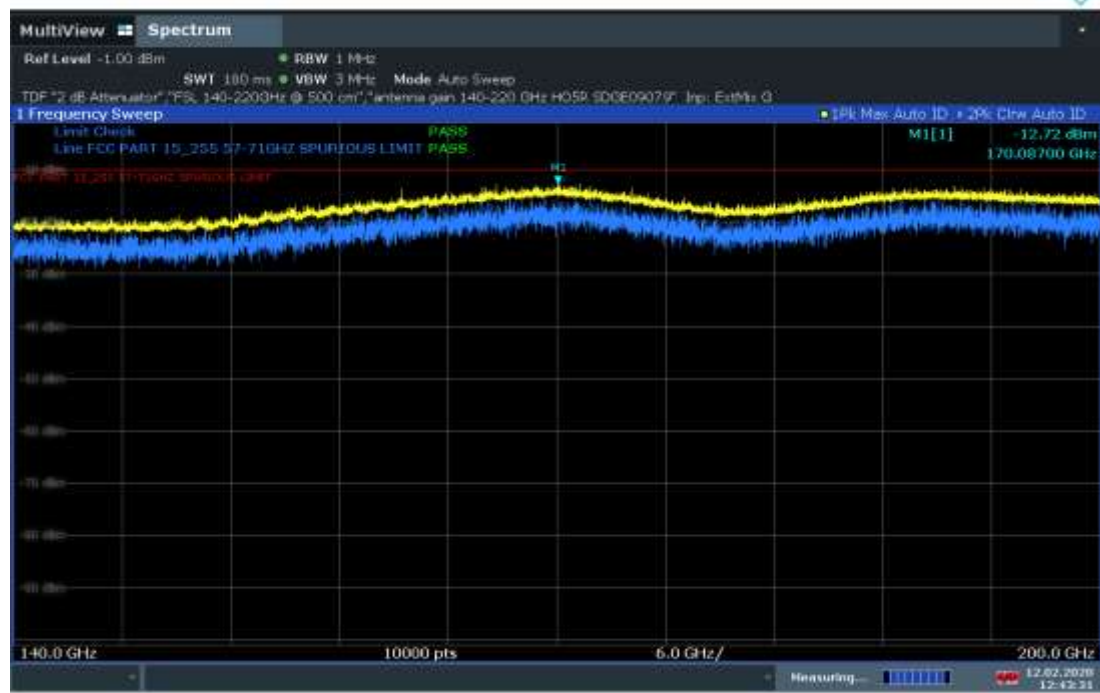

12:43:31 12.02.2020

140GHz to 200GHz Plot (24 Transmitters)

2.5.23 Below 30MHz Radiated Emission Test (vStraw_CTPB4_I)

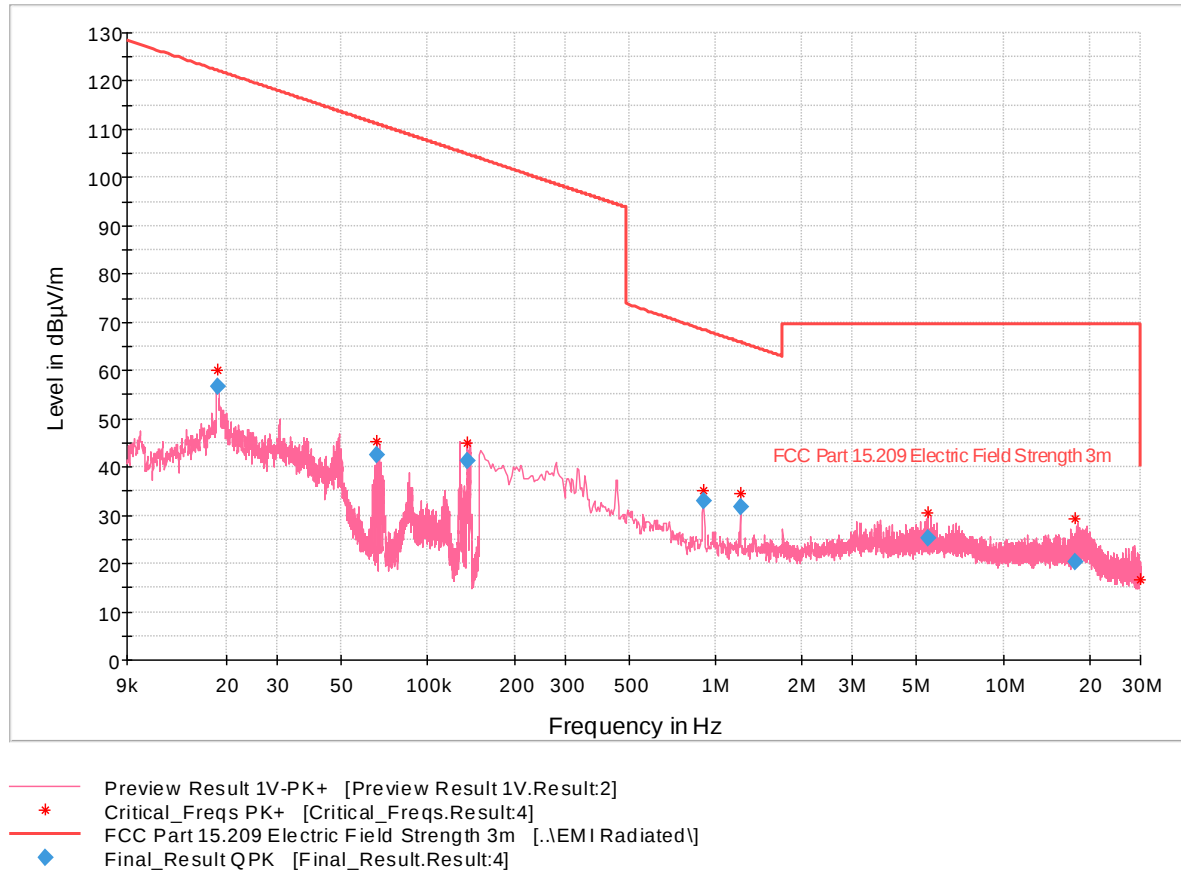


Quasi-Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018606	56.83	122.20	65.37	1000.0	0.200	H	94.0	15
0.066627	42.53	111.13	68.60	1000.0	0.200	H	119.0	14
0.137306	41.21	104.85	63.63	1000.0	0.200	H	192.0	14
0.908639	32.93	68.43	35.50	1000.0	9.000	H	183.0	14
1.224477	31.88	65.84	33.96	1000.0	9.000	H	205.0	14
5.489759	25.34	69.50	44.16	1000.0	9.000	H	148.0	14
17.873802	20.44	69.50	49.06	1000.0	9.000	H	16.0	15



2.5.24 Below 1GHz Radiated Emission Test (vStraw_CTPB4_I)

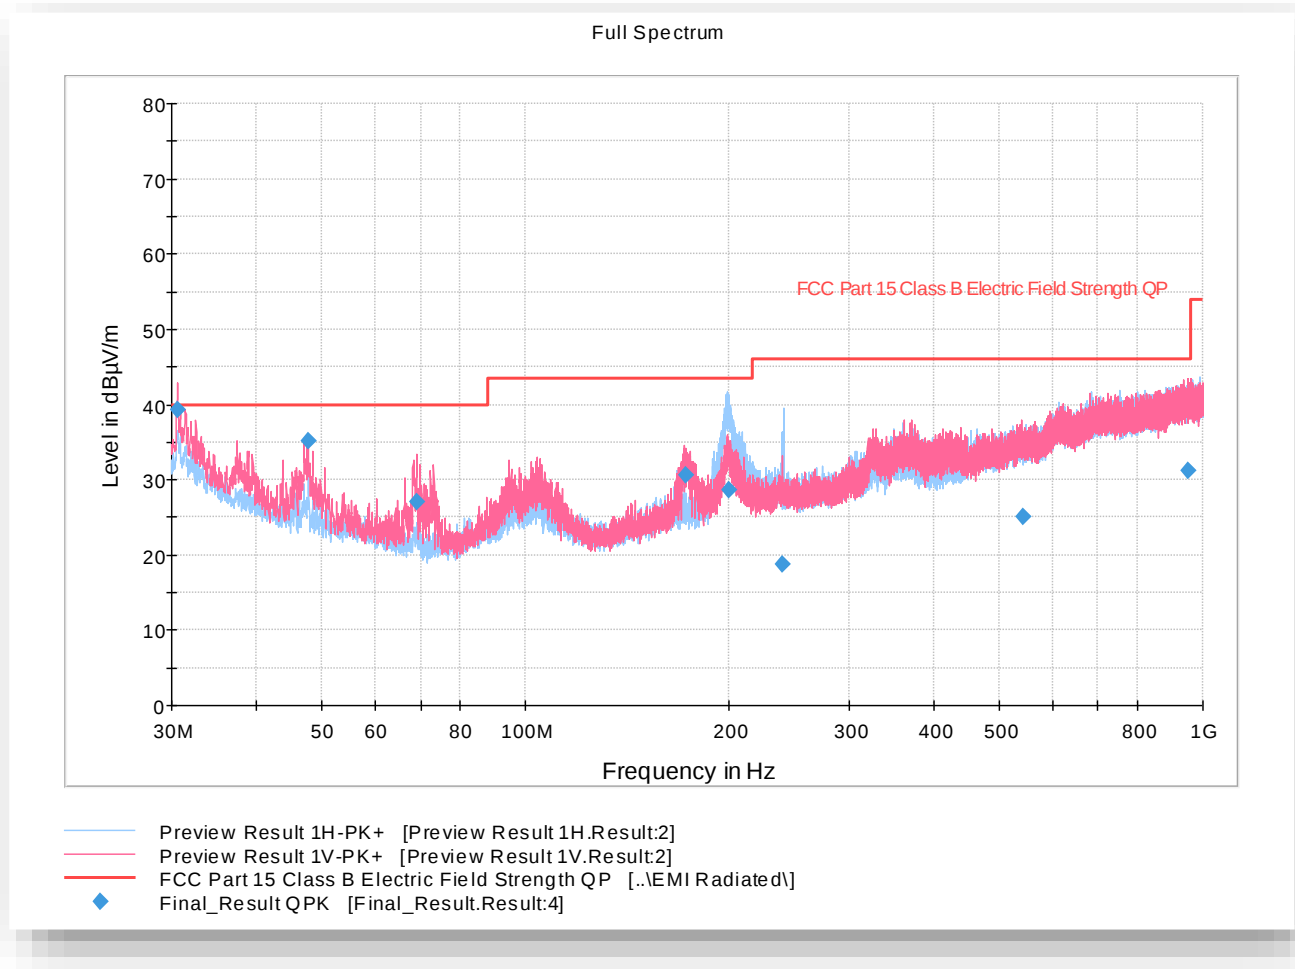


Quasi-Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.600000	39.26	40.00	0.74	1000.0	120.000	100.0	V	24.0	22
47.783333	35.21	40.00	4.79	1000.0	120.000	225.0	V	266.0	15
69.114000	27.03	40.00	12.97	1000.0	120.000	107.0	V	279.0	12
172.749333	30.62	43.50	12.88	1000.0	120.000	100.0	V	173.0	17
199.770667	28.55	43.50	14.95	1000.0	120.000	175.0	H	139.0	17
239.305333	18.82	46.00	27.18	1000.0	120.000	175.0	H	20.0	20
541.238000	25.18	46.00	20.82	1000.0	120.000	225.0	V	20.0	26
949.113333	31.13	46.00	14.87	1000.0	120.000	401.0	V	152.0	31



2.5.25 Above 1GHz (up to 18GHz) Radiated Emission Test (vStraw_CTPB4_I)

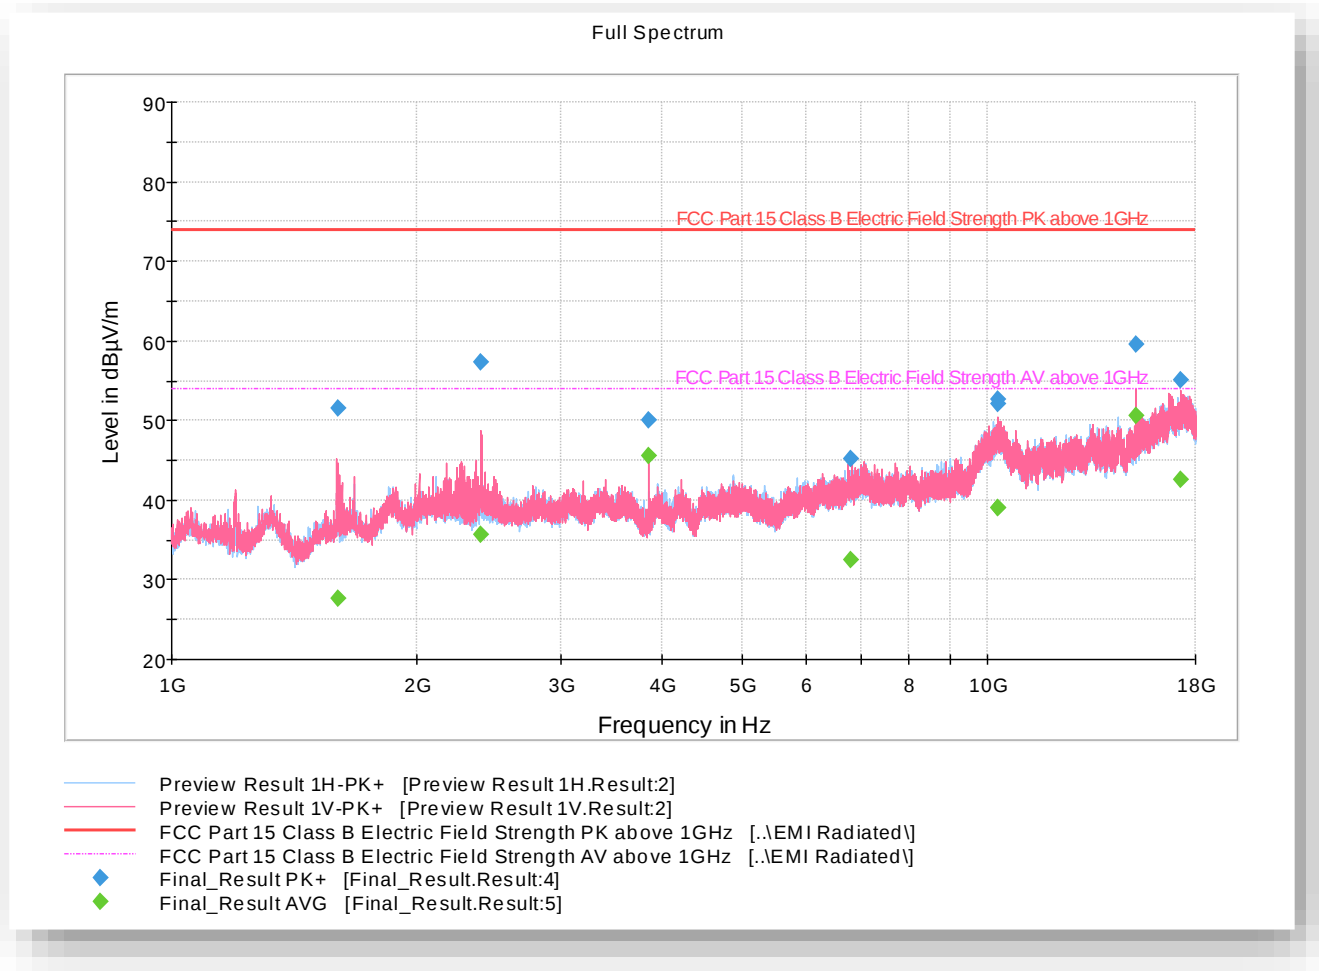

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1599.200000	51.59	73.90	22.31	1000.0	1000.000	275.0	V	218.0	0
2393.566667	57.35	73.90	16.55	1000.0	1000.000	324.0	V	221.0	3
3839.766667	50.02	73.90	23.88	1000.0	1000.000	275.0	V	41.0	5
6812.066667	45.25	73.90	28.65	1000.0	1000.000	175.0	V	30.0	11
10298.666667	52.05	73.90	21.85	1000.0	1000.000	375.0	V	332.0	19
10303.066667	52.70	73.90	21.20	1000.0	1000.000	343.0	V	294.0	19
15199.333333	59.61	73.90	14.29	1000.0	1000.000	242.0	V	76.0	19
17286.600000	55.08	73.90	18.82	1000.0	1000.000	175.0	V	172.0	22




Average Data

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1599.200000	27.67	53.90	26.23	1000.0	1000.000	275.0	V	218.0	0
2393.566667	35.62	53.90	18.28	1000.0	1000.000	324.0	V	221.0	3
3839.766667	45.62	53.90	8.28	1000.0	1000.000	275.0	V	41.0	5
6812.066667	32.60	53.90	21.30	1000.0	1000.000	175.0	V	30.0	11
10298.666667	39.11	53.90	14.79	1000.0	1000.000	375.0	V	332.0	19
10303.066667	39.13	53.90	14.77	1000.0	1000.000	343.0	V	294.0	19
15199.333333	50.67	53.90	3.23	1000.0	1000.000	242.0	V	76.0	19
17286.600000	42.52	53.90	11.38	1000.0	1000.000	175.0	V	172.0	22



2.5.26 18GHz to 26GHz Radiated Emission Test (vStraw_CTPB4_I)

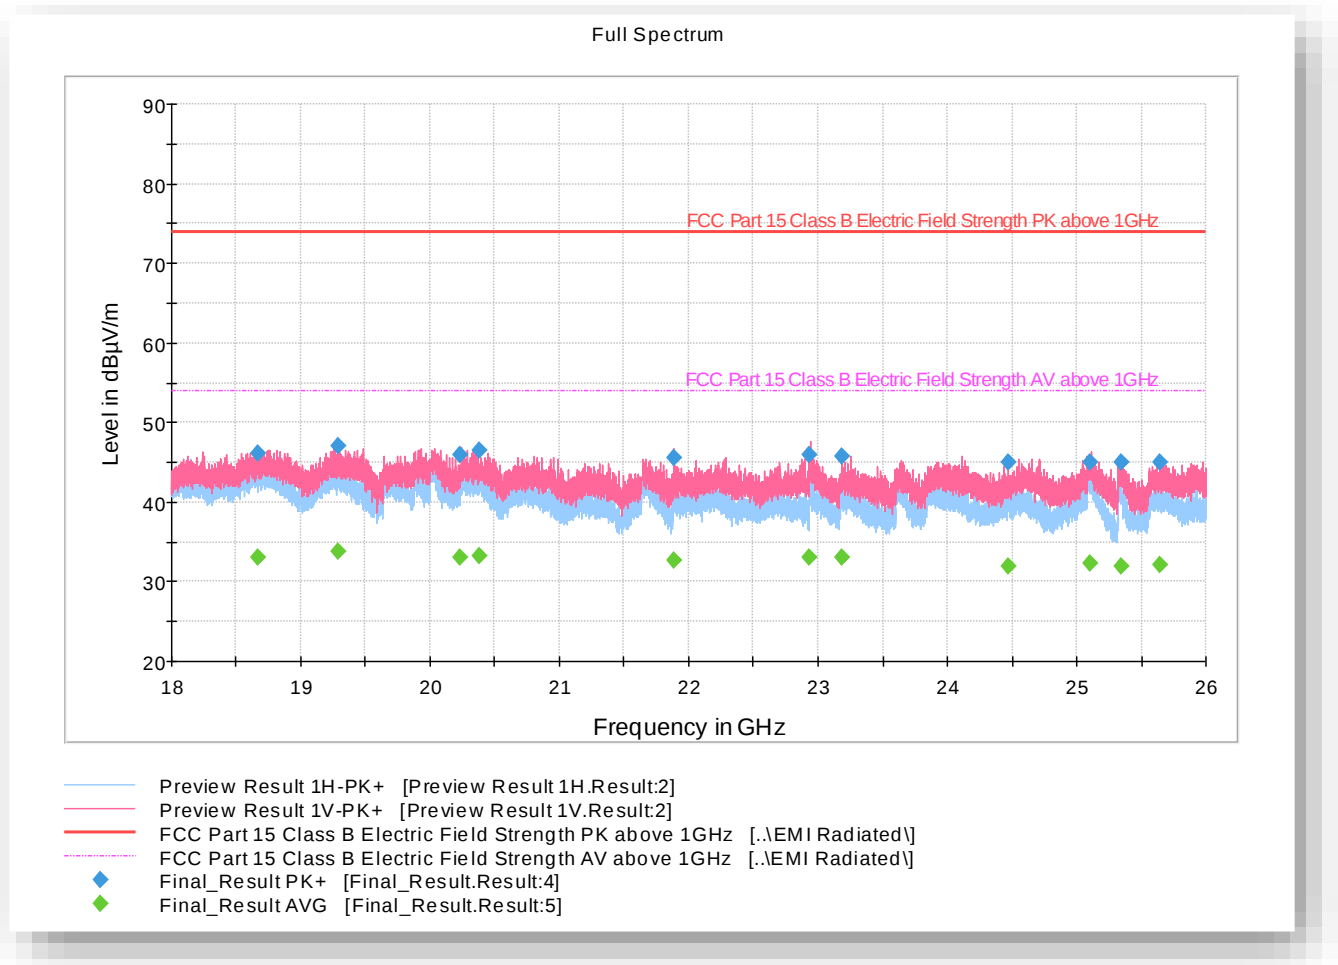

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18667.293500	46.09	73.90	27.81	1000.0	1000.000	163.0	V	59.0	0
19284.775500	47.05	73.90	26.85	1000.0	1000.000	162.0	V	0.0	0
20233.945500	45.92	73.90	27.98	1000.0	1000.000	162.0	V	357.0	0
20377.802500	46.53	73.90	27.37	1000.0	1000.000	159.0	V	137.0	0
21885.585500	45.49	73.90	28.41	1000.0	1000.000	139.0	V	68.0	1
22935.151000	45.92	73.90	27.98	1000.0	1000.000	152.0	V	340.0	2
23189.303000	45.83	73.90	28.07	1000.0	1000.000	162.0	V	216.0	2
24470.345500	45.01	73.90	28.89	1000.0	1000.000	156.0	V	185.0	2
25108.601500	44.93	73.90	28.97	1000.0	1000.000	153.0	V	191.0	2
25343.849500	45.07	73.90	28.83	1000.0	1000.000	148.0	V	115.0	2
25642.480000	44.94	73.90	28.96	1000.0	1000.000	163.0	V	137.0	2




Average Data

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18667.293500	33.05	53.90	20.85	1000.0	1000.000	163.0	V	59.0	0
19284.775500	33.80	53.90	20.10	1000.0	1000.000	162.0	V	0.0	0
20233.945500	33.05	53.90	20.85	1000.0	1000.000	162.0	V	357.0	0
20377.802500	33.16	53.90	20.74	1000.0	1000.000	159.0	V	137.0	0
21885.585500	32.78	53.90	21.12	1000.0	1000.000	139.0	V	68.0	1
22935.151000	32.99	53.90	20.91	1000.0	1000.000	152.0	V	340.0	2
23189.303000	33.05	53.90	20.85	1000.0	1000.000	162.0	V	216.0	2
24470.345500	31.86	53.90	22.04	1000.0	1000.000	156.0	V	185.0	2
25108.601500	32.34	53.90	21.56	1000.0	1000.000	153.0	V	191.0	2
25343.849500	32.04	53.90	21.86	1000.0	1000.000	148.0	V	115.0	2
25642.480000	32.13	53.90	21.77	1000.0	1000.000	163.0	V	137.0	2



2.5.27 26GHz to 40GHz Radiated Emission Test (vStraw_CTPB4_I)

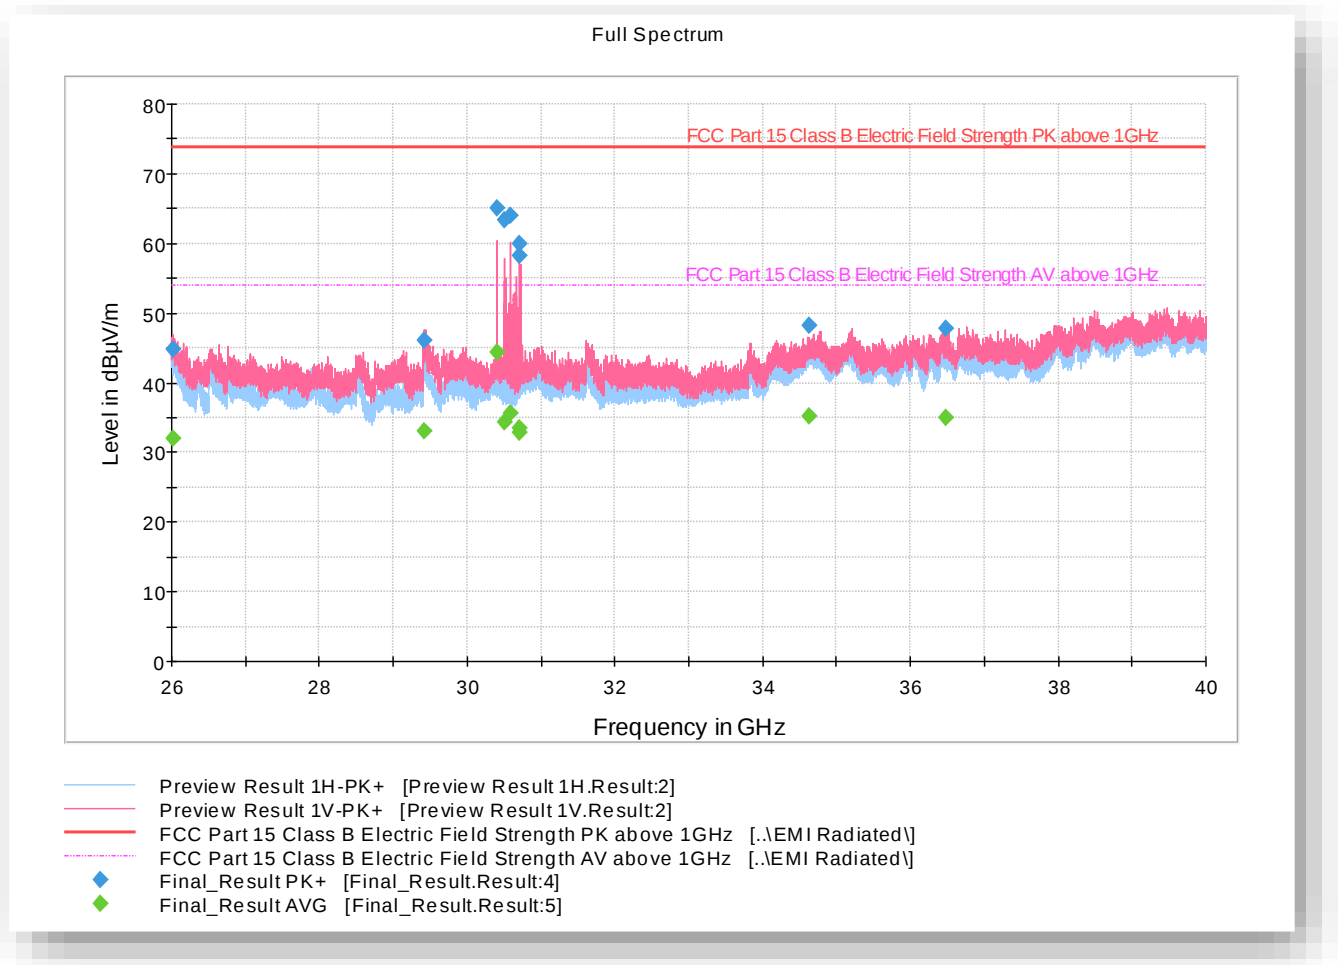

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
26020.693846	44.80	73.90	29.10	1000.0	1000.000	175.0	V	14.0	3
29426.871923	46.01	73.90	27.89	1000.0	1000.000	138.0	V	95.0	4
30398.500000	64.98	73.90	8.92	1000.0	1000.000	156.0	V	78.0	4
30513.998462	63.40	73.90	10.50	1000.0	1000.000	162.0	V	79.0	4
30586.056924	64.03	73.90	9.87	1000.0	1000.000	140.0	V	6.0	5
30708.729615	58.23	73.90	15.67	1000.0	1000.000	152.0	V	335.0	5
30716.324231	59.96	73.90	13.94	1000.0	1000.000	154.0	V	340.0	5
34625.627308	48.24	73.90	25.66	1000.0	1000.000	270.0	V	64.0	7
36474.606539	47.81	73.90	26.09	1000.0	1000.000	150.0	V	7.0	7




Average Data

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
26020.693846	32.01	53.90	21.89	1000.0	1000.000	175.0	V	14.0	3
29426.871923	33.15	53.90	20.75	1000.0	1000.000	138.0	V	95.0	4
30398.500000	44.35	53.90	9.55	1000.0	1000.000	156.0	V	78.0	4
30513.998462	34.38	53.90	19.52	1000.0	1000.000	162.0	V	79.0	4
30586.056924	35.54	53.90	18.36	1000.0	1000.000	140.0	V	6.0	5
30708.729615	32.91	53.90	20.99	1000.0	1000.000	152.0	V	335.0	5
30716.324231	33.49	53.90	20.41	1000.0	1000.000	154.0	V	340.0	5
34625.627308	35.23	53.90	18.67	1000.0	1000.000	270.0	V	64.0	7
36474.606539	35.00	53.90	18.90	1000.0	1000.000	150.0	V	7.0	7


2.5.28 40GHz to 200GHz Maximized Plots (vStraw_CTPB4_I)



40GHz to 60GHz Plot (12 Transmitters)

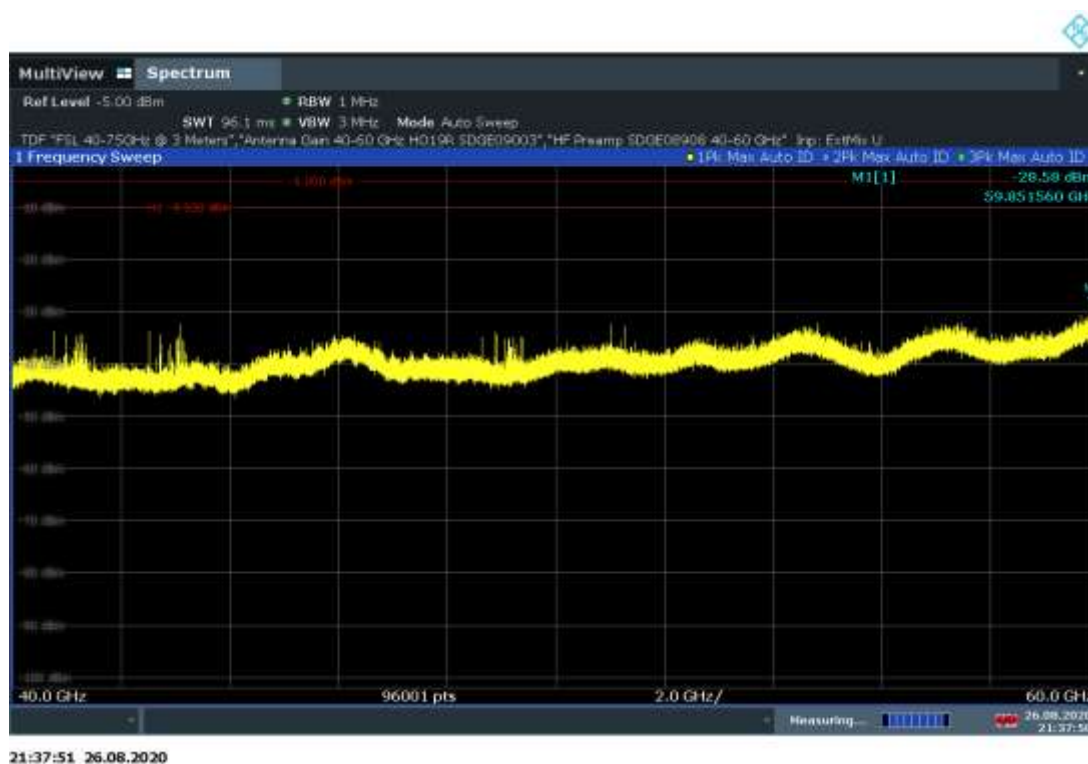


40GHz to 60GHz Plot (24 Transmitters)

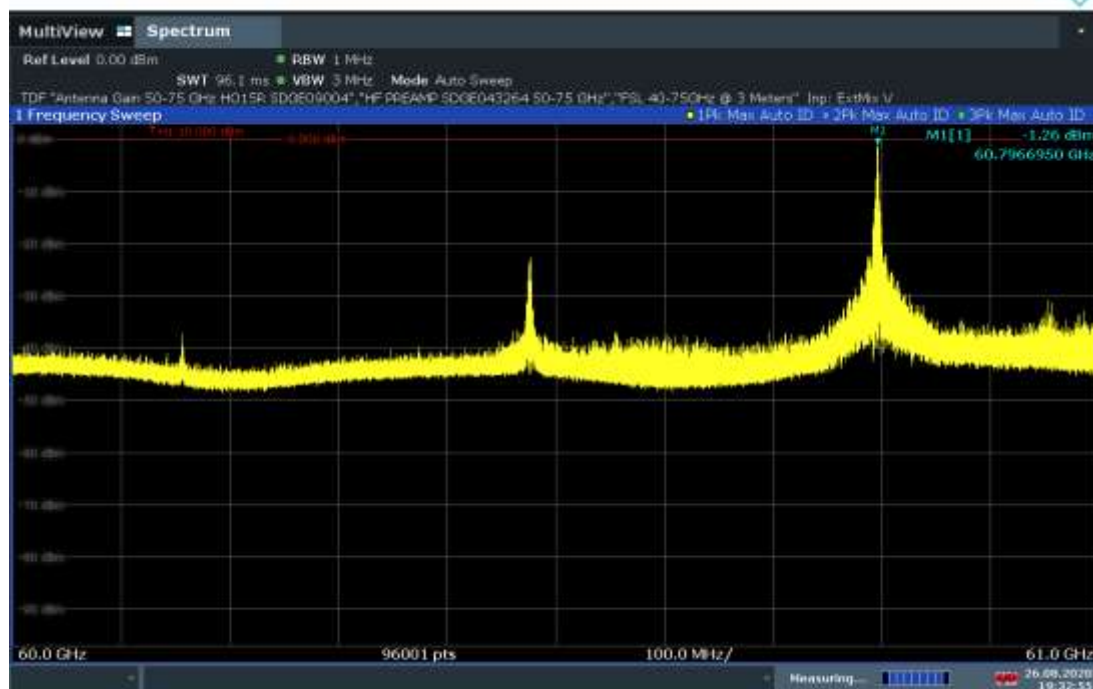

19:32:56 26.08.2020

60GHz to 61GHz Plot (12 Transmitters)

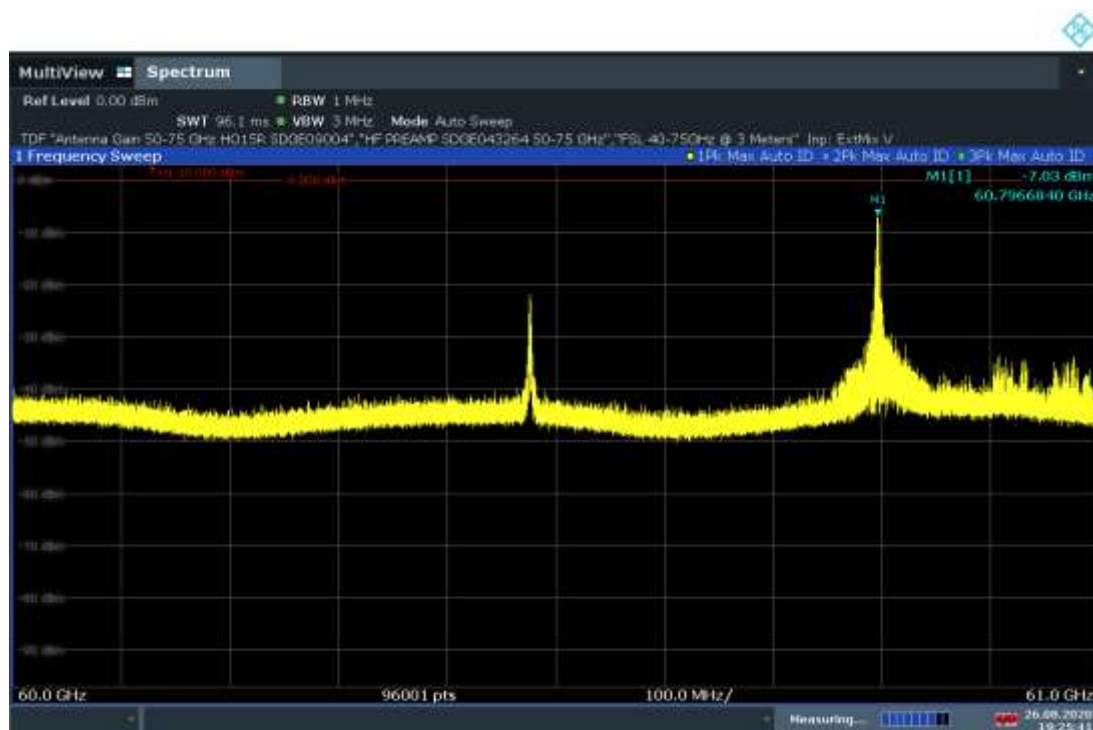


19:25:41 26.08.2020

60GHz to 61GHz Plot (24 Transmitters)



00:22:53 26.08.2020

61GHz to 71GHz Plot (12 Transmitters)

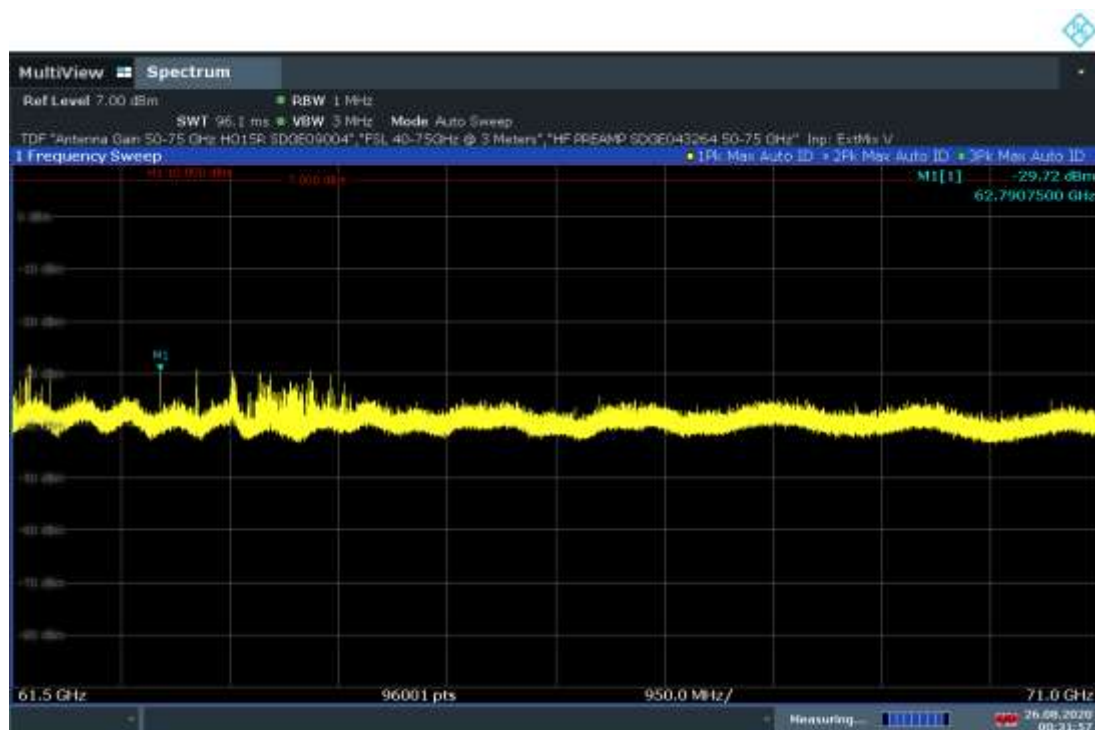


00:31:57 26.08.2020


61GHz to 71GHz Plot (24 Transmitters)




71GHz to 75GHz Plot (12 Transmitters)

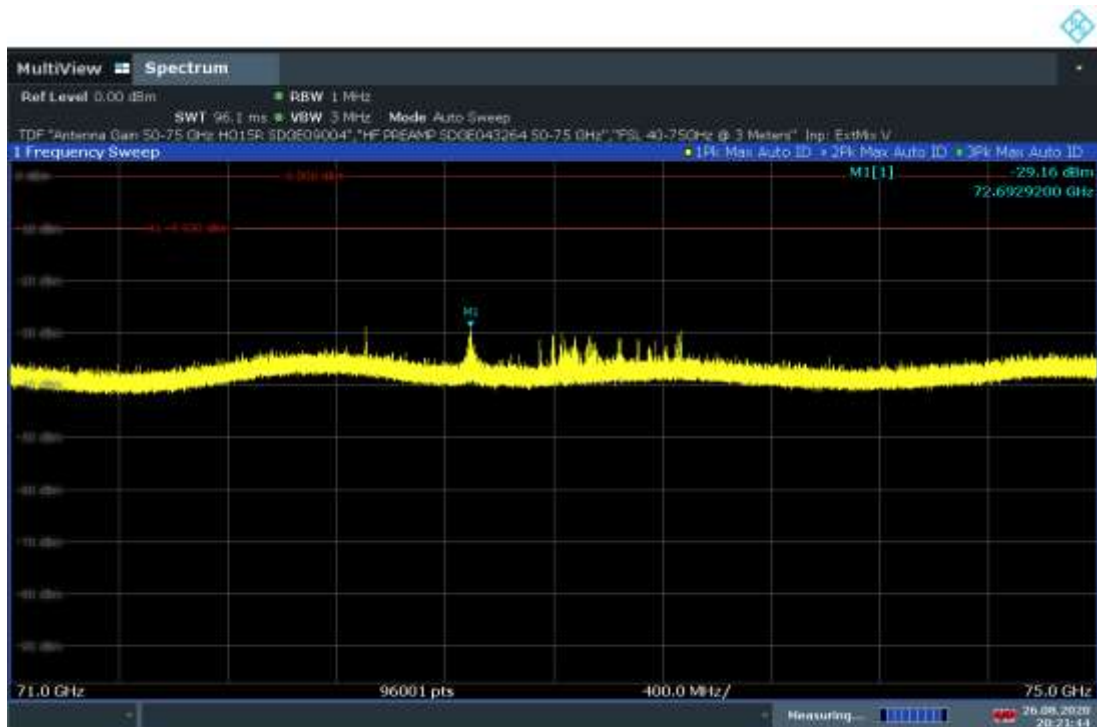


71GHz to 75GHz Plot (24 Transmitters)

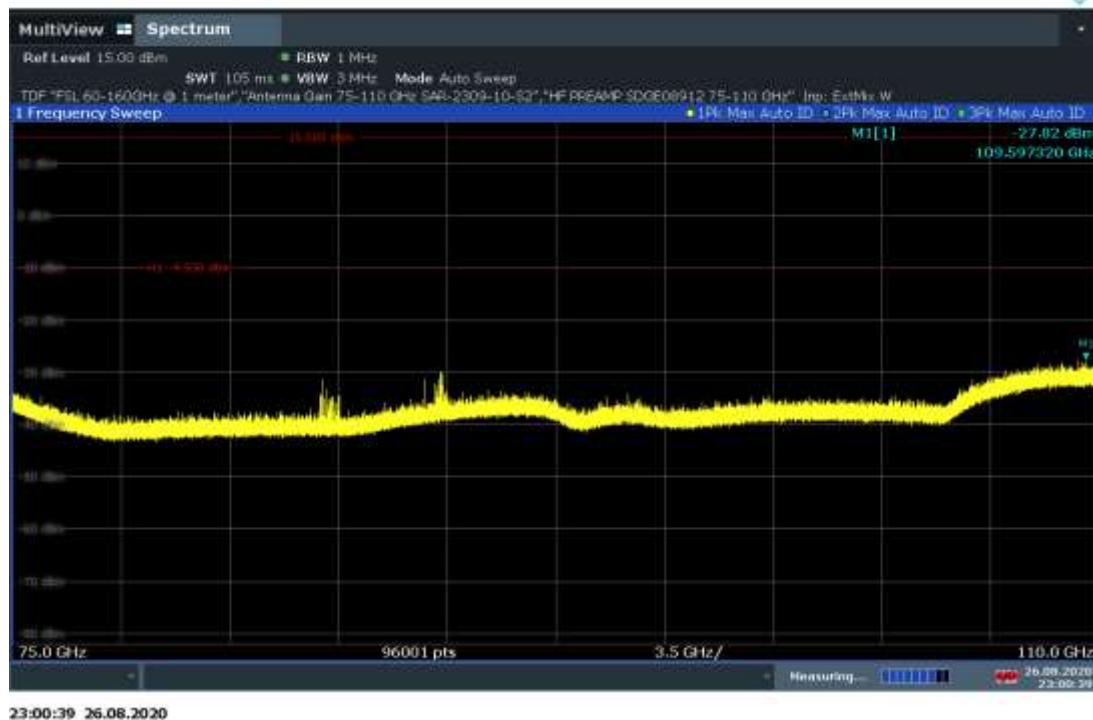


75GHz to 110GHz Plot (12 Transmitters)

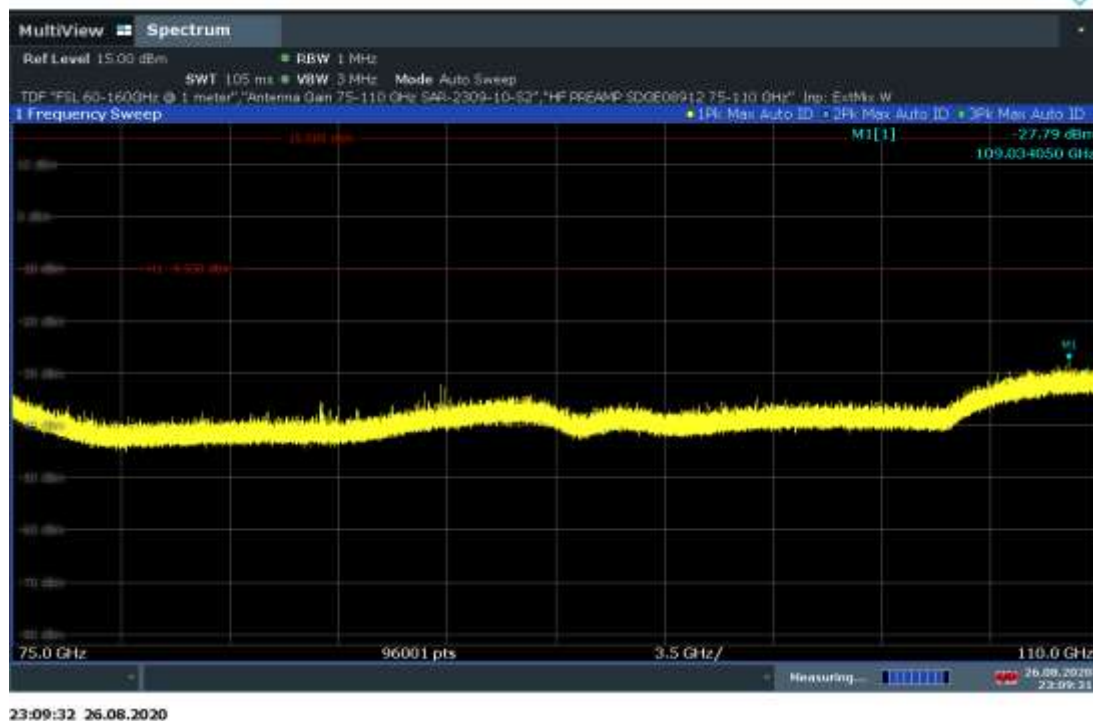


75GHz to 110GHz Plot (24 Transmitters)

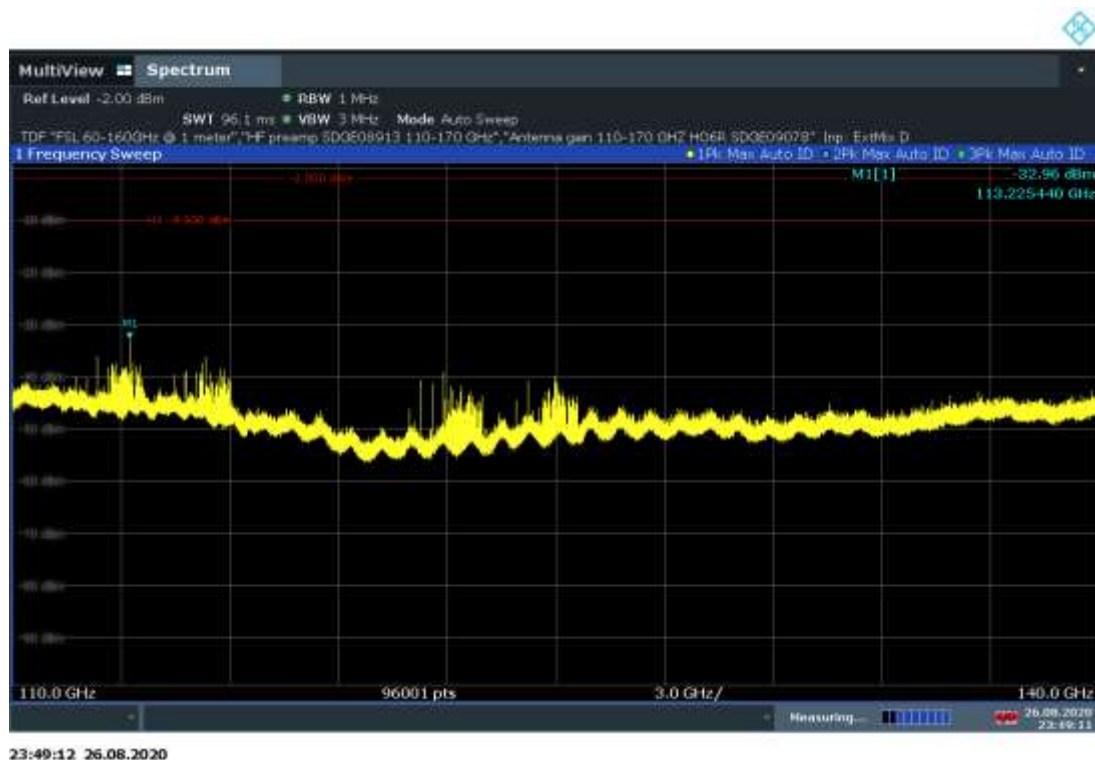


110GHz to 140GHz Plot (12 Transmitters)

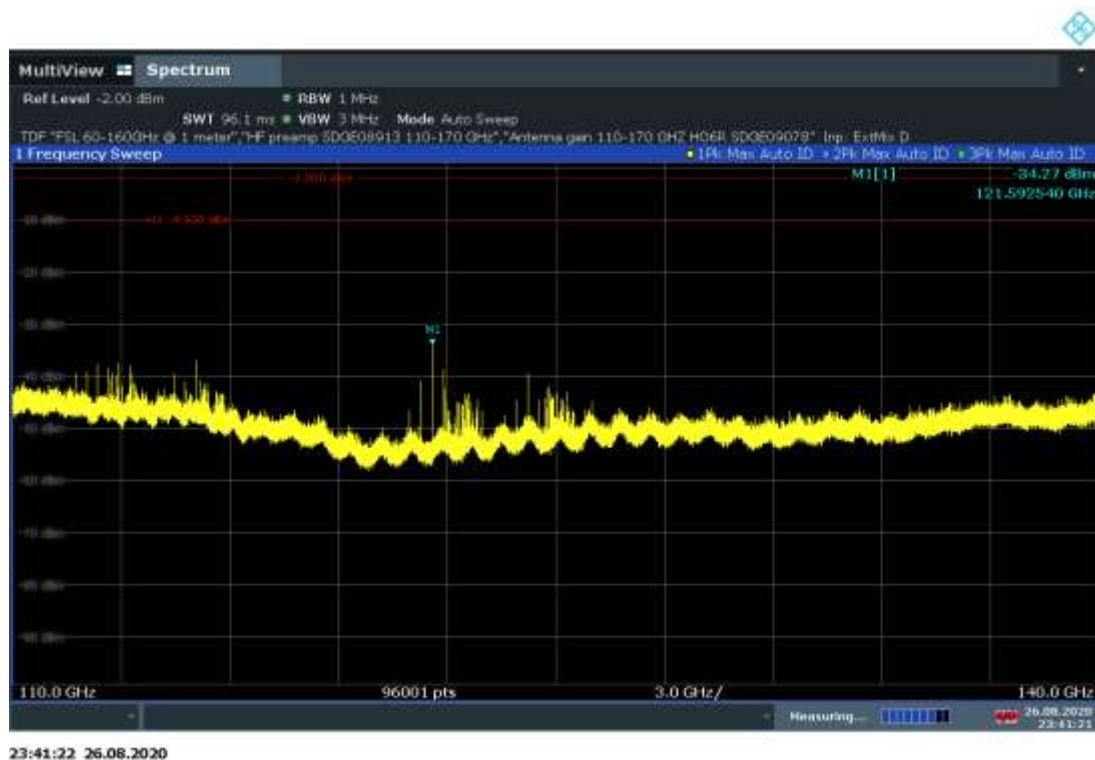

110GHz to 140GHz Plot (24 Transmitters)

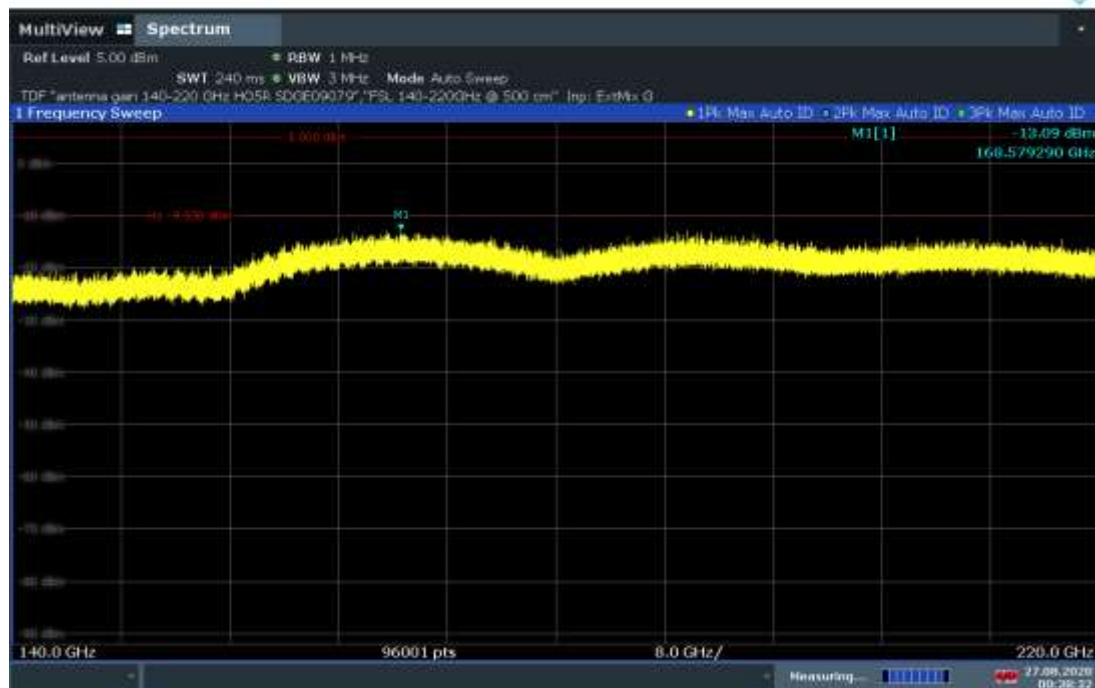

140GHz to 200GHz Plot (12 Transmitters)

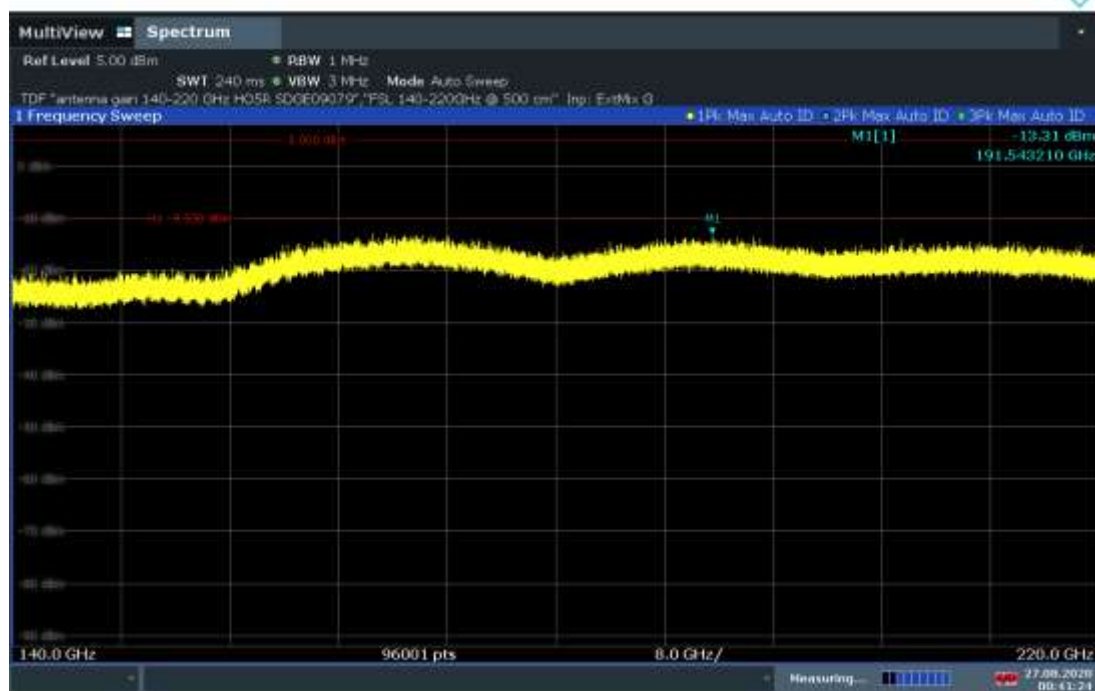

140GHz to 200GHz Plot (24 Transmitters)



SECTION 3

3 TEST EQUIPMENT USED



3.1 Test Equipment Used (vStraw_CTPB2)

List of absolute measuring and other principal items of test equipment.

ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
Conducted Emissions						
7620	EMI Test Receiver	ESU40	100399	Rhode & Schwarz	10/18/19	10/18/20
7567	LISN	FCC-LISN-50-25-2-10	120304	Fisher Custom Comm	01/14/19	01/02/20
8822	20dB Attenuator	34-20-34	N/A	MCE / Weinschel	03/05/19	03/05/20
8824	20dB Attenuator	34-20-34	N/A	MCE / Weinschel	03/05/19	03/05/20
Radiated Emission						
1033	Bilog Antenna	3142C	00044556	EMCO	11/06/18	11/06/20
7631	Double-ridged waveguide horn	3117	00205418	ETS-Lindgren	08/20/18	08/20/20
8628	Pre-amplifier	QLI-01182835-JO	8986002	Quinstar	03/07/19	03/07/20
9004	Horn antenna (50-75 GHz)	HO15R	104	Custom Microwaves	10/10/19	10/10/21
7628	Horn antenna (75-110 GHz)	SAR-2309-10-S2	13481-01	Sage Millimeter, Inc.	Verified by 7611 and corresponding antenna/Active multiplier combination	
9003	Horn antenna (40-60 GHz)	HO19R	103	Custom Microwaves		
9081	Horn antenna (110-170 GHz)	HO6R	N/A	Custom Microwaves		
9082	Horn antenna (140-220 GHz)	HO5R	N/A	Custom Microwaves		
9080	Horn antenna (220-325 GHz)	HO3R	N/A	Custom Microwaves		
-	Harmonics mixer (50-75 GHz)	FS-Z75	101564	Rhode & Schwarz	01/24/19	01/24/20
7637	Harmonics mixer (40-60 GHz)	FS-Z60	100009	Rhode & Schwarz	05/31/18	05/31/20
7636	Harmonics mixer (60-90 GHz)	FS-Z90	100092	Rhode & Schwarz	04/11/18	04/11/20
7633	Harmonics mixer (75-110 GHz)	HM-110-7	101000	Radiometer Physics	Verified by 7611 and corresponding antenna/mixer combination	
7634	Harmonics mixer (110-170 GHz)	HM-170	0062	Radiometer Physics		
7635	Harmonics mixer (170-220 GHz)	HM-220	020022	Radiometer Physics		
7632	Harmonics mixer (220-325 GHz)	HM-325	020075	Radiometer Physics		
1153	High-frequency cable	SucoFlex 100 SX	N/A	Suhner	Verified by 1003 and 7620	
8543	High-frequency cable	Micropore 19057793	N/A	United Microwave Products	Verified by 1003 and 7620	
40815	Pre-amplifier (18-40 GHz)	19D18	15G27	Spacek Labs	Verified by 1003 and 7620	
44137	V Band waveguide Detector	PE80T3002	V0011860417 20158046	Pasternack	Verified by 1003 and 7611	



ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
8872	Direct Reading Attenuator (40-60)	STA-60-19-D1	11875-01	Sage Millimeter, Inc.	Verified by 7611 and corresponding antenna/mixer combination	
8860	Direct Reading Attenuator (50-75)	STA-60-15-D1	11466-01	Sage Millimeter, Inc.		
8861	Direct Reading Attenuator (75-110)	STA-60-10-D1	11466-01	Sage Millimeter, Inc.		
8919	Direct Reading Attenuator (90-140)	STA-60-08-D1	12605-01	Sage Millimeter, Inc.		
8909	Direct Reading Attenuator (140-220)	STA-60-05-D1	12020-01	Sage Millimeter, Inc.		
8873	Active Multiplier (40-60 GHz)	AMC-19-RFH00	124	Millitech, Inc.		
8914	Active Multiplier (50-75 GHz)	AMC-15-RFH00	283	Millitech, Inc.		
8915	Active Multiplier (75-110 GHz)	AMC-10-RFH00	606	Millitech, Inc.		
8920	Active Multiplier (90-140 GHz)	AMC-08-RFH00	58	Millitech, Inc.		
8909	Active Multiplier (140-220 GHz)	MCA-05-150096	13	Millitech, Inc.		
9001	Horn antenna (18-26.5GHz)	HO42S	101	Custom Microwave	09/09/19	09/09/21
9003	Horn antenna (26-40 GHz)	HO28S	102	Custom Microwaves	09/09/19	09/09/21
7611	Signal/Spectrum Analyzer	FSW26	102017	Rhode & Schwarz	09/12/19	09/12/20
1003	Signal Generator	SMR-40	1104.0002.40	Rhode & Schwarz	06/20/19	06/20/20
1040	EMI Test Receiver	ESIB40	100292	Rhode & Schwarz	10/11/19	10/11/20
7620	EMI Test Receiver	ESU40	100399	Rhode & Schwarz	10/18/19	10/18/20
1016	Pre-Amplifier	PAM-0202	187	PAM	03/08/19	03/08/20
Miscellaneous						
11312	Mini Environmental Quality Meter	850027	CF099-56010-340	11312	04/16/19	04/16/20
-	Test Software	EMC32	V8.53	Rhode & Schwarz	N/A	



3.2 Test Equipment Used (vStraw_CTPB4)

List of absolute measuring and other principal items of test equipment.

ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
Radiated Emission						
1033	Bilog Antenna	3142C	00044556	EMCO	11/06/18	11/06/20
7631	Double-ridged waveguide horn	3117	00205418	ETS-Lindgren	08/20/18	08/20/20
8628	Pre-amplifier	QLI-01182835-JO	8986002	Quinstar	03/07/19	03/07/20
9004	Horn antenna (50-75 GHz)	HO15R	104	Custom Microwaves	10/10/19	10/10/21
7628	Horn antenna (75-110 GHz)	SAR-2309-10-S2	13481-01	Sage Millimeter, Inc.	Verified by 7611 and corresponding antenna/Active multiplier combination	
9003	Horn antenna (40-60 GHz)	HO19R	103	Custom Microwaves		
9081	Horn antenna (110- 170 GHz)	HO6R	N/A	Custom Microwaves		
9082	Horn antenna (140- 220 GHz)	HO5R	N/A	Custom Microwaves		
9080	Horn antenna (220- 325 GHz)	HO3R	N/A	Custom Microwaves		
7637	Harmonics mixer (40- 60 GHz)	FS-Z60	100009	Rhode & Schwarz	05/31/18	05/31/20
7636	Harmonics mixer (60- 90 GHz)	FS-Z90	100092	Rhode & Schwarz	04/11/18	04/11/20
7633	Harmonics mixer (75- 110 GHz)	HM-110-7	101000	Radiometer Physics	Verified by 7611 and corresponding antenna/mixer combination	
7634	Harmonics mixer (110-170 GHz)	HM-170	0062	Radiometer Physics		
7635	Harmonics mixer (170-220 GHz)	HM-220	020022	Radiometer Physics		
7632	Harmonics mixer (220-325 GHz)	HM-325	020075	Radiometer Physics		
1153	High-frequency cable	SucoFlex 100 SX	N/A	Suhner	Verified by 1003 and 7620	
8543	High-frequency cable	Micropore 19057793	N/A	United Microwave Products	Verified by 1003 and 7620	
40815	Pre-amplifier (18-40 GHz)	19D18	15G27	Spacek Labs	Verified by 1003 and 7620	
44137	V Band waveguide Detector	PE80T3002	V0011860417 20158046	Pasternack	Verified by 1003 and 7611	



ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
8872	Direct Reading Attenuator (40-60)	STA-60-19-D1	11875-01	Sage Millimeter, Inc.	Verified by 7611 and corresponding antenna/mixer combination	
8860	Direct Reading Attenuator (50-75)	STA-60-15-D1	11466-01	Sage Millimeter, Inc.		
8861	Direct Reading Attenuator (75-110)	STA-60-10-D1	11466-01	Sage Millimeter, Inc.		
8919	Direct Reading Attenuator (90-140)	STA-60-08-D1	12605-01	Sage Millimeter, Inc.		
8909	Direct Reading Attenuator (140-220)	STA-60-05-D1	12020-01	Sage Millimeter, Inc.		
8873	Active Multiplier (40-60 GHz)	AMC-19-RFH00	124	Millitech, Inc.		
8914	Active Multiplier (50-75 GHz)	AMC-15-RFH00	283	Millitech, Inc.		
8915	Active Multiplier (75-110 GHz)	AMC-10-RFH00	606	Millitech, Inc.		
8920	Active Multiplier (90-140 GHz)	AMC-08-RFH00	58	Millitech, Inc.		
8909	Active Multiplier (140-220 GHz)	MCA-05-150096	13	Millitech, Inc.		
9001	Horn antenna (18-26.5GHz)	HO42S	101	Custom Microwave	09/09/19	09/09/21
9003	Horn antenna (26-40 GHz)	HO28S	102	Custom Microwaves	09/09/19	09/09/21
7611	Signal/Spectrum Analyzer	FSW26	102017	Rhode & Schwarz	09/12/19	09/12/20
1003	Signal Generator	SMR-40	1104.0002.40	Rhode & Schwarz	06/20/19	06/20/20
1040	EMI Test Receiver	ESIB40	100292	Rhode & Schwarz	10/11/19	10/11/20
7620	EMI Test Receiver	ESU40	100399	Rhode & Schwarz	10/18/19	10/18/20
1016	Pre-Amplifier	PAM-0202	187	PAM	03/08/19	03/08/20
Miscellaneous						
11312	Mini Environmental Quality Meter	850027	CF099-56010-340	11312	04/16/19	04/16/20
-	Test Software	EMC32	V8.53	Rhode & Schwarz	N/A	



3.3 Test Equipment Used (vStraw_CTPB4_I)

List of absolute measuring and other principal items of test equipment.

ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
Conducted Emissions						
7620	EMI Test Receiver	ESU40	100399	Rhode & Schwarz	10/18/19	10/18/20
7567	LISN	FCC-LISN-50-25-2-10	120304	Fisher Custom Comm	01/27/20	01/27/21
8870	20dB Attenuator	34-20-34	N/A	MCE / Weinschel	02/07/20	02/07/21
Radiated Emission						
1002	Bilog Antenna	3142C	0058717	ETS-Lindgren	10/09/19	10/09/21
7575	Double-ridged waveguide horn	3117	155511	ETS-Lindgren	06/22/20	06/22/22
8891	Pre-amplifier	PE15A3262	1012	TUV SUD America	09/24/19	09/24/20
8878	SR-1 Coax Cable	R90-088-240	16-02-401	Teledyne Microwave	08/12/20	08/12/21
41317	2.92mm RF Cable	Hull 140-29P-29	2019/19-1951	Hasco	05/23/20	05/23/21
8656	RF Cable Length 25ft	8421F	M17/75-RG214	RF Precision Cable	06/19/20	06/19/21
7584	Oscilloscope	TDS3054	B014254	Tektronix	07/13/20	07/13/21
9004	Horn antenna (50-75 GHz)	HO15R	104	Custom Microwaves	10/10/19	10/10/21
7628	Horn antenna (75-110 GHz)	SAR-2309-10-S2	13481-01	Sage Millimeter, Inc.	Verified by 7611 and corresponding antenna/Active multiplier combination	
9003	Horn antenna (40-60 GHz)	HO19R	103	Custom Microwaves		
9081	Horn antenna (110-170 GHz)	HO6R	N/A	Custom Microwaves		
9082	Horn antenna (140-220 GHz)	HO5R	N/A	Custom Microwaves		
9080	Horn antenna (220-325 GHz)	HO3R	N/A	Custom Microwaves		
7637	Harmonics mixer (40-60 GHz)	FS-Z60	100009	Rhode & Schwarz	07/29/20	07/29/22
7636	Harmonics mixer (60-90 GHz)	FS-Z90	100092	Rhode & Schwarz	07/29/20	07/29/22
7633	Harmonics mixer (75-110 GHz)	HM-110-7	101000	Radiometer Physics	Verified by 7611 and corresponding antenna/mixer combination	
7634	Harmonics mixer (110-170 GHz)	HM-170	0062	Radiometer Physics		
7635	Harmonics mixer (170-220 GHz)	HM-220	020022	Radiometer Physics		
7632	Harmonics mixer (220-325 GHz)	HM-325	020075	Radiometer Physics		
-	High-frequency cable	61439230112-001	102208	UTIFLEX	NCR. Mixer use only. Verified together with 7611 by R&S	
-	High-frequency cable	61439230112-001	N/A	UTIFLEX		
40815	Pre-amplifier (18-40 GHz)	19D18	19D18	Spacek Labs	08/20/20	08/20/21
44137	V Band waveguide Detector	PE80T3002	V0011860417 20158046	Pasternack	Verified by 1003, 8860, 8914 and 7611	



ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
8872	Direct Reading Attenuator (40-60)	STA-60-19-D1	11875-01	Sage Millimeter, Inc.	Verified by 7611 and corresponding antenna/mixer combination	
8860	Direct Reading Attenuator (50-75)	STA-60-15-D1	11466-01	Sage Millimeter, Inc.		
8861	Direct Reading Attenuator (75-110)	STA-60-10-D1	11466-01	Sage Millimeter, Inc.		
8919	Direct Reading Attenuator (90-140)	STA-60-08-D1	12605-01	Sage Millimeter, Inc.		
8909	Direct Reading Attenuator (140-220)	STA-60-05-D1	12020-01	Sage Millimeter, Inc.		
8873	Active Multiplier (40-60 GHz)	AMC-19-RFH00	124	Millitech, Inc.		
8914	Active Multiplier (50-75 GHz)	AMC-15-RFH00	283	Millitech, Inc.		
8915	Active Multiplier (75-110 GHz)	AMC-10-RFH00	606	Millitech, Inc.		
8920	Active Multiplier (90-140 GHz)	AMC-08-RFH00	58	Millitech, Inc.		
8909	Active Multiplier (140-220 GHz)	MCA-05-150096	13	Millitech, Inc.		
9001	Horn antenna (18-26.5GHz)	HO42S	101	Custom Microwave	09/09/19	09/09/21
9002	Horn antenna (26-40 GHz)	HO28S	102	Custom Microwaves	09/09/19	09/09/21
7611	Signal/Spectrum Analyzer	FSW26	102017	Rhode & Schwarz	07/22/20	07/22/21
1003	Signal Generator	SMR-40	1104.0002.40	Rhode & Schwarz	06/18/20	06/18/21
7620	EMI Test Receiver	ESU40	100399	Rhode & Schwarz	10/18/19	10/18/20
Miscellaneous						
7579	Temperature Chamber	115	151617	TestQuity	09/09/19	09/09/20
11312	Mini Environmental Quality Meter	850027	CF099-56010-340	Sper Scientific	05/22/20	05/22/21
-	Test Software	EMC32	V10.50.40	Rhode & Schwarz	N/A	



3.4 Measurement Uncertainty

Calculation of Measurement Uncertainty per CISPR 16-4-2:2011 with Corr. 1

3.4.1 AC Conducted Emissions Measurements

	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10 dB	Normal, k=1	1.000	0.10	0.01
2	LISN-receiver attenuation	0.10 dB	Normal, k=2	2.000	0.05	0.00
3	LISN voltage division factor	0.30 dB	Normal, k=2	2.000	0.15	0.02
4	Receiver sinewave accuracy	0.36 dB	Normal, k=2	2.000	0.18	0.03
5	Receiver pulse amplitude	1.50 dB	Rectangular	1.732	0.87	0.75
6	Receiver pulse repetition rate	1.50 dB	Rectangular	1.732	0.87	0.75
7	Noise floor proximity	0.00 dB	Rectangular	1.732	0.00	0.00
8	AMN VDF frequency interpolation	0.10 dB	Rectangular	1.732	0.06	0.00
9	Mismatch	0.07 dB	U-shaped	1.414	0.05	0.00
10	LISN impedance	2.65 dB	Triangular	2.449	1.08	1.17
11	Effect of mains disturbance	0.00 dB			0.00	0.00
12	Effect of the environment					
Combined standard uncertainty				Normal	1.66 dB	
Expanded uncertainty				Normal, k=2	3.31 dB	

3.4.2 Antenna Conducted Port Measurements

	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10 dB	Normal, k=1	1.000	0.10	0.01
2	Cable attenuation	1.00 dB	Normal, k=2	2.000	0.50	0.25
3	Receiver sinewave accuracy	0.08 dB	Normal, k=2	2.000	0.04	0.00
4	Receiver pulse amplitude	0.00 dB	Rectangular	1.732	0.00	0.00
5	Receiver pulse repetition rate	0.00 dB	Rectangular	1.732	0.00	0.00
6	Noise floor proximity	0.00 dB	Rectangular	1.732	0.00	0.00
7	Frequency interpolation	0.10 dB	Rectangular	1.732	0.06	0.00
8	Mismatch	0.07 dB	U-shaped	1.414	0.05	0.00
Combined standard uncertainty				Normal	0.52 dB	
Expanded uncertainty				Normal, k=2	1.03 dB	



3.4.3 Radiated Measurements (Below 1GHz)

	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10 dB	Normal, k=1	1.000	0.10	0.01
2	Attenuation: antenna-receiver	0.20 dB	Normal, k=2	2.000	0.10	0.01
3	Antenna factor AF	0.75 dB	Normal, k=2	2.000	0.38	0.14
4	Receiver sinewave accuracy	0.45 dB	Normal, k=2	2.000	0.23	0.05
5	Receiver pulse amplitude	1.50 dB	Rectangular	1.732	0.87	0.75
6	Receiver pulse repetition rate	1.50 dB	Rectangular	1.732	0.87	0.75
7	Noise floor proximity	0.50 dB	Rectangular	1.732	0.29	0.08
8	Mismatch: antenna-receiver	0.95 dB	U-shaped	1.414	0.67	0.45
9	AF frequency interpolation	0.30 dB	Rectangular	1.732	0.17	0.03
10	AF height deviations	0.10 dB	Rectangular	1.732	0.06	0.00
11	Directivity difference at 3 m	3.12 dB	Rectangular	1.732	1.80	3.24
12	Phase center location at 3 m	1.00 dB	Rectangular	1.732	0.58	0.33
13	Cross-polarization	0.90 dB	Rectangular	1.732	0.52	0.27
14	Balance	0.00 dB	Rectangular	1.732	0.00	0.00
15	Site imperfections	3.76 dB	Triangular	2.449	1.54	2.36
16	Separation distance at 3 m	0.30 dB	Rectangular	1.732	0.17	0.03
17	Effect of setup table material	0.77 dB	Rectangular	1.732	0.44	0.20
18	Table height at 3 m	0.10 dB	Normal, k=2	2.000	0.05	0.00
19	Near-field effects	0.00 dB	Triangular	2.449	0.00	0.00
20	Effect of ambient noise on OATS	0.00 dB				0.00
Combined standard uncertainty			Normal	2.95 dB		
Expanded uncertainty			Normal, k=2	5.90 dB		



3.4.4 Radiated Emission Measurements (Above 1GHz)


	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10 dB	Normal, k=1	1.000	0.10	0.01
2	Attenuation: antenna-receiver	0.20 dB	Normal, k=2	2.000	0.10	0.01
3	Antenna factor AF	0.75 dB	Normal, k=2	2.000	0.38	0.14
4	Receiver sinewave accuracy	0.45 dB	Normal, k=2	2.000	0.23	0.05
5	Receiver pulse amplitude	1.50 dB	Rectangular	1.732	0.87	0.75
6	Receiver pulse repetition rate	1.50 dB	Rectangular	1.732	0.87	0.75
7	Noise floor proximity	0.50 dB	Rectangular	1.732	0.29	0.08
8	Mismatch: antenna-receiver	0.95 dB	U-shaped	1.414	0.67	0.45
9	AF frequency interpolation	0.30 dB	Rectangular	1.732	0.17	0.03
10	AF height deviations	0.10 dB	Rectangular	1.732	0.06	0.00
11	Directivity difference at 3 m	3.12 dB	Rectangular	1.732	1.80	3.24
12	Phase center location at 3 m	1.00 dB	Rectangular	1.732	0.58	0.33
13	Cross-polarization	0.90 dB	Rectangular	1.732	0.52	0.27
14	Balance	0.00 dB	Rectangular	1.732	0.00	0.00
15	Site imperfections	3.25 dB	Triangular	2.449	1.33	1.76
16	Separation distance at 3 m	0.30 dB	Rectangular	1.732	0.17	0.03
17	Effect of setup table material	0.77 dB	Rectangular	1.732	0.44	0.20
18	Table height at 3 m	0.10 dB	Normal, k=2	2.000	0.05	0.00
19	Near-field effects	0.00 dB	Triangular	2.449	0.00	0.00
20	Effect of ambient noise on OATS	0.00 dB				0.00
Combined standard uncertainty			Normal	2.85	dB	
Expanded uncertainty			Normal, k=2	5.70	dB	




SECTION 4

4 Diagram of Test Setup


4.1 Test Setup Diagram

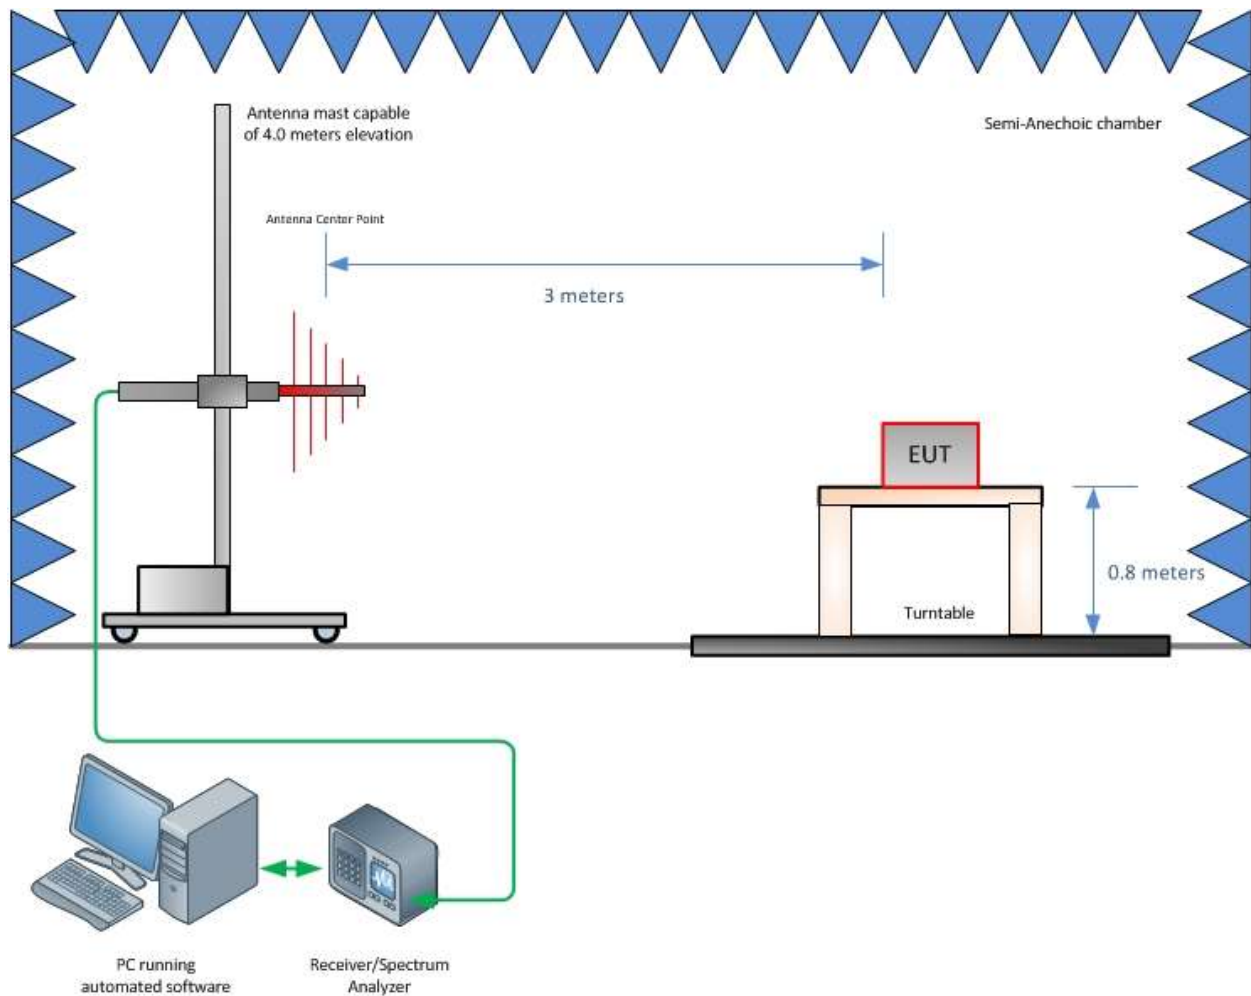


Radiated Emission Test Setup (Below 1GHz)

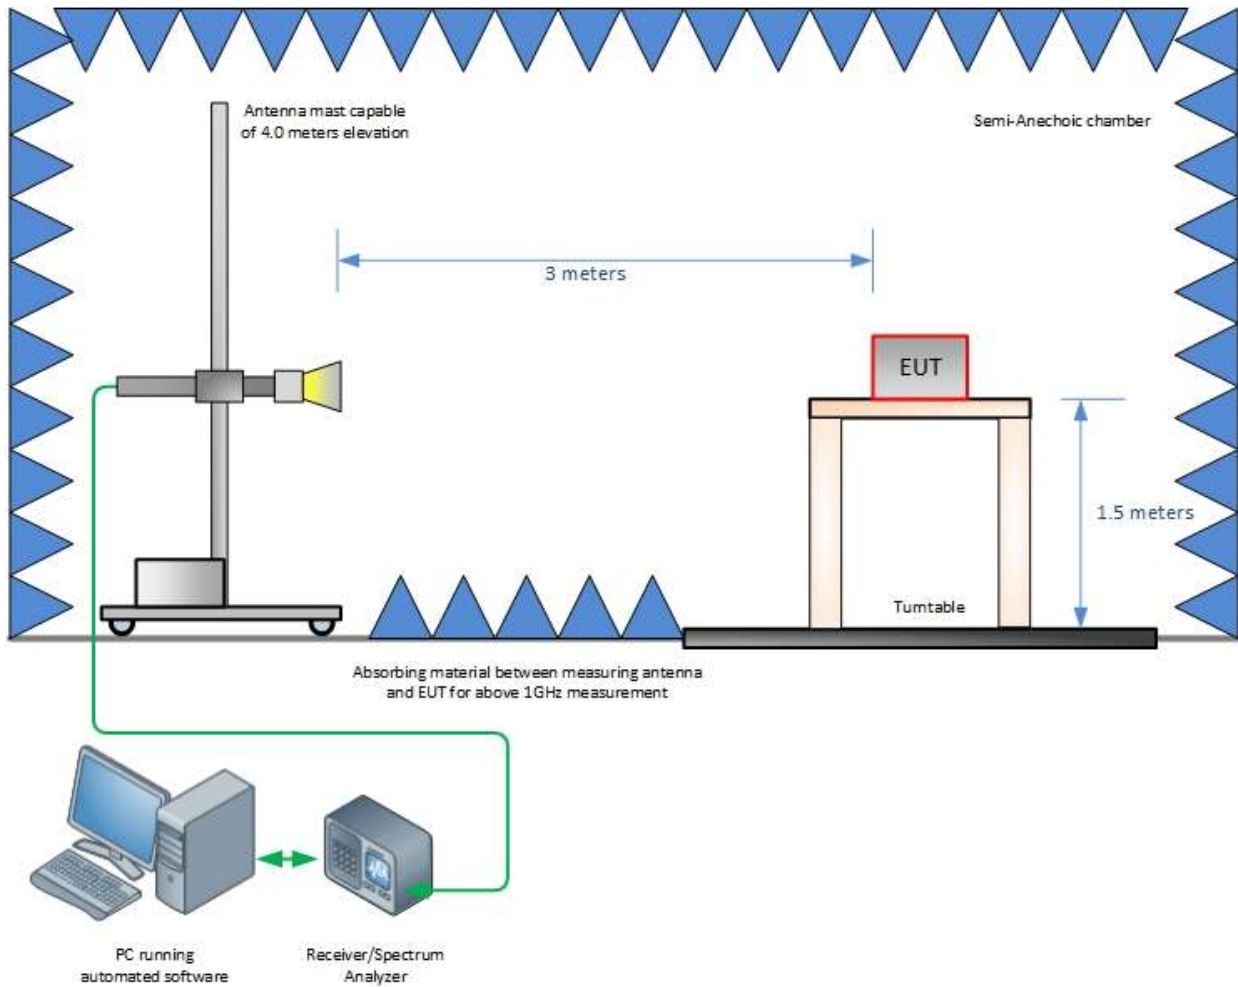


Radiated Emission Test Setup (Above 1GHz)

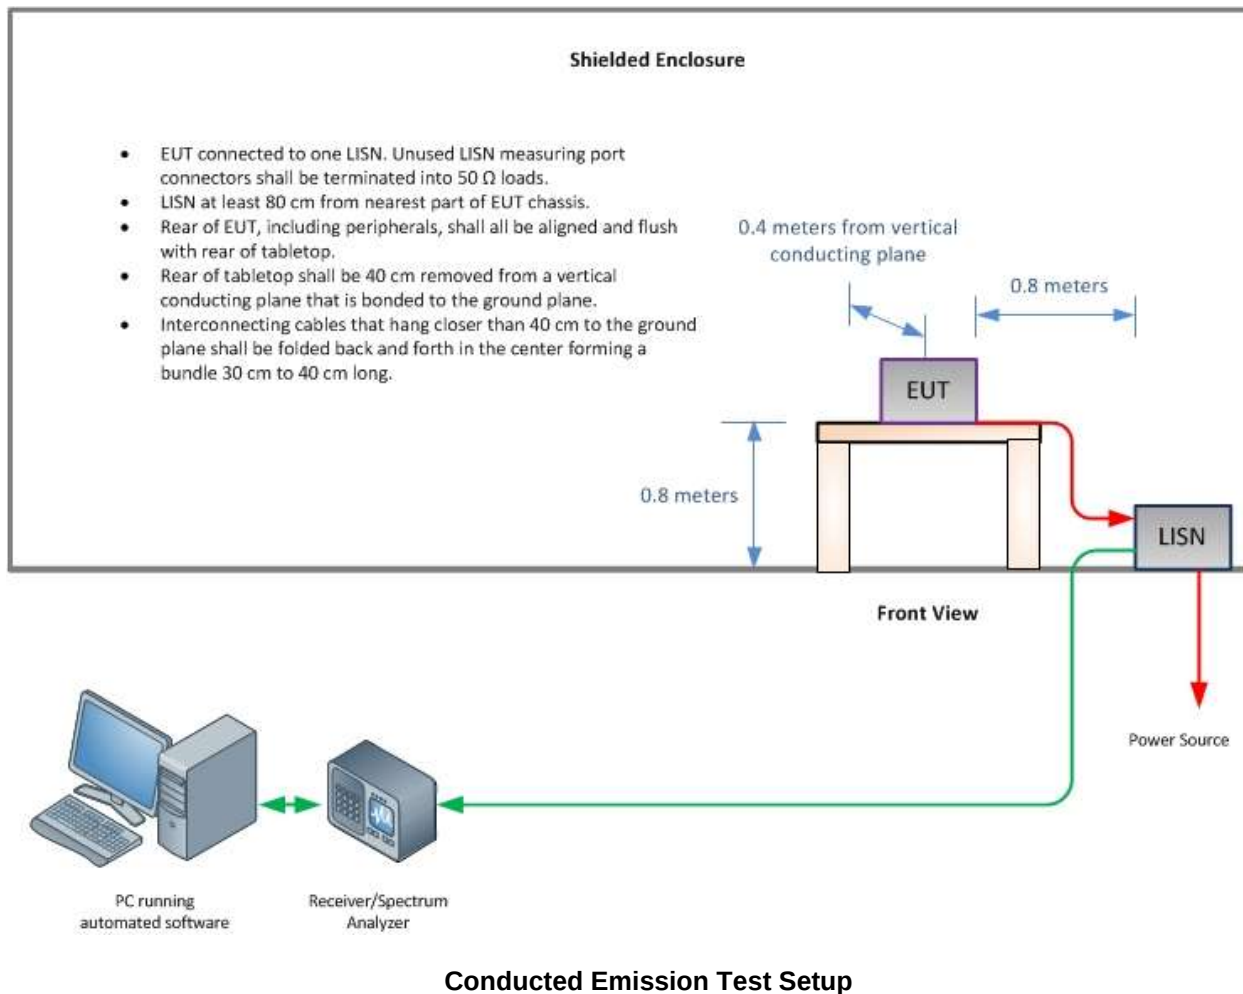

EUT Power Profile

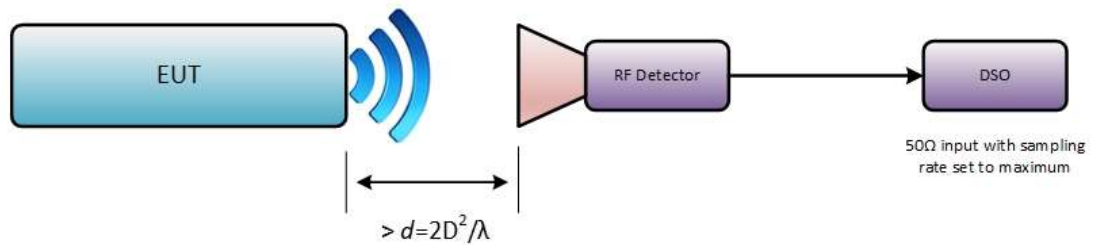

Substitution Method

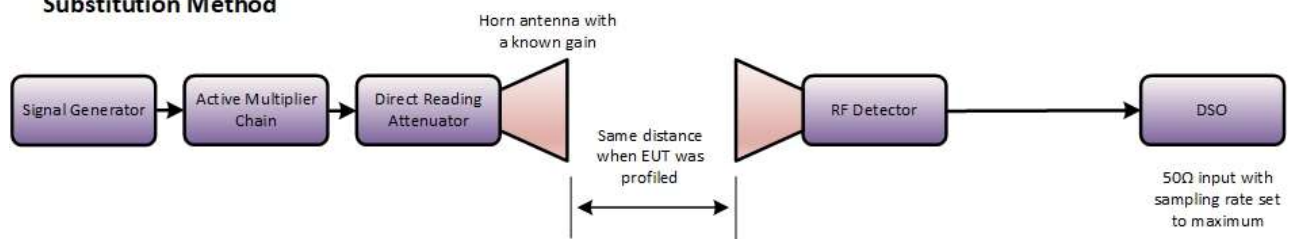

Power Measurement Block Diagram



SECTION 5

5 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



5.1 Accreditation, Disclaimers and Copyright

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.



A2LA Cert. No. 2955.13

