



REPORT No.: SZ20070154W02

TEST REPORT

APPLICANT : Nubia Technology Co., Ltd.

PRODUCT NAME : Wearable phone

MODEL NAME : SW1003

BRAND NAME : Nubia

FCC ID : 2AHJO-SW1003

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2020-07-10


TEST DATE : 2020-07-23 to 2020-07-31

ISSUE DATE : 2020-09-07

Edited by:


Zeng Xiaoying (Rapporteur)

Approved by:


Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen ,GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. The Channel Number and Frequency	4
1.4. Test Standards and Results	5
1.5. Environmental Conditions	6
2. 47 CFR Part 15C Requirements	7
2.1. Antenna Requirement	7
2.2. Hopping Mechanism	7
2.3. Number of Hopping Frequency	8
2.4. Duty Cycle of Test Signal	11
2.5. Maximum Peak Conducted Output Power	12
2.6. Maximum Average Conducted Output Power	19
2.7. 20dB Bandwidth	21
2.8. Carried Frequency Separation	28
2.9. Time of Occupancy (Dwell time)	31
2.10. Conducted Spurious Emissions	38
2.11. Conducted Emission	51
2.12. Restricted Frequency Bands	55
2.13. Radiated Emission	65
Annex A Test Uncertainty	78
Annex B Testing Laboratory Information	79

Change History		
Version	Date	Reason for change
1.0	2020-09-07	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Nubia Technology Co., Ltd.
Applicant Address:	16/F, Building 2, chongwen Park, Nanshan zhiyuan, 3370 Liuxian Road, Nanshan District, Shenzhen, China.
Manufacturer:	Nubia Technology Co., Ltd.
Manufacturer Address:	16/F, Building 2, chongwen Park, Nanshan zhiyuan, 3370 Liuxian Road, Nanshan District, Shenzhen, China.

1.2. Equipment Under Test (EUT) Description

Product Name:	Wearable phone	
Serial No.:	(N/A, marked #1 by test site)	
Hardware Version:	SW1003MB	
Software Version:	SW1003_Z0_CN_AR21N_V303	
Equipment Type:	Bluetooth classic	
Bluetooth Version:	4.2	
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
Operating Frequency Range:	2402MHz–2480MHz	
Antenna Type:	FPC Antenna	
Antenna Gain:	-1.4dBi	
Accessory Information:	Battery	
	Brand Name:	VEKEN
	Model No.:	Li3904T44P6h282455
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	430mAh
	Rated Voltage:	3.85V
	Charge Limit:	4.40V
	Manufacturer:	Veken Technology Co., Ltd.

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3.The Channel Number and Frequency

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The black bold channels were selected for test.



1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Jul 29, 2020	Lu Qiang	PASS	No deviation
4	ANSI C63.10	Duty Cycle	Jul 29, 2020	Lu Qiang	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Jul 29, 2020	Lu Qiang	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Jul 29, 2020	Lu Qiang	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Jul 29, 2020	Lu Qiang	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Jul 29, 2020	Lu Qiang	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Jul 29, 2020	Lu Qiang	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Jul 29, 2020	Lu Qiang	PASS	No deviation
11	15.207	Conducted Emission	Jul 25, 2020	Huang Zhiye	PASS	No deviation
12	15.247(d)	Restricted Frequency Bands	Jul 31, 2020	Peng Xuwei	PASS	No deviation
13	15.209, 15.247(d)	Radiated Emission	Jul 24, 2020	Peng Xuwei	PASS	No deviation



Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB558074 D01 v05r02.

Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 2.0dB means the cable loss is 2.0dB.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

1.5.Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2.47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Hopping Mechanism

2.2.1. Requirement

According to FCC §15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC §15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

2.2.2. Result: Compliant

The hopping mechanism of the EUT is in compliance with the document "**Bluetooth core specification v5.1**".


2.3. Number of Hopping Frequency

2.3.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.3.2. Test Description

Test Setup:

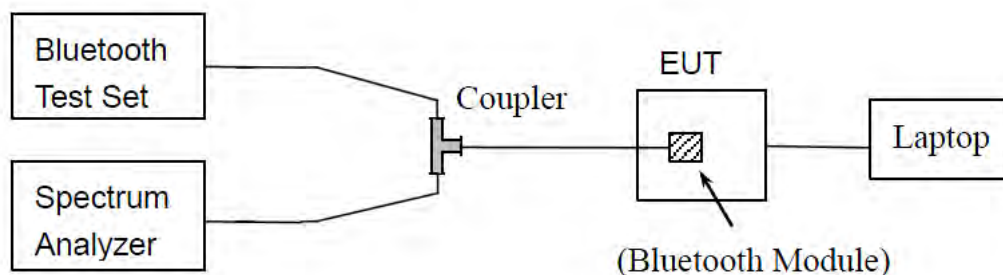

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.3.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize



2.3.4. Test Result


A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS

B. Test Plots:



(GFSK)

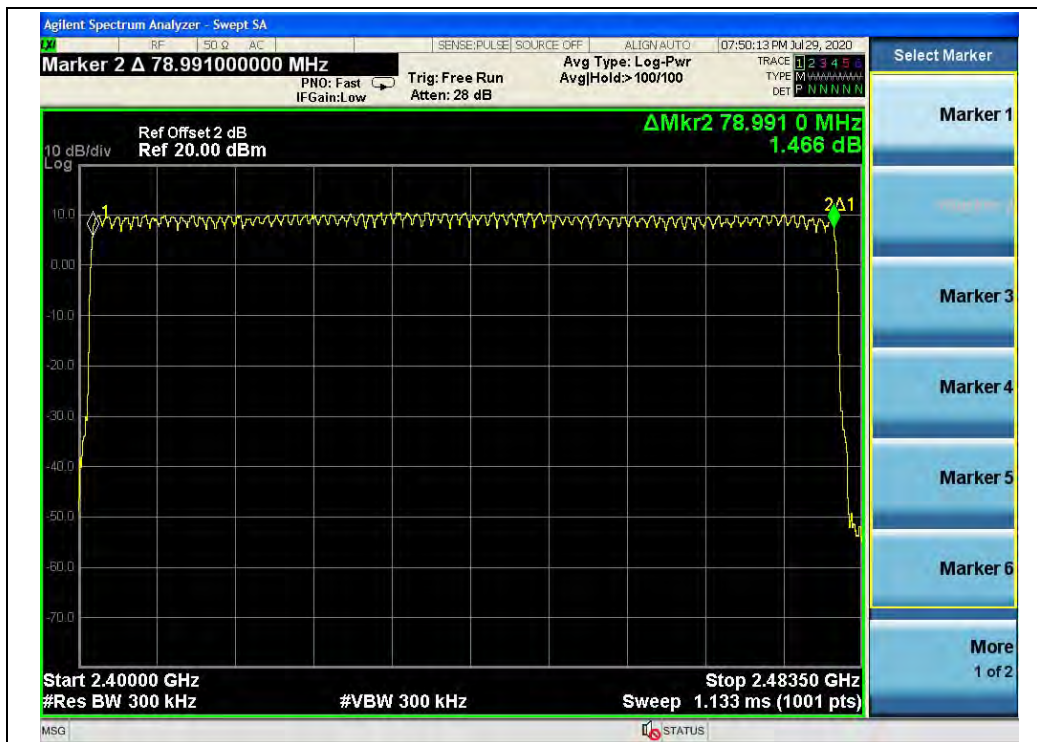
 $(\pi/4\text{-DQPSK})$

 (8-DPSK)

2.4.Duty Cycle of Test Signal

2.4.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.4.2.Test Description

Test Setup:



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

2.4.3.Test Result

Test Mode	Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
GFSK	76.80	1.15
$\pi/4$ -DQPSK	77.33	1.12
8-DPSK	76.80	1.15


2.5.Maximum Peak Conducted Output Power

2.5.1.Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.5.2.Test Description

Test Setup:

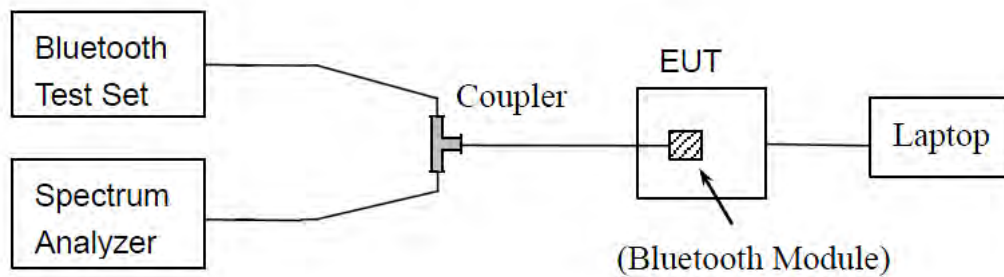

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.




2.5.3.Test Result

GFSK Mode


A.Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	10.68	0.012	20.96	0.125	PASS
39	2441	11.33	0.014			PASS
78	2480	10.08	0.010			PASS


B.Test Plot:

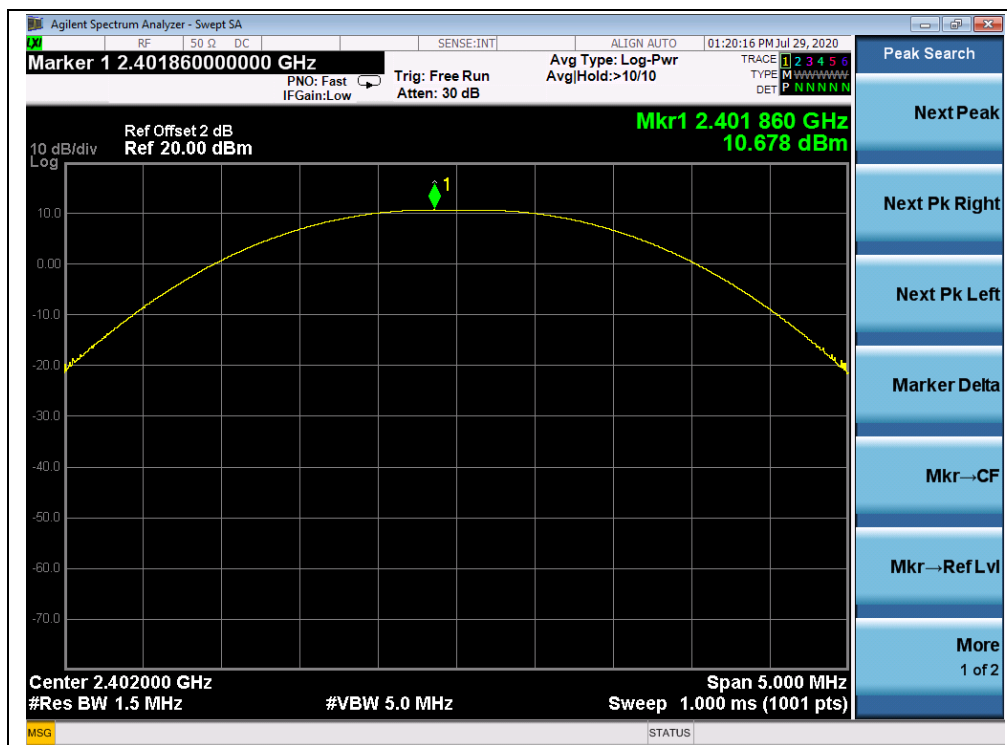

(Channel 0, GFSK)

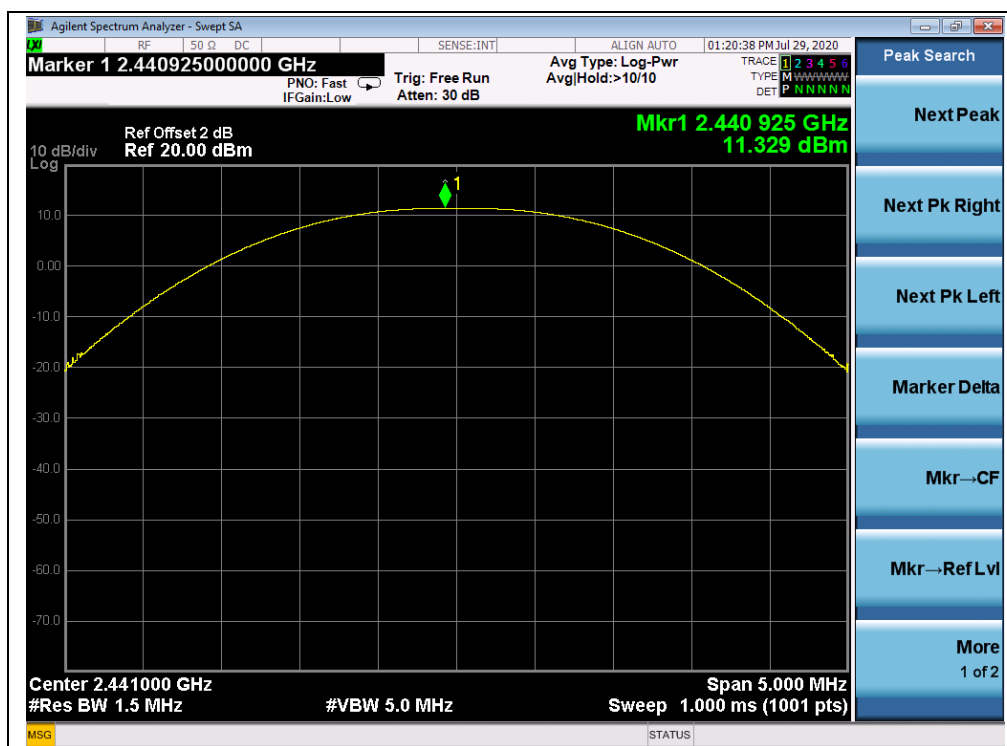

(Channel 39, GFSK)

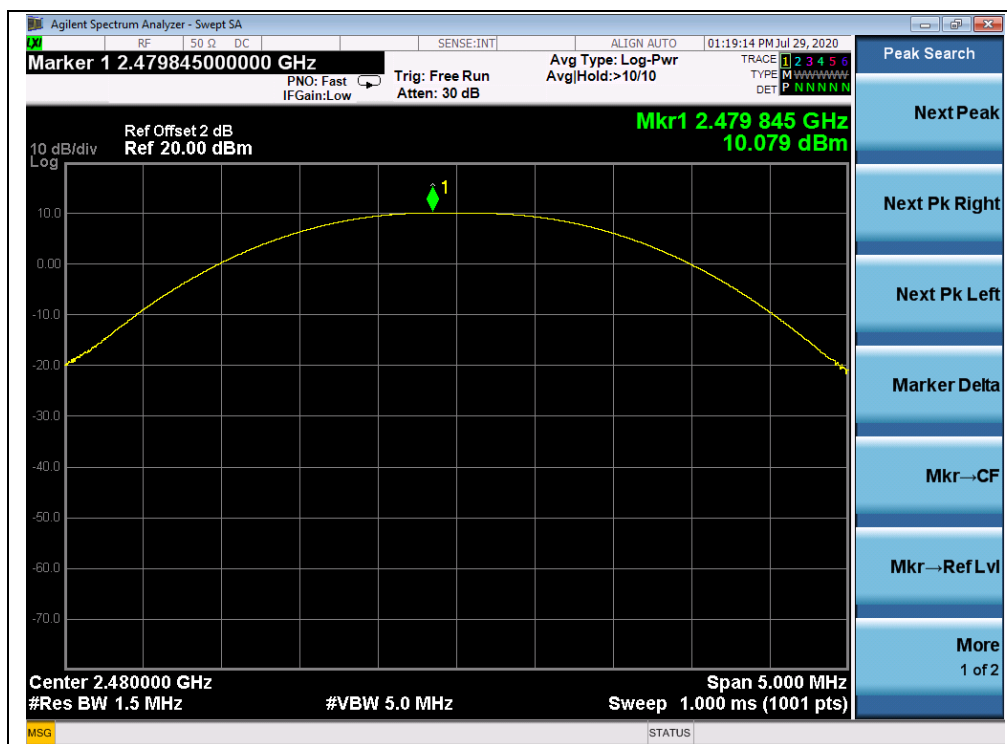


(Channel 78, GFSK)



 $\pi/4$ -DQPSK Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	10.71	0.012	20.96	0.125	PASS
39	2441	11.19	0.013			PASS
78	2480	9.80	0.010			PASS

B.Test Plot:

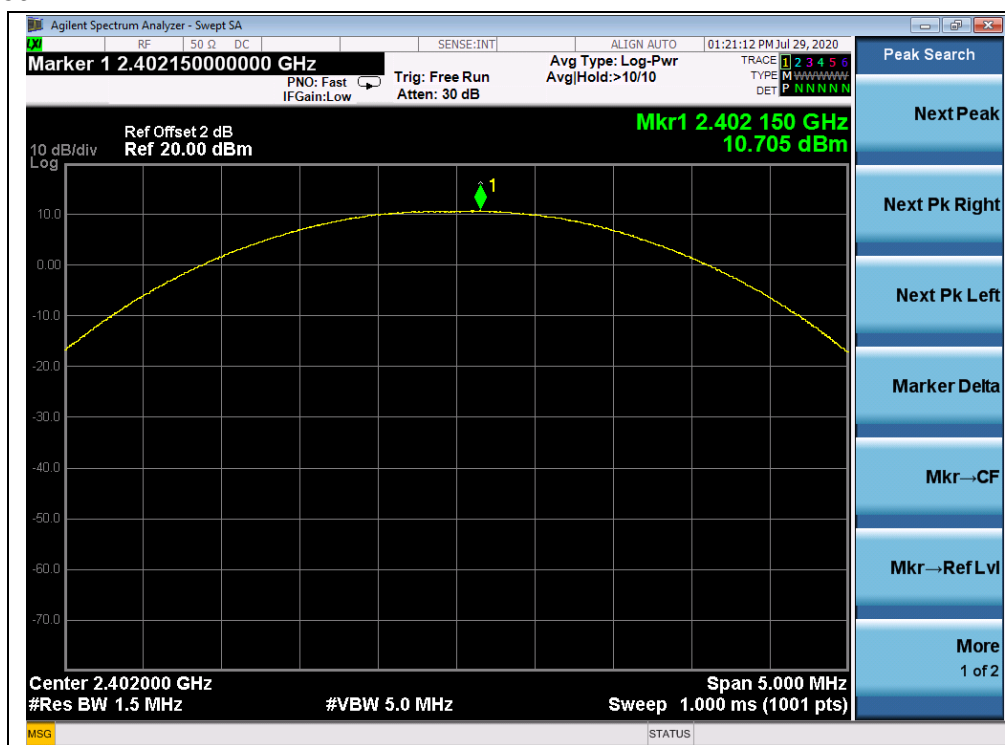(Channel 0, $\pi/4$ -DQPSK)

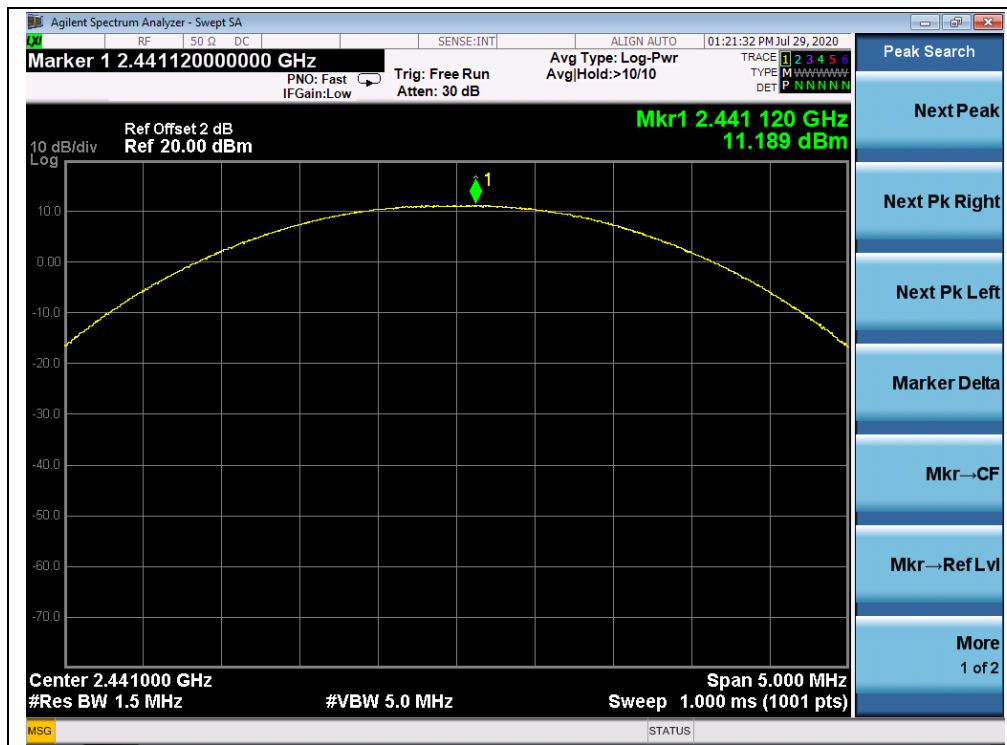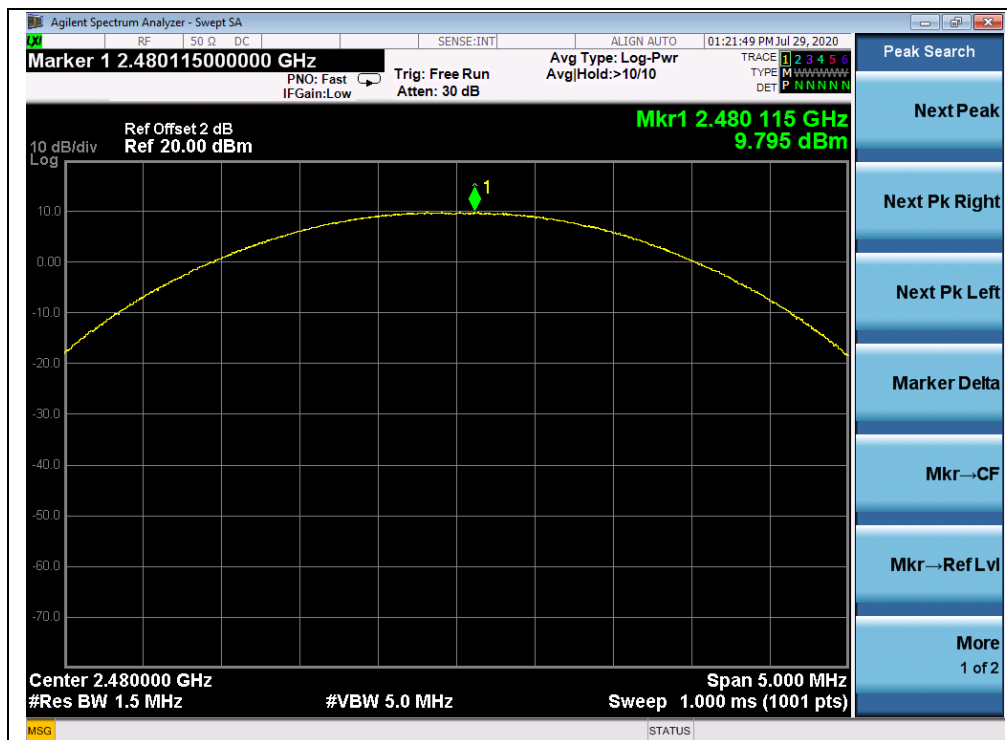(Channel 39, $\pi/4$ -DQPSK)(Channel 78, $\pi/4$ -DQPSK)




8-DPSK Mode


A.Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	10.99	0.013	20.96	0.125	PASS
39	2441	11.06	0.013			PASS
78	2480	10.35	0.011			PASS


B.Test Plot:

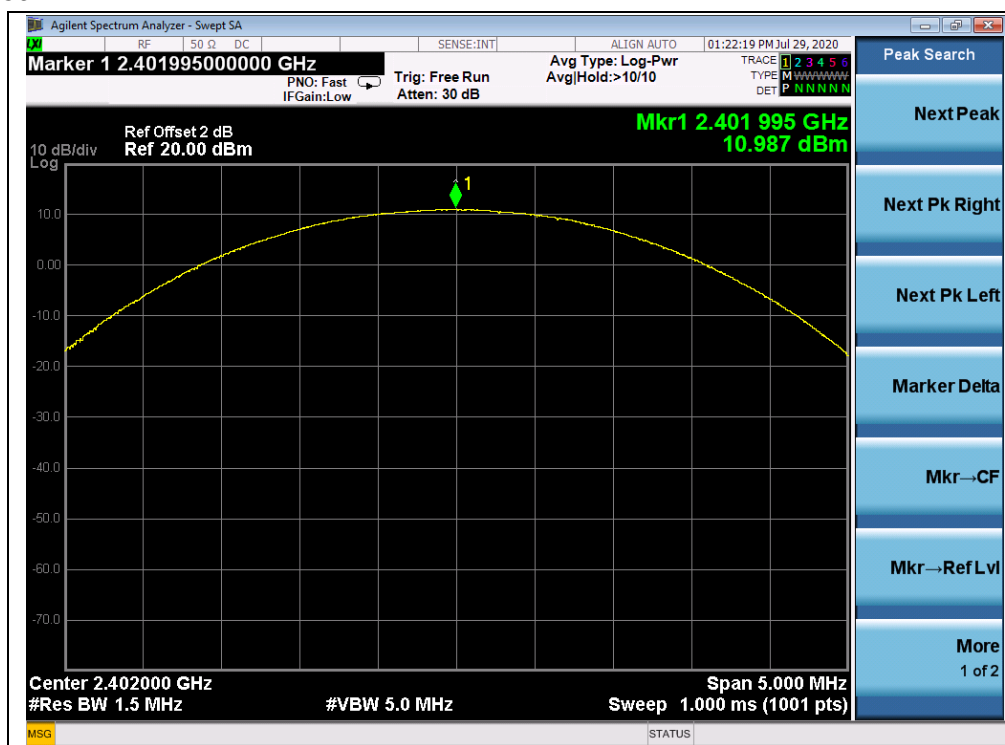

(Channel 0, 8-DPSK)

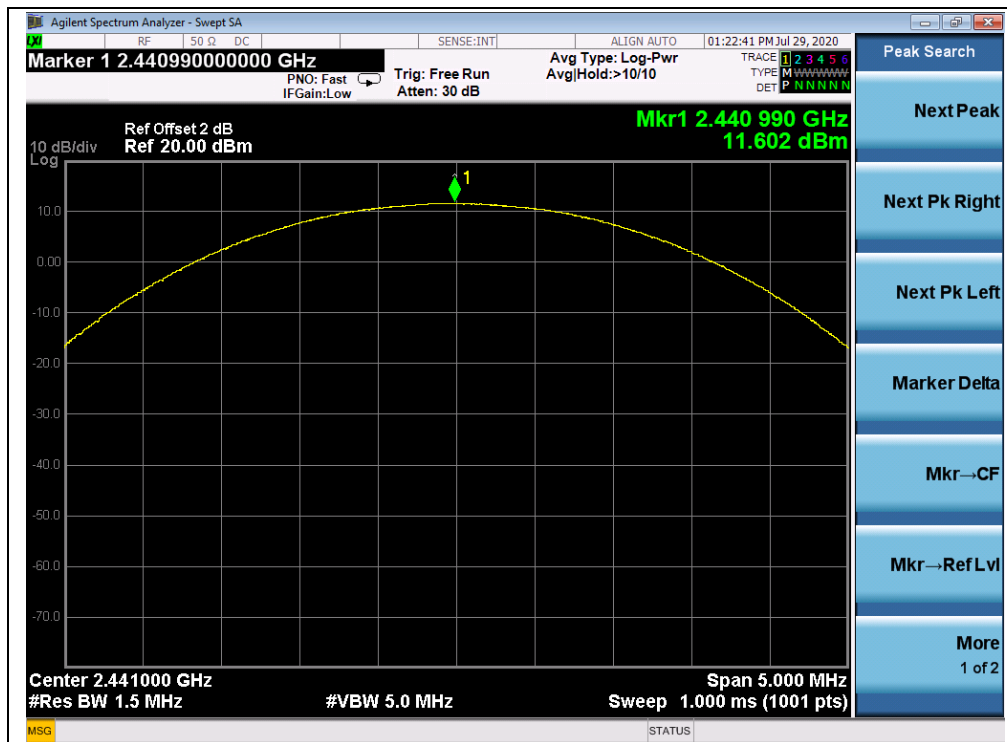

(Channel 39, 8-DPSK)

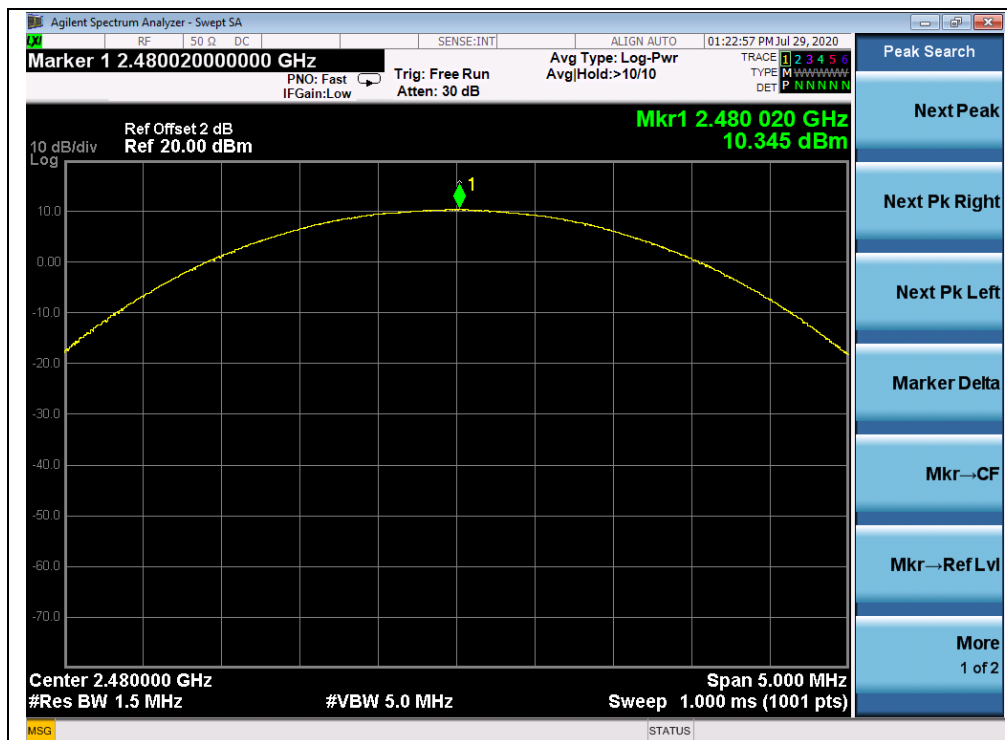

(Channel 39, 8-DPSK)

2.6. Maximum Average Conducted Output Power


2.6.1. Requirement

According to FCC §15.247(b), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum average output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.6.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

Test Setup:

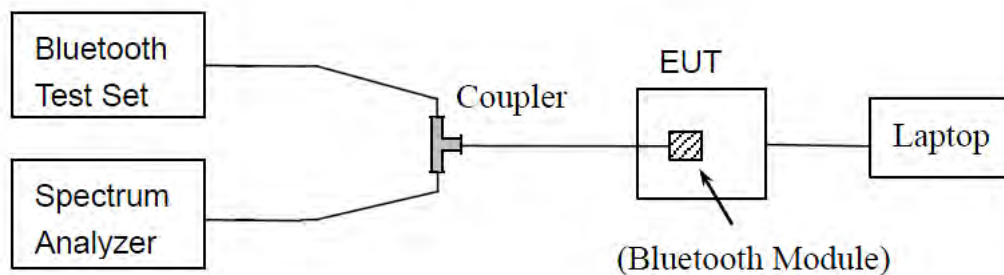

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

**2.6.3.Test Result****GFSK Mode**

Channel	Frequency (MHz)	Measured	Average Power			Limit		Verdict
			Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
0	2402	9.43	1.15	10.58	0.011	20.96	0.125	PASS
39	2441	10.04		11.19	0.013			PASS
78	2480	8.70		9.85	0.010			PASS

 $\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Measured	Average Power			Limit		Verdict
			Duty	Duty factor Calculated				
		dBm	Factor	dBm	W	dBm	W	
0	2402	6.83	1.12	7.95	0.006	20.96	0.125	PASS
39	2441	7.29		8.41	0.007			PASS
78	2480	5.93		7.05	0.005			PASS

8-DPSK Mode

Channel	Frequency (MHz)	Measured	Average Power			Limit		Verdict
		Duty Factor	Duty factor Calculated					
			dBm	dBm	W	dBm	W	
0	2402	6.83	1.15	7.98	0.006	20.96	0.125	PASS
39	2441	7.36		8.51	0.007			PASS
78	2480	6.06		7.21	0.005			PASS


2.7.20dB Bandwidth

2.7.1.Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.7.2.Test Description

Test Setup:

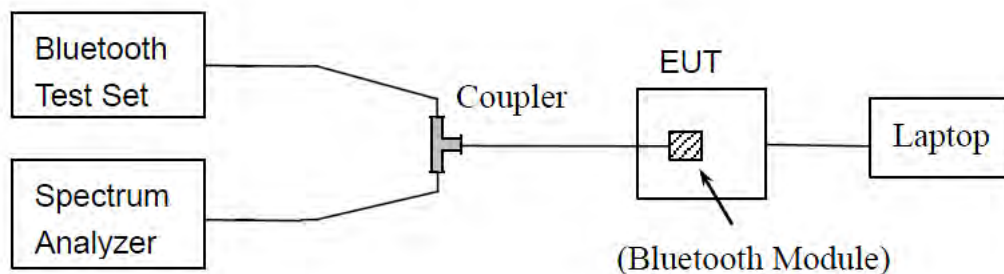

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.7.3.Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold



2.7.4. Test Result

GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	0.963	PASS
39	2441	0.963	PASS
78	2480	0.964	PASS

B. Test Plot:



(Channel 0, GFSK)



(Channel 39, GFSK)



(Channel 78, GFSK)



$\pi/4$ -DQPSK Mode

A.Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.283	PASS
39	2441	1.283	PASS
78	2480	1.283	PASS

B.Test Plot:



(Channel 0, $\pi/4$ -DQPSK)


(Channel 39, $\pi/4$ -DQPSK)

(Channel 78, $\pi/4$ -DQPSK)

**8-DPSK Mode****A.Test Verdict:**

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.293	PASS
39	2441	1.294	PASS
78	2480	1.293	PASS

B.Test Plot:

(Channel 0, 8-DPSK)



(Channel 39, 8-DPSK)



(Channel 78, 8-DPSK)


2.8.Carried Frequency Separation

2.8.1.Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.8.2.Test Description

Test Setup:

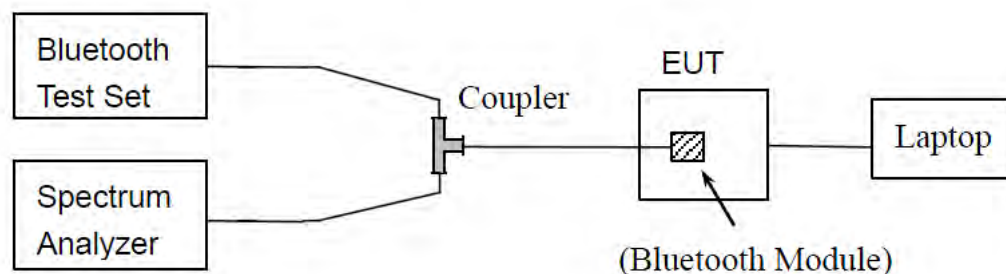

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.8.3.Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



2.8.4. Test Result

A. Test Verdict:

Test Mode	Measured Channel Numbers	Carried Frequency Separation (MHz)	20dBband width (MHz)	Min. Limit	Verdict
GFSK	39 and 40	1.083	0.964	two-thirds of the 20dBbandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	0.978	1.283		PASS
8-DPSK	39 and 40	1.023	1.294		PASS

B. Test Plot:



(GFSK)



($\pi/4$ -DQPSK)



(8-DPSK)


2.9.Time of Occupancy (Dwell time)

2.9.1.Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.9.2.Test Description

Test Setup:

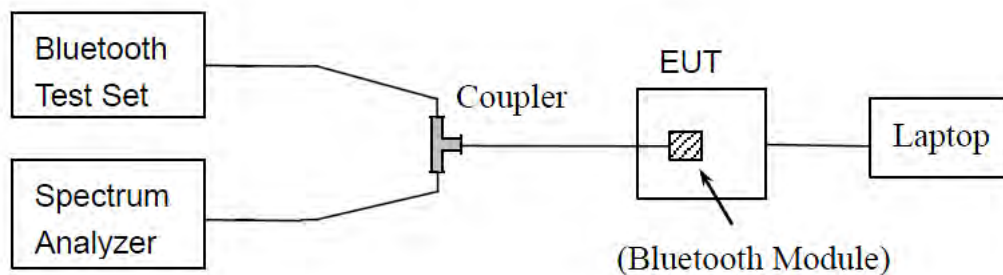

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.9.3.Test Procedure

Option 1:

DH1: Dwell time equal to Pulse time (ms) * (1600 / 2 / 79) * 31.6 Millisecond
DH3: Dwell time equal to Pulse time (ms) * (1600 / 4 / 79) * 31.6 Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (1600 / 6 / 79) * 31.6 Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) * (800 / 2 / 20) * (0.4 * 20) Millisecond
DH3: Dwell time equal to Pulse time (ms) * (800 / 4 / 20) * (0.4 * 20) Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (800 / 6 / 20) * (0.4 * 20) Millisecond.



GFSK Mode

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.39	124.80	62.40	0.4	PASS
DH3	1.64	262.40	131.20		PASS
DH5	2.88	307.20	153.60		PASS

Agilent Spectrum Analyzer - Swept SA

Marker 2 Δ 390.000 μ s

PNO: Fast $\rightarrow$ Trig: Free Run
IFGain: Low Atten: 28 dB

Avg Type: Log-Pwr

TRACE 1 2 3 4 5 6
TYPE W W W W W W W W
DET P N N N N N

Ref Offset 2 dB
Ref 20.00 dBm

Δ Mkr2 390.0 μ s
38.38 dB

10 dB/div
Log

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 3.0 MHz
Sweep 10.00 ms (1001 pts)
Span 0 Hz

Marker

Select Marker 2

Normal

Delta

Fixed


Off

Properties


More 1 of 2

MSG STATUS

(DH1, GFSK)

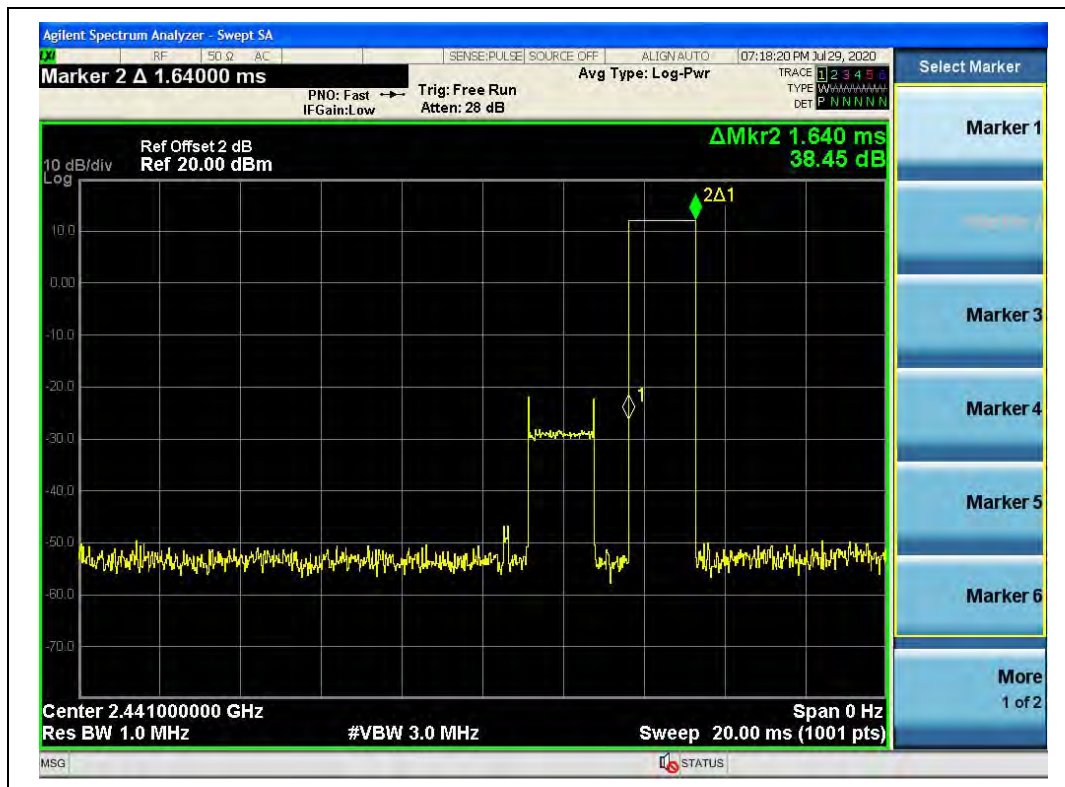

(DH3, GFSK)

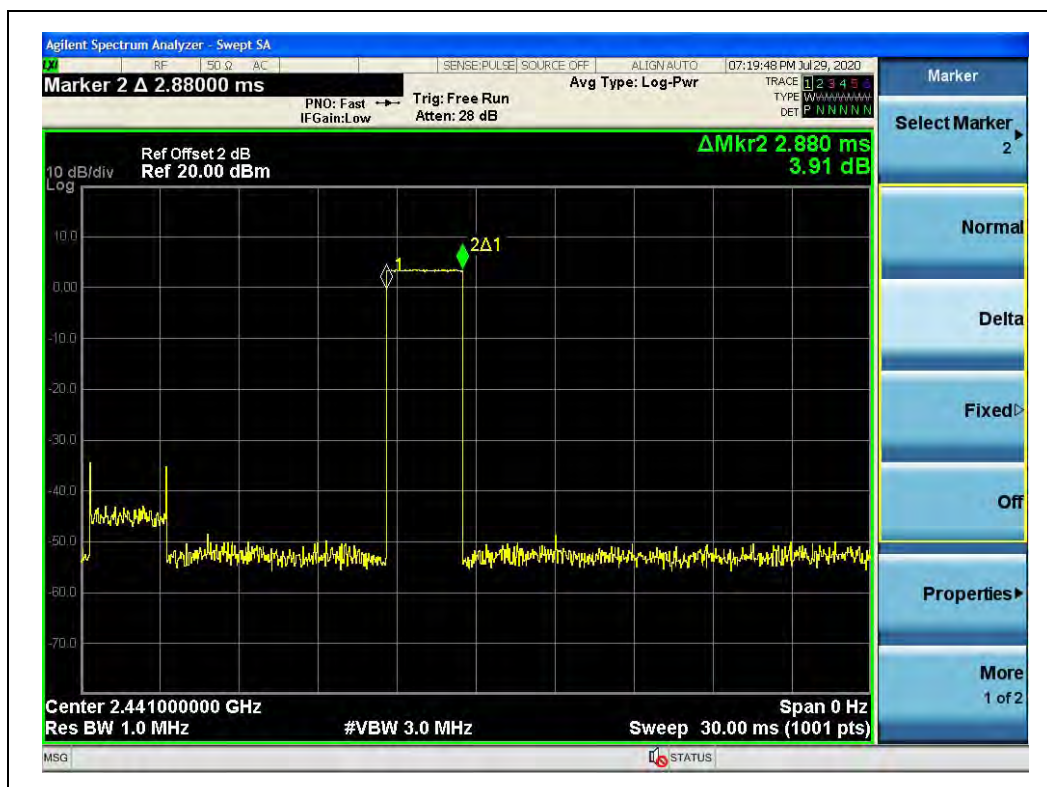

(DH5, GFSK)




π/4-DQPSK Mode

A.Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.40	128.00	64.00	0.4	PASS
DH3	1.66	265.60	132.80		PASS
DH5	2.91	310.40	155.20		PASS

B.Test Plot:

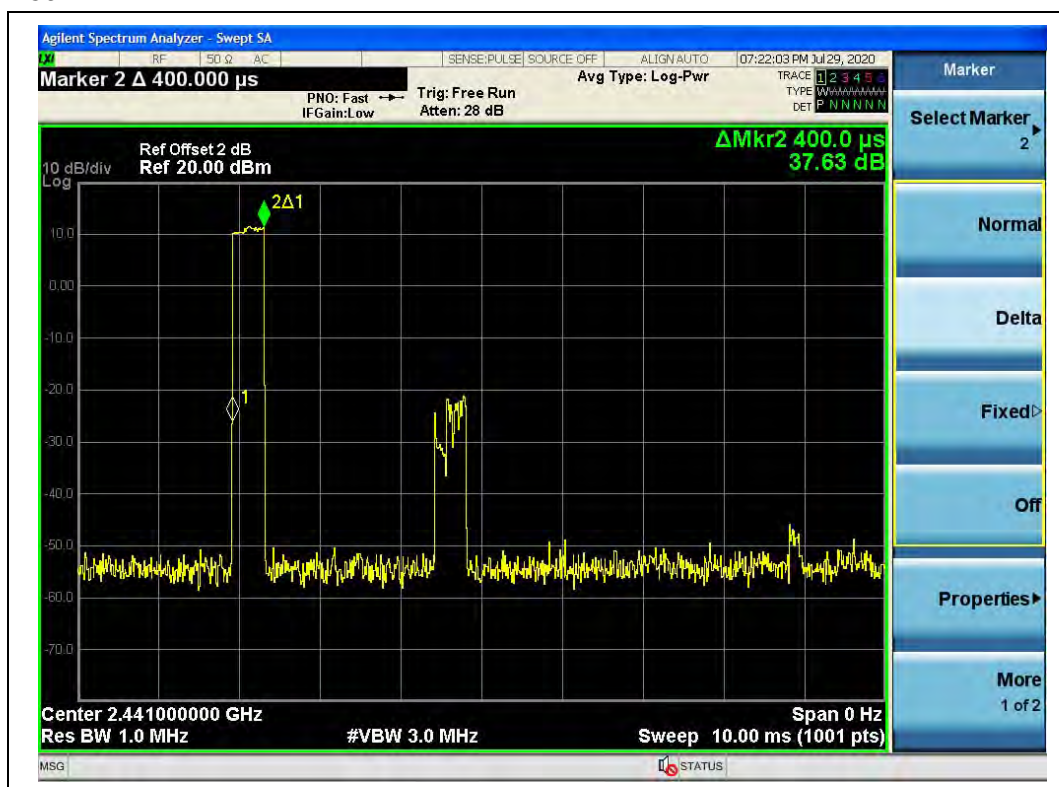

(DH1, π/4-DQPSK)


(DH3, $\pi/4$ -DQPSK)

(DH5, $\pi/4$ -DQPSK)




8-DPSK mode


A.Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.40	128.00	64.00	0.4	PASS
DH3	1.64	262.40	131.20		PASS
DH5	2.91	310.40	155.20		PASS


B.Test Plot:

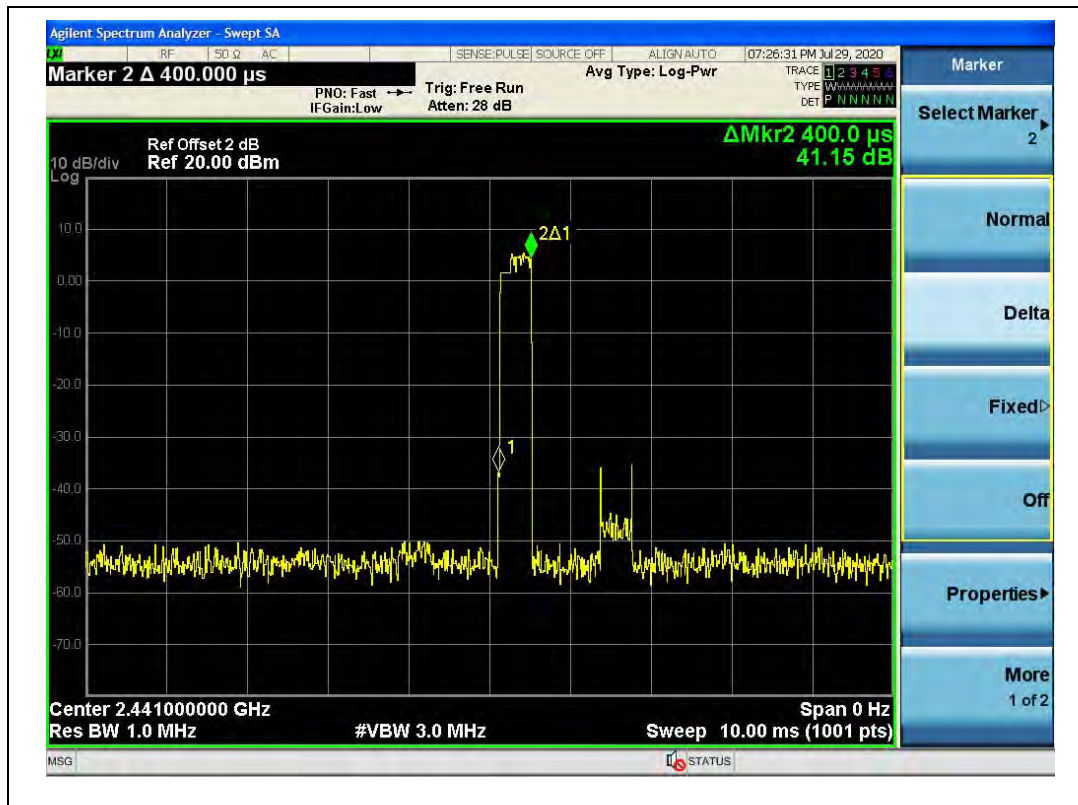

(DH1, 8-DPSK)

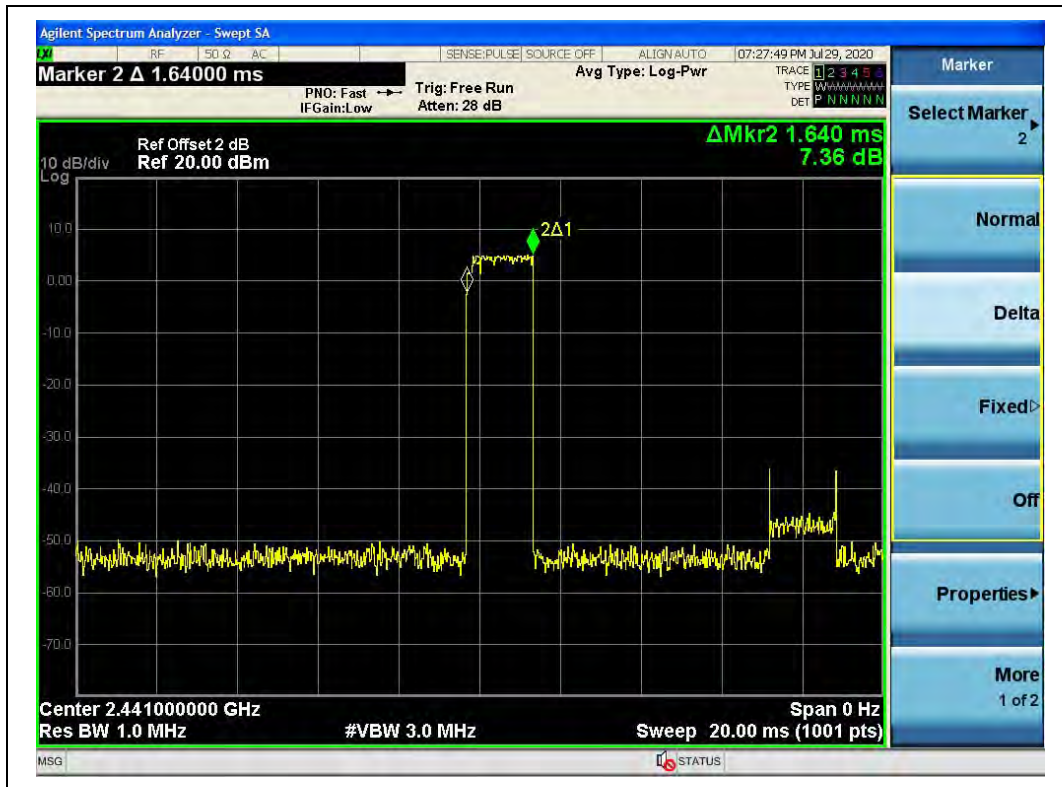

(DH3, 8-DPSK)

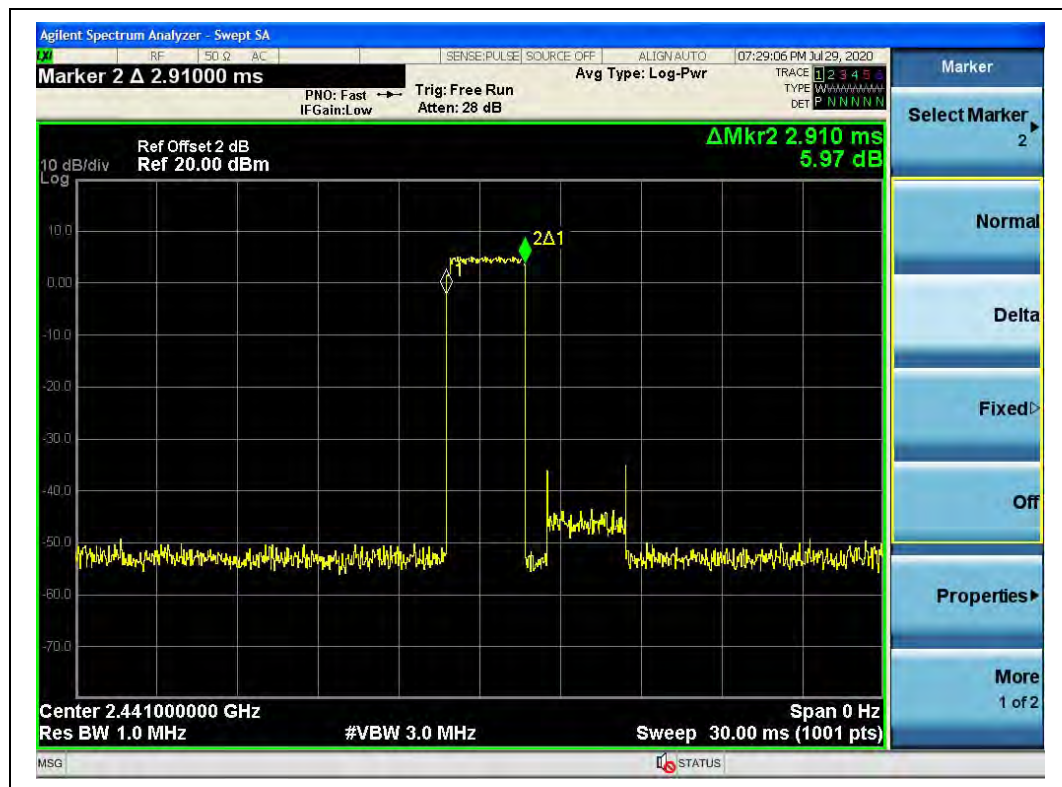

(DH5, 8-DPSK)


2.10. Conducted Spurious Emissions

2.10.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.10.2. Test Description

Test Setup:

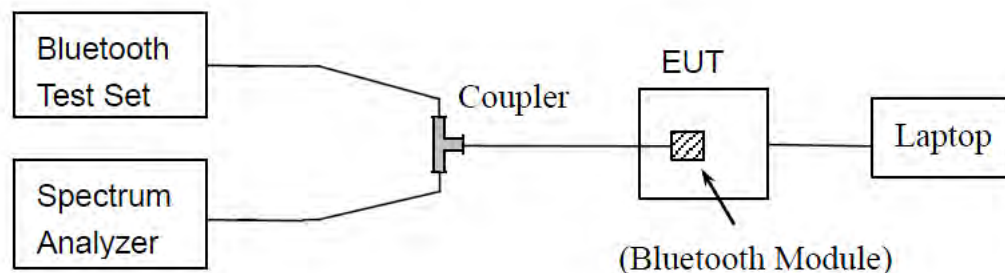

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.



2.10.4. Test Result

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-43.60	10.88	-9.12	PASS
39	2441	-41.37	11.14	-8.86	PASS
78	2480	-40.74	10.39	-9.61	PASS

B. Test Plot:




(30MHz to 25GHz, Channel 0, GFSK)

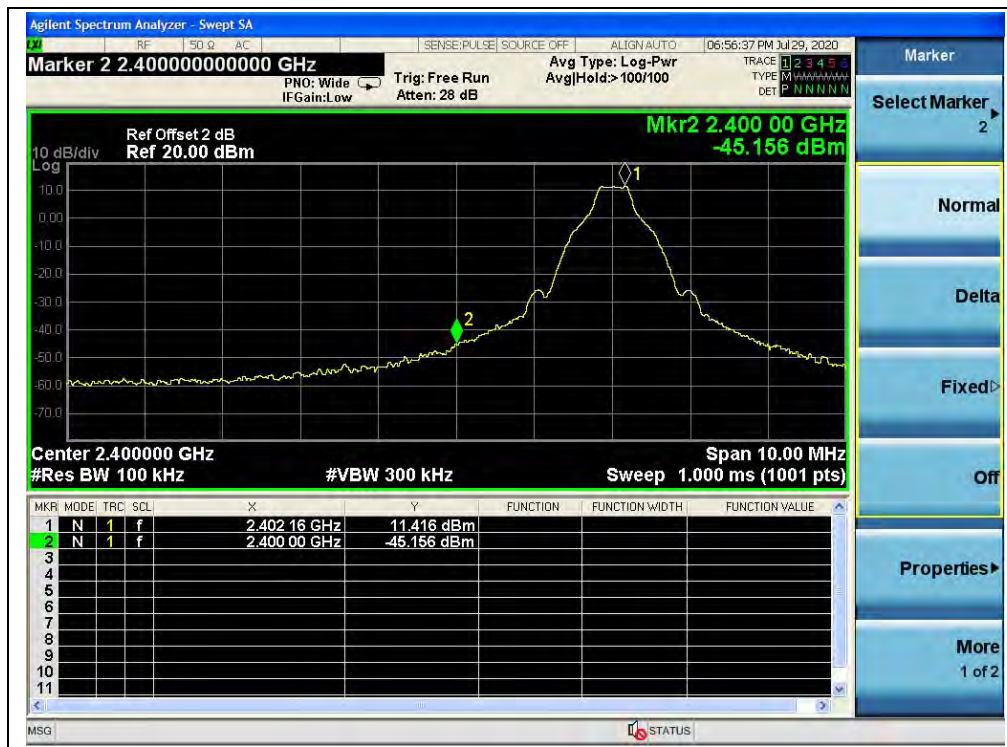


(Band edge, Channel 0, GFSK)



(Band edge with hopping on, Channel 0, GFSK)

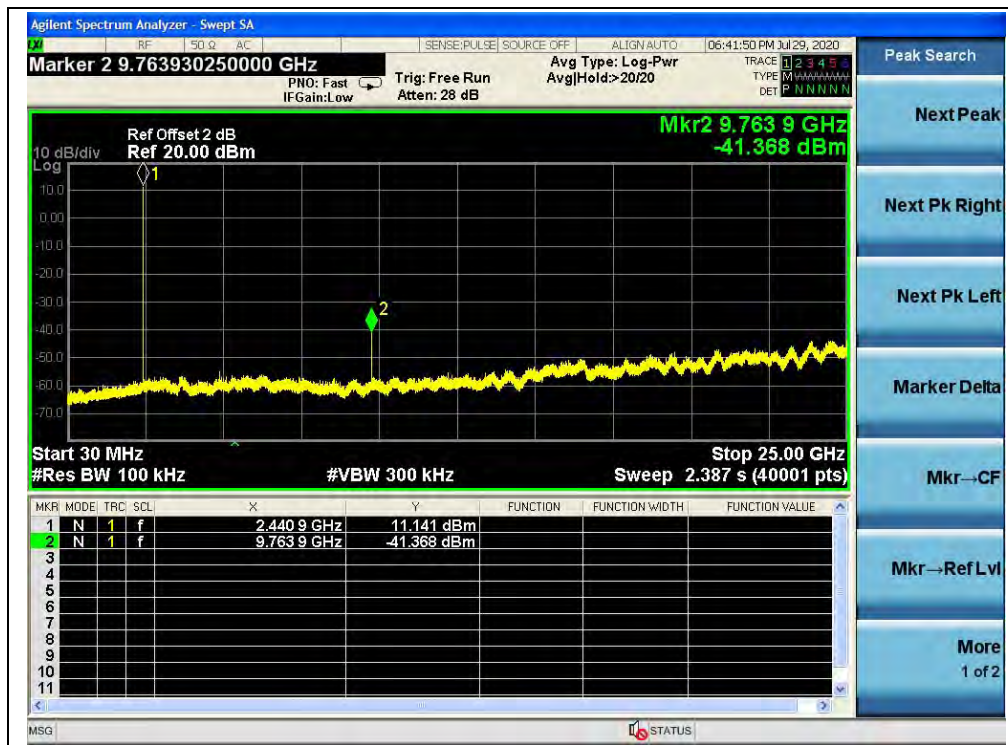

(30MHz to 25GHz, Channel 39, GFSK)

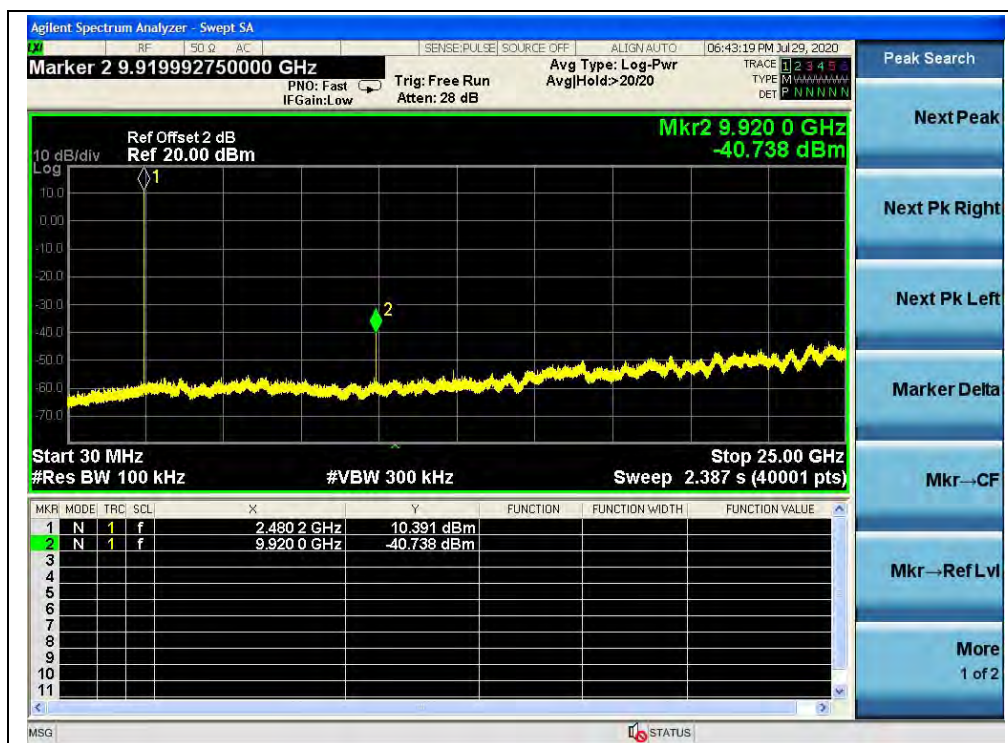

(30MHz to 25GHz, Channel 78, GFSK)



(Band edge, Channel 78, GFSK)



(Band edge with hopping on, Channel 78, GFSK)




$\pi/4$ -DQPSK Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-43.30	7.45	-12.55	PASS
39	2441	-40.12	9.20	-10.80	PASS
78	2480	-39.35	5.32	-14.68	PASS



B.Test Plot:

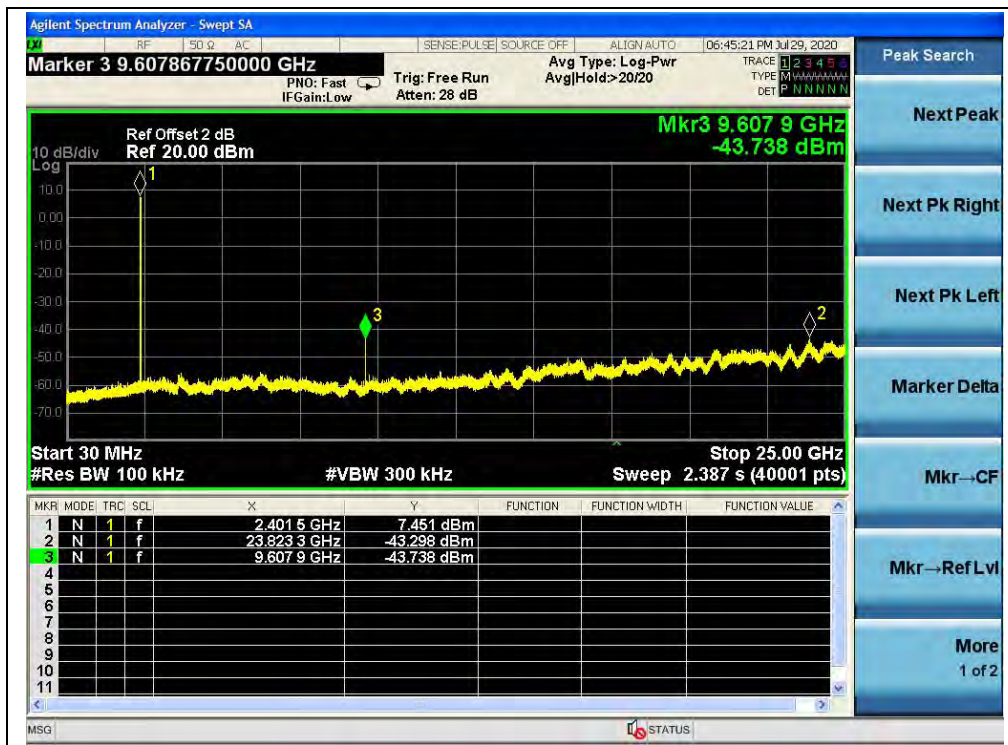

(30MHz to 25GHz, Channel 0, $\pi/4$ -DQPSK)


(Band edge, Channel 0, $\pi/4$ -DQPSK)

(Band edge with hopping on, Channel 0, $\pi/4$ -DQPSK)

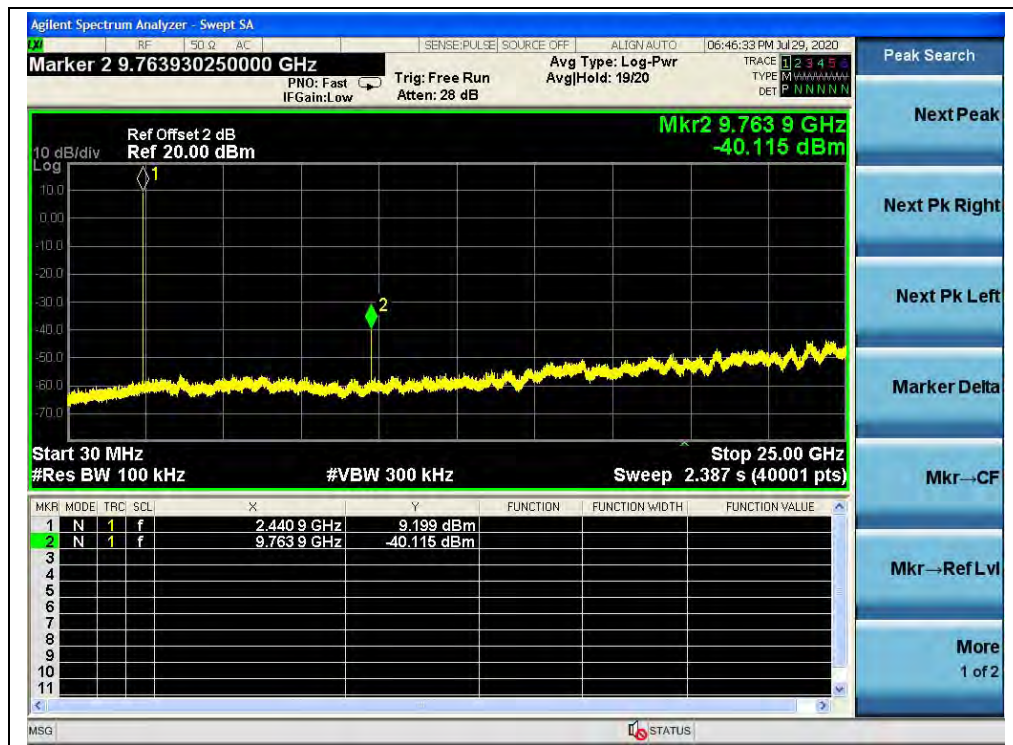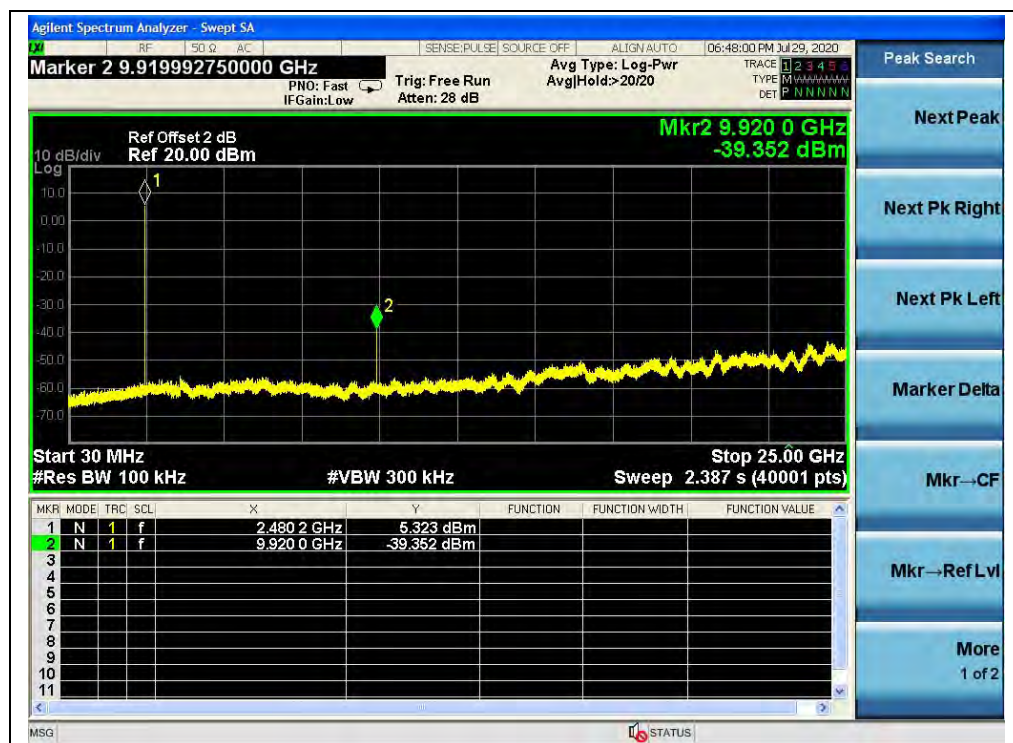
(30MHz to 25GHz, Channel 39, $\pi/4$ -DQPSK)

(30MHz to 25GHz, Channel 78, $\pi/4$ -DQPSK)


(Band edge, Channel 78, $\pi/4$ -DQPSK)

(Band edge with hopping on, Channel 78, $\pi/4$ -DQPSK)




8-DPSK Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-43.17	8.72	-11.28	PASS
39	2441	-41.15	10.01	-9.99	PASS
78	2480	-40.67	6.38	-13.62	PASS

B.Test Plot:

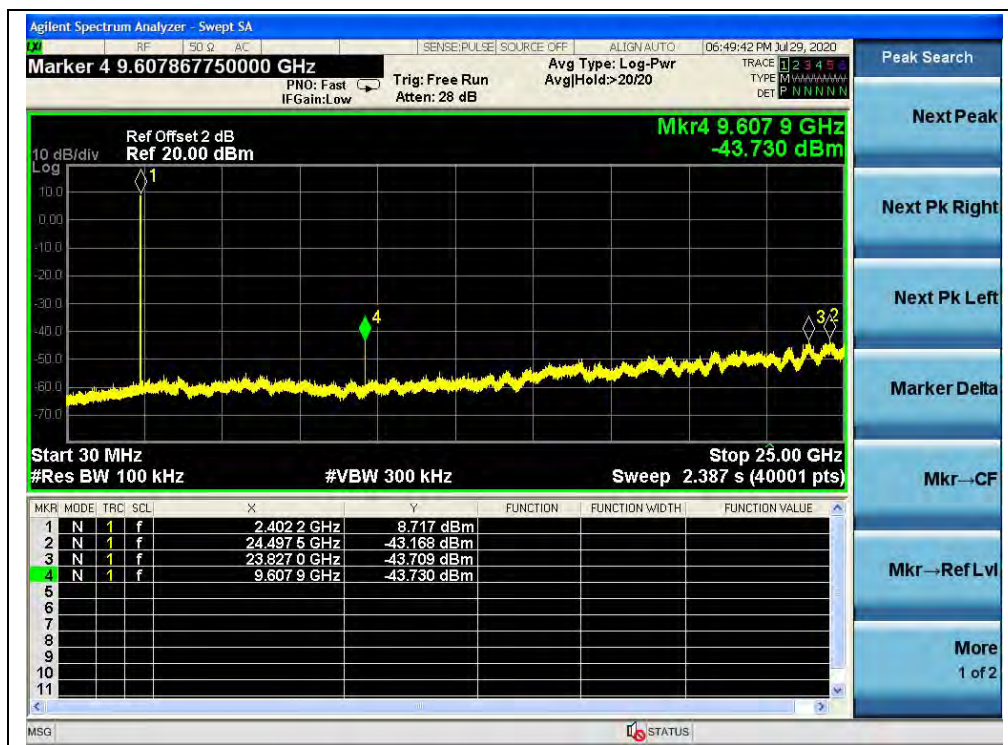


(30MHz to 25GHz, Channel 0, 8-DPSK)




(Band edge, Channel 0, 8-DPSK)



(Band edge with hopping on, Channel 0, 8-DPSK)

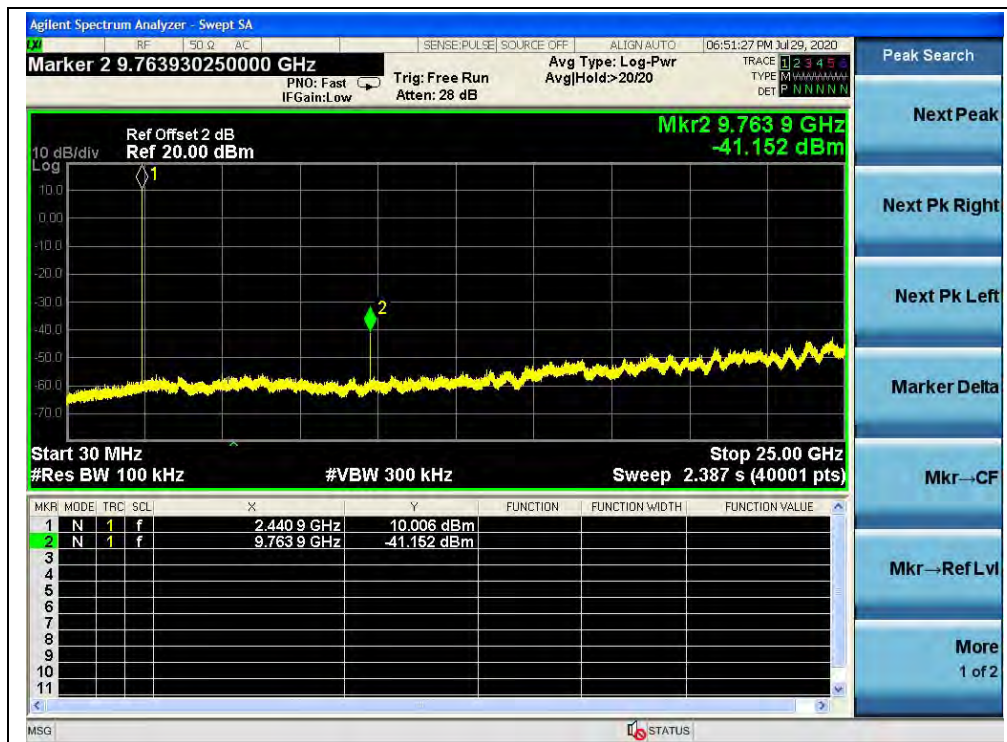

(30MHz to 25GHz, Channel 39, 8-DPSK)

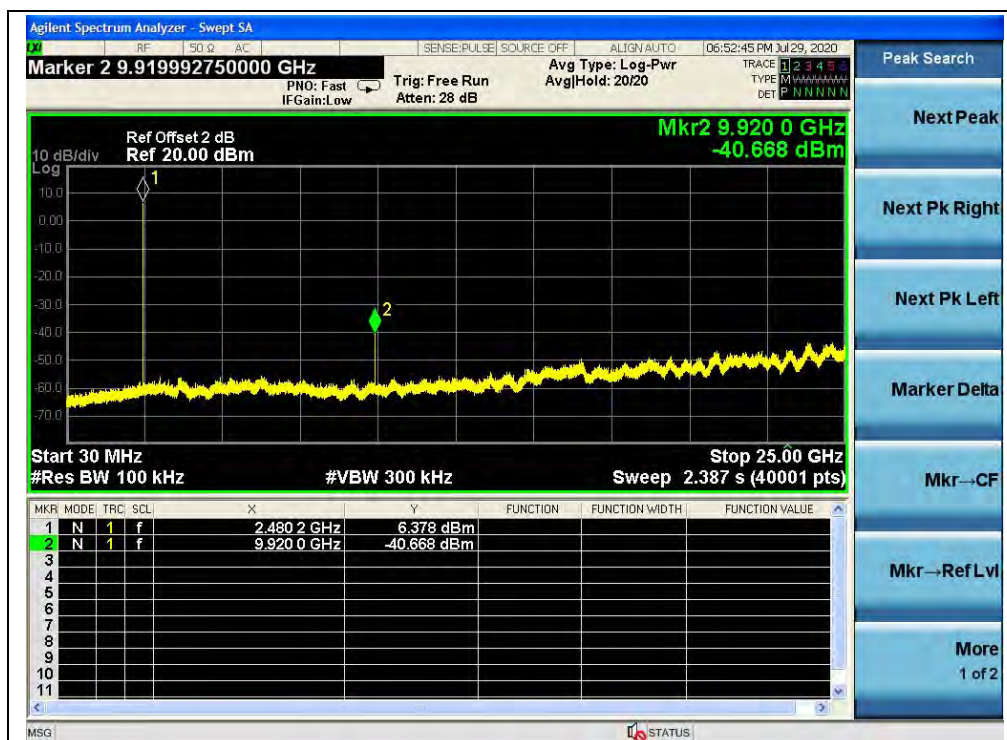

(30MHz to 25GHz, Channel 78, 8-DPSK)



(Band edge, Channel 78, 8-DPSK)



(Band edge with hopping on, Channel 78, 8-DPSK)

2.11. Conducted Emission

2.11.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.11.2. Test Description

Test Setup:



The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.11.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+charging base+adapter+BT TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B.Test Plot:

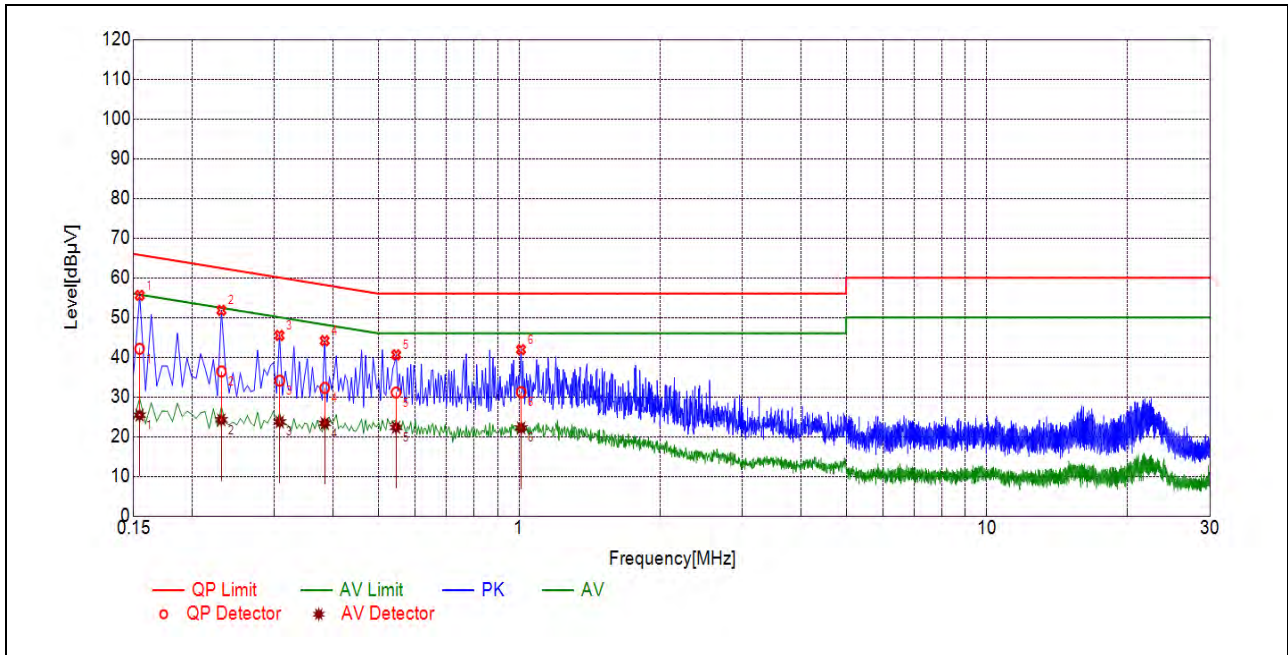

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1544	42.12	25.40	65.76	55.76	Line	PASS
2	0.2309	36.41	24.19	62.42	52.42		PASS
3	0.3078	34.09	23.69	60.03	50.03		PASS
4	0.3841	32.27	23.35	58.19	48.19		PASS
5	0.5455	31.11	22.31	56.00	46.00		PASS
6	1.0102	31.18	22.19	56.00	46.00		PASS

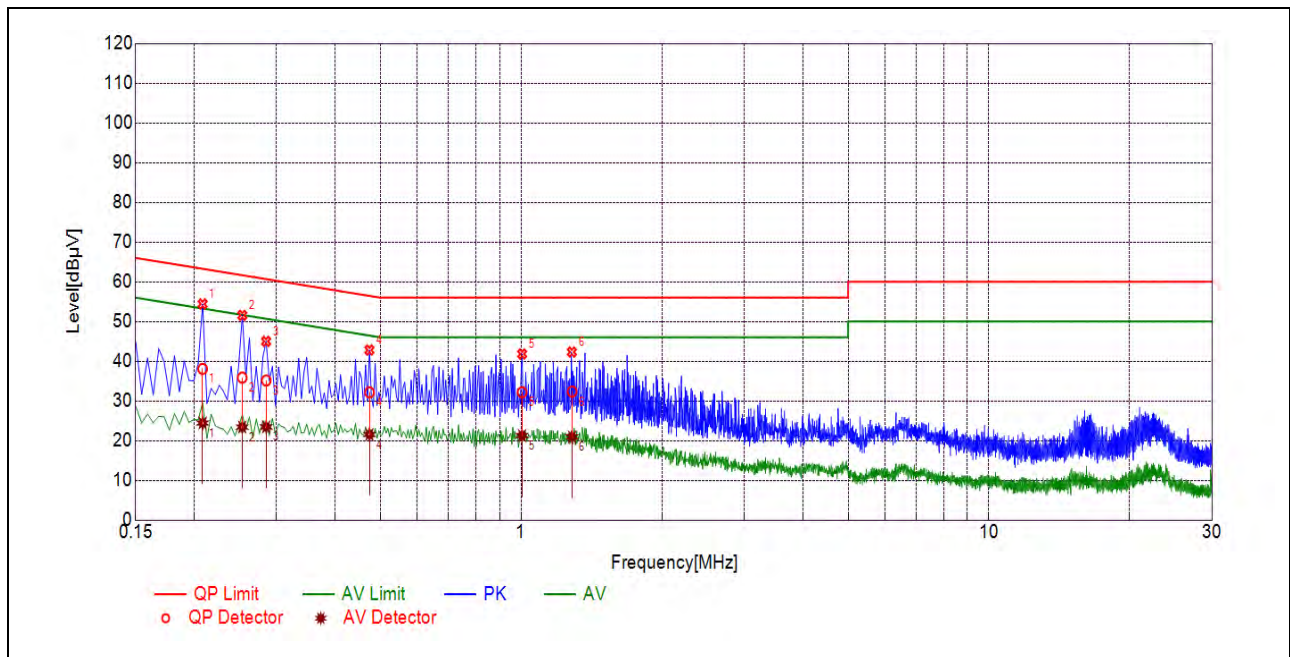

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2085	38.06	24.43	63.26	53.26	Neutral	PASS
2	0.2534	35.86	23.39	61.65	51.65		PASS
3	0.2851	35.14	23.44	60.66	50.66		PASS
4	0.4740	32.15	21.54	56.44	46.44		PASS
5	1.0046	32.18	21.27	56.00	46.00		PASS
6	1.2850	32.35	20.93	56.00	46.00		PASS


2.12.Restricted Frequency Bands

2.12.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.12.2.Test Description

Test Setup:

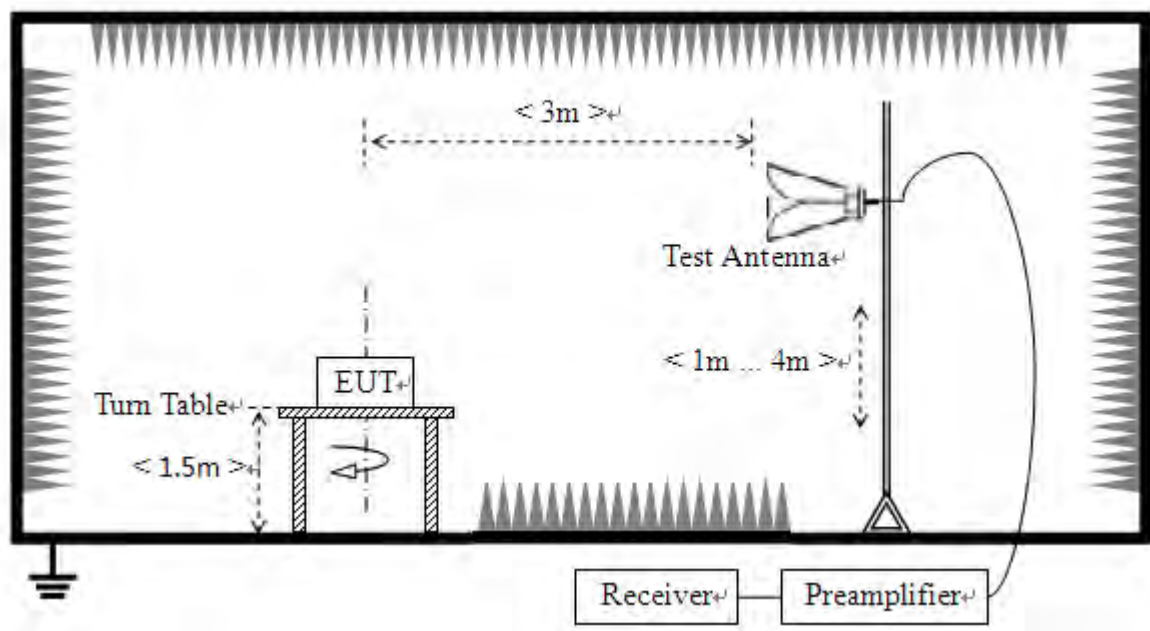

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**2.12.3.Test Procedure**

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.12.4.Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

GFSK Mode**A.Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2386.24	PK	45.74	-29.67	32.56	48.63	74	PASS
0	2387.90	AV	44.36	-29.67	32.56	47.25	54	PASS
78	2484.14	PK	45.48	-29.67	32.56	48.37	74	PASS
78	2484.25	AV	42.41	-29.67	32.56	45.30	54	PASS




B.Test Plot:

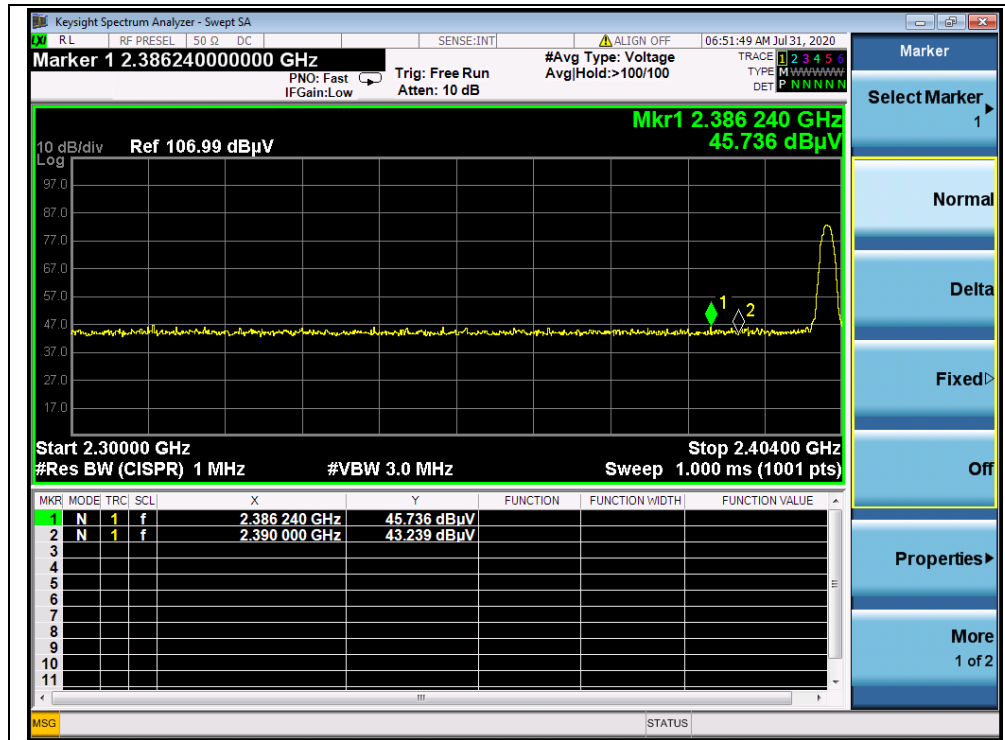


(PEAK, Channel 0, GFSK)

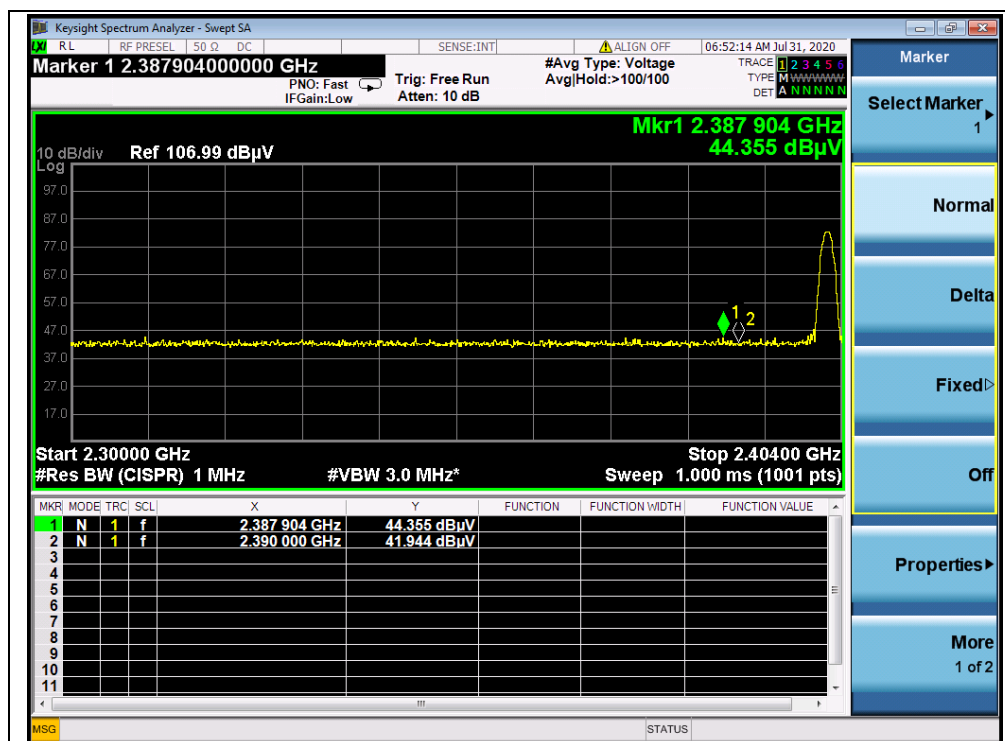

(AVERAGE, Channel 0, GFSK)

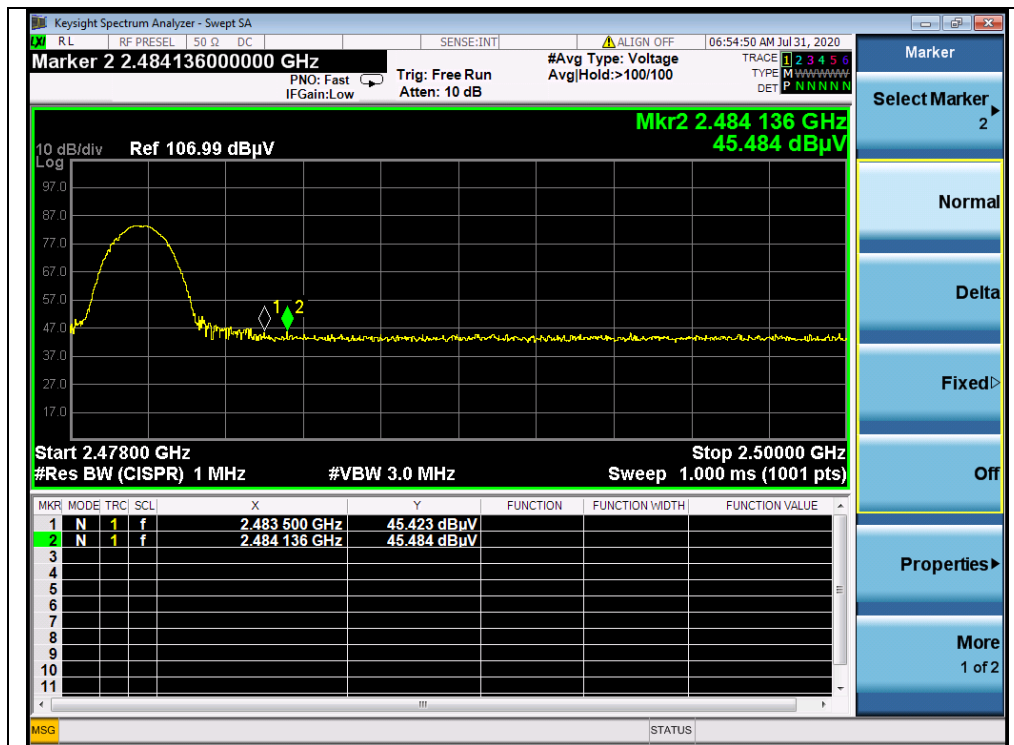

(PEAK, Channel 78, GFSK)

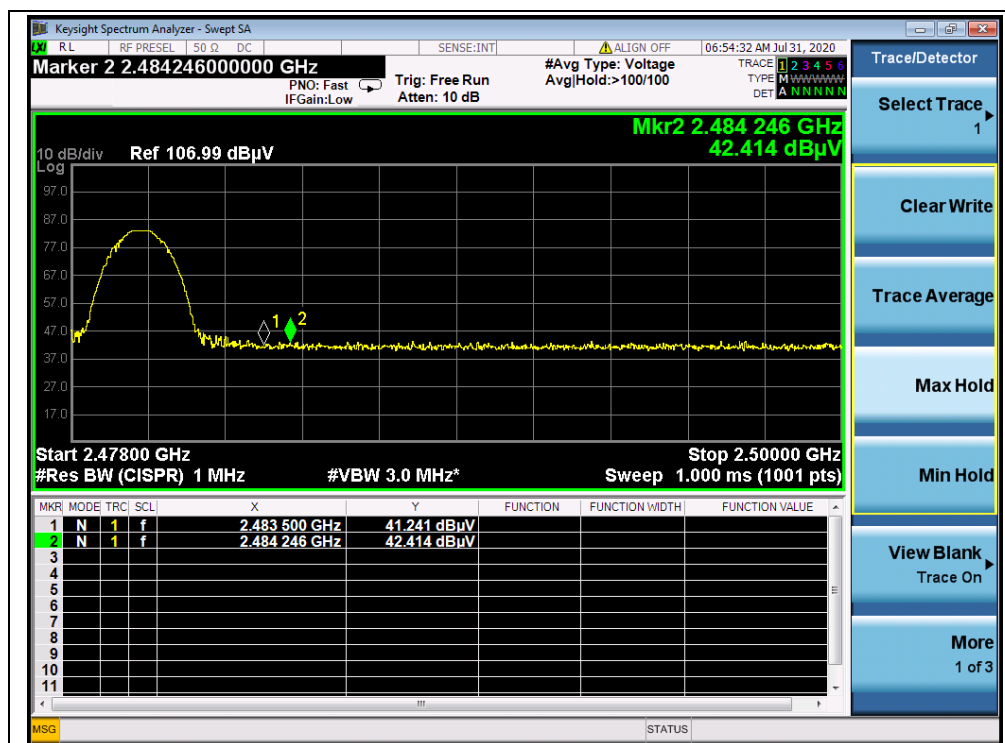

(AVERAGE, Channel 78, GFSK)




$\pi/4$ -DQPSK Mode



A.Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2367.52	PK	45.35	-29.67	32.56	48.24	74	PASS
0	2380.52	AV	43.58	-29.67	32.56	46.47	54	PASS
78	2484.33	PK	43.44	-29.67	32.56	46.33	74	PASS
78	2484.16	AV	45.54	-29.67	32.56	48.43	54	PASS

B.Test Plot:

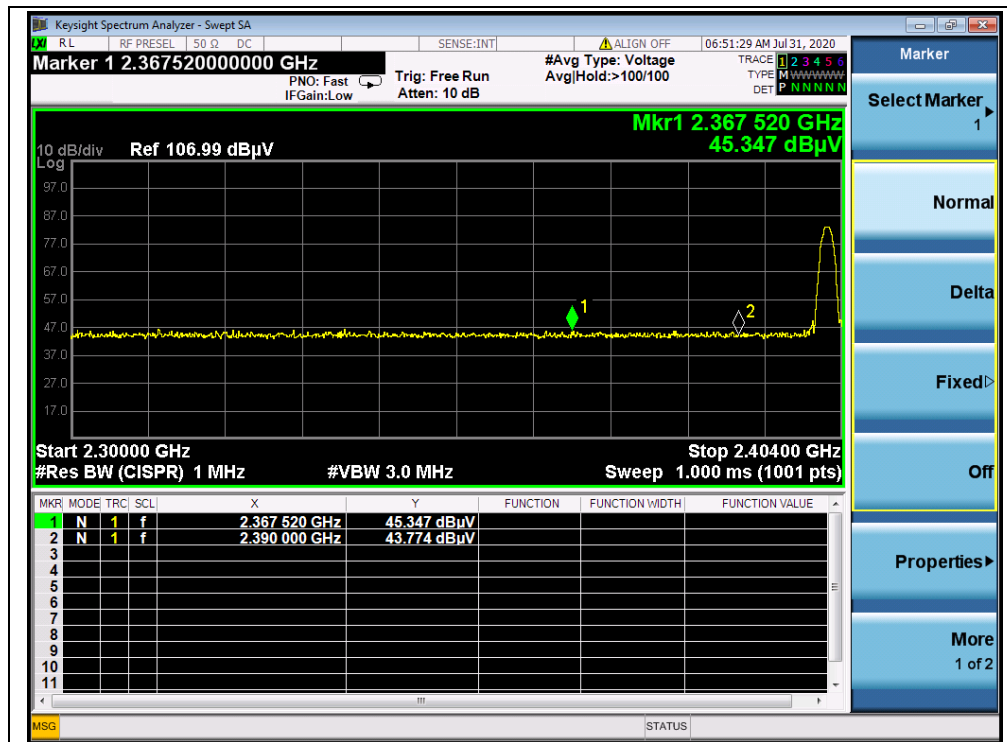

(PEAK, Channel 0, $\pi/4$ -DQPSK)

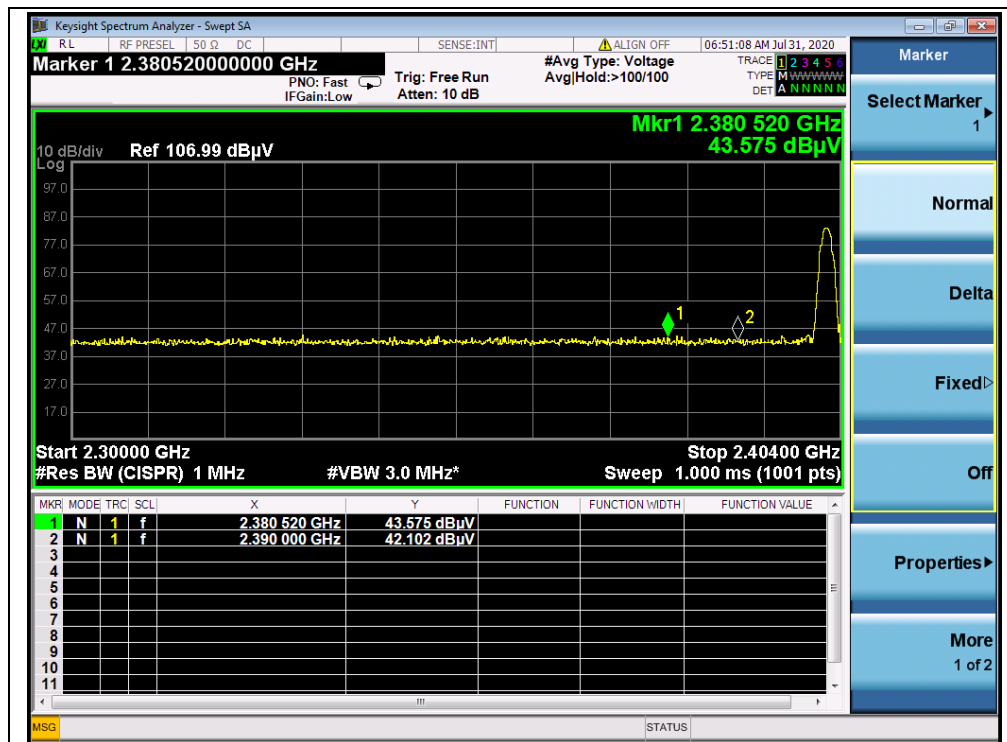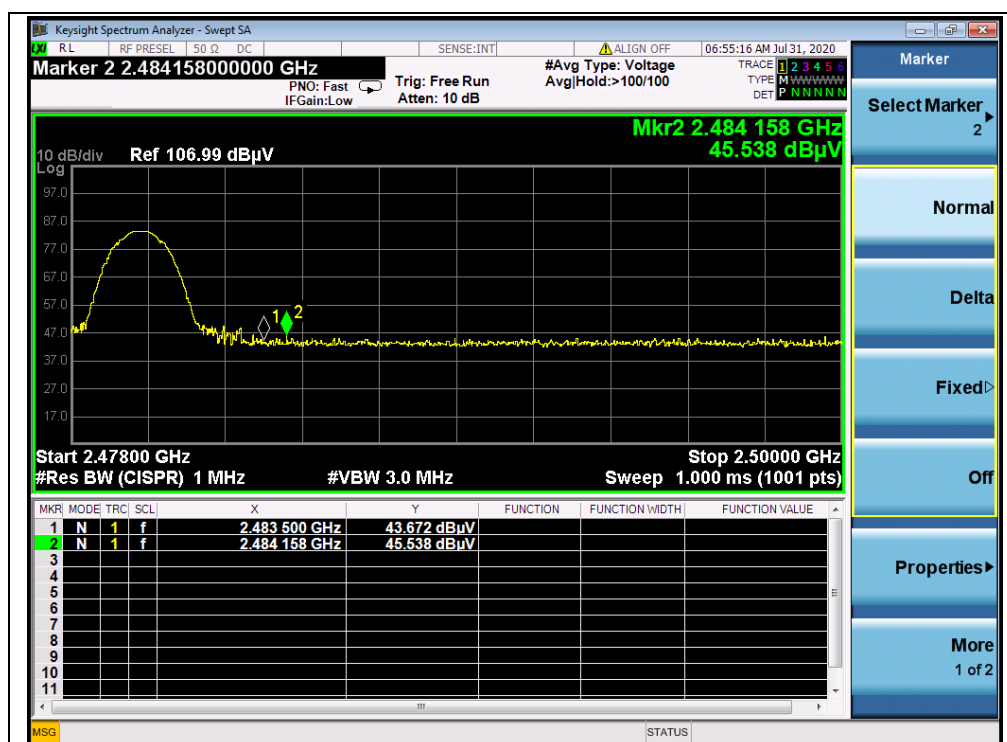
(AVERAGE, Channel 0, $\pi/4$ -DQPSK)

(PEAK, Channel 78, $\pi/4$ -DQPSK)






8-DPSK Mode


A.Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2378.75	PK	46.04	-29.67	32.56	48.93	74	PASS
0	2379.06	AV	43.46	-29.67	32.56	46.35	54	PASS
78	2484.80	PK	45.68	-29.67	32.56	48.57	74	PASS
78	2484.33	AV	43.44	-29.67	32.56	46.33	54	PASS


B.Test Plot:

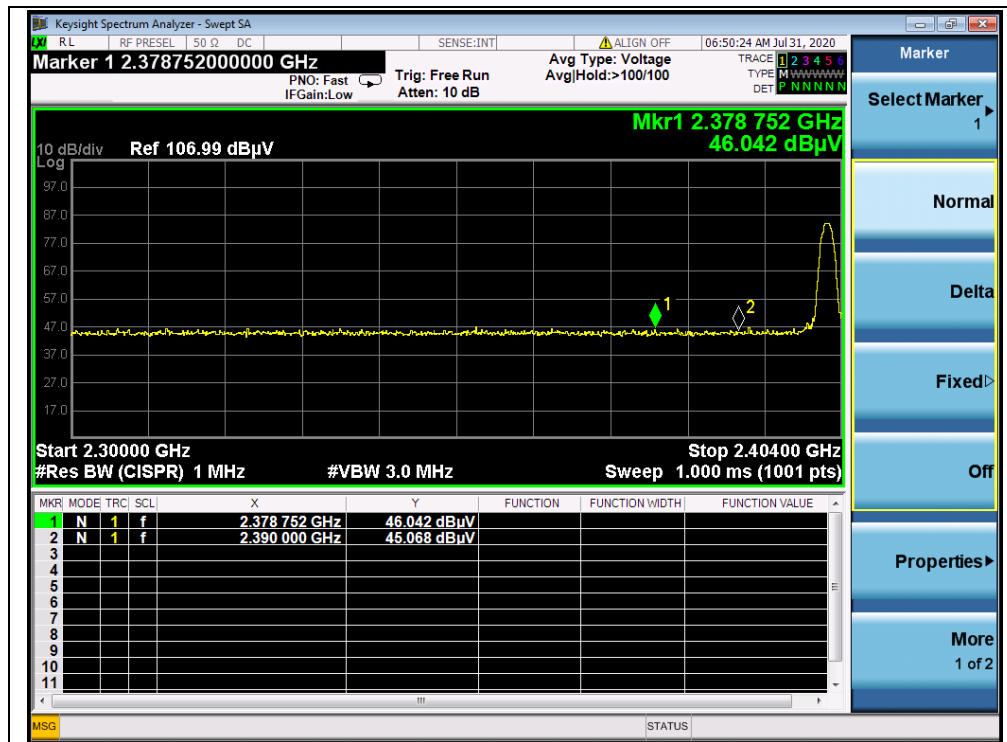


(PEAK, Channel 0, 8-DPSK)

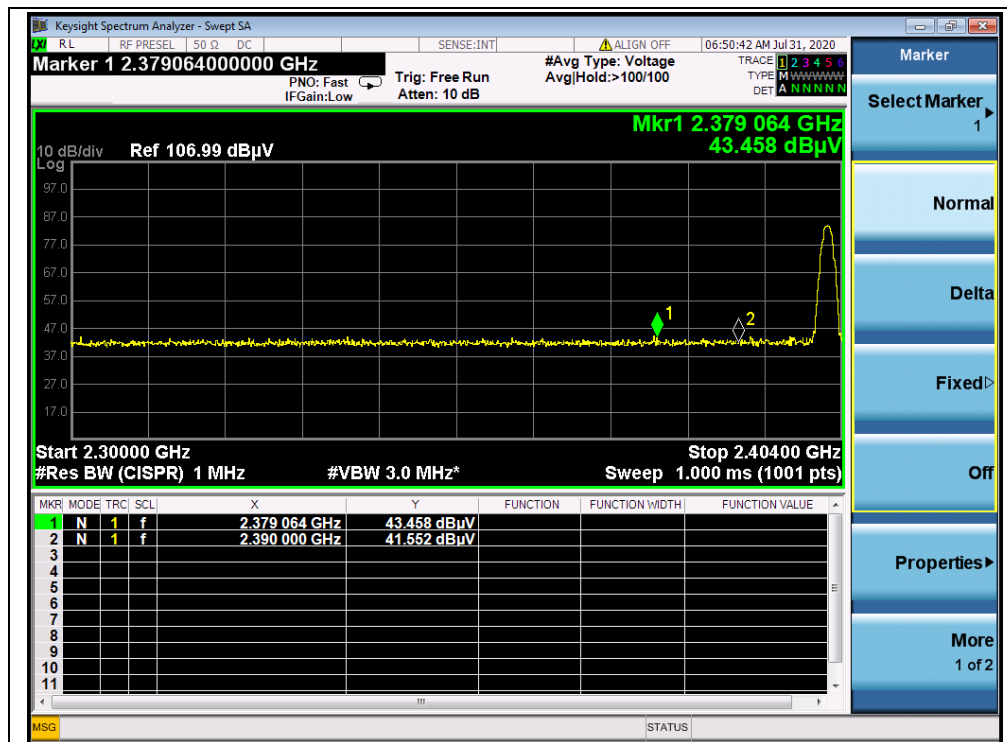

(AVERAGE, Channel 0, 8-DPSK)

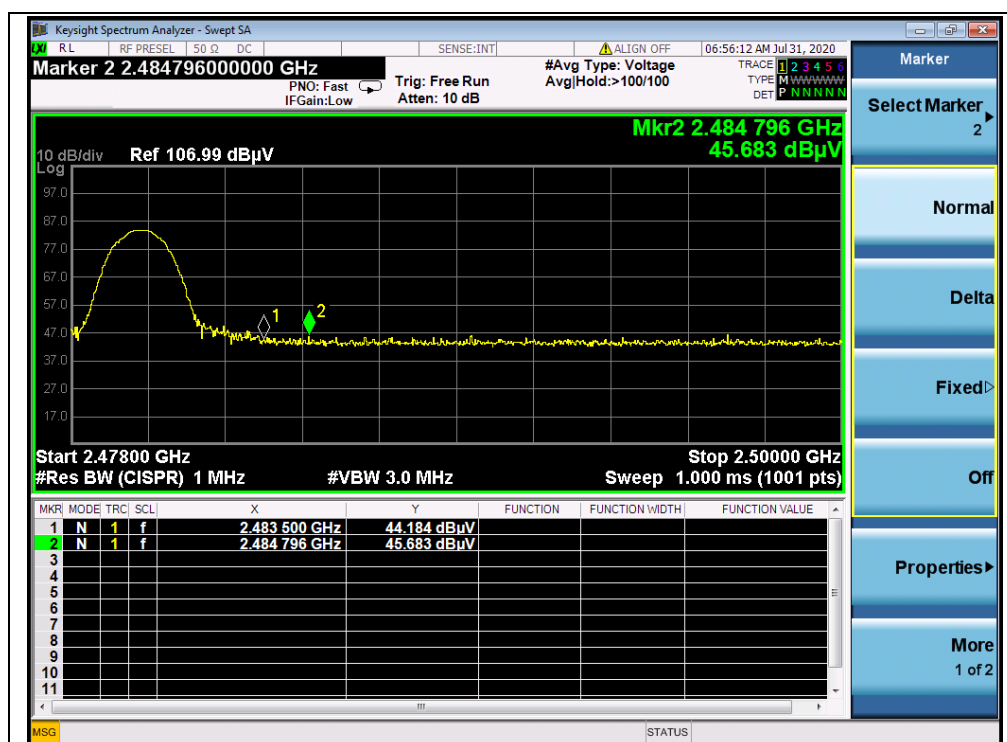

(PEAK, Channel 78, 8-DPSK)

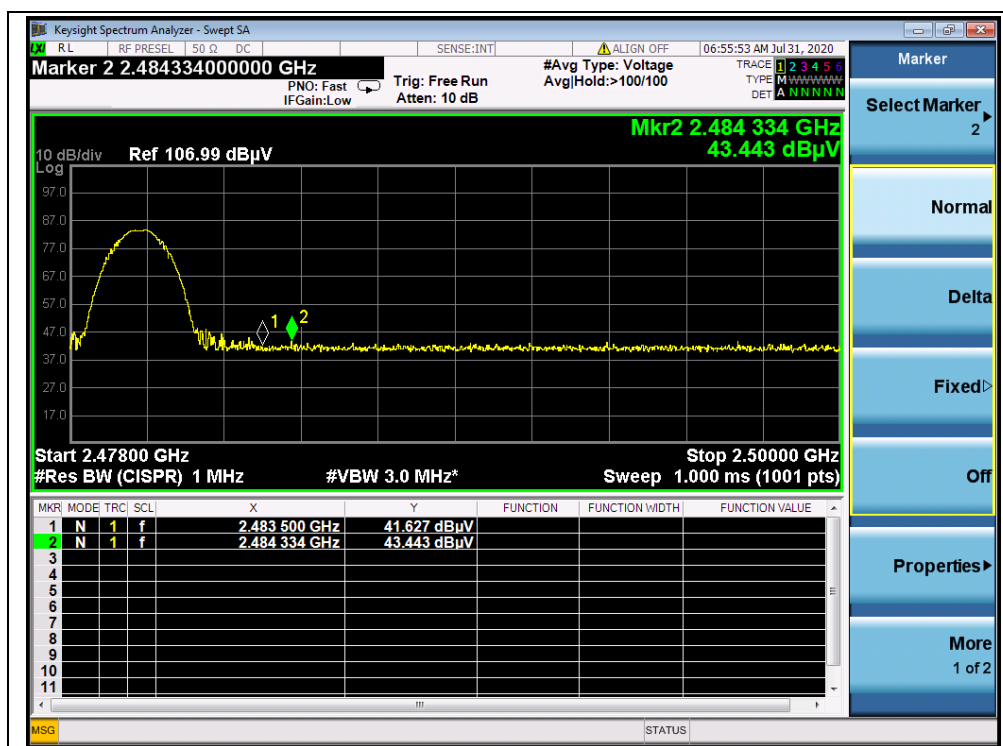

(AVERAGE, Channel 78, 8-DPSK)

2.13.Radiated Emission

2.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.13.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz



- 2) For radiated emissions from 30MHz to 1GHz

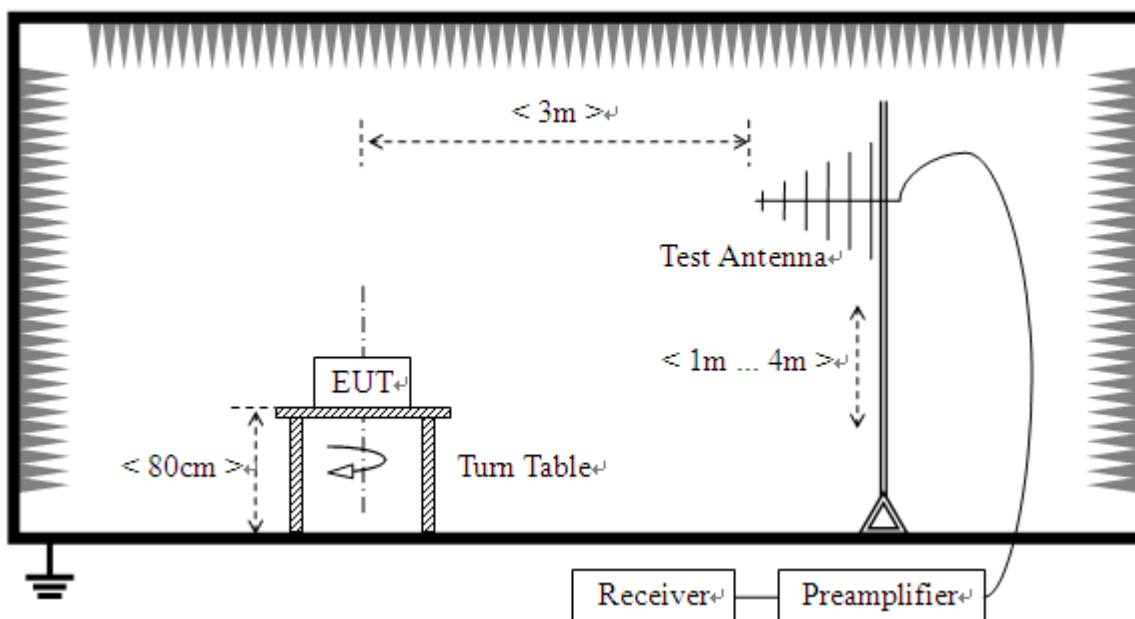

3) For radiated emissions above 1GHz

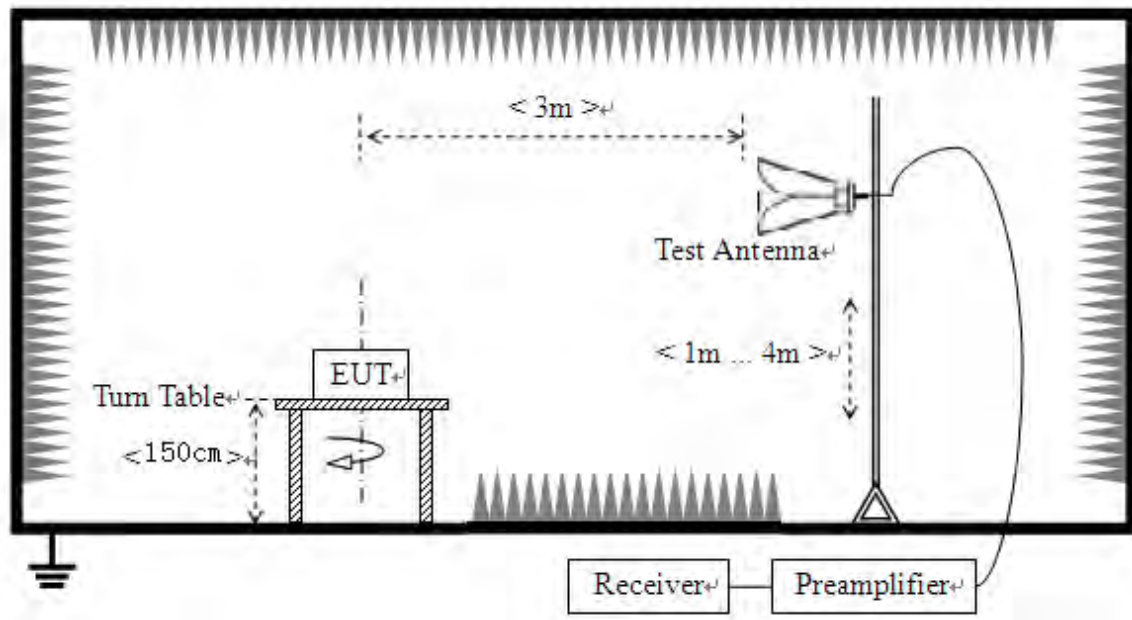

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be



higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

2.13.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.13.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note 1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note 2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**GFSK Mode**

Plots for Channel 0

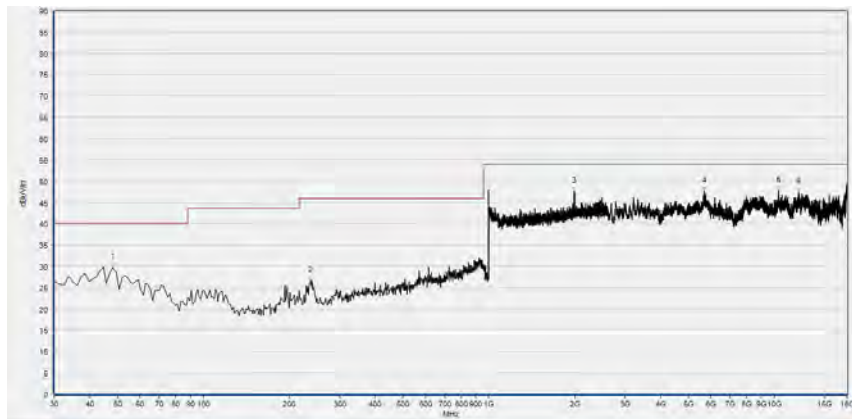

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	29.65	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
237.597	26.60	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1996.879	47.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5694.563	47.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10360.211	47.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12183.342	47.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

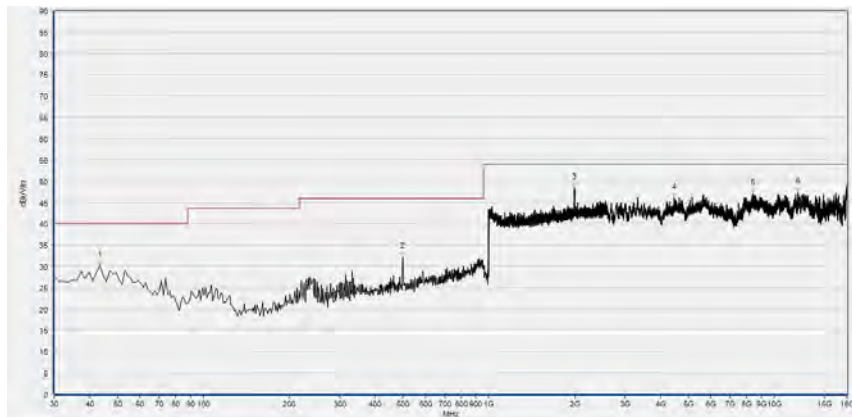


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	30.22	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
498.611	32.11	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1994.958	48.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4456.738	46.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8416.658	47.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12118.931	47.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

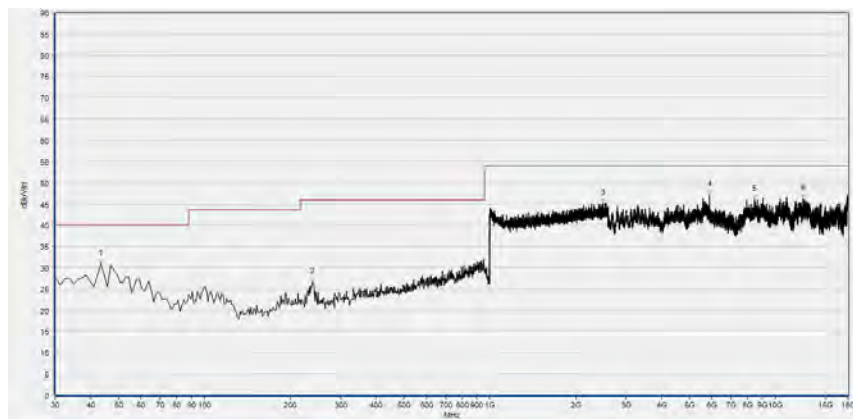

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	30.76	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
238.811	26.66	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2493.077	45.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5887.798	47.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8453.064	46.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12530.606	46.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

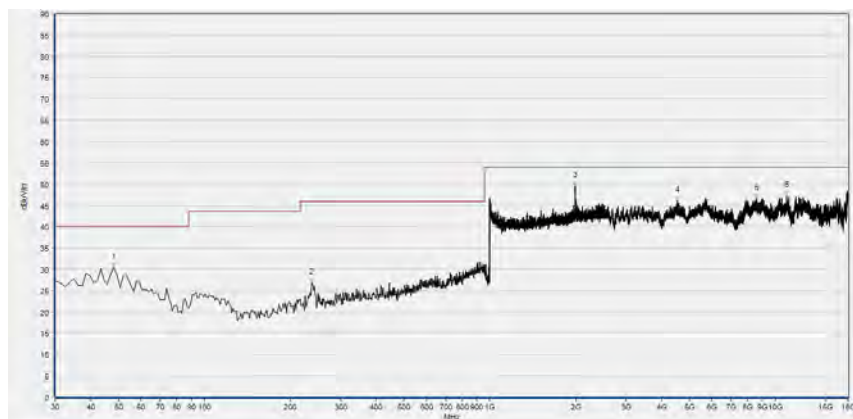

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	30.49	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
237.597	26.83	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1993.037	49.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4540.753	46.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8593.090	46.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10959.520	47.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 78

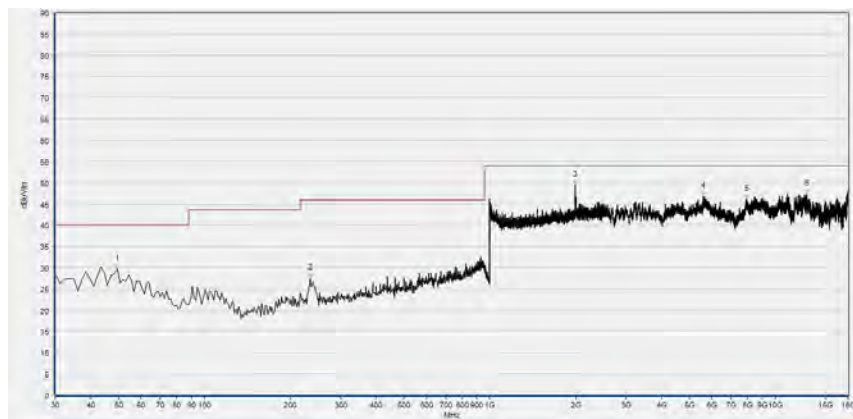

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	29.69	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
235.169	27.46	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1992.397	49.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5593.744	46.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7918.167	46.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12894.672	47.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

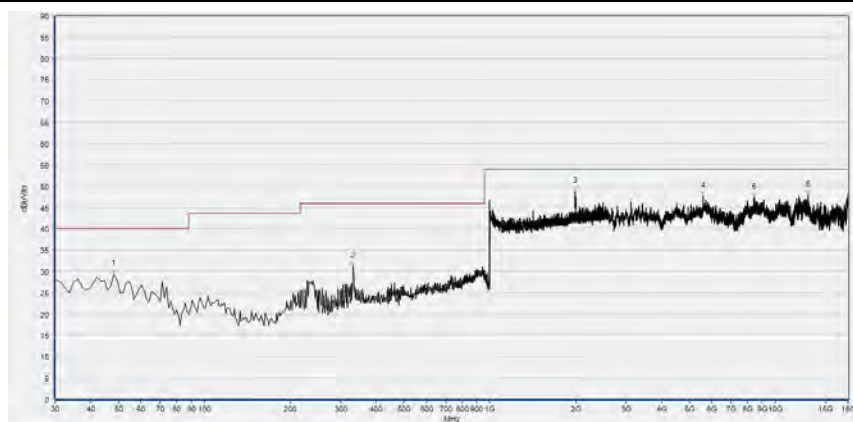


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	29.36	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
332.290	31.23	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1990.476	48.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5590.944	47.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8427.860	47.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13062.702	47.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


 **$\pi/4$ -DQPSK Mode**

Plots for Channel 0

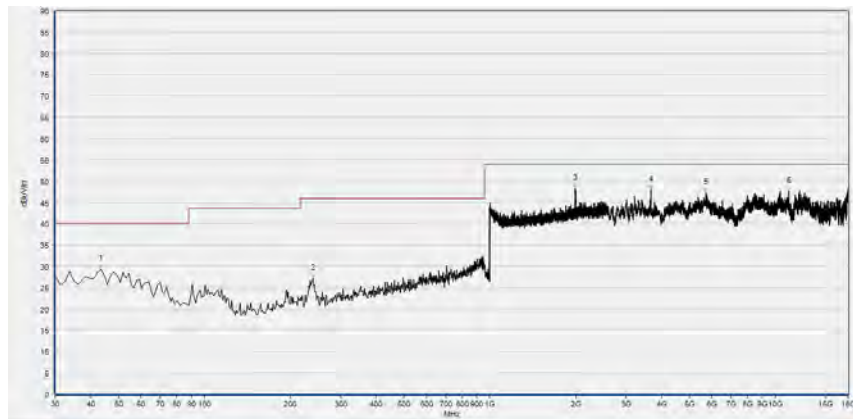

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	29.39	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
240.025	27.14	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1994.318	48.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3661.393	47.97	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5714.166	47.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11127.550	47.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

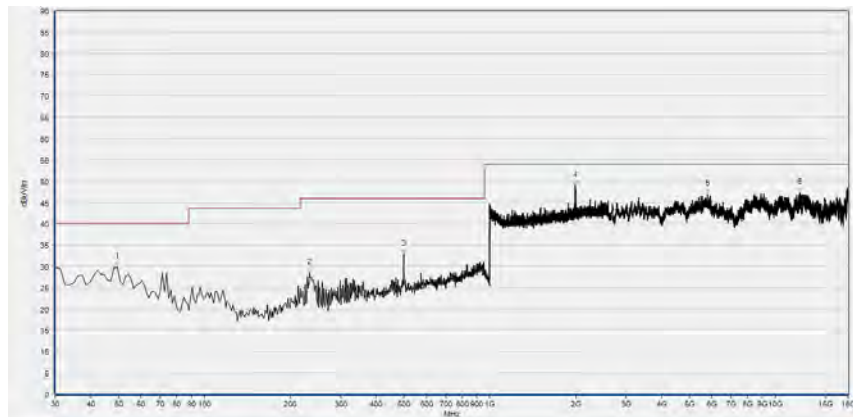

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	29.82	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
233.955	28.45	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
498.611	32.93	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1990.476	48.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5770.176	46.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12188.943	47.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 39

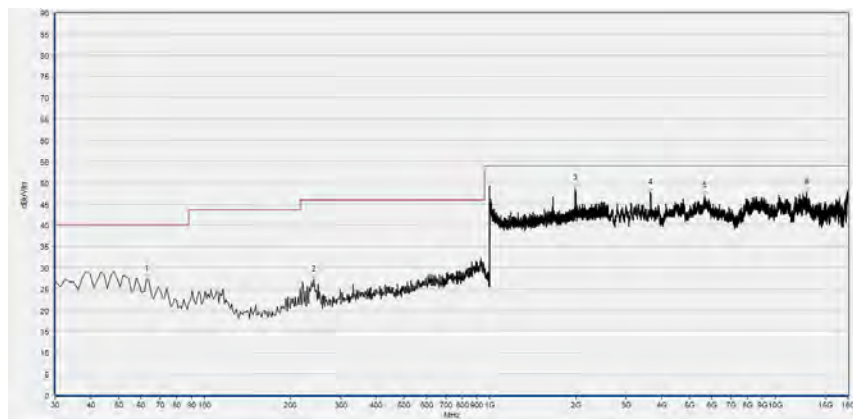

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
62.778	27.37	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
241.239	27.13	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1994.318	48.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3655.792	47.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5652.555	46.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12855.465	47.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

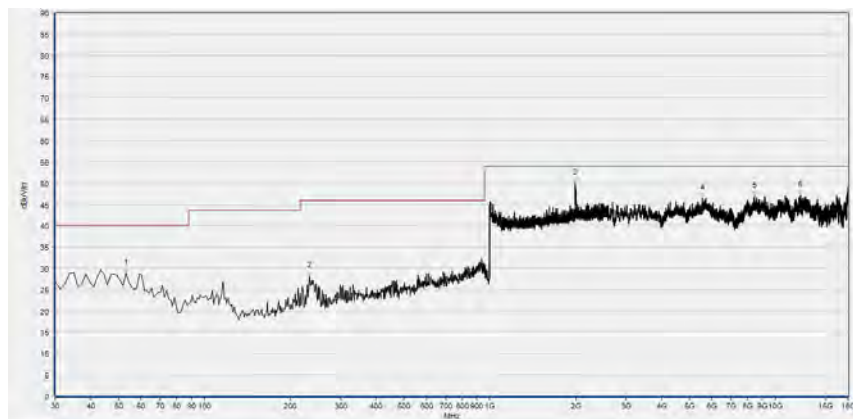

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.066	28.89	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
233.955	28.14	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1995.598	49.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5554.537	46.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8436.261	46.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12202.946	47.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 78

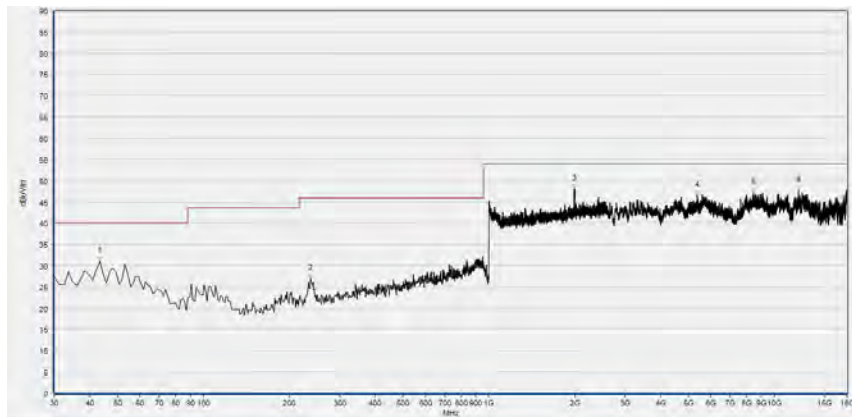

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	30.96	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
237.597	26.94	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1996.238	48.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5380.906	46.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8467.067	47.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12135.734	47.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

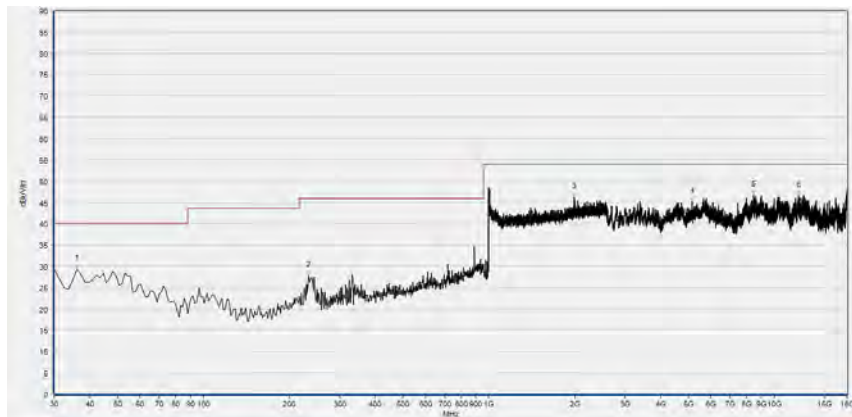


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.070	29.41	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
233.955	27.83	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1992.397	46.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5165.266	45.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8478.269	46.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12132.933	46.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




8-DPSK Mode

Plots for Channel 0

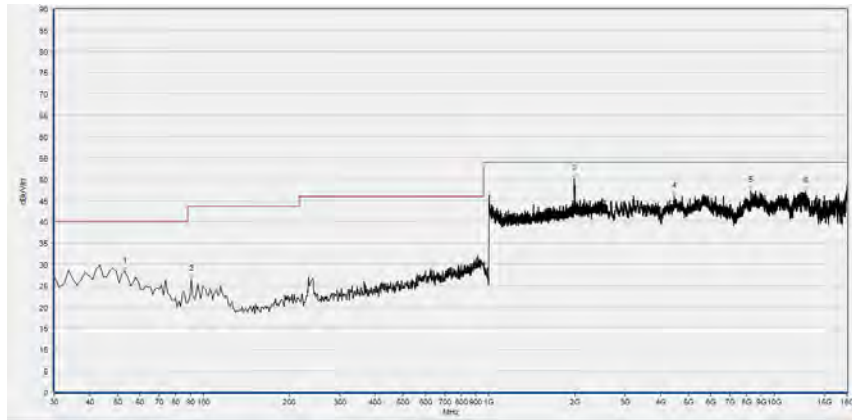

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.066	28.34	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
90.701	26.40	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1994.318	50.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4456.738	45.97	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8285.034	47.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12883.470	47.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

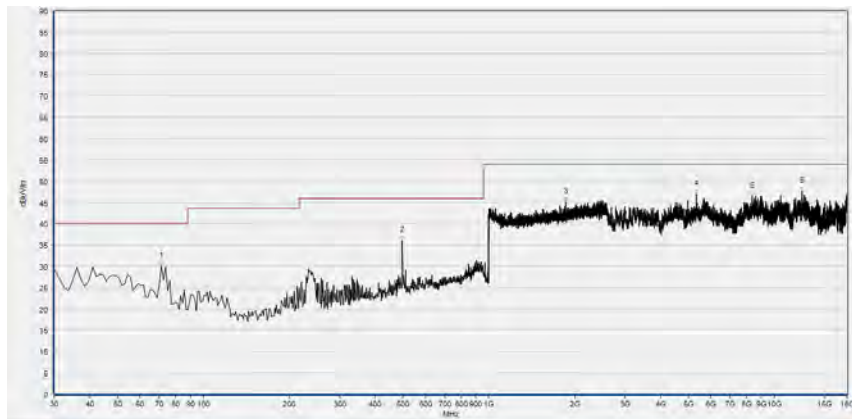

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
71.277	30.03	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
497.397	36.00	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1857.943	45.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5338.898	46.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8377.450	46.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12530.606	47.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 39

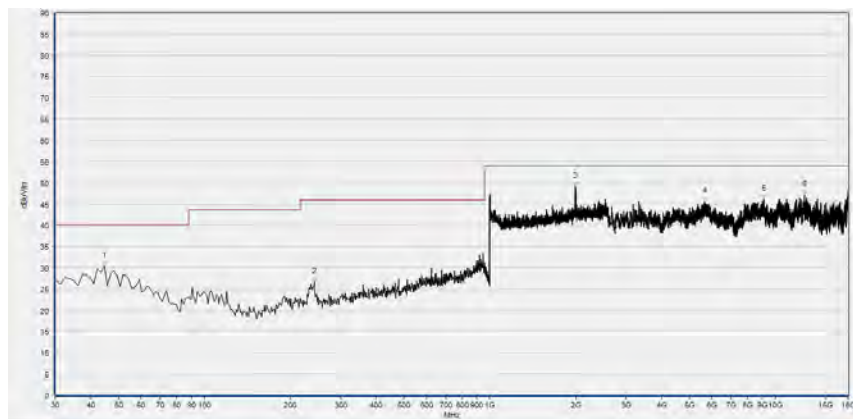

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.568	30.28	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
242.453	26.72	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1993.037	49.17	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5666.558	45.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9144.790	46.17	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12656.628	47.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

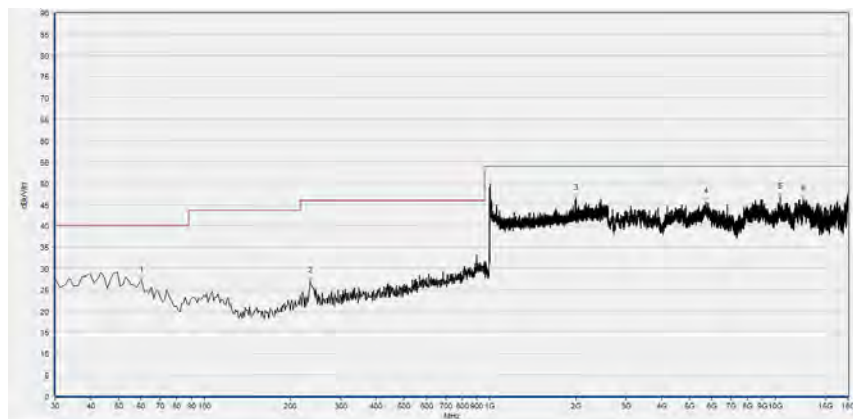

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
60.350	27.15	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
235.169	27.07	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1999.440	46.48	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5725.368	45.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10413.421	46.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12522.204	46.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 78

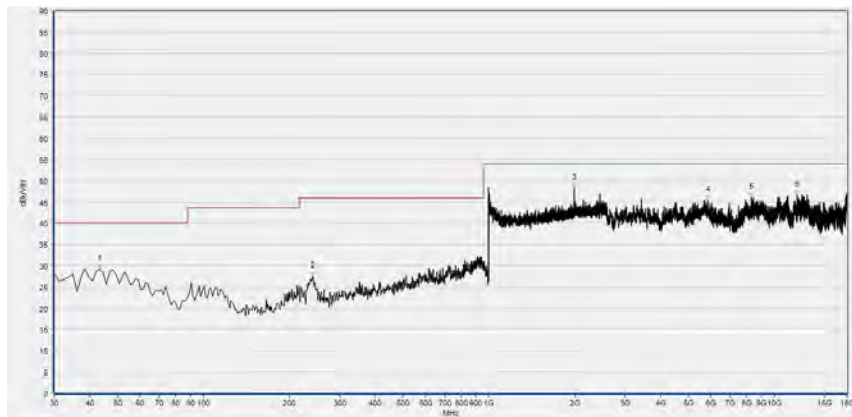

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	29.18	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
241.239	27.49	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1992.397	48.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5840.189	45.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8310.238	46.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12046.117	46.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

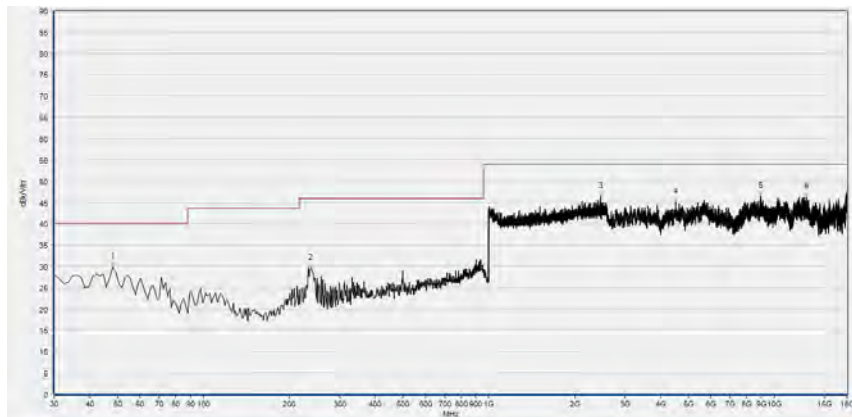

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	29.77	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
237.597	29.43	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2461.064	46.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4507.147	45.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8943.153	46.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12950.682	46.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
20dB Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. MorlabLaboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2020.04.01	2021.03.31
Directional coupler	17041703	DTO-5-30	ShangHaiHuaxiang	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	812744	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2020.07.24	2021.07.23
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A
Adapter	J5164200000 5	AK933JH	OPPO	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2020.07.21	2021.07.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

————— END OF REPORT —————