

Due to continuous improvement, actual product may differ from the manual.

Manual is for reference only.

Safety Reminding


- 1. Please read manual carefully before using projector. Manuals should be kept for furthur use.
- 2. Please do not look into the lens while using to avoid eye damage.
- 3. Only professional technician is allowed for repairing. 4.Do not block the ventilation hole while projector is working. If
- ventilation whole is blocked, it might cause fire or projector off. 5. No water should be placed around the projector. If projector is
- split with waters, please cut off the power and dry it immediately. 6. It is normal there is hot air coming out from the ventilation wholes for projector. Do not take is as product defects.


Product packing list

Please check if accessory is complete,

Projector User manual 1pc 1pc Power cable Remote contro l 1pc Mini tripod 1pc Fixing 1 pc

1 pc (OPTINAL) product carrying box

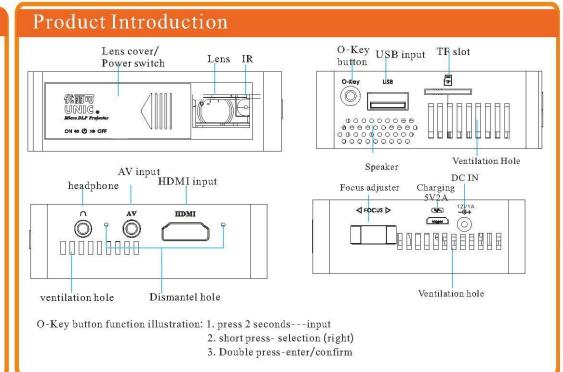

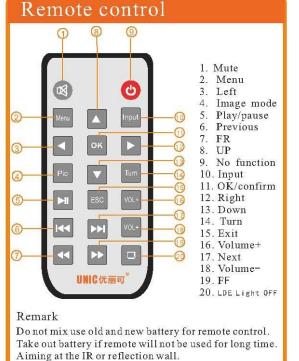

Operation illustration

Preparation

Power selection

- ▶ Battery- If no DC 5V-2A/12V-1A power is provided, battery power supply will be automatically selected. Remark: If battery power supply is not working, please charge
- > 5V-2A/12V1A power supply-Use power adaptor or power bank as power source.


Battery Charging:

the battery first.

While charging, the projector should under stand by status, then connect with 5V or 12V power, the indicate light on shows battery is undercharging, and if the indicate light flashes, charging finished.

Power on/off

Open the lens cover, projector will be on automatically in few seconds Close the lens cover, projector will be off and enter stand-by status.



Focus

Put projector with lens vertical to the wall or screen, turn on the projector, and then adjust focus adjuster until the picture is


1231

Input selection and connection

► HDMI input

Connection: connect the projector with HDMI output device with HDMI cable as showed below.

Input selection: press "input" button on the remote control. until the cursor move to "HDMI", then press OK to confirm.



Few computers can not switch signal to HDMI automatically, you need to do it manually. Below is detailed introduction for signal switch for computers.

Window 7 system

Press "FN" AND "P" together, you can get the following interface, then press "P", the cursor will move between different projection methods, you can use enter to confirm



Other computer

Computer with other system--please use shortcut key. Different computer has different shortcut key, following for reference.

Dell: Fn+F8 HP: Fn+f4Lenovo: Fn+F7 Toshiba: Fn+F5 Acer: Fn+F5 Samsung: Fn+F4 Sony: Fn+F7 ASUS: Fn+F8

Press "FN" and "F*" together, you can switch between different projection models.

If above way can not work, please contact seller or search on the

If no image, please lower down the resolution for computer and try

English

On

Choose "movie", "Music", "Photo" or"TEXT"icon, to play relevant files. Use play button to get full screen. "OK" button only for selection.

After switch to relevant multimedia input, you can get follwoing interface

► Multimedia input (USB orTF)

USB

Connect: First insert USB or TF card into relevant slot.

Input selection: press "input" button on the remote control. until

the cursor move to "USB" or "TF", then press OK to confirm.

File format supported


Audio	MP3/WMA/ASF/OFF/AAC/WAV
picture	JEPG/BMP/PNG
Video	3GP(H263,mpeg4)/AVI(XVID,DIVX,H264)/MKV(XVID,H264,DIVX) FLV(FLV1)/MOV(H264)/MP4(MPEG4/AVC)/MPEG(MPEG1)/VOB(MPEG2)/RMVB(RV40)
Text	TXT

For patent issue, this projector did not support DOLBY audio decoding.

If you are using DOLBY files, there would be no sound. It should not be treated as projector defect.

Connect projector with AV output device with 3-in-1 AV cable. See below for connection detail

Input selection: press "input" button on the remote control. until the cursor move to "AV", then press OK to confirm.



Menu Operation

Option menu

Under option menu you can change the following setting:

1. Language

- 2. Internal speaker
- 3. Sleep Timer
- 4. Auto Sleep 5. Restore factory default
- 6. Software update

before update the software.

Please consult the seller Picture Menu

Restore Factory Default

OSD Language

Under picture menu, you can made adjustment for the following issue

1. Picture mode

- 2. Color Temperature
- 3. Aspect Ratio 4. Noise Reduction
- 5. Rotate

Projection Distance and size

Distance (cm)	35.5	85.5	127.5	170.5	225.5	268	320	430
Image Size(cm)	14	32	48	64	84	100	120	150

Parameters

Image system	DLP	Color	16.7M 1000:1	
Brightness	800 Lumen	Contrast		
Resolution	854*480	Max Resolution	1920*1080	
Lamp	LED	Projection distance	35-430 cm	
Image size	14-150 inches	Aspect Ratio	4:3/16:9	
Power consumption	10W	Power supply	5V2A/12V1A	
Input interface	USB/TF/HDMI/AV	Output interface	Headphone	
Speaker	8Ω1W	Others	Remote control/ battery 1500mAh	
Size	78*71*24.5mm	Weight	130g	

FCC Statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may

cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- --Reorient or relocate the receiving antenna.
- --Increase the separation between the equipment and receiver.
- --Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- --Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. User should avoid un-intended operation of usage when it is collocated with other transmitters or antenna. The distance between user and products should be no less than 20cm