



Change

# **FCC** Radio Test Report

FCC ID: 2AHKA-CAPRI125P

This report concerns (check of	one): ⊠Original Grant
Equipment : Test Model : Series Model :	1708C076 BT Speaker, Internet Radio KAPSCH-H KAPSCH CAPRI 125 PLUS Guangzhou Rayer Acoustic Technology Co.,Ltd 520.192 Kezhu Road,Guangzhou science park, Guangdong province
Date of Test :	Aug. 04, 2017 Aug. 04, 2017 ~ Sep. 22, 2017 Sep. 25, 2017 BTL Inc.
Testing Engineer	: Shawn Xiao)
Technical Manager	: David Mao (David Mao)
Authorized Signator	ry: Seenen lu

## BTL INC.

(Steven Lu)

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Report No.: BTL-FCCP-2-1708C076 Page 1 of 115





#### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

#### Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: BTL-FCCP-2-1708C076 Page 2 of 115





Table of Contents	Page
1. CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTI	ED 12
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP 4.1.5 EUT OPERATING CONDITIONS	14 14
4.1.6 EUT TEST CONDITIONS	14
4.1.7 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 RADIATED EMISSION LIMITS	15
4.2.2 TEST PROCEDURE 4.2.3 DEVIATION FROM TEST STANDARD	16 16
4.2.3 DEVIATION FROM TEST STANDARD 4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 EUT TEST CONDITIONS	18
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	18
4.2.8 TEST RESULTS (30MHZ TO 1000MHZ) 4.2.9 TEST RESULTS (ABOVE 1000MHZ)	18 18
5 . BANDWIDTH TEST	19
5.1 APPLIED PROCEDURES	19
5.1.1 TEST PROCEDURE	19
5.1.2 DEVIATION FROM STANDARD	19
5.1.3 TEST SETUP	19 10
5.1.4 EUT OPERATION CONDITIONS 5.1.5 EUT TEST CONDITIONS	19 19
5.1.6 TEST RESULTS	19
6 . MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST	20

Report No.: BTL-FCCP-2-1708C076





Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT 6.1.1 TEST PROCEDURE 6.1.2 DEVIATION FROM STANDARD 6.1.3 TEST SETUP 6.1.4 EUT OPERATION CONDITIONS 6.1.5 EUT TEST CONDITIONS 6.1.6 TEST RESULTS	20 20 20 20 20 20 20
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	21
7.1 APPLIED PROCEDURES / LIMIT 7.1.1 TEST PROCEDURE 7.1.2 DEVIATION FROM STANDARD 7.1.3 TEST SETUP 7.1.4 EUT OPERATION CONDITIONS 7.1.5 EUT TEST CONDITIONS 7.1.6 TEST RESULTS	21 21 21 21 21 21 21
8 . POWER SPECTRAL DENSITY TEST	22
8.1 APPLIED PROCEDURES / LIMIT 8.1.1 TEST PROCEDURE 8.1.2 DEVIATION FROM STANDARD 8.1.3 TEST SETUP 8.1.4 EUT OPERATION CONDITIONS 8.1.5 EUT TEST CONDITIONS 8.1.6 TEST RESULTS	22 22 22 22 22 22 22 22
9 . MEASUREMENT INSTRUMENTS LIST	23
10 . EUT TEST PHOTO	25
APPENDIX A - CONDUCTED EMISSION	29
APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)	32
APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)	37
APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)	44
APPENDIX E - BANDWIDTH	81
APPENDIX F - MAXIMUM PEAK CONDUCTED OUTPUT POWER	88
APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION	90
APPENDIX H - POWER SPECTRAL DENSITY	109

Report No.: BTL-FCCP-2-1708C076





## **REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-FCCP-2-1708C076	Original Issue.	Sep. 25, 2017

Report No.: BTL-FCCP-2-1708C076 Page 5 of 115





#### 1. CERTIFICATION

Equipment : BT Speaker, Internet Radio

Brand Name: KAPSCH Test Model: KAPSCH-H

Series Model: KAPSCH CAPRI 125 PLUS

Applicant : Guangzhou Rayer Acoustic Technology Co.,Ltd Manufacturer : Guangzhou Rayer Acoustic Technology Co.,Ltd

Address : 520.192 Kezhu Road, Guangzhou science park, Guangdong province

Factory : 1# Guangzhou Singulargold Electronics Co.Ltd

2# Dah Dyi Audio Equipment Co., Ltd.

3# DongGuanHuaZhuang Electronics Co.,LTD

Address : 1# NO.6 LianhuayanRoad,Sciencepark,guangZhou,China

2# Jin San Jiao Ind. Zone, Shi Bu Village, Liao Bu Town, Dong Guan City,

Guang Dong Province, China

3# NO.3 Sanjiang Industrial Zone. Hengli Town, Dongguan City, Guangdong

Province, China

Date of Test : Aug. 04, 2017 ~ Sep. 22, 2017

Test Sample: Engineering Sample

Standard(s) : FCC Part15, Subpart C:(15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1708C076) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: BTL-FCCP-2-1708C076 Page 6 of 115





## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247), Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(b)(3)	Peak Output Power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS	

#### NOTE:

(1)" N/A" denotes test is not applicable in this test report.

Report No.: BTL-FCCP-2-1708C076 Page 7 of 115





#### 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385 Designation number for FCC: CN5020

#### 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U<sub>cispr</sub> requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

#### A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

#### B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
		9KHz~30MHz	V	3.79
		9KHz~30MHz	Н	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	Н	3.78
DG-CB03	CISPR	200MHz ~ 1,000MHz	V	4.10
DG-CB03	CISER	200MHz ~ 1,000MHz	Н	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	Н	3.68
			18GHz~40GHz	V
		18GHz~40GHz	Н	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

Report No.: BTL-FCCP-2-1708C076 Page 8 of 115





## 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	BT Speaker, Internet Radio			
Brand Name	KAPSCH	KAPSCH		
Test Model	KAPSCH-H			
Series Model	KAPSCH CAPRI 125 PLU	JS		
Model Difference	Only differ in the model na	ame and color.		
	Operation Frequency	2412~2462 MHz		
Product Description	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM		
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 150 Mbps		
	Output Power (Max.)	802.11b: 10.74dBm 802.11g: 22.47dBm 802.11n(20MHz): 18.81dBm		
Power Source	DC Voltage supplied from AC/DC adapter. Brand / Model: FLYPOWER / PS30D180K1000UD			
Power Rating	I/P: 100-240V~ 50/60Hz 800mA O/P: 18.0V==1000mA			

#### Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

#### 2. Channel List:

	CH01 - CH11 for 802.11b, 802.11g, 802.11n(20MHz)						
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	80	2447	11	2462
03	2422	06	2437	09	2452		

#### 3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	KAPSCH	N/A	PCB	N/A	4	N/A

.

Report No.: BTL-FCCP-2-1708C076





#### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	Normal Link

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

	For Conducted Test
Final Test Mode	Description
Mode 5	Normal Link

For Radiated Test		
Final Test Mode	Description	
Mode 1	TX B MODE CHANNEL 01/06/11	
Mode 2	TX G MODE CHANNEL 01/06/11	
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11	

For Band Edge Test		
Final Test Mode	Description	
Mode 1	TX B MODE CHANNEL 01/06/11	
Mode 2	TX G MODE CHANNEL 01/06/11	
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11	

Report No.: BTL-FCCP-2-1708C076 Page 10 of 115





6dB Spectrum Bandwidth		
Final Test Mode Description		
Mode 1	TX B MODE CHANNEL 01/06/11	
Mode 2	TX G MODE CHANNEL 01/06/11	
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11	

Maximum Conducted Output Power		
Final Test Mode	Description	
Mode 1	TX B MODE CHANNEL 01/06/11	
Mode 2	TX G MODE CHANNEL 01/06/11	
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11	

Power Spectral Density		
Final Test Mode	Description	
Mode 1	TX B MODE CHANNEL 01/06/11	
Mode 2	TX G MODE CHANNEL 01/06/11	
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11	

#### Note:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps) 802.11g mode: OFDM (6Mbps)
  - 802.11n HT20 mode: BPSK (6.5Mbps)
  - For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

Report No.: BTL-FCCP-2-1708C076 Page 11 of 115






#### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	N/A		
Frequency (MHz)	2412	2437	2462
802.11b	N/A	N/A	N/A
802.11g	N/A	N/A	N/A
802.11n (20MHz)	N/A	N/A	N/A

#### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



## 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	No	YES	1.0M	DC CABLE

Report No.: BTL-FCCP-2-1708C076 Page 12 of 115





#### 4. EMC EMISSION TEST

#### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Fraguency of Emission (MHz)	Conducted Limit (dBµV)		
Frequency of Emission (MHz)	Quasi-peak	Average	
0.15 -0.50	66 to 56*	56 to 46*	
0.50 -5.0	56	46	
5.0 -30.0	60	50	

#### Note:

(1) The limit of " \* " decreases with the logarithm of the frequency

(2) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use) Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e For the actual test configuration, please refer to the related Item -EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD


No deviation

Report No.: BTL-FCCP-2-1708C076 Page 13 of 115





#### 4.1.4 TEST SETUP

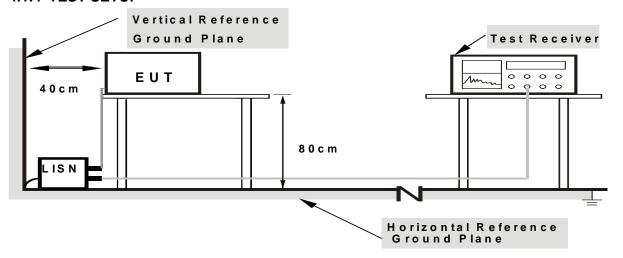

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was placed on the test table and programmed in normal function.

#### **4.1.6 EUT TEST CONDITIONS**

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

#### 4.1.7 TEST RESULTS

Please refer to the Appendix A.

Report No.: BTL-FCCP-2-1708C076





Page 15 of 115

#### 4.2 RADIATED EMISSION MEASUREMENT

#### 4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)		
r requericy (Wiriz)	PEAK	AVERAGE	
Above 1000	74	54	

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use) Margin Level = Measurement Value - Limit Value

Report No.: BTL-FCCP-2-1708C076





Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW	1MHz / 3MHz for Peak,
(Emission in restricted band)	1MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency 110KHz~490KHz for PK/AVG detector	
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

#### **4.2.2 TEST PROCEDURE**

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD

No deviation


Report No.: BTL-FCCP-2-1708C076 Page 16 of 115






#### 4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

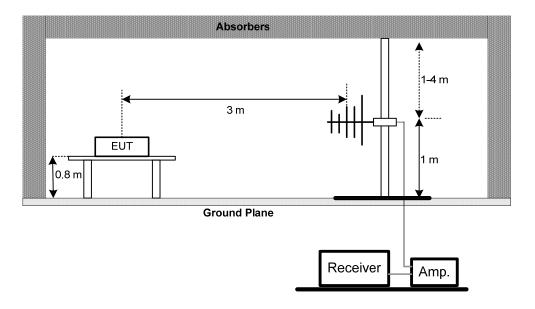

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

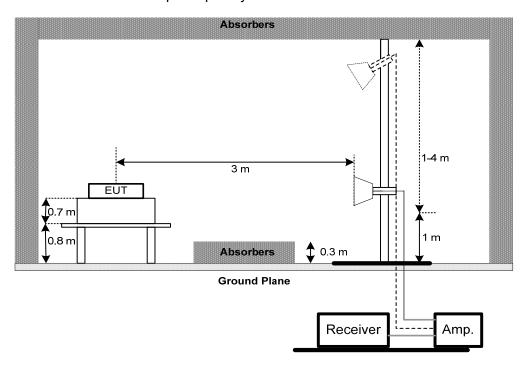


Report No.: BTL-FCCP-2-1708C076 Page 17 of 115





#### (C) For Radiated Emissions Below 30MHz

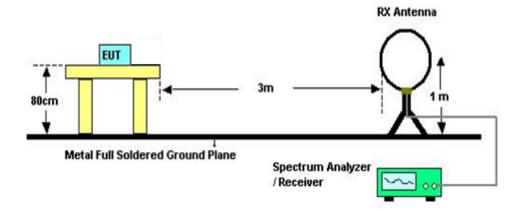

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

#### 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B

#### Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### **4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)**

Please refer to the Appendix C.

#### 4.2.9 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the Appendix D.

#### Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

Report No.: BTL-FCCP-2-1708C076 Page 18 of 115





#### 5. BANDWIDTH TEST

#### **5.1 APPLIED PROCEDURES**

FCC Part15 (15.247) , Subpart C					
Section Test Item Frequency Range (MHz) Result					
15.247(a)(2)	Bandwidth	2400-2483.5	PASS		

#### **5.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

#### **5.1.2 DEVIATION FROM STANDARD**

No deviation.

#### 5.1.3 TEST SETUP

EUT	•	SPECTRUM
		ANALYZER

#### **5.1.4 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

#### **5.1.5 EUT TEST CONDITIONS**

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

#### **5.1.6 TEST RESULTS**

Please refer to the Appendix E.

Report No.: BTL-FCCP-2-1708C076 Page 19 of 115





#### 6. MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST

#### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247), Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS	

#### **6.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP

EUT	Power Meter
	1 OWEL MICKEL

#### **6.1.4 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

#### **6.1.5 EUT TEST CONDITIONS**

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

#### 6.1.6 TEST RESULTS

Please refer to the Appendix F.

Report No.: BTL-FCCP-2-1708C076 Page 20 of 115





#### 7. ANTENNA CONDUCTED SPURIOUS EMISSION

#### 7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


#### 7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.
- c. Offset=antenna gain+cable loss

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP



#### 7.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

#### 7.1.6 TEST RESULTS

Please refer to the Appendix G.

Report No.: BTL-FCCP-2-1708C076 Page 21 of 115





#### 8. POWER SPECTRAL DENSITY TEST

#### 8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247), Subpart C					
Section Test Item Limit Frequency Range (MHz) Result					
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS	

#### **8.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

#### **8.1.2 DEVIATION FROM STANDARD**

No deviation.

#### 8.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

#### **8.1.4 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

#### **8.1.5 EUT TEST CONDITIONS**

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

#### 8.1.6 TEST RESULTS

Please refer to the Appendix H.

Report No.: BTL-FCCP-2-1708C076 Page 22 of 115





## 9. MEASUREMENT INSTRUMENTS LIST

	Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018	
2	LISN	EMCO	3816/2	52765	Mar. 26, 2018	
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 26, 2018	
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018	
5	Cable	N/A	RG223	12m	Oct. 20, 2017	
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A	

	Radiated Emission Below 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018	
2	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017	
3	Receiver	Agilent	N9038A	MY52130039	Sep. 03, 2018	
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	Jun. 26, 2018	
5	Controller	CT	SC100	N/A	N/A	
6	Controller	MF	MF-7802	MF780208416	N/A	
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A	

	Radiated Emission Above 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 26, 2018	
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 08, 2018	
3	Amplifier	Agilent	8449B	3008A02274	May. 16, 2018	
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018	
5	Receiver	Agilent	N9038A	MY52130039	Sep. 03, 2018	
6	Antenna	EM	EM-6876-1	230	Jul. 07, 2018	
7	Controller	СТ	SC100	N/A	N/A	
8	Controller	MF	MF-7802	MF780208416	N/A	
9	Cable	emci	EMC104-SM-SM-1 2000(12m)	N/A	Jun. 26, 2018	
10	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A	

Report No.: BTL-FCCP-2-1708C076 Page 23 of 115





	6dB Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	R&S	FSP40	100185	Sep. 03, 2018	

	Peak Output Power										
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until						
1	Power Meter	ANRITSU	ML2495A	1128009	Mar. 26, 2018						
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 26, 2018						

	Antenna Conducted Spurious Emission									
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until					
1	Spectrum Analyzer	R&S	FSP40	100185	Sep. 03, 2018					

	Power Spectral Density									
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until					
1	Spectrum Analyzer	R&S	FSP40	100185	Sep. 03, 2018					

Remark: "N/A" denotes no model name, serial no. or calibration specified.


All calibration period of equipment list is one year.

Report No.: BTL-FCCP-2-1708C076 Page 24 of 115





## **10. EUT TEST PHOTO**








Report No.: BTL-FCCP-2-1708C076 Page 25 of 115






## **Radiated Measurement Photos**





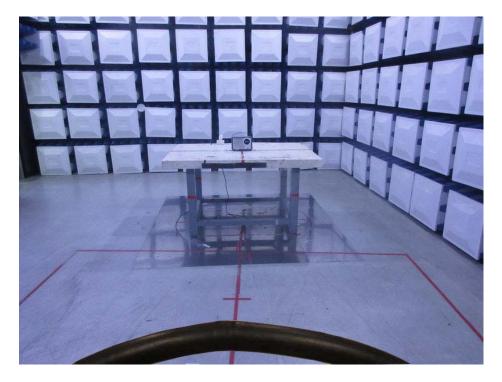


Report No.: BTL-FCCP-2-1708C076 Page 26 of 115






## **Radiated Measurement Photos**



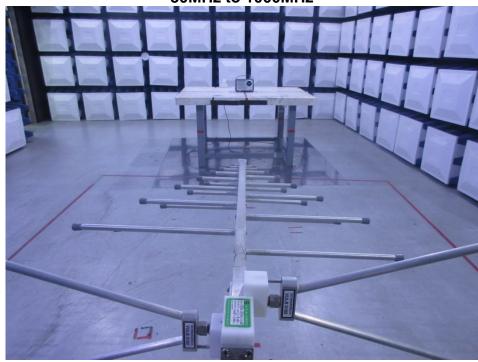

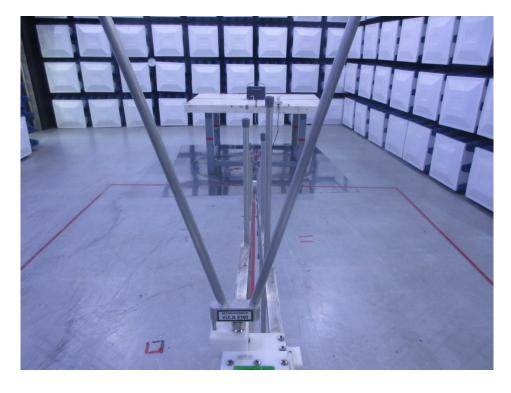


Report No.: BTL-FCCP-2-1708C076 Page 27 of 115






## **Radiated Measurement Photos**



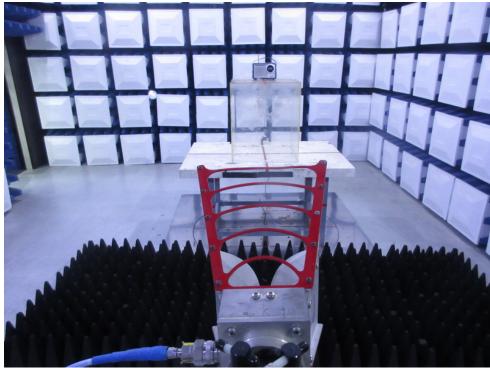

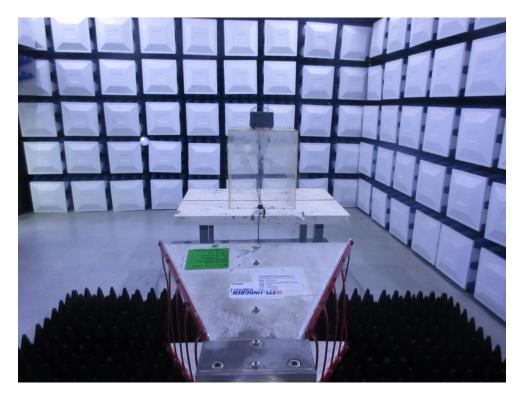

Report No.: BTL-FCCP-2-1708C076 Page 28 of 115





A	PPENDIX A - CONDUCTED EMISSION


Report No.: BTL-FCCP-2-1708C076 Page 29 of 115





Test Mode : Normal Link

## Line

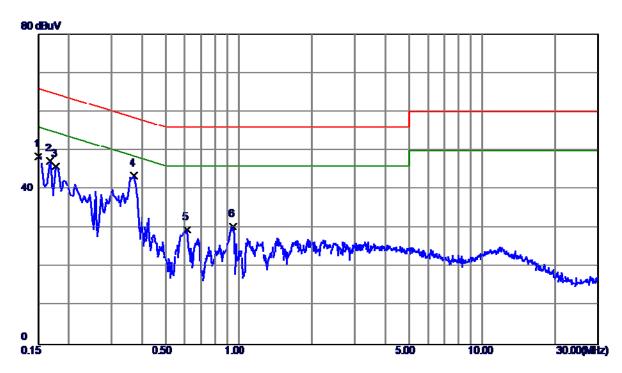

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1500	38.70	9. 79	48.49	66.00	-17.51	Peak	
2	0.1680	37. 52	9. 78	47.30	65.06	-17. 76	Peak	
3	0.1770	36.08	9. 78	45.86	64.63	-18.77	Peak	
4 *	0.3704	33.67	9. 79	43.46	58.49	-15. 03	Peak	
5	0.6134	19.82	9.81	29.63	56.00	-26. 37	Peak	
6	0.9465	20.61	9.85	30.46	56.00	-25.54	Peak	


Report No.: BTL-FCCP-2-1708C076 Page 30 of 115





Test Mode : Normal Link

## Neutral

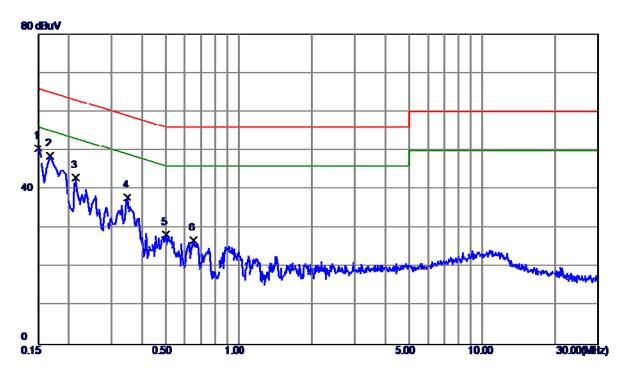

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	d₿	Detector	Comment
1 *	0.1500	40.90	9. 68	5 <b>0</b> . 58	66.00	-15.42	Peak	
2	0.1680	38. 91	9. 68	48. 59	65.06	-16. 47	Peak	
3	0.2130	33. 38	9. 69	43.07	63.09	-20.02	Peak	
4	0.3480	28. 22	9. 70	37.92	59.01	-21. 09	Peak	
5	0.5010	1 <b>8.</b> 5 <b>9</b>	9. 70	28. 29	56.00	-27.71	Peak	
6	0.6495	17. 11	9.71	26.82	56.00	-29. 18	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 31 of 115






APPENDIX B - R	ADIATED EMISSION (9KHZ TO 30MHZ)

Report No.: BTL-FCCP-2-1708C076 Page 32 of 115





## Ant 0°

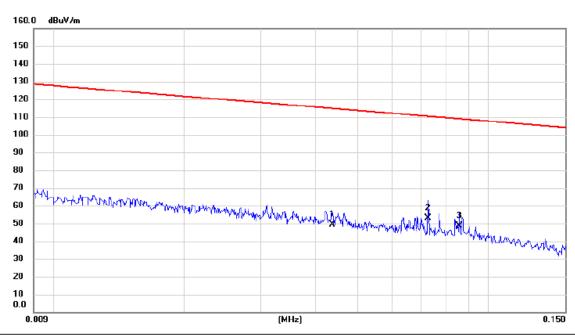


No. Mk.	Freq.		Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.0437	30.47	18.91	49.38	114.80	-65.42	AVG	
2 *	0.0726	34.86	18.28	53.14	110.39	-57.25	AVG	
3	0.0857	30.69	17.97	48.66	108.95	-60.29	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 33 of 115





## Ant 0°

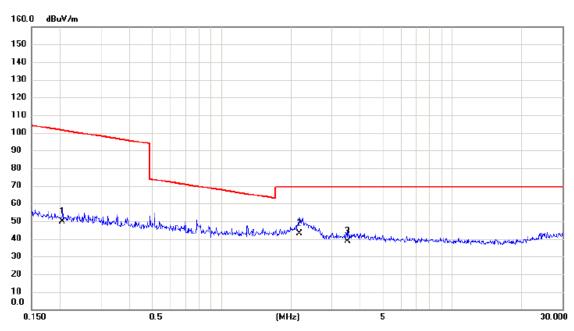


No. Mk.	Freq.		Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.2040	32.85	16.79	49.64	101.41	-51.77	AVG	
2 *	2.1783	27.45	15.46	42.91	69.54	-26.63	QP	
3	3.5278	23.69	15.08	38.77	69.54	-30.77	QP	

Report No.: BTL-FCCP-2-1708C076 Page 34 of 115





#### Ant 90°

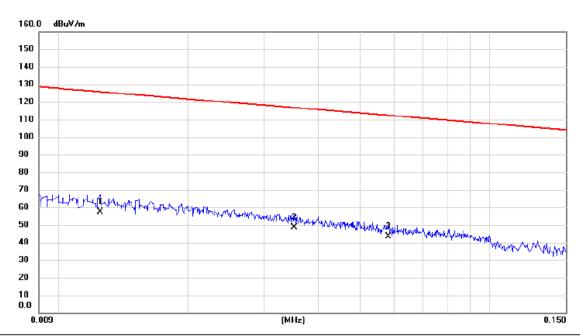


MHz dBuV dB dBuV/m dBuV/m dB Detector Comment	
1 0.0125 36.89 20.59 57.48 125.67 -68.19 AVG	
2 * 0.0352 29.35 19.16 48.51 116.67 -68.16 AVG	
3 0.0581 24.69 18.57 43.26 112.32 -69.06 AVG	

Report No.: BTL-FCCP-2-1708C076 Page 35 of 115





## Ant 90°

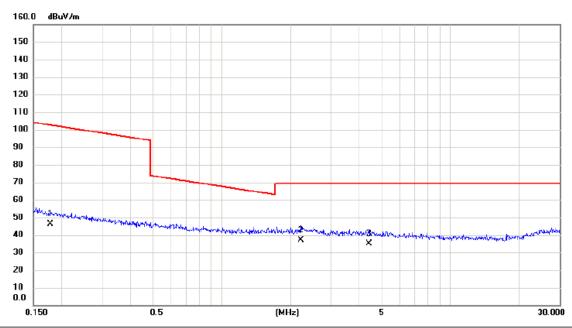

No. Mk.	Freq.			Measure- ment		Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.1787	29.45	16.86	46.31	102.56	-56.25	AVG	
2 *	2.2250	21.56	15.44	37.00	69.54	-32.54	QP	
3	4.4071	20.34	14.72	35.06	69.54	-34.48	QP	

Report No.: BTL-FCCP-2-1708C076 Page 36 of 115






APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Report No.: BTL-FCCP-2-1708C076 Page 37 of 115





# Vertical

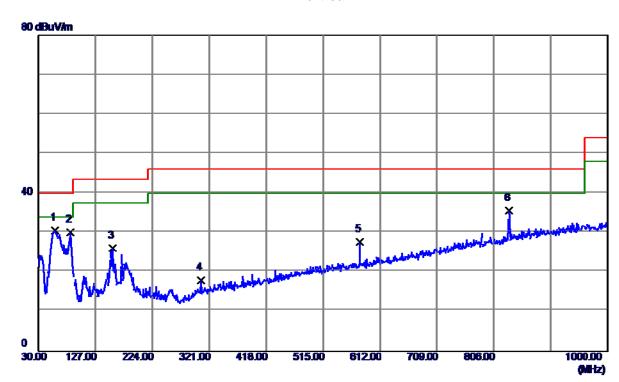


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	$d\mathbf{B}$	Detector	Comment
1 *	58. 1300	44.64	-14. 13	30. 51	40.00	-9.49	Peak	
2	84. 3200	48. 39	-18. 37	30.02	40.00	-9. 98	Peak	
3	156. 1000	39. 26	-13. 16	26. 10	43.50	-17.40	Peak	
4	307.4200	30.65	-12.70	17.95	46.00	-28.05	Peak	
5	577. 0800	34. 64	-7.01	27.63	46.00	-18. 37	Peak	
6	832. 1900	35. 96	-0.48	35. 48	46.00	-10. 52	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 38 of 115





# Horizontal

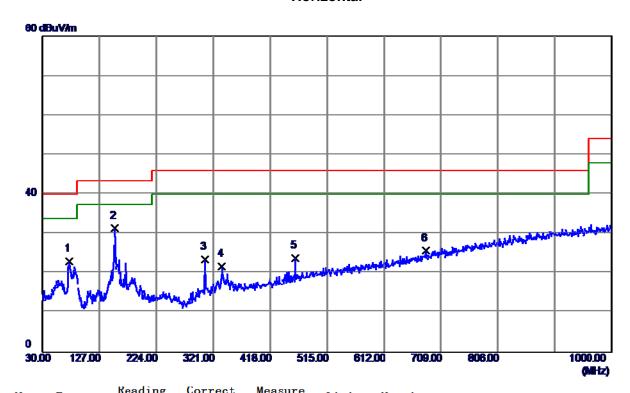


No.	Freq.	Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	$d\mathbf{B}$	Detector	Comment
1	75. 5899	40. 24	-17. 22	23. 02	40.00	-16. 98	Peak	
2 *	153. 1900	44. 78	-13. 34	31.44	43.50	-12.06	Peak	
3	307.4200	36. 19	-12.70	23. 49	46.00	-22. 51	Peak	
4	335. 5500	33. 90	-12. 21	21. 69	46.00	-24. 31	Peak	
5	460.6800	33. 47	-9. 68	23. 79	46.00	-22. 21	Peak	
6	682.8100	30. 15	-4. 47	25. 68	46.00	-20. 32	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 39 of 115





# **Vertical**

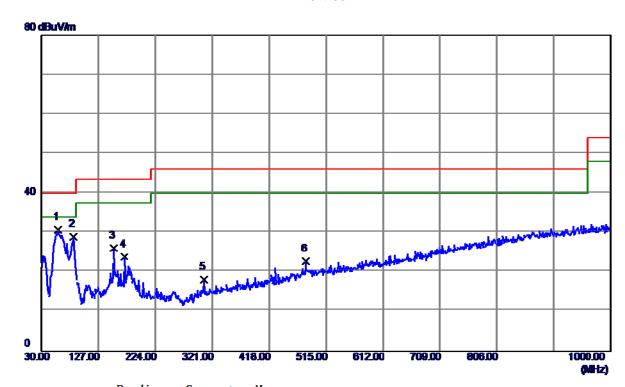


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	$d\mathbf{B}$	Detector	Comment
1 *	58. 1300	44.88	-14. 13	30. 75	40.00	-9. 25	Peak	
2	84. 3200	47. 38	-18. 37	29. 01	40.00	-10. 99	Peak	
3	153. 1900	39. 43	-13. 34	26. 09	43.50	-17.41	Peak	
4	171.6200	36. 07	-12. 29	23. 78	43.50	-19.72	Peak	
5	307.4200	30. 84	-12.70	18. 14	46.00	-27.86	Peak	
6	480. 0800	31. 98	-9. 21	22.77	46.00	-23. 23	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 40 of 115





# Horizontal

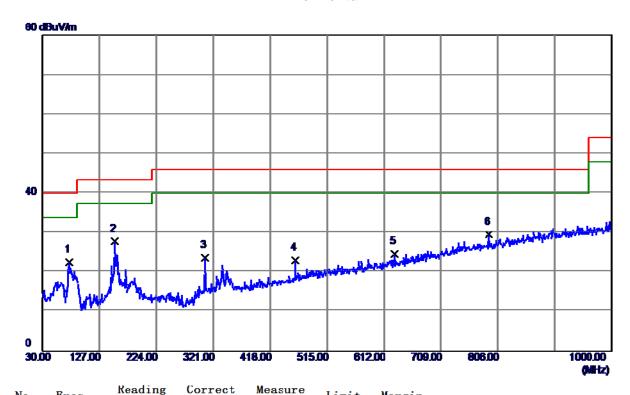


No.	Freq.	Level	Factor	measure	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	$d\mathbf{B}$	Detector	Comment
1	75. 5899	39. 73	-17. 22	22. 51	40.00	-17. 49	Peak	
2 *	153. 1900	41. 17	-13. 34	27.83	43.50	-15. 67	Peak	
3	307. 4200	36. 39	-12.70	23.69	46.00	-22. 31	Peak	
4	460. 6800	32.67	-9. 68	22. 99	46.00	-23.01	Peak	
5	630. 4300	30. 53	-5. 84	24.69	46.00	-21. 31	Peak	
6	790. 4800	31. 11	-1. 57	29. 54	46.00	-16. 46	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 41 of 115





# Vertical

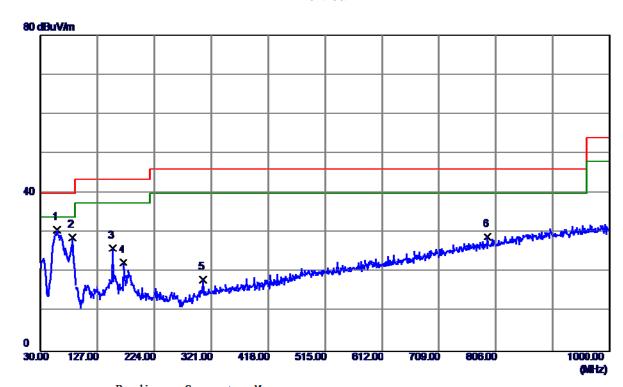


No.	Freq.	Keading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	58. 1300	44.88	-14. 13	30. 75	40.00	-9. 25	Peak	
2	84. 3200	47. 12	-18. 37	28. 75	40.00	-11. 25	Peak	
3	153. 1900	39. 43	-13. 34	26. 09	43.50	-17.41	Peak	
4	171.6200	34. 66	-12. 29	22. 37	43.50	-21. 13	Peak	
5	307.4200	30. 84	-12.70	18. 14	46.00	-27.86	Peak	
6	792. 4200	30. 48	-1.52	28. 96	46.00	-17.04	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 42 of 115





# Horizontal

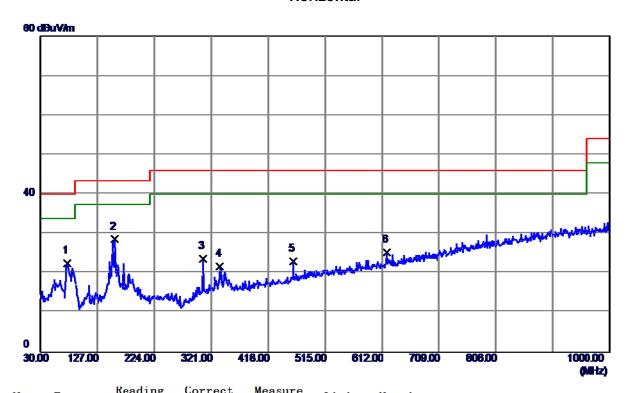

No.	Freq.	Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	$d\mathbf{B}$	Detector	Comment
1	75. 5899	39. 81	-17. 22	22. 59	40.00	-17.41	Peak	
2 *	156. 1000	41.74	-13. 16	28. 58	43.50	-14.92	Peak	
3	307.4200	36. 39	-12.70	23.69	46.00	-22. 31	Peak	
4	335. 5500	33. 92	-12. 21	21.71	46.00	-24. 29	Peak	
5	460.6800	32. 67	-9. 68	22. 99	46.00	-23.01	Peak	
6	620.7300	31. 31	-6. 03	25. 28	46.00	-20.72	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 43 of 115






APPENDIX D - F	RADIATED EMISSION (ABOVE 1000MHZ)

Report No.: BTL-FCCP-2-1708C076 Page 44 of 115





# Vertical

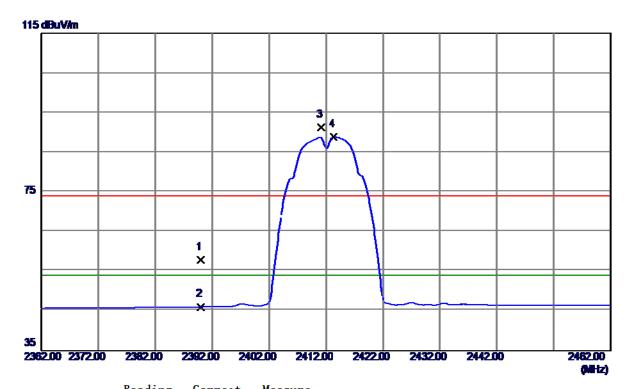


No.	Freq.	Keading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	24. 90	33. 06	57.96	74.00	-16.04	Peak	
2	2390, 0000	13.06	33.06	46. 12	54.00	-7.88	AVG	
3	2411. 1000	58. 14	33. 14	91.28	74.00	17. 28	Peak	No Limit
4 *	2413. 3000	55. 76	33. 14	88.90	54.00	34. 90	AVG	No Limit

Report No.: BTL-FCCP-2-1708C076 Page 45 of 115





## **Vertical**

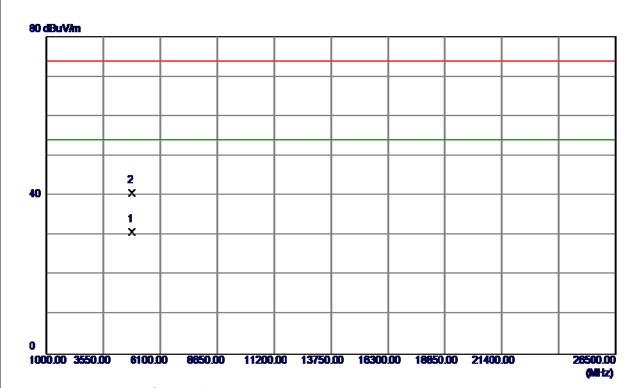


No.	Freq.	Keading Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4823. 9800	24. 52	6. 32	30.84	54.00	-23. 16	AVC	
2	4826. 9400	34. 35	6. 32	40.67	74.00	-33. 33	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 46 of 115





## Horizontal

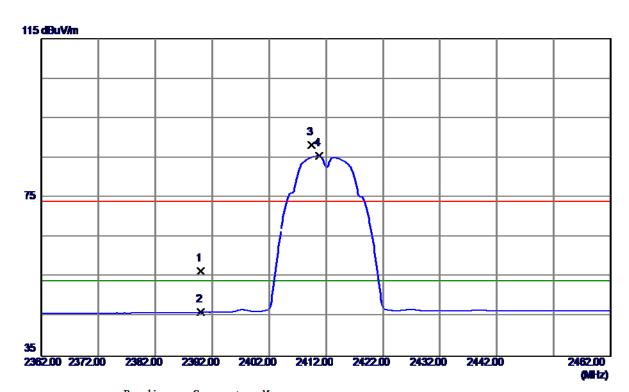


No.	Freq.	Reading Level	Correct Factor	Mcasurc ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	23. 33	33. 06	56. 39	74.00	-17.61	Peak	
2	2390.0000	13. 07	33. 06	46. 13	54.00	-7.87	AVG	
3	2409. 4000	<b>55. 07</b>	33. 13	88. 20	74.00	14. 20	Peak	No Limit
4 *	2410.8000	52. 37	33. 13	85. 50	54.00	31. 50	AVG	No Limit

Report No.: BTL-FCCP-2-1708C076 Page 47 of 115





## Horizontal

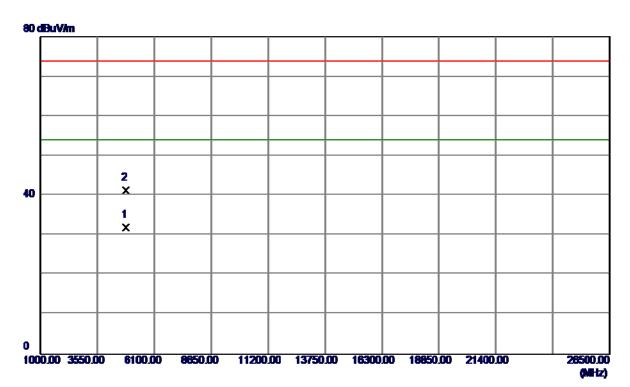


No.	Freq.	Reading Level	Correct Factor	Mcasurc ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4823. 9300	25. 66	6. 32	31.98	54.00	<b>-22. 02</b>	AVC	
2	4824. 1600	34. 95	6. 32	41.27	74.00	-32.73	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 48 of 115





# Vertical

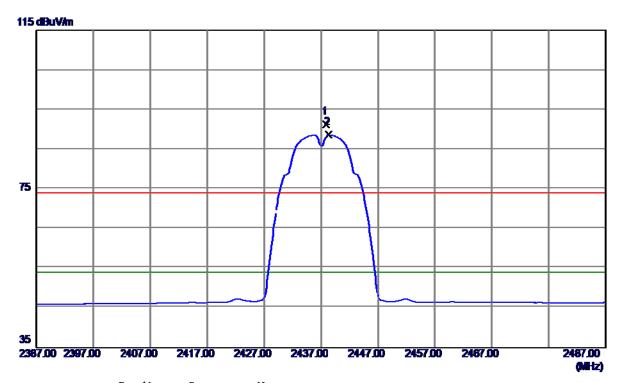


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2437.9000	58. <b>10</b>	33. 24	91.34	74.00	17.34	Peak	No Limit
2 *	2438. 3000	55. 44	33. 24	88.68	54.00	34.68	AVG	No Limit

Report No.: BTL-FCCP-2-1708C076 Page 49 of 115





## **Vertical**

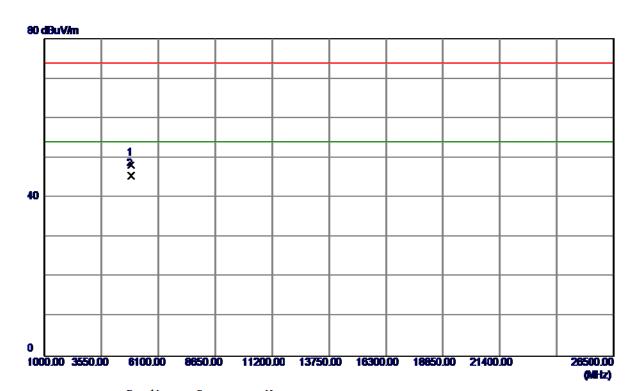


No.	Freq.	Keading Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4873.9900	41.66	6. 44	48.10	74.00	-25.90	Peak	
2 *	4873.9900	39. 04	6. 44	45.48	54.00	-8. 52	AVG	
	10.0.000	00.01	0. 11	10. 10	01.00	0.02	11.0	

Report No.: BTL-FCCP-2-1708C076 Page 50 of 115





## Horizontal

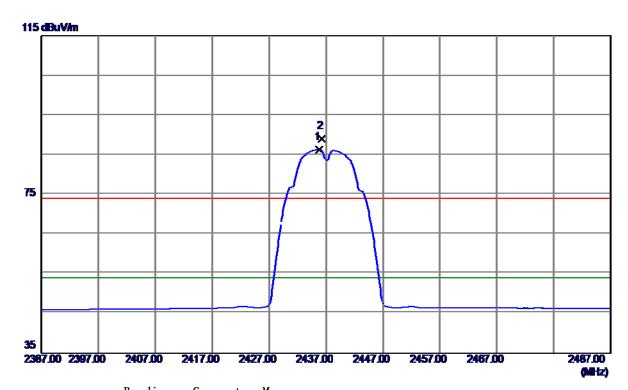


No.	Freq.	Reading Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2435.8000	53. 18	33. 23	86.41	54.00	32.41	AVC	No Limit
2	2436. 2000	55. 83	33. 23	89.06	74.00	15.06	Peak	No Limit

Report No.: BTL-FCCP-2-1708C076 Page 51 of 115





## Horizontal

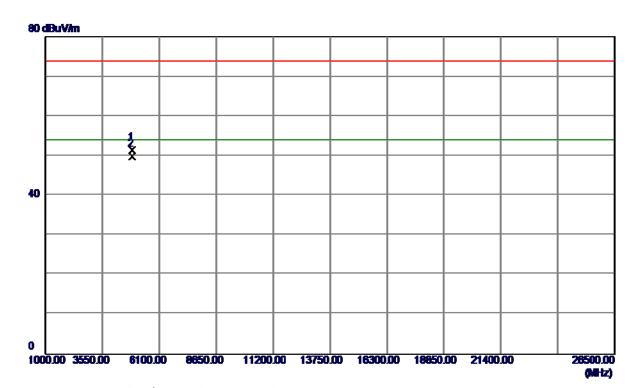


No.	Freq.	Reading Level	Factor	Mcasurc ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4873.9300	45.07	6. 44	51.51	74.00	-22.49	Peak	
2 *	4873.9600	43. 50	6. 44	49.94	54.00	-4.06	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 52 of 115





# Vertical

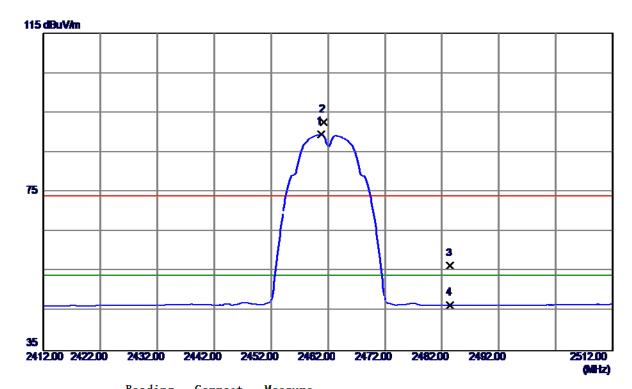


No.	Freq.	Keading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2460.8000	56. 18	33. 32	89. 50	54.00	35. 50	AVG	No Limit
2	2461. 2000	59. 30	33. 32	92.62	74.00	18.62	Peak	No Limit
3	2483. 5000	23. 03	33. 41	56.44	74.00	-17. 56	Peak	
4	2483. 5000	13. 07	33.41	46.48	54.00	-7.52	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 53 of 115





## Vertical

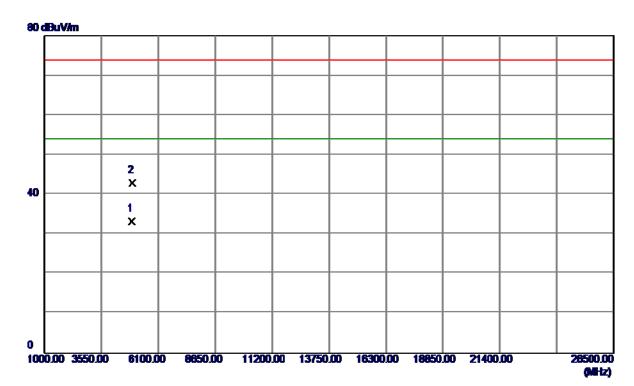


No.	Freq.	Reading Level	Correct Factor	Mcasurc ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4923. 9720	26.65	6. 57	33. 22	<b>54.00</b>	-20.78	AVG	
2	4924. 2620	36. 35	6. 57	42.92	74.00	-31. 08	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 54 of 115





## Horizontal

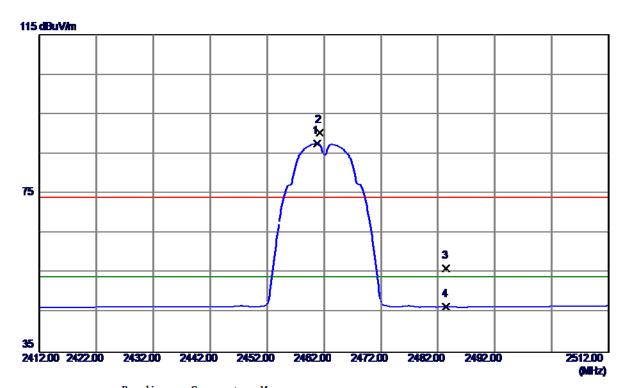


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2460.8000	54.34	33. 32	87.66	54.00	33.66	AVC	No Limit
2	2461. 2000	<b>57.01</b>	33. 32	90.33	74.00	16. 33	Peak	No Limit
3	2483. 5000	22.77	33.41	56. 18	74.00	-17.82	Peak	
4	2483. 5000	13. 06	33. 41	46.47	54.00	-7.53	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 55 of 115





## Horizontal

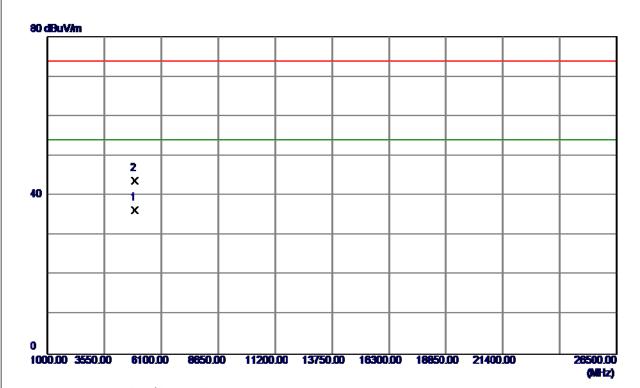


No.	Freq.	Keading Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4924. 0019	29. 73	6. 57	36. 30	54.00	-17.70	AVC	
2	4924. 1080	37.08	6. 57	43.65	74.00	-30. 35	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 56 of 115





# Vertical

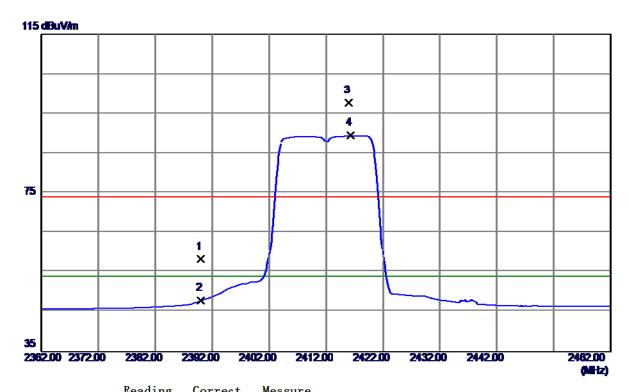


No.	Freq.	Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390. 0000	25. 37	33. 06	58.43	74.00	-15. 57	Peak	
2	2390, 0000	14.83	33.06	47.89	54.00	-6. 11	AVG	
3	2416. 0000	64. 57	33. 15	97.72	74.00	23.72	Peak	No Limit
4 *	2416. 3000	56. 32	33. 16	89.48	54.00	35. 48	AVG	No Limit

Report No.: BTL-FCCP-2-1708C076 Page 57 of 115





## **Vertical**

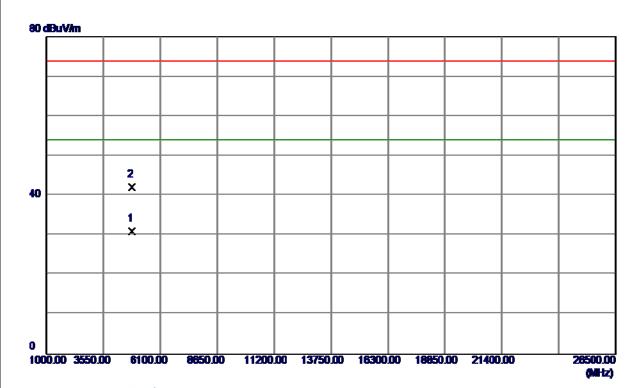


No.	Freq.	Keading Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4823.7350	24. 78	6. 32	<b>31.</b> 1 <b>0</b>	<b>54.00</b>	-22.90	AVG	
2	4825. 5750	35. 83	6. 32	<b>42.</b> 15	74.00	-31.85	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 58 of 115





## Horizontal

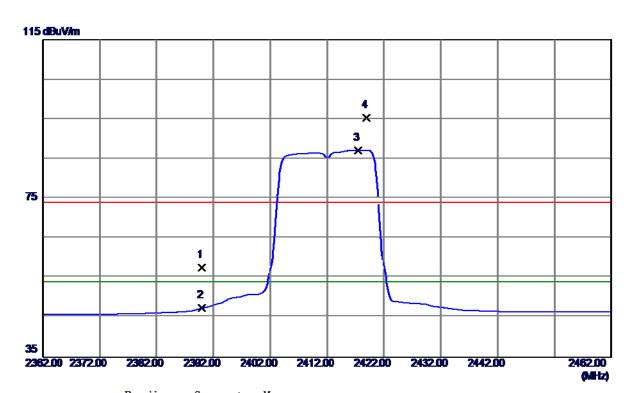


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390. 0000	24. 51	33. 06	57. 57	74.00	-16. 43	Peak	
2	2390.0000	14. 35	33.06	47.41	54.00	-6. 59	AVG	
3 *	2417.4000	54.06	33. 16	87. 22	54.00	33. 22	AVG	No Limit
4	2418.9000	62. 13	33. 16	95. 29	74.00	21. 29	Peak	No Limit

Report No.: BTL-FCCP-2-1708C076 Page 59 of 115





## Horizontal

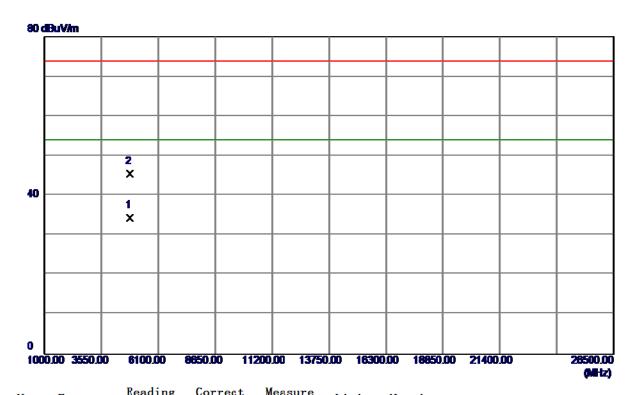


No.	Freq.	Keading Level	Correct Factor	measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4823.9500	28. 07	6. 32	34.39	<b>54.00</b>	-19.61	AVG	
2	4824. 2700	39. 13	6. 32	45.45	74.00	-28.55	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 60 of 115





# Vertical

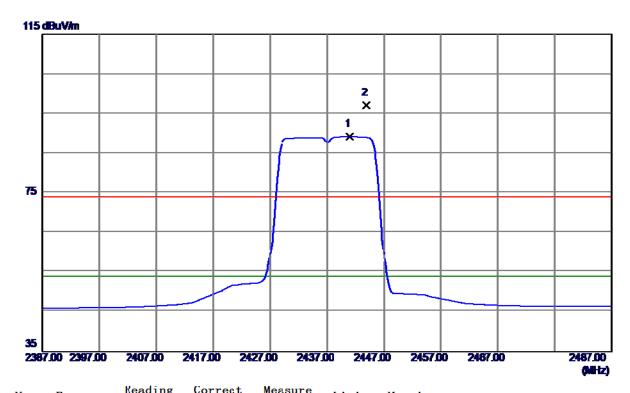


No.	Freq.	Level	Factor	measure	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2441.0000	55. 98	33. 25	89.23	54.00	35. 23	AVG	No Limit
2	2443. 9000	63.86	33. 26	97.12	74.00	23. 12	Peak	No Limit
	2443. 9000	03.00	33. Z0	91.12	14.00	23. 12	геак	NO L

Report No.: BTL-FCCP-2-1708C076 Page 61 of 115





## **Vertical**

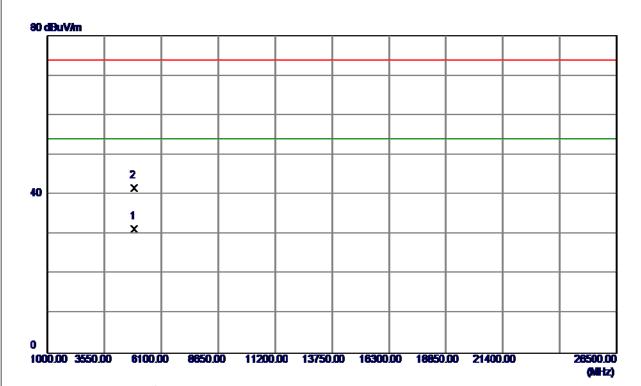


No.	Freq.	Keading Level	Correct Factor	Measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4873.9550	24.85	6. 44	31.29	<b>54.00</b>	-22.71	AVG	
2	4876. 1300	35. 08	6. 45	41.53	74.00	-32.47	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 62 of 115





## Horizontal

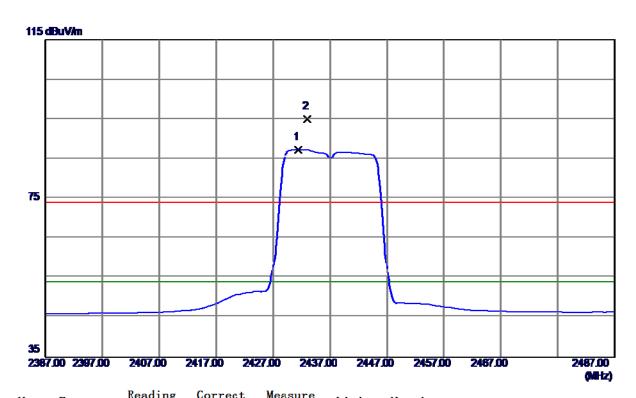


No.	Freq.	Keading Level	Correct Factor	measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2431. 4000	54. 14	33. 21	87.35	54.00	33. 35	AVG	No Limit
2	2433. 0000	61.83	33. 22	95.05	74.00	21.05	Peak	No Limit

Report No.: BTL-FCCP-2-1708C076 Page 63 of 115





## Horizontal

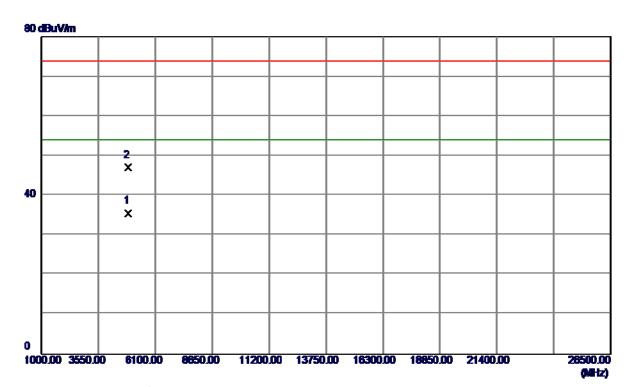


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4874. 0000	29. 14	6. 44	35. 58	54.00	-18.42	AVG	
2	4876. 3250	40. 65	6. 45	47.10	74.00	-26. 90	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 64 of 115





# Vertical

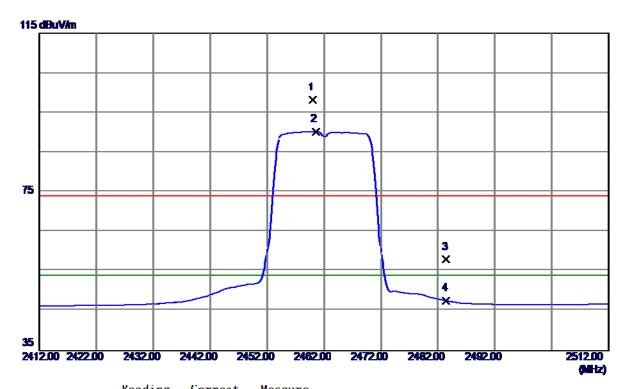

No.	Freq.	keading Level	Correct Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2460.0000	64.87	33. 32	98. 19	74.00	24. 19	Peak	No Limit
2 *	2460. 5000	56.88	33. 32	90.20	54.00	36. 20	AVG	No Limit
3	2483. 5000	24. 59	33.41	58.00	74.00	-16.00	Peak	
4	2483. 5000	14. 29	33. 41	47.70	54.00	-6. 30	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 65 of 115





## **Vertical**




No.	Freq.	Keading Level	Factor	measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4924.0750	27. 31	6. 57	33.88	<b>54.00</b>	-20. 12	AVG	
2	4926. 1950	39. 09	6. 57	45.66	74.00	-28. 34	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 66 of 115





## Horizontal

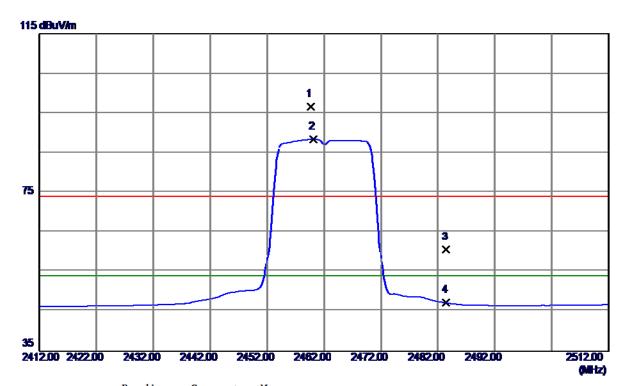


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2459.7000	63. 22	33. 32	96. 54	74.00	22. 54	Peak	No Limit
2 *	2460. 1000	55. 13	33. 32	88.45	54.00	34.45	AVG	No Limit
3	2483. 5000	27. 15	33.41	60.56	74.00	-13.44	Peak	
4	2483. 5000	13. 85	33.41	47.26	54.00	-6.74	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 67 of 115





## Horizontal

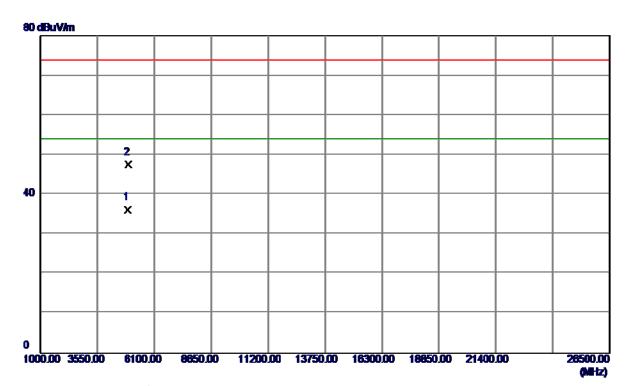


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4923. 9800	29. 55	6. 57	36. 12	54.00	-17.88	AVG	
2	4926. 2200	40. 98	6. 57	47.55	74. 00	-26. 45	Peak	

Report No.: BTL-FCCP-2-1708C076 Page 68 of 115





# Vertical

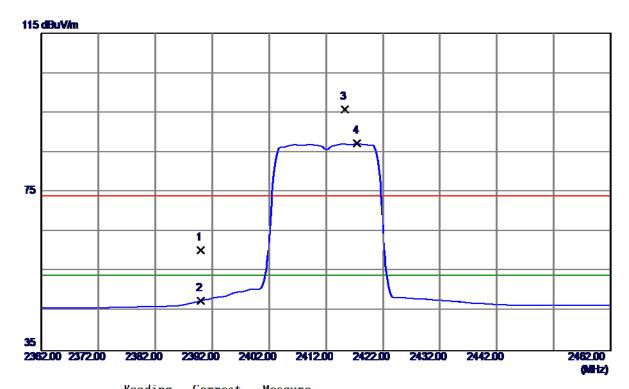


No.	Freq.	keading Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	27. 35	33.06	60.41	74.00	-13. 59	Peak	
2	2390.0000	14.61	33.06	47.67	54.00	-6. 33	AVG	
3	2415. 3000	62.71	33. 15	95.86	74.00	21.86	Peak	No Limit
4 *	2417. 5000	54. 09	33. 16	87.25	54.00	33. 25	AVG	No Limit

Report No.: BTL-FCCP-2-1708C076 Page 69 of 115





## **Vertical**

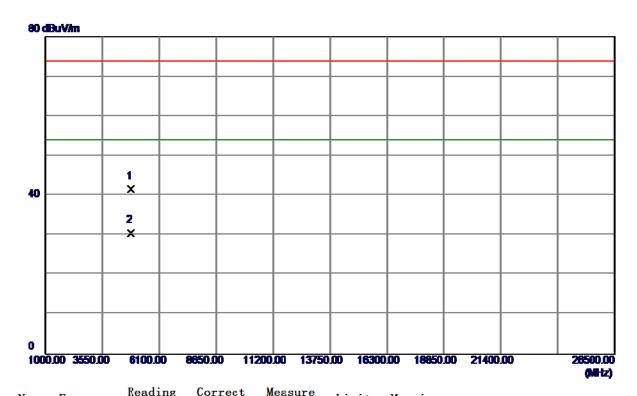


No.	Freq.	Keading Level	Correct Factor	measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4823. 4400	35. 28	6. 31	41.59	74.00	-32.41	Peak	
2 *	4823.8350	24. 32	6. 32	30.64	54.00	-23. 36	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 70 of 115





## Horizontal

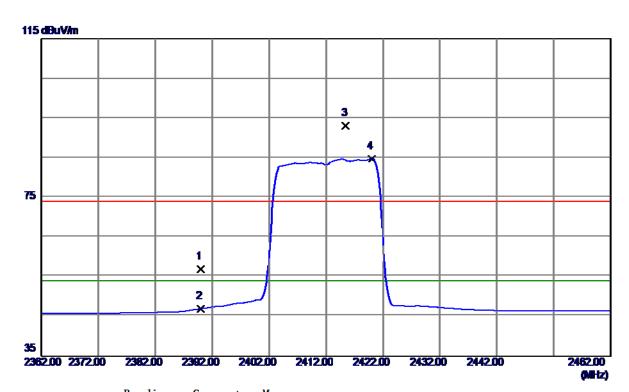


No.	Freq.	Keading Level	Correct Factor	Measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	23. 92	33.06	56.98	74.00	-17.02	Peak	
2	2390.0000	14.00	33.06	47.06	54.00	-6. 94	AVG	
3	2415. 5000	59. 93	33. 15	93.08	74.00	19.08	Peak	No Limit
4 *	2420.0000	51. 64	33. 17	84.81	54.00	30.81	AVG	No Limit

Report No.: BTL-FCCP-2-1708C076 Page 71 of 115





## Horizontal

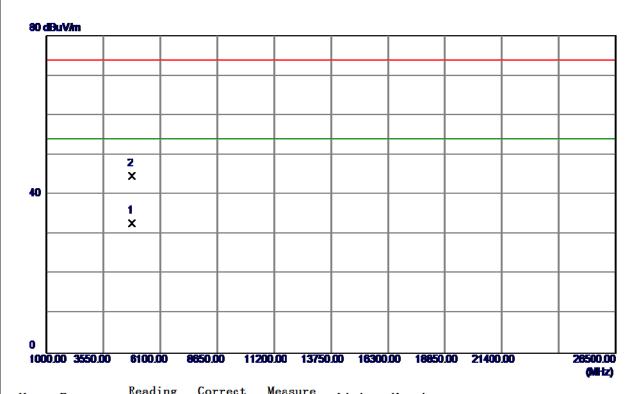


Freq.	Keading Level	Correct Factor	measure ment	Limit	Margin		
MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
4823. 9350	26. 52	6. 32	32.84	<b>54.00</b>	-21. 16	AVG	
4826. 2150	38. 26	6. 32	44.58	74.00	-29.42	Peak	
	MIIz 4823. 9350	Freq. Level	MIIz dBuV/m dB 4823.9350 26.52 6.32	MIIz         dBuV/m         dB         dBuV/m           4823.9350         26.52         6.32         32.84	MIIz         dBuV/m         dB         dBuV/m         dBuV/m           4823.9350         26.52         6.32         32.84         54.00	MIIz         dBuV/m         dB         dBuV/m         dBuV/m         dB           4823.9350         26.52         6.32         32.84         54.00         -21.16	MIIz         dBuV/m         dB         dBuV/m         dBuV/m         dB         Detector           4823.9350         26.52         6.32         32.84         54.00         -21.16         AVG

Report No.: BTL-FCCP-2-1708C076 Page 72 of 115





## Vertical

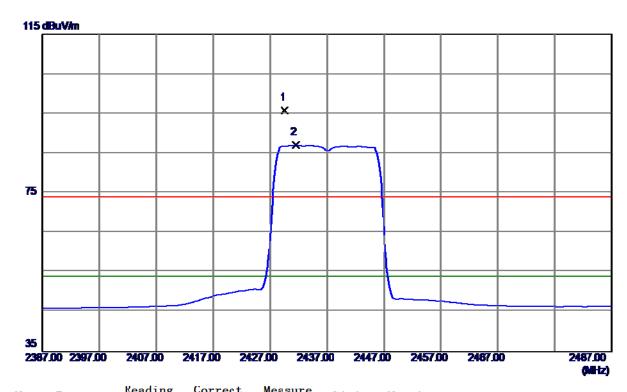


No.	Freq.	Level	Factor	measure	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2429.6000	62. 52	33. 21	95.73	74.00	21.73	Peak	No Limit
2 *	2431. 5000	53. 91	33. 21	87.12	54.00	33. 12	AVG	No Limit

Report No.: BTL-FCCP-2-1708C076





### **Vertical**

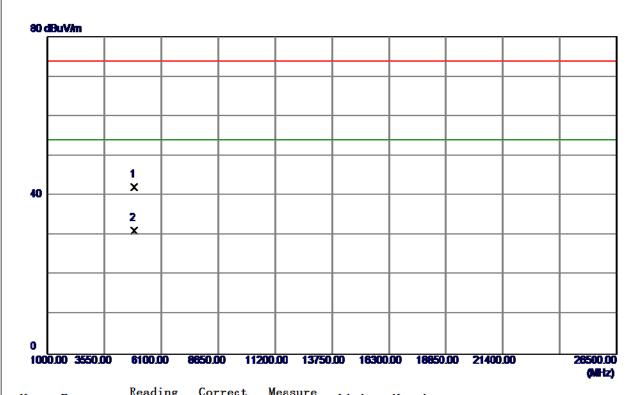


No.	Freq.	keading Level	Correct Factor	measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4873. 9250	35. 64	6. 44	42.08	74.00	-31.92	Peak	
2 *	4874. 0800	24.79	6. 44	31.23	<b>54.00</b>	-22.77	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 74 of 115





#### Horizontal

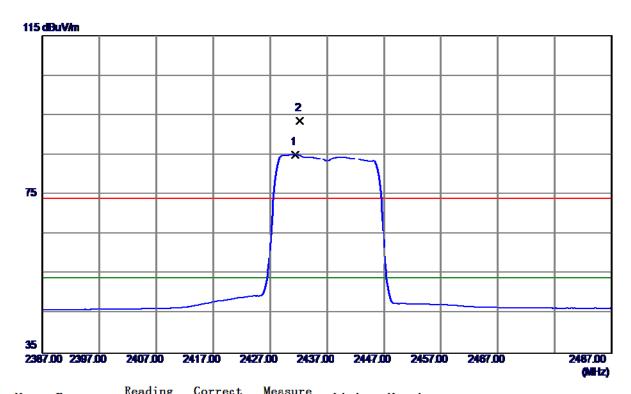


No.	Freq.	Keading Level	Correct Factor	measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2431. 4000	51. <b>90</b>	33. 21	85.11	<b>54.00</b>	31. 11	AVG	No Limit
2	2432. 2000	60. 28	33. 21	93.49	74.00	19. 49	Peak	No Limit

Report No.: BTL-FCCP-2-1708C076 Page 75 of 115





#### Horizontal

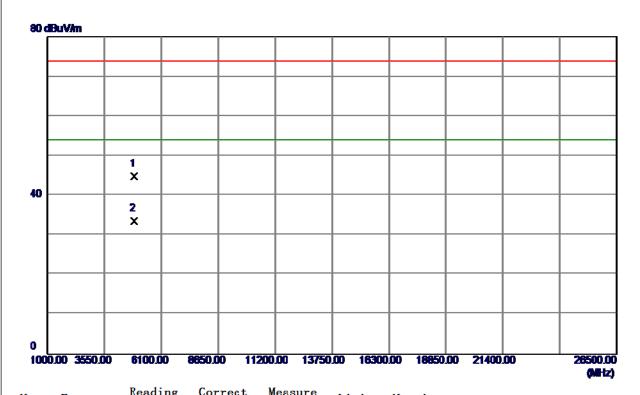


No.	Freq.	Keading Level	Correct Factor	measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4873.8550	38. 37	6. 44	44.81	74.00	-29. 19	Peak	
2 *	4873. 9900	27. 18	6. 44	33.62	54.00	<b>−20. 38</b>	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 76 of 115





## Vertical

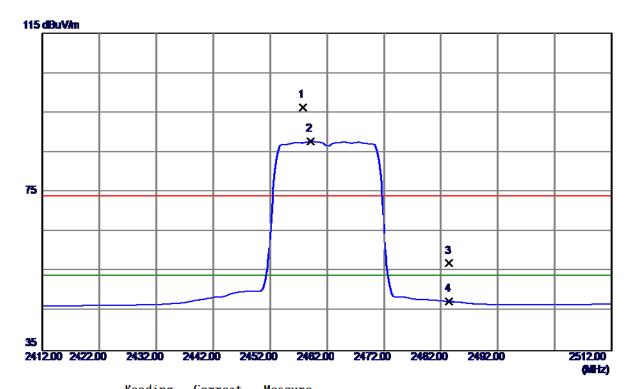


No.	Freq.	keading Level	Correct Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2457.8000	62. 93	33. 31	96. 24	74.00	22. 24	Peak	No Limit
2 *	2459. 1000	54.48	33. 32	87.80	54.00	33.80	AVG	No Limit
3	2483. 5000	23. 66	33.41	57.07	74.00	-16. 93	Peak	
4	2483. 5000	14. 04	33. 41	47.45	54.00	-6. 55	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 77 of 115





### Vertical

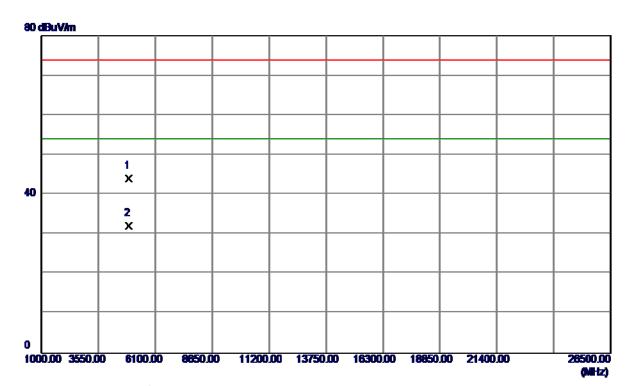


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dВ	Detector	Comment
1	4921. 7850	37. 37	6. 56	43.93	74.00	-30.07	Peak	
2 *	4923. 7700	25. 61	6. 57	32. 18	54. 00	-21.82	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 78 of 115





#### Horizontal

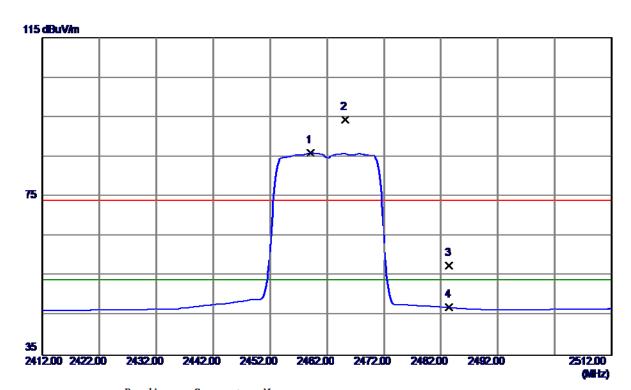


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2459. 1000	52.71	33. 32	86.03	<b>54.00</b>	32.03	AVG	No Limit
2	2465. 2000	60.99	33. 34	94.33	74.00	20. 33	Peak	No Limit
3	2483. 5000	24.11	33.41	57.52	74.00	-16.48	Peak	
4	2483. 5000	13. 68	33.41	47.09	54.00	-6. 91	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 79 of 115





### Horizontal

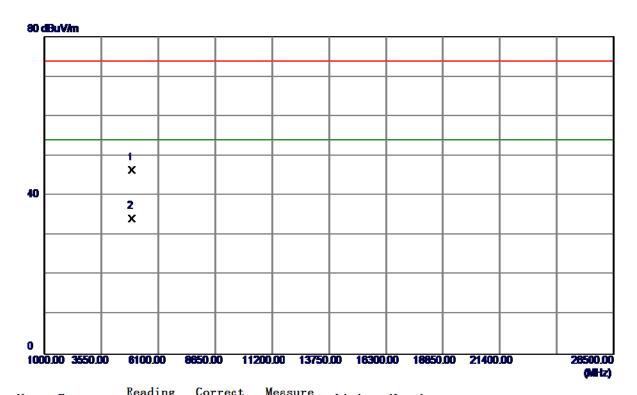

No.	Freq.	Keading Level	Correct Factor	measure ment	Limit	Margin		
	MIIz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4923.6700	39. 88	6. 57	46.45	74.00	-27.55	Peak	
2 *	4923. 9800	27.61	6. 57	34. 18	54.00	-19.82	AVG	

Report No.: BTL-FCCP-2-1708C076 Page 80 of 115





APPENDIX E - BANDWIDTH

Report No.: BTL-FCCP-2-1708C076 Page 81 of 115






## Test Mode: TX B Mode\_CH01/06/11

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.08	13.56	500	Complies
2437	10.07	13.48	500	Complies
2462	10.07	13.48	500	Complies

#### TX CH01

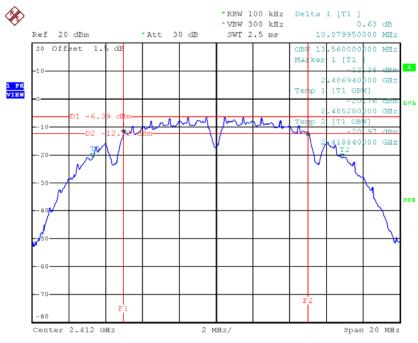


Date: 16.SEP.2017 15:37:07

Report No.: BTL-FCCP-2-1708C076 Page 82 of 115





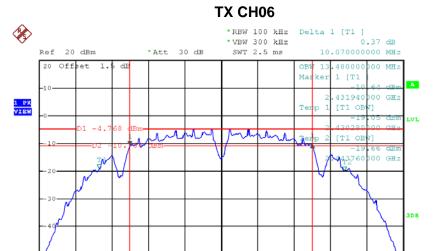


Date: 16.SEP.2017 15:38:46

Center 2.437 GHz

#### TX CH11

2 MHz/

Span 20 MHz

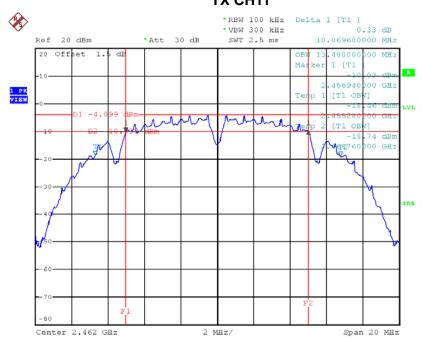

Date: 16.SEP.2017 15:40:26






## Test Mode: TX G Mode\_CH01/06/11

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.62	16.48	500	Complies
2437	16.64	16.48	500	Complies
2462	16.64	16.48	500	Complies

#### TX CH01

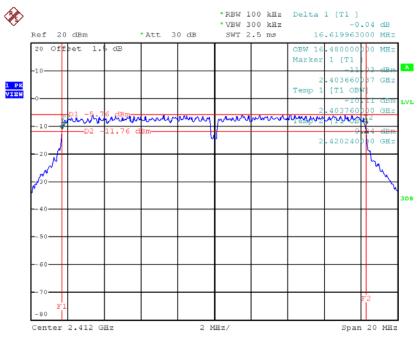


Date: 16.SEP.2017 15:42:47


Report No.: BTL-FCCP-2-1708C076 Page 84 of 115





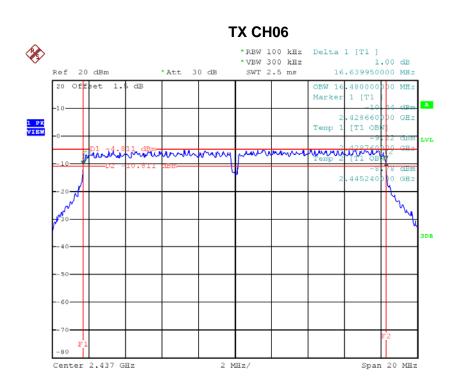

Date: 16.SEP.2017 15:44:01

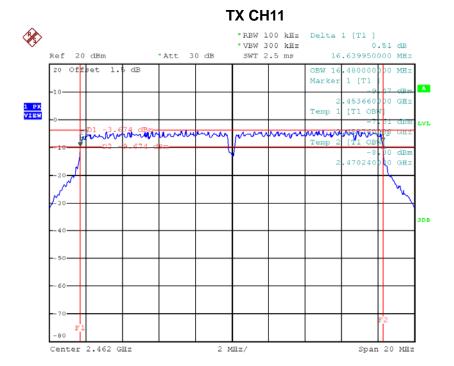

Date: 16.SEP.2017 15:45:11






## Test Mode: TX N-20MHz Mode\_CH01/06/11

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.88	17.72	500	Complies
2437	17.86	17.72	500	Complies
2462	17.89	17.68	500	Complies

#### **TX CH01**

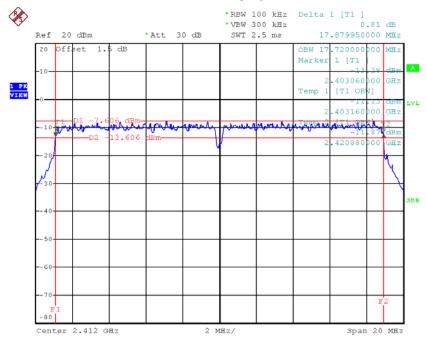


Date: 16.SEP.2017 15:46:50


Report No.: BTL-FCCP-2-1708C076 Page 86 of 115





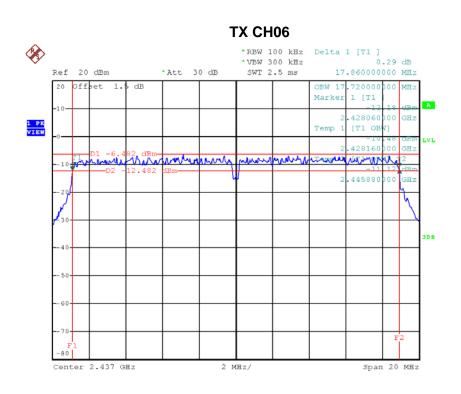

Date: 16.SEP.2017 15:48:08

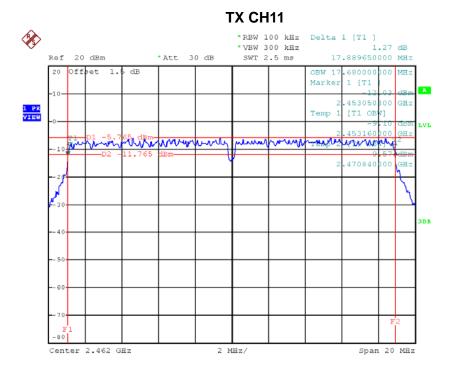

Date: 16.SEP.2017 15:49:21





APPENDIX F - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Report No.: BTL-FCCP-2-1708C076 Page 88 of 115





Test Mode :TX B Mode_CH01/06/11						
Frequency	Conducted	Conducted	Max. Limit	Max. Limit	Dogult	
(MHz)	Power (dBm)	Power (W)	(dBm)	(W)	Result	
2412	7.93	0.01	30.00	1.00	Complies	
2437	9.98	0.01	30.00	1.00	Complies	
2462	10.74	0.01	30.00	1.00	Complies	

Test Mode :TX G Mode_CH01/06/11						
Frequency	Conducted	Conducted	Max. Limit	Max. Limit	Dogult	
(MHz)	Power (dBm)	Power (W)	(dBm)	(W)	Result	
2412	20.32	0.11	30.00	1.00	Complies	
2437	21.52	0.14	30.00	1.00	Complies	
2462	22.47	0.18	30.00	1.00	Complies	

Test Mode :TX N20 Mode_CH01/06/11						
Frequency	Conducted	Conducted	Max. Limit	Max. Limit	Result	
(MHz)	Power (dBm)	Power (W)	(dBm)	(W)	Result	
2412	17.03	0.05	30.00	1.00	Complies	
2437	18.45	0.07	30.00	1.00	Complies	
2462	18.81	0.08	30.00	1.00	Complies	

Report No.: BTL-FCCP-2-1708C076 Page 89 of 115





APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION


Report No.: BTL-FCCP-2-1708C076 Page 90 of 115










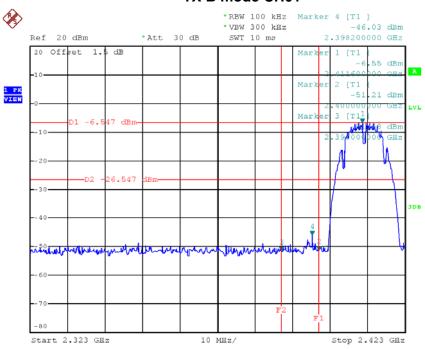

Date: 16.SEP.2017 15:37:43

#### TX B mode CH11

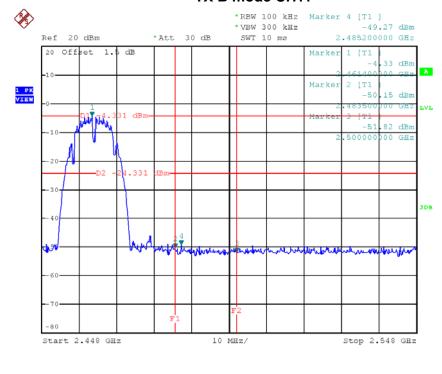


Date: 16.SEP.2017 15:41:00








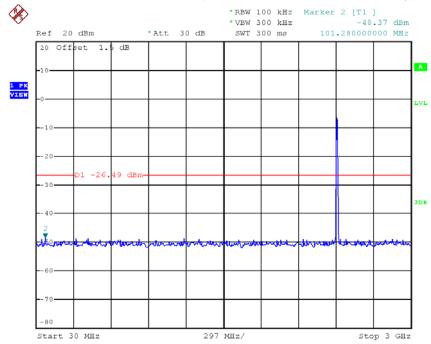


Date: 16.SEP.2017 15:37:22

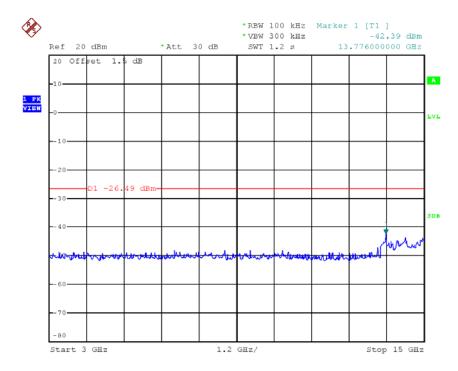

Date: 16.SEP.2017 15:37:29






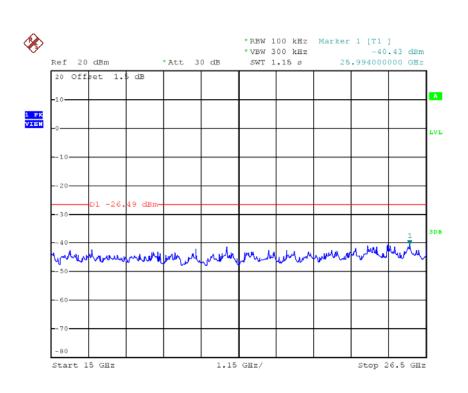

Date: 16.SEP.2017 15:37:36


## TX B mode CH06 (10 Harmonic of the frequency)

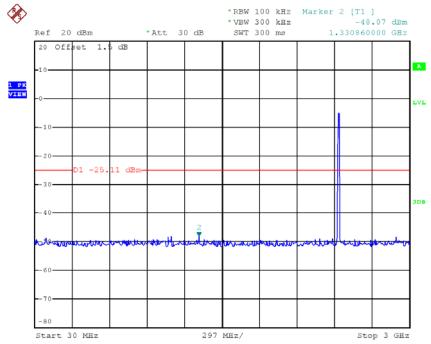


Date: 16.SEP.2017 15:39:00





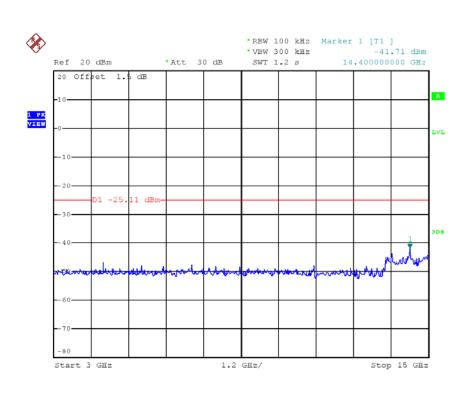

Date: 16.SEP.2017 15:39:07

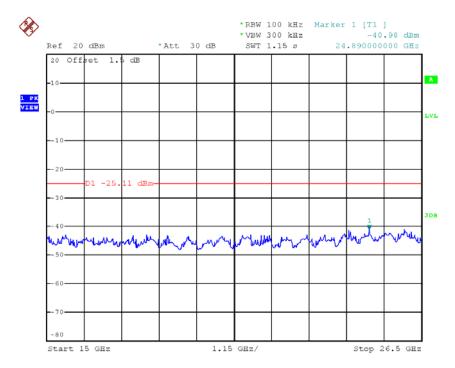


Date: 16.SEP.2017 15:39:14








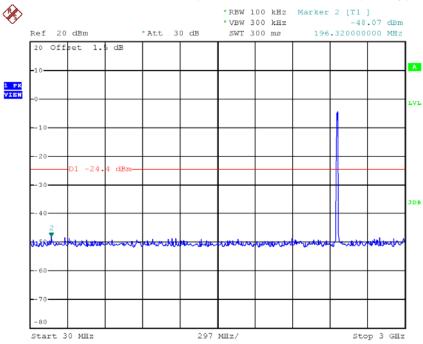


Date: 16.SEP.2017 15:40:39

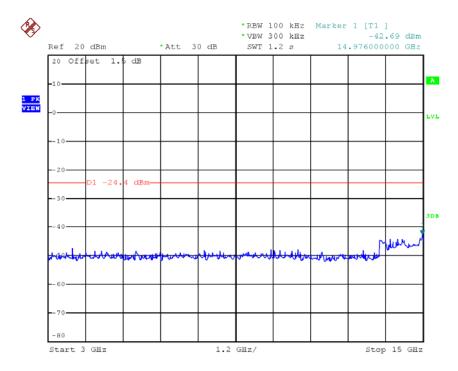

Date: 16.SEP.2017 15:40:46





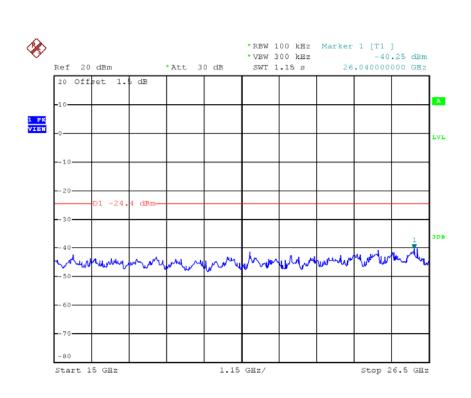


Date: 16.SEP.2017 15:40:53

Report No.: BTL-FCCP-2-1708C076








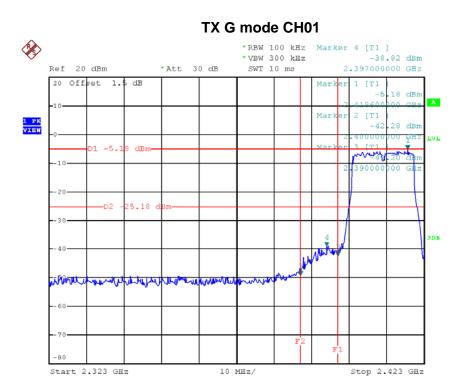

Date: 16.SEP.2017 15:43:21

### TX G mode CH11

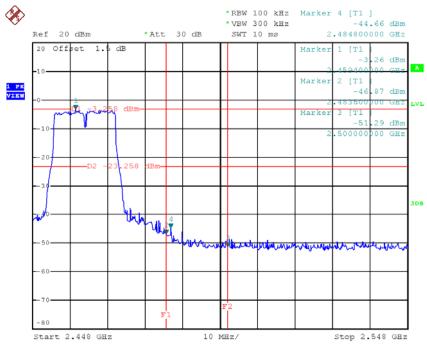


Date: 16.SEP.2017 15:45:45








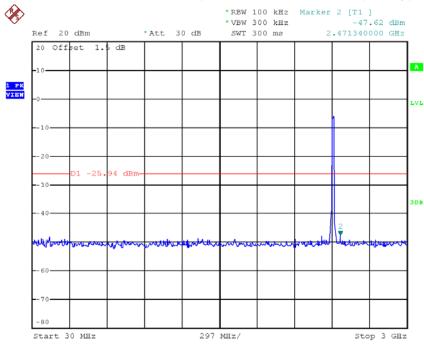


Date: 16.SEP.2017 15:43:00

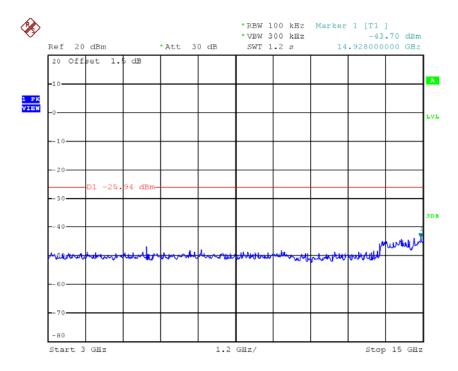

Date: 16.SEP.2017 15:43:07






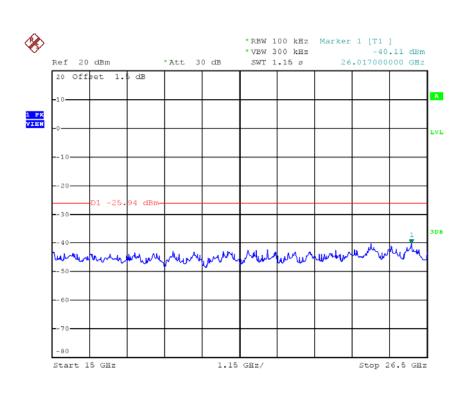

Date: 16.SEP.2017 15:43:14


## TX G mode CH06 (10 Harmonic of the frequency)

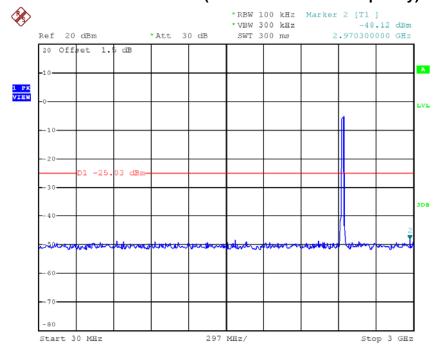


Date: 16.SEP.2017 15:44:14





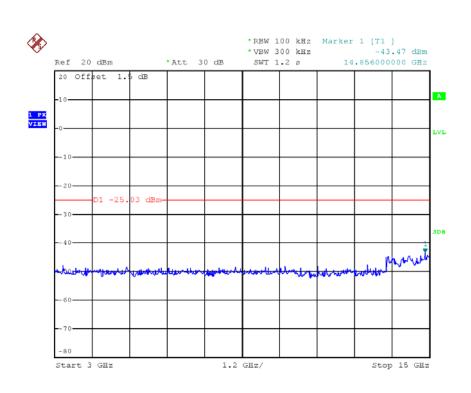

Date: 16.SEP.2017 15:44:21

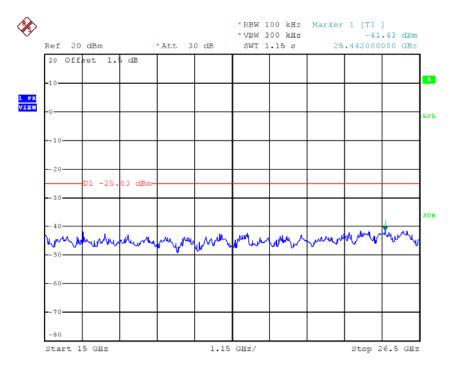


Date: 16.SEP.2017 15:44:28








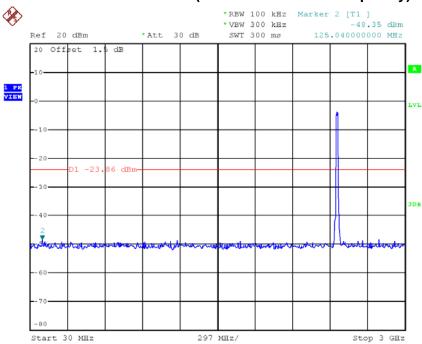

Date: 16.SEP.2017 15:45:24

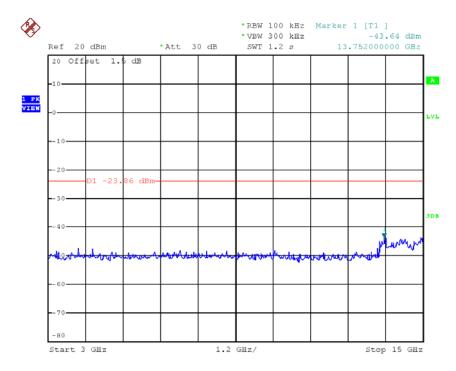


Date: 16.SEP.2017 15:45:31

Report No.: BTL-FCCP-2-1708C076





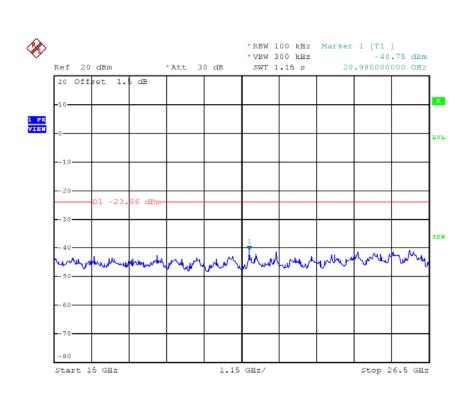


Date: 16.SEP.2017 15:45:38

Report No.: BTL-FCCP-2-1708C076








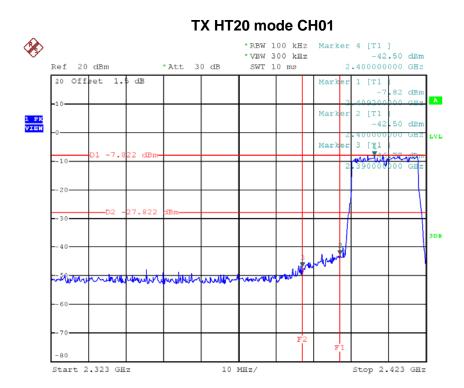

Date: 16.SEP.2017 15:47:24

#### TX HT20 mode CH11

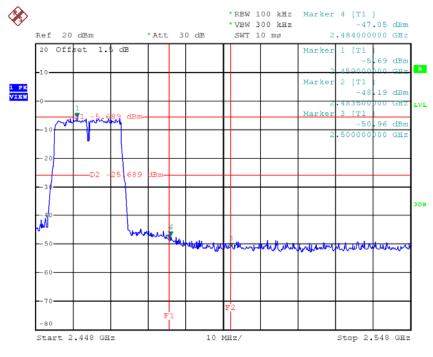


Date: 16.SEP.2017 15:49:55








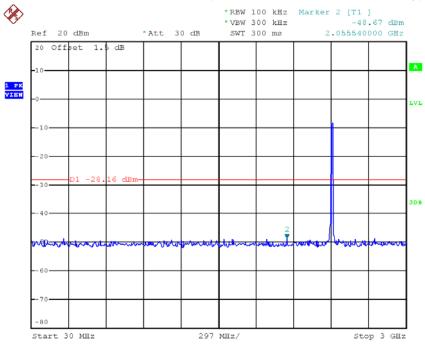

Date: 16.SEP.2017 15:47:03

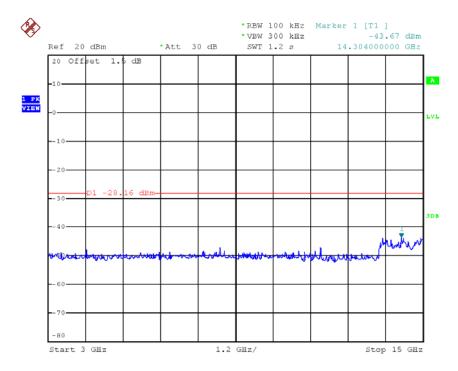


Date: 16.SEP.2017 15:47:10

Report No.: BTL-FCCP-2-1708C076






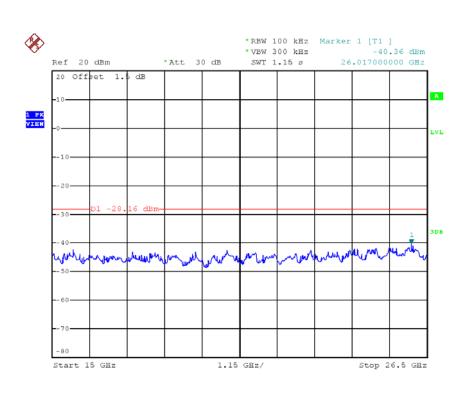

Date: 16.SEP.2017 15:47:17


## TX HT20 mode CH06 (10 Harmonic of the frequency)

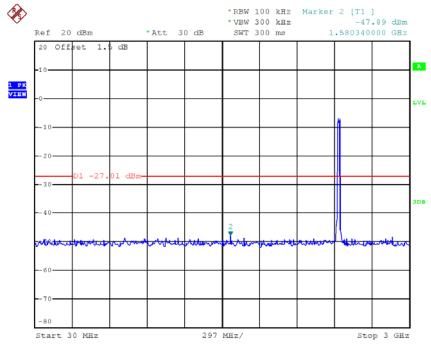


Date: 16.SEP.2017 15:48:21





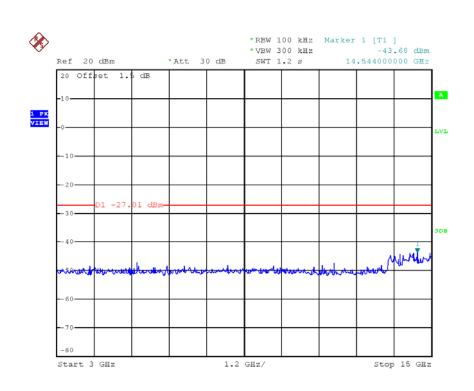

Date: 16.SEP.2017 15:48:28

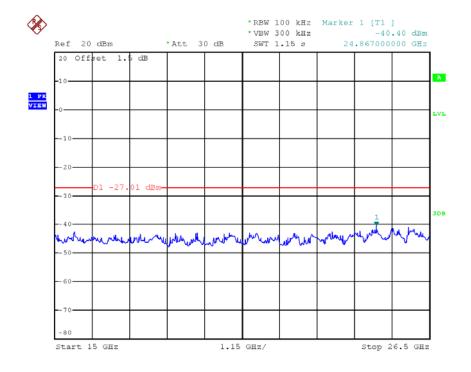


Date: 16.SEP.2017 15:48:35








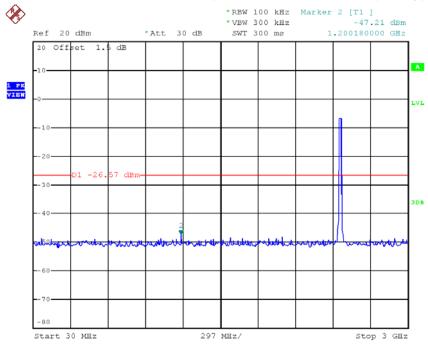

Date: 16.SEP.2017 15:49:34

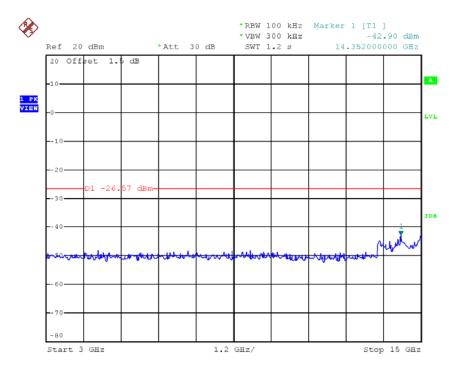


Date: 16.SEP.2017 15:49:41

Report No.: BTL-FCCP-2-1708C076 Page 107 of 115





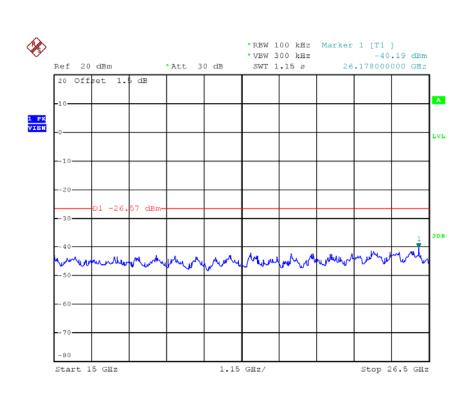

Date: 16.SEP.2017 15:49:48

Report No.: BTL-FCCP-2-1708C076





APPENDIX H - POWER SPECTRAL DENSITY

Report No.: BTL-FCCP-2-1708C076 Page 109 of 115






## Test Mode :TX B Mode\_CH01/06/11

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-24.71	0.0034	8.00	Complies
2437	-23.25	0.0047	8.00	Complies
2462	-22.11	0.0062	8.00	Complies

## TX CH01

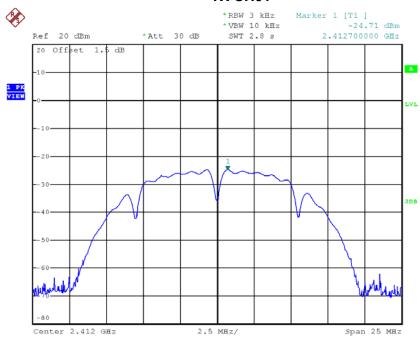


Date: 16.SEP.2017 15:37:52


Report No.: BTL-FCCP-2-1708C076 Page 110 of 115





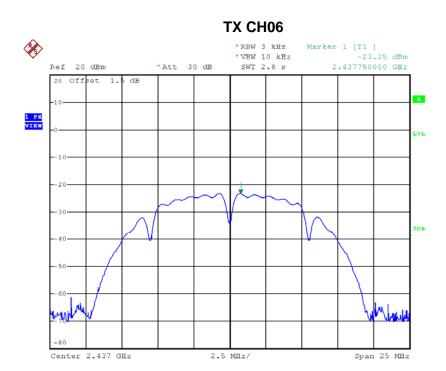

Date: 16.SEP.2017 15:39:22

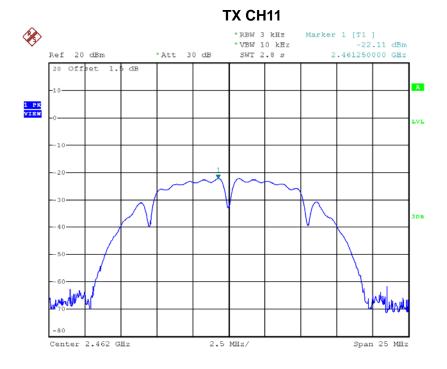

Date: 16.SEP.2017 15:41:08






# Test Mode :TX G Mode\_CH01/06/11

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-19.93	0.0102	8.00	Complies
2437	-18.18	0.0152	8.00	Complies
2462	-17.78	0.0167	8.00	Complies

## TX CH01

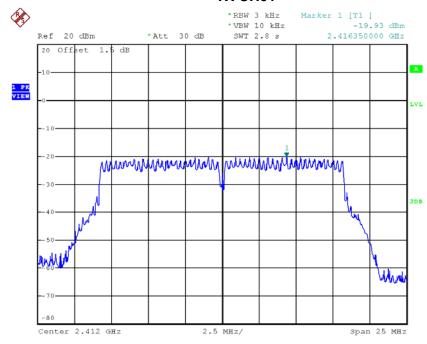


Date: 16.SEP.2017 15:43:30

Report No.: BTL-FCCP-2-1708C076 Page 112 of 115








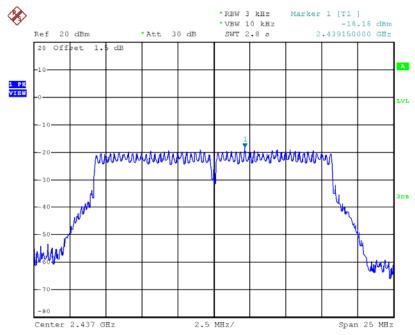

Date: 16.SEP.2017 15:44:37

## TX CH11

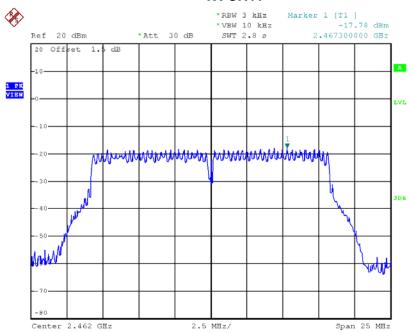

Date: 16.SEP.2017 15:45:53

Report No.: BTL-FCCP-2-1708C076 Page 113 of 115






## Test Mode: TX N-20M Mode\_CH01/06/11

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-22.09	0.0062	8.00	Complies
2437	-20.80	0.0083	8.00	Complies
2462	-18.79	0.0132	8.00	Complies

#### TX CH01

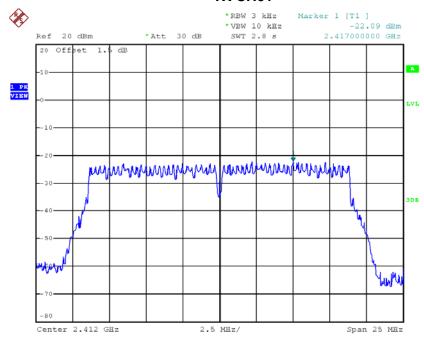


Date: 16.SEP.2017 15:47:33


Report No.: BTL-FCCP-2-1708C076 Page 114 of 115





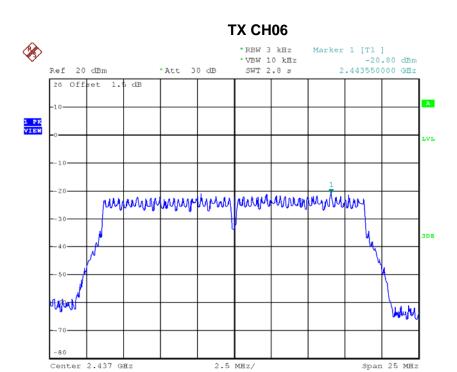

Date: 16.SEP.2017 15:48:44

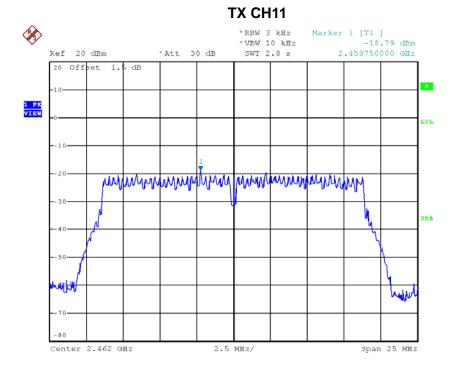

Date: 16.SEP.2017 15:50:03