

**Shenzhen Global Test Service Co.,Ltd.**

1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT**FCC PART 15.247****Report Reference No.....: GTSR16020030-2.4WLAN****FCC ID.: 2AHMXDOOGEEP1**

Compiled by

(position+printed name+signature)... File administrators Jimmy Wang

Supervised by

(position+printed name+signature)... Test Engineer Peter Xiao

Approved by

(position+printed name+signature)... Manager Sam Wang

Date of issue: Mar. 21, 2016

Representative Laboratory Name : Shenzhen Global Test Service Co.,Ltd.Address: 1F, Building No. 13A, Zhonghaixin Science and Technology City,
No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District,
Shenzhen, Guangdong**Applicant's name.....: Shenzhen DOOGEE TONG WEI Tech Co.,Ltd.**Address: The Forth and Fifth floor of the western Room 412,plant 405,
Sangda estate, Zhehua Road, Huaqiang North street, Futian Dis.
Shenzhen**Test specification:**Standard.....: **FCC Part 15.247: Operation within the bands 902-928 MHz,
2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Smart projector

Trade Mark.....:

Manufacturer: **Shenzhen DOOGEE TONG WEI Tech Co.,Ltd.**

Model/Type reference: DOOGEE P1

Listed Models: /

Operation Frequency.....: From 2412MHz to 2462MHz

Hardware Version: L8-MAIN-PCB-V1.3

Software Version.....: M806-V54

Rating.....: Input:AC100-240V,50/60Hz,0.5A
Output:DC5V,2AResult.....: **PASS**

TEST REPORT

Test Report No. :	GTSR16020030-2.4WLAN	Mar. 21, 2016
		Date of issue

Equipment under Test : Smart projector

Model /Type : DOOGEE P1

Listed Models : /

Applicant : **Shenzhen DOOGEE TONG WEI Tech Co.,Ltd.**

Address : The Forth and Fifth floor of the western Room 412,plant 405,
Sangda estate, Zhehua Road, Huaqiang North street, Futian
Dis. Shenzhen

Manufacturer : **Shenzhen DOOGEE TONG WEI Tech Co.,Ltd.**

Address : The Forth and Fifth floor of the western Room 412,plant 405,
Sangda estate, Zhehua Road, Huaqiang North street, Futian
Dis. Shenzhen

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY.....</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment Under Test	5
2.4.	Short description of the Equipment under Test (EUT)	5
2.5.	EUT operation mode	6
2.6.	Block Diagram of Test Setup	6
2.7.	Related Submittal(s) / Grant (s)	6
2.8.	Modifications	6
2.9.	NOTE	6
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Test Description	8
3.5.	Statement of the measurement uncertainty	9
3.6.	Equipments Used during the Test	9
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>10</u>
4.1.	AC Power Conducted Emission.....	10
4.2.	Radiated Emission.....	13
4.3.	Maximum Peak Output Power	21
4.4.	Power Spectral Density.....	22
4.5.	6dB Bandwidth.....	25
4.6.	Band Edge Compliance of RF Emission	28
4.7.	Spurious RF Conducted Emission	32
4.8.	Antenna Requirement.....	51
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>52</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>54</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03r04](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Mar. 01, 2016
Testing commenced on	:	Mar. 01, 2016
Testing concluded on	:	Mar. 21, 2016

2.2. Product Description

Name of EUT	Smart projector
Model Number	DOOGEE P1
Listed Models	/
FCC ID	2AHMXDOOGEEP1
Power Supply	DC 5V or Battery DC 3.8V
Adapter information:	Model: ASSA41i-050200 Input: 100-240V~50/60Hz 0.5A Output:DC 5.0V 2.0A
Supported type:	802.11a/802.11b/802.11g/802.11n HT20
Operation bandwidth:	20MHz
Modulation:	802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) 802.11b: DSSS(CCK,DQPSK,DBPSK) 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK)
Operation frequency:	802.11a:5180MHz—5240MHz/5745MHz—5825MHz 802.11b:2412-2462MHz 802.11g:2412-2462MHz 802.11n HT20:2412-2462MHz/5180MHz—5240MHz/5745MHz—5825MHz
Antenna Type	Internal Antenna

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 3.8V

2.4. Short description of the Equipment under Test (EUT)

This is a Smart projector.

For more details, refer to the user's manual of the EUT.


2.5. EUT operation mode

The application provider specific test software to control sample in continuous TX and RX (Duty Cycle >98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

2.6. Block Diagram of Test Setup

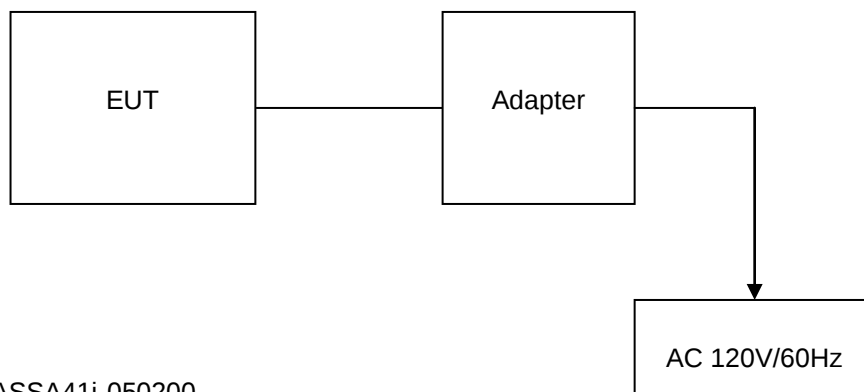

Adapter:

Model: ASSA41i-050200
 Input: 100-240V~50/60Hz 0.5A
 Output: 5.0V DC 2A
 Power Cable: 120cm
 ◇ Shielded ◆ Unshielded

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AHMXDOOGEEP1** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8. Modifications

No modifications were implemented to meet testing criteria.

2.9. NOTE

Function	Test Standards	Reference Report
WLAN-2.4	FCC Part 15 Subpart C	GTSR16020030-2.4WLAN
WLAN-5.8	FCC Part 15 Subpart E	GTSR16020030-5.8WLAN
EMF	FCC Per 47 CFR 2.1093(d)	GTSR16020030-MPE

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District, Shenzhen, Guangdong

Shenzhen CTL Testing Technology Co.,Ltd.

1/F.-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, Guangdong, China

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 964637

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 964637, Jul 24, 2015.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2018.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Test Description

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	802.11b	☒ Lowest ☒ Middle ☒ Highest	802.11b	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.247(e)	Power spectral density	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.247(a)(1)	Spectrum bandwidth – 6 dB bandwidth	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(b)(1)	Maximum output power	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Middle ☒ Highest	☒ ☒ ☒	☐	☐	☐	complies
§15.247(d)	Band edge compliance conducted	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Highest	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.205	Band edge compliance radiated	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Highest	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Highest	☒	☐	☐	☐	complies
§15.247(d)	TX spurious emissions conducted	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(d)	TX spurious emissions radiated	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	☒	☐	☐	☐	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	802.11b	-/-	802.11b	-/-	☒	☐	☐	☐	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	802.11b	-/-	802.11b	-/-	☒	☐	☐	☐	complies

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9kHz~1GHz& Radiated Emission 1GHz~10 th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	6.5Mbps	1/6/11
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2015/05/28	2016/05/27
LISN	R&S	ESH2-Z5	893606/008	2015/05/27	2016/05/26
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	101102	2015/06/26	2016/06/25
Spectrum Analyzer	Agilent	N9020A	MY48010425	2015/06/17	2016/06/16
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	SCHWARZBEC K	FMZB1519	1519-037	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2015/05/20	2016/05/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2015/05/20	2016/05/19
Data acquisition card	Agilent	U2531A	TW53323507	2015/05/20	2016/05/19
Power Sensor	Agilent	U2021XA	MY5365004	2015/05/20	2016/05/19
RF Cable	HUBER+SUHNER	RG214	N/A	2015/05/20	2016/05/19

Note: The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

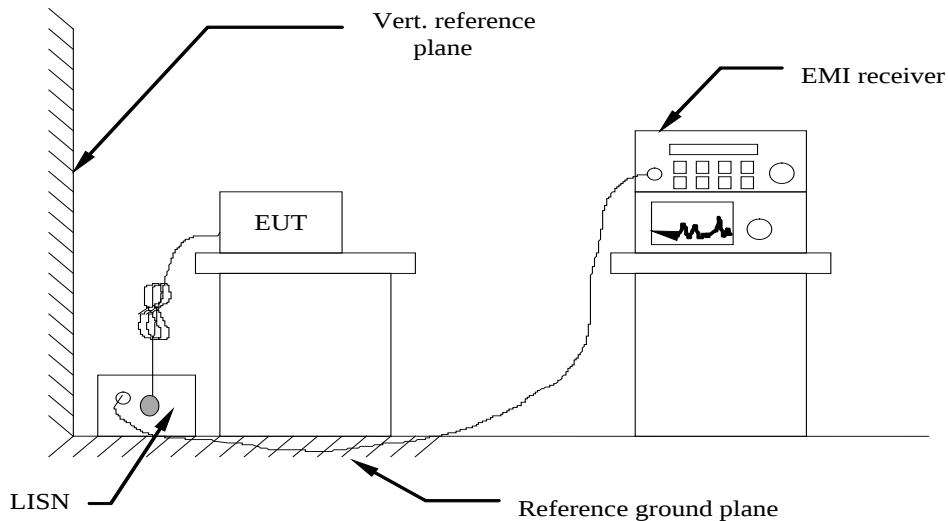

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC5V power from PC, the adapter of PC received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS


Remark: We tested three positions in AC 120V/60Hz and AC 240V/60Hz, the worst case was recorded .

Power supply:

DC 5V from Adapter

Polarization

L

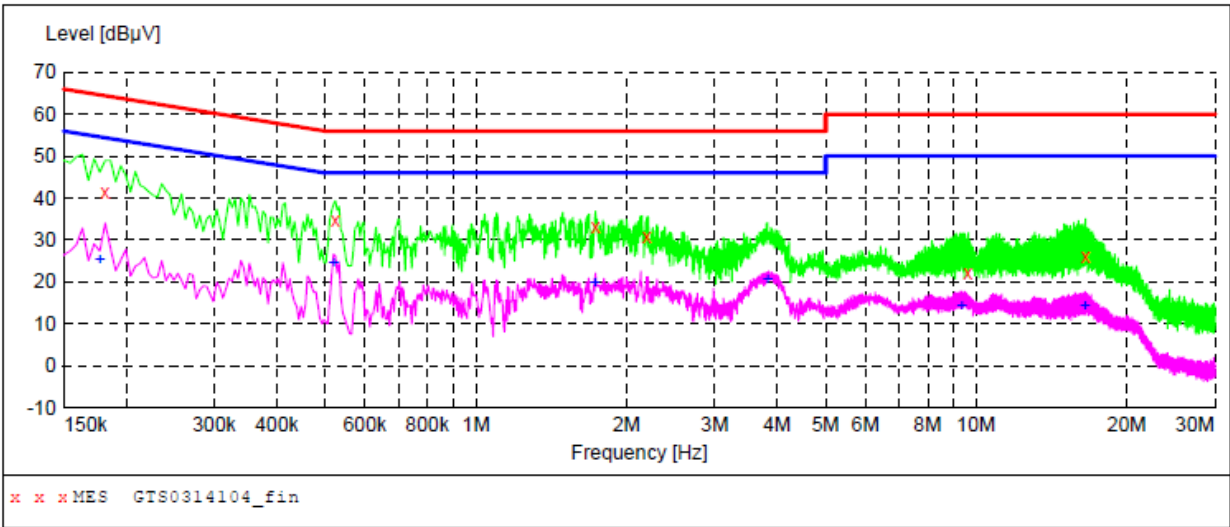

MEASUREMENT RESULT: "GTS0314104_fin"

3/14/2016 11:36AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.181500	41.50	10.0	64	22.9	QP	L1	GND
0.523500	34.90	9.8	56	21.1	QP	L1	GND
1.734000	33.30	9.5	56	22.7	QP	L1	GND
2.193000	30.80	9.5	56	25.2	QP	L1	GND
9.627000	22.30	8.9	60	37.7	QP	L1	GND
16.552500	26.10	7.8	60	33.9	QP	L1	GND

MEASUREMENT RESULT: "GTS0314104_fin2"

3/14/2016 11:36AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.177000	25.20	10.0	55	29.4	AV	L1	GND
0.519000	24.70	9.8	46	21.3	AV	L1	GND
1.729500	19.90	9.5	46	26.1	AV	L1	GND
3.826500	20.70	9.4	46	25.3	AV	L1	GND
9.343500	14.30	8.9	50	35.7	AV	L1	GND
16.458000	14.20	7.8	50	35.8	AV	L1	GND

Power supply:

DC 5V from Adapter

Polarization

N

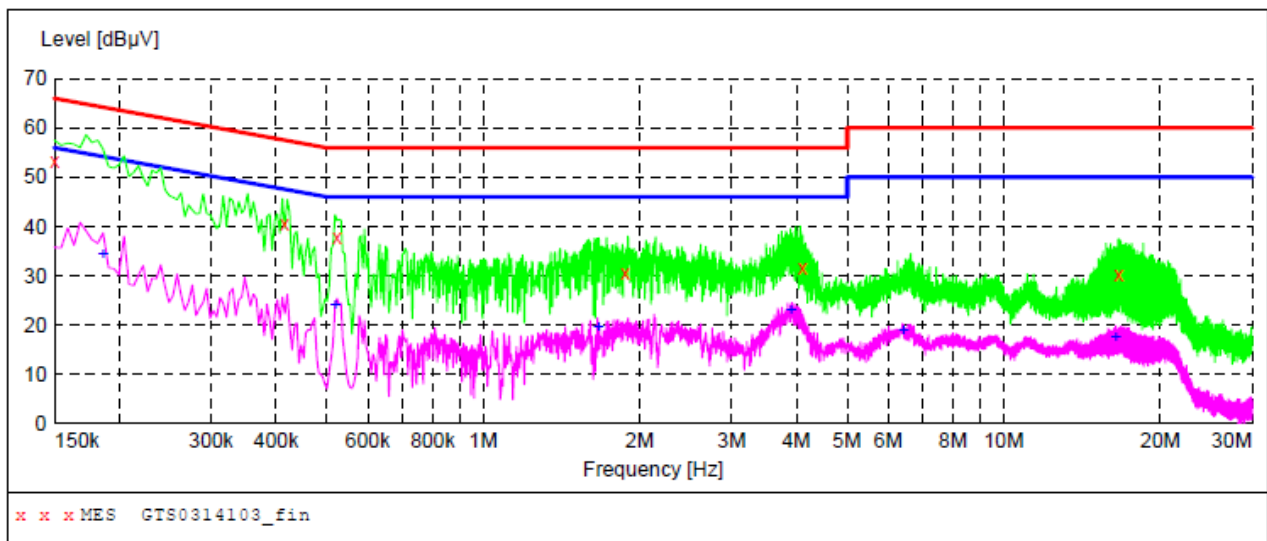**MEASUREMENT RESULT: "GTS0314103_fin"**

3/14/2016 11:32AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	53.10	10.1	66	12.9	QP	N	GND
0.415500	40.60	9.8	58	16.9	QP	N	GND
0.523500	37.80	9.8	56	18.2	QP	N	GND
1.873500	30.70	9.5	56	25.3	QP	N	GND
4.096500	31.50	9.4	56	24.5	QP	N	GND
16.633500	30.10	7.8	60	29.9	QP	N	GND

MEASUREMENT RESULT: "GTS0314103_fin2"


3/14/2016 11:32AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.186000	34.40	10.0	54	19.8	AV	N	GND
0.519000	24.10	9.8	46	21.9	AV	N	GND
1.666500	19.50	9.5	46	26.5	AV	N	GND
3.903000	23.00	9.4	46	23.0	AV	N	GND
6.414000	18.70	9.2	50	31.3	AV	N	GND
16.408500	17.30	7.8	50	32.7	AV	N	GND


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

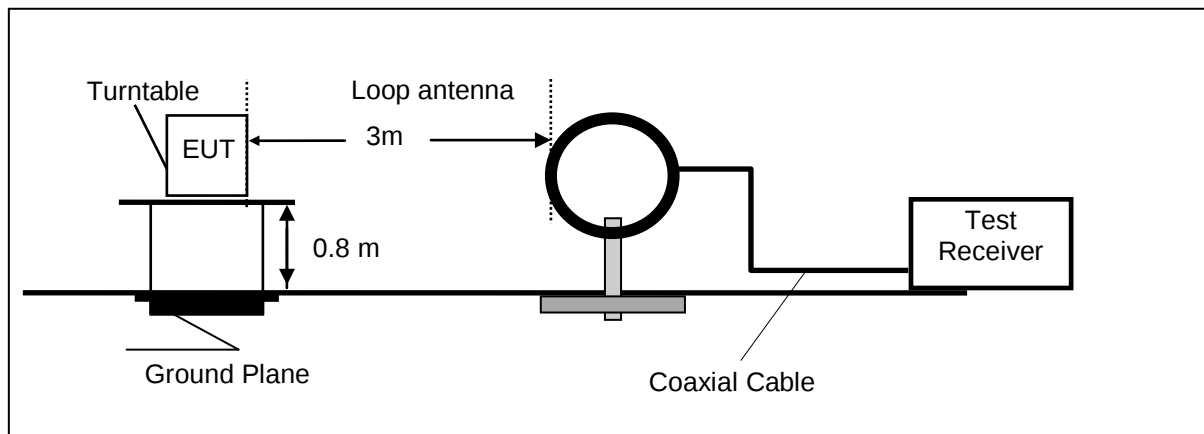

Frequency range 30MHz – 1000MHz

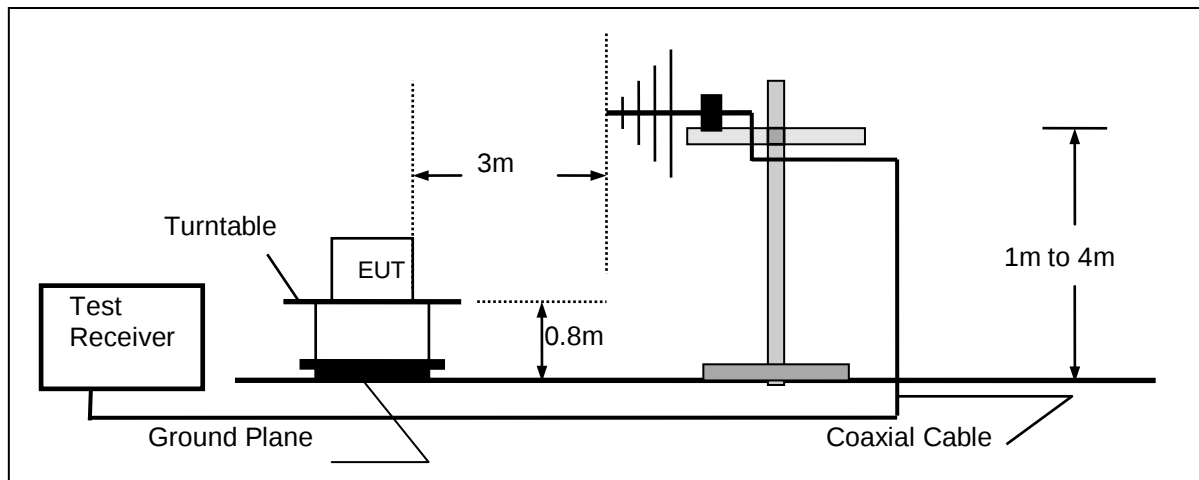

Frequency range above 1GHz-25GHz

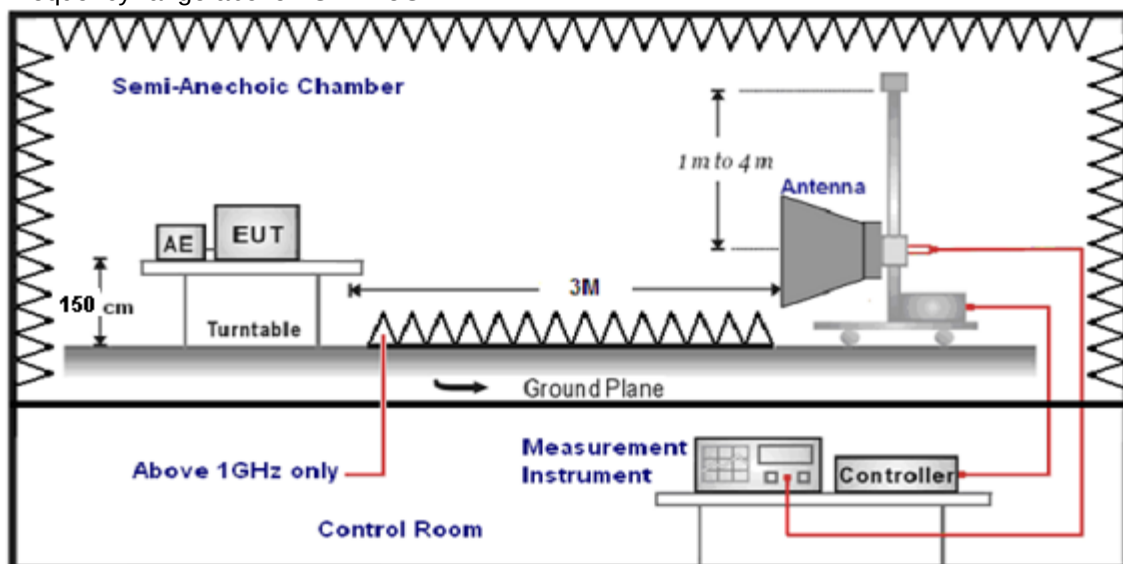

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd}=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200

Above 960	3	54.0	500
-----------	---	------	-----


TEST RESULTS


Remark: We tested three positions in AC 120V/60Hz and AC 240V/60Hz, the worst case was recorded.
Test site: Shenzhen CTL Testing Technology Co., Ltd

For 9 KHz-30MHz

Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.36	47.50	96.48	48.98	QP	PASS
1.65	36.47	63.25	26.78	QP	PASS
20.51	45.21	69.54	24.33	QP	PASS
25.77	41.03	69.54	28.51	QP	PASS

For 30MHz-1GHz

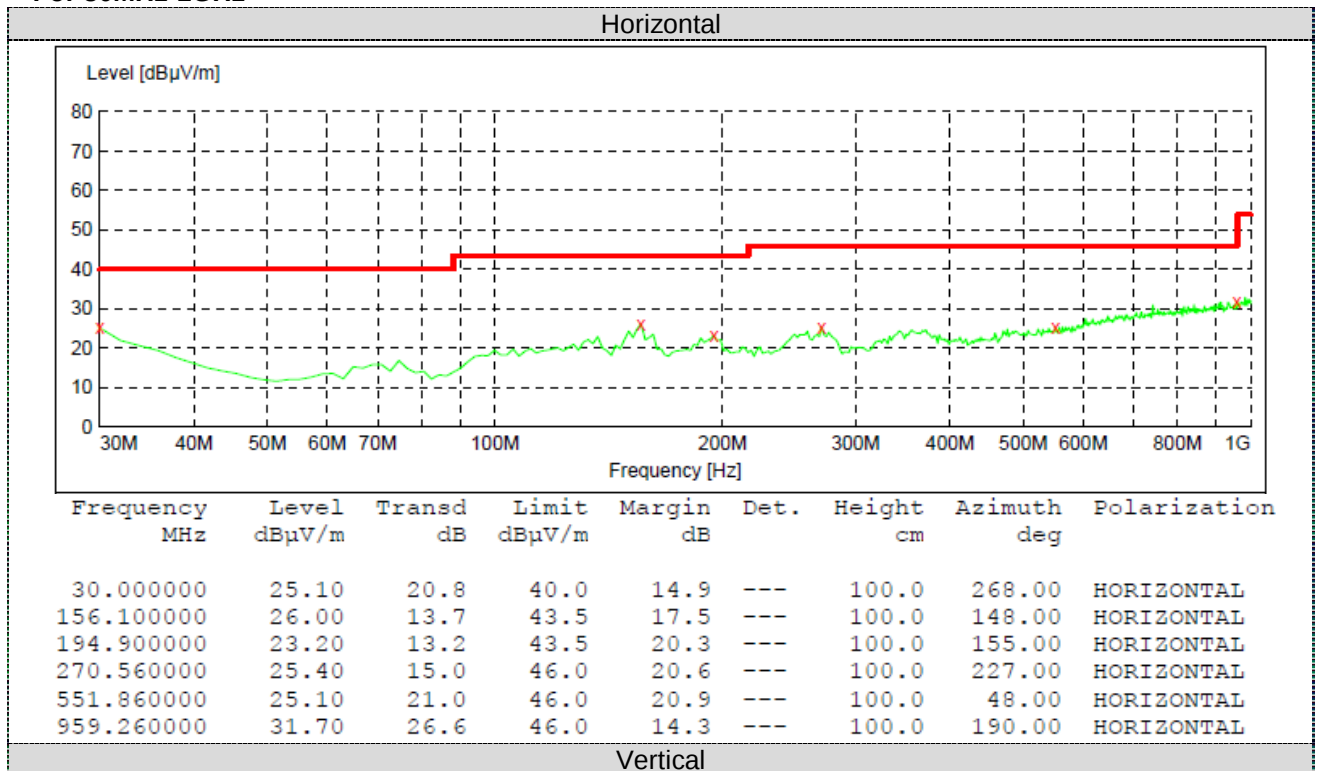

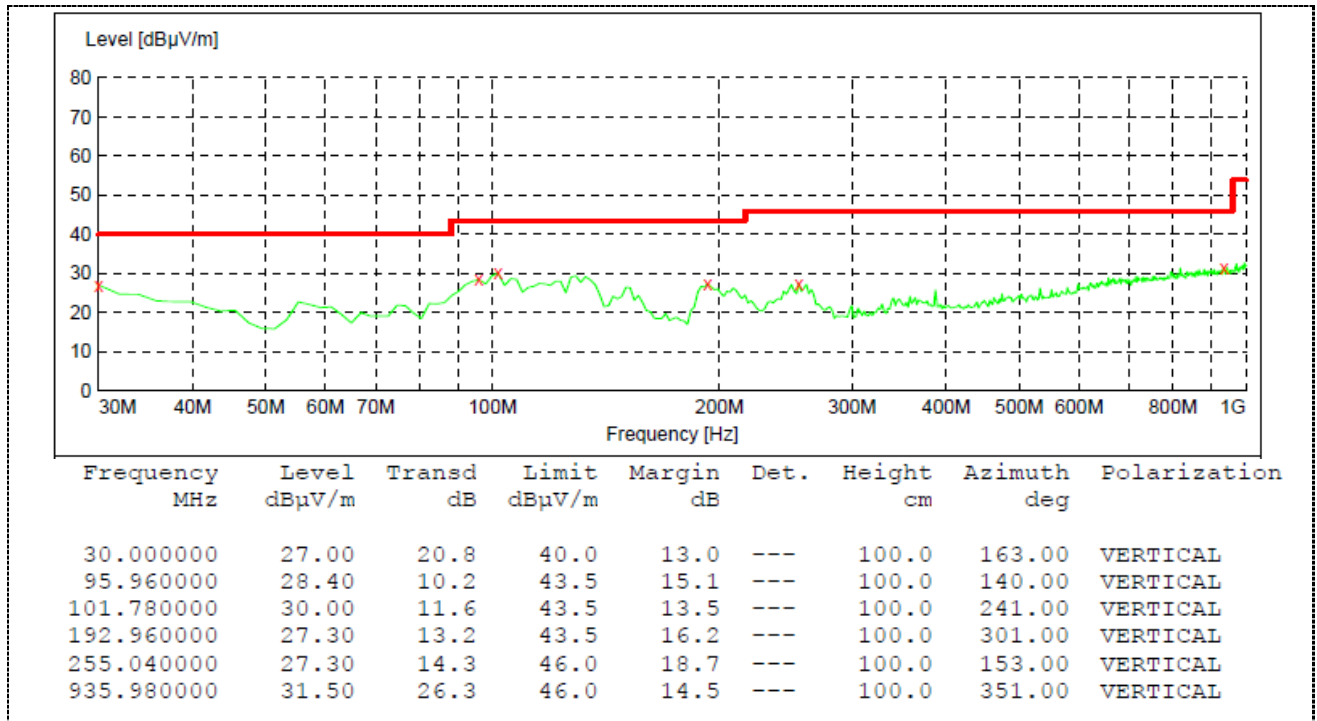

For 1GHz to 25GHz

802.11b Mode (above 1GHz)

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	60.23 PK	74	13.77	1.00	124	62.33	31.6	7.00	36.5	2.10
1	4824	40.12 AV	54	13.88	1.00	124	42.22	31.6	7.00	36.5	2.10
2	7236	55.64 PK	74	18.36	1.00	230	66.57	37.33	8.90	35.3	10.93
2	7236	39.12 AV	54	14.88	1.00	230	50.05	37.33	8.90	35.3	10.93

Frequency(MHz):			2412			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	61.34 PK	74	12.66	1.00	97	63.44	31.60	7.00	36.50	2.10
1	4824	42.36 AV	54	11.64	1.00	97	44.46	31.60	7.00	36.50	2.10
2	7236	55.72 PK	74	18.28	1.00	185	66.65	37.33	8.90	35.30	10.93
2	7236	40.16 AV	54	13.84	1.00	185	51.09	37.33	8.90	35.30	10.93

Frequency(MHz):			2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	63.25 PK	74.00	10.75	1.00	207	65.37	31.02	7.60	36.5	2.12
1	4874.00	43.16 AV	54.00	10.84	1.00	207	45.28	31.02	7.60	36.5	2.12
2	7311.00	54.85 PK	74.00	19.15	1.00	116	65.93	37.28	8.60	34.8	11.08
2	7311.00	41.30 AV	54.00	12.70	1.00	116	52.38	37.28	8.60	34.8	11.08

Frequency(MHz):			2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	62.94 PK	74.00	11.06	1.00	162	65.06	31.02	7.60	36.5	2.12
1	4874.00	44.31 AV	54.00	9.69	1.00	162	46.43	31.02	7.60	36.5	2.12
2	7311.00	54.62 PK	74.00	19.38	1.00	109	65.70	37.28	8.60	34.8	11.08
2	7311.00	41.84 AV	54.00	12.16	1.00	109	52.92	37.28	8.60	34.8	11.08

Frequency(MHz):				2462			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	63.67	PK	74.00	10.33	1.00	246	66.87	31.58	7.82	36.2	3.20
1	4924.00	44.61	AV	54.00	9.39	1.00	246	47.81	31.58	7.82	36.2	3.20
2	7386.00	56.19	PK	74.00	17.81	1.00	160	68.13	38.51	8.73	35.3	11.94
2	7386.00	40.21	AV	54.00	13.79	1.00	160	52.15	38.51	8.73	35.3	11.94

Frequency(MHz):				2462			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	62.71	PK	74.00	11.29	1.00	168	65.91	31.58	7.82	36.2	3.20
1	4924.00	45.39	AV	54.00	8.61	1.00	168	48.59	31.58	7.82	36.2	3.20
2	7386.00	56.21	PK	74.00	17.79	1.00	53	68.15	38.51	8.73	35.3	11.94
2	7386.00	40.92	AV	54.00	13.08	1.00	53	52.86	38.51	8.73	35.3	11.94

802.11g Mode (above 1GHz)

Frequency(MHz):				2412			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	62.46	PK	74	11.54	1.00	124	64.56	31.6	7.00	36.5	2.10
1	4824	42.15	AV	54	11.85	1.00	124	44.25	31.6	7.00	36.5	2.10
2	7236	55.76	PK	74	18.24	1.00	192	66.69	37.33	8.90	35.3	10.93
2	7236	41.32	AV	54	12.68	1.00	192	52.25	37.33	8.90	35.3	10.93

Frequency(MHz):				2412			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	63.25	PK	74	10.75	1.00	86	65.35	31.60	7.00	36.50	2.10
1	4824	43.34	AV	54	10.66	1.00	86	45.44	31.60	7.00	36.50	2.10
2	7236	56.18	PK	74	17.82	1.00	216	67.11	37.33	8.90	35.30	10.93
2	7236	42.16	AV	54	11.84	1.00	216	53.09	37.33	8.90	35.30	10.93

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	63.71	PK	74.00	10.29	1.00	152	65.83	31.02	7.60	36.5	2.12
1	4874.00	44.62	AV	54.00	9.38	1.00	152	46.74	31.02	7.60	36.5	2.12
2	7311.00	55.76	PK	74.00	18.24	1.00	130	66.84	37.28	8.60	34.8	11.08
2	7311.00	40.65	AV	54.00	13.35	1.00	130	51.73	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	63.42	PK	74.00	10.58	1.00	127	65.54	31.02	7.60	36.5	2.12
1	4874.00	42.73	AV	54.00	11.27	1.00	127	44.85	31.02	7.60	36.5	2.12
2	7311.00	57.65	PK	74.00	16.35	1.00	138	68.73	37.28	8.60	34.8	11.08
2	7311.00	40.97	AV	54.00	13.03	1.00	138	52.05	37.28	8.60	34.8	11.08

Frequency(MHz):				2462			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	66.70	PK	74.00	7.30	1.00	192	69.90	31.58	7.82	36.2	3.20
1	4924.00	45.92	AV	54.00	8.08	1.00	192	49.12	31.58	7.82	36.2	3.20
2	7386.00	56.12	PK	74.00	17.88	1.00	115	68.06	38.51	8.73	35.3	11.94
2	7386.00	41.47	AV	54.00	12.53	1.00	115	53.41	38.51	8.73	35.3	11.94

Frequency(MHz):				2462			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	65.62	PK	74.00	8.38	1.00	224	68.82	31.58	7.82	36.2	3.20
1	4924.00	44.37	AV	54.00	9.63	1.00	224	47.57	31.58	7.82	36.2	3.20
2	7386.00	55.82	PK	74.00	18.18	1.00	170	67.76	38.51	8.73	35.3	11.94
2	7386.00	42.31	AV	54.00	11.69	1.00	170	54.25	38.51	8.73	35.3	11.94

802.11n HT20 Mode (above 1GHz)

Frequency(MHz):				2412			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	64.52	PK	74	9.48	1.00	165	66.62	31.6	7.00	36.5	2.10
1	4824	43.21	AV	54	10.79	1.00	165	45.31	31.6	7.00	36.5	2.10
2	7236	56.26	PK	74	17.74	1.00	228	67.19	37.33	8.90	35.3	10.93
2	7236	42.75	AV	54	11.25	1.00	228	53.68	37.33	8.90	35.3	10.93

Frequency(MHz):				2412			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	62.48	PK	74	11.52	1.00	167	64.58	31.60	7.00	36.50	2.10
1	4824	45.62	AV	54	8.38	1.00	167	47.72	31.60	7.00	36.50	2.10
2	7236	54.71	PK	74	19.29	1.00	246	65.64	37.33	8.90	35.30	10.93
2	7236	42.16	AV	54	11.84	1.00	246	53.09	37.33	8.90	35.30	10.93

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	62.48	PK	74.00	11.52	1.00	150	64.60	31.02	7.60	36.5	2.12
1	4874.00	43.15	AV	54.00	10.85	1.00	150	45.27	31.02	7.60	36.5	2.12
2	7311.00	55.98	PK	74.00	18.02	1.00	98	67.06	37.28	8.60	34.8	11.08
2	7311.00	40.02	AV	54.00	13.98	1.00	98	51.10	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	63.45	PK	74.00	10.55	1.00	167	65.57	31.02	7.60	36.5	2.12
1	4874.00	44.76	AV	54.00	9.24	1.00	167	46.88	31.02	7.60	36.5	2.12
2	7311.00	56.24	PK	74.00	17.76	1.00	196	67.32	37.28	8.60	34.8	11.08
2	7311.00	41.08	AV	54.00	12.92	1.00	196	52.16	37.28	8.60	34.8	11.08

Frequency(MHz):				2462			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	62.08	PK	74.00	11.92	1.00	209	65.28	31.58	7.82	36.2	3.20
1	4924.00	43.37	AV	54.00	10.63	1.00	209	46.57	31.58	7.82	36.2	3.20
2	7386.00	55.83	PK	74.00	18.17	1.00	72	67.77	38.51	8.73	35.3	11.94
2	7386.00	41.27	AV	54.00	12.73	1.00	72	53.21	38.51	8.73	35.3	11.94


Frequency(MHz):				2462			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	63.07	PK	74.00	10.93	1.00	136	66.27	31.58	7.82	36.2	3.20
1	4924.00	44.83	AV	54.00	9.17	1.00	136	48.03	31.58	7.82	36.2	3.20
2	7386.00	54.67	PK	74.00	19.33	1.00	260	66.61	38.51	8.73	35.3	11.94
2	7386.00	42.27	AV	54.00	11.73	1.00	260	54.21	38.51	8.73	35.3	11.94

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power, 9.1.1. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.


TEST RESULTS

Type	Channel	Output power PK (dBm)	Output power AV (dBm)	Limit (dBm)	Result
802.11b	01	8.62	5.24	30.00	Pass
	06	8.52	5.16		
	11	8.05	5.12		
802.11g	01	8.32	3.19	30.00	Pass
	06	8.14	3.78		
	11	8.02	2.97		
802.11n(HT20)	01	7.62	2.28	30.00	Pass
	06	7.54	2.06		
	11	7.41	1.95		

Note: 1. The test results including the cable loss.

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 V03 Method PKPSD (peak PSD) This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST RESULTS

Type	Channel	Power Spectral Density (dBm/100KHz)	Limit (dBm/3KHz)	Result
802.11b	01	2.755	8.00	Pass
	06	2.066		
	11	2.790		
802.11g	01	-0.999	8.00	Pass
	06	-1.160		
	11	-0.976		
802.11n(HT20)	01	-2.267	8.00	Pass
	06	-2.324		
	11	-2.000		


802.11b

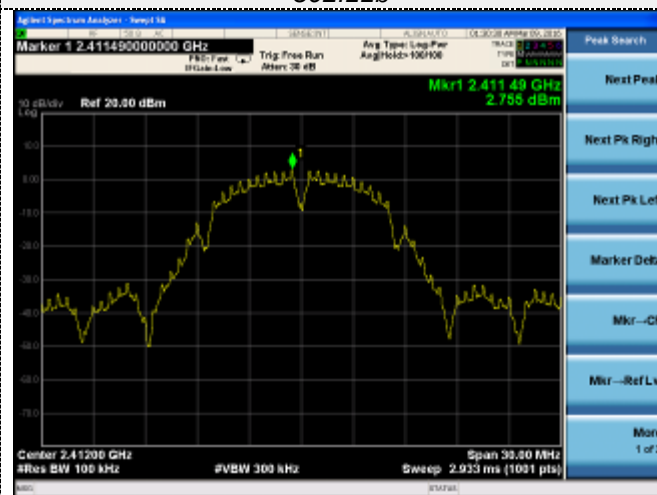


802.11g

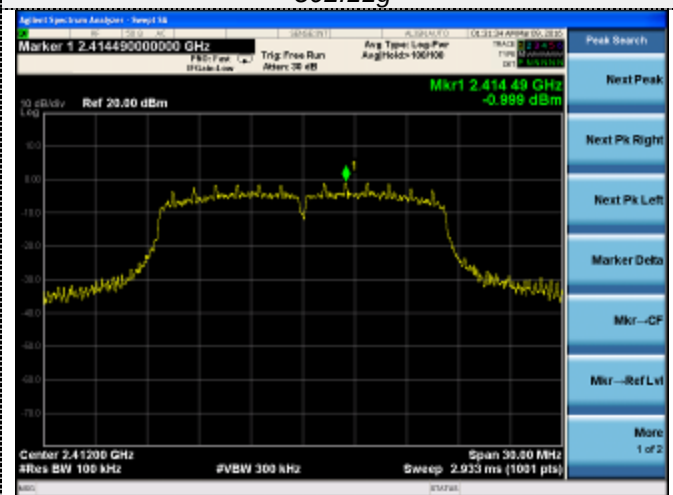


CH01

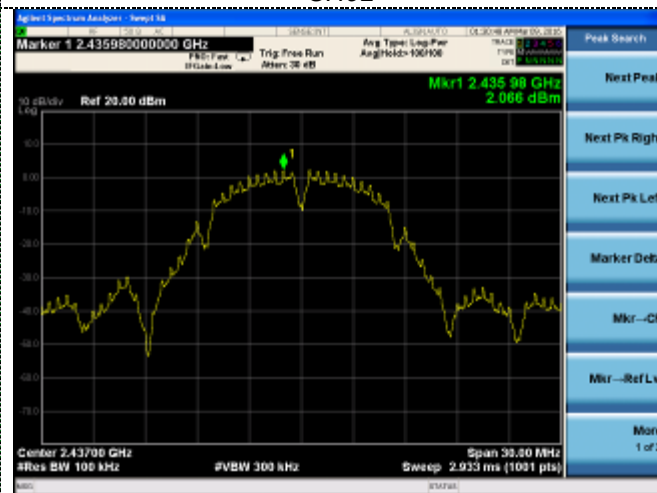


CH01

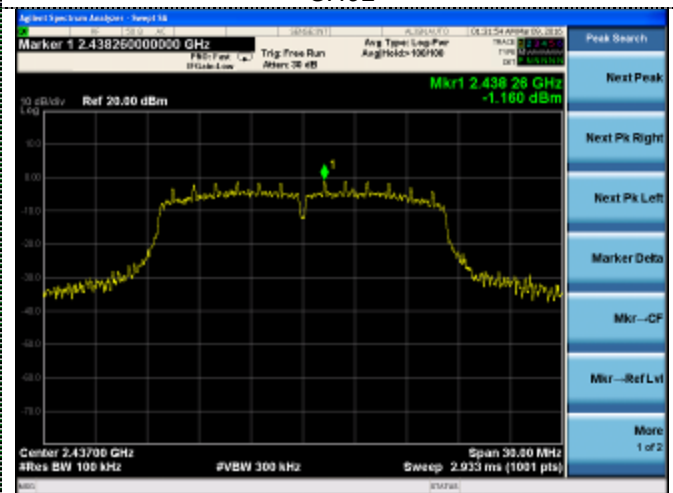

CH06

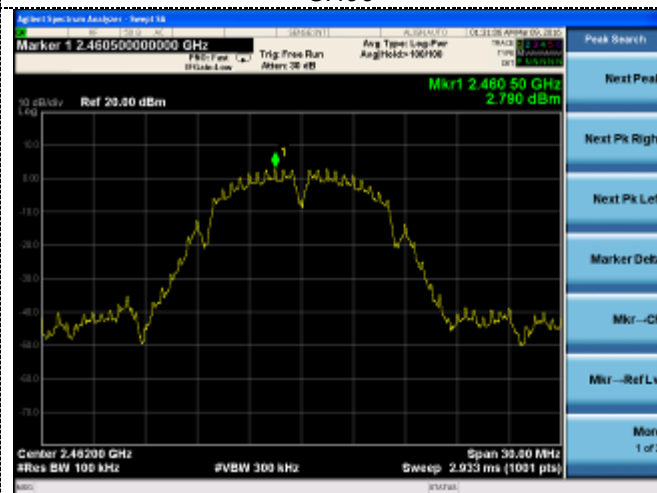

CH06

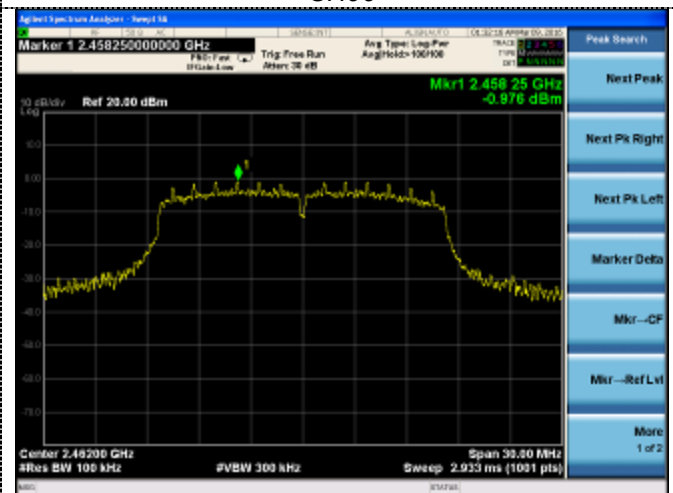

CH11



CH11



802.11nHT20



CH01




CH06



CH11

4.5. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz


TEST RESULTS

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	8.012	≥ 500	Pass
	06	8.082		
	11	8.072		
802.11g	01	15.43	≥ 500	Pass
	06	15.67		
	11	15.67		
802.11nHT20	01	15.87	≥ 500	Pass
	06	15.78		
	11	15.71		


802.11b

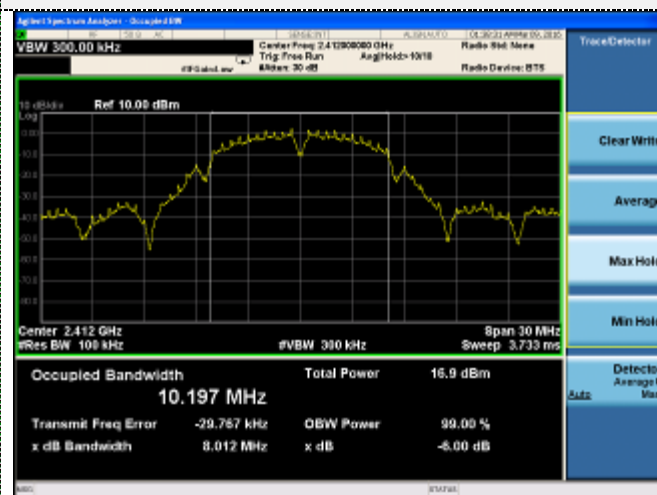


802.11g

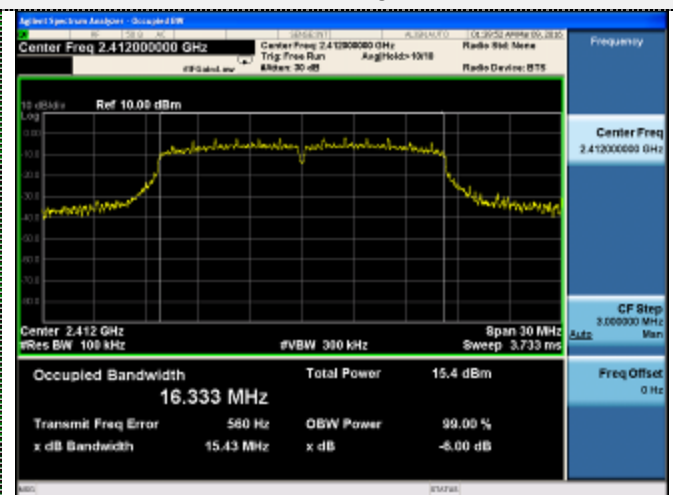


CH01

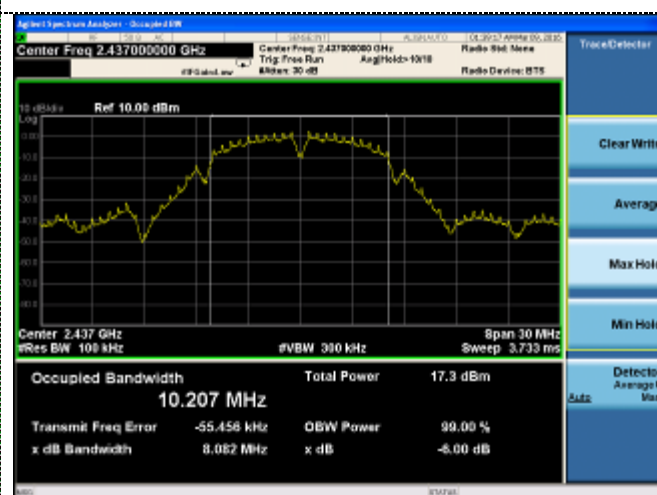


CH01

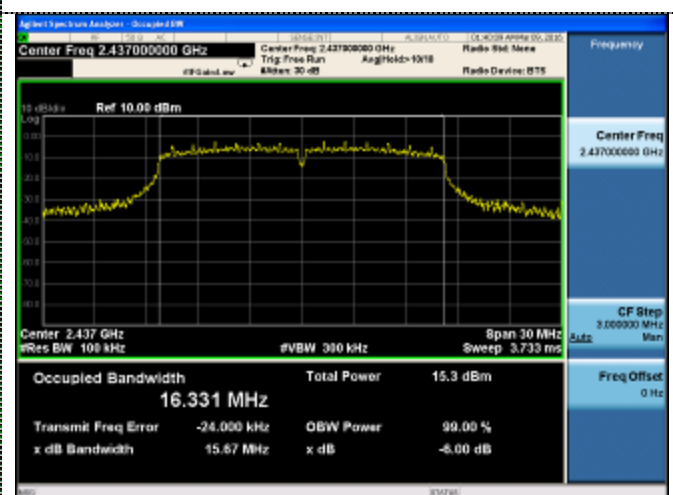

CH06

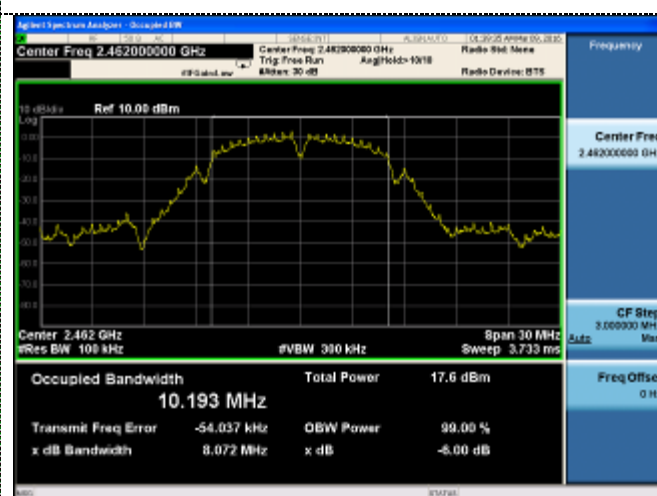

CH06

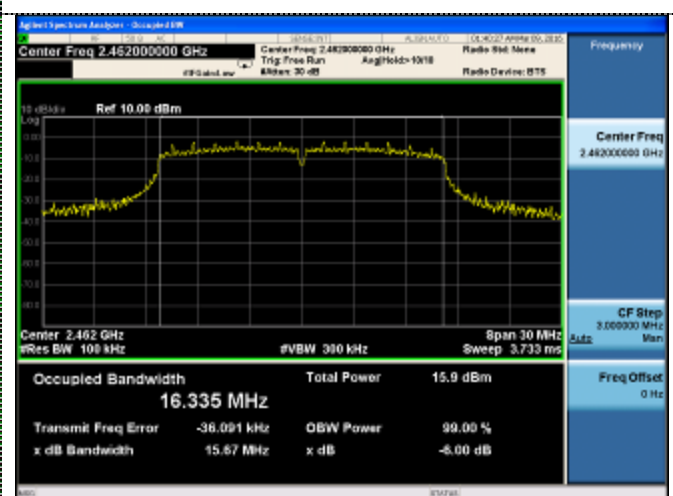


CH11




CH11




802.11n HT20

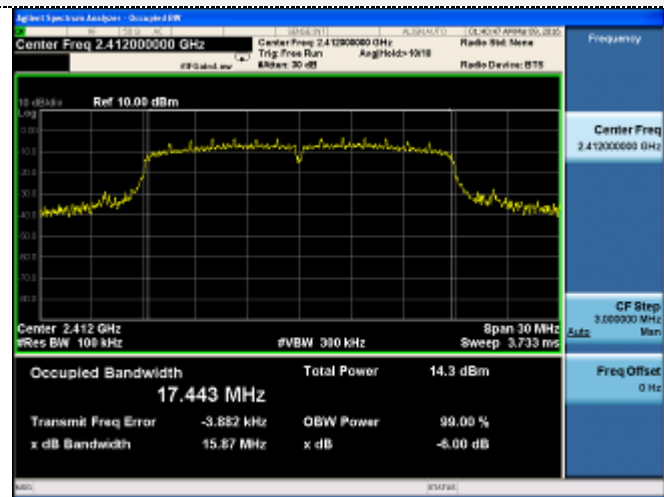

CH01

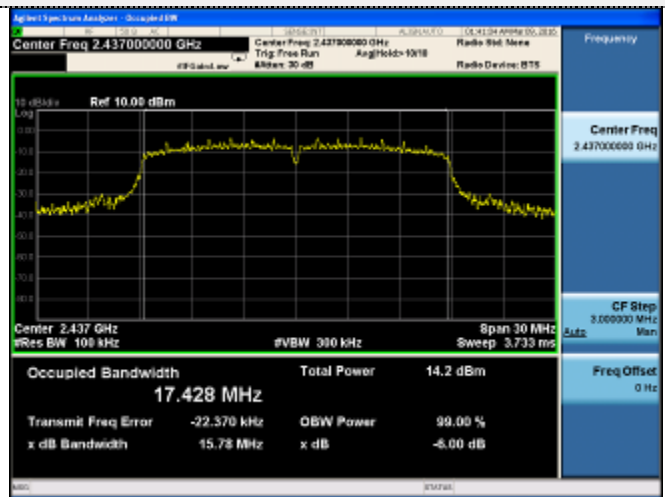

CH06

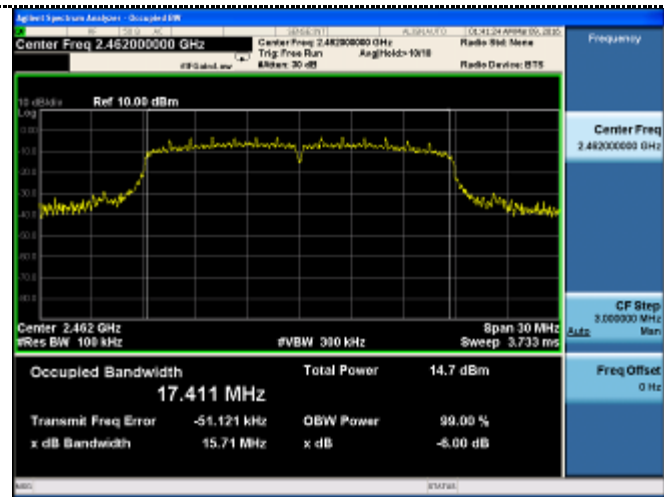

CH11

4.6. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

According to KDB 558074 D01 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test dures until all measured frequencies were complete.

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply

with the radiated emission limits specified in § 15.209(a).

TEST RESULTS

4.6.1 For Radiated Bandedge Measurement

802.11b

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	64.27	PK	74.00	9.73	1.00	104	58.96	27.49	3.32	36.12	-5.31
2390.00	42.64	AV	54.00	11.36	1.00	104	37.33	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	63.26	PK	74.00	10.74	1.00	236	57.95	27.49	3.32	36.12	-5.31
2390.00	41.05	AV	54.00	12.95	1.00	236	35.74	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	63.75	PK	74.00	10.25	1.00	245	58.03	27.45	3.38	36.55	-5.72
2483.50	42.04	AV	54.00	11.96	1.00	245	36.32	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	62.16	PK	74.00	11.84	1.00	106	56.44	27.45	3.38	36.55	-5.72
2483.50	40.34	AV	54.00	13.66	1.00	106	34.62	27.45	3.38	36.55	-5.72

802.11g


Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	62.57	PK	74.00	11.43	1.00	158	57.26	27.49	3.32	36.12	-5.31
2390.00	40.67	AV	54.00	13.33	1.00	158	35.36	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	64.51	PK	74.00	9.49	1.00	96	59.20	27.49	3.32	36.12	-5.31
2390.00	43.64	AV	54.00	10.36	1.00	96	38.33	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	63.52	PK	74.00	10.48	1.00	172	57.80	27.45	3.38	36.55	-5.72
2483.50	42.68	AV	54.00	11.32	1.00	172	36.96	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	62.64	PK	74.00	11.36	1.00	136	56.92	27.45	3.38	36.55	-5.72
2483.50	43.61	AV	54.00	10.39	1.00	136	37.89	27.45	3.38	36.55	-5.72

802.11n HT20

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	64.52	PK	74.00	9.48	1.00	182	59.21	27.49	3.32	36.12	-5.31
2390.00	43.98	AV	54.00	10.02	1.00	182	38.67	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	63.35	PK	74.00	10.65	1.00	162	58.04	27.49	3.32	36.12	-5.31
2390.00	44.60	AV	54.00	9.40	1.00	162	39.29	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	62.84	PK	74.00	11.16	1.00	195	57.12	27.45	3.38	36.55	-5.72
2483.50	46.14	AV	54.00	7.86	1.00	195	40.42	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	63.09	PK	74.00	10.91	1.00	214	57.37	27.45	3.38	36.55	-5.72
2483.50	43.05	AV	54.00	10.95	1.00	214	37.33	27.45	3.38	36.55	-5.72

4.6.2 For Conducted Bandedge Measurement



802.11b			
Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2400.00	-42.78	-20	PASS
2483.50	-56.53	-20	PASS

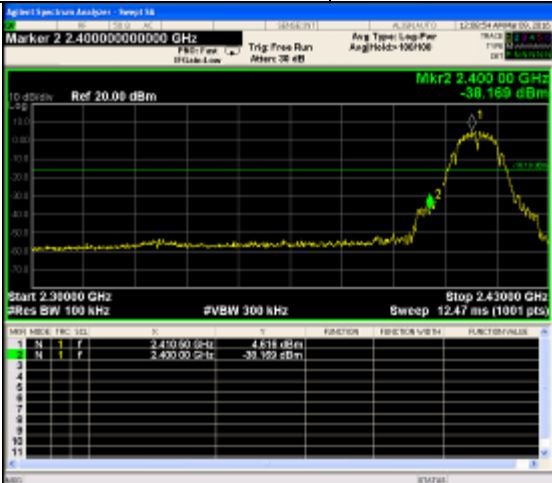

2412




2462

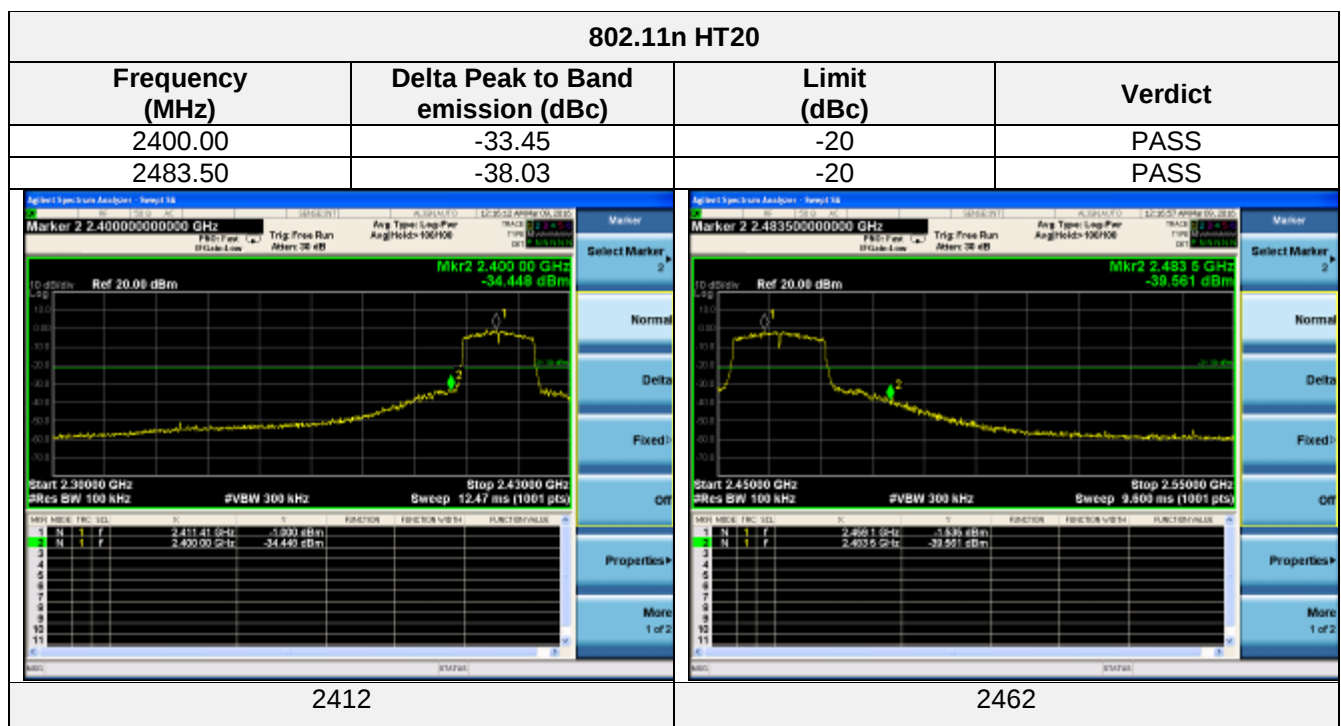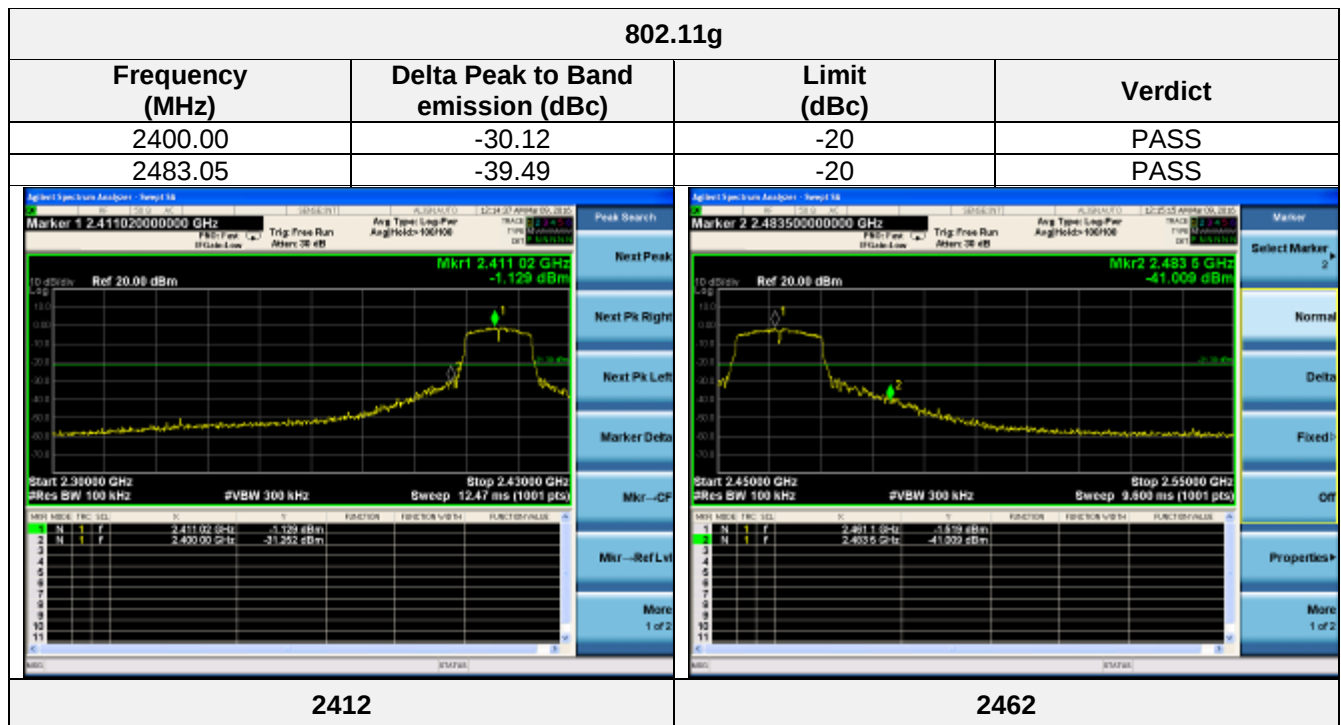

4.7. Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300kHz to measure the peak field strength, and measure frequency range from 9kHz to 25GHz.



LIMIT


1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.



TEST RESULTS

Remark: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.




The spurious emissions of the 9 kHz to 30MHz are Background and lower than Limit, so we don't record it.

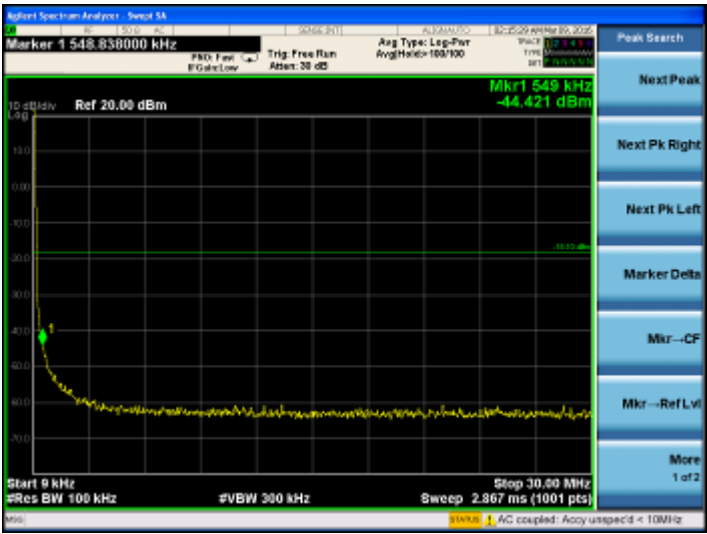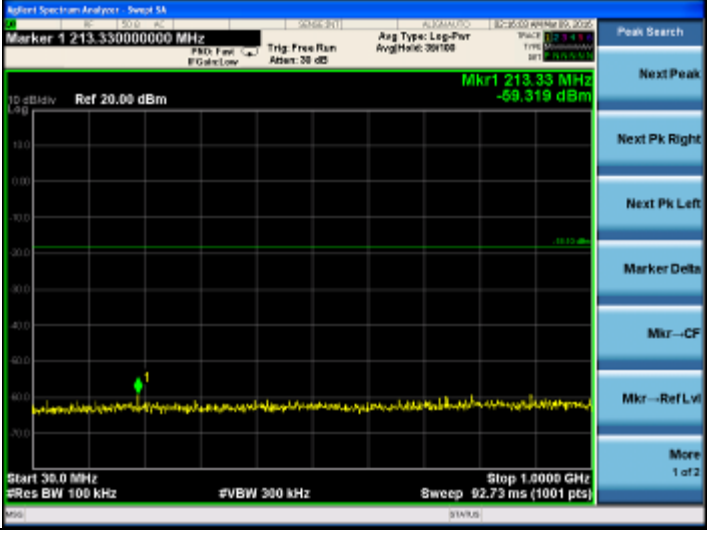Test Mode:	802.11b	Test channel :	01
			
Channel 01			
			
9KHz~30MHz			
			
30M Hz~1GHz			



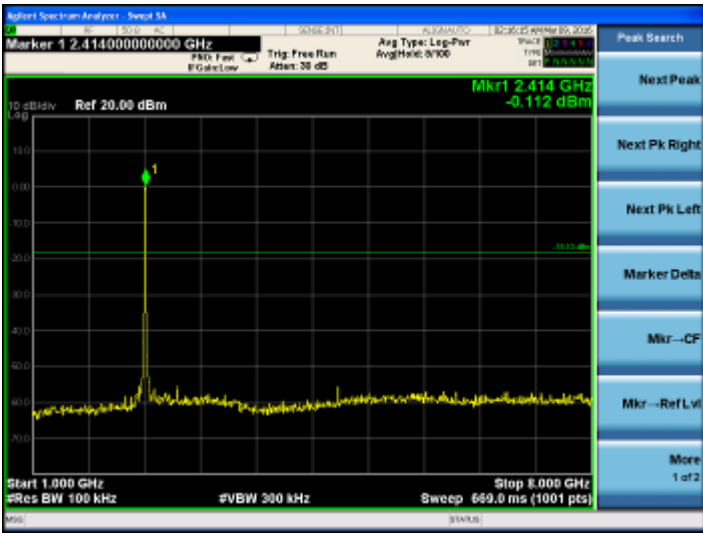
Test Mode:	802.11b	Test channel :	01
			
1G Hz~8GHz			
			
8GHz~16GHz			
			
16Gz~25GHz			

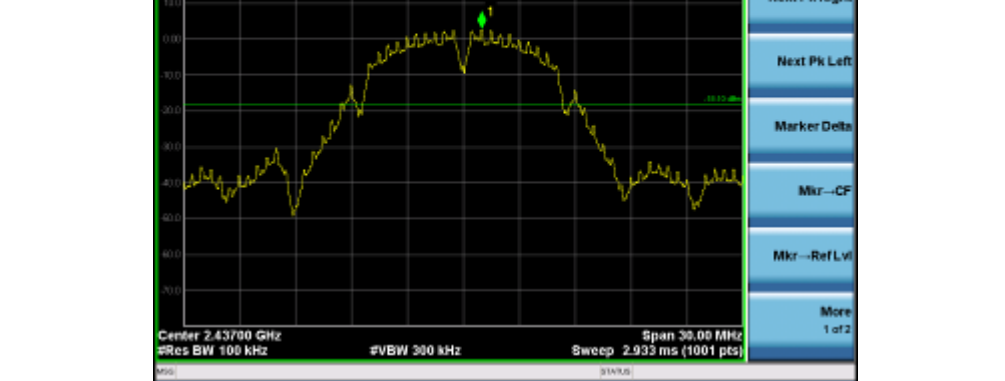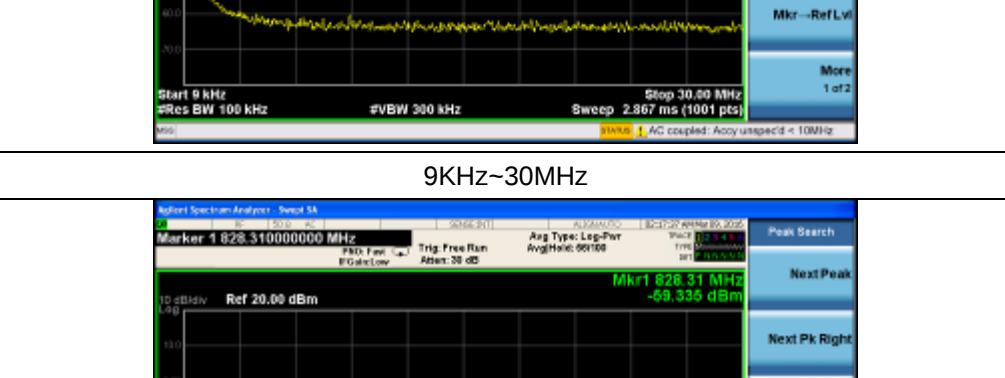Test Mode:	802.11b	Test channel :	06
			
Channel 06			
			
9KHz~30MHz			
			
30M Hz~1GHz			




Test Mode:	802.11b	Test channel :	06
1G Hz~8GHz			
8GHz~16GHz			
16Gz~25GHz			

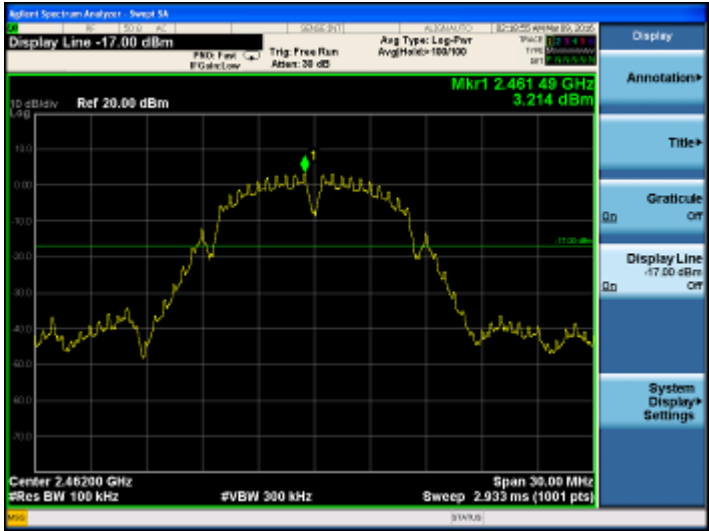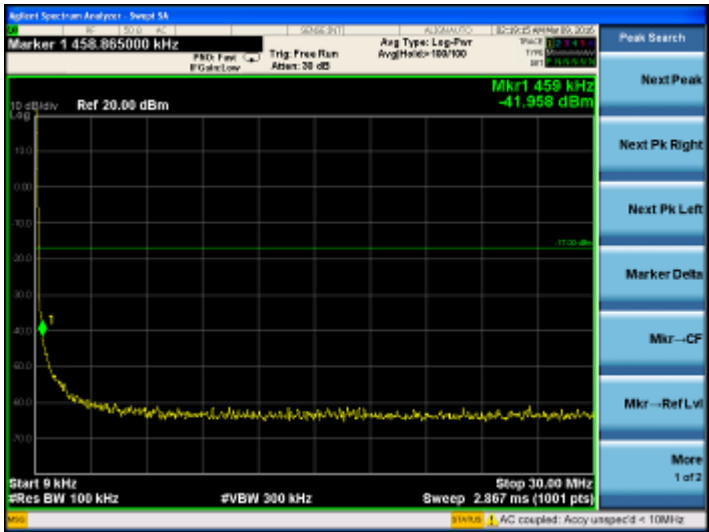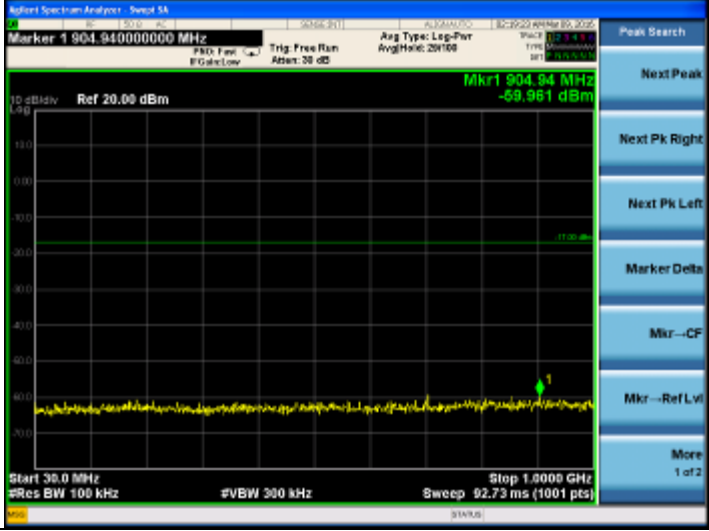Test Mode:	802.11b	Test channel :	11
			
Channel 11			
			
9KHz~30MHz			
			
30M Hz~1GHz			




Test Mode:	802.11b	Test channel :	11
1G Hz-8GHz			
8GHz-16GHz			
16Gz-25GHz			

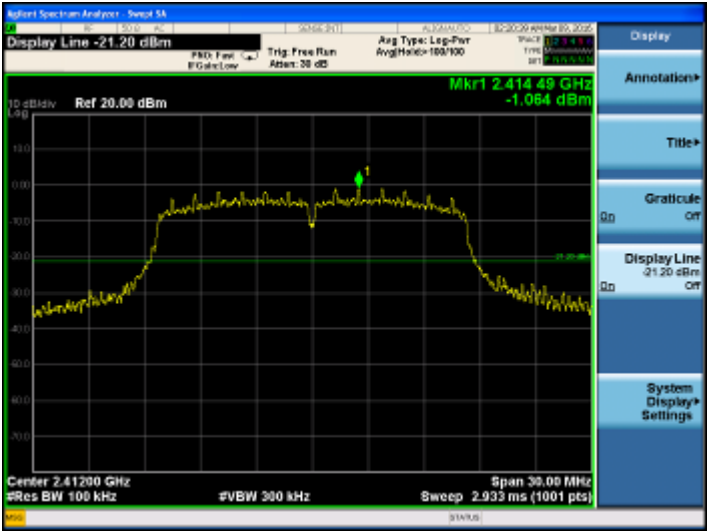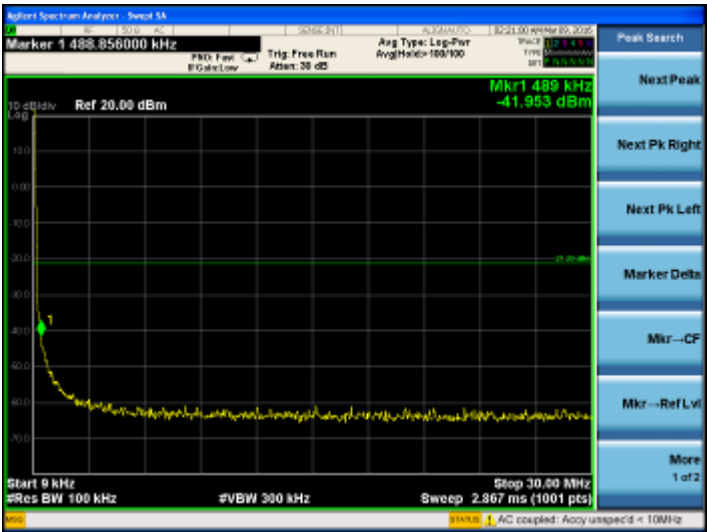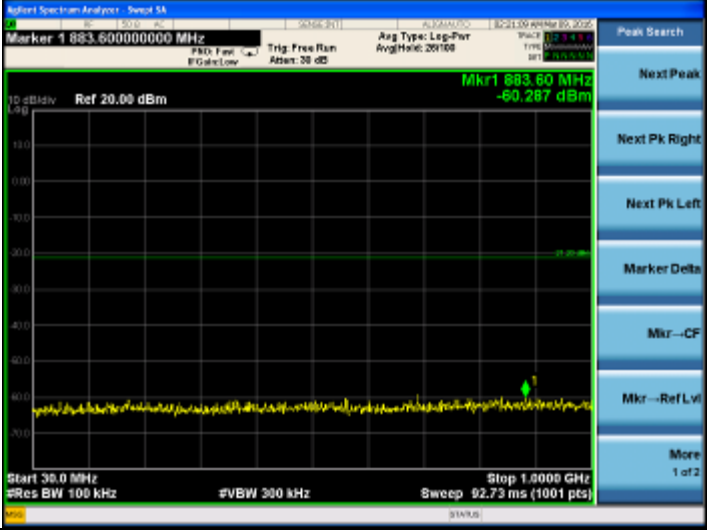Test Mode:	802.11g	Test channel :	01
			
Channel 01			
			
9KHz~30MHz			
			
30M Hz~1GHz			



16Gz~25GHz

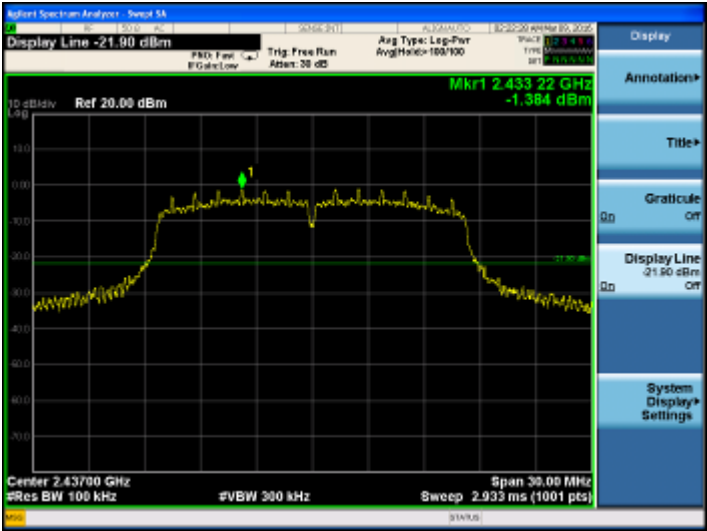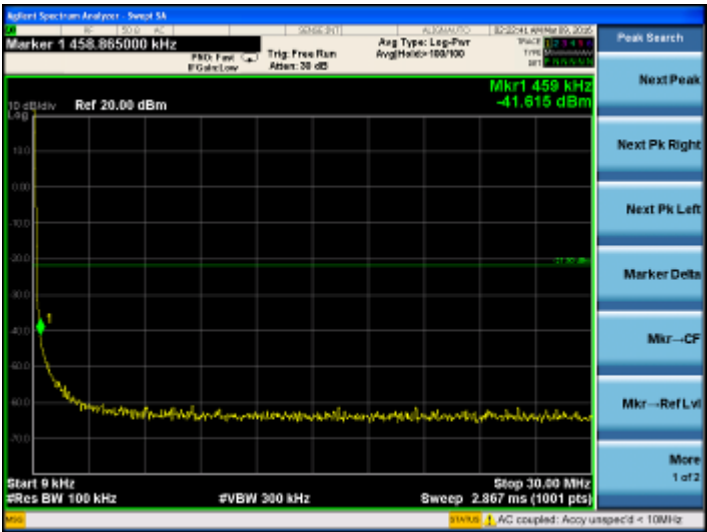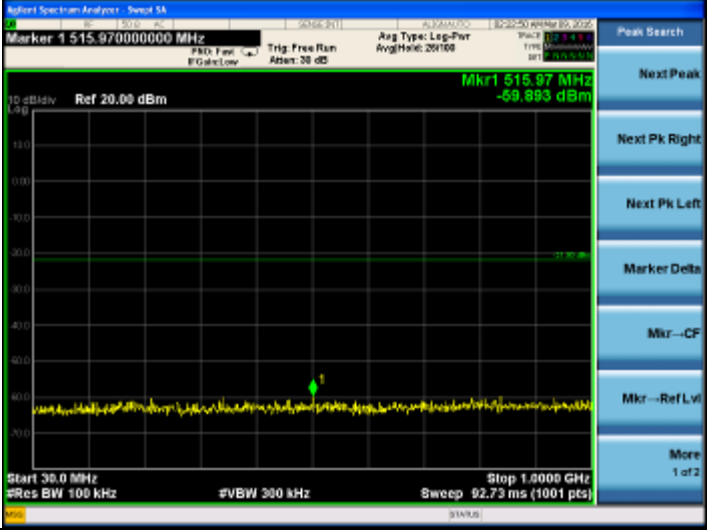Test Mode:	802.11g	Test channel :	06
			
Channel 06			
			
9KHz~30MHz			
			
30M Hz~1GHz			

Test Mode:	802.11g	Test channel :	06
1G Hz~8GHz			
8GHz~16GHz			
16Gz~25GHz			

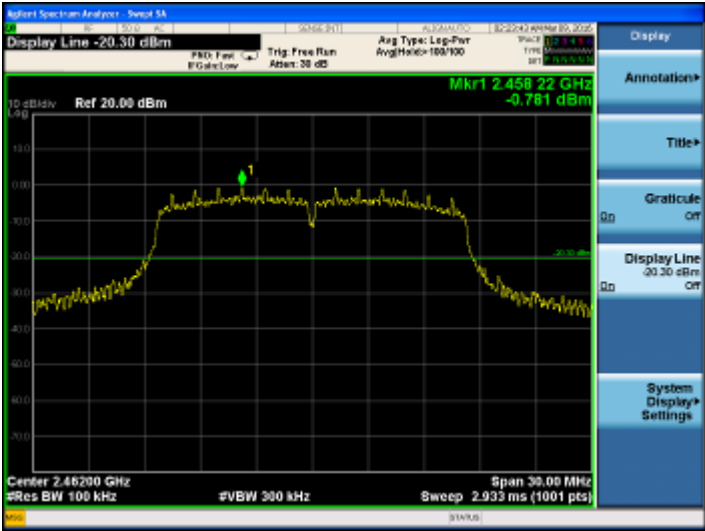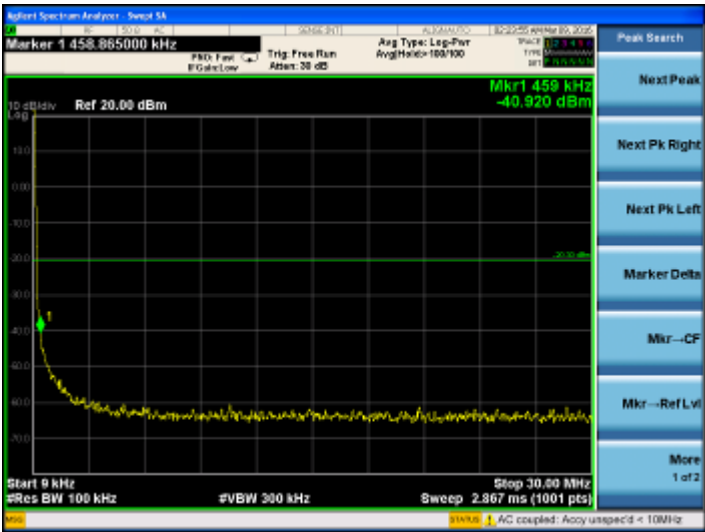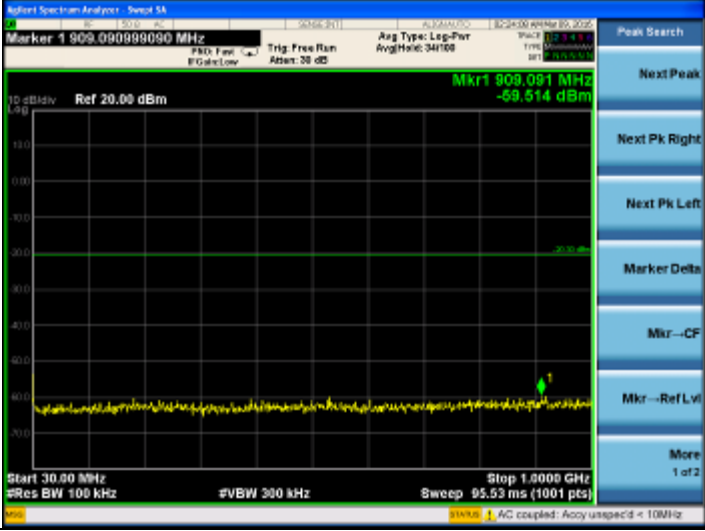Test Mode:	802.11g	Test channel :	11
			
Channel 11			
			
9KHz~30MHz			
			
30M Hz~1GHz			

16Gz~25GHz

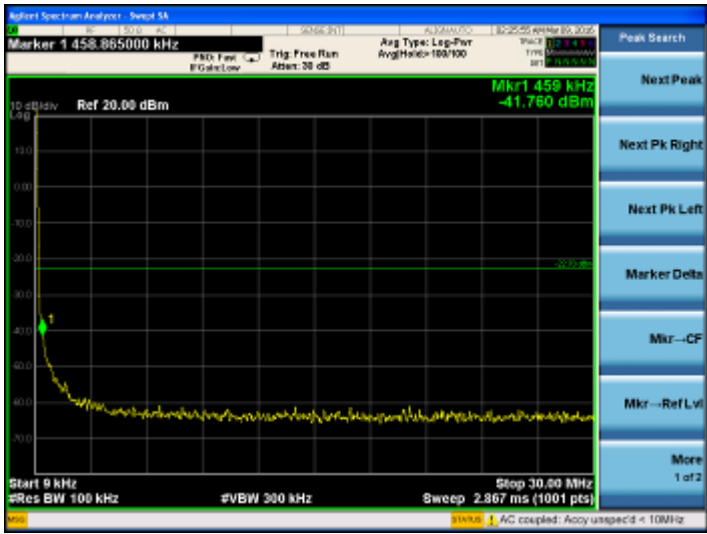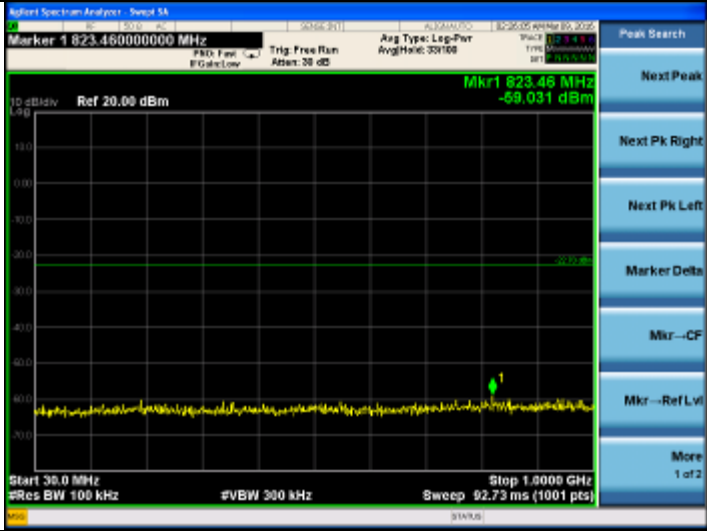Test Mode:	802.11n HT20	Test channel :	01
			
Channel 01			
			
9KHz~30MHz			
			
30M Hz~1GHz			

Test Mode:	802.11n HT20	Test channel :	01
1G Hz~8GHz			
8GHz~16GHz			
16Gz~25GHz			

Test Mode:	802.11n HT20	Test channel :	06
------------	--------------	----------------	----

Channel 06

9KHz~30MHz

30M Hz~1GHz

16Gz~25GHz

Channel 11

Test Mode:	802.11n HT20	Test channel :	11
------------	--------------	----------------	----

The figure displays three sequential screenshots of a Spectrum Analyzer, each showing a different frequency range and a detected signal peak. The analyzer interface includes a top status bar with various settings, a main plot area with a logarithmic scale, and a right-hand control panel.

- Top Screenshot:** The frequency range is from 1.000 GHz to 8.000 GHz. A sharp peak is visible at 2.463 GHz, with a power level of -5.750 dBm. The reference level is set to 20.00 dBm.
- Middle Screenshot:** The frequency range is from 8.000 GHz to 16.000 GHz. A peak is visible at 15.580 GHz, with a power level of -54.199 dBm. The reference level is set to 20.00 dBm.
- Bottom Screenshot:** The frequency range is from 16.000 GHz to 25.000 GHz. A peak is visible at 24.505 GHz, with a power level of -47.755 dBm. The reference level is set to 20.00 dBm.

Each screenshot shows the following parameters:

- Marker 1:** 2.463000000000 GHz, 15.580000000000 GHz, and 24.505000000000 GHz respectively.
- Ref:** 20.00 dBm
- Start:** 1.000 GHz, 8.000 GHz, and 16.000 GHz respectively.
- Stop:** 8.000 GHz, 16.000 GHz, and 25.000 GHz respectively.
- Res BW:** 100 kHz
- #VBW:** 300 kHz
- Sweep:** 669.0 ms (1001 pts), 764.6 ms (1001 pts), and 860.1 ms (1001 pts) respectively.

4.8. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold


Limits

Antenna Gain	6 dBi
--------------	-------

Results

T_{nom}	V_{nom}	Lowest Channel 2412 MHz	Middle Channel 2437 MHz	Highest Channel 2462 MHz
Conducted power [dBm] Measured with DSSS modulation		8.62	8.52	8.05
Radiated power [dBm] Measured with DSSS modulation		10.29	10.10	9.88
Gain [dBi] Calculated		1.67	1.58	1.83
Measurement uncertainty		± 0.6 dB (cond.) / ± 4.32 dB (rad.)		



5. Test Setup Photos of the EUT


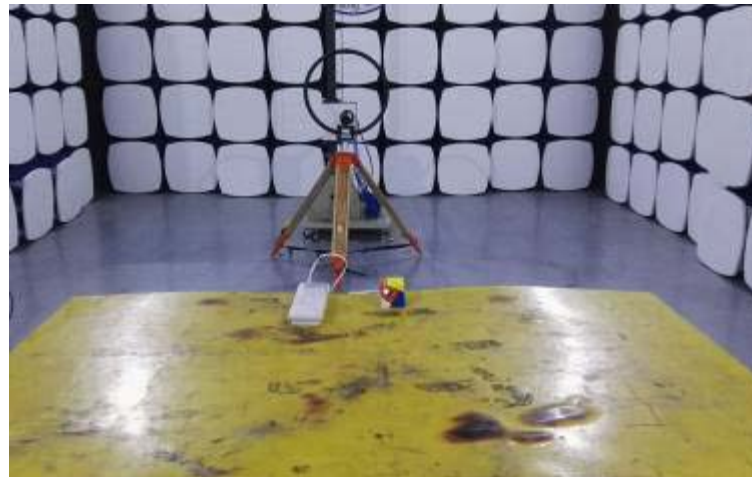




6. External and Internal Photos of the EUT


External Photos

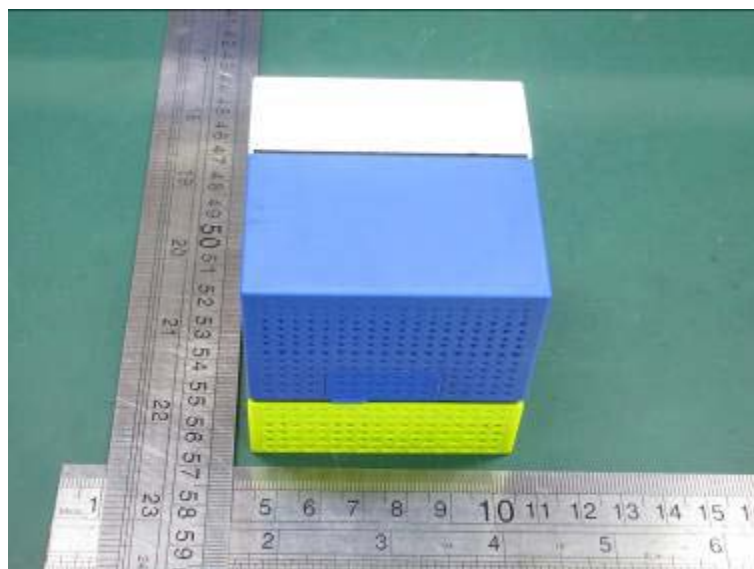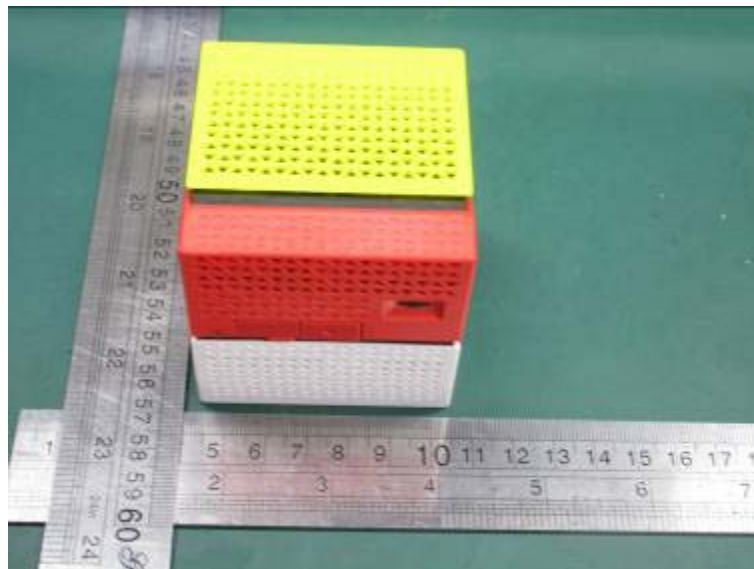

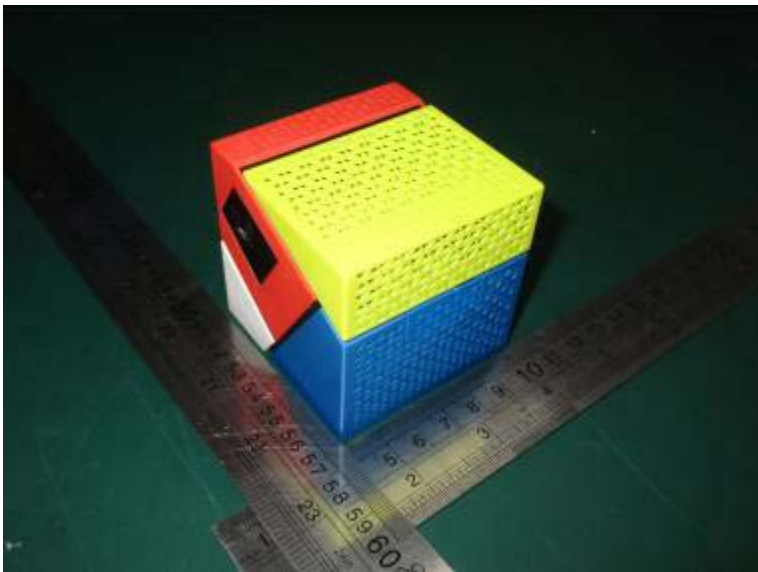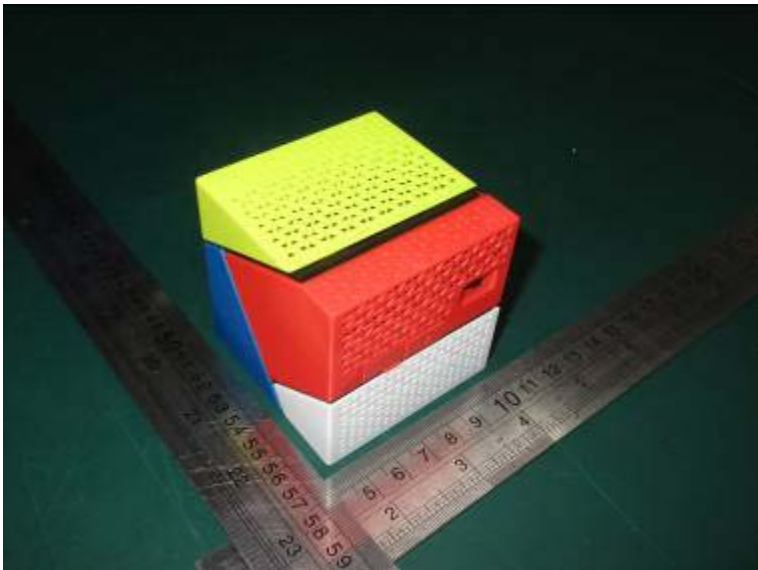







Internal Photos

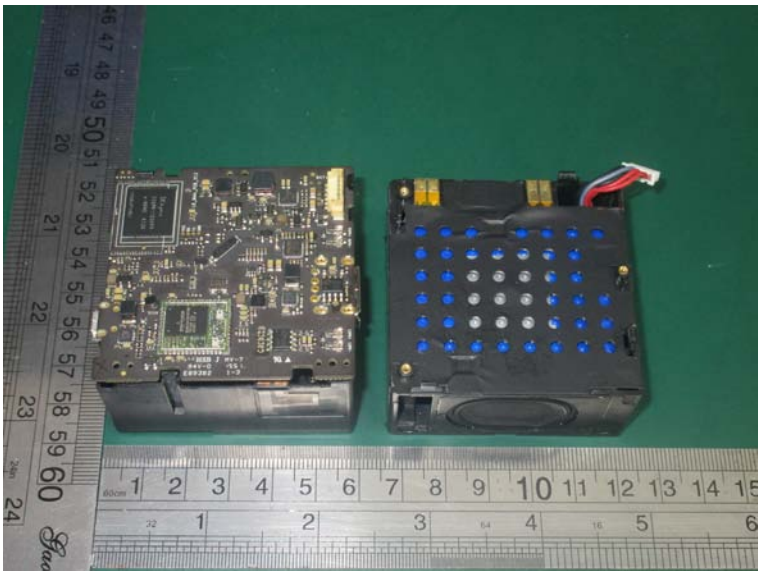




WIFI
Antenna

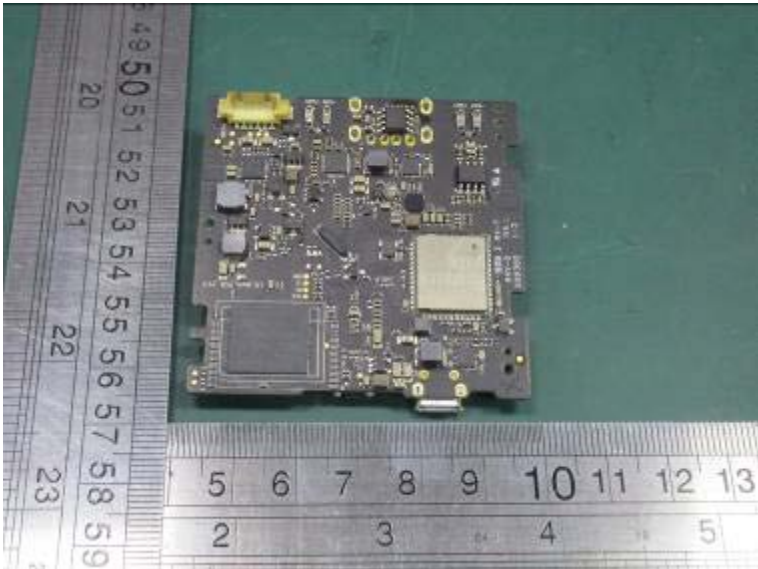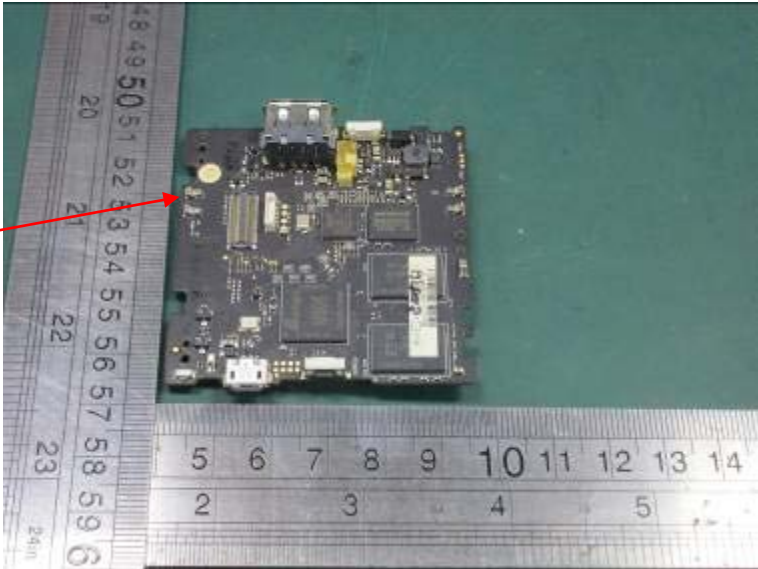

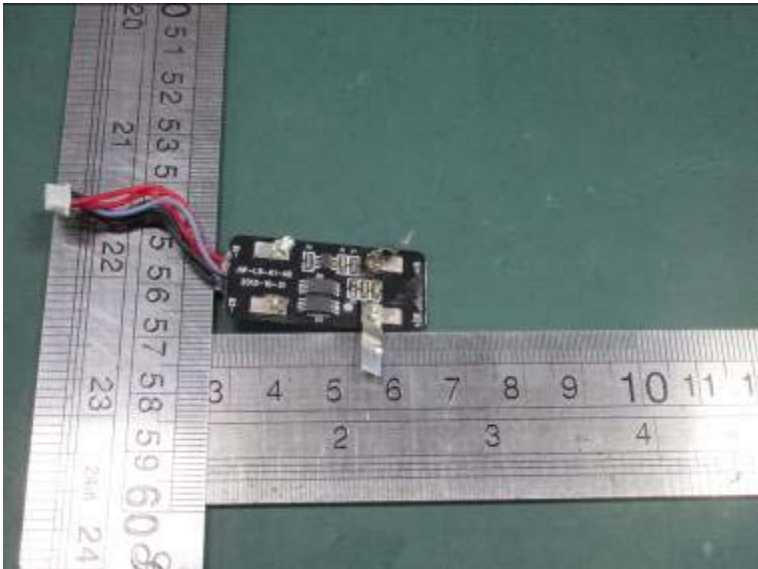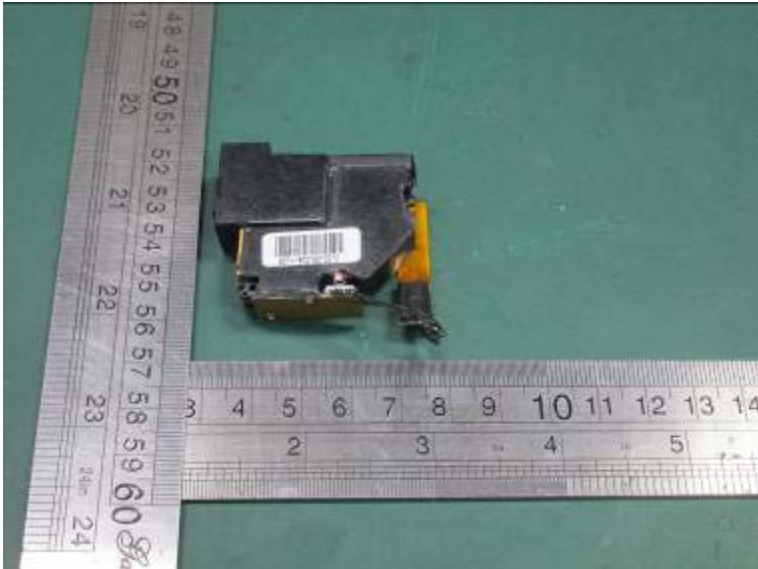

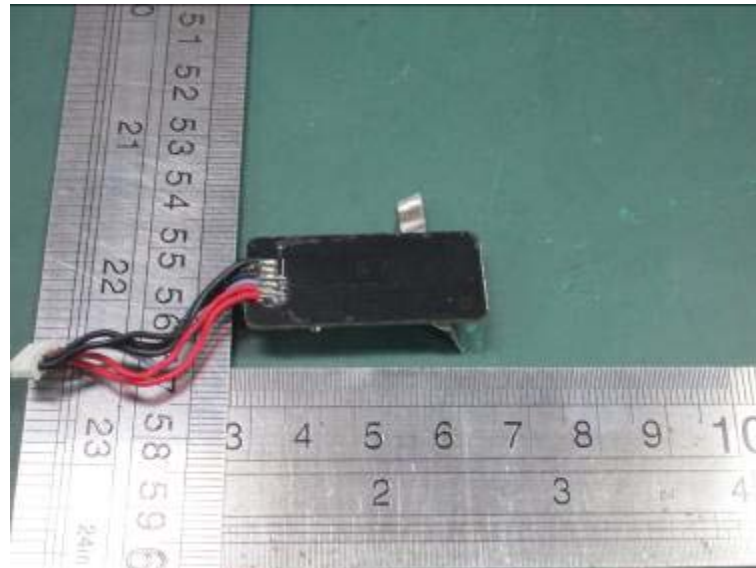

.....End of Report.....