1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District, Shenzhen, Guangdong

TEST REPORT

47 CFR FCC Part 15 Subpart B (Class B)

Radio Frequency Devices - Unintentional Radiators - Limits and methods of measurement

ANSI C63.4: 2014

American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Report Reference No	GTSR16020032					
FCC ID:	2AHMXDOOGEEP1					
Compiled by		1				
(position+printed name+signature):	File administrators Jimmy Wang	Jon Mey				
Supervised by	•					
(position+printed name+signature):	Test Engineer Peter Xiao	Peter Lion				
Approved by (printed name + signature):	Manager Sam Wang	Peter Lion Son Was				
Date of issue:	Mar. 21, 2016					
Representative Laboratory Name.:	Shenzhen Global Test Service Co.,Ltd.					
Address:	1F, Building No. 13A, Zhonghaix No.12,6 Road, Ganli Industrial Pa Shenzhen, Guangdong					
Applicant's name	Shenzhen DOOGEE TONG WEI	Tech Co.,Ltd.				
Address:	The Forth and Fifth floor of the we Sangda estate, Zhehua Road, Hua Shenzhen	•				
Test specification:						
Standard:	47 CFR FCC Part 15 Subpart B (Class B)					
	ANSI C63.4: 2014					
TRF Originator:	: Shenzhen Global Test Service Co.,Ltd.					
Master TRF:						
Shenzhen Global Test Service Co.,L	td. All rights reserved.					

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description:	Smart projector
Trade Mark:	DCOGEE
Manufacturer	Shenzhen DOOGEE TONG WEI Tech Co.,Ltd.
Model/Type reference	DOOGEE P1
Listed Models:	/
Ratings:	Input:AC100-240V,50/60Hz,0.5A
	Output:DC5V,2A
Result:	Pass

Report No.: GTSR16020032 Page 2 of 21

TEST REPORT

Test Report No. :	GTSR16020032	Mar. 21, 2016
	G13K10020032	Date of issue

Equipment under Test : Smart projector

Model /Type : DOOGEE P1

Listed Models : /

Applicant : Shenzhen DOOGEE TONG WEI Tech Co.,Ltd.

Address : The Forth and Fifth floor of the western Room 412, plant

405, Sangda estate, Zhehua Road, Huaqiang North

street, Futian Dis. Shenzhen

Manufacturer Shenzhen DOOGEE TONG WEI Tech Co.,Ltd.

Address The Forth and Fifth floor of the western Room 412, plant

405, Sangda estate, Zhehua Road, Huaqiang North

street, Futian Dis. Shenzhen

|--|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Report No.: GTSR16020032 Page 3 of 21

Contents

SUMMARY	
General Remarks	5
Equipment Under Test	5
Short description of the Equipment under Test (EUT)	5 5
EUT operation mode	5
EUT configuration	5
TEST ENVIRONMENT	
Address of the test laboratory	6
Test Facility	6
Environmental conditions	6
Test Description	6
Statement of the measurement uncertainty	7
Equipments Used during the Test	7
TEST CONDITIONS AND RESULTS	
Radiated Emission	8
Conducted disturbance	13
TEST SETUP PHOTOS OF THE EUT	1

Report No.: GTSR16020032 Page 4 of 21

1. TEST STANDARDS

The tests were performed according to following standards:

<u>47 CFR FCC Part 15 Subpart B (Class B)</u> Radio Frequency Devices – Unintentional Radiators – Limits and methods of measurement

ANSI C63.4: 2014 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

Report No.: GTSR16020032 Page 5 of 21

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Mar. 01, 2016
Testing commenced on	:	Mar. 01, 2016
Testing concluded on	:	Mar. 21, 2016

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	0	120V / 60 Hz	0	230V / 50Hz	
		0	12 V DC			
		•	Other (specified in blank below)			

USB 5V From PC

2.3. Short description of the Equipment under Test (EUT)

The EUT is a Smart projector.

2.4. EUT operation mode

Operation mod	de
Mode 1	Data transmission

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- O Supplied by the lab

0	COMPUTER	M/N:	P5240
		Manufacturer:	DELL
0	LCD	M/N:	E177FPB
		Manufacturer:	DELL
0	Mouse	M/N:	M230
		Manufacturer:	DELL
0	LASER PRINTER	M/N:	HP LASERJET 1020 PLUS
		Manufacturer:	HP

Report No.: GTSR16020032 Page 6 of 21

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District, Shenzhen, Guangdong

Shenzhen CTL Testing Technology Co., Ltd.

1/F.-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, Guangdong, China

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 964637

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 964637, Jul 24, 2015.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2018.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4. Test Description

Emission Measurement		
Radiated Emission	47 CFR FCC Part 15 Subpart B Class B ANSI C63.4 2014	PASS
Conducted Disturbance	47 CFR FCC Part 15 Subpart B Class B ANSI C63.4 2014	PASS

Remark: N/A means "not applicable".

The measurement uncertainty is not included in the test result.

Report No.: GTSR16020032 Page 7 of 21

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~18GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.12dB	(1)

⁽¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2015/05/28	2016/05/27
LISN	R&S	ESH2-Z5	893606/008	2015/05/27	2016/05/26
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	101102	2015/06/26	2016/06/25
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Temperature/Humidi ty Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
RF Cable	HUBER+SUHNE R	RG214	N/A	2015/05/20	2016/05/19

The calibration interval was one year.

Report No.: GTSR16020032 Page 8 of 21

4. TEST CONDITIONS AND RESULTS

4.1. Radiated Emission

4.1.1. LIMITS OF DISTURBANCE (Class B)


Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dBμV/m)
30 ~ 88	3	40
88~216	3	43.5
216 ~ 960	3	46
Above 960 PK	3	54
Above 960 AV	3	74

Note: (1) The tighter limit shall apply at the edge between two frequency bands.


(2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

4.1.2. TEST CONFIGURATION

Frequency range 30MHz - 1000MHz

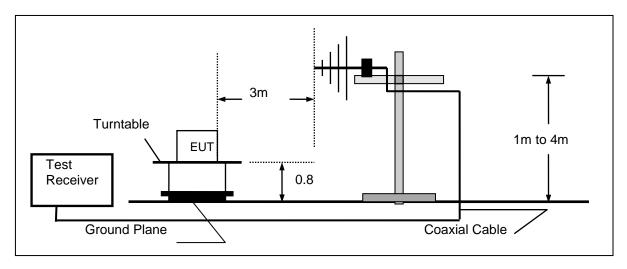

Frequency range above 1GHz

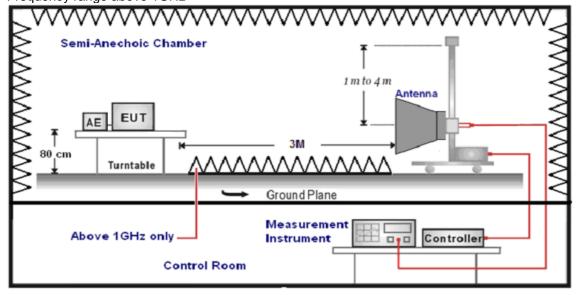

Report No.: GTSR16020032 Page 9 of 21

4.1.3. TEST PROCEDURE

EUT is tested in Semi-Anechoic Chamber. EUT is placed on a nonmetal table which is 0.8 meter above a grounded turntable. The turntable can rotate 360 degrees to determine the azimuth of the maximum emission level. EUT is set 3 meters away from the center of receiving antenna. The antenna can move up and down from 1 to 4 meter to find out the maximum emission level. Both horizontal and vertical polarizations of the antenna are set on the test.

4.1.4. CLIMATIC CONDITIONS

■ ambient temperature : 24 °C

relative humidity: 48%


atmospheric pressure: 960 mbar

4.1.5. TEST RESULTS


Remark: The highest frequency of the internal sources of the EUT is more than 108 MHz, the measurement shall only be made up to 6GHz. (Work frequency: 500MHz)

Test site: Shenzhen CTL Testing Technology Co., Ltd


Report No.: GTSR16020032 Page 10 of 21

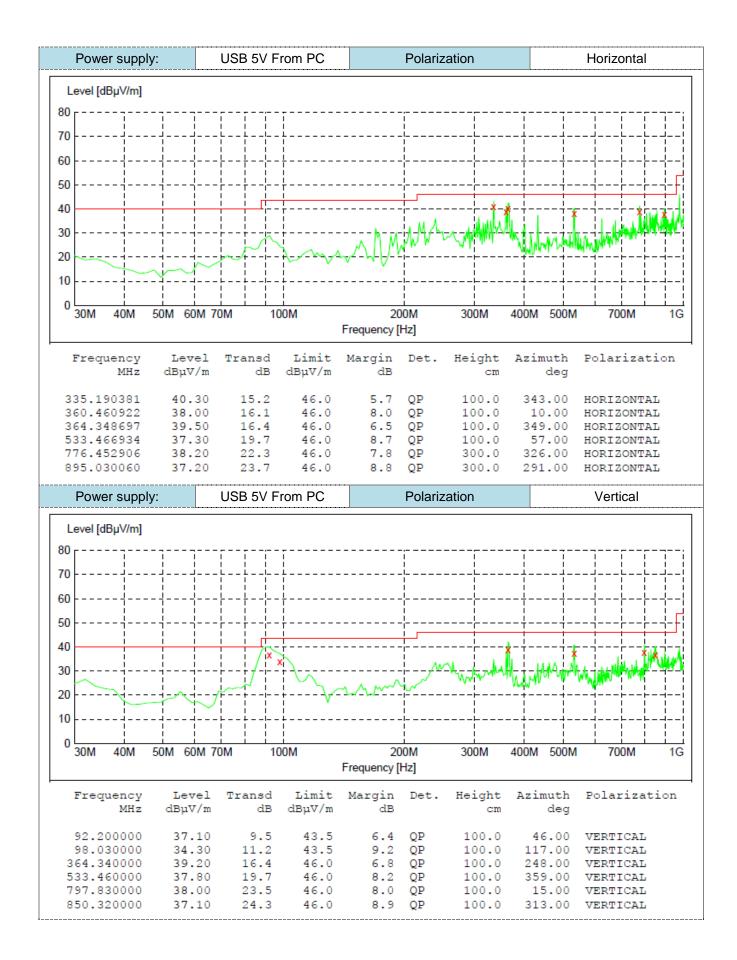

Report No.: GTSR16020032 Page 11 of 21

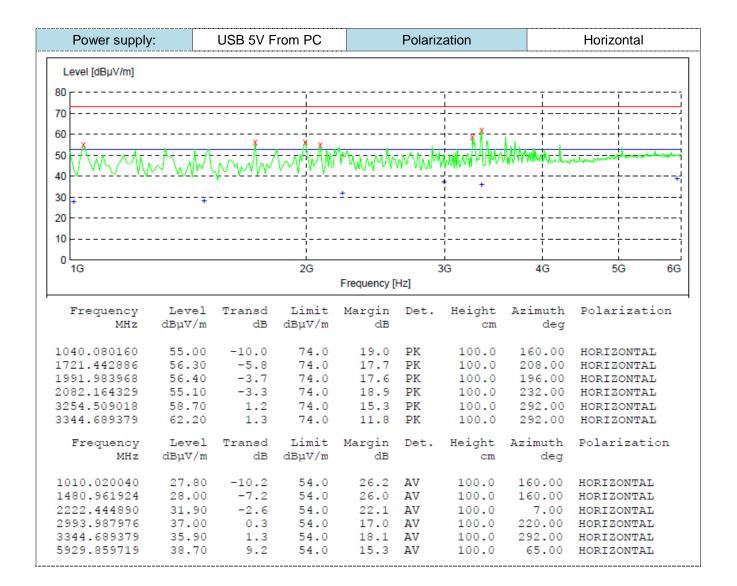

Report No.: GTSR16020032 Page 12 of 21

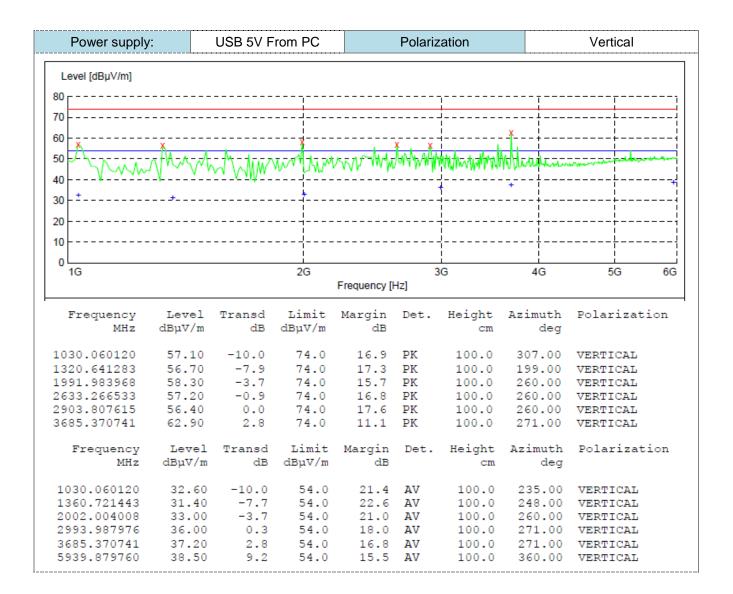

Report No.: GTSR16020032 Page 13 of 21


4.2. Conducted disturbance

4.2.1. LIMITS OF DISTURBANCE (Class B)

Fraguency Bango (MUz)	Limits (dBuV)			
Frequency Range (MHz)	Quasi-Peak	Average		
0.150~0.500	66~56	56~46		
0.500~5.000	56	46		
5.000~30.000	60	50		

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

4.2.2. TEST CONFIGURATION

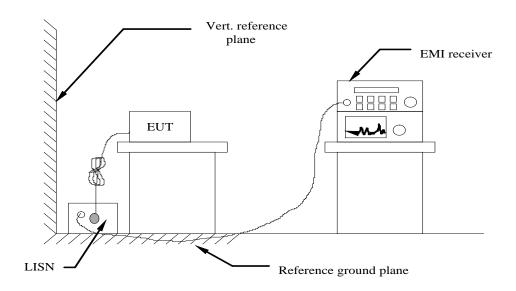

4.2.3. TEST PROCEDURE

EUT is placed on a nonmetal table which is 0.8 meter (or 0.1 meter for floor-stood equipments) above the grounded reference plane. Connect the power line of the EUT to the LISN. Voltage of the power supply is varied over a range of 0.9 to 1.1 times of the rated voltage in order to check whether the level of disturbance varies considerably with the supply voltage at the selected frequency about 160KHz. Perform an initial measurement on each line with peak detector to identify the frequencies where the maximum disturbances may occur. Then measure and record the maximum disturbances with quasi-peak and average detector.

4.2.4. CLIMATIC CONDITIONS


■ ambient temperature : 25 °C

■ relative humidity: 52%

atmospheric pressure: 960 mbar

4.2.5. TEST RESULTS

Report No.: GTSR16020032 Page 14 of 21

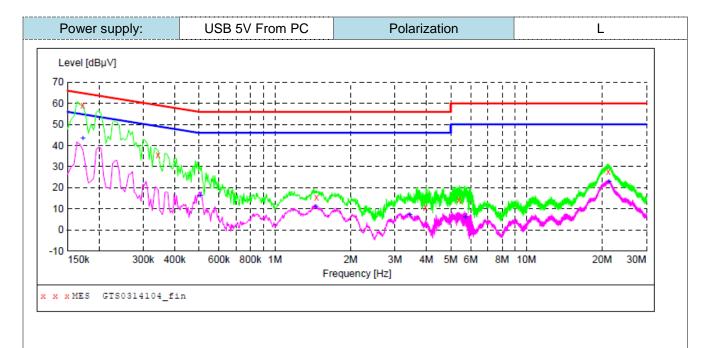


MEASUREMENT RESULT: "GTS0314104_fin"

3	3/14/2016 4:48PM								
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
	0.172500	59.10	10.0	65	5.7	QP	L1	GND	
	0.343500	35.50	9.9	59	23.6	QP	L1	GND	
	1.464000	15.60	9.6	56	40.4	QP	L1	GND	
	3.970500	10.90	9.4	56	45.1	QP	L1	GND	
	5.383500	14.40	9.3	60	45.6	QP	L1	GND	
	21 106500	27 80	7 0	60	32 2	OP	T.1	GND	

MEASUREMENT RESULT: "GTS0314104 fin2"

3/14/2016 4:48PM								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.172500	43.40	10.0	55	11.4	AV	L1	GND	
0.505500	16.30	9.8	46	29.7	AV	L1	GND	
1.455000	11.10	9.6	46	34.9	AV	L1	GND	
3.439500	7.30	9.4	46	38.7	AV	L1	GND	
5.698500	6.00	9.2	50	44.0	AV	L1	GND	
21.255000	23.10	7.0	50	26.9	AV	L1	GND	

Report No.: GTSR16020032 Page 15 of 21

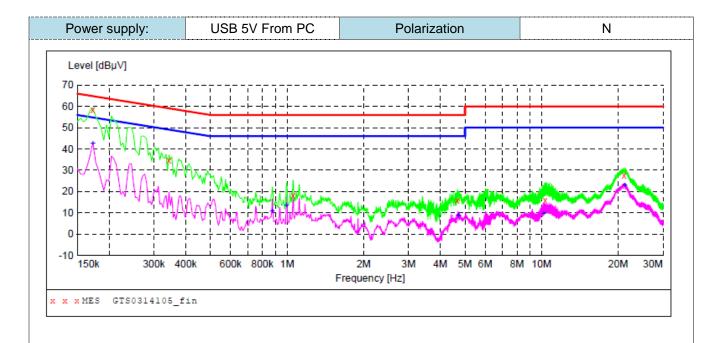

MEASUREMENT RESULT: "GTS0314105 fin"

3,	/14/2016 4:5	1PM						
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.172500	58.40	10.0	65	6.4	QP	N	GND
	0.343500	34.70	9.9	59	24.4	QP	N	GND
	1.054500	18.40	9.6	56	37.6	QP	N	GND
	4.668000	15.90	9.3	56	40.1	QP	N	GND
	10.315500	15.90	8.8	60	44.1	QP	N	GND
	21.052500	27.80	7.0	60	32.2	QP	N	GND
	4.668000 10.315500	15.90 15.90	9.3 8.8	56 60	40.1 44.1	QP QP	N N	GNI GNI


MEASUREMENT RESULT: "GTS0314105_fin2"


3/14/2016	4:51PM						
Frequen M	cy Level Hz dBµV		Limit dBµV	Margin dB	Detector	Line	PE
0.1725	00 42.70	10.0	55	12.1	AV	N	GND
0.8745	00 10.90	9.6	46	35.1	AV	N	GND
0.9960	00 13.50	9.6	46	32.5	AV	N	GND
4.7040	00 8.70	9.3	46	37.3	AV	N	GND
10.1940	00 9.50	8.9	50	40.5	AV	N	GND
21.2010	00 23.00	7.0	50	27.0	AV	N	GND

Report No.: GTSR16020032 Page 16 of 21

5. Test Setup Photos of the EUT



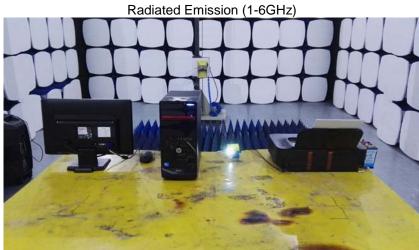

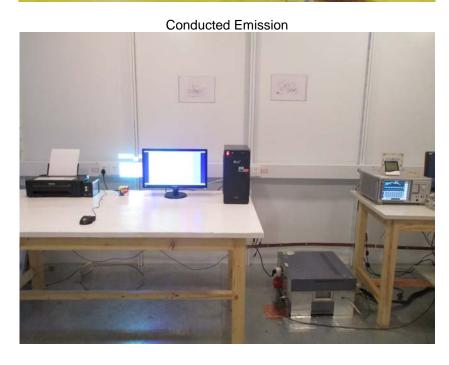



Report No.: GTSR16020032 Page 17 of 21

6. External and Internal Photos of the EUT


External Photos




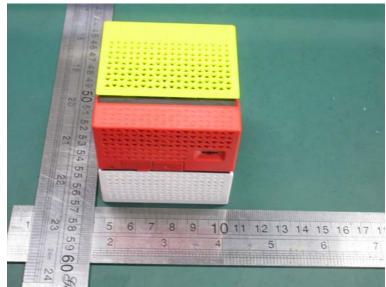

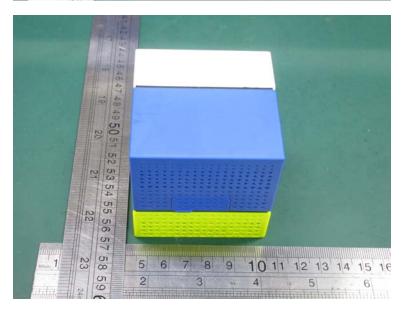

Report No.: GTSR16020032 Page 18 of 21

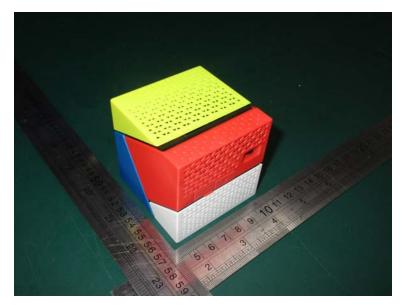

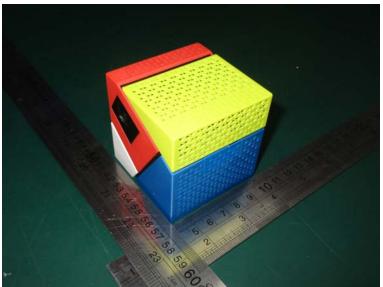




Report No.: GTSR16020032 Page 19 of 21




Internal Photos




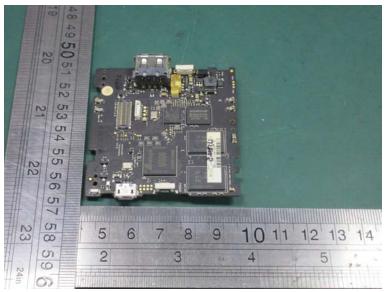


Report No.: GTSR16020032 Page 20 of 21

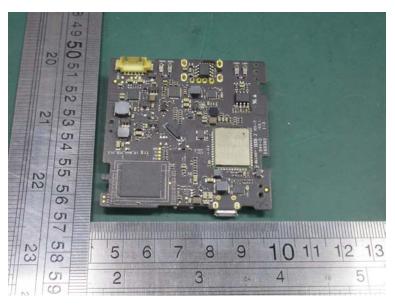




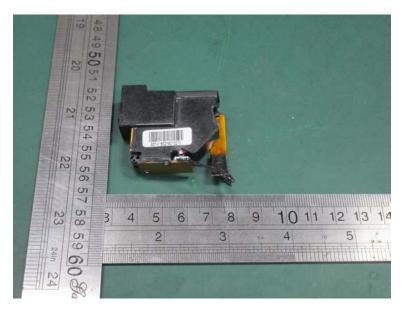

Report No.: GTSR16020032 Page 21 of 21

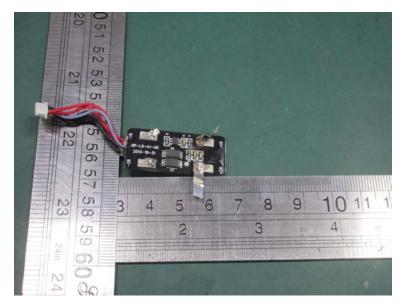

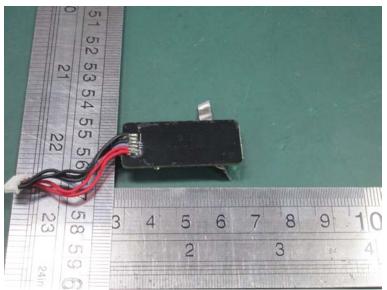



.....End of Report.....