

SAR EVALUATION REPORT

For

Cloud Bridge S.A. DE C.V.

Autopista Mexico Queretaro 3063, Local 18, San Andres Atenco, Tlalnepantla 54040 Mexico

FCC ID: 2AHNRFFM351

Report Type:		Product Type:
Original Report		3G Mobile phone
Test Engineer:	Terry XiaHou	Terry XiaHou
Report Number:	RSZ160307001-2	20
Report Date:	2016-03-28	
	Bell Hu	Beil Hu
Reviewed By:	SAR Engineer	
Prepared By:	6/F, the 3rd Phase	20018 320008

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

Attestation of Test Results								
	Company Name Cloud Bridge S.A. DE C.V.							
	EUT Description	n 3G Mobile phone						
EUT	FCC ID 2AHNRFFM351							
Information	Model Number	Main model: M351						
	Test Date	Multiple model: Cloud Bridge M351, FreshFun M 2016-03-08	351					
Frequency	Max. SAR Level(s) Reported Limit(W/Kg							
GSM 850		0.417 W/kg 1g Head SAR 0.850 W/kg 1g Body SAR						
PCS 1900		0.681 W/kg 1g Head SAR 1.031 W/kg 1g Body SAR						
WCDMA 850		0.351 W/kg 1g Head SAR 0.450 W/kg 1g Body SAR	1.6					
WCDMA 1900		0.430 W/kg 1g Body SAR 0.566 W/kg 1g Head SAR 0.768 W/kg 1g Body SAR						
Simultaneous		1.072 W/kg 1g Head SAR 1.227 W/kg 1g Body SAR						
Hotspot		1.227 W/kg 1g Body SAR						
	ANSI / IEEE C95.1: 2005 IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fileds,3 kHz to 300 GHz.							
	ANSI / IEEE C95.3: 2002 IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to SuchFields,100 kHz—300 GHz.							
	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices							
Applicable Standards	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques							
	IEC 62209-2:2010 Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices-Human models, instrumentation, and procedures-Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)							
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06. KDB 648474 D04 Handset SAR v01r03. KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01							

Report No: RSZ160307001-20

Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.

The results and statements contained in this report pertain only to the device(s) evaluated.

KDB 941225 D06 Hotspot Mode v02r01

SAR Evaluation Report 2 of 100

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	5
EUT DESCRIPTION	6
TECHNICAL SPECIFICATION	6
REFERENCE, STANDARDS, AND GUILDELINES	7
SAR LIMITS	8
FACILITIES	9
DESCRIPTION OF TEST SYSTEM	10
EQUIPMENT LIST AND CALIBRATION	17
EQUIPMENTS LIST & CALIBRATION INFORMATION	
SAR MEASUREMENT SYSTEM VERIFICATION	
Liquid Verification	
SYSTEM ACCURACY VERIFICATION	19
SAR SYSTEM VALIDATION DATA	
EUT TEST STRATEGY AND METHODOLOGY	
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON'S EAR	
CHEEK/TOUCH POSITION EAR/TILT POSITION	
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	
SAR EVALUATION PROCEDURE	
TEST METHODOLOGY	-
CONDUCTED OUTPUT POWER MEASUREMENT	
PROVISION APPLICABLE	
RADIO CONFIGURATION	
MAXIMUM OUTPUT POWER AMONG PRODUCTION UNITS	38
TEST RESULTS:	
SAR MEASUREMENT RESULTS	
SAR TEST DATA	43
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	49
SAR PLOTS (SUMMARY OF THE HIGHEST SAR VALUES)	53
APPENDIX A MEASUREMENT UNCERTAINTY	61
APPENDIX B – PROBE CALIBRATION CERTIFICATES	63
APPENDIX C DIPOLE CALIBRATION CERTIFICATES	72
APPENDIX D EUT TEST POSITION PHOTOS	90
Liquid depth ≥ 15cm	90
BODY-WORN BACK SETUP PHOTO (10MM)	
BODY-WORN LEFT SETUP PHOTO (10MM) BODY-WORN RIGHT SETUP PHOTO (10MM)	
BODY-WORN BOTTOM SETUP PHOTO (10MM)	
LEFT HEAD TOUCH SETUP PHOTO	
LEFT HEAD TILT SETUP PHOTO	
RIGHT HEAD TOUCH SETUP PHOTO	93
RIGHT HEAD TILT SETUP PHOTO	94
APPENDIX E EUT PHOTOS	95
EUT – Front View	95

PRODUCT SIMILARITY DECLARATION LETTER	100
APPENDIX F INFORMATIVE REFERENCES	
EUT – UNCOVER VIEW	
EUT – BOTTOM VIEW	
EUT – TOP VIEW	97
EUT – RIGHT SIDE VIEW	96
EUT -LEFT SIDE VIEW	
EUT – BACK VIEW	

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision		
0	RSZ160307001-20	Original Report	2016-03-28		

Report No: RSZ160307001-20

SAR Evaluation Report 5 of 100

EUT DESCRIPTION

This report has been prepared on behalf of Cloud Bridge S.A. DE C.V. and their product, FCC ID: 2AHNRFFM351, Model: M351 or the EUT (Equipment under Test) as referred to in the rest of this report.

Report No: RSZ160307001-20

*Note: This series products model: Cloud Bridge M351, FreshFun M351 and M351, we select model: M351 to test, there is no electrical change has been made to the equipment, please refer to the product similarity letter.

Technical Specification

Duadwat Tyma	Portable	
Product Type		
Exposure Category:	Population / Uncontrolled	
Antenna Type(s):	Internal Antenna	
Body-Worn Accessories:	Headset	
Face-Head Accessories:	None	
Multi-slot Class:	Class12	
Onovetion Mode .	GSM Voice, GPRS/EGPRS Data, WCDMA(Rel99, HSUPA,	
Operation Mode :	HSDPA,DC-HSDPA,HSPA+), Wi-Fi and Bluetooth	
	GSM 850 : 824-849 MHz(TX) ; 869-894 MHz(RX)	
	PCS 1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX)	
	WCDMA 850: 824-849 MHz(TX) ; 869-894 MHz(RX)	
Frequency Band:	WCDMA 1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX)	
	Wi-Fi(802.11b/g/n20): 2412 MHz-2462 MHz	
	Wi-Fi(802.11n40): 2422 MHz-2452 MHz	
	Bluetooth: 2402 MHz-2480 MHz	
	GSM 850 : 32.54 dBm	
	PCS 1900: 28.44 dBm	
	WCDMA 850: 21.89 dBm	
C 1 (IDED	WCDMA 1900: 21.50 dBm	
Conducted RF Power:	Wi-Fi(802.11b/g/n20): 9.66 dBm	
	Wi-Fi(802.11n40): 9.36 dBm	
	Bluetooth3.0: 4.07 dBm	
	BLE: -3.11 dBm	
Dimensions (L*W*H):	116 mm (L) × 62.2mm (W) × 12 mm (H)	
Power Source:	3.7 V _{DC} Rechargeable Battery	
Normal Operation: Head and Body-worn		

SAR Evaluation Report 6 of 100

REFERENCE, STANDARDS, AND GUILDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

Report No: RSZ160307001-20

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Evaluation Report 7 of 100

SAR Limits

FCC Limit (1g Tissue)

Report No: RSZ160307001-20

	SAR (W/kg)				
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

CE Limit (10g Tissue)

	SAR (W/kg)				
EXPOSURE LIMITS	(General Population / (Occupational Uncontrolled Exposure Environment) (Occupational Controlled Exposure Environment)				
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 10 g of tissue)	2.0	10			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2~W/kg (CE) applied to the EUT.

SAR Evaluation Report 8 of 100

FACILITIES

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 6/F, the 3rd Phase of WanLi Industrial Building, Shi Hua Road, Fu Tian Free Trade Zone, Shenzhen, Guangdong, P.R. of China

Report No: RSZ160307001-20

SAR Evaluation Report 9 of 100

DESCRIPTION OF TEST SYSTEM

These measurements were performed with ALSAS 10 Universal Integrated SAR Measurement system from APREL Laboratories.

ALSAS-10U System Description

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller. ALSAS-10U uses the latest methodologies. And FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm2 step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.



Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m3 is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 35mm in the Z axis.

SAR Evaluation Report 10 of 100

ALSAS-10U Interpolation and Extrapolation Uncertainty


The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a+2z)^2} \right)$$

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

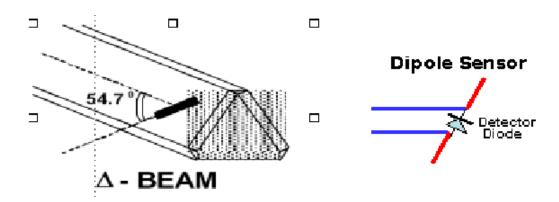

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

SAR Evaluation Report 11 of 100

Isotropic E-Field Probe Specification

Calibration Method	Frequency Dependent Below 1 GHz Calibration in air performed in a TEM Cell Above 1 GHz Calibration in air performed in waveguide			
Sensitivity	$0.70 \; \mu V/(V/m)^2 \text{ to } 0.85 \; \mu V/(V/m)^2$			
Dynamic Range	0.0005 W/kg to 100 W/kg			
Isotropic Response	Better than 0.1 dB			
Diode Compression Point (DCP)	Calibration for Specific Frequency			
Probe Tip Diameter	< 2.9 mm			
Sensor Offset	1.56 (+/- 0.02 mm)			
Probe Length	289 mm			
Video Bandwidth	@ 500 Hz: 1 dB @ 1.02 kHz: 3 dB			
Boundary Effect	Less than 2.1% for distance greater than 0.58 mm			
Spatial Resolution	The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe			

Report No: RSZ160307001-20

Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from $5\mu V$ to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

ADC	12 Bit
Amplifier Range	20 mV to 200 mV and 150 mV to 800 mV
Field Integration	Local Co-Processor utilizing proprietary integration algorithms
Number of Input Channels	4 in total 3 dedicated and 1 spare
Communication	Packet data via RS232

SAR Evaluation Report 12 of 100

Axis Articulated Robot

ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.



Robot/Controller Manufacturer	Thermo CRS		
Number of Axis	Six independently controlled axis		
Positioning Repeatability	0.05 mm		
Controller Type	Single phase Pentium based C500C		
Robot Reach	710 mm		
Communication	RS232 and LAN compatible		

ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.

SAR Evaluation Report 13 of 100




Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

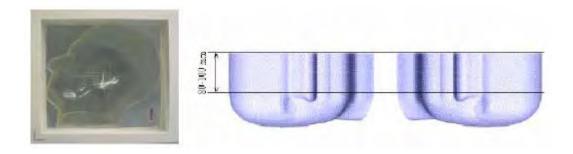

SAR Evaluation Report 14 of 100

APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software.

The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



SAR Evaluation Report 15 of 100

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Ingredients	Frequency (MHz)									
(% by weight)	45	0	83	835 915		15	1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (Nacl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Recommended Tissue Dielectric Parameters for Head and Body

Frequency	Head '	Tissue	Body Tissue		
(MHz)	Er	O'(S/m)	Er	O (S/m)	
150	52.3	0.76	61.9	0.80	
300	45.3	0.87	58.2	0.92	
450	43.5	0.87	56.7	0.94	
835	41.5	0.90	55.2	0.97	
900	41.5	0.97	55.0	1.05	
915	41.5	0.98	55.0	1.06	
1450	40.5	1.20	54.0	1.30	
1610	40.3	1.29	53.8	1.40	
1800-2000	40.0	1.40	53.3	1.52	
2450	39.2	1.80	52.7	1.95	
3000	38.5	2.40	52.0	2.73	
5800	35.3	5.27	48.2	6.00	

SAR Evaluation Report 16 of 100

EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information

Equipment	Model	Calibration Date	Calibration Due Date	S/N
CRS F3 robot	ALS-F3	N/A	N/A	RAF0805352
CRS F3 Software	ALS-F3-SW	N/A	N/A	N/A
CRS C500C controller	ALS-C500	N/A	N/A	RCF0805379
Probe mounting device & Boundary Detection Sensor System	ALS-PMDPS-3	N/A	N/A	120-00270
Universal Work Station	ALS-UWS	N/A	N/A	100-00157
Data Acquisition Package	ALS-DAQ-PAQ-3	2015-12-14	2016-12-14	110-00212
Miniature E-Field Probe	ALS-E-020	2015-12-14	2016-12-14	500-00283
Dipole, 835MHz	ALS-D-835-S-2	2014-10-08	2017-10-08	180-00558
Dipole, 1900MHz	ALS-D-1900-S-2	2014-10-09	2017-10-09	210-00710
Dipole Spacer	ALS-DS-U	N/A	N/A	250-00907
Device holder/Positioner	ALS-H-E-SET-2	N/A	N/A	170-00510
Left ear SAM phantom	ALS-P-SAM-L	N/A	N/A	130-00311
Right ear SAM phantom	ALS-P-SAM-R	N/A	N/A	140-00359
UniPhantom	ALS-P-UP-1	N/A	N/A	150-00413
Simulated Tissue 835 MHz Head	ALS-TS-835-H	Each Time	Each Time	270-01002
Simulated Tissue 835 MHz Body	ALS-TS-835-B	Each Time	Each Time	270-02101
Simulated Tissue 1900 MHz Head	ALS-TS-1900-H	Each Time	Each Time	295-01103
Simulated Tissue 1900 MHz Body	ALS-TS-1900-B	Each Time	Each Time	295-02102
Directional couple	DC6180A	N/A	N/A	0325849
Power Amplifier	5S1G4	N/A	N/A	71377
Attenuator	3dB	N/A	N/A	5402
Dielectric probe kit	HP85070B	2015-06-13	2016-06-13	US33020324
Network analyzer	8752C	2015-06-03	2016-06-03	3410A02356
Synthesized Sweeper	HP 8341B	2015-06-03	2016-06-03	2624A00116
UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	2015-11-23	2016-11-23	106891
EMI Test Receiver	ESCI	2015-06-13	2016-06-13	101746


Report No: RSZ160307001-20

SAR Evaluation Report 17 of 100

Report No: RSZ160307001-20

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

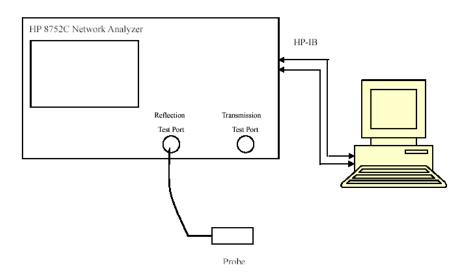

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency	Liquid	Liquid Parameter		Target Value		Delta (%)		Tolerance
1	Type	$\epsilon_{ m r}$	O'(S/m)	$\epsilon_{ m r}$	O'(S/m)	$\Delta \epsilon_{ m r}$	ΔΟ (S/m)	(%)
824.2	Head	41.58	0.92	41.50	0.90	0.193	2.222	±5
	Body	55.37	0.99	55.20	0.97	0.308	2.062	±5
826.4	Head	41.58	0.93	41.50	0.90	0.193	3.333	±5
	Body	55.45	0.99	55.20	0.97	0.453	2.062	±5
926.6	Head	41.89	0.93	41.50	0.90	0.940	3.333	±5
836.6	Body	55.88	1.00	55.20	0.97	1.232	3.093	±5
946.6	Head	41.61	0.92	41.50	0.90	0.265	2.222	±5
846.6	Body	55.82	1.00	55.20	0.97	1.123	3.093	±5
0.40 0	Head	41.62	0.93	41.50	0.90	0.289	3.333	±5
848.8	Body	55.80	0.99	55.20	0.97	1.087	2.062	±5
1850.2	Head	40.04	1.43	40.00	1.40	0.100	2.143	±5
1630.2	Body	53.53	1.54	53.30	1.52	0.432	1.316	±5
1952 4	Head	40.07	1.44	40.00	1.40	0.175	2.857	±5
1852.4	Body	53.39	1.54	53.30	1.52	0.169	1.316	±5
1880.0	Head	40.10	1.43	40.00	1.40	0.250	2.143	±5
1000.0	Body	53.57	1.54	53.30	1.52	0.507	1.316	±5
1907.6	Head	40.13	1.42	40.00	1.40	0.325	1.429	±5
1907.0	Body	53.64	1.54	53.30	1.52	0.638	1.316	±5
1909.8	Head	40.15	1.43	40.00	1.40	0.375	2.143	±5
1909.8	Body	53.71	1.55	53.30	1.52	0.769	1.974	±5


 $[*]Liquid\ Verification\ was\ performed\ on\ 2016-03-08.$

SAR Evaluation Report 18 of 100

System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Verification Setup Block Diagram

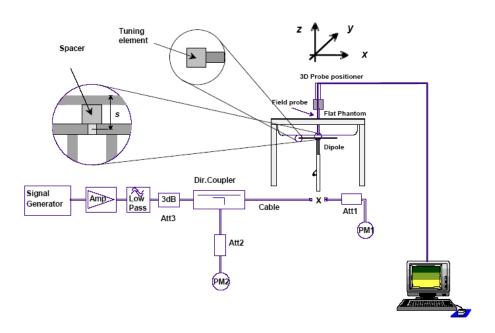

System Accuracy Check Results:

Date	Frequency Band	Liquid Type	Measured SAR (W/Kg)		Target Value (W/Kg)	Delta (%)	Tolerance (%)
	835	Head	1g	10.030	9.773	2.630	±10
2016-03-08	633	Body	1g	9.782	9.736	0.472	±10
	1000	Head	1g	40.153	39.481	1.702	±10
	1900	Body	1g	39.886	39.715	0.431	±10

^{*}All SAR values are normalized to 1 Watt forward power.

SAR Evaluation Report 19 of 100

SAR SYSTEM VALIDATION DATA

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Report No: RSZ160307001-20

System Performance Check 835 MHz Head Liquid

Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558

Product Data

Device Name : Dipole 835 MHz Serial No. : 180-00558 Type : Dipole

Model : ALS-D-835-S-2

Frequency Band : 835

Max. Transmit Pwr : 1 W

Drift Time : 3 min(s)

Power Drift-Start : 10.038 W/kg

Power Drift-Finish : 9.923 W/kg

Power Drift (%) : -1.061

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Phantom Data

Tissue Data

: Head Type : 270-01002 Serial No. : 835.0 MHz Frequency Last Calib. Date : 08-Mar-2016 Temperature : 20.00 °C Ambient Temp. : 21.00 °C : 56.00 RH% Humidity : 41.72 F/m Epsilon Sigma : 0.92 S/m

Density : 1000.00 kg/cu. m

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Dec-2015

Frequency Band : 835 Duty Cycle Factor : 1 Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 21.00 °C Ambient Temp. : 21.00 °C

Area Scan : 7x11x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 20 of 100

1 gram SAR value : 10.221 W/kg 10 gram SAR value : 6.582 W/kg Area Scan Peak SAR : 10.536 W/kg Zoom Scan Peak SAR : 17.362 W/kg

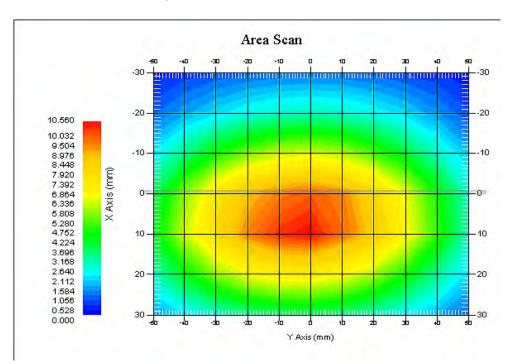

835 MHz System Validation with Head Tissue

SAR Evaluation Report 21 of 100

Report No: RSZ160307001-20

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 835 MHz Body Liquid

Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558

Product Data

Device Name : Dipole 835 MHz Serial No. : 180-00558 Type : Dipole

Model : ALS-D-835-S-2

Frequency Band : 835

Max. Transmit Pwr
Drift Time : 3 min(s)
Power Drift-Start : 9.655 W/kg
Power Drift-Finish
Power Drift (%) : 1.379

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Phantom Data

Tissue Data

Type : Body : 270-02101 Serial No. : 835.0 MHz Frequency Last Calib. Date : 08-Mar-2016 Temperature : 20.00 °C : 21.00 °C Ambient Temp. : 56.00 RH% Humidity Epsilon : 55.86 F/m : 0.99 S/m Sigma : 1000.00 kg/cu. m Density

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Dec-2015

Frequency Band : 835 Duty Cycle Factor : 1 Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 21.00 °C Ambient Temp. : 21.00 °C

Area Scan : 7x11x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 22 of 100

1 gram SAR value : 9.859 W/kg 10 gram SAR value : 6.222 W/kg Area Scan Peak SAR : 9.720 W/kg Zoom Scan Peak SAR : 15.598 W/kg

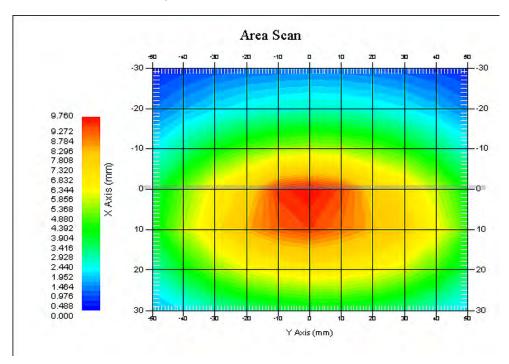

835 MHz System Validation with Body Tissue

SAR Evaluation Report 23 of 100

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 1900 MHz Head Liquid

Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710

Product Data

Device Name : Dipole 1900MHz Serial No. : 210-00710 Type : Dipole

Model : ALS-D-1900-S-2

Frequency Band : 1900
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 37.862 W/kg
Power Drift-Finish : 37.331 W/kg
Power Drift (%) : -1.316

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Tissue Data

: Head Type : 295-01103 Serial No. : 1900.00 MHz Frequency Last Calib. Date : 08-Mar-2016 Temperature : 20.00 °C : 21.00 °C Ambient Temp. : 56.00 RH% Humidity Epsilon : 40.40 F/m Sigma : 1.41 S/m

Density : 1000.00 kg/cu. M

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Dec-2015

Frequency Band : 1900 Duty Cycle Factor : 1 Conversion Factor : 4.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 20.00 °C Ambient Temp. : 20.00 °C

Area Scan : 7x10x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 24 of 100

1 gram SAR value : 40.057 W/kg 10 gram SAR value : 20.926 W/kg Area Scan Peak SAR : 42.010 W/kg Zoom Scan Peak SAR : 71.280 W/kg

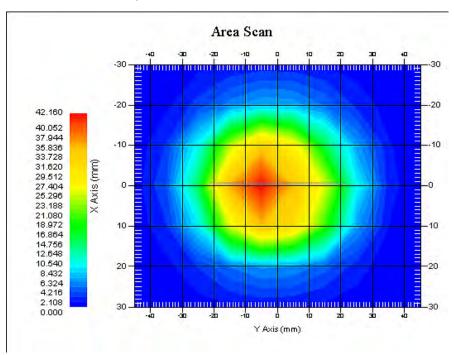

1900 MHz System Validation with Head Tissue

SAR Evaluation Report 25 of 100

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 1900 MHz Body Liquid

Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710

Product Data

Device Name : Dipole 1900MHz Serial No. : 210-00710 Type : Dipole

Model : ALS-D-1900-S-2

Frequency Band : 1900

Max. Transmit Pwr : 1 W

Drift Time : 3 min(s)

Power Drift-Start : 38.436 W/kg

Power Drift-Finish : 38.899 W/kg

Power Drift (%) : 1.185

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Serial No. : System Default

Location : Center Description : Default

Tissue Data

Type : Body : 295-02102 Serial No. : 1900.00 MHz Frequency Last Calib. Date : 08-Mar-2016 Temperature : 20.00 °C : 21.00 °C Ambient Temp. : 56.00 RH% Humidity : 52.04 F/m Epsilon : 1.52 S/m Sigma

Density : 1000.00 kg/cu. m

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 14-Dec-2015

Frequency Band : 1900 Duty Cycle Factor : 1 Conversion Factor : 4.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 20.00 °C Ambient Temp. : 21.00 °C

Area Scan : 7x10x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 26 of 100

1 gram SAR value : 39.992 W/kg 10 gram SAR value : 21.233 W/kg Area Scan Peak SAR : 41.840 W/kg Zoom Scan Peak SAR : 73.802 W/kg

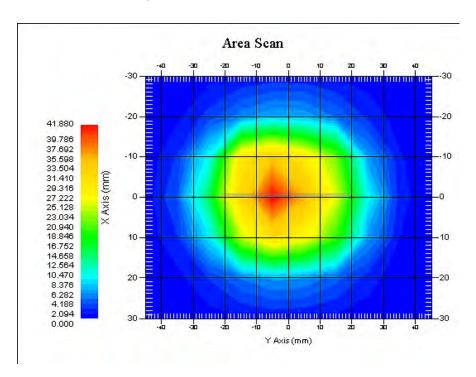

1900 MHz System Validation with Body Tissue


SAR Evaluation Report 27 of 100


EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

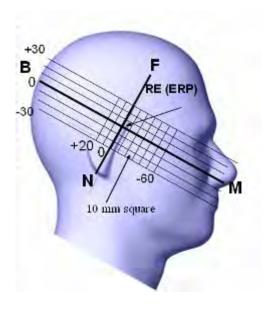

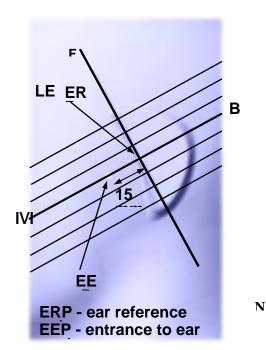

SAR Evaluation Report 28 of 100

Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the "ear reference point" or along the "N-F" line for the SCC-34/SC-2 head phantom.

This test position is established:

- When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- o (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek / Touch Position

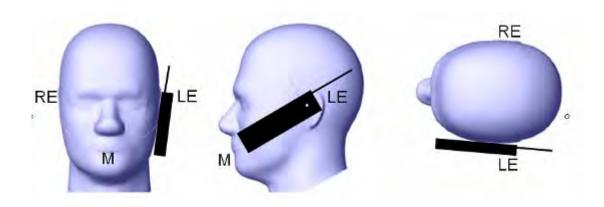

Ear/Tilt Position


With the handset aligned in the "Cheek/Touch Position":

- 1) If the earpiece of the handset is not in full contact with the phantom's ear spacer (in the "Cheek/Touch position") and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.
- 2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both "ear reference points" (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the "test device reference point" until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point isby 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

SAR Evaluation Report 29 of 100

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the "Cheek/Touch" and "Ear/Tilt" positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15° Position

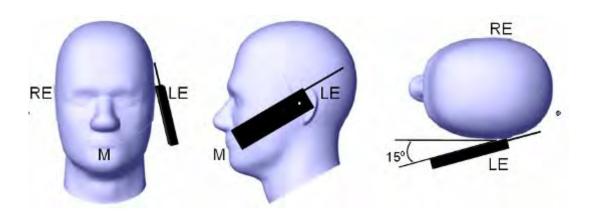

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

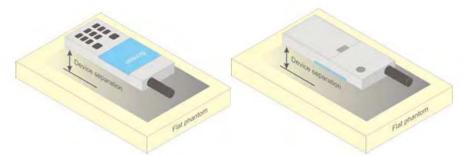


Figure 5 - Test positions for body-worn devices

SAR Evaluation Report 30 of 100

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Report No: RSZ160307001-20

- Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.
- Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:
 - 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

Test methodology

KDB 447498 D01 General RF Exposure Guidance v06.

KDB 648474 D04 Handset SAR v01r03.

KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04

KDB 865664 D02 RF Exposure Reporting v01r02

KDB 941225 D01 3G SAR Procedures v03r01

KDB 941225 D06 Hotspot Mode v02r01

SAR Evaluation Report 31 of 100

CONDUCTED OUTPUT POWER MEASUREMENT


Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

Report No: RSZ160307001-20

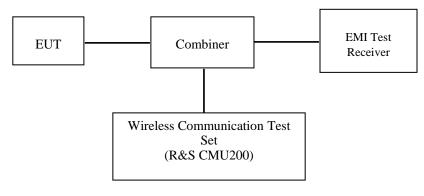

GSM/WCDMA

Radio Configuration

The power measurement was configured by the Wireless Communication Test Set CMU200 for all Radio configurations.

GSM

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection: Press Signal Off to turn off the signal and change settings

Network Support > GSM + only

MS Signal

> 33 dBm for GSM 850

> 30 dBm for PCS 1900

BS Signal:Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset >+ 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stabe)

BCCH Channel >choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

TCH > choose desired test channel

Hopping >Off

AF/RF: Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input Connection: Press Signal on to turn on the signal and change settings

SAR Evaluation Report 32 of 100

GPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection: Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal: Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

Report No: RSZ160307001-20

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

BS Signal: Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset >+ 0 Hz

Mode >BCCH and TCH

BCCH Level >-85 dBm (May need to adjust if link is not stabe)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test

channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping >Off

Main Timeslot >3

Network: Coding Scheme > CS4 (GPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF: Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection: Press Signal on to turn on the signal and change settings

EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection: Press Signal Off to turn off the signal and change settings

Network Support > GSM + EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal: Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 27 dBm for EGPRS 850

> 25 dBm for EGPRS 1900

BS Signal: Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset >+ 0 Hz Mode >BCCH and TCH

BCCH Level >-85 dBm (May need to adjust if link is not stabe)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping >Off

Main Timeslot >3

Network: Coding Scheme > MCS5 (EGPRS)

Bit Stream >2E9-1 PSR Bit Stream

AF/RF: Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection: Press Signal on to turn on the signal and change settings

SAR Evaluation Report 33 of 100

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

	Loopback Mode	Test Mode 1			
WCDMA	Rel99 RMC	12.2kbps RMC			
General Settings	Power Control Algorithm	Algorithm2			
	β c / βd	8/15			

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA		
	Subset	1	2	3	4		
	Loopback Mode			Test Mode	1		
	Rel99 RMC			12.2kbps RM	IC		
	HSDPA FRC			H-Set1			
WCDMA	Power Control Algorithm		Algorithm2				
WCDMA	βс	2/15	12/15	15/15	15/15		
General Settings	β d	15/15	15/15	8/15	4/15		
Settings	β d (SF)	64					
	β c/ β d	2/15	12/15	15/8	15/4		
	eta hs	4/15	24/15	30/15	30/15		
	MPR(dB)	0	0	0.5	0.5		
	DACK	8					
	DNAK	8					
HSDPA	DCQI	8					
Specific	Ack-Nack repetition	3					
Settings	factor	J					
Settings	CQI Feedback	4ms					
	CQI Repetition Factor			2			
	Ahs= β hs/ β c		30/15				

SAR Evaluation Report 34 of 100

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA			
	Subset	1	2	3	4	5			
	Loopback Mode	Test Mode 1							
	Rel99 RMC	12.2kbps RMC							
	HSDPA FRC	H-Set1							
	HSUPA Test	HSUPA Loopback							
	Power Control		•						
WCDM	Algorithm			Algorithm2					
A	βс	11/15	6/15	15/15	2/15	15/15			
General	β d	15/15	15/15	9/15	15/15	0			
Settings	βec	209/225	12/15	30/15	2/15	5/15			
	βc/ βd	11/15	6/15	15/9	2/15	-			
	β hs	22/15	12/15	30/15	4/15	5/15			
	CM(dB)	1.0	3.0	2.0	3.0	1.0			
	MPR(dB)	0	2	1	2	0			
	DACK			8	•	•			
	DNAK			8					
HSDPA	DCQI			8					
	Ack-Nack repetition	tition							
Specific	factor	3							
Settings	CQI Feedback	4ms							
	CQI Repetition	2							
	Factor	Factor							
	Ahs= β hs/ β c			30/15					
	DE-DPCCH	6	8	8	5	7			
	DHARQ	0	0	0	0	0			
	AG Index	20	12	15	17	21			
	ETFCI	75	67	92	71	81			
	Associated Max UL	242.1	174.9	482.8	205.8	308.9			
	Data Rate kbps	272.1	177.7	402.0	203.0	300.7			
		E-TFC	I 11 E	E-TFCI	E-TFC	CI 11 E			
HSUPA		E-TFC		11	E-TFC	I PO 4			
		E-TF		E-TFCI		CI 67			
Specific Settings		E-TFCI		PO4		I PO 18			
Settings		E-TF		E-TFCI	E-TF				
	Reference E_FCls	E-TFC		92		I PO23			
		E-TFO		E-TFCI		CI 75			
		E-TFC E-TF		PO 18		I PO26			
		E-TFCI			E-TFCI 81 E-TFCI PO 27				
		E-11 CI	1021		L-11°C.	11021			

SAR Evaluation Report 35 of 100

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-	βς	β_d	β _{HS}	β_{ec}	β_{ed}	β_{ed}	CM	MPR	AG	E-TFCI	E-TFCI
test	(Note3)	'	(Note1)		(2xSF2)	(2xSF4)	(dB)	(dB)	Index	(Note 5)	(boost)
					(Note 4)	(Note 4)	(Note 2)	(Note 2)	(Note 4)		
1	1	0	30/15	30/15	β _{ed} 1: 30/15	β _{ed} 3: 24/15	3.5	2.5	14	105	105
					β _{ed} 2: 30/15	β _{ed} 4: 24/15					
Note 1	Note 1: Δ_{ACK} , Δ_{NACK} and Δ_{CQI} = 30/15 with β_{hs} = 30/15 * β_{c} .										

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and β_d = 0 by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

DC-HSDPA

The following tests were conducted according to the test requirements in Table Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTľs	1
Number of HARQ Processes	Proces	6
	ses	0
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for	or DC-HSD	PA

Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.

Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.

SAR Evaluation Report 36 of 100

For 802.11b, 802.11g and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

Report No: RSZ160307001-20

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	5	2442
2	2427	6	2447
3	2432	7	2452
4	2437	/	/

For 802.11n-HT40 mode, EUT was tested with Channel 1, 4 and 7.

SAR Evaluation Report 37 of 100

Maximum Output Power among production units

Max Target Power for Production Unit (dBm)							
Mad	la/Dan d		Channel				
Mode/Band		Low	Middle	High			
GS	M 850	32.60	32.60	32.60			
GPRS	1 TX Slot	32.60	32.60	32.60			
GPRS	2 TX Slot	31.60	31.60	31.60			
GPRS	3 TX Slot	29.90	29.90	29.90			
GPRS	4 TX Slot	29.10	29.10	29.10			
EGPRS	S 1 TX Slot	26.00	26.00	26.00			
EGPRS	S 2 TX Slot	24.90	24.90	24.90			
EGPRS	3 TX Slot	23.60	23.60	23.60			
EGPRS	5 4 TX Slot	22.50	22.50	22.50			
PC	S 1900	28.50	28.50	28.50			
GPRS	1 TX Slot	28.50	28.50	28.50			
GPRS	2 TX Slot	27.60	27.60	27.60			
GPRS	3 TX Slot	26.00	26.00	26.00			
GPRS	4 TX Slot	24.80	24.90	25.20			
EGPRS	S 1 TX Slot	25.30	25.30 25.30				
EGPRS	S 2 TX Slot	23.70	23.70	23.70			
EGPRS	3 TX Slot	22.20	22.20	22.20			
EGPRS	5 4 TX Slot	20.90	20.90	20.90			
	RMC	21.90	21.90	21.90			
	HSDPA	21.20	21.20	21.20			
WCDMA 850	HSUPA	21.00	21.00	21.00			
050	DC-HSDPA	21.00	21.00	21.00			
	HSPA+	21.00	21.00	21.00			
	RMC	21.60	21.60	21.60			
	HSDPA	20.80	20.80	20.80			
WCDMA 1900	HSUPA	20.70	20.70	20.70			
1500	DC-HSDPA	20.60	20.60	20.60			
	HSPA+	20.60	20.60	20.60			
Wi-Fi	(b/g/n20)	9.70	9.70	9.70			
Wi-	Fi(n40)	9.40	9.40	9.40			
Blu	ietooth	4.50	4.50	4.50			
I	BLE	-3.00	-3.00	-3.00			

SAR Evaluation Report 38 of 100

Report No: RSZ160307001-20

Test Results:

GSM:

Donal	Channel	Frequency	nency Conducted Output Power	
Band	No.	(MHz)	Meas. Power (dBm)	Meas. Power (W)
	128	824.2	32.47	1.766
GSM 850	190	836.6	32.45	1.758
	251	848.8	32.54	1.795
	512	1850.2	28.17	0.656
PCS 1900	661	1880.0	28.18	0.658
	810	1909.8	28.44	0.698

GPRS:

Daniel Channel		Frequency	RF Output Power (dBm)			
Band	No.	(MHz)	1 slot	2 slot	3 slots	4 slots
	128	824.2	32.46	31.54	29.81	29.07
GSM 850	190	836.6	32.44	31.49	29.69	28.95
	251	848.8	32.51	31.58	29.85	29.05
	512	1850.2	28.14	27.29	25.54	24.76
PCS 1900	661	1880.0	28.17	27.31	25.58	24.84
	810	1909.8	28.43	27.58	25.90	25.16

EGPRS:

Band Channel		Frequency	RF Output Power (dBm)			
Danu	No.	(MHz)	1 slot	2 slot	3 slots	4 slots
	128	824.2	25.25	24.72	23.53	22.43
GSM 850	190	836.6	25.20	24.67	23.38	22.27
	251	848.8	25.96	24.89	23.36	22.32
	512	1850.2	24.98	23.62	21.96	20.71
PCS 1900	661	1880.0	24.42	23.07	21.65	20.45
	810	1909.8	25.22	23.62	22.19	20.84

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

SAR Evaluation Report 39 of 100

The time based average power for GPRS

Dond	Channel	Frequency	Time based average Power (dBm)			
Band	No.	(MHz)	1 slot	2 slot	3 slots	4 slots
	128	824.2	23.46	25.54	25.56	26.07
GSM 850	190	836.6	23.44	25.49	25.44	25.95
	251	848.8	23.51	25.58	25.60	26.05
	512	1850.2	19.14	21.29	21.29	21.76
PCS 1900	661	1880.0	19.17	21.31	21.33	21.84
	810	1909.8	19.43	21.58	21.65	22.16

The time based average power for EGPRS

Dond	Channel	Frequency	Time	e based avera	pased average Power (dBm)		
Band	No.	(MHz)	1 slot	2 slot	3 slots	4 slots	
	128	824.2	16.25	18.72	19.28	19.43	
GSM 850	190	836.6	16.20	18.67	19.13	19.27	
	251	848.8	16.96	18.89	19.11	19.32	
	512	1850.2	15.98	17.62	17.71	17.71	
PCS 1900	661	1880.0	15.42	17.07	17.40	17.45	
	810	1909.8	16.22	17.62	17.94	17.84	

Note:

- 1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
- 2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
- 3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
- 4. For EGPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 6(850 MHz band) and 5(1900 MHz band).
- 5. According to KDB941225D01-SAR for GPRS and EDGE modes are not required when the source-based time-averaged output power for each data mode is lower than that in the normal GSM voice mode.

SAR Evaluation Report 40 of 100

WCDMA 850

Test	Test Mode	3GPP Sub	Averaged Mean Power (dBm)			
Condition	Test Mode	Test	Low Frequency	Mid Frequency	High Frequency	
	RMC:	12.2k	21.85	21.89	21.84	
		1	20.74	21.03	20.81	
	HSDPA	2	20.92	20.84	20.85	
	порга	3	20.77	20.92	20.82	
		4	20.88	21.11	21.03	
		1	20.99	20.92	20.85	
		2	20.76	20.96	20.73	
Normal	HSUPA	3	20.80	20.96	20.75	
- 10202		4	20.96	20.90	20.86	
		5	20.73	20.87	20.85	
		1	20.74	20.93	20.64	
	DC-HSDPA	2	20.79	20.90	20.73	
	DC-HSDPA	3	20.77	20.76	20.57	
		4	20.84	20.74	20.65	
	HSPA+ (16QAM)	1	20.93	20.77	20.59	

WCDMA 1900

Test	Test Mode	3GPP Sub	Averaged Mean Power (dBm)			
Condition	1 est Mode	Test	Low Frequency	Mid Frequency	High Frequency	
	RMC	12.2k	21.49	21.50	21.48	
		1	20.43	20.63	20.51	
	HSDPA	2	20.57	20.52	20.47	
	порга	3	20.46	20.53	20.47	
		4	20.57	20.74	20.64	
		1	20.68	20.54	20.51	
		2	20.43	20.64	20.40	
Normal	HSUPA	3	20.48	20.59	20.39	
		4	20.59	20.58	20.46	
		5	20.40	20.55	20.54	
		1	20.35	20.55	20.33	
	DC-HSDPA	2	20.41	20.55	20.37	
	DC-HSDFA	3	20.41	20.39	20.34	
		4	20.51	20.39	20.49	
	HSPA+ (16QAM)	1	20.55	20.46	20.43	

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.

SAR Evaluation Report 41 of 100

2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/DC-HSDPA/HSPA+ when the maximum average output of each RF channel is less than $\frac{1}{4}$ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is <75% of SAR limit.

Bluetooth

D d	Channel	Frequency	Conducted (Output Power
Band	No.	(MHz)	(dBm)	(mw)
	0	2402	3.73	2.360
BDR(GFSK)	39	2441	4.07	2.553
	78	2480	3.95	2.483
	0	2402	3.09	2.037
EDR(4-DQPSK)	39	2441	3.49	2.234
	78	2480	3.40	2.188
	0	2402	3.49	2.234
EDR-8DPSK	39	2441	3.89	2.449
	78	2480	3.76	2.377
	0	2402	-3.23	0.475
BLE	19	2440	-3.60	0.437
	39	2480	-3.11	0.489

Wi-Fi

David	Channel	Frequency	Conducted C	Output Power
Band	No.	(MHz)	(dBm)	(mw)
	1	2412	9.03	7.998
802.11b	6	2437	9.36	8.630
	11	2462	9.08	8.091
	1	2412	9.41	8.730
802.11g	6	2437	9.37	8.650
	11	2462	9.66	9.247
	1	2412	9.22	8.356
802.11n HT20	6	2437	9.11	8.147
	11	2462	9.36	8.630
	1	2422	9.18	8.279
802.11n HT40	4	2437	9.23	8.375
	7	2452	9.36	8.630

Note:

1. The output power was tested under data rate 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n HT20 and 13.5 Mbps for 802.11n HT40.

SAR Evaluation Report 42 of 100

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	21-24 °C
Relative Humidity:	50-53 %
ATM Pressure:	1001-1002 mbar

Testing was performed by Terry XiaHou on 2016-03-08

GSM 850:

EUT	Encauonav	Test	Power	Max. Meas.	Max. Rated		1g SAR (W/Kg)	
Position	Frequency (MHz)	Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	824.2	GSM	2.340	32.47	32.60	1.030	0.372	0.383	/
Left Head Cheek	836.6	GSM	-2.286	32.45	32.60	1.035	0.403	0.417	1#
	848.8	GSM	3.335	32.54	32.60	1.014	0.361	0.366	/
	824.2	GSM	/	/	/	/	/	/	/
Left Head Tilt	836.6	GSM	0.754	32.45	32.60	1.035	0.193	0.200	/
	848.8	GSM	/	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/	/
Right Head Cheek	836.6	GSM	4.925	32.45	32.60	1.035	0.369	0.382	/
	848.8	GSM	/	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/	/
Right Head Tilt	836.6	GSM	-2.349	32.45	32.60	1.035	0.182	0.188	/
	848.8	GSM	/	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/	/
Body-Back-Headset (10mm)	836.6	GSM	3.031	32.45	32.60	1.035	0.336	0.348	/
,	848.8	GSM	/	/	/	/	/	/	/

Note:

- 1. When the 1-g SAR is \leq 0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same GSM antenna while testing SAR.
- 3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
- 4. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

SAR Evaluation Report 43 of 100

PCS Band:

EUT	Frequency	Test	Power	Max. Meas.	Max. Rated		lg SAR (V	V/Kg)	
Position	(MHz)	Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1850.2	GSM	-2.806	28.17	28.50	1.079	0.579	0.625	/
Left Head Cheek	1880	GSM	1.377	28.18	28.50	1.076	0.633	0.681	2#
	1909.8	GSM	1.191	28.44	28.50	1.014	0.585	0.593	/
	1850.2	GSM	/	/	/	/	/	/	/
Left Head Tilt	1880	GSM	2.405	28.18	28.50	1.076	0.439	0.473	/
	1909.8	GSM	/	/	/	/	/	/	/
	1850.2	GSM	/	/	/	/	/	/	/
Right Head Cheek	1880	GSM	2.705	28.18	28.50	1.076	0.577	0.621	/
	1909.8	GSM	/	/	/	/	/	/	/
	1850.2	GSM	/	/	/	/	/	/	/
Right Head Tilt	1880	GSM	1.947	28.18	28.50	1.076	0.372	0.400	/
	1909.8	GSM	/	/	/	/	/	/	/
	1850.2	GSM	/	/	/	/	/	/	/
Body-Back-Headset (10mm)	1880	GSM	-4.772	28.18	28.50	1.076	0.766	0.824	/
(=)	1909.8	GSM	/	/	/	/	/	/	/

Note:

- 1. When the 1-g SAR is \leq 0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same GSM antenna while testing SAR.
- 3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
- 4. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

SAR Evaluation Report 44 of 100

WCDMA 850 Band:

EUT	Engagonov	Test	Power	Max. Meas.	Max. Rated		1g SAR (W/Kg)	
Position	Frequency (MHz)	Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	826.4	RMC	/	/	/	/	/	/	/
Left Head Cheek	836.6	RMC	0.950	21.89	21.90	1.002	0.309	0.310	/
	846.6	RMC	/	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/	/
Left Head Tilt	836.6	RMC	2.375	21.89	21.90	1.002	0.195	0.195	/
	846.6	RMC	/	/	/	/	/	/	/
	826.4	RMC	1.955	21.85	21.90	1.216	0.313	0.317	/
Right Head Cheek	836.6	RMC	-1.070	21.89	21.90	1.002	0.35	0.351	3#
	846.6	RMC	-0.685	21.84	21.90	1.014	0.321	0.325	/
	826.4	RMC	/	/	/	/	/	/	/
Right Head Tilt	836.6	RMC	0.947	21.89	21.90	1.002	0.171	0.171	/
	846.6	RMC	/	/	/	/		/	/

WCDMA 1900 Band:

EUT	Fraguency		Power	Max. Meas.	Max. Rated	1	lg SAR (V	V/Kg)	
Position	Frequency (MHz)	Test Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1852.4	RMC	-1.835	21.49	21.60	1.026	0.472	0.484	/
Left Head Cheek	1880	RMC	2.321	21.50	21.60	1.023	0.553	0.566	4#
	1907.6	RMC	-3.354	21.48	21.60	1.028	0.468	0.481	/
	1852.4	RMC	/	/	/	/	/	/	/
Left Head Tilt	1880	RMC	-2.220	21.50	21.60	1.023	0.287	0.294	/
	1907.6	RMC	/	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/	/
Right Head Cheek	1880	RMC	3.087	21.50	21.60	1.023	0.508	0.520	/
	1907.6	RMC	/	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/	/
Right Head Tilt	1880	RMC	-1.140	21.50	21.60	1.023	0.273	0.279	/
	1907.6	RMC	/	/	/	/	/	/	/

Note:

- 1. When the 1-g SAR is \leq 0.8W/Kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same antenna while testing SAR.
- 3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
- 4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

SAR Evaluation Report 45 of 100

5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

Mobile Hot-Spot Test Result

The DUT is capable of functioning as a Wi-Fi to Cellular Mobile hotspot. Additional SAR testing was performed according to KDB 941225 D06. Testing was performed with a separation of 1cm between the DUT and the flat phantom. The DUT was positioned for SAR tests with the front and back surfaces facing the phantom, and also with the edges facing the phantom in which the transmitting antenna is <2.5 cm from the edge. Each transmit band was utilized for SAR testing. The tested mode has been selected within each band that exhibits the highest time average output power.

Hot spot-GPRS (Frequency Band: 850)

EUT	Engguenev	Test	Power	Max. Meas.	Max. Rated		1g SAR (W/Kg)	
Position	Frequency (MHz)	Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
D 1 D 1	824.2	GPRS	-0.617	29.07	29.10	1.007	0.779	0.784	/
Body-Back (10mm)	836.6	GPRS	-0.720	28.95	29.10	1.035	0.821	0.850	5#
(1011111)	848.8	GPRS	-3.441	29.05	29.10	1.012	0.697	0.705	/
D 1 7 6	824.2	GPRS	/	/	/	/	/	/	/
Body-Left (10mm)	836.6	GPRS	0.763	28.95	29.10	1.035	0.458	0.474	/
(Tollill)	848.8	GPRS	/	/	/	/	/	/	/
D 1 D 1	824.2	GPRS	/	/	/	/	/	/	/
Body-Right (10mm)	836.6	GPRS	2.066	28.95	29.10	1.035	0.329	0.341	/
(1011111)	848.8	GPRS	/	/	/	/	/	/	/
	824.2	GPRS	/	/	/	/	/	/	/
Body-Bottom (10mm)	836.6	GPRS	-1.183	28.95	29.10	1.035	0.357	0.370	/
(1011111)	848.8	GPRS	/	/	/	/	/	/	/

Note:

- 1 .When the 1-g SAR is \leq 0.8W/Kg, testing for other channels are optional.
- 2. According to IEEE 1528-2013, the middle channel is required to be tested first.
- 3. KDB 447498D01- When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 2. The EUT is a Capability Class B mobile phone which can be attached to both GPRS and GSM services.
- 3. The Multi-slot Classes of EUT is Class12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.
- 4. The EUT transmit and receive through the same GSM antenna while testing SAR.
- 5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tole rance limit according to the power applied to the individual channels tested to determine compliance.

SAR Evaluation Report 46 of 100

Hot spot-GPRS (Frequency Band: 1900)

EUT	Frequency	Test	Power	Max. Meas.	Max. Rated		1g SAR (W/Kg)	
Position	(MHz)	Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
D 1 D 1	1850.2	GPRS	-2.582	24.76	24.80	1.009	0.926	0.935	/
Body-Back (10mm)	1880.0	GPRS	-0.597	24.84	24.90	1.014	1.017	1.031	6#
(1011111)	1909.8	GPRS	-3.694	25.16	25.20	1.009	0.953	0.962	/
D 1 7 6	1850.2	GPRS	/	/	/	/	/	/	/
Body-Left (10mm)	1880.0	GPRS	-3.176	24.84	24.90	1.014	0.429	0.435	/
(1011111)	1909.8	GPRS	/	/	/	/	/	/	/
D 1 D 1	1850.2	GPRS	/	/	/	/	/	/	/
Body-Right (10mm)	1880.0	GPRS	2.003	24.84	24.90	1.014	0.458	0.464	/
(1011111)	1909.8	GPRS	/	/	/	/	/	/	/
	1850.2	GPRS	/	/	/	/	/	/	/
Body-Bottom (10mm)	1880.0	GPRS	1.295	24.84	24.90	1.014	0.597	0.605	/
(1011111)	1909.8	GPRS	/	/	/	/	/	/	/

Note:

- 1 .When the 1-g SAR is \leq 0.8W/Kg, testing for other channels are optional.
- 2. According to IEEE 1528-2013, the middle channel is required to be tested first.
- 3. KDB 447498D01- When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.
- 4. The EUT is a Capability Class B mobile phone which can be attached to both GPRS and GSM services.
- 5. The Multi-slot Classes of EUT is Class12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.
- 6. The EUT transmit and receive through the same GSM antenna while testing SAR.
- 7. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tole rance limit according to the power applied to the individual channels tested to determine compliance.

Hot Spot-WCDMA 850 Band

EUT	Engguenav		Power	Max. Meas.	Max. Rated		1g SAR (W/Kg)	
Position	Frequency (MHz)	Test Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	826.4	RMC	0.688	21.85	21.9	1.012	0.389	0.394	/
Body-Back (10mm)	836.6	RMC	-0.438	21.89	21.9	1.002	0.449	0.450	7#
(1011111)	846.6	RMC	3.731	21.84	21.9	1.014	0.413	0.419	/
D 1 1 2	826.4	RMC	/	/	/	/	/	/	/
Body-Left (10mm)	836.6	RMC	-3.383	21.89	21.9	1.002	0.273	0.278	/
(1011111)	846.6	RMC	/	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/	/
Body-Right (10mm)	836.6	RMC	-0.618	21.89	21.9	1.002	0.237	0.237	/
(1011111)	846.6	RMC	/	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/	/
Body-Bottom (10mm)	836.6	RMC	-3.080	21.89	21.9	1.002	0.097	0.097	/
(Tollilli)	846.6	RMC	/	/	/	/	1	/	/

SAR Evaluation Report 47 of 100

Hot Spot-WCDMA 1900 Band

EUT	Fraguency		Power	Max. Meas.	Max. Rated		1g SAR ((W/Kg)	
Position	Frequency (MHz)	Test Mode	Drift (%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1852.4	RMC	-4.682	21.49	21.6	1.026	0.701	0.719	/
Body-Back (10mm)	1880.0	RMC	0.135	21.5	21.6	1.023	0.751	0.768	8#
(1011111)	1907.6	RMC	1.460	21.48	21.6	1.028	0.632	0.650	/
	1852.4	RMC	/	/	/	/	/	/	/
Body-Left (10mm)	1880.0	RMC	3.580	21.5	21.6	1.023	0.253	0.259	/
(1011111)	1907.6	RMC	/	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/	/
Body-Right (10mm)	1880.0	RMC	3.287	21.5	21.6	1.023	0.270	0.276	/
(1011111)	1907.6	RMC	/	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/	/
Body-Bottom (10mm)	1880.0	RMC	-4.518	21.5	21.6	1.023	0.511	0.523	/
(1011111)	1907.6	RMC	/	/	/	/	/	/	/


Note:

- 1. When the 1-g SAR is ≤ 0.8 W/Kg, testing for other channels are optional.
- 2. According to IEEE 1528-2013, the middle channel is required to be tested first.
- 3. KDB 447498D01- When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 4. The default test configuration is to measure SA R with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (refere nce measurement Channel) Configured in Test Loop Model.
- 5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tole rance limit according to the power applied to the individual channels tested to determine compliance.

SAR Evaluation Report 48 of 100

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

BT& Wi-Fi and GSM&3G Antennas Location:

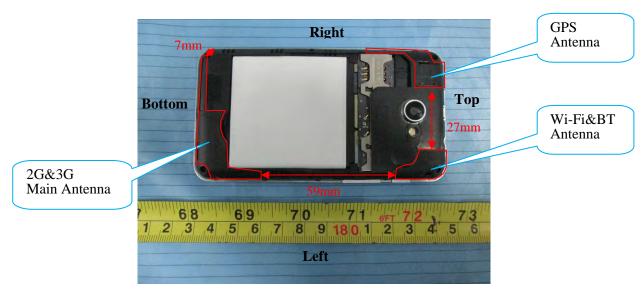

Simultaneous Transmission:

Description of Simultaneo	ous Transmit Cap	abilities	Antonnog Digtonog (mm)
Transmitter Combination	Simultaneous?	Hotspot?	Antennas Distance (mm)
GSM + WCDMA	×	×	0
GSM + Bluetooth	$\sqrt{}$	×	59
GSM + Wi-Fi	√	$\sqrt{}$	59
WCDMA + Bluetooth	√	×	59
WCDMA + Wi-Fi	√	\checkmark	59

Standalone SAR test exclusion considerations

Mode	Frequency (GHz)	Test Position	P _{avg} (dBm)	P _{avg} (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
Bluetooth	2.480	Head	4.50	2.818	0	0.9	3.0	Yes
Bluetooth	2.480	Body	4.50	2.818	10	0.4	3.0	Yes
Wi-Fi	2.462	Head	9.70	9.333	0	2.9	3.0	Yes
Wi-Fi	2.462	Body	9.70	9.333	10	1.5	3.0	Yes

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [$\sqrt{f(GHz)}$] ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

SAR Evaluation Report 49 of 100

Standalone SAR estimation:

Mode	Frequency (GHz)	Distance (mm)	P _{avg} (dBm)	P _{avg} (mW)	Estimated 1-g (W/kg)
BT Head	2.48	0	4.50	2.818	0.118
BT Body	2.48	10	4.50	2.818	0.059
Wi-Fi Head	2.462	0	9.70	9.333	0.391
Wi-Fi Body	2.462	10	9.70	9.333	0.196

Report No: RSZ160307001-20

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

[(max. power of channel, including **tune-up tolerance**, mW)/(min. test separation distance,mm)]· [$\sqrt{f(GHz)/x}$] W/kg for test separation distances \leq 50 mm; where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

Simultaneous SAR test exclusion considerations:

GSM with BT:

Mode	Position	Reported	SAR (W/kg)	ΣSAR
Mode	Position	GSM	ВТ	< 1.6W/kg
	Left Head Cheek	0.417	0.118	0.535
	Left Head Tilt	0.200	0.118	0.318
GSM 850	Right Head Cheek	0.382	0.118	0.500
	Right Head Tilt	0.188	0.118	0.306
	Body-Headset-Back	0.348	0.059	0.407
	Left Head Cheek	0.681	0.118	0.799
	Left Head Tilt	0.473	0.118	0.591
PCS 1900	Right Head Cheek	0.621	0.118	0.739
	Right Head Tilt	0.400	0.118	0.518
	Body-Headset-Back	0.824	0.059	0.883

SAR Evaluation Report 50 of 100

WCDMA with BT:

Mode	Position	Reported SAR (W/kg)		ΣSAR
2.20.20		WCDMA	BT	< 1.6W/kg
	Left Head Cheek	0.310	0.118	0.428
WCDMA 850	Left Head Tilt	0.195	0.118	0.313
WCDMA 830	Right Head Cheek	0.351	0.118	0.469
	Right Head Tilt	0.171	0.118	0.289
	Left Head Cheek	0.566	0.118	0.684
WCDMA 1000	Left Head Tilt	0.294	0.118	0.412
WCDMA 1900	Right Head Cheek	0.520	0.118	0.638
	Right Head Tilt	0.279	0.118	0.397

Report No: RSZ160307001-20

GSM with Wi-Fi:

Mode	Position	Reported 8	SAR (W/kg)	ΣSAR
Mode	Position	GSM	Wi-Fi	< 1.6W/kg
	Left Head Cheek	0.417	0.391	0.808
	Left Head Tilt	0.200	0.391	0.591
GSM 850	Right Head Cheek	0.382	0.391	0.773
	Right Head Tilt	0.188	0.391	0.579
	Body-Headset-Back	0.348	0.196	0.544
	Left Head Cheek	0.681	0.391	1.072
	Left Head Tilt	0.473	0.391	0.864
PCS 1900	Right Head Cheek	0.621	0.391	1.012
	Right Head Tilt	0.400	0.391	0.791
	Body-Headset-Back	0.824	0.196	1.020

WCDMA with Wi-Fi:

Mode	Position	Reported SAR (W/kg)		ΣSAR	
1/1000	2 00242022	WCDMA	Wi-Fi	< 1.6W/kg	
	Left Head Cheek	0.310	0.391	0.701	
WCDMA 850	Left Head Tilt	0.195	0.391	0.586	
WCDMA 850	Right Head Cheek	0.351	0.391	0.742	
	Right Head Tilt	0.171	0.391	0.562	
	Left Head Cheek	0.566	0.391	0.957	
WCDMA 1000	Left Head Tilt	0.294	0.391	0.685	
WCDMA 1900	Right Head Cheek	0.520	0.391	0.911	
	Right Head Tilt	0.279	0.391	0.670	

SAR Evaluation Report 51 of 100

Conclusion:

 $\Sigma SAR < 1.6 \text{ W/kg}$ therefore simultaneous transmission SAR with Volume Scans is **not** required.

Report No: RSZ160307001-20

Evaluations for Simultaneous SAR, BT+GSM/3G/4G								
Test Position	Body-Back (1.0cm)	Body-Left (1.0cm)	Body-Right (1.0cm)	Body-Bottom (1.0cm)	Body-Top (1.0cm)			
Mode		Stand	l Alone 1-g SAR (V	V/Kg)				
GPRS 850	0.850	0.474	0.341	0.370	/			
GPRS 1900	1.031	0.435	0.464	0.605	/			
WCDMA 850	0.450	0.278	0.237	0.097	/			
WCDMA 1900	0.768	0.259	0.276	0.523	/			
BT	0.059	0.059	/	/	0.059			
			$\sum 1$ -g SAR(W/Kg)	ı				
GPRS 850 + BT	0.909	0.533	/	/	/			
GPRS 1900 + BT	1.090	0.494	/	/	/			
WCDMA 850 + BT	0.509	0.337	/	/	/			
WCDMA 1900+ BT	0.827	0.318	/	/	/			

Evaluations for Simultaneous SAR, Mobile Hot Spot Positions								
Test Position	Body-Back Body-Left (1.0cm) (1.0cm)		Body-Right (1.0cm)	Body-Bottom (1.0cm)	Body-Top (1.0cm)			
Mode		Stand	l Alone 1-g SAR (W	V/Kg)				
GPRS 850	0.850	0.474	0.341	0.370	/			
GPRS 1900	1.031	0.435	0.464	0.605	/			
WCDMA 850	0.450	0.278	0.237	0.097	/			
WCDMA 1900	0.768	0.259	0.276	0.523	/			
Wi-Fi	0.196	0.196	/	/	0.196			
			$\sum 1$ -g SAR(W/Kg)					
GPRS 850 + Wi-Fi	1.046	0.670	/	/	/			
GPRS 1900 + Wi-Fi	1.227	0.631	/	/	/			
WCDMA 850 + Wi-Fi	0.646	0.474	/	/	/			
WCDMA 1900+ Wi-Fi	0.964	0.455	/	/	/			

Note:

If the sum of the 1g SAR measured for the simultaneously transmitting antennas is less than the SAR limit, SAR measurement for simultaneous transmission is not required.

SAR Evaluation Report 52 of 100

SAR Plots (Summary of the Highest SAR Values)

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek (836.6 MHz Middle Channel)

Measurement Data

Test mode : GSM
Crest Factor : 8
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.175 W/kg Power Drift-Finish : 0.171 W/kg Power Drift (%) : -2.286

Tissue Data

 Type
 : Head

 Frequency
 : 836.6 MHz

 Epsilon
 : 41.89 F/m

 Sigma
 : 0.93 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 835
Duty Cycle Factor : 8
Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)^2$

Compression Point : 95.00 mV Offset : 1.56 mm


 1 gram SAR value
 : 0.403 W/kg

 10 gram SAR value
 : 0.275 W/kg

 Area Scan Peak SAR
 : 0.425 W/kg

 Zoom Scan Peak SAR
 : 0.675 W/kg

Plot 1#

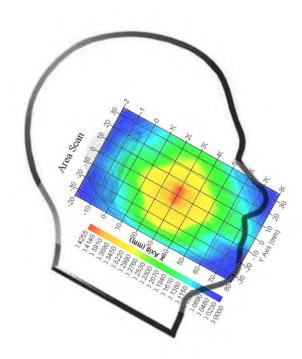

SAR Evaluation Report 53 of 100

Left Head Cheek(1880.0 MHz Middle Channel)

Measurement Data

Test mode : GSM
Crest Factor : 8
Scan Type : Complete

Area Scan : 11x8x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.005 W/kg Power Drift-Finish : 0.005 W/kg Power Drift (%) : 1.377

Tissue Data

 Type
 : Head

 Frequency
 : 1880.0 MHz

 Epsilon
 : 40.10 F/m

 Sigma
 : 1.43 S/m

 Density
 : 1000.00 kg/cu. M

Probe Data

Serial No. : 500-00283
Frequency Band : 1900
Duty Cycle Factor : 8
Conversion Factor : 4.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm


 1 gram SAR value
 : 0.633 W/kg

 10 gram SAR value
 : 0.407 W/kg

 Area Scan Peak SAR
 : 0.676 W/kg

 Zoom Scan Peak SAR
 : 0.882 W/kg

Plot 2#

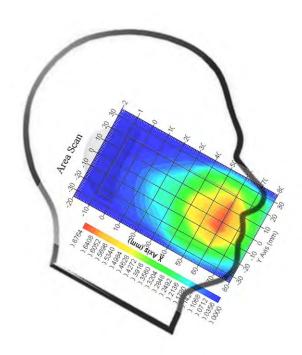

SAR Evaluation Report 54 of 100

WCDMA850; Right Head Cheek (836.6 MHz Middle Channel)

Measurement Data

Test mode : RMC
Crest Factor : 1
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.187 W/kg Power Drift-Finish : 0.185 W/kg Power Drift (%) : -1.070

Tissue Data

 Type
 : Head

 Frequency
 : 836.6 MHz

 Epsilon
 : 41.89 F/m

 Sigma
 : 0.93 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283 Frequency Band : 835 Duty Cycle Factor : 1 Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm


 1 gram SAR value
 : 0.350 W/kg

 10 gram SAR value
 : 0.186 W/kg

 Area Scan Peak SAR
 : 0.366 W/kg

 Zoom Scan Peak SAR
 : 0.585 W/kg

Plot 3#

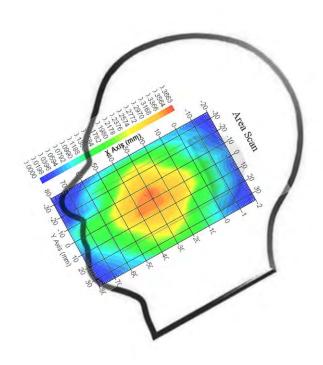

SAR Evaluation Report 55 of 100

WCDMA 1900; Left Head Cheek (1880.0 MHz Middle Channel)

Measurement Data

Test mode : RMC
Crest Factor : 1
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.009 W/kg Power Drift-Finish : 0.009 W/kg Power Drift (%) : 2.321

Tissue Data

 Type
 : Head

 Frequency
 : 1880.0 MHz

 Epsilon
 : 40.10 F/m

 Sigma
 : 1.43 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283 Frequency Band : 1900 Duty Cycle Factor : 1 Conversion Factor : 4.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm


 1 gram SAR value
 : 0.553 W/kg

 10 gram SAR value
 : 0.386 W/kg

 Area Scan Peak SAR
 : 0.581 W/kg

 Zoom Scan Peak SAR
 : 0.723 W/kg

Plot 4#

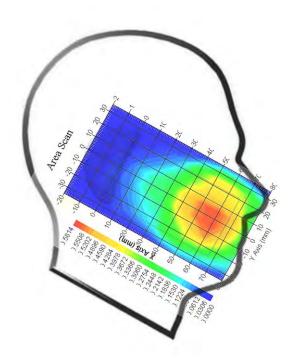

SAR Evaluation Report 56 of 100

Body-worn-Back (836.6 MHz Middle Channel)

Measurement Data

Test mode : GPRS
Crest Factor : 2
Scan Type : : Complete

Area Scan : 8x12x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.833 W/kg Power Drift-Finish : 0.827 W/kg Power Drift (%) : -0.720

Tissue Data

 Type
 : Body

 Frequency
 : 836.6 MHz

 Epsilon
 : 55.88 F/m

 Sigma
 : 1.00 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283
Frequency Band : 835
Duty Cycle Factor : 2
Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 0.821 W/kg 10 gram SAR value : 0.592 W/kg Area Scan Peak SAR : 0.874 W/kg Zoom Scan Peak SAR : 1.138 W/kg

Plot 5#

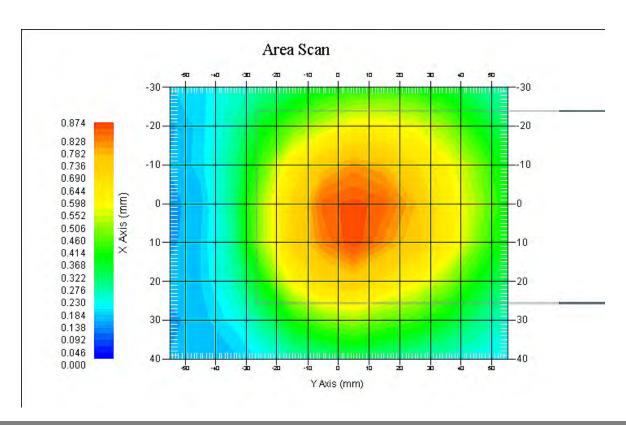

SAR Evaluation Report 57 of 100

Body-worn-Back (1880 MHz Middle Channel)

Measurement Data

Test mode : GPRS
Crest Factor : 2
Scan Type : Complete

Area Scan : 8x12x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.837 W/kg Power Drift-Finish : 0.832 W/kg Power Drift (%) : -0.597

Tissue Data

 Type
 : Body

 Frequency
 : 1880 MHz

 Epsilon
 : 53.57 F/m

 Sigma
 : 1.54 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 1900 Duty Cycle Factor : 2 Conversion Factor : 4.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 1.017 W/kg 10 gram SAR value : 0.696 W/kg Area Scan Peak SAR : 1.209 W/kg Zoom Scan Peak SAR : 1.955 W/kg

Plot 6#

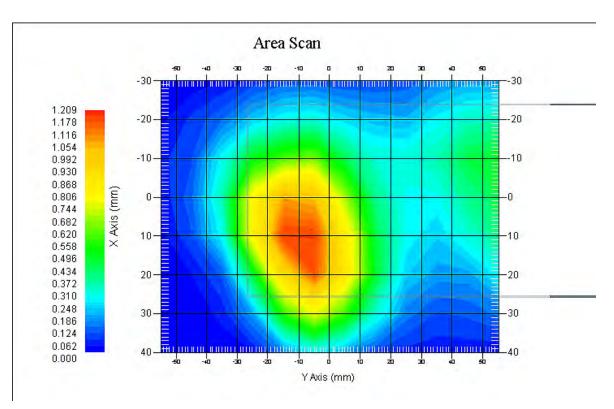

SAR Evaluation Report 58 of 100

WCDMA850; Body-Worn-Back (836.6 MHz Middle Channel)

Measurement Data

Test mode : RMC
Crest Factor : 1
Scan Type : Complete

Area Scan : 8x12x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.457 W/kg Power Drift-Finish : 0.455 W/kg Power Drift (%) : -0.438

Tissue Data

 Type
 : Body

 Frequency
 : 836.6 MHz

 Epsilon
 : 55.88 F/m

 Sigma
 : 1.00 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283 Frequency Band : 835 Duty Cycle Factor : 1 Conversion Factor : 5.9

Probe Sensitivity : 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm


 1 gram SAR value
 : 0.449 W/kg

 10 gram SAR value
 : 0.338 W/kg

 Area Scan Peak SAR
 : 0.470 W/kg

 Zoom Scan Peak SAR
 : 0.652 W/kg

Plot 7#

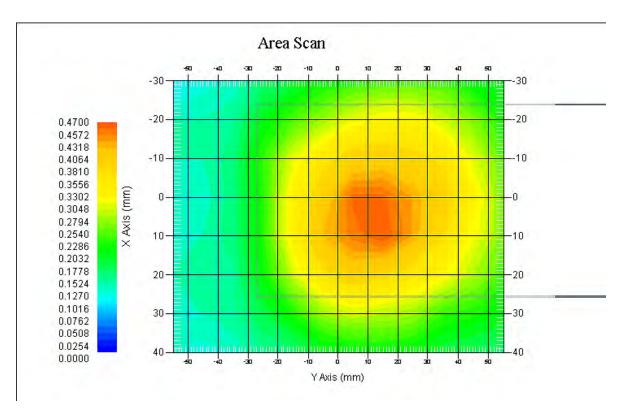

SAR Evaluation Report 59 of 100

WCDMA1900; Body-Worn-Back (1880 MHz Middle Channel)

Measurement Data

Test mode : RMC
Crest Factor : 1
Scan Type : Complete

Area Scan : 8x12x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.743 W/kg Power Drift-Finish : 0.744 W/kg Power Drift (%) : 0.135

Tissue Data

 Type
 : Body

 Frequency
 : 1880.0 MHz

 Epsilon
 : 53.57 F/m

 Sigma
 : 1.54 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283 Frequency Band : 1900 Duty Cycle Factor : 1 Conversion Factor : 4.8

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm


 1 gram SAR value
 : 0.751 W/kg

 10 gram SAR value
 : 0.531 W/kg

 Area Scan Peak SAR
 : 0.836 W/kg

 Zoom Scan Peak SAR
 : 1.420 W/kg

Plot 8#

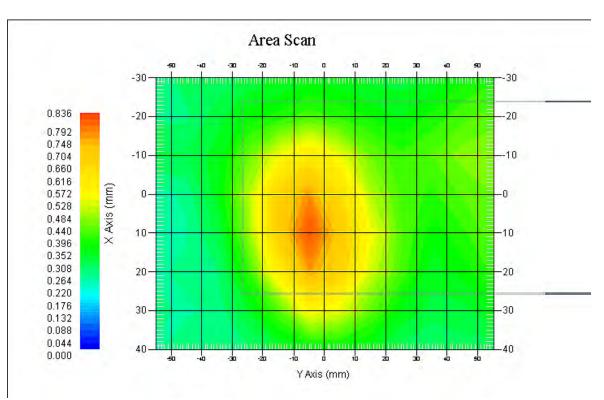

SAR Evaluation Report 60 of 100

APPENDIX A MEASUREMENT UNCERTAINTY

According to **IEEE1528:2013**, the uncertainty budget has been determined for the Head SAR measurement system and is given in the following Table.

Report No: RSZ160307001-20

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c _i ¹ (1-g)	c _i ¹ (10-g)	Standard Uncertain ty (1-g) %	Standard Uncertaint y (10-g) %			
Measurement System										
Probe Calibration	3.5	normal	1	1	1	3.5	3.5			
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5			
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	√ср	√ср	4.4	4.4			
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6			
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7			
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6			
Readout Electronics	1.0	normal	1	1	1	1.0	1.0			
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5			
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0			
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3			
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7			
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2			
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7			
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1			
	_	Test sar	nple relat	ed		_	_			
Test sample positioning	2.0	normal	1	1	1	2.0	2.0			
Device Holder Uncertainty	4.0	normal	1	1	1	6.215	6.215			
Drift of Output Power	5.0	rectangular	$\sqrt{3}$	1	1	2.67	2.67			
		Phanto	m and Set	up						
Phantom Uncertainty	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0			
SAR correction in permittivity and conductivity	1.2	normal	1	1	0.85	1.2	1.0			
Liquid conductivity measurement	5.0	normal	1	0.78	0.71	3.9	3.6			
Liquid permittivity measurement	5.0	normal	1	0.25	0.29	1.3	1.5			
conductivity—temperat ure	1.1	rectangular	$\sqrt{3}$	0.78	0.71	0.5	0.5			
permittivity—temperatu re	1.3	rectangular	$\sqrt{3}$	0.23	0.23	0.2	0.2			
Combined Uncertainty		RSS				10.78	10.55			
Expanded uncertainty (coverage factor=2)		Normal(k=2)				21.56	21.10			

SAR Evaluation Report 61 of 100

According to **IEC62209-2:2010**, the uncertainty budget has been determined for the Body SAR measurement system and is given in the following Table.

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c _i ¹ (1-g)	c _i ¹ (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %			
Measurement System										
Probe Calibration	3.5	normal	1	1	1	3.5	3.5			
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	1	1	1.5	1.5			
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6			
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7			
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6			
Readout Electronics	1.0	normal	1	1	1	1.0	1.0			
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5			
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0			
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3			
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7			
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2			
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7			
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1			
		Test sar	nple relate	ed						
Test sample positioning	2.0	normal	1	1	1	2.0	2.0			
Device Holder Uncertainty	4.0	normal	1	1	1	6.215	6.215			
Drift of Output Power	5.0	rectangular	$\sqrt{3}$	1	1	2.67	2.67			
		Phantor	n and Setu	ıp						
Phantom Uncertainty	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0			
SAR correction in permittivity and conductivity	1.2	normal	1	1	0.84	1.2	1.0			
Liquid conductivity measurement	5.0	normal	1	0.78	0.71	3.9	3.6			
Liquid permittivity measurement	5.0	normal	1	0.23	0.26	1.3	1.5			
conductivity—temperat ure	1.1	rectangular	$\sqrt{3}$	0.78	0.71	0.5	0.5			
permittivity—temperatu re	1.3	rectangular	$\sqrt{3}$	0.23	0.26	0.2	0.2			
Combined Uncertainty		RSS				9.58	9.49			
Expanded uncertainty (coverage factor=2)		Normal(k=2)				19.16	18.98			

SAR Evaluation Report 62 of 100

APPENDIX B – PROBE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Calibration File No.: PC-1654

Task No: BACL-5805

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe
Record of Calibration
Head and Body
Manufacturer: APREL Inc.
Model No.: ALS-E020

Model No.: ALS-E020 Serial No.: 500-00283

Calibration Procedure: D01-032-E020-V2, D22-012-Tissue, D28-002-Dipole

Project No: BACL-5805

Calibrated: 12th December 2015 Released on: 14th December 2015

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Sulle 102, 303 Terry Fox Dr. OTTAWA, ONTARIO CANADA K2K 3J1 Division of APREL Lab. TEL: (613) 435-8300 FAX: (613) 435-8306

SAR Evaluation Report 63 of 100

Division of APREL Inc.

Introduction

This Calibration Report reproduces the results of the calibration performed in line with the references listed below. Calibration is performed using accepted methodologies as per the references listed below. Probes are calibrated for air, and tissue and the values reported are the results from the physical quantification.

Calibration Method

Probes are calibrated using the following methods.

<800 MHz

TEM Cell for sensitivity in air

Standard phantom using temperature transfer method for sensitivity in tissue

>800 MHz

Waveguide* method to determine sensitivity in air and tissue

*Waveguide is numerically (simulation) assessed to determine the field distribution and power

The boundary effect for the probe is assessed using a standard flat phantom where the probe output is compared against a numerically simulated series of data points

References

- o IEEE Standard 1528:2013
 - IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- o IEC 62209-1:2006
 - Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices Human models. instrumentation, and procedures Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- o IEC 62209-2:2010
 - Human exposure to RF fields from hand-held and body-mounted wireless devices Human models, instrumentation, and procedures Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz 6 GHz)
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Page 2 of 10 Probe S/N 500-00283

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 64 of 100

Division of APREL Inc.

Conditions

Probe 500-00283 was a recalibration.

Ambient Temperature of the Laboratory: $20 \,^{\circ}\text{C}$ +/- 1.5°C Temperature of the Tissue: $21 \,^{\circ}\text{C}$ +/- 1.5°C Relative Humidity: < 60%

Primary Measurement Standards

 Instrument
 Serial Number
 Cal due date

 Power Meter Tektronix USB
 11C940
 Apr 2, 2017

 Signal Generator Agilent E4438C
 MY45094463
 Dec 11, 2017

Secondary Measurement Standards

Network Analyzer Anritsu 37347C 002106 Feb. 4, 2017

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Dan Brooks, Test Engineer

Page 3 of 10 Probe S/N 500-00283
This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 65 of 100

Division of APREL Inc.

Probe Summary

E-Field Probe E-020 Probe Type:

500-00283 Serial Number:

Frequency: As presented on page 5

Sensor Offset: 1.56

2.5 Sensor Length:

Tip Enclosure: Composite*

Tip Diameter: < 2.9 mm

Tip Length: 55 mm

Total Length: 289 mm

95 mV **Diode Compression Point:**

Sensitivity in Air

Frequency Range	Channel X, μV/(V/m) ²	Channel Y, μV/(V/m) ²	Channel Z, µV/(V/m) ²	Tolerance, μV/(V/m)²
450 MHz	1.212	1.205	1.199	±0.004
750 MHz, 835 MHz 900 MHz	1.212	1.21	1.209	±0,004
1 GHz – 4 GHz	1.21	1.21	1.207	±0.004
5 GHz – 6 GHz	1.2	1.192	1.19	±0.005

Page 4 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

Probe S/N 500-00283

66 of 100 **SAR** Evaluation Report

^{*}Resistive to recommended tissue recipes per IEEE-1528

Division of APREL Inc.

Calibration for Tissue (Head H. Body B)

Frequency	Tissue Type	Measured Epsilon	Measured Sigma	Standard Uncertainty (%)	Calibration Frequency Range (MHz)	Conversior Factor
450 H	Head	43.5	0.84	3.5	±50	5.7
450 B	Body	56.77	0.93	3.5	±50	5.8
750 H	Head	42.92	0.92	3.5	±50	6.0
750 B	Body	55.57	0.93	3.5	±50	5.9
835 H	Head	43.44	0.94	3.5	±50	5.9
835 B	Body	54.91	1.00	3.5	±50	5.9
900 H	Head	41.05	1.01	3.5	±50	6.0
900 B	Body	54.86	1.04	3.5	±50	5.9
1450 H	Head	X	Х	X	X	Х
1450 B	Body	X	X	Х	Х	Х
1500 H	Head	X	Х	Х	X	Х
1500 B	Body	X	Х	X	Х	Х
1640 H	Head	X	Х	Х	X	X
1640 B	Body	X	Х	X	X	X
1750 H	Head	38.58	1.36	3.5	±75	5.4
1750 B	Body	51.5	1.52	3.5	±75	5.3
1800 H	Head	X	Х	X	X	X
1800 B	Body	X	X	X	X	X
1900 H	Head	40.72	1.37	3.5	±75	4.8
1900 B	Body	52.29	1.58	3.5	±75	4.8
2000 H	Head	X	X	X	X	X
2000 B	Body	Х	Х	Х	X	Х
2100 H	Head	X	Х	X	X	Х
2100 B	Body	X	Х	X	X	Х
2300 H	Head	X	Х	X	X	Х
2300 B	Body	Х	Х	X	X	Х
2450 H	Head	37.35	1.85	3.5	±75	4.8
2450B	Body	53.26	1.96	3.5	±75	4.3
3000 H	Head	X	X	X	X	X
3000 B	Body	X	X	X	X	X
3600 H	Head	37.24	3.14	3.5	±100	4.4
3600 B	Body	50.23	3.81	3.5	±100	4.1
5250 H	Head	35.05	4.65	3.5	±100	3.1
5250 B	Body	46.24	5.11	3.5	±100	2.9
5600 H	Head	34.95	5.06	3.5	±100	3.0
5600 B	Body	45.95	5.73	3.5	±100	2.4
5800 H	Head	34.57	5.27	3.5	±100	3.1
5800 B	Body	46.01	6.10	3.5	±100	2.6

Page 5 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

Probe S/N 500-00283

Division of APREL Inc.

Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2.1% for the distance between the tip of the probe and the tissue boundary, when less than 0.58mm.

Spatial Resolution:

The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe.

DAQ-PAQ Contribution

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 $M\Omega$

Probe Calibration Uncertainty

Uncertainty component	Tolerance (± %)	Probability distribution	Divisor	Standard uncertainty (±%)
Incident or forward power	2.5	R	√3	1.44
Reflected power	2	R	√3	1.15
Liquid conductivity measurement	1	R	V3	0.58
Liquid permittivity measurement	1	R	√3	0.58
Liquid conductivity deviation	1.5	R	√3	0.87
Liquid permittivity deviation	1.5	R	√3	0.87
Frequency deviation	2.25	R	V3	1.30
Field homogeneity	2.5	R	√3	1.44
Field-probe positioning	2.5	R	√3	1.44
Field-probe linearity	1.55	R	√3	0.89
Combined standard uncertainty		RSS		3.50


Page 6 of 10 Probe S/N 500-00283

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 68 of 100

Division of APREL Inc.

Receiving Pattern Air

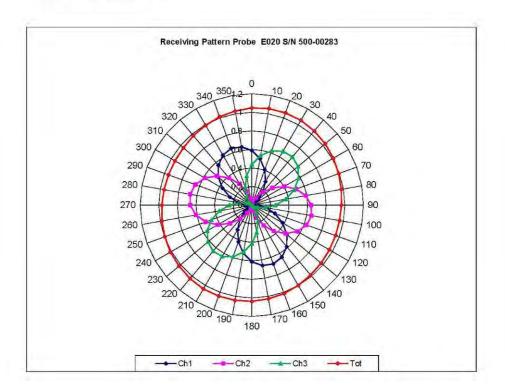



Page 7 of 10
This page has been reviewed for content and attested to on Page 2 of this document. Probe S/N 500-00283

SAR Evaluation Report 69 of 100

Division of APREL Inc.



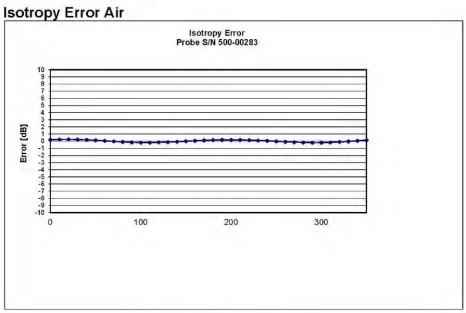

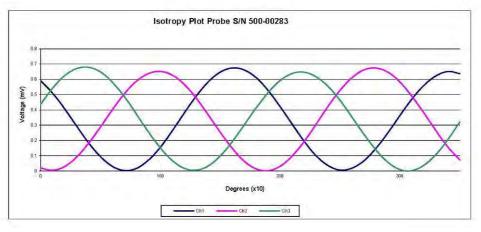


Page 8 of 10
This page has been reviewed for content and attested to on Page 2 of this document.

Probe S/N 500-00283

SAR Evaluation Report 70 of 100


Division of APREL Inc.

Dynamic Range

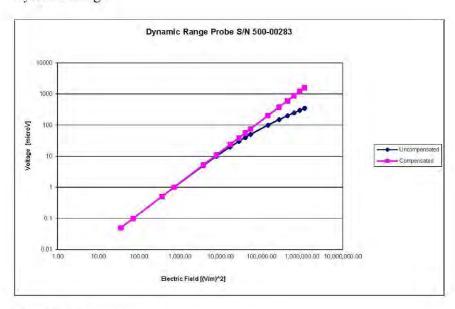

Video Bandwidth

Probe Frequency Characteristics

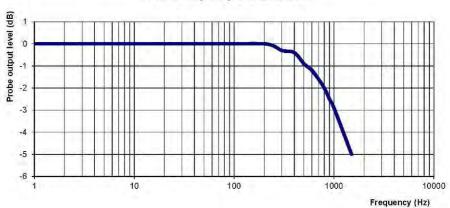

Video Bandwidth at 500 Hz Video Bandwidth at 1.02 KHz: 1 dB 3 dB

Page 9 of 10
This page has been reviewed for content and attested to on Page 2 of this document. Probe S/N 500-00283

71 of 100 **SAR** Evaluation Report

Report No: RSZ160307001-20

APPENDIX C DIPOLE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1599 Project Number: BAC-dipole-cal-5779

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole(Head and Body)

Manufacturer: APREL Laboratories Part number: ALS-D-835-S-2 Frequency: 835 MHz Serial No: 180-00558

Customer: Bay Area Compliance Laboratory (China)

Calibrated: 8th October 2014 Released on: 8th October 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

ite 102, 303 Terry Fox Dr. Kanata, ONTARIO CANADA K2K 3J1 Division of APREL Lab. TEL: (613) 435-8300 FAX: (613)435-8306

SAR Evaluation Report 72 of 100

Division of APREL Laboratories.

Conditions

Dipole 180-00558 was received with a damaged connection for a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 21 °C +/- 0.5°C

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Maryna Nesterova Calibration Engineer

Primary Measurement Standards

 Instrument
 Serial Number
 Cal due date

 Tektronix USB Power Meter
 11C940
 May 14, 2015

 Network Analyzer Anritsu 37347C
 002106
 Feb. 20, 2015

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 73 of 100

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 162.2 mm **Height:** 89.4 mm

Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	835 MHz	1.066 U	-30.344 dB	49.001 Ω
Body	835 MHz	1.089 U	-28.118 dB	53.117 Ω

System Validation Results

Tissue	Frequency	1 Gram	10 Gram	Peak
Head	835 MHz	9.773	6.174	14.713
Body	835 MHz	9.736	6.297	14.513

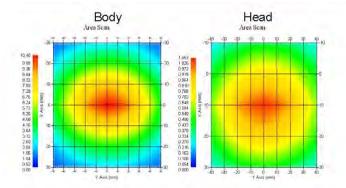

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 74 of 100

Division of APREL Laboratories

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 180-00558. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 225.

References

- IEC-62209 "Human exposure to radio frequency fields from hand-held and bodymounted wireless communication devices – Human models, instrumentation, and procedures"
- Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for handheld devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Conditions

Dipole 180-00558 was repaired prior to this calibration. The repair reliability depends upon correct usage of the dipole.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 20 °C +/- 0.5°C

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical1%Positioning Error1.22%Electrical1.7%Tissue2.2%Dipole Validation2.2%

TOTAL 8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

4

75 of 100

SAR Evaluation Report

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL	APREL	Measured	Measured
Length	Height	Length	Height
161.0 mm	89.8 mm	162.2 mm	89.4 mm

Electrical Verification

Tissue Type	Return Loss:	SWR:	Impedance:
lead	-30.344 dB	1.066 U	49.001Ω
Body	-28.118 dB	1.089 U	53.117 Ω 🗆

Tissue Validation

	Dielectric constant, sr	Conductivity, o [S/m]
Head Tissue 835MHz	43.42	0.94
Body Tissue 835MHz	55.77	1.01

This page has been reviewed for content and attested to by signature within this document.


SAR Evaluation Report 76 of 100

Division of APREL Laboratories.


The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

Head Tissue: Frequency Range 0.817 to 0.848 GHz

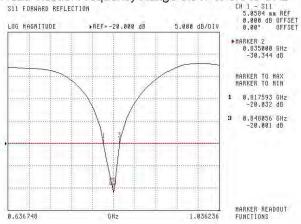

Body Tissue: Frequency Range 0.823 to 0.851 GHz

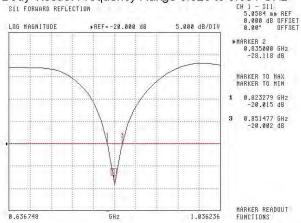


This page has been reviewed for content and attested to by signature within this document.


SAR Evaluation Report 77 of 100

Division of APREL Laboratories.

SWR

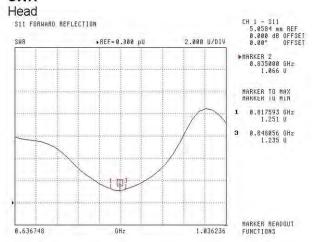

Body

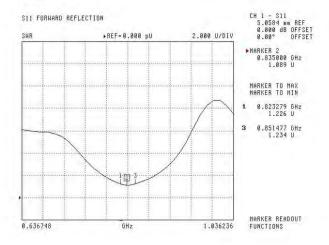


This page has been reviewed for content and attested to by signature within this document.


SAR Evaluation Report 78 of 100

Division of APREL Laboratories.

Smith Chart Dipole Impedance

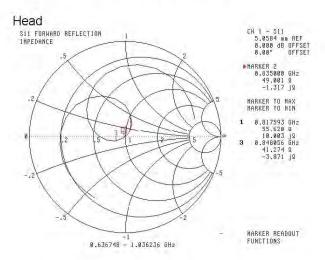

Body

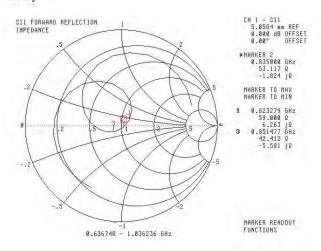

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 79 of 100

Division of APREL Laboratories.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List 2014.

9

Report No: RSZ160307001-20

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 80 of 100

NCL CALIBRATION LABORATORIES

Report No: RSZ160307001-20

Calibration File No: DC-1601 Project Number: BAC-dipole –cal-5779

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole (Head & Body)

Manufacturer: APREL Laboratories
Part number: ALS-D-1900-S-2
Frequency: 1900 MHz
Serial No: 210-00710

Customer: Bay Area Compliance Laboratory (China)

Calibrated: 9th October, 2014 Released on: 9th October, 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

uite 102, 303 Terry Fox Dr. Kanata, ONTARIO CANADA K2K 3J1 Division of APREL Lab. TEL: (613) 435-8300 FAX: (613)435-8306

SAR Evaluation Report 81 of 100

Division of APREL Laboratories.

Conditions

Dipole 210-00710 was received in good condition and was a re-calibration.

Ambient Temperature of the Laboratory: $22 \degree C +/- 0.5 \degree C$ Temperature of the Tissue: $21 \degree C +/- 0.5 \degree C$

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Maryna Nesterova Calibration Engineer

Primary Measurement Standards

 Instrument
 Serial Number
 Cal due date

 Tektronix USB Power Meter
 11C940
 May 14, 2015

 Network Analyzer Anritsu 37347C
 002106
 Feb. 20, 2015

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 82 of 100

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 67.1 mm **Height:** 38.9 mm

Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	1900MHz	1.084 U	-27.92 dB	52.247 Ω
Body	1900MHz	1.128 U	-24.40 dB	52.618 Ω

System Validation Results

Tissue	Frequency	1 Gram	10 Gram	Peak
Head	1900 MHz	39.481	20.44	73.364
Body	1900 MHz	39.715	20.552	73.565

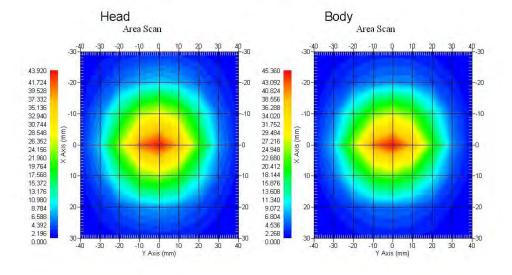

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 83 of 100

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 210-00710. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 225.

References

- IEC-62209 "Human exposure to radio frequency fields from hand-held and bodymounted wireless communication devices – Human models, instrumentation, and procedures"
- Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for handheld devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Conditions

Dipole 210-00710 was a recalibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 20 °C +/- 0.5°C

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical1%Positioning Error1.22%Electrical1.7%Tissue2.2%Dipole Validation2.2%

TOTAL 8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 84 of 100

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL	APREL	Measured	Measured
Length	Height	Length	Height
68.0 mm	39.5 mm	67.1mm	38.9 mm

Electrical Validation

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	1900MHz	1.084 U	-27.92 dB	52.247 Ω
Body	1900MHz	1.128 U	-24.40 dB	52.618 Ω

Tissue Validation

	Dielectric constant, sr	Conductivity, o [S/m]
Head Tissue 1900MHz	40.20	1.38
Body Tissue 1900MHz	52.63	1.46

5


This page has been reviewed for content and attested to by signature within this document.


SAR Evaluation Report 85 of 100

Division of APREL Laboratories.

The Following Graphs are the results as displayed on the Vector Network Analyzer.


MARKER READOUT FUNCTIONS

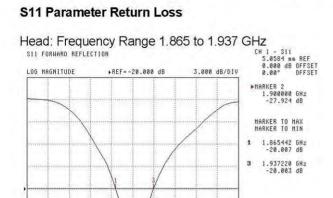



GHz

1.697888

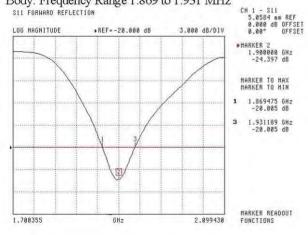



This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 86 of 100

Division of APREL Laboratories.

SWR

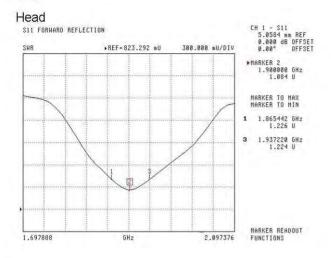

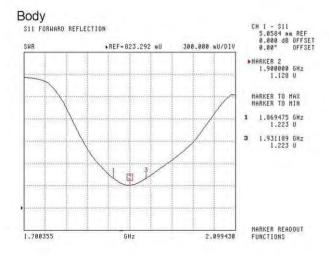


This page has been reviewed for content and attested to by signature within this document.


SAR Evaluation Report 87 of 100

Division of APREL Laboratories.

Smith Chart Dipole Impedance

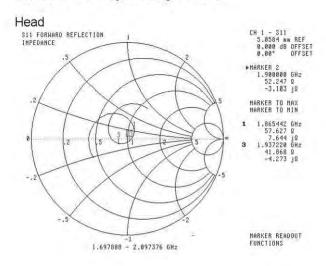

Body

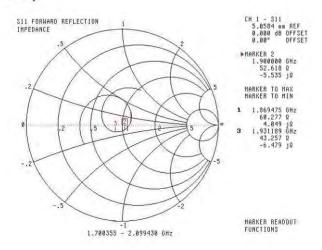

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 88 of 100

Division of APREL Laboratories.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List 2014


9

Report No: RSZ160307001-20

This page has been reviewed for content and attested to by signature within this document.


SAR Evaluation Report 89 of 100

APPENDIX D EUT TEST POSITION PHOTOS





Body-worn Back Setup Photo (10mm)

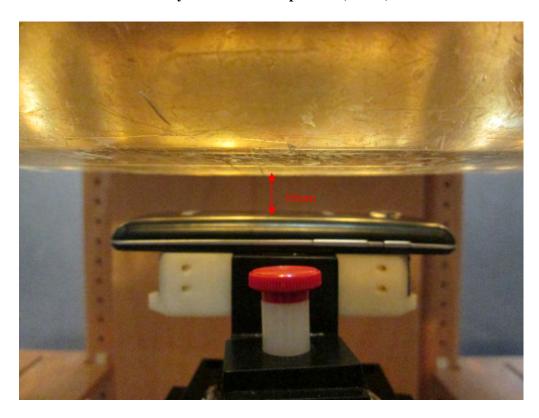


SAR Evaluation Report 90 of 100

Body-worn Left Setup Photo (10mm)



Body-worn Right Setup Photo (10mm)

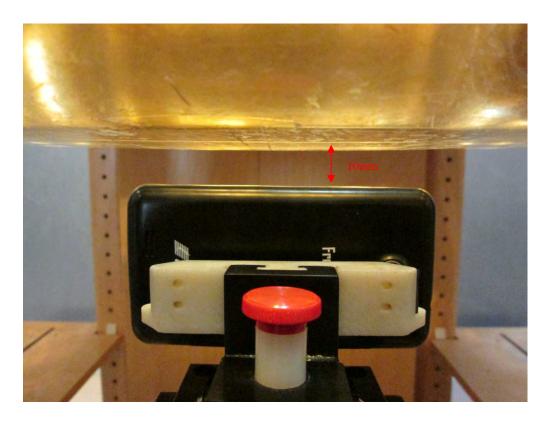


SAR Evaluation Report 91 of 100

Body-worn Bottom Setup Photo (10mm)



Left Head Touch Setup Photo

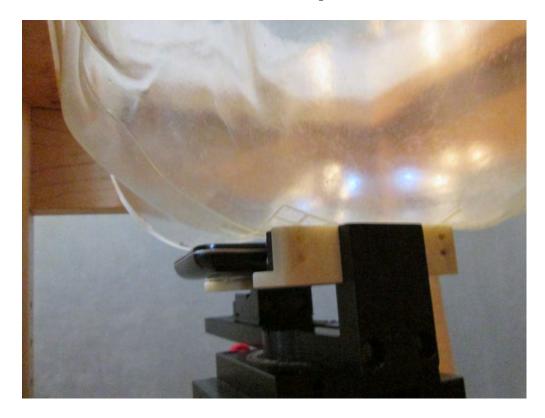


SAR Evaluation Report 92 of 100

Left Head Tilt Setup Photo




Right Head Touch Setup Photo

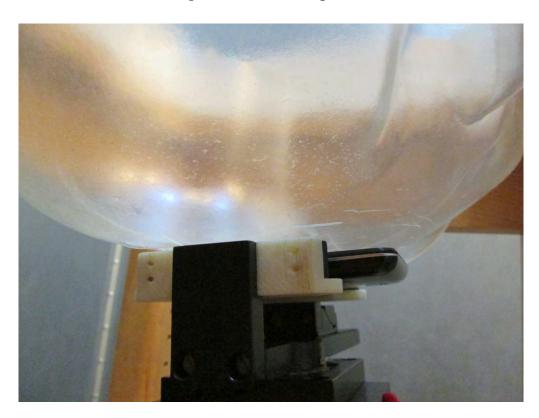

SAR Evaluation Report 93 of 100

Right Head Tilt Setup Photo

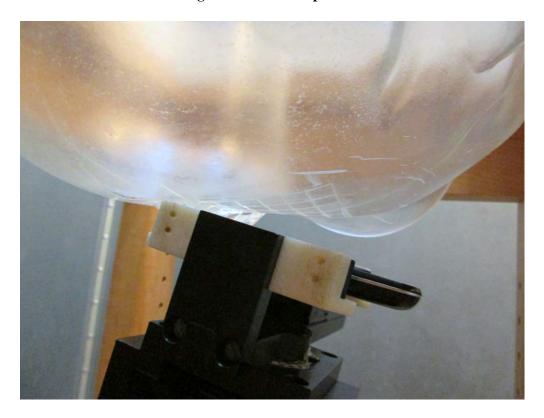

SAR Evaluation Report 94 of 100

APPENDIX E EUT PHOTOS

EUT – Front View



EUT - Back View



SAR Evaluation Report 95 of 100

EUT –Left Side View



EUT – Right Side View



SAR Evaluation Report 96 of 100

EUT – Top View



EUT – Bottom View



SAR Evaluation Report 97 of 100

EUT – Uncover View



SAR Evaluation Report 98 of 100

APPENDIX F INFORMATIVE REFERENCES

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, O_ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-_eld scanning system for dosimetricPage 99 of 100 assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph K.astle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM _ 97, Dubrovnik, October 15{17, 1997, pp. 120-24.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172-175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865-1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992. Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainity in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10.

SAR Evaluation Report 99 of 100

PRODUCT SIMILARITY DECLARATION LETTER

Cloud Bridge S.A. DE C.V.

Address: Autopista Mexico Queretaro 3063, Local 18, San Andres Atenco, Tlalnepantla, Mexico.

Report No: RSZ160307001-20

Tel: 005215591955014 Fax: 005215591955014 Email: Mario.mercado@Freshfun.com.mx

Product Similarity Declaration

March 28, 2016

FEDERAL COMMUNICATIONS COMMISSIONS Authorization and Evaluation Division 7435 Oakland Mills Road Columbia, MD 21046

To Whom It May Concern,

We, Cloud Bridge S.A. DE C.V., hereby declare that we have a product named as 3G Mobile phone (Model number: M351, FCC ID: 2AHNRFFM351) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series models (Cloud Bridge M351, FreshFun M351) on reports and certificate, all the models are identical schematics, only named differently. No other changes are made to them

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Sincerely,

Signature

Mario Mercado MARIO MERCADO

Manager

***** END OF REPORT *****

SAR Evaluation Report 100 of 100