



## Regulatory Test Report

Prepared for Harman International Industries, Inc.

This report presents detailed information on

**R1 EXT NA 3B HW4**

Prepared by

Aravind Buddana

Engineer II

Approved by

Jason Kanakry

General Manager

Issue date: 01/24/2025

Report No: J23133-R1 EXT NA 3B HW4-TR3 v2

This test result relates only to the described test object.  
This document shall not be reproduced, except in full, without the written approval of Bureau Veritas Test Lab.  
Customer must not use this test report as the product certification of each accreditation body or each national organization.  
The test is traceable to national standard or related international standard

## Contents

<b>1. Test Request Information</b> .....	3
<b>2. Test Laboratory Information</b> .....	4
<b>3. Statement of Conformity</b> .....	5
<b>4. Conducted Testing</b> .....	6
<b>5. Radiated Testing</b> .....	62

## 1. Test Request Information

<b>Test Request #:</b>	7700206789
<b>Test Requested By:</b>	Pranav Patel Harman International Industries, Inc. 30001 Cabot Drive, Novi, MI 48377
<b>Test item Description:</b>	R1 EXT NA 3B HW4
<b>Part Number:</b>	P68581660ZZ
<b>DUT Sample Number:</b>	J23133#4 NA 3B
<b>FVIN :</b>	FCA-MY24.MNL-OD.3426
<b>Hardware Version of DUT:</b>	N/A
<b>Software Version of DUT:</b>	N/A
<b>Component Category of DUT:</b>	N/A
<b>FCC ID:</b>	2AHPN-BE2877
<b>ISED ID:</b>	6434C-BE2877
<b>Type of Test:</b>	FCC/ISED Certification
<b>Test Method:</b>	CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 3, ISED Canada RSS-Gen Issue 5 and ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02
<b>Deviations from standard:</b>	None
<b>Approved Test Plan Number:</b>	N/A
<b>Test Plan Revision:</b>	N/A
<b>Date test Sample Received:</b>	06-26-2024
<b>Date Test Started:</b>	07-11-2024
<b>Date Test Finished:</b>	10-10-2024

## 2. Test Laboratory Information

<b>Location of Test Lab:</b>	The radiated and conducted emissions test sites are located at Bureau Veritas 815 N. Opdyke Rd #100, Auburn Hills, MI 48326, Phone: +1-248-836-4700
<b>Key Contact:</b>	Jason Kanakry (General Manager) Jason.Kanakry@BureauVeritas.com Phone: +1-248-836-4747
<b>Laboratory Accreditations:</b>	BUREAU VERITAS CONSUMER PRODUCTS SERVICES, INC is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.
<b>ISO/IEC 17025:2017:</b>	5678.01
<b>FCC Test Site Number:</b>	US1278 (242530)
<b>IC Test Site Number:</b>	US0229 (26240)

### 3. Statement of Conformity

RSS-GEN	RSS 247	Part 15	Comments
6.4		15.15(b)	There are no controls accessible to the user that varies the output power to operate in violation of the regulatory requirements.
		15.19	The label shown in the label exhibit.
		15.21	Information to the user shown in the instruction manual exhibit.
		15.27	No special accessories are required for compliance.
3.2		15.31	The EUT tested in accordance with the measurement standards in this section.
6.13.2		15.33	Frequency range investigated according to this section, unless noted in specific rule section under which the equipment operates.
6.13.1		15.35	The EUT emissions are measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
6.8		15.203	EUT employs integrated PCB antenna with 1.43dBi gain.
8.10		15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable
8.8		15.207	N/A. EUT is vehicle battery powered only.

## 4. Conducted Testing

### 4.1 Test Summary

This test report supports an application for certification of a transmitter operating pursuant to:

**CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 3**

The product is **R1 EXT NA 3B HW4** frequency hopping spread spectrum transmitter that operates in the 2402 – 2480 MHz frequency range.

Details	Description
Frequency Range (MHz)	2402 – 2480
Supported Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK
Tested Modulation	GFSK ( DH1 ), 8DPSK ( 3-DH1 ) - Highest Emissions
Number of Channels	79
Tested Channels	0,39,78
DUT Antenna Type	Integrated PCB antenna
Number of transmit chains	1
Equipment type	Frequency Hopping Spread Spectrum
Dwell Time	350ms
DUT Antenna Gain	1.43dBi <input checked="" type="checkbox"/> Provided by Customer with Gain Report <input type="checkbox"/> Not Provided by Customer
DUT Power Class/Power Settings	Power Class: 1 ( MRVL_Class1 )
DUT Software Tool/Settings	MFGBridge_Tool/Dut labtool is used to configure device Bluetooth modes and data rates.

79 channels are provided for BT mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
<b>0</b>	<b>2402</b>	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	<b>78</b>	<b>2480</b>
19	2421	<b>39</b>	<b>2441</b>	59	2461		

**Notes:** The channels 0, 39 and 78 were selected as representative test channels.

Full testing is performed on worst case modulation 3-DH1 from EDR and on DH1 from BDR Family.

## Test Results Summary

Test	Frequency (MHz)	DH1 Result	DH3 Result	DH5 Result	2-DH1 Result	2-DH3 Result	2-DH5 Result	3-DH1 Result	3-DH3 Result	3-DH5 Result
Hopping Frequencies	--- (hopping)	Pass	--	--	--	--	--	Pass	--	--
Band Edge High	--- (hopping)	Pass	--	--	--	--	--	Pass	--	--
Carrier Frequency Separation	2402.000 (hopping)	Pass	--	--	--	--	--	Pass	--	--
Carrier Frequency Separation	2480.000 (hopping)	Pass	--	--	--	--	--	Pass	--	--
Time of Channel Occupancy	2402.000 (hopping)	Pass	--	--	--	--	--	Pass	--	--
Time of Channel Occupancy	2441.000 (hopping)	Pass	--	--	--	--	--	Pass	--	--
Time of Channel Occupancy	2480.000 (hopping)	Pass	--	--	--	--	--	Pass	--	--
Emissions Bandwidth 20dB	2402.000 (single)	Pass	--	--	--	--	--	Pass	--	--
Occupied Channel Bandwidth 99%	2402.000 (single)	Pass	--	--	--	--	--	Pass	--	--
Band Edge Low	2402.000 (single)	Pass	--	--	--	--	--	Pass	--	--
Peak Output Power	2402.000 (single)	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
Tx Spurious	2402.000 (single)	Pass	--	--	--	--	--	Pass	--	--
Emissions Bandwidth 20dB	2441.000 (single)	Pass	--	--	--	--	--	Pass	--	--
Occupied Channel Bandwidth 99%	2441.000 (single)	Pass	--	--	--	--	--	Pass	--	--
Peak Output Power	2441.000 (single)	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
Tx Spurious	2441.000 (single)	Pass	--	--	--	--	--	Pass	--	--
Emissions Bandwidth 20dB	2480.000 (single)	Pass	--	--	--	--	--	Pass	--	--
Occupied Channel Bandwidth 99%	2480.000 (single)	Pass	--	--	--	--	--	Pass	--	--
Band Edge High	2480.000 (single)	Pass	--	--	--	--	--	Pass	--	--
Peak Output Power	2480.000 (single)	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
Tx Spurious	2480.000 (single)	Pass	--	--	--	--	--	Pass	--	--

Test Item	Sample #	Result
<a href="#">FCC 15.247 Bluetooth Classic</a>	J23133#4 NA 3B	Meets Requirement

We found that the product met the above requirements without modification.


Test samples received in good condition.




## 4.2 Test Setup

### Conducted Test Site Description

The site is accommodated to test tabletop and floor standing test equipment.

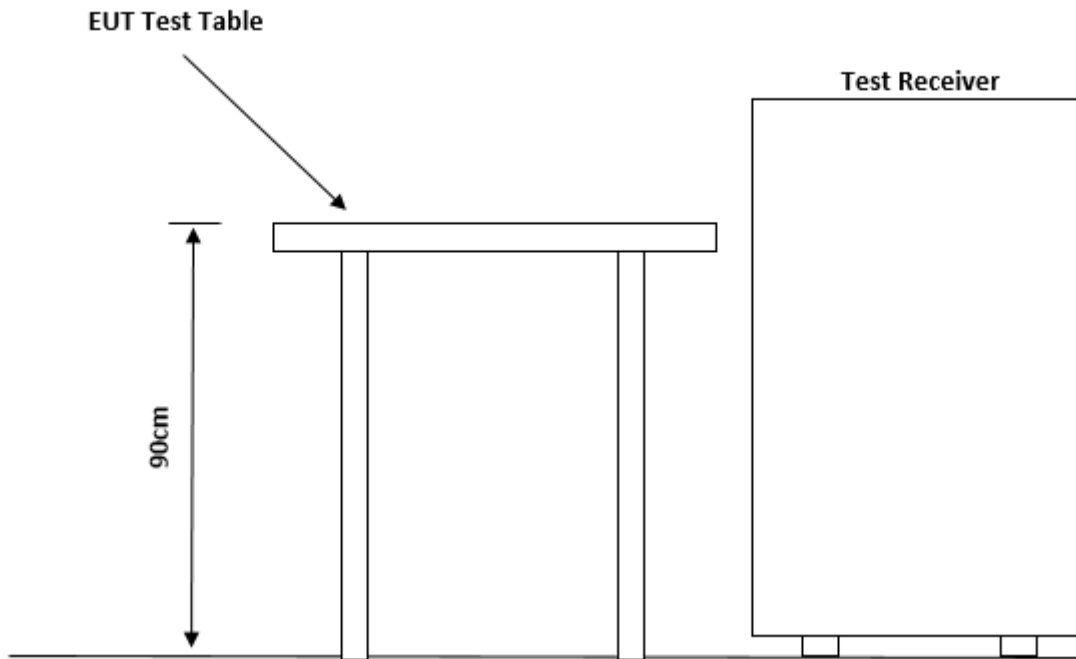

TEST SETUP DIAGRAM

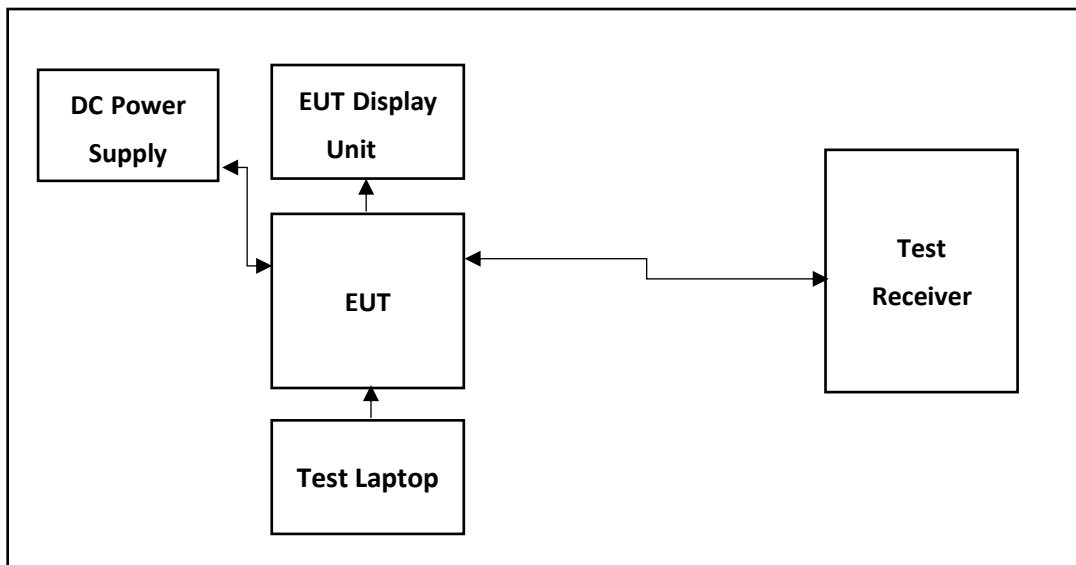

### 4.3 Test Equipment Used

ID #	Equipment	Manufacturer	Model #	Serial #	Cal Due
BVD0226	Spectrum Analyzer 10Hz-44GHz	Rohde & Schwarz	FSV3044	101018	4/20/2025
BVD0227	8 port switch unit for Wireless Test system	Rohde & Schwarz	OSP150	101100	11/24/2025
BVD0228	8 port switch unit for Wireless Test system	Rohde & Schwarz	OSP220	101632	11/14/2025
BVD0224	Signal Generator 100kHz-40GHz	Rohde & Schwarz	SMB100A	181741	4/20/2025
BVD0225	Signal Generator 100k-6GHz with GPS simulator	Rohde & Schwarz	SMW200A	107664	4/20/2025
BVD0250	Wireless Connectivity Tester 70M-6GHz	Rohde & Schwarz	CMW270	102113	4/20/2025
BVD0302	DC power supply 1-15VDC 60A 110/220 11.5A max input	BK Precision	1693	257F17180	N/A
BVD0321	Fixed Attenuator 2W 20dB -40GHz	Mini-Circuits	BW-K20-2W44+	2103	12/11/2024
BVD0430	Multimeter	Fluke	117	49710262SV	11/17/2024
BVD0229	Temp and Humidity Meter	Fluke	971	12001009	5/23/2025
N/A	Test-PC	Lenovo ThinkPad	E480	SL10Q37355	N/A

Notes:- DC power supply verified before use with calibrated Multimeter.

### Customer Supplied Equipment

ID #	Equipment	Manufacturer	Model	Serial #	Version No.
N/A	Harness	Harman	N/A	N/A	N/A
N/A	Display Unit	MOBIS	BMM6100000	231107 01	N/A
N/A	Shark Fin Antenna	Alfa Romeo	B901	719147	N/A
N/A	Antenna	Aptiv	APN35409682	N/A	N/A
N/A	Camera	N/A	23295906C	N/A	N/A
N/A	MFGBridge_Tool/Dut labtool	N/A	N/A	N/A	2.0.0.89

### Equipment List (Software)

ID #	Equipment	Manufacturer	Model	Version No	
N/A	EMC Test Software	Rodhe & Schwarz	EMC32	11.20.00	N/A

## 4.4 Test Data

### 4.4.1 Number of Hopping Frequencies

Test according to FCC title 47 part 15 §15.247(a),(g), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 7.8.3, RSS-247 Section 5.1(d)

#### Spectrum Analyzer Settings


Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
Sweeptime	200.000 ms	200.000 ms
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	FFT
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 10	max. 10
Stable	2 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

4.4.1.1 DH1

Channels:

Channels	Limit Min	Result
79	15	PASS

Plots:

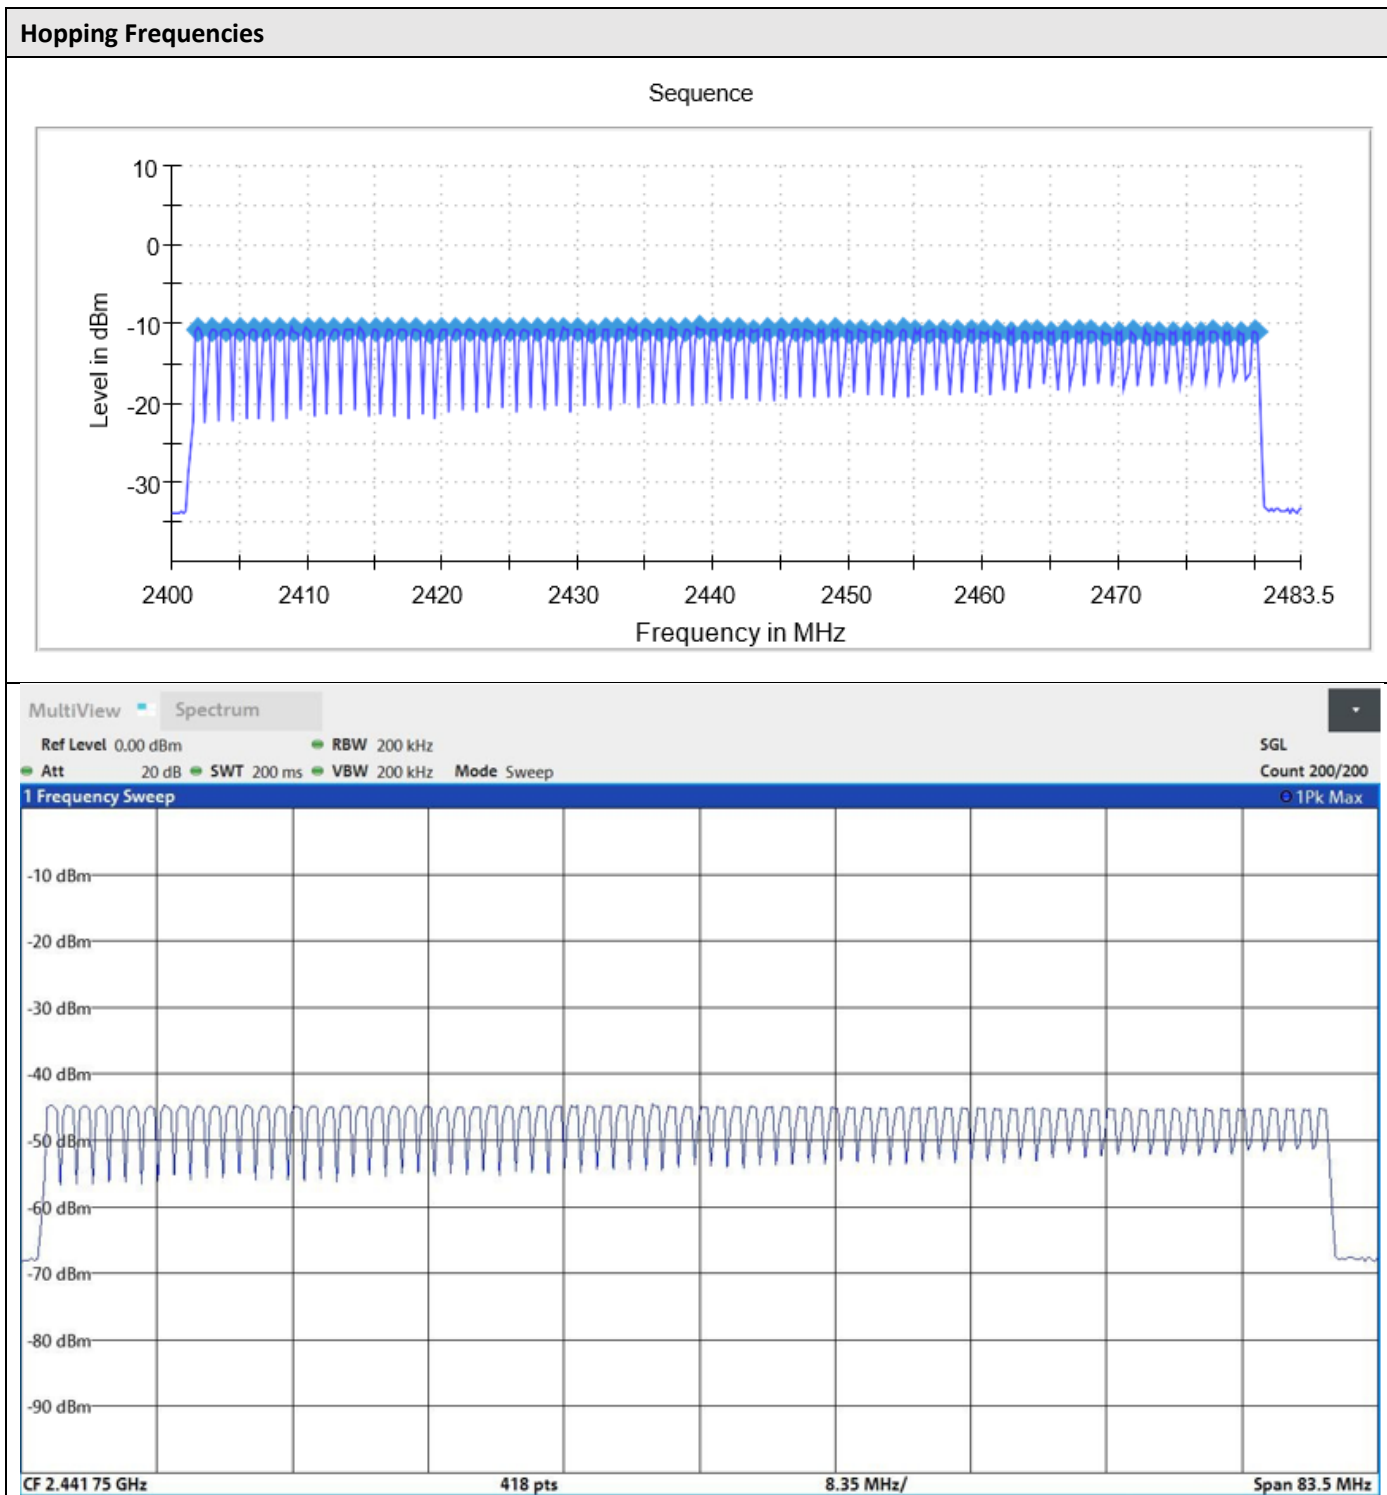


4.4.1.1 3-DH1

Channels:

Channels	Limit	Result
79	15	PASS

Plots:

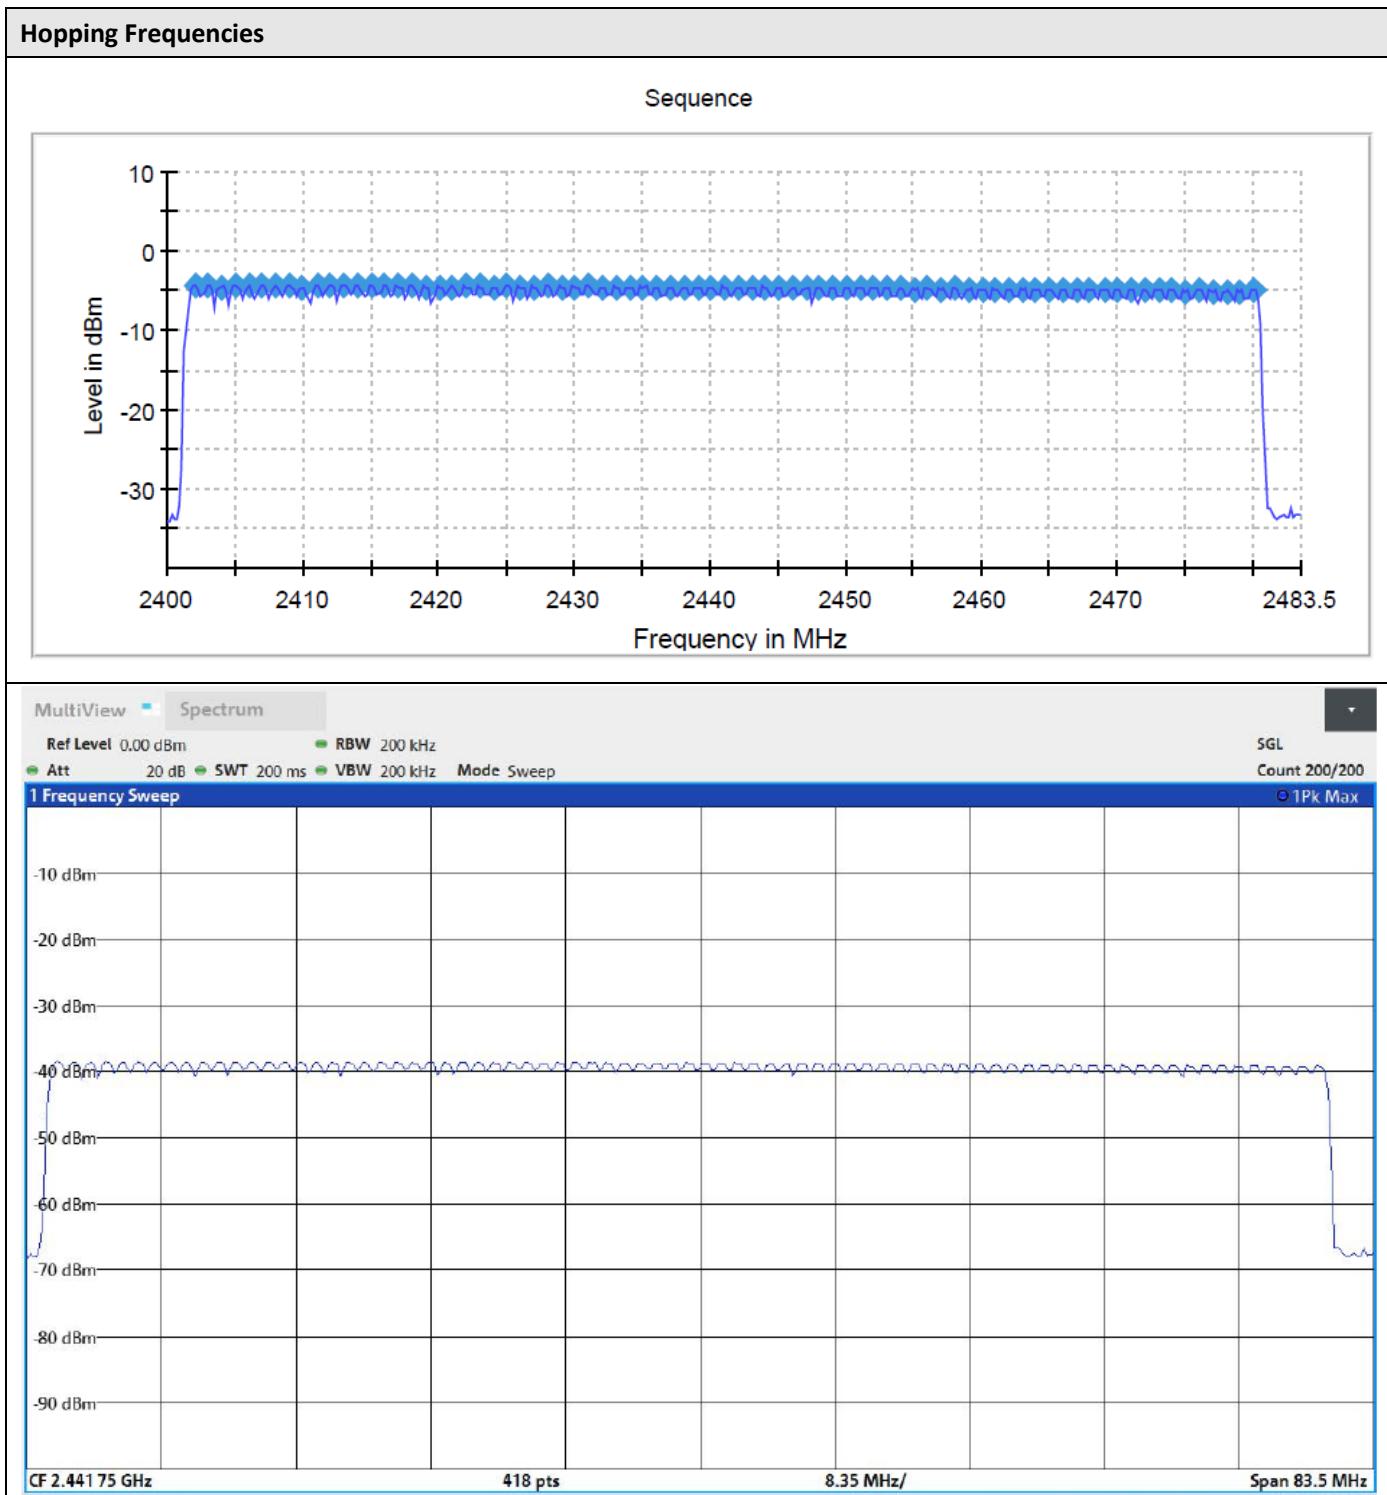

## 4.4.2 Band Edge (Hopping)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 7.8.6, RSS-247 Section 5.5

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 0.8 dB

Data Rate	Frequency (MHz)	Level (dBm)
DH1-HCH	2415.825000	-9.6
3-DH1-HCH	2408.825000	-3.1

### Spectrum Analyzer Settings


Setting	Instrument Value	Target Value
Start Frequency	2.35000 GHz	2.35000 GHz
Stop Frequency	2.55000 GHz	2.55000 GHz
Span	200.000 MHz	200.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	4000	~ 4000
Sweeptime	4.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	50 / max. 50	max. 50
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

#### 4.4.2.1 DH1

##### Measurements:

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2549.475000	-41.1	11.5	-29.6	PASS
2549.425000	-41.1	11.6	-29.6	PASS
2531.675000	-41.5	11.9	-29.6	PASS
2531.625000	-42.0	12.4	-29.6	PASS
2531.725000	-42.1	12.5	-29.6	PASS
2534.275000	-42.2	12.7	-29.6	PASS
2549.525000	-42.3	12.7	-29.6	PASS
2534.325000	-42.8	13.2	-29.6	PASS
2534.225000	-42.9	13.3	-29.6	PASS
2549.375000	-42.9	13.3	-29.6	PASS
2531.425000	-43.5	13.9	-29.6	PASS
2531.475000	-43.5	13.9	-29.6	PASS
2515.725000	-43.5	13.9	-29.6	PASS
2515.775000	-43.5	13.9	-29.6	PASS
2532.075000	-43.5	14.0	-29.6	PASS

Plots:

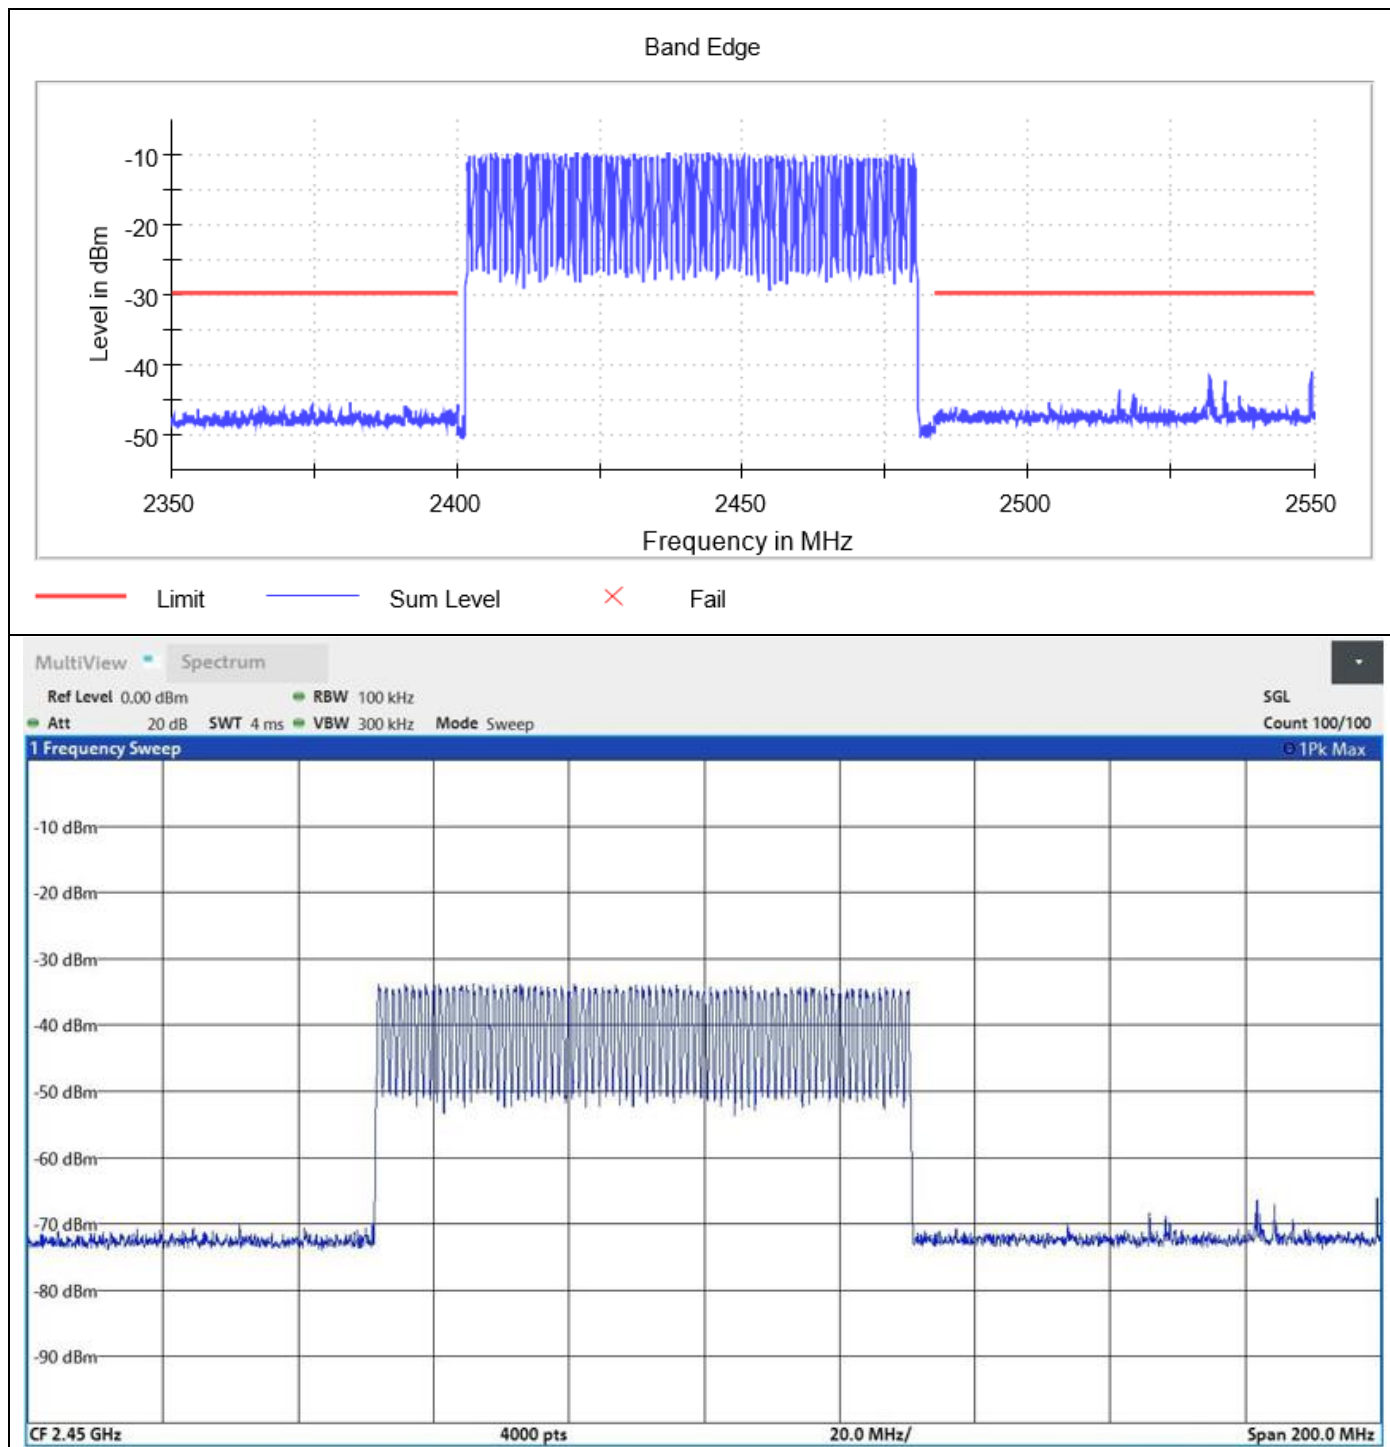





#### 4.4.2.2 3-DH1

##### Measurements:

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2496.775000	-45.0	21.9	-23.1	PASS
2496.725000	-45.2	22.2	-23.1	PASS
2490.675000	-45.4	22.3	-23.1	PASS
2490.625000	-45.5	22.4	-23.1	PASS
2523.325000	-45.5	22.4	-23.1	PASS
2495.875000	-45.5	22.5	-23.1	PASS
2490.725000	-45.5	22.5	-23.1	PASS
2389.375000	-45.6	22.5	-23.1	PASS
2529.125000	-45.6	22.6	-23.1	PASS
2504.675000	-45.7	22.6	-23.1	PASS
2529.075000	-45.7	22.6	-23.1	PASS
2504.725000	-45.7	22.6	-23.1	PASS
2541.675000	-45.7	22.6	-23.1	PASS
2496.825000	-45.7	22.6	-23.1	PASS
2487.175000	-45.7	22.7	-23.1	PASS

Plots:

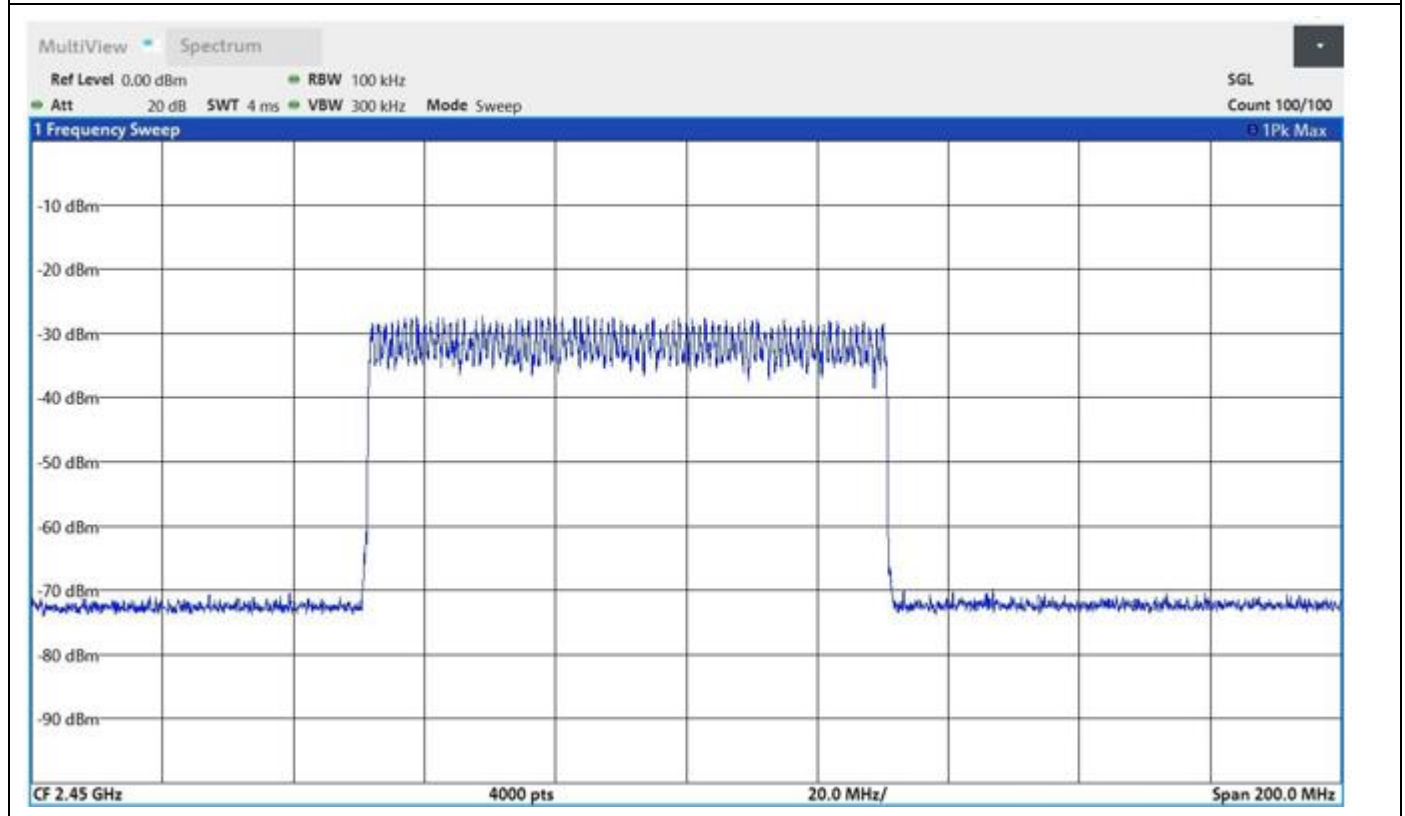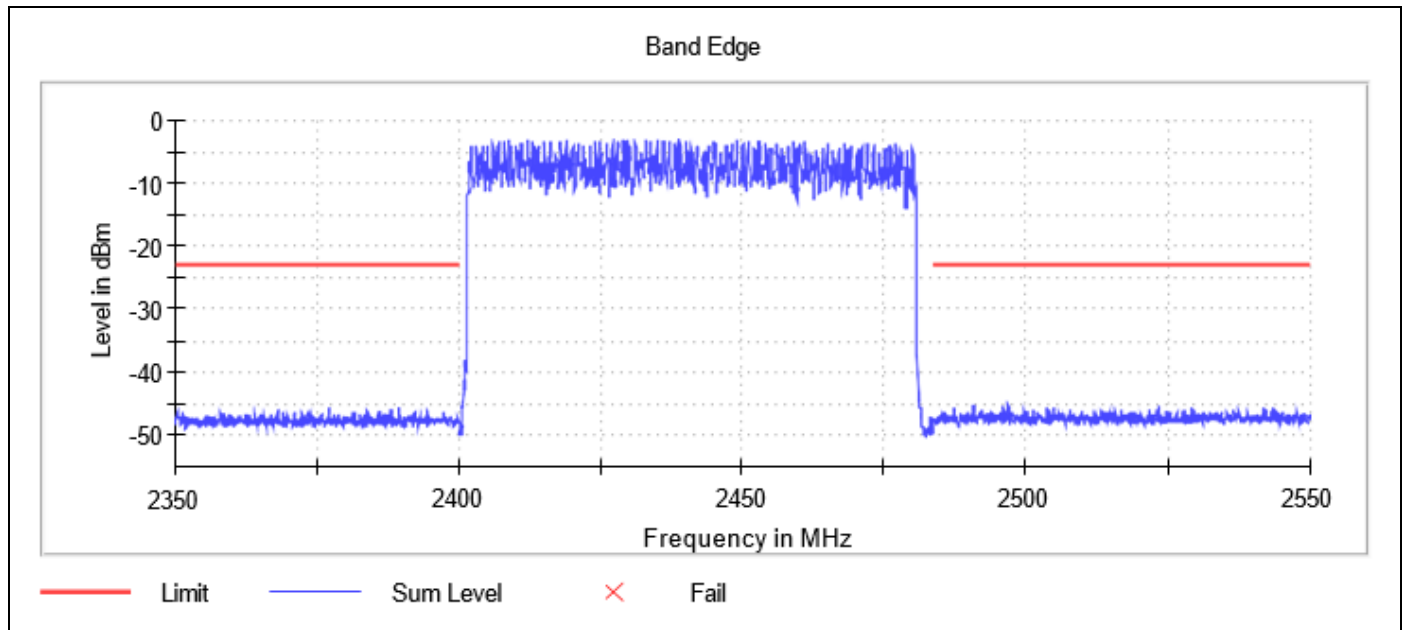

### 4.4.3 Carrier Frequency Separation

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 7.8.2, RSS-247 Section 5.1(b)

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (k = 2) < 1%


Hopping Mode				
Packet Type	2402MHz		2480MHz	
	Frequency Separation (MHz)	Minimum Limit (MHz)	Frequency Separation (MHz)	Minimum Limit (MHz)
DH1	0.990099	0.666667	0.990099	0.666667
3-DH1	0.990099	0.871287	0.990099	0.871287

#### Spectrum Analyzer Settings:

Setting	Instrument Value	Target Value
Start Frequency	2.39950 GHz	2.39950 GHz
Stop Frequency	2.40450 GHz	2.40450 GHz
Span	5.000 MHz	5.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	100.000 kHz	>= 100.000 kHz
SweepPoints	101	~ 50
Sweeptime	100.000 ms	100.000 ms
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	FFT
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 50	max. 50
Stable	10 / 10	10
Max Stable Difference	0.03 dB	0.50 dB


### 4.4.3.1 DH1

Plots:

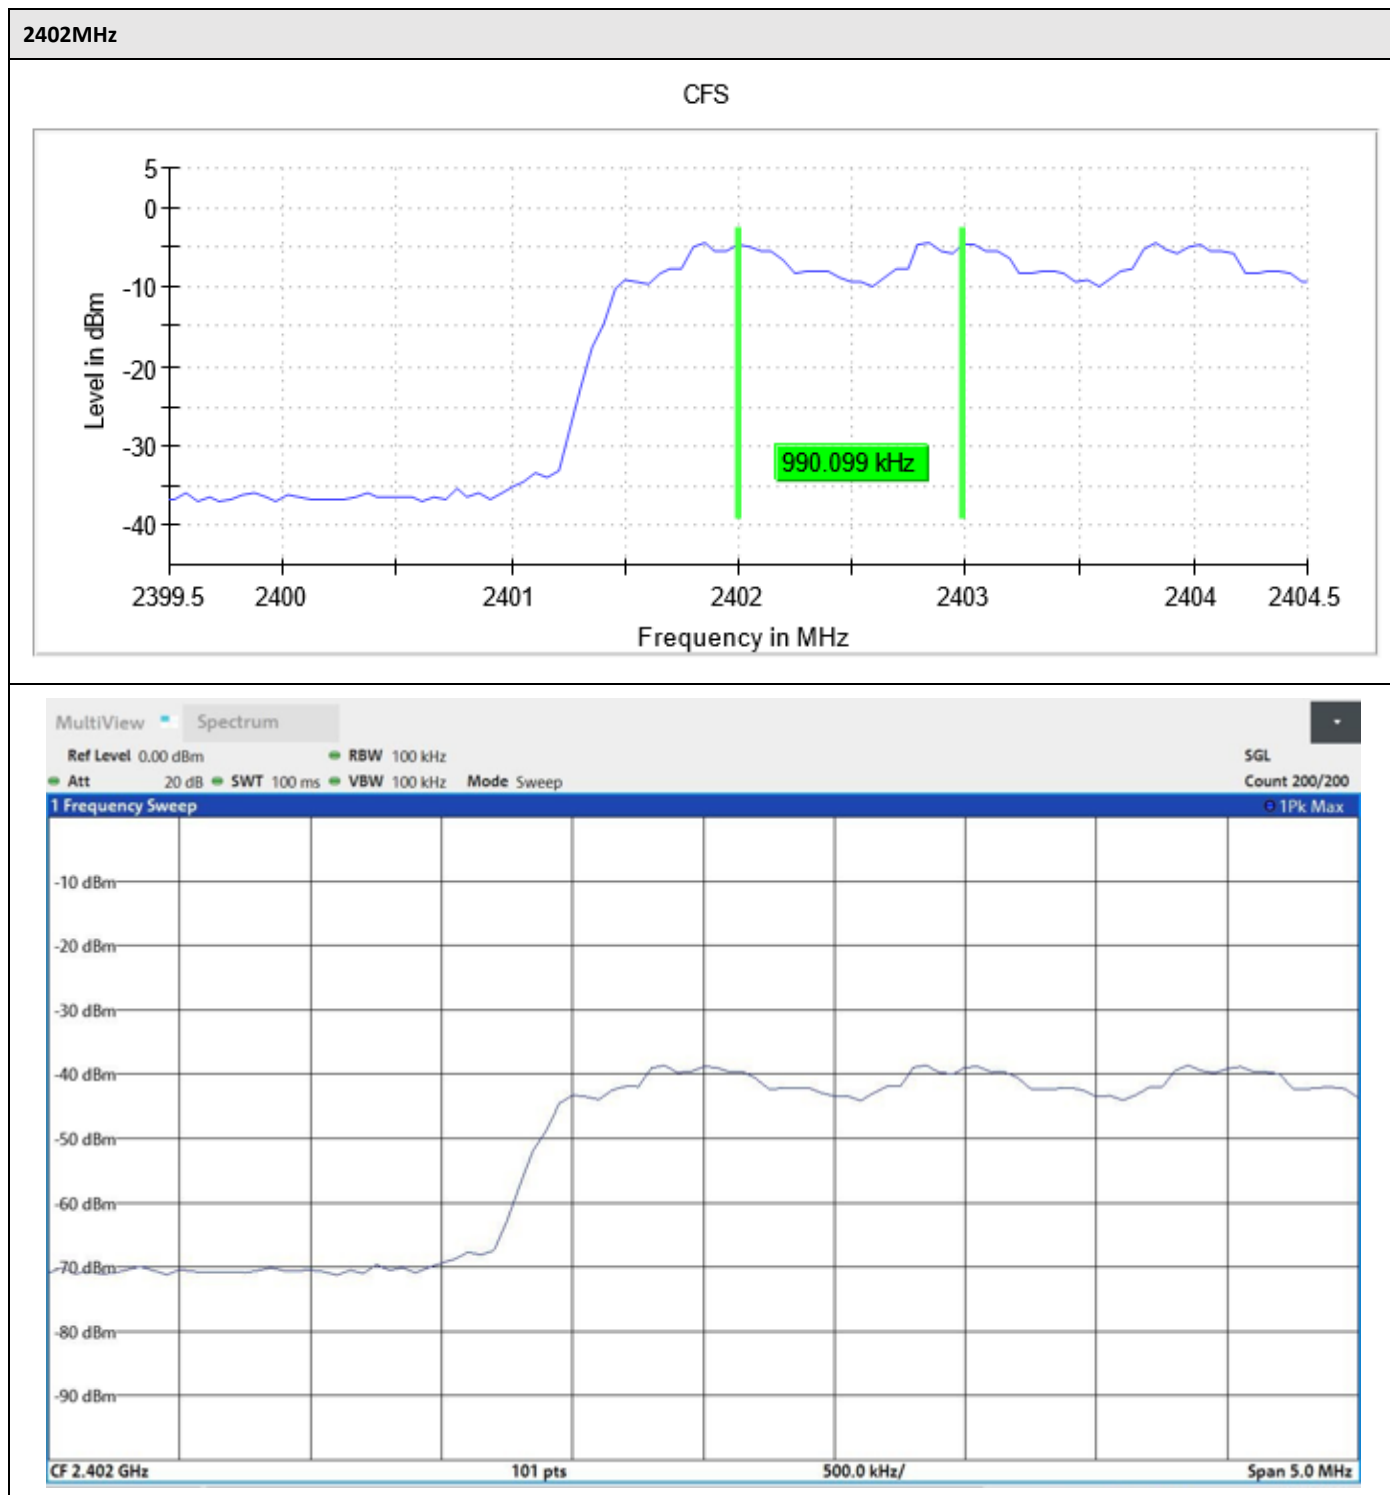

### 4.4.3.2 3-DH1

#### Plots:

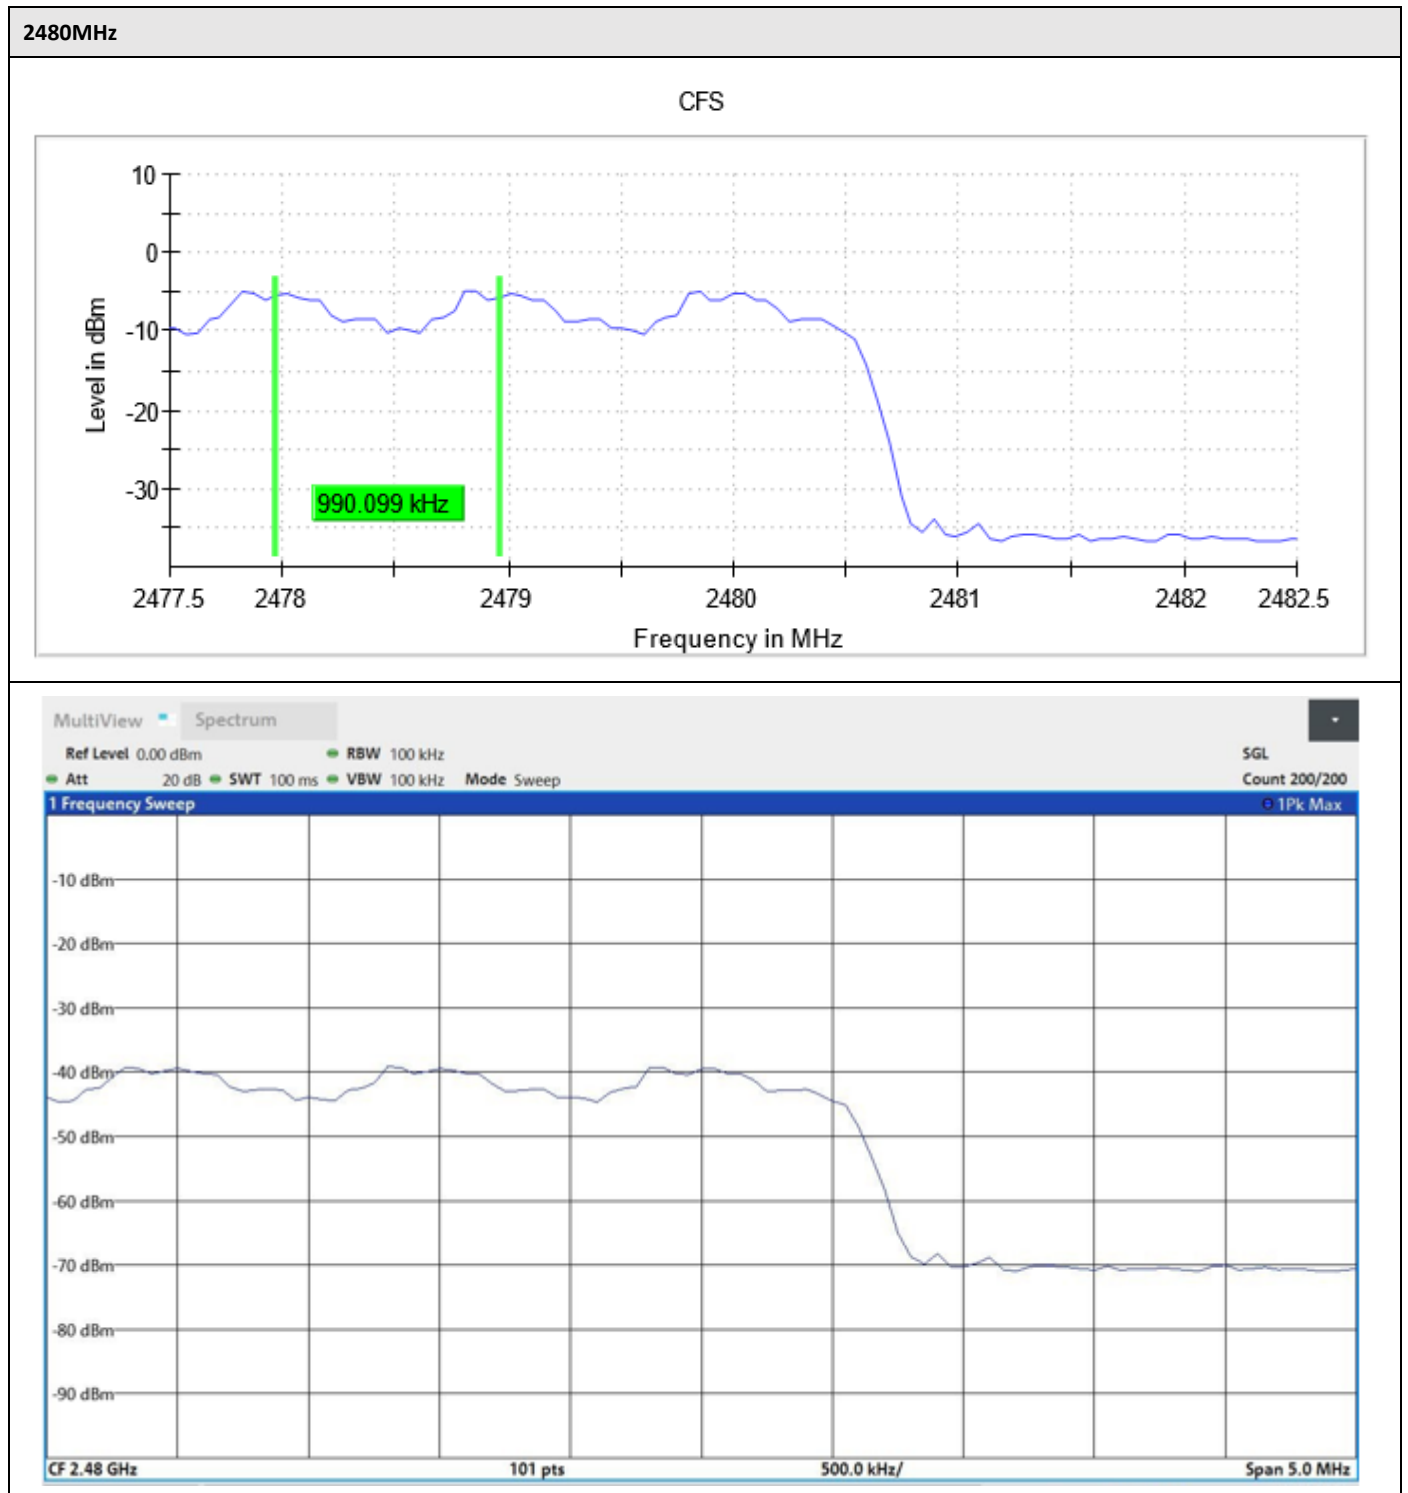

#### 4.4.4 Time of Channel Occupancy

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 7.8.4, RSS-247 Section 5.1(d)

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 1%

The transmit time per hop was measured by summing the sweep points above a threshold at least 10dB from the maximum level on the spectrum analyzer display.


Frequency	Data Rate	Mean Transmit Time per Hop (ms)	Number of Hops	Time (ms)	Limit Max (ms)	Result
2402	DH1	0.393	319	125.920	400.000	PASS
2402	3-DH1	0.352	319	112.660	400.000	PASS
2441	DH1	0.395	318	126.000	400.000	PASS
2441	3-DH1	0.353	319	112.840	400.000	PASS
2480	DH1	0.393	319	125.890	400.000	PASS
2480	3-DH1	0.344	319	110.010	400.000	PASS

#### Spectrum Analyzer Settings:

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
Sweeptime	31.600 s	31.600 s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
Sweeptype	Sweep	AUTO
Preamplifier	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s


### 4.4.4.1 DH1

#### Plots:

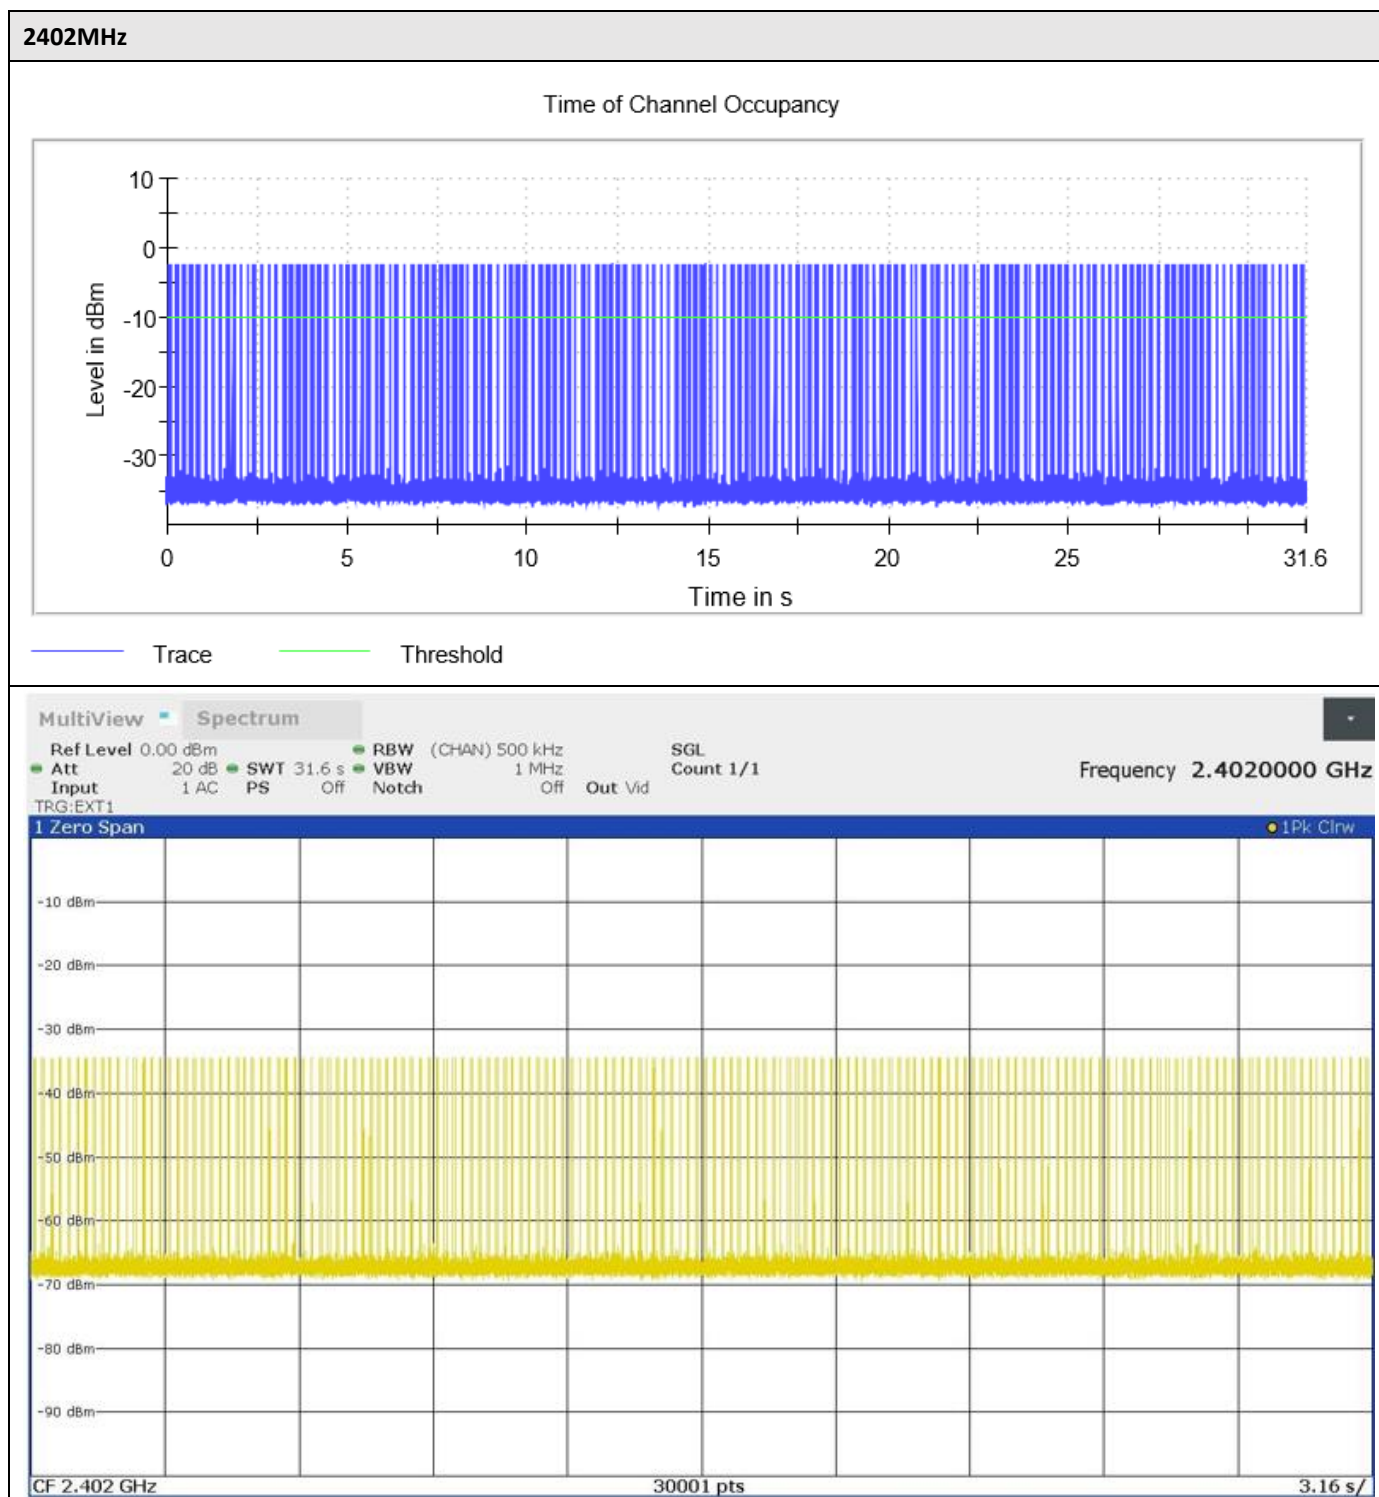

**2441MHz**


Time of Channel Occupancy

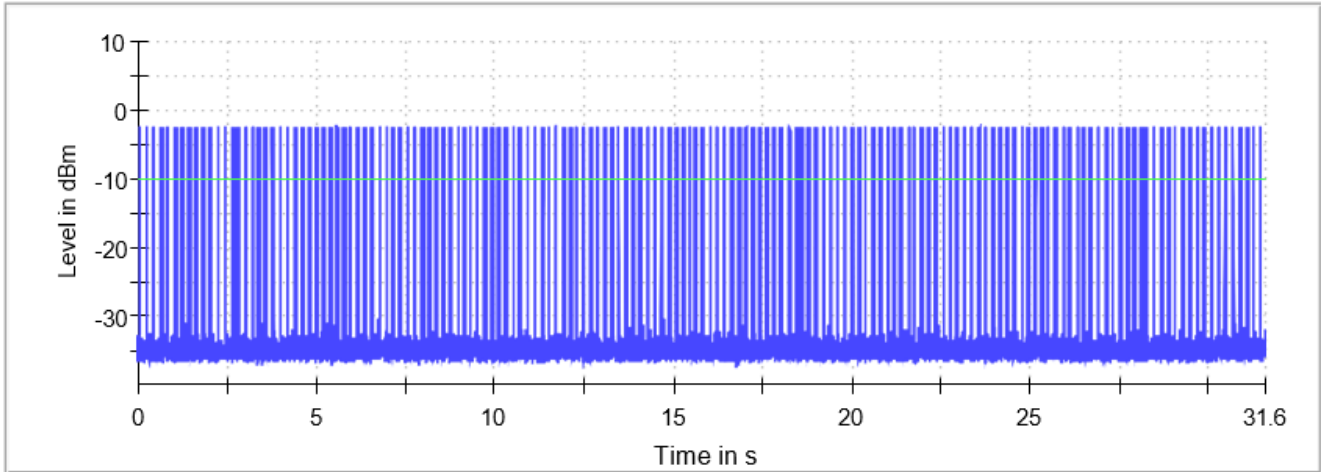

— Trace      — Threshold

**2480MHz**

Time of Channel Occupancy

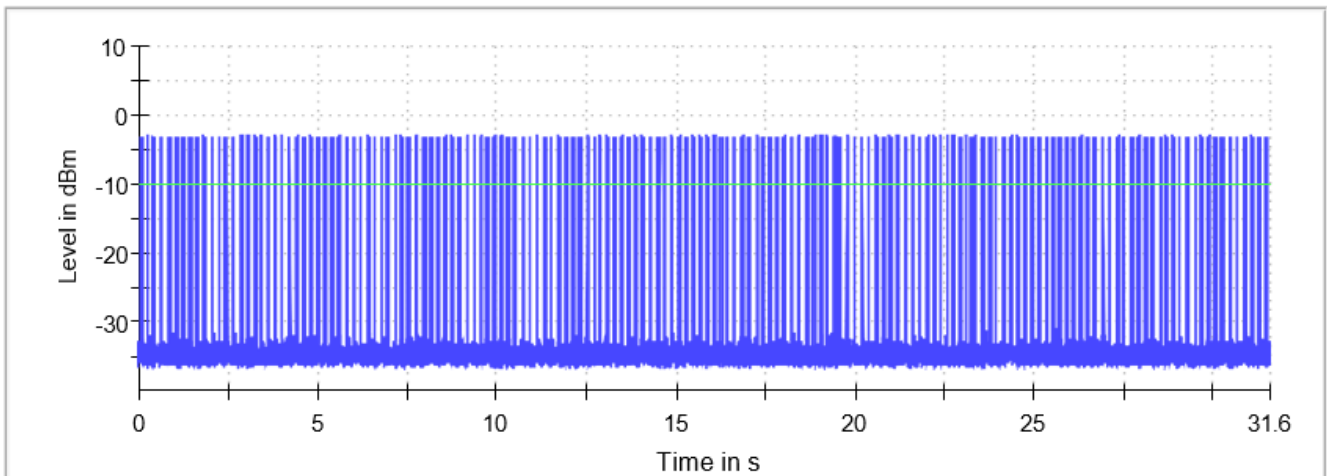


— Trace      — Threshold




### 4.4.4.2 3-DH1

#### Plots:

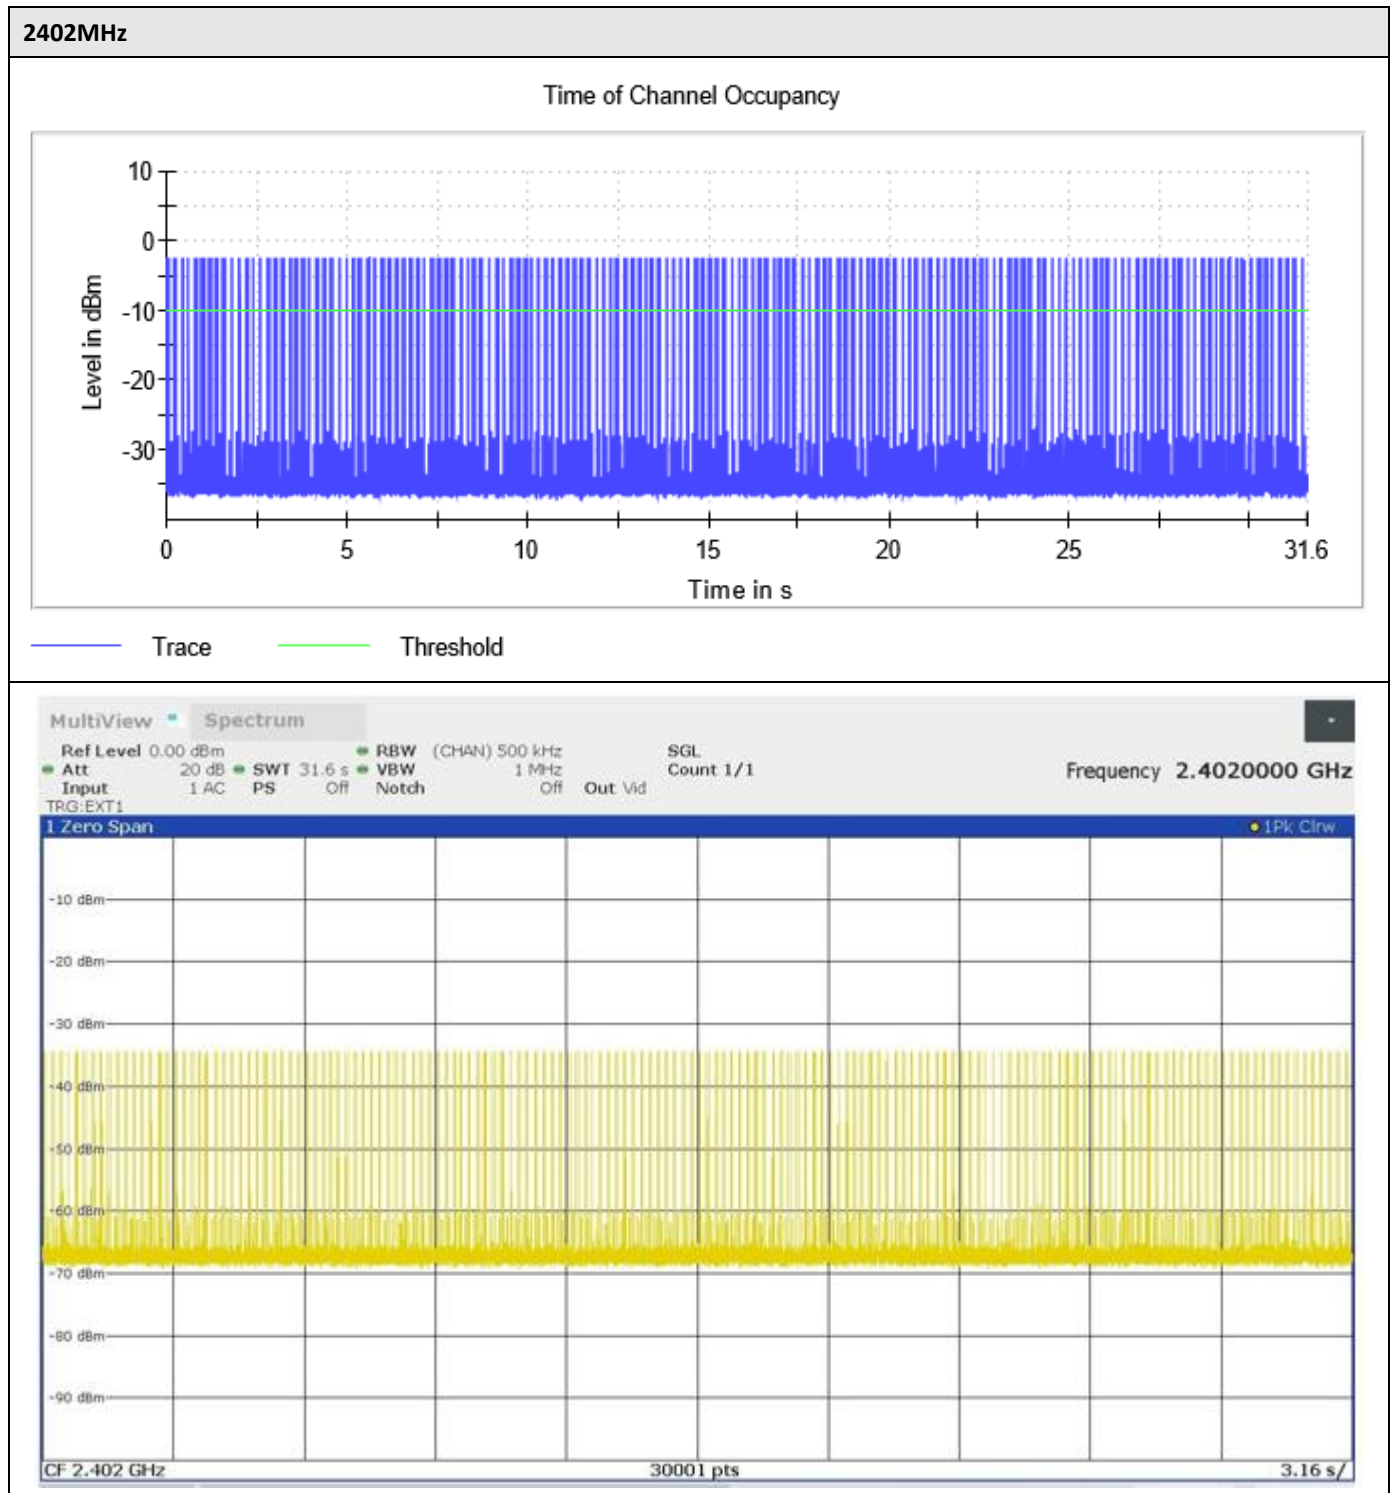


2441MHz

Time of Channel Occupancy

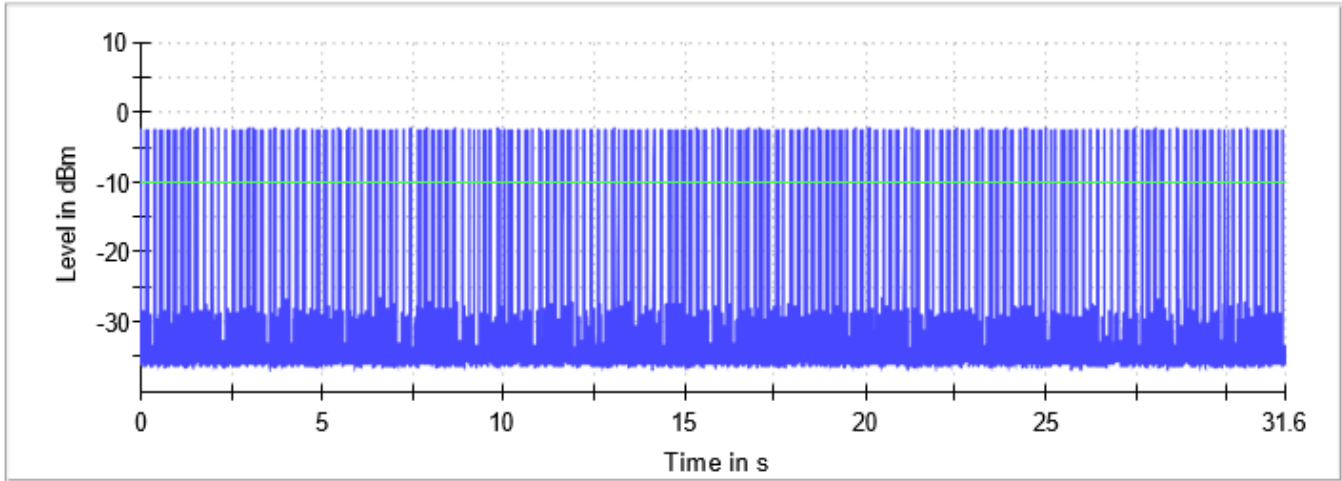

2480MHz

Time of Channel Occupancy

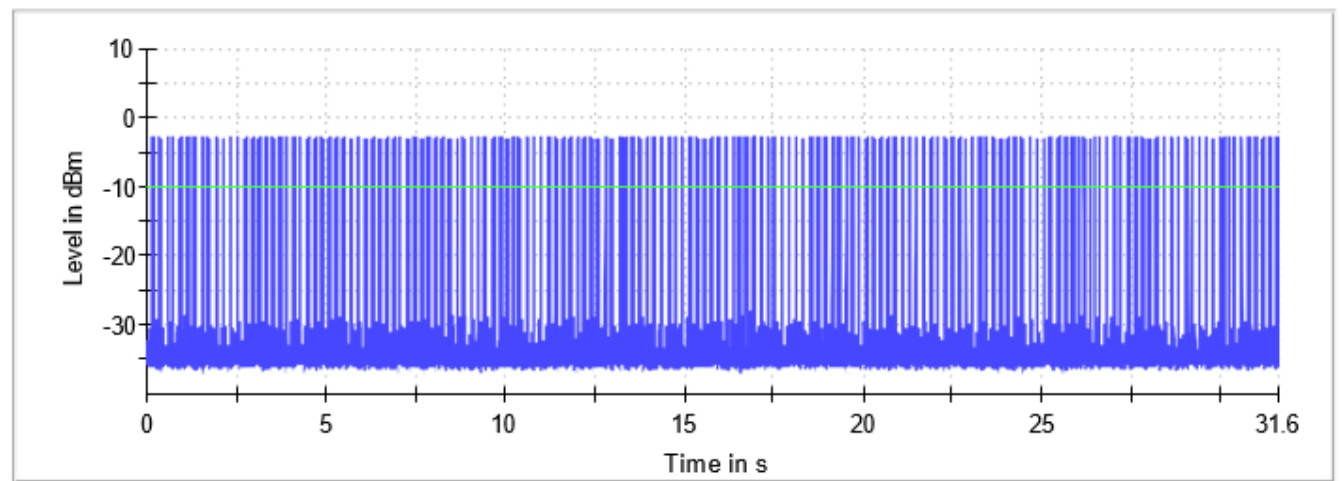


#### 4.4.5 Peak Output Power

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 7.8.5, RSS-247 Section 5.4 (b)


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

Data Rate	2402 MHz	2441 MHz	2480 MHz	Limit dBm
DH1	-4.045	-4.146	-4.721	21.0
DH3	-4.072	-4.162	-4.740	21.0
DH5	-4.087	-4.193	-4.775	21.0
2-DH1	-1.988	-2.110	-2.688	21.0
2-DH3	-2.018	-2.145	-2.707	21.0
2-DH5	-2.002	-2.122	-2.681	21.0
3-DH1	<b>-1.672</b>	-1.804	-2.396	21.0
3-DH3	-1.692	-1.799	-2.400	21.0
3-DH5	-1.678	-1.821	-2.378	21.0

### 4.4.5.1 DH1

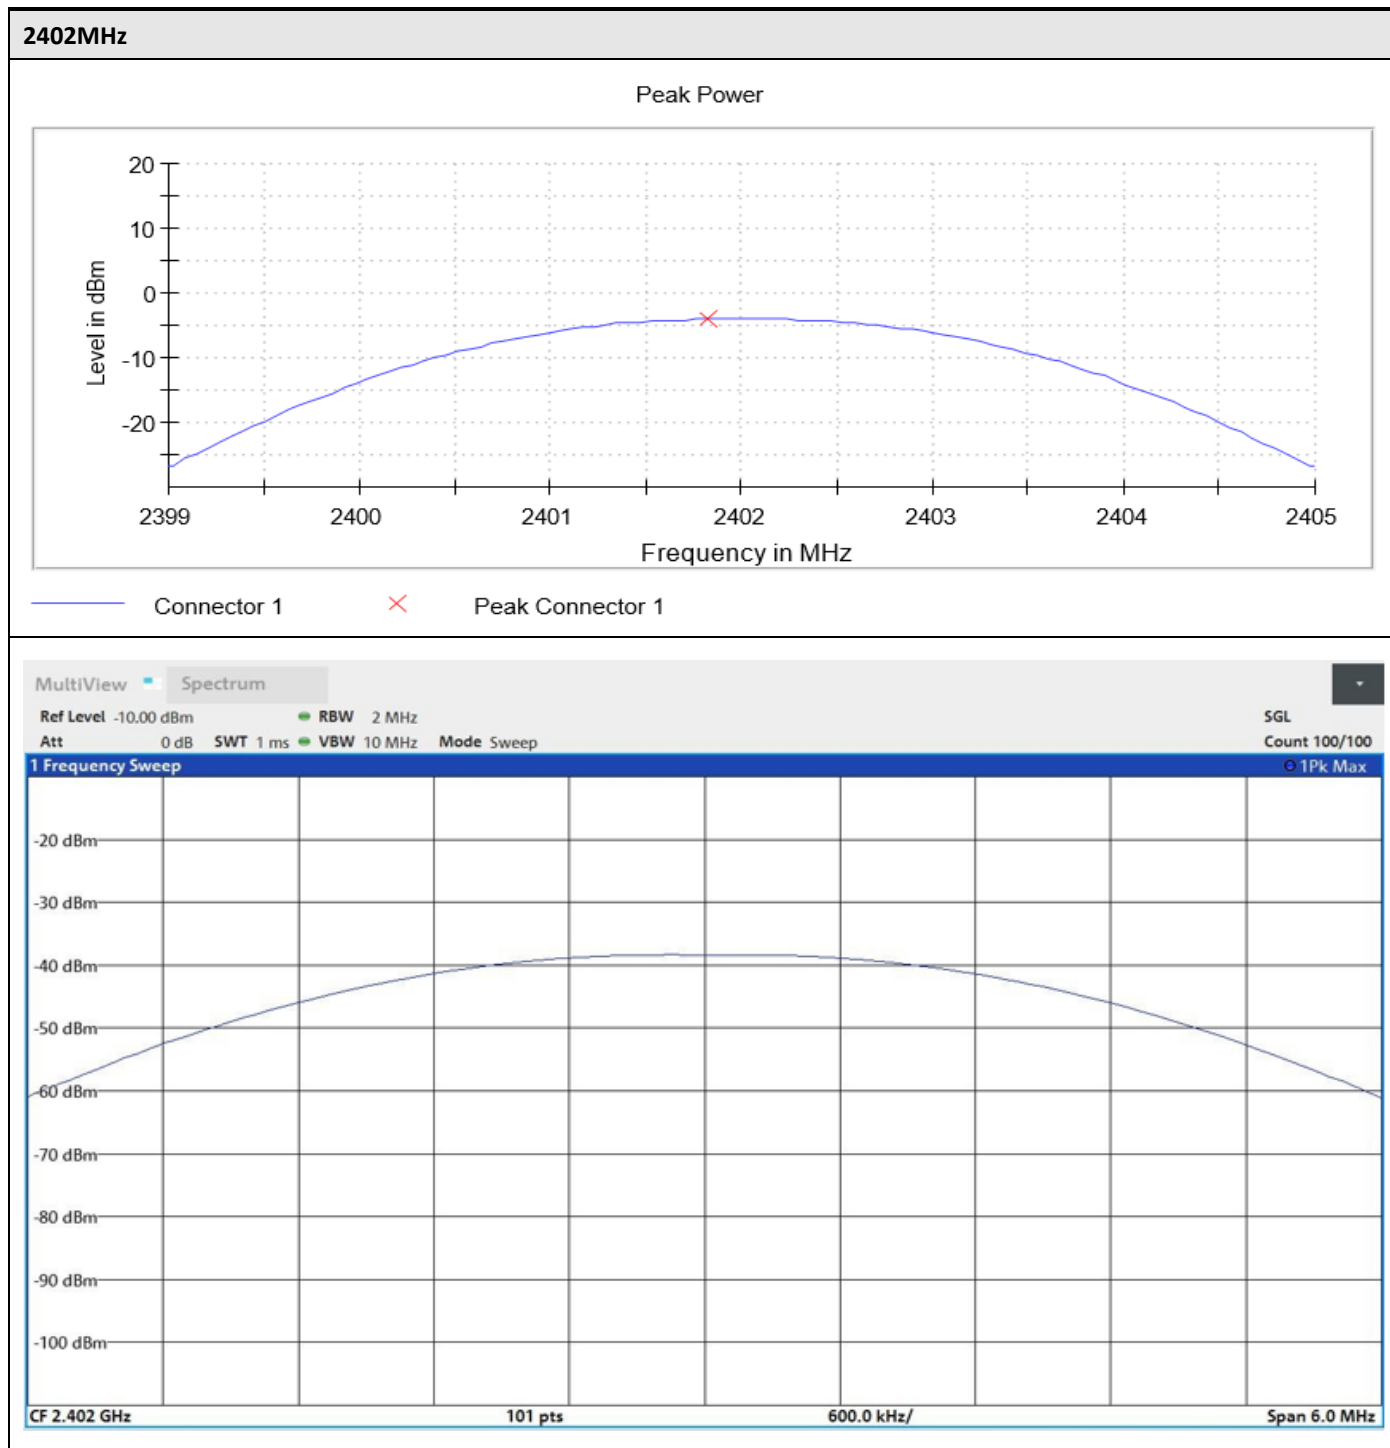

### 4.4.5.2 3-DH1

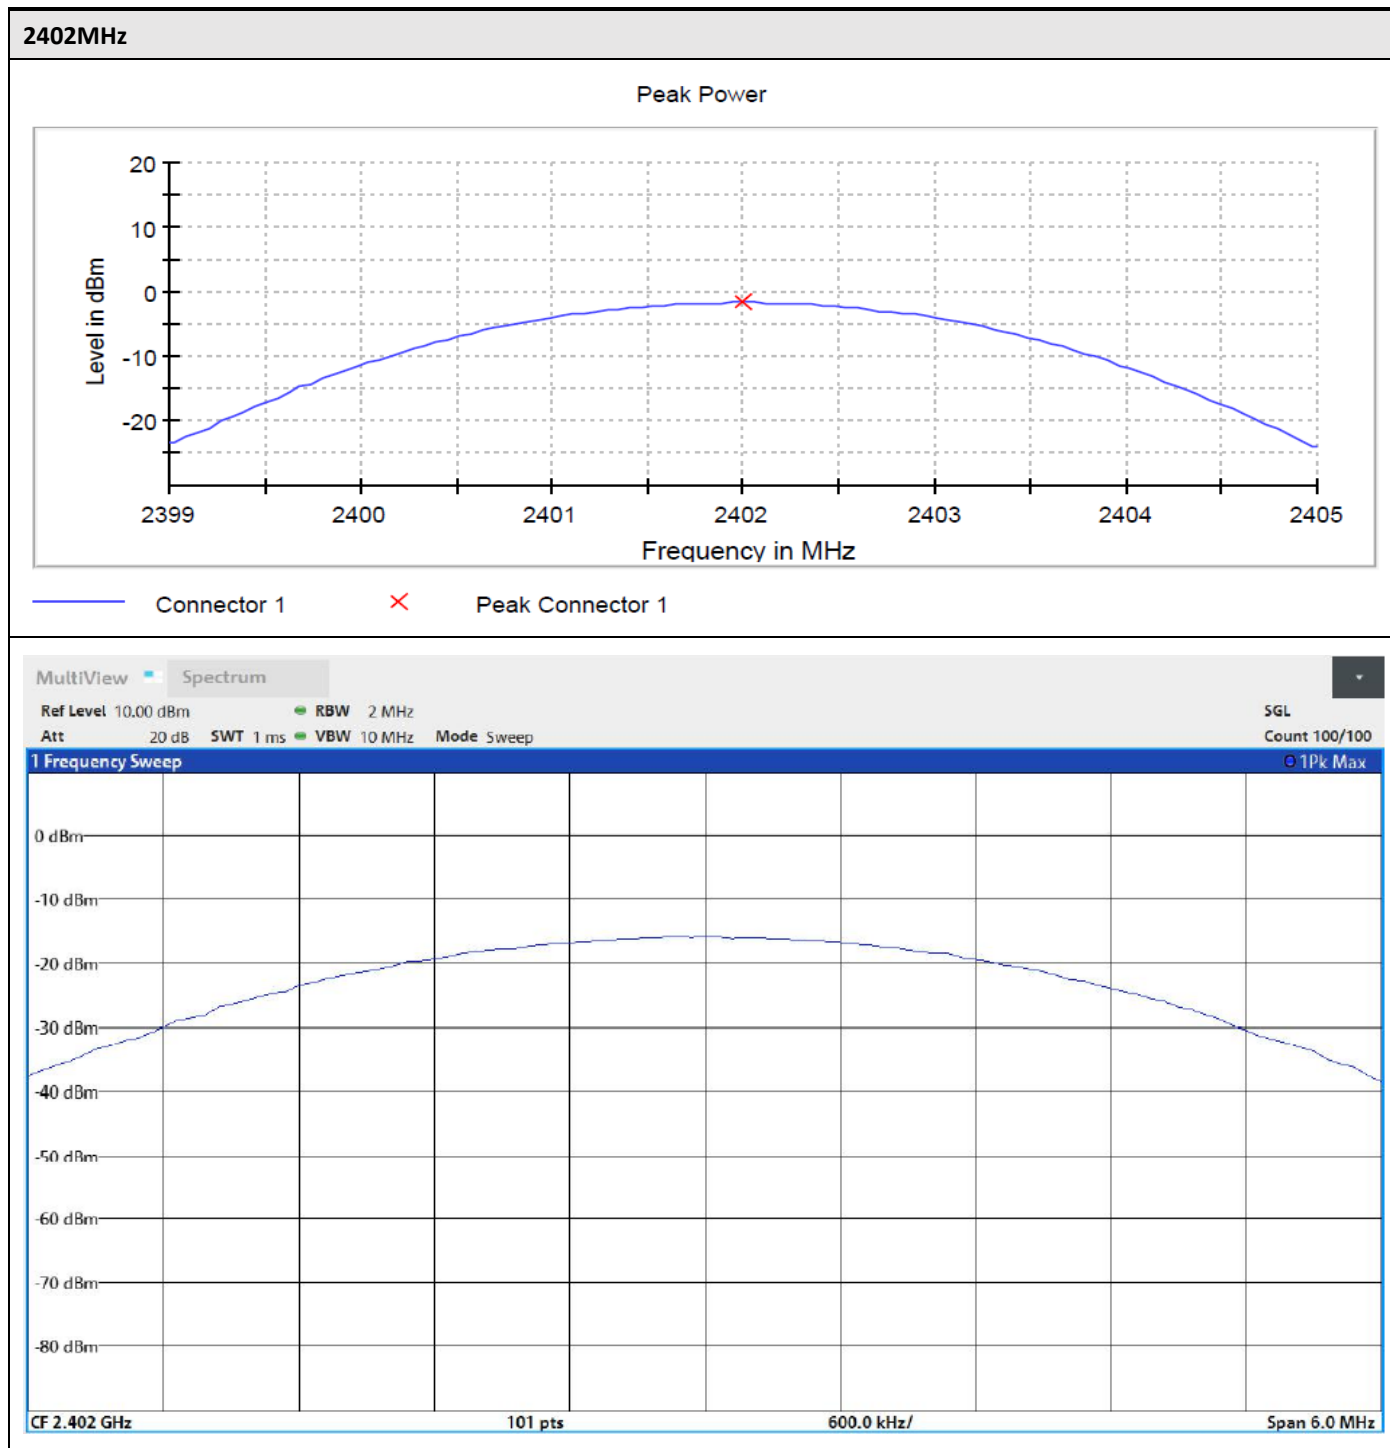

#### 4.4.6 Emission Bandwidth 20dB

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 7.8.7, RSS-247 Section 5.1(a)

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 2%


Channel / Frequency (MHz)	Packet Type	Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
0 / 2402	DH1	1.039603	2401.465347	2402.504950	PASS
	3-DH1	1.306930	2401.346535	2402.653465	PASS
39 / 2441	DH1	1.039603	2440.465347	2441.504950	PASS
	3-DH1	1.306930	2440.346535	2441.653465	PASS
78 / 2480	DH1	1.039603	2479.465347	2480.504950	PASS
	3-DH1	1.306930	2479.346535	2480.653465	PASS

#### Spectrum Analyzer Settings:

Setting	Instrument Value	Target Value
Start Frequency	2.40050 GHz	2.40050 GHz
Stop Frequency	2.40350 GHz	2.40350 GHz
Span	3.000 MHz	3.000 MHz
RBW	30.000 kHz	>= 30.000 kHz
VBW	100.000 kHz	>= 90.000 kHz
SweepPoints	101	~ 101
Sweeptime	1.000 ms	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.08 dB	0.50 dB


### 4.4.6.1 DH1

Plots:

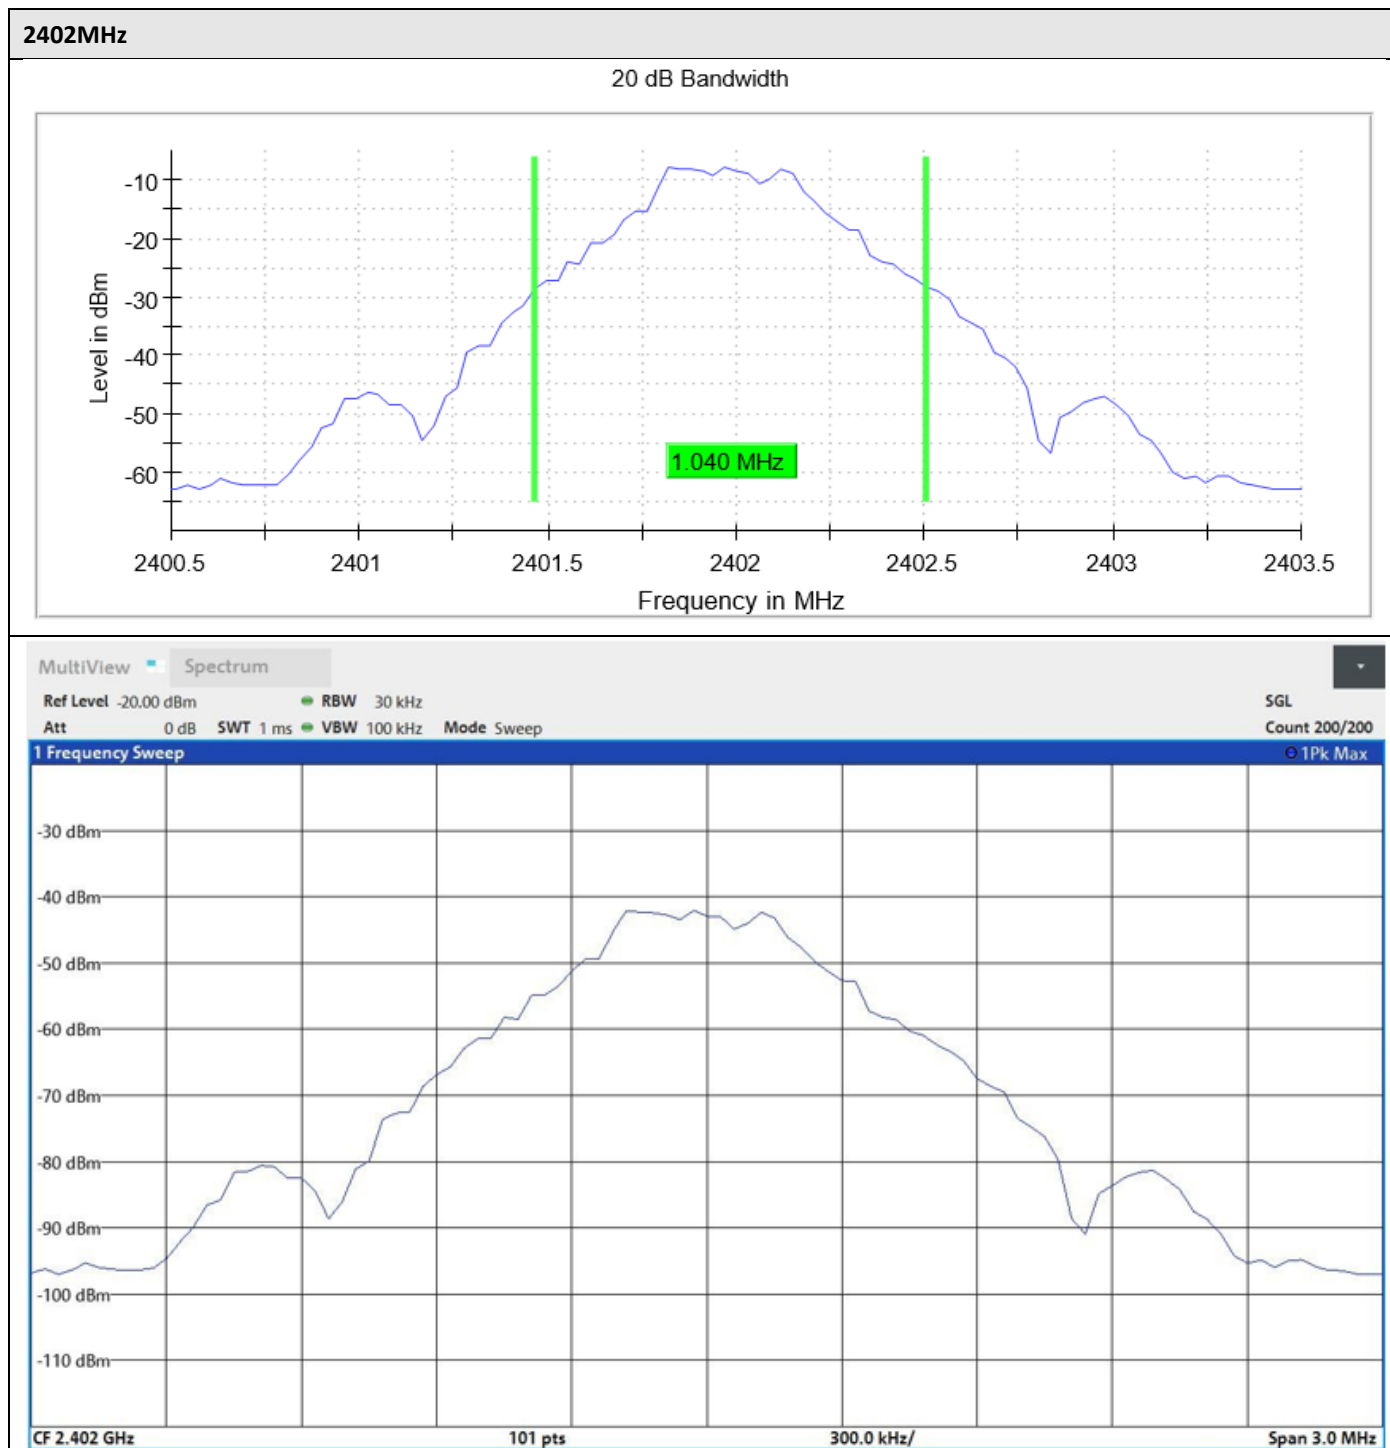


**2441MHz**

20 dB Bandwidth

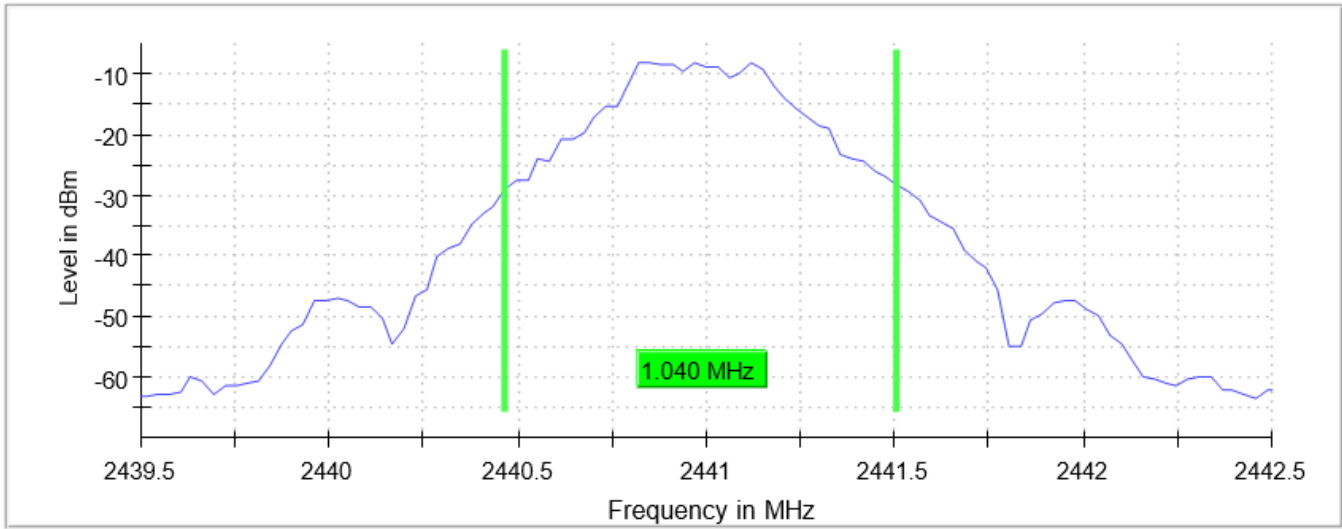

**2480MHz**


20 dB Bandwidth

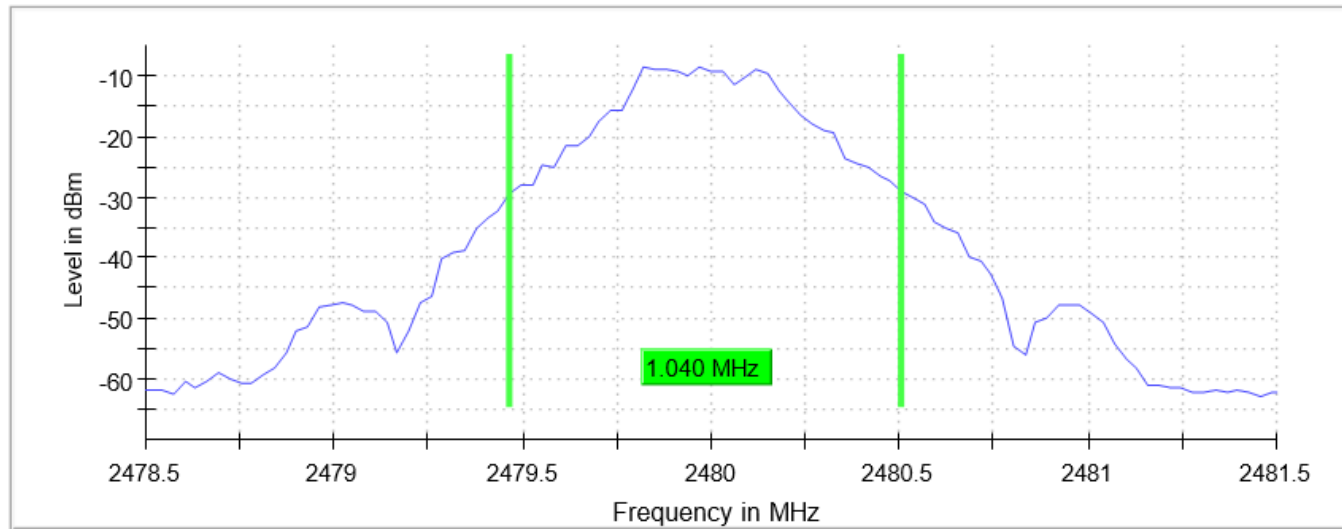




### 4.4.6.2 3-DH1

Plots:

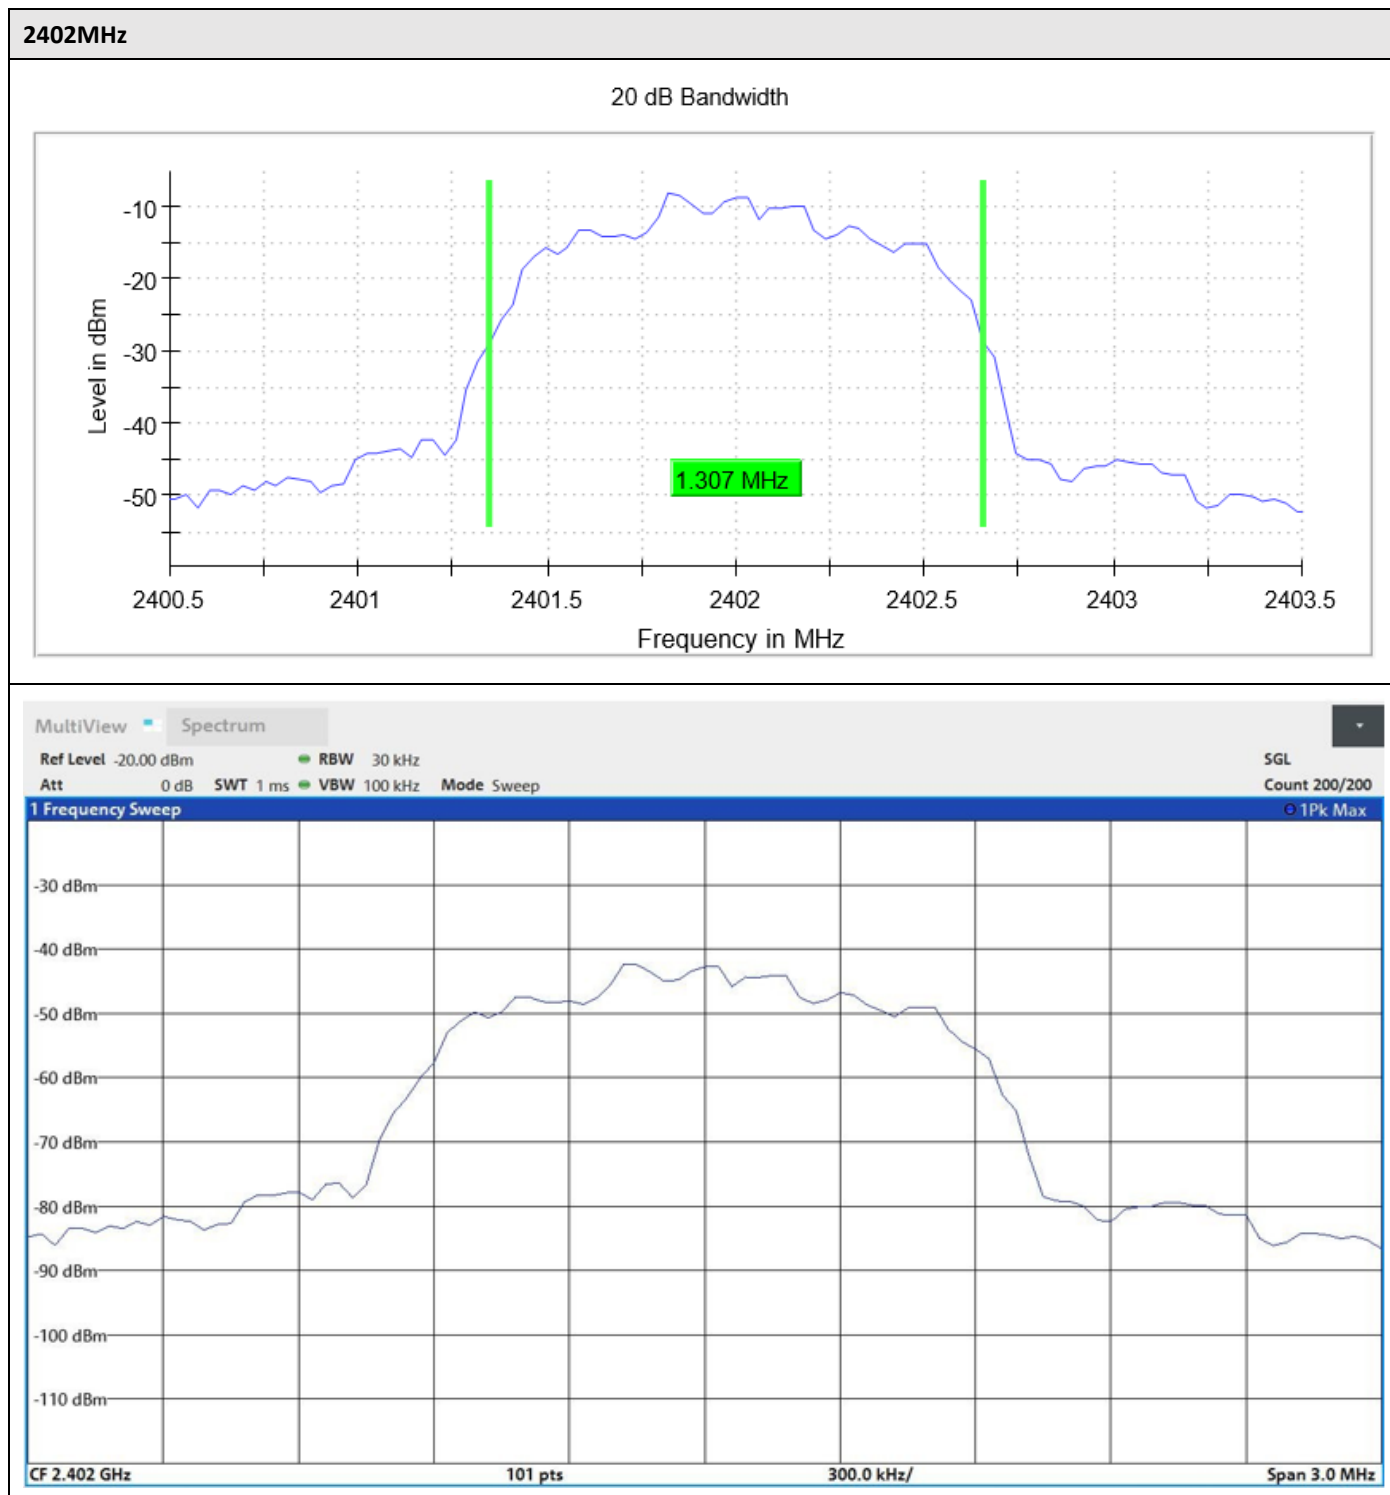


**2441MHz**

20 dB Bandwidth

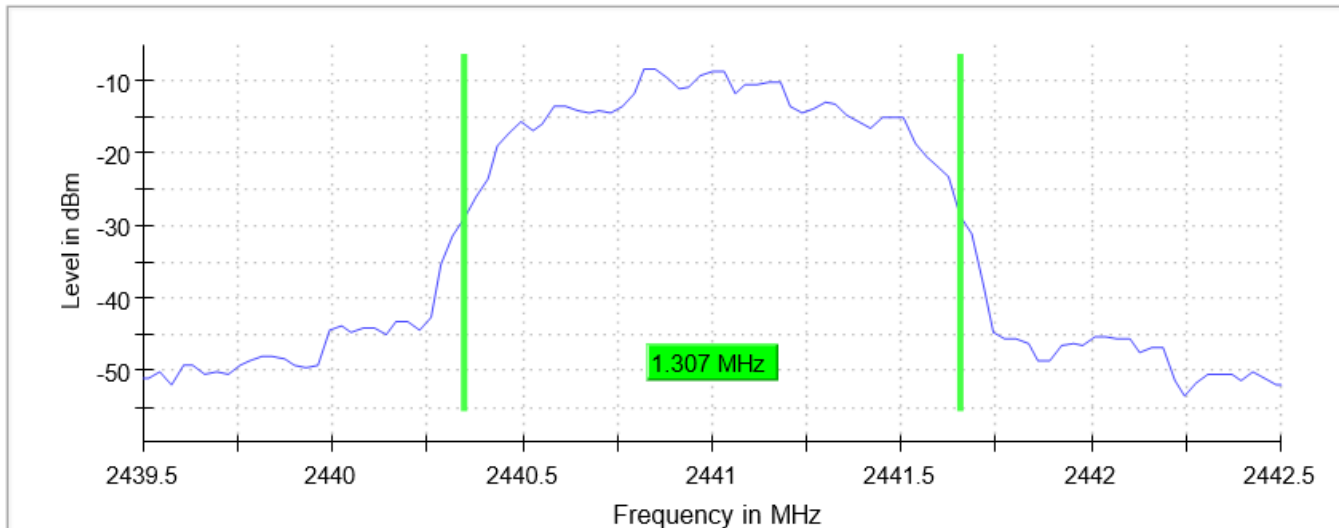

**2480MHz**

20 dB Bandwidth

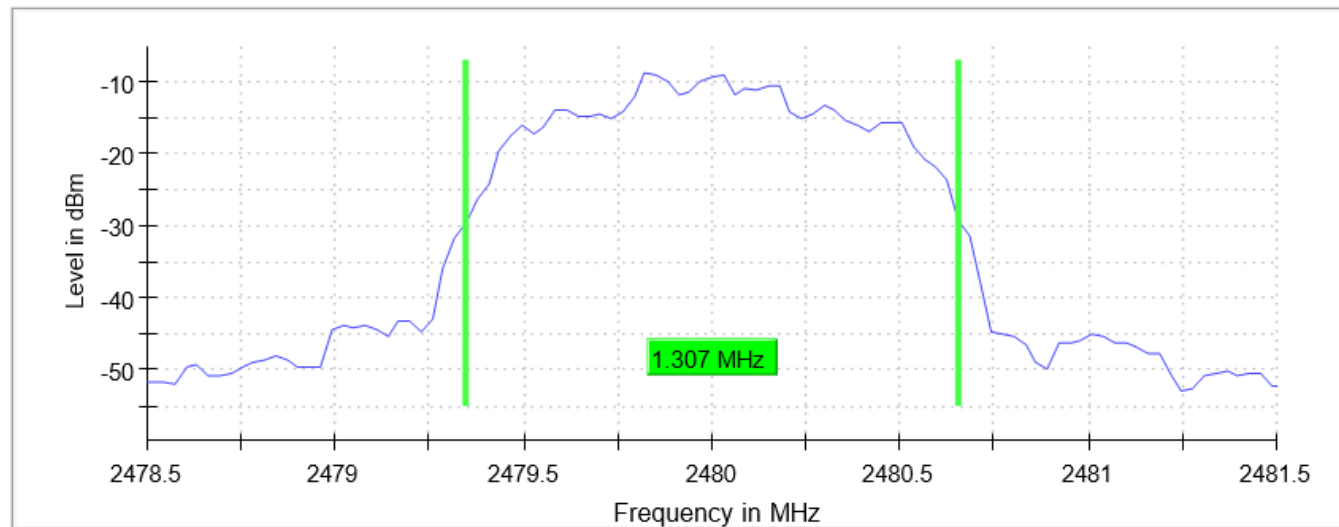

### 4.4.7 Occupied Channel Bandwidth 99%

Test according to RSS-GEN Section 6.7, KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 2%


Channel / Frequency (MHz)	Packet Type	Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
0 / 2402	DH1	0.860000	2401.567500	2402.427500	PASS
	3-DH1	1.155000	2401.432500	2402.587500	PASS
39 / 2441	DH1	0.860000	2440.567500	2441.427500	PASS
	3-DH1	1.155000	2440.432500	2441.587500	PASS
78 / 2480	DH1	0.860000	2479.567500	2480.427500	PASS
	3-DH1	1.155000	2479.432500	2480.587500	PASS

#### Spectrum Analyzer Settings:

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	2.000 ms	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.30 dB


### 4.4.7.1 DH1

Plots:

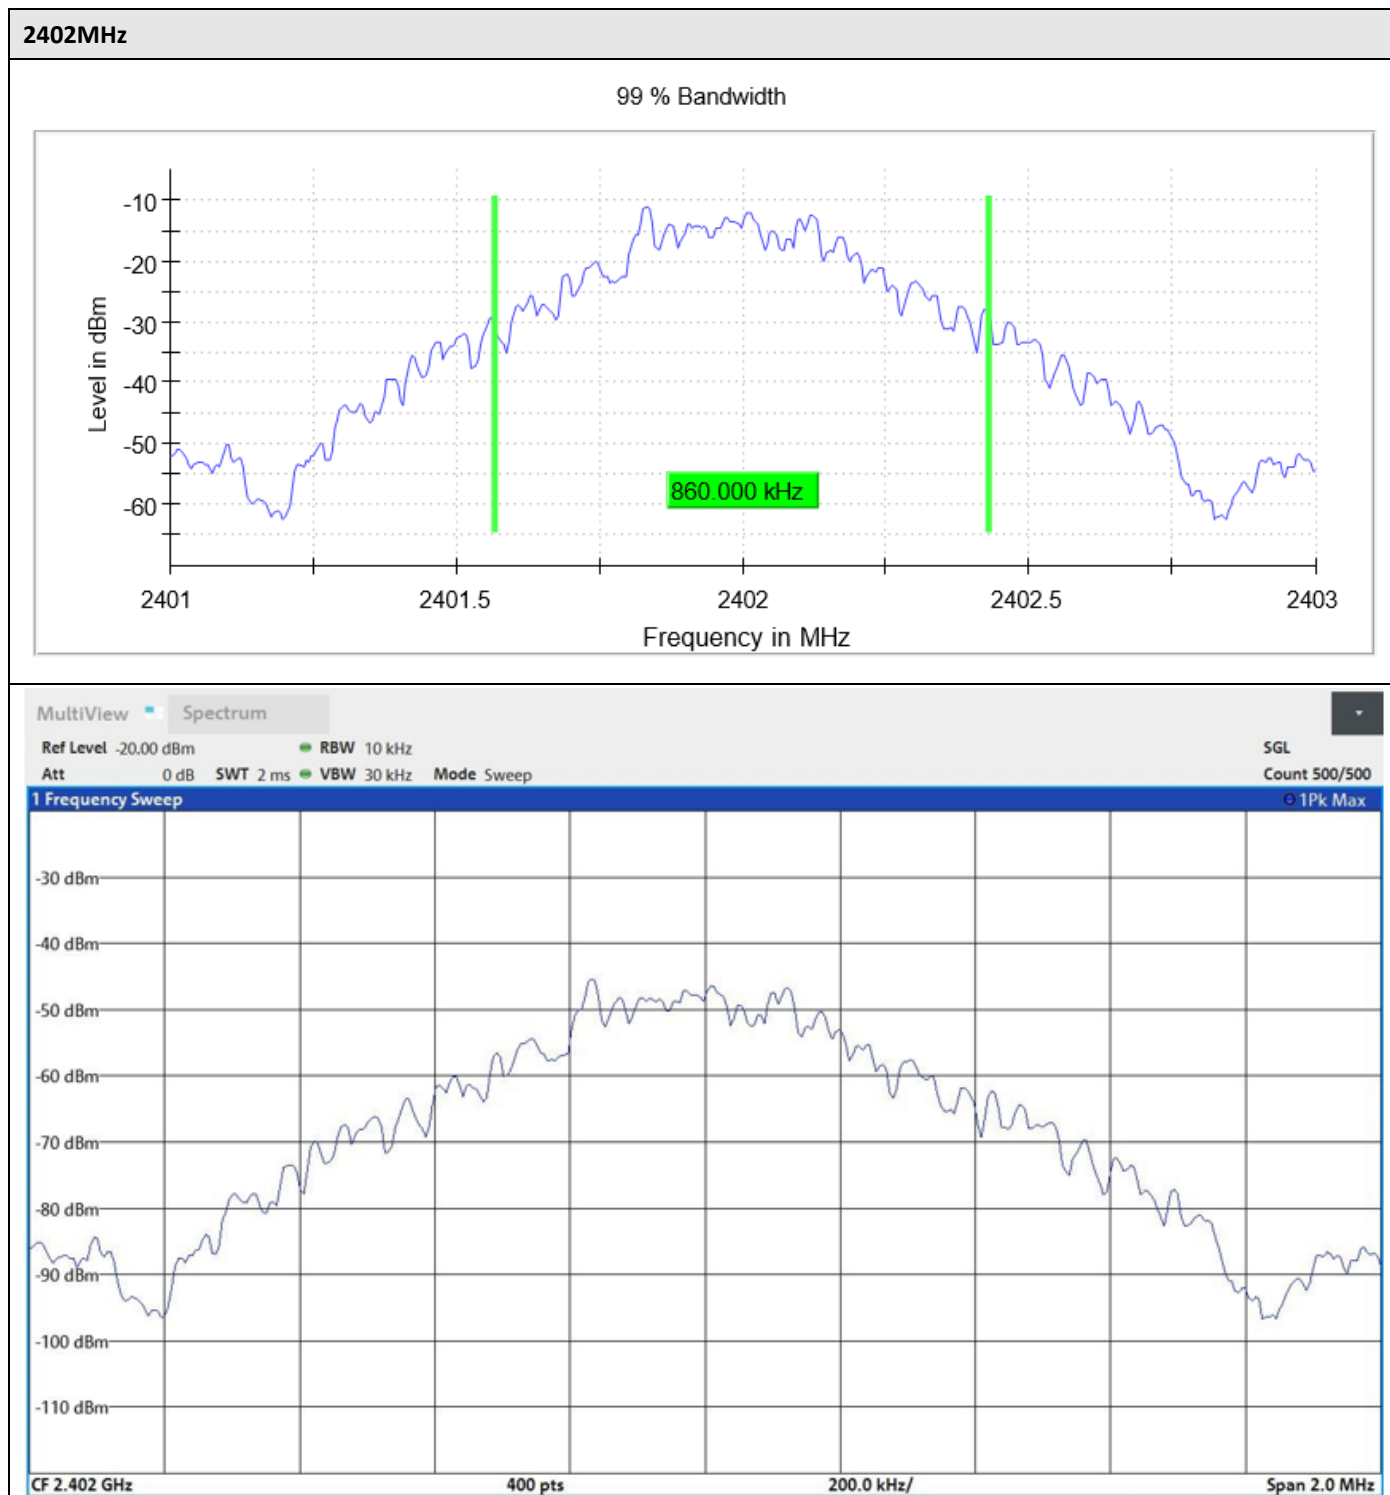


**2441MHz**

99 % Bandwidth

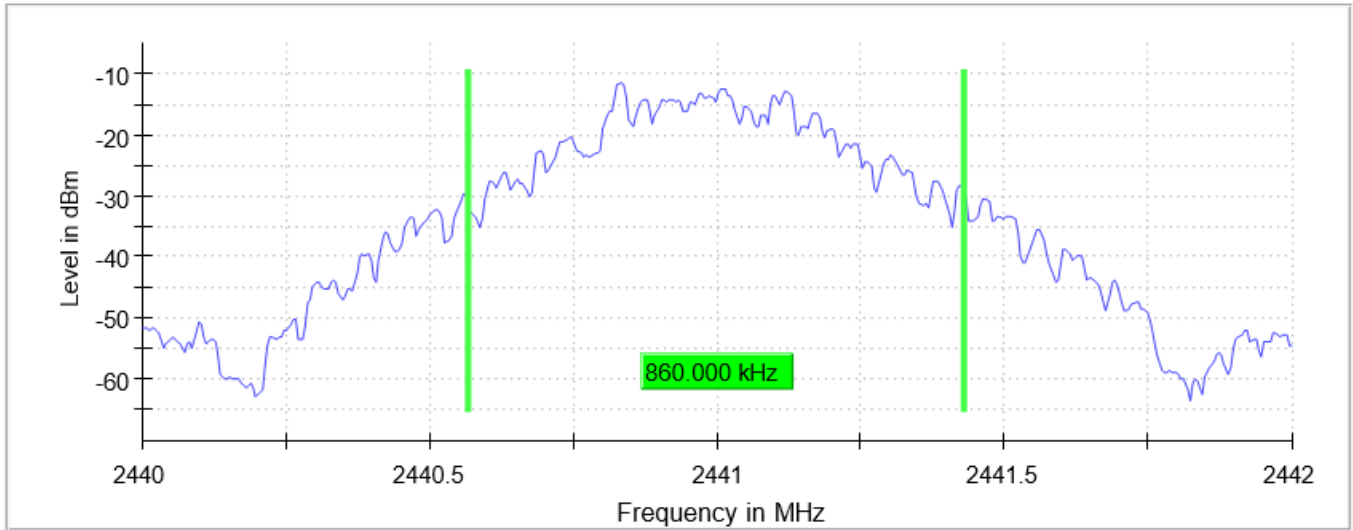


**2480MHz**

99 % Bandwidth

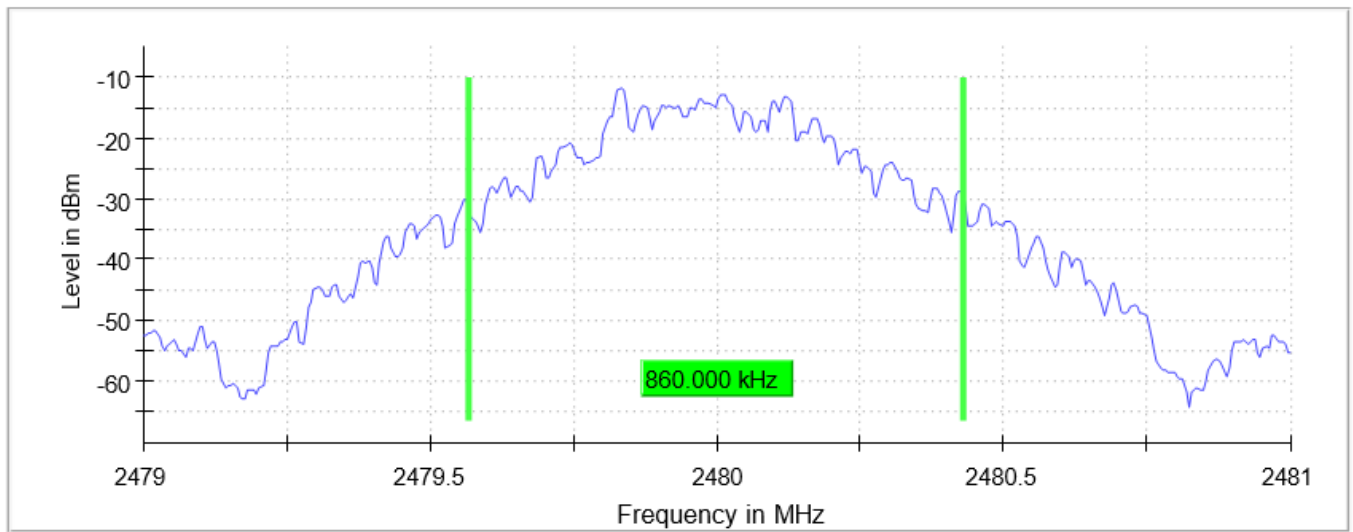


### 4.4.7.2 3-DH1

#### Plots:

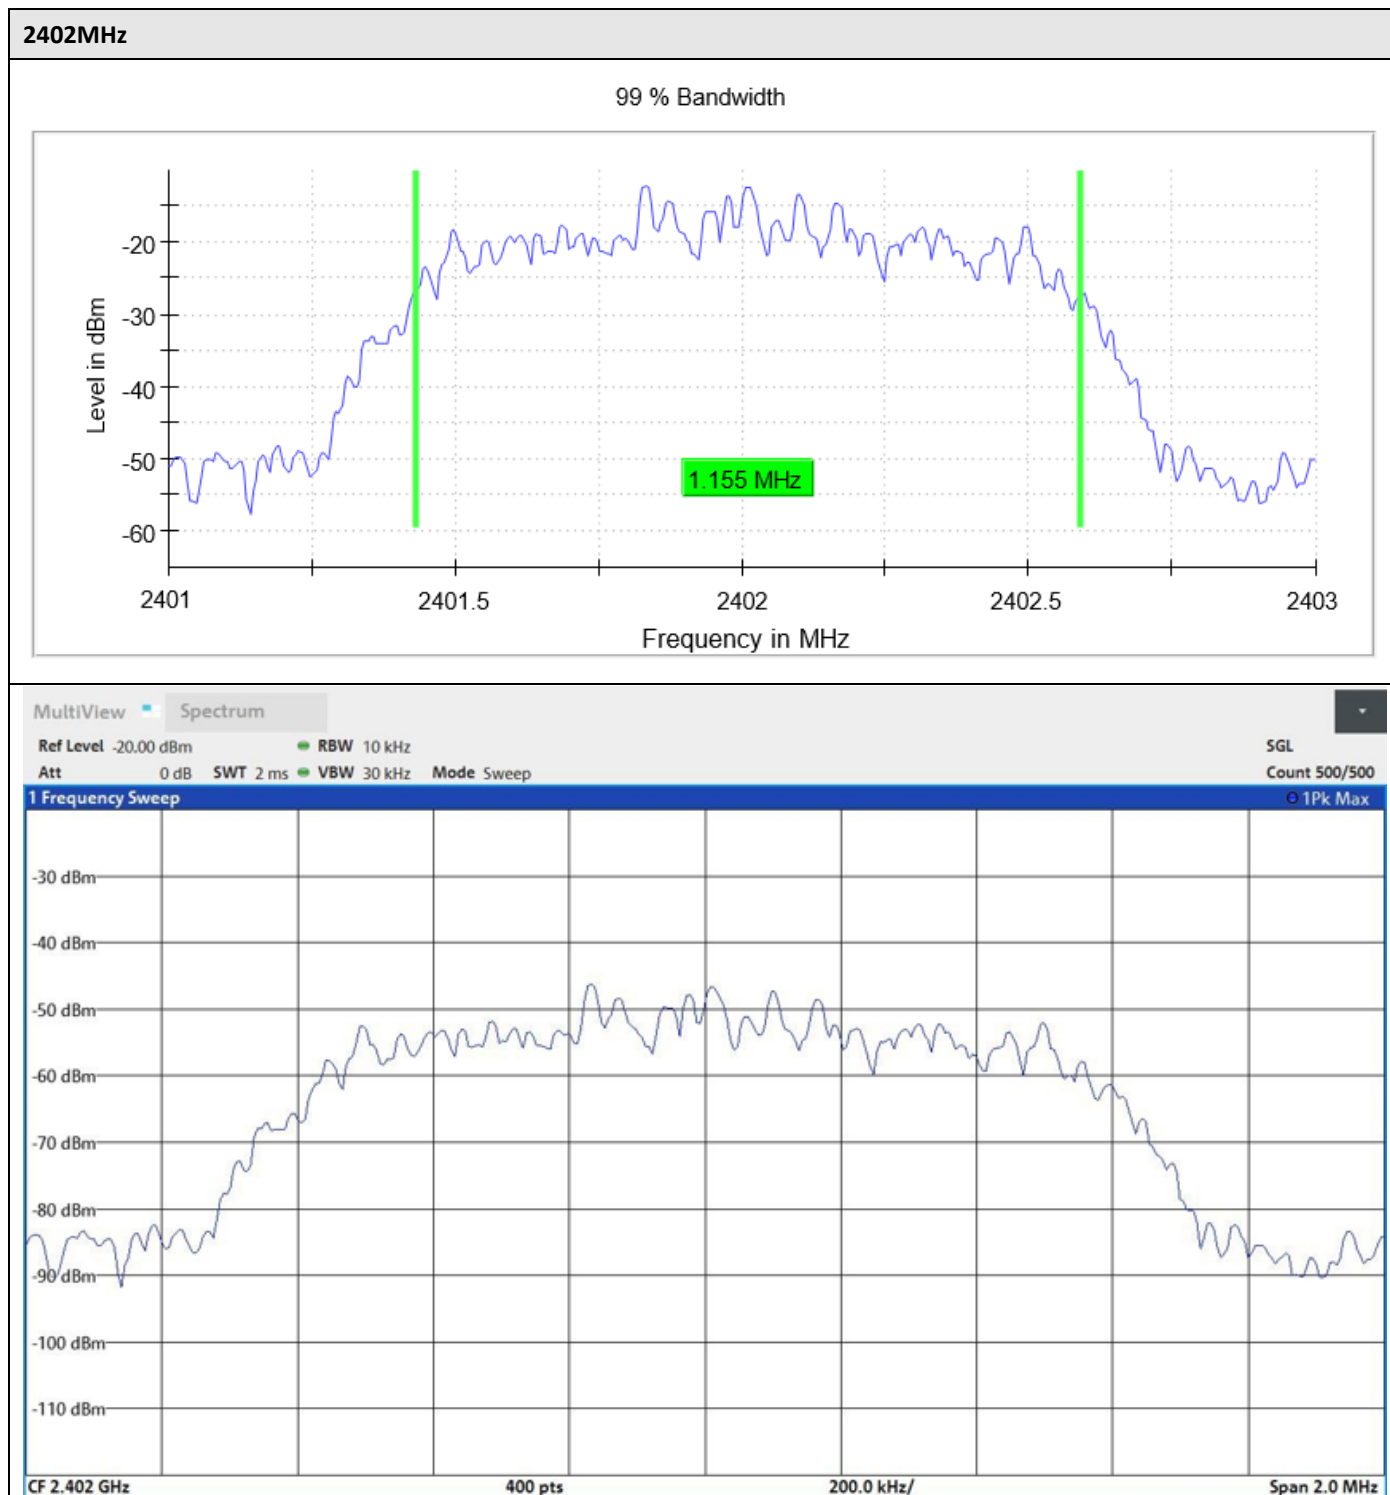


**2441MHz**

99 % Bandwidth

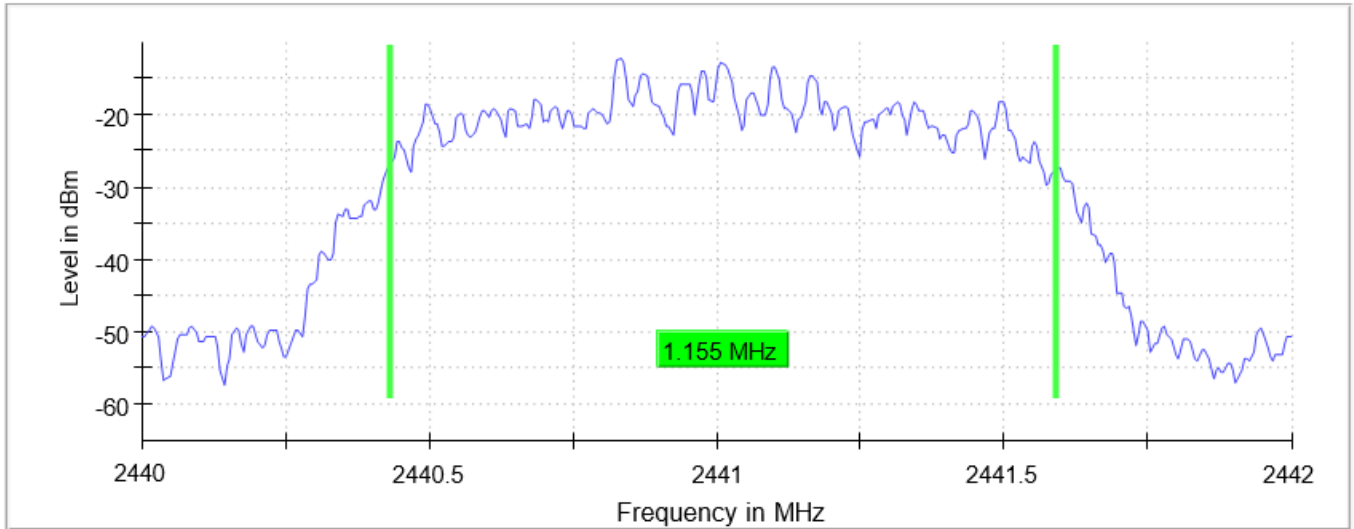

**2480MHz**

99 % Bandwidth

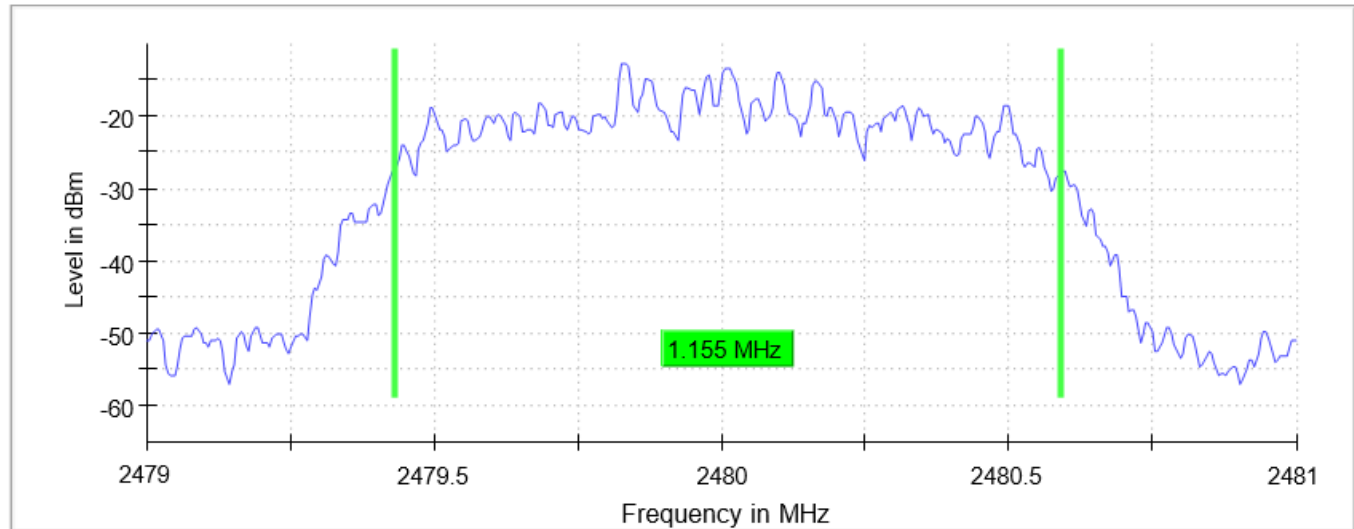

#### 4.4.8 Band Edge Low (2402 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 7.8.6, RSS-247 Section 5.5

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 0.8 dB

Data Rate	Frequency (MHz)	Level(dBm)
DH1	2402.175000	-4.6
3-DH1	2402.025000	-3.1





4.4.8.1 DH1

Measurements:

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.575000	-61.3	36.7	-24.6	PASS
2399.725000	-61.6	37.0	-24.6	PASS
2399.625000	-61.7	37.1	-24.6	PASS
2399.675000	-62.0	37.4	-24.6	PASS
2399.775000	-62.0	37.4	-24.6	PASS
2399.525000	-62.1	37.5	-24.6	PASS
2399.875000	-62.4	37.8	-24.6	PASS
2399.825000	-62.6	38.0	-24.6	PASS
2399.925000	-63.1	38.5	-24.6	PASS
2399.975000	-63.3	38.7	-24.6	PASS
2399.475000	-64.0	39.4	-24.6	PASS
2399.425000	-64.5	39.9	-24.6	PASS
2394.525000	-64.6	40.0	-24.6	PASS
2394.575000	-64.6	40.0	-24.6	PASS
2362.025000	-64.6	40.0	-24.6	PASS

Plots:

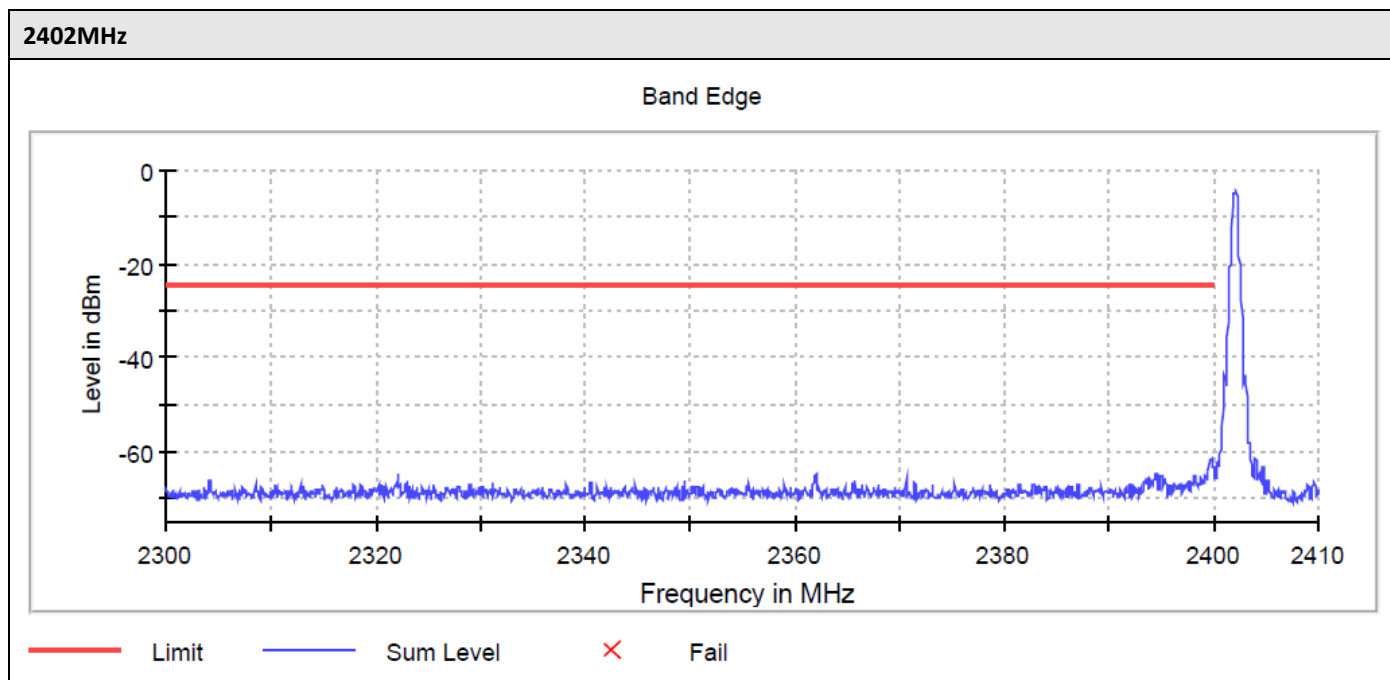

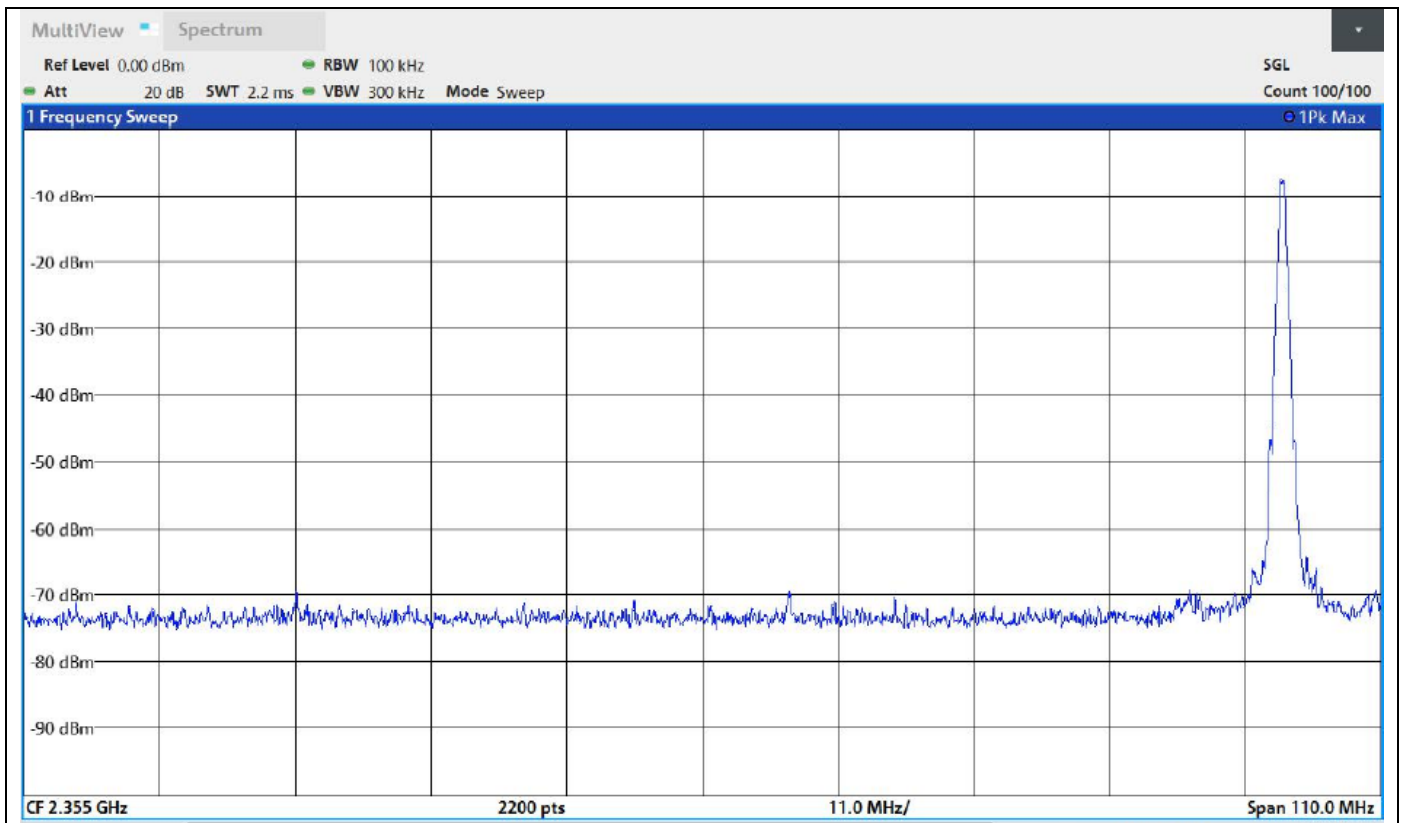



4.4.7.2 3-DH1

Measurements:

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2319.675000	-46.3	23.2	-23.1	PASS
2319.625000	-46.3	23.2	-23.1	PASS
2389.075000	-46.4	23.3	-23.1	PASS
2389.125000	-46.4	23.3	-23.1	PASS
2362.025000	-46.6	23.5	-23.1	PASS
2365.825000	-46.6	23.6	-23.1	PASS
2321.425000	-46.7	23.6	-23.1	PASS
2365.775000	-46.8	23.7	-23.1	PASS
2358.425000	-46.8	23.7	-23.1	PASS
2390.925000	-46.8	23.7	-23.1	PASS
2390.975000	-46.8	23.7	-23.1	PASS
2362.075000	-46.8	23.8	-23.1	PASS
2388.575000	-46.8	23.8	-23.1	PASS
2308.175000	-46.9	23.8	-23.1	PASS
2344.175000	-46.9	23.8	-23.1	PASS

Plots:

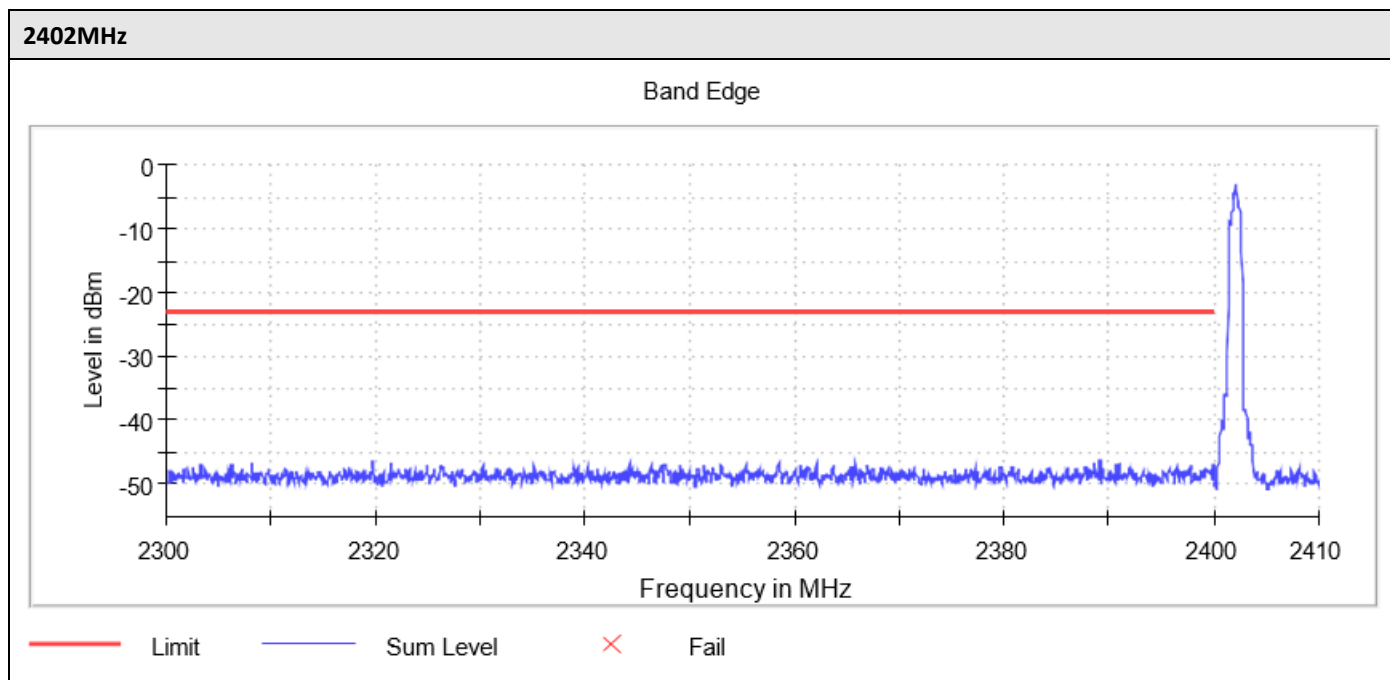

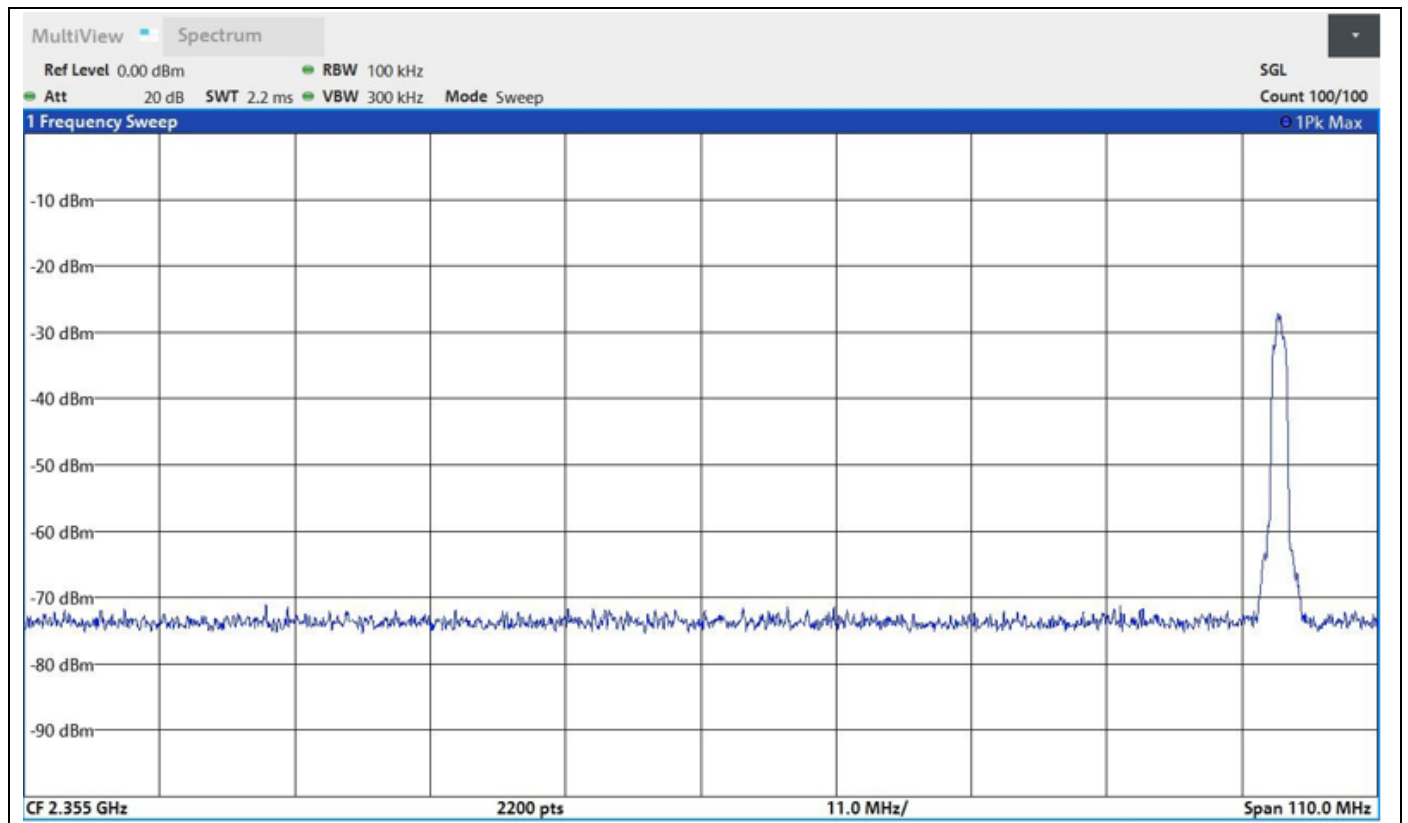

#### 4.4.9 Band Edge High (2480 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 7.8.6, RSS-247 Section 5.5

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 0.8 dB


Data Rate	Frequency (MHz)	Level(dBm)
DH1	2479.825000	-5.4
3-DH1	2479.825000	-3.5


4.4.9.1 DH1

Measurements:

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2553.825000	-64.5	39.1	-25.4	PASS
2560.175000	-64.5	39.1	-25.4	PASS
2560.125000	-64.7	39.3	-25.4	PASS
2559.975000	-64.7	39.3	-25.4	PASS
2560.025000	-64.8	39.3	-25.4	PASS
2521.275000	-64.9	39.4	-25.4	PASS
2534.825000	-64.9	39.4	-25.4	PASS
2534.875000	-64.9	39.4	-25.4	PASS
2501.425000	-65.0	39.5	-25.4	PASS
2483.925000	-65.0	39.5	-25.4	PASS
2485.075000	-65.0	39.6	-25.4	PASS
2487.525000	-65.0	39.6	-25.4	PASS
2521.325000	-65.0	39.6	-25.4	PASS
2487.475000	-65.0	39.6	-25.4	PASS
2490.675000	-65.1	39.7	-25.4	PASS

Plots:

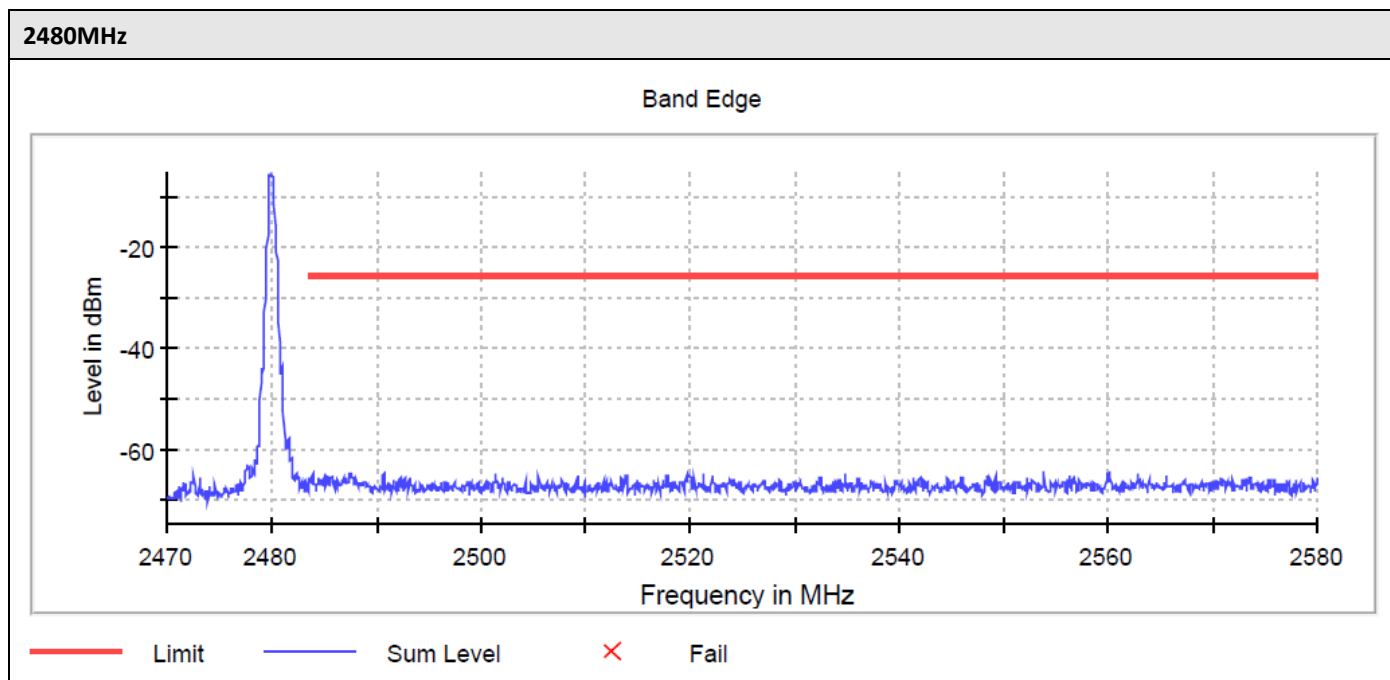

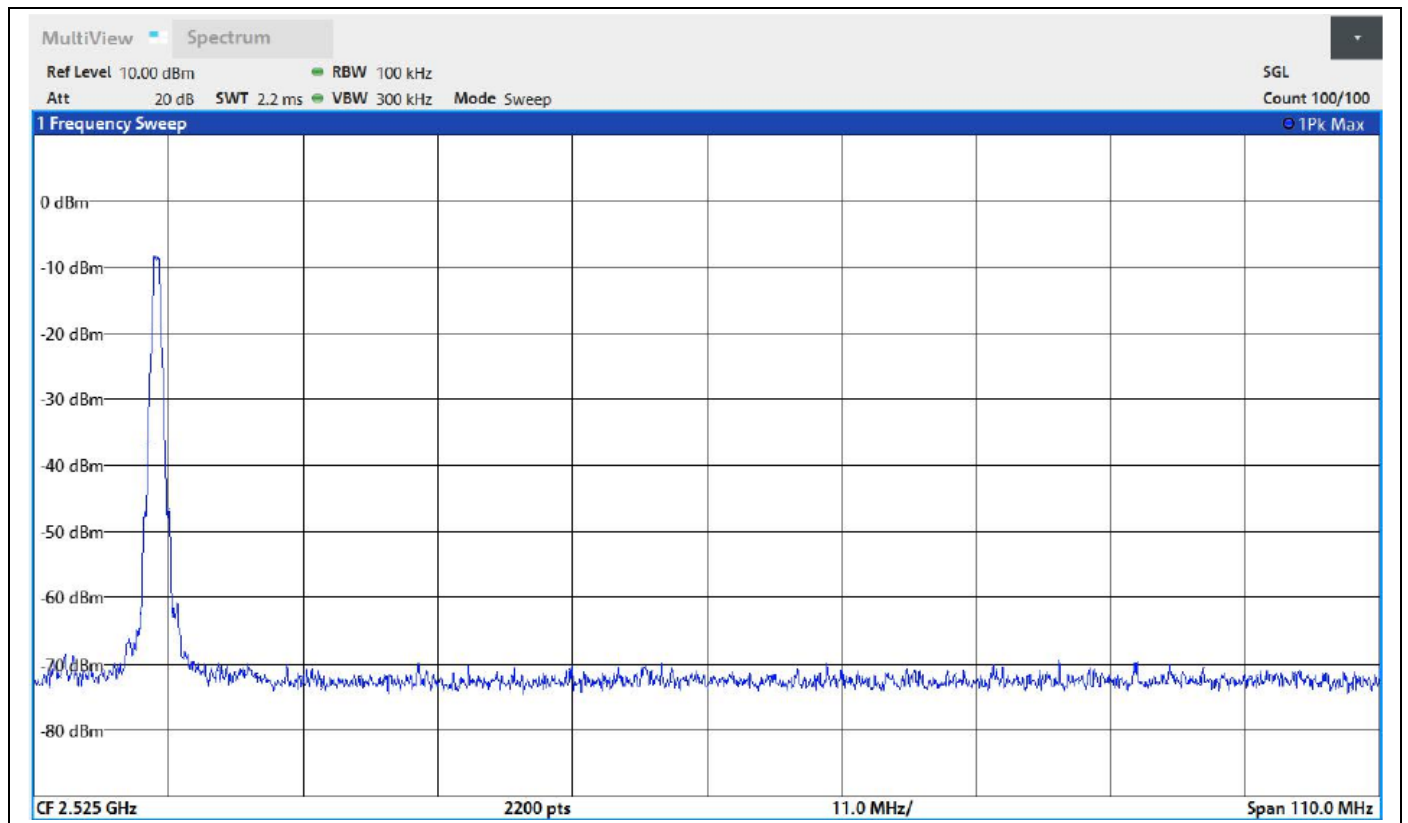


4.4.9.2 3-DH1


Measurements:

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2484.025000	-60.8	37.4	-23.5	PASS
2483.975000	-60.9	37.4	-23.5	PASS
2484.825000	-61.6	38.2	-23.5	PASS
2484.875000	-61.6	38.2	-23.5	PASS
2483.825000	-61.8	38.3	-23.5	PASS
2483.875000	-61.8	38.3	-23.5	PASS
2484.075000	-62.1	38.6	-23.5	PASS
2483.925000	-62.5	39.1	-23.5	PASS
2484.375000	-62.6	39.1	-23.5	PASS
2484.425000	-62.6	39.1	-23.5	PASS
2483.525000	-62.7	39.3	-23.5	PASS
2483.725000	-62.9	39.4	-23.5	PASS
2483.675000	-63.0	39.5	-23.5	PASS
2484.925000	-63.0	39.5	-23.5	PASS
2483.575000	-63.2	39.7	-23.5	PASS

Plots:

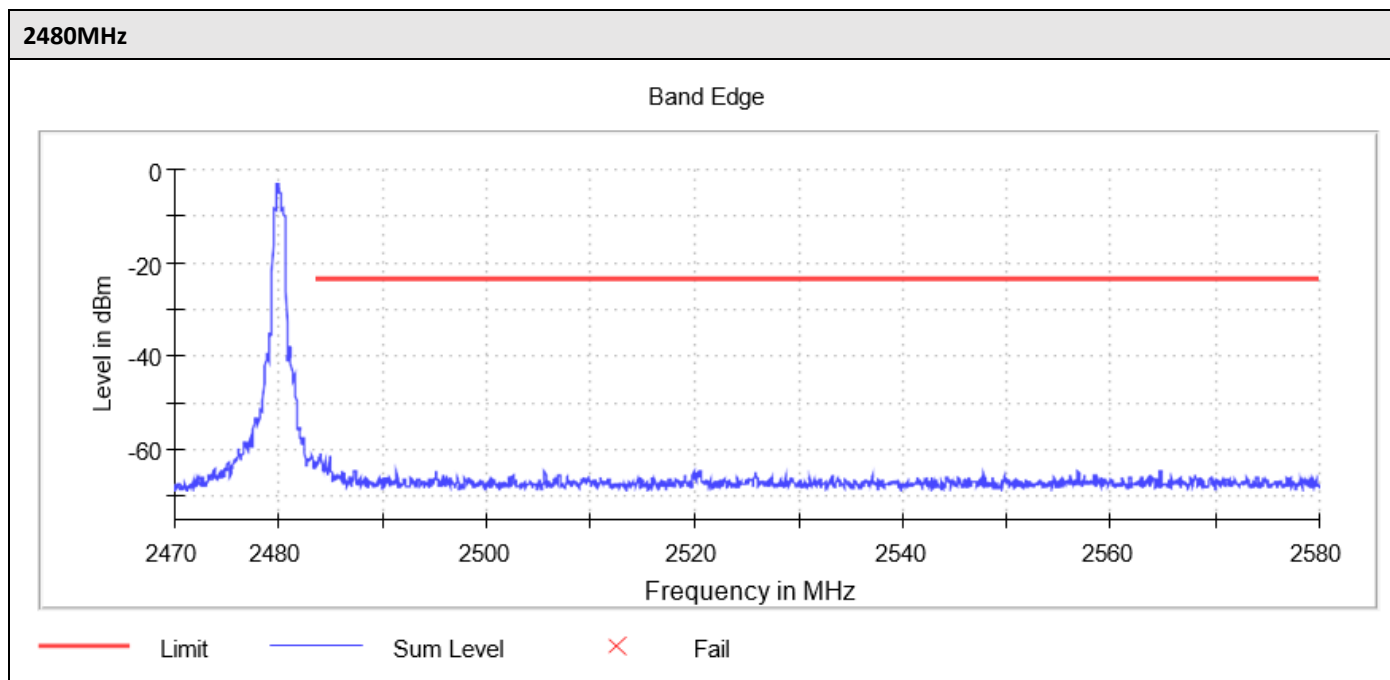



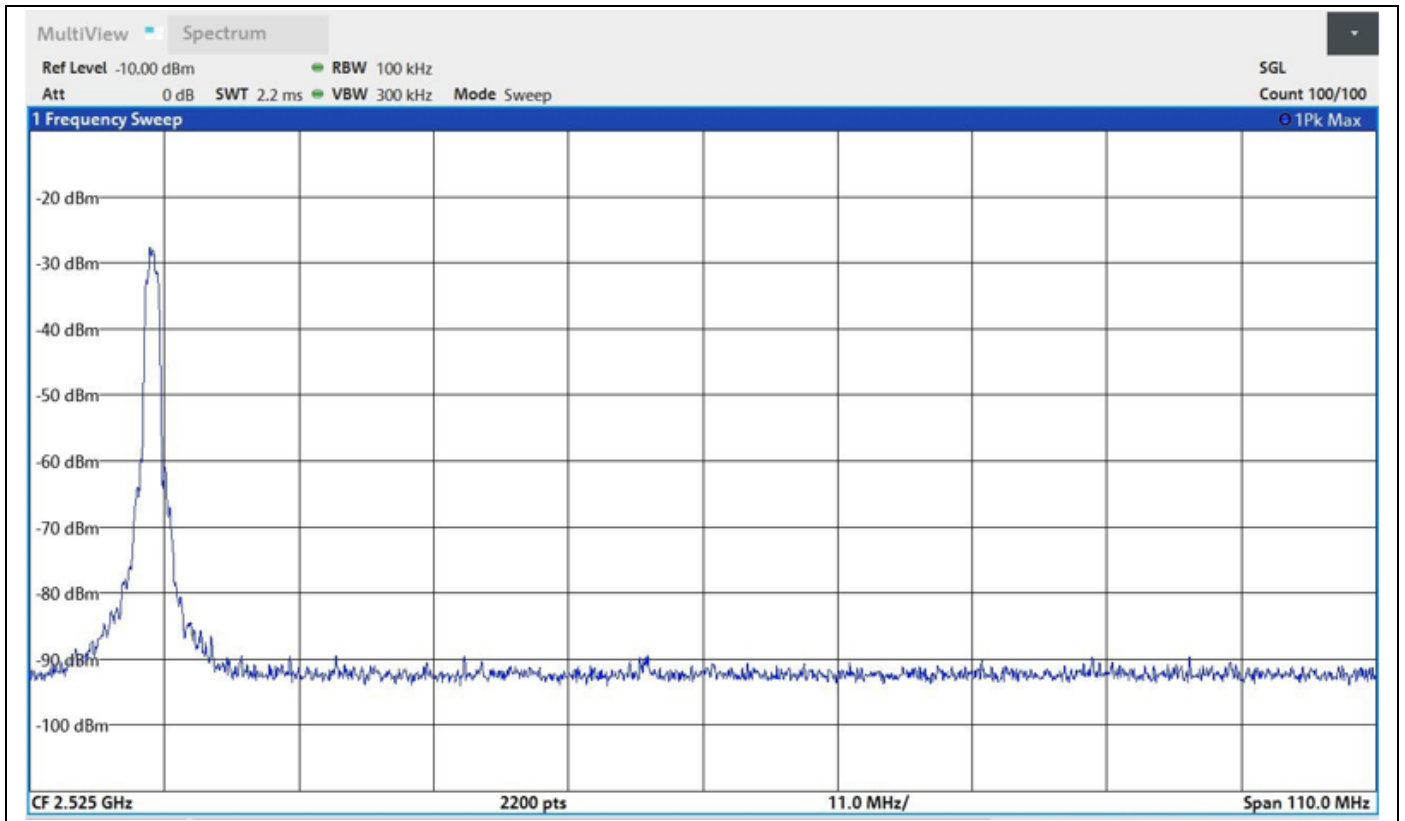

#### 4.4.10 Tx Spurious Emission

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 Section 7.8.8, RSS-247 Section 5.5. Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 1.8 dB

##### Spectrum Analyzer Pre-Measurement Settings:

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	238	~ 238
Sweeptime	23.700 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.32 dB	0.50 dB

##### Spectrum Analyzer Final-Measurement Settings:

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	401	~ 401
Sweeptime	1.000 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB

---

Trace Mode	Average Linear	Average Linear
Sweeptype	Sweep	AUTO
Preamp	off	off


**4.4.10.1 DH1**

2402MHz				
Final Measurement				
Frequency (MHz)	Level Pre-Measurement (dBm)	Level (dBm)	Margin (dB)	Limit (dBm)
2399.958664	-6.5	-72.3	53.5	-18.8
Pre-Measurement				
Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	
2395.021008	-4.5	-14.3	-18.8	
22056.764647	-52.8	34.0	-18.8	
21886.866511	-53.3	34.5	-18.8	
22086.746671	-53.4	34.6	-18.8	
22386.566911	-53.4	34.6	-18.8	
22106.734687	-53.4	34.6	-18.8	
21996.800599	-53.5	34.8	-18.8	
22076.752663	-53.6	34.8	-18.8	
21906.854527	-53.6	34.8	-18.8	
21966.818575	-53.7	34.9	-18.8	
22136.716711	-53.7	34.9	-18.8	
22096.740679	-53.7	34.9	-18.8	
22406.554927	-53.7	34.9	-18.8	
22026.782623	-53.8	35.0	-18.8	
22236.656791	-53.8	35.0	-18.8	

Plots:


2402MHz

Spurious

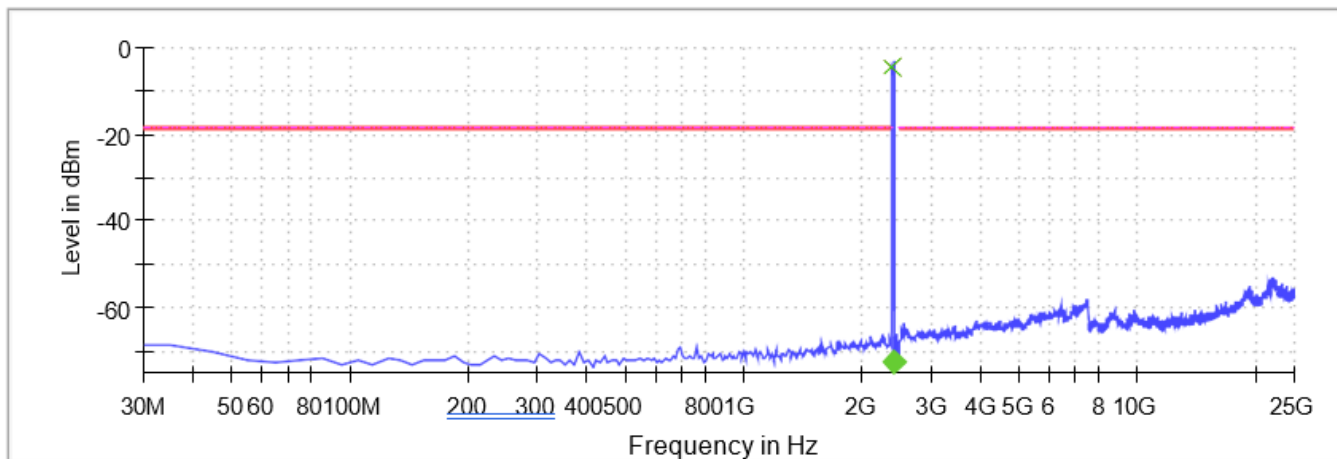


- Limit Final Critical (Red line)
- Sum Level Fail (Blue line)
- Threshold Pass (Green diamond)
- Critical (Red 'x')

FinalMeas\_2395021008Hz

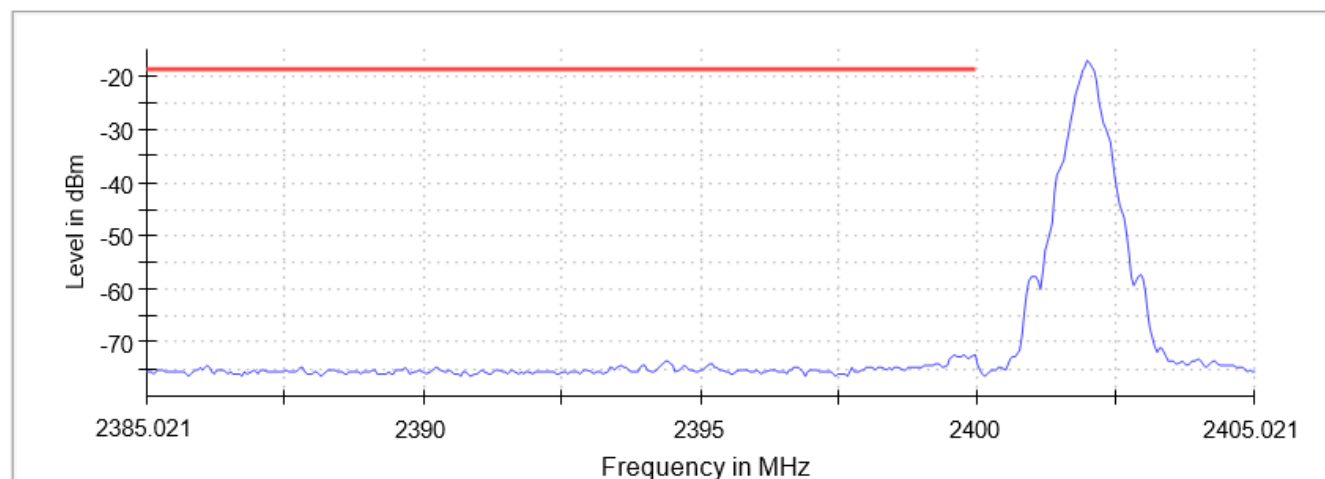

- Sum Level (Blue line)
- Limit (Red line)

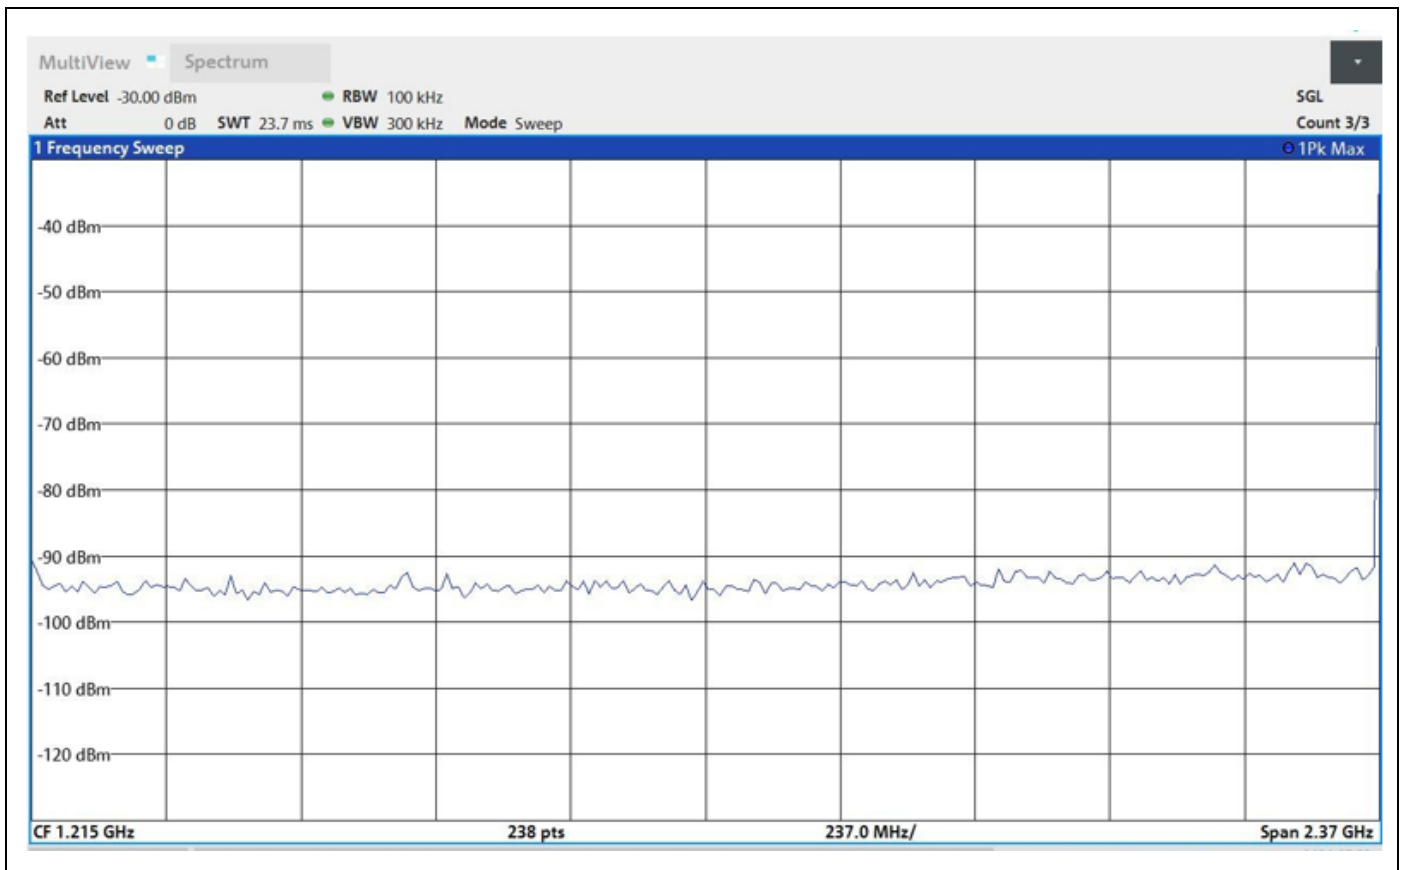


**2441MHz**

**Pre-Measurement**

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
22016.788615	-52.6	37.0	-15.6
22146.710719	-53.0	37.4	-15.6
21946.830559	-53.1	37.4	-15.6
22176.692743	-53.2	37.6	-15.6
22046.770639	-53.3	37.7	-15.6
22116.728695	-53.3	37.7	-15.6
22096.740679	-53.5	37.8	-15.6
22066.758655	-53.5	37.8	-15.6
22036.776631	-53.5	37.9	-15.6
21427.142144	-53.6	37.9	-15.6
22076.752663	-53.6	38.0	-15.6
22086.746671	-53.6	38.0	-15.6
21966.818575	-53.7	38.0	-15.6
22456.524967	-53.8	38.1	-15.6
22126.722703	-53.8	38.1	-15.6

**Spurious**

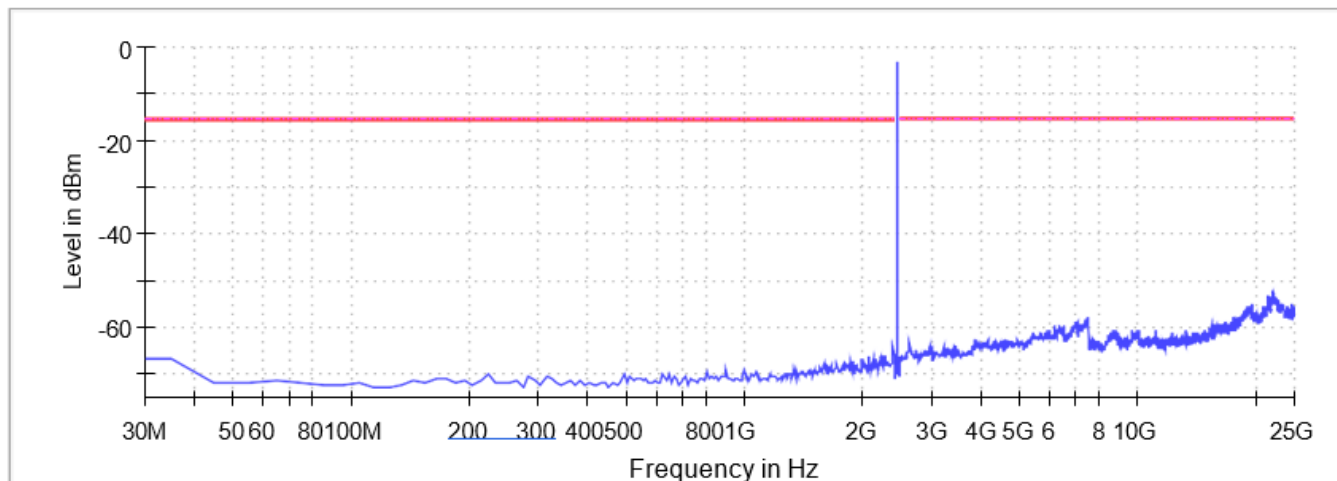


**2480MHz**

**Pre-Measurement**

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
22016.788615	-53.4	37.9	-15.5
22166.698735	-53.4	37.9	-15.5
22026.782623	-53.4	38.0	-15.5
21926.842543	-53.5	38.0	-15.5
22156.704727	-53.5	38.1	-15.5
22046.770639	-53.6	38.1	-15.5
22006.794607	-53.8	38.3	-15.5
22086.746671	-53.8	38.4	-15.5
22036.776631	-53.9	38.4	-15.5
22376.572903	-54.0	38.5	-15.5
22076.752663	-54.0	38.5	-15.5
22106.734687	-54.1	38.6	-15.5
22126.722703	-54.1	38.7	-15.5
21986.806591	-54.3	38.8	-15.5
22066.758655	-54.3	38.8	-15.5

**Spurious**

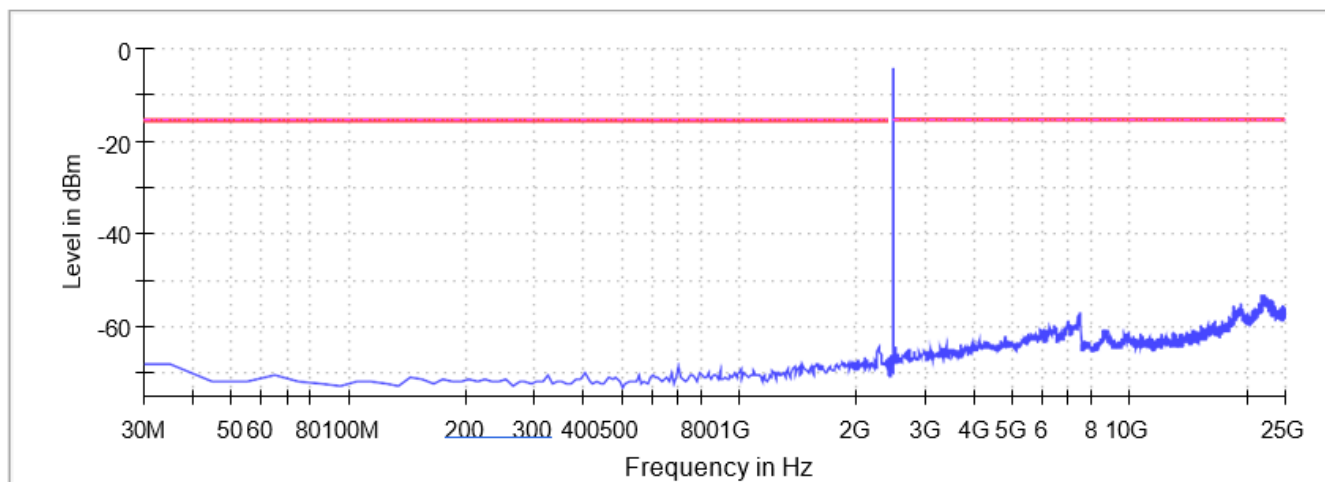


— Limit    
 — Sum Level    
 - - - Threshold    
 × Critical    
 × Final Critical




**4.4.10.2 3-DH1**

2402MHz				
Final Measurement				
Frequency (MHz)	Level Pre-Measurement (dBm)	Level (dBm)	Margin (dB)	Limit (dBm)
2399.958664	-8.0	-67.3	48.6	-18.8
Pre-Measurement				
Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	
2395.021008	-6.0	-12.7	-18.8	
22096.740679	-52.8	34.0	-18.8	
21886.866511	-53.0	34.2	-18.8	
22066.758655	-53.3	34.5	-18.8	
22126.722703	-53.3	34.6	-18.8	
22076.752663	-53.4	34.6	-18.8	
22136.716711	-53.4	34.6	-18.8	
22036.776631	-53.4	34.7	-18.8	
22116.728695	-53.4	34.7	-18.8	
21976.812583	-53.6	34.8	-18.8	
22196.680759	-53.6	34.9	-18.8	
22106.734687	-53.7	34.9	-18.8	
22006.794607	-53.7	34.9	-18.8	
22046.770639	-53.8	35.0	-18.8	
22216.668775	-53.8	35.1	-18.8	

Plots:

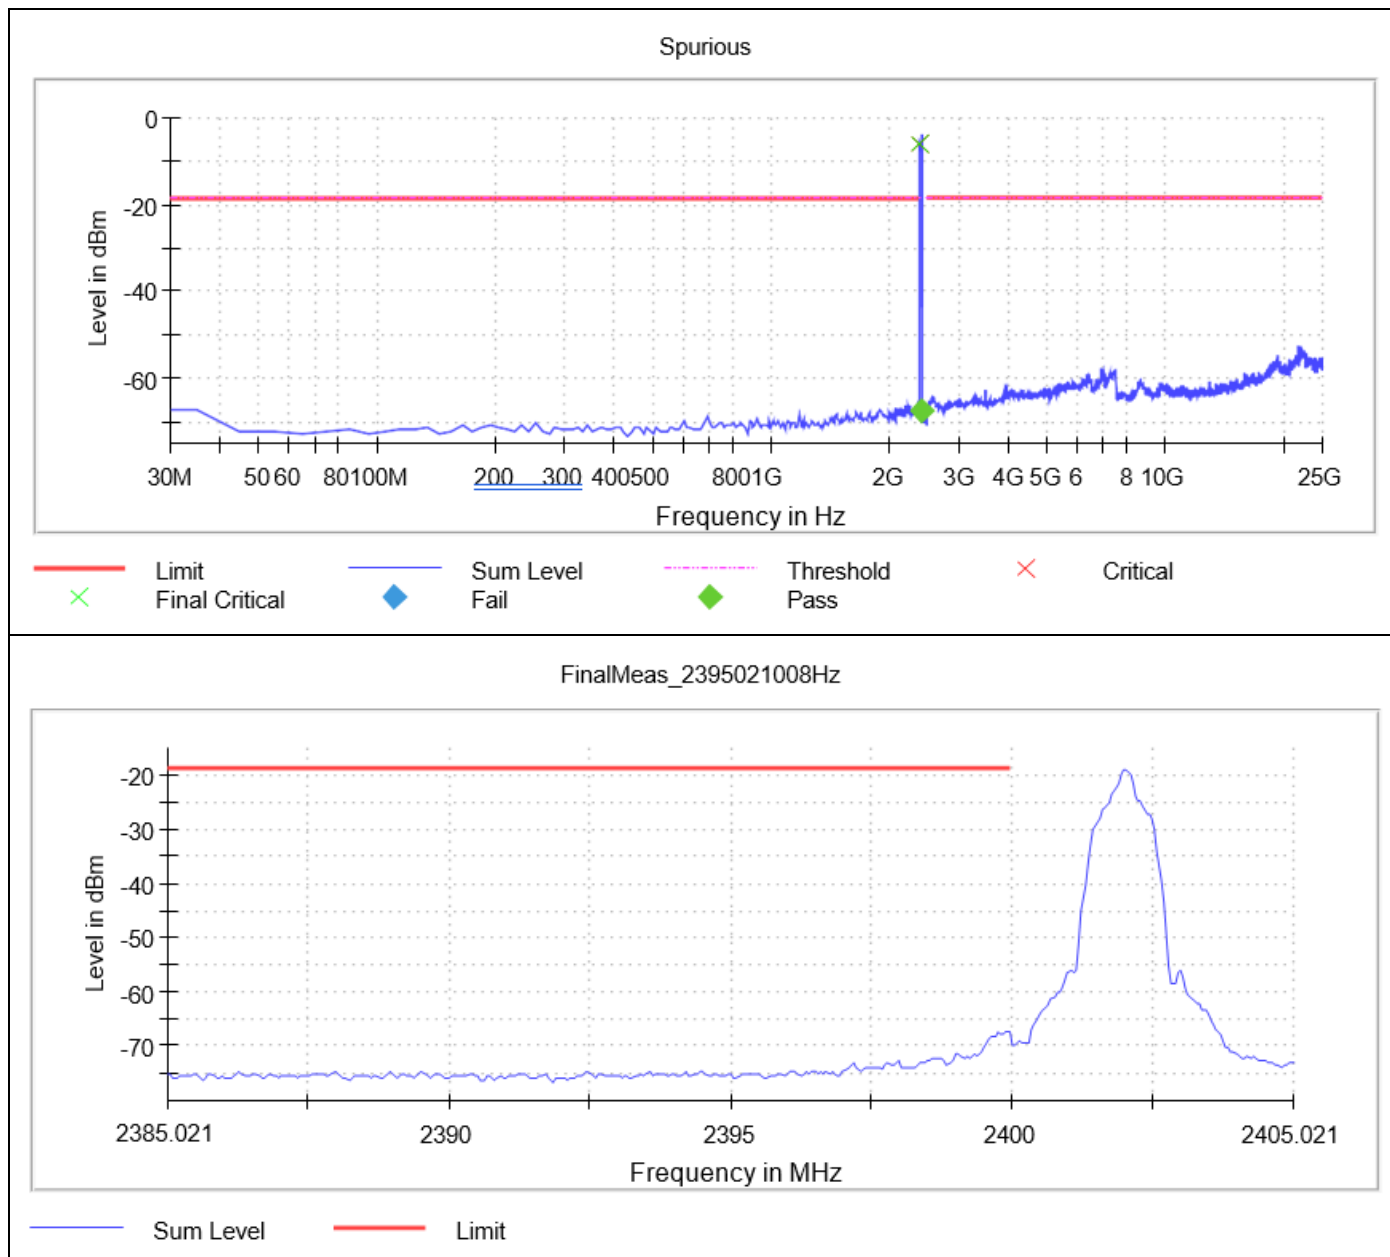

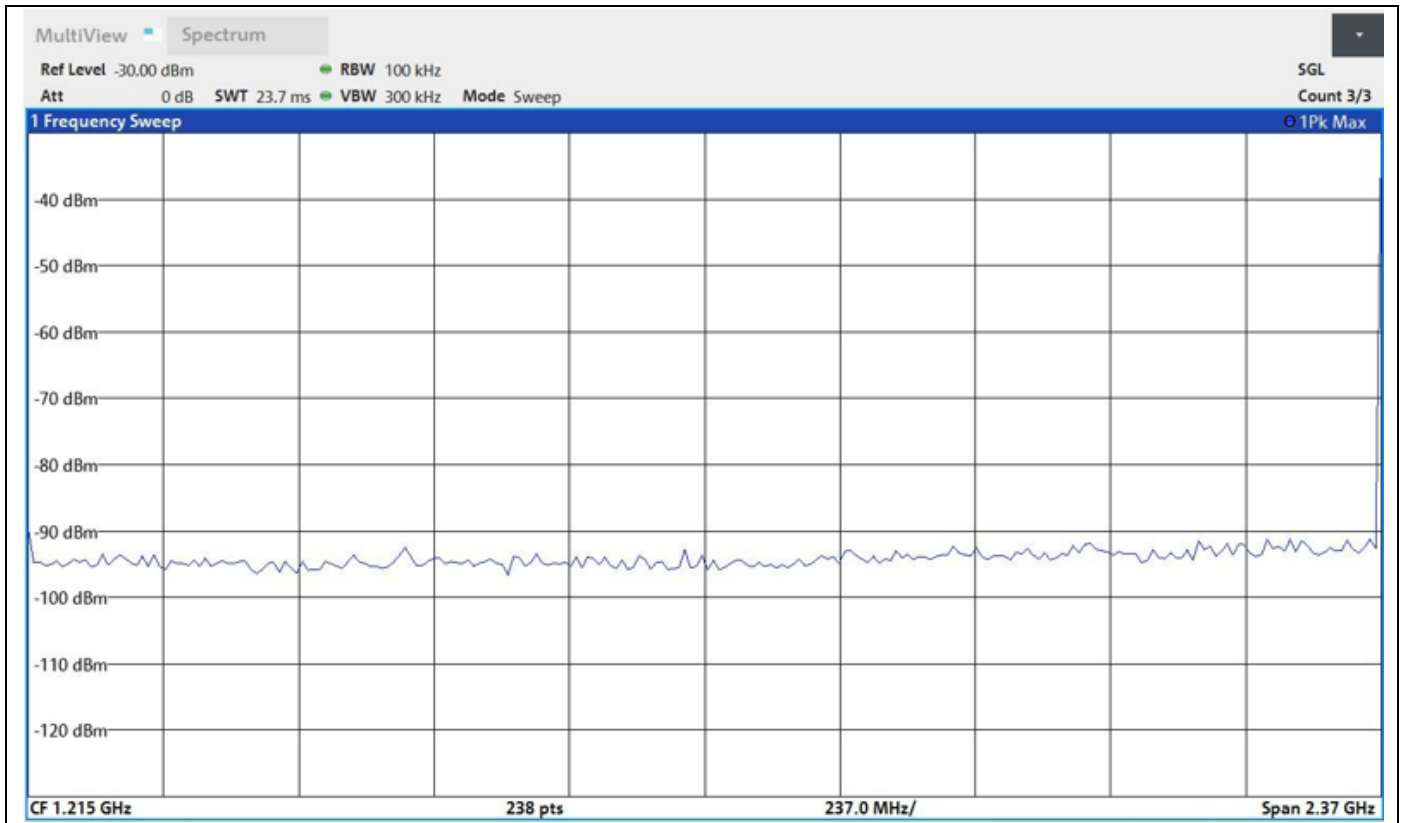


**2441MHz**

**Pre-Measurement**

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
21826.902463	-53.1	37.4	-15.6
21866.878495	-53.1	37.5	-15.6
22036.776631	-53.2	37.5	-15.6
22496.500999	-53.3	37.7	-15.6
22106.734687	-53.4	37.7	-15.6
22096.740679	-53.5	37.9	-15.6
22016.788615	-53.5	37.9	-15.6
22066.758655	-53.5	37.9	-15.6
22086.746671	-53.6	38.0	-15.6
21896.860519	-53.6	38.0	-15.6
22146.710719	-53.7	38.0	-15.6
22006.794607	-53.7	38.0	-15.6
22446.530959	-53.7	38.1	-15.6
22156.704727	-53.8	38.1	-15.6
22046.770639	-53.8	38.1	-15.6

**Spurious**

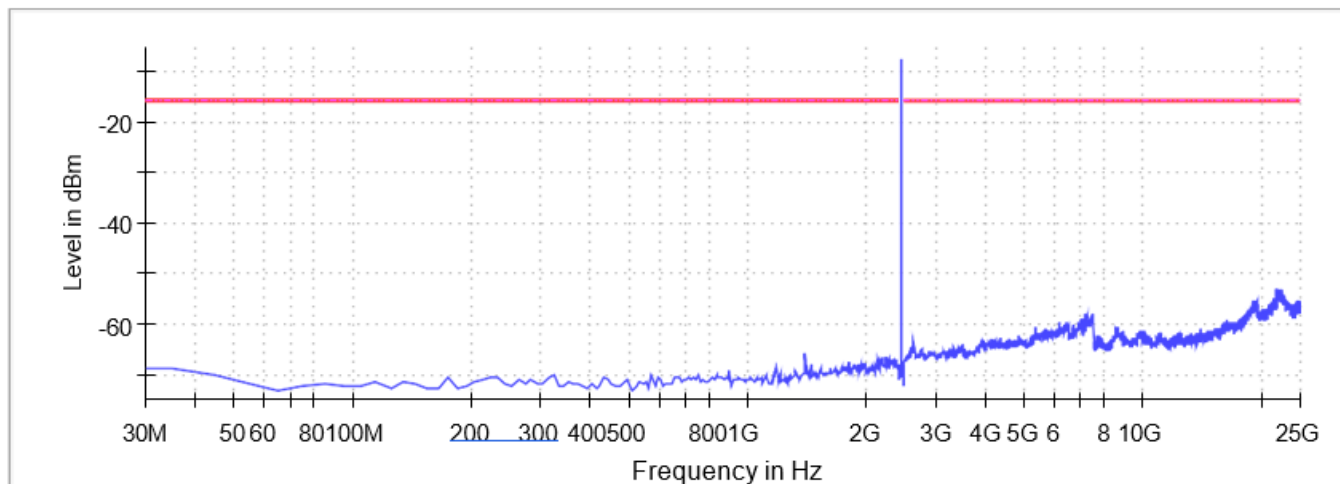


— Limit    — Sum Level    - - - Threshold    × Critical    × Final Critical

**2480MHz**

**Pre-Measurement**

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
22096.740679	-53.3	37.9	-15.5
22176.692743	-53.6	38.1	-15.5
21976.812583	-53.7	38.2	-15.5
22186.686751	-53.8	38.4	-15.5
22076.752663	-53.9	38.4	-15.5
21916.848535	-53.9	38.5	-15.5
22026.782623	-53.9	38.5	-15.5
22156.704727	-53.9	38.5	-15.5
22036.776631	-54.0	38.5	-15.5
22446.530959	-54.1	38.7	-15.5
22006.794607	-54.2	38.8	-15.5
21906.854527	-54.2	38.8	-15.5
21826.902463	-54.3	38.8	-15.5
22086.746671	-54.3	38.8	-15.5
22066.758655	-54.3	38.8	-15.5

**Spurious**

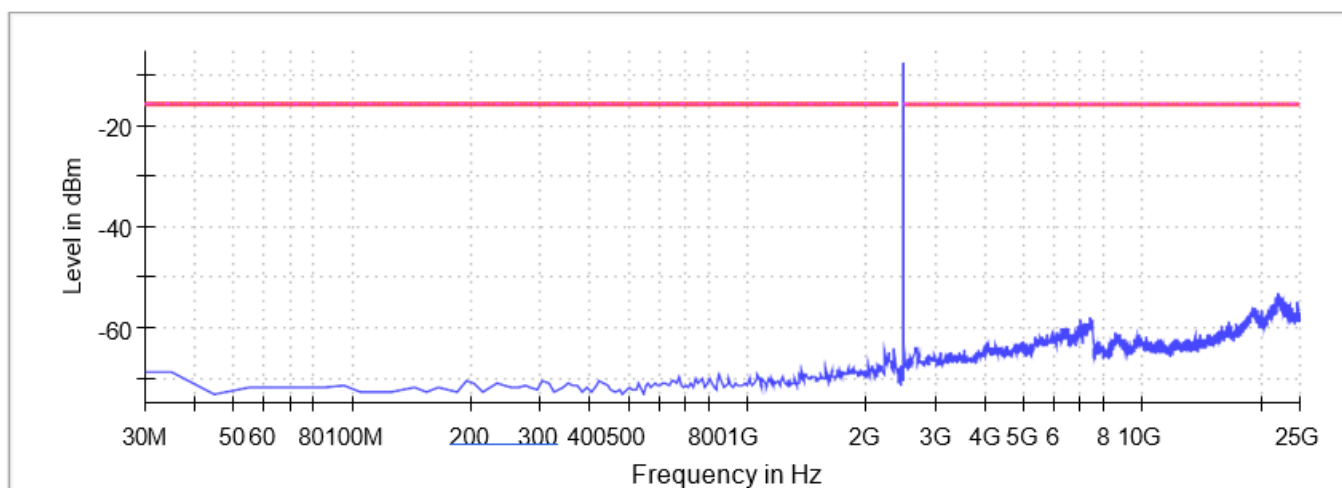

— Limit      — Sum Level      - - - Threshold      × Critical      × Final Critical

## 5. Radiated Testing

### 5.1 Test Summary

Start: 07/23/2024	End: 08/01/2024	Temperature: 21.4°C	Initials: AP/AB
		Humidity: 51.5%R.H	

DUT S/N	J23133#4 NA 3B	DUT Operating Mode		BT Classic
Comment	Worst case modulation 3-DH1 from EDR and on DH1 from BDR Family are tested.			
Antenna	Frequency Range	Polarization	Result Over/Under Limit	Notes
Loop	9kHz-30MHz	Parallel	<input type="checkbox"/> Over <input checked="" type="checkbox"/> Under	√
		Perpendicular	<input type="checkbox"/> Over <input checked="" type="checkbox"/> Under	√
		Ground-Parallel	<input type="checkbox"/> Over <input checked="" type="checkbox"/> Under	√
Log Periodic	30MHz-1GHz	Horizontal	<input type="checkbox"/> Over <input checked="" type="checkbox"/> Under	√
		Vertical	<input type="checkbox"/> Over <input checked="" type="checkbox"/> Under	√
Horn	1GHz-18GHz	Horizontal	<input type="checkbox"/> Over <input checked="" type="checkbox"/> Under	√
		Vertical	<input type="checkbox"/> Over <input checked="" type="checkbox"/> Under	√
Horn	18GHz-27.5GHz	Horizontal	<input type="checkbox"/> Over <input checked="" type="checkbox"/> Under	√
		Vertical	<input type="checkbox"/> Over <input checked="" type="checkbox"/> Under	√


**Notes:** √ meets the requirements of the acceptance criteria.


## 5.2 Test Setup

Semi-Anechoic Chamber Test Site-3 meter

Chamber Location	815 N Opdyke Rd Auburn Hills, Michigan 48326
Chamber Manufacturer:	ETS-Lindgren
Chamber Type	Semi-Anechoic
Model	FACT™ 3-2.0 Plus
Chamber Dimensions (L x W x H)	18'x18'x30'
Quiet Zone Diameter	2.0 meters
Quiet Zone Test Heights	1 & 2 meters (front only)
Test Distance	3.0 meters
Test Frequency Range	1-40 GHz
Measured Performance	4.87 dB Site sVSWR

Chamber Dimensions

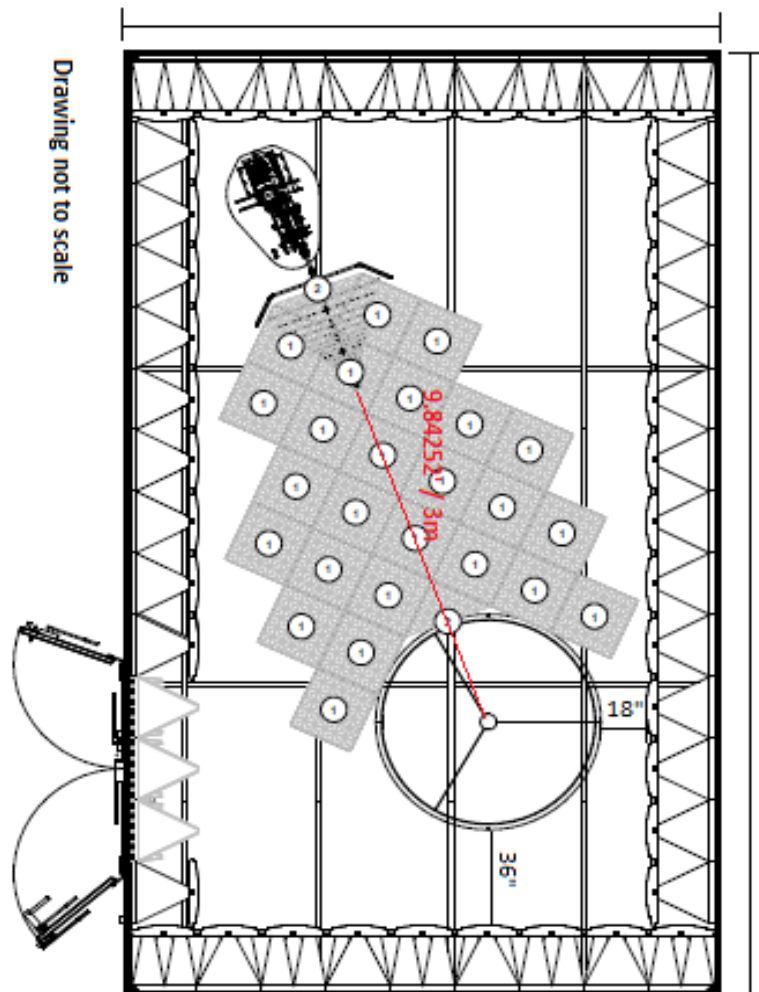

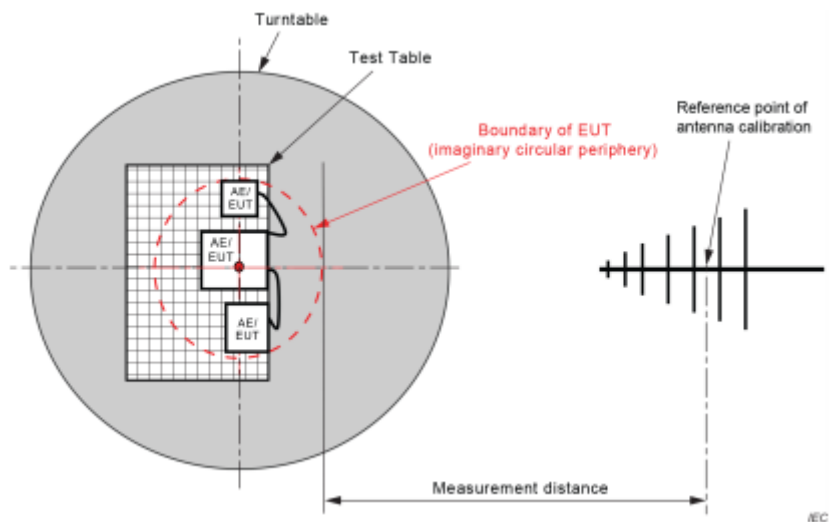



### 5.3 Test Equipment Used

ID #	Equipment	Manufacturer	Model #	Serial #	Cal Due
BVD0217	Receiver 2Hz-44GHz	Rohde & Schwarz	ESW44	101871	4/21/2025
BVD0118	Antenna Mast Position Controller	ETS	7006-001	00214778/00214648	N/A
BVD0111	3 Meter Anechoic Chamber	ETS	N/A	N/A	N/A
BVD0247	Turn Table	ETS	920250	N/A	N/A
BVD0323	Foam Test Table For 3 Meter Chamber	ETS-Lindgren	LDT-1.5	N/A	N/A
BVD0069	Bore Sight Tower	ETS	2171B	226732	N/A
BVD0312	Optima 12V Blue top Marine battery	Optima	D34M	N/A	N/A
BVD0187	Preamplifier 25dB cal to 100kHz-1GHz	Rohde & Schwarz	TS-PR1	102080	1/23/2025
BVD0184	Preamplifier 29dB 1-18GHz	Rohde & Schwarz	TS-PR18	101646	6/20/2025
BVD0185	Preamplifier 45dB 18-40GHz	Rohde & Schwarz	TS-PR1840	100064	6/20/2025
BVD0011	Loop Antenna 9kHz-30MHz	Rohde & Schwarz	FMZB1519B	145	6/10/2025
BVD0021	UltraLog Antenna 30-6000MHz	Rohde & Schwarz	HL562E	101113	6/26/2025
BVD0267	Double Ridge Waveguide 800MHz-18GHz	Rohde & Schwarz	HF907	102832	6/27/2025
BVD0320	18-40GHz Horn Antenna	L3 Narda ATM	PNR 180-442-KF	136164-01	7/15/2025
BVD0045	Field Probe Mast	Rohde & Schwarz	TS-FPMA	N/A	N/A
BVD0480	Band Reject Filter 50dB from 2400 to 2500MHz	Micro-Tronics	BRM50702	G482	6/17/2025
BVD0394	Double Shielded N-Type Cable 6.9 Meter	Rohde & Schwarz	N-Type	N/A	4/8/2025
BVD0398	Double Shielded N-Type Cable 2 Meter	Rohde & Schwarz	N-Type	N/A	4/8/2025
BVD0563	RF Cable Assembly	Huber+Suhner, inc	SUCOFLEX 102A	502215/2A	10/17/2024
BVD0407	Double Shielded N-Type Cable 410mm (For PreAmp)	Rohde & Schwarz	N-Type	N/A	10/15/2025
BVD0495	SMA Shielded Cable approx 100mm (for Pre-Amp)	Rohde & Schwarz	SMA-Type	N/A	7/15/2025
BVD0587	Double Shielded N-Type Cable 440mm (For PreAmp)	Winchester Interconnect	250-251-660157 REV A	N/A	1/9/2025
BVD0229	Temp and Humidity Meter	Fluke	971	12001009	5/23/2025

### Equipment List (Software)

ID #	Equipment	Manufacturer	Model	Version No.	
N/A	EMC Test Software	Rodhe & Schwarz	EMC32	2024.0.8.0	N/A

## Customer Supplied Equipment

ID #	Equipment	Manufacturer	Model	Serial #	Version No.
N/A	Harness	Harman	N/A	N/A	N/A
N/A	Display Unit	MOBIS	BMM6100000	231107 01	N/A
N/A	Shark Fin Antenna	Alfa Romeo	B901	719147	N/A
N/A	Antenna	Aptiv	APN35409682	N/A	N/A
N/A	Camera	N/A	23295906C	N/A	N/A
N/A	MFGBridge_Tool/Dut labtool	N/A	N/A	N/A	2.0.0.89

## 5.4 Test Limits and Procedures

Radiated emissions that fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

Frequencies (MHz)	Field strength ( $\mu\text{V}/\text{m}$ )	Field strength ( $\text{dB}\mu\text{V}/\text{m}$ )	Measurement distance (meters)
0.009 ~ 0.490	$2400/F(\text{kHz})$	48.5 - 13.8	300
0.490 ~ 1.705	$24000/F(\text{kHz})$	33.8 - 23	30
1.705 ~ 30.0	30	29.54	30
30 ~ 88	100	40.0	3
88 ~ 216	150	43.5	3
216 ~ 960	200	46.0	3
Above 960	500	54.0	3

Note:

- The lower limit shall apply at the transition frequencies.
- As per 15.35(b), for frequencies above 1000MHz, the field strength limits based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
- For performing measurements at a specified distance of 3m, the values are extrapolated using extrapolation factor.  
Frequencies below 30MHz are extrapolated using 40dB/decade.  
Frequencies above 30MHz are extrapolated using 20dB/decade.

Frequencies (MHz)	Formula for Limits derivation for below 30MHz	Limits for frequencies below 30MHz ( $\text{dB}\mu\text{V}/\text{m}$ )
0.009 ~ 0.490	$2400/F(\text{kHz}) + 40 \text{ Log } (300\text{m}/3\text{m})$	128.5 ~ 93.8
0.490 ~ 1.705	$24000/F(\text{kHz}) + 40 \text{ Log } (30\text{m}/3\text{m})$	73.8 ~ 62.96
1.705 ~ 30.0	$29.54 + 40 \text{ Log } (30\text{m}/3\text{m})$	69.54

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ .

The measurement procedures are as per ANSI C63.10-2013 Sections 6.3, Section 6.4, Section 6.5, and Section 6.6

1. The table height for emissions measurements
  - i) Below 1 GHz, the table height is 80 cm above the reference ground plane.
  - ii) Above 1 GHz, the table height is 1.5 m
2. Radiated emission tests are performed in the frequency range
  - i) 9 kHz to 30 MHz, using a calibrated loop antenna
  - ii) 30 MHz to 1GHz, using a calibrated log antenna
  - iii) Above 1 GHz using a calibrated horn antenna
3. Measurements performed with the EUT rotated from 0° to 360°, the antenna height scanned between 1m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

## 5.5 EMI Test Receiver/Spectrum Analyzer Settings

### Below 1GHz

Frequency	RBW	Detector
9KHz to 30MHz	9KHz	Peak

Frequency	RBW	Detector
30MHz to 1GHz	120KHz	Peak/Quasi Peak

### Above 1GHz

Frequency	RBW	Detector
1GHz to 40GHz	1 MHz	Peak/ Power Averaging (RMS)

Note: Trace average is 100 traces for continuous transmission else the traces shall be increased by a factor of  $1/x$ , where  $x$  is the duty cycle. Duty cycle  $> 98\%$  no correction factor needed and for Duty cycle  $< 98\%$  the correction factor  $10 \log (1/x)$ , where  $x$  is the duty cycle.

## 5.6 Test Plots

### Uncertainty

Radiated Emissions (30MHz to 40GHz)

**Test Engineer Initials:** AP/AB

The test is to measure the radiated emissions of the EUT. Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

### 30MHz to 1GHZ

Source of Uncertainty	Value (dB)	ProbabilityDistribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch Filter – Receiver	0.25	U-Shape	2.449	1	0.1768033
NSA Calibration	4.0	Triangular	1.414	1	1.633332
ETS Foam Table (LDT-1.5)	1.8	Rectangular	1.732	1	1.039261
Combined Standard Uncertainty (square root of the sum of the squares)					2.113781
<b>Expanded Uncertainty (K=2)</b>					<b>4.227562</b>

The total derived measurement uncertainty is +/- 4.228 dB

**1GHz to 40GHz**

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105000
Filter Insertion Loss	0.25	Normal	2	1	0.125000
Antenna Factor	0.65	Normal	2	1	0.325000
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.866051
PRF Response	1.5	Rectangular	1.732	1	0.866051
Mismatch Filter – Receiver	0.25	U-Shape	1.414	1	0.176803
VSWR Calibration	2.0	Triangular	2.449	1	0.816659
ETS Foam Table (LDT-1.5)	1.8	Rectangular	1.732	1	1.039261
Combined Standard Uncertainty (square root of the sum of the squares)					1.869213
<b>Expanded Uncertainty (K=2)</b>					<b>3.738426</b>

The total derived measurement uncertainty is +/- 3.738 dB.

Remarks:

1. Level Q-Peak Reading (dBμV/m) = Raw Q-Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Q-Peak Reading – Limit

Remarks:

1. Level Peak Reading (dBμV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:


1. Level Average Reading (dBμV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Average Reading – Limit

**J23133\_BT\_DH1\_Ch 39\_9kHz-30MHz\_Ground-Parallel**

8/1/2024 9:21:17 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.185801MHz	33.97	19.59	69.54	-35.57	1.00	127.40	H/V	Passed
2.	13.395467MHz	33.05	19.90	69.54	-36.49	1.00	92.50	H/V	Passed
3.	16.420706MHz	31.77	20.07	69.54	-37.77	1.00	173.00	H/V	Passed
4.	16.694949MHz	33.10	20.11	69.54	-36.44	1.00	277.10	H/V	Passed
5.	25.522132MHz	34.59	21.14	69.54	-34.95	1.00	300.70	H/V	Passed
6.	30MHz	34.25	22.04	40.00	-5.75	1.00	10.50	H/V	Passed

Overall Graphs:

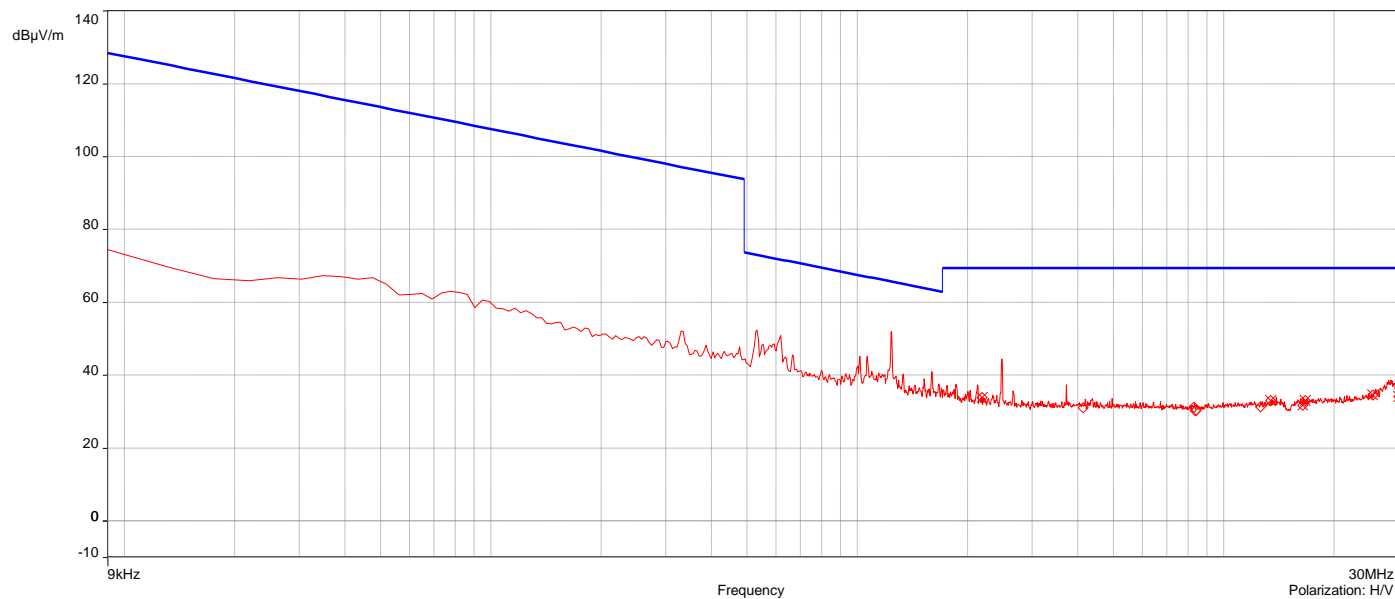




**J23133\_BT\_DH1\_Ch 39\_9kHz-30MHz\_Parallel**

8/1/2024 9:31:44 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.181516MHz	33.34	19.59	69.54	-36.20	1.00	277.10	H/V	Passed
2.	8.364829MHz	31.93	19.52	69.54	-37.61	1.00	207.60	H/V	Passed
3.	13.404037MHz	32.57	19.90	69.54	-36.97	1.00	320.80	H/V	Passed
4.	16.694949MHz	31.53	20.11	69.54	-38.01	1.00	314.10	H/V	Passed
5.	25.573553MHz	34.45	21.15	69.54	-35.09	1.00	94.40	H/V	Passed
6.	30MHz	34.18	22.04	40.00	-5.82	1.00	0.70	H/V	Passed

Overall Graphs:

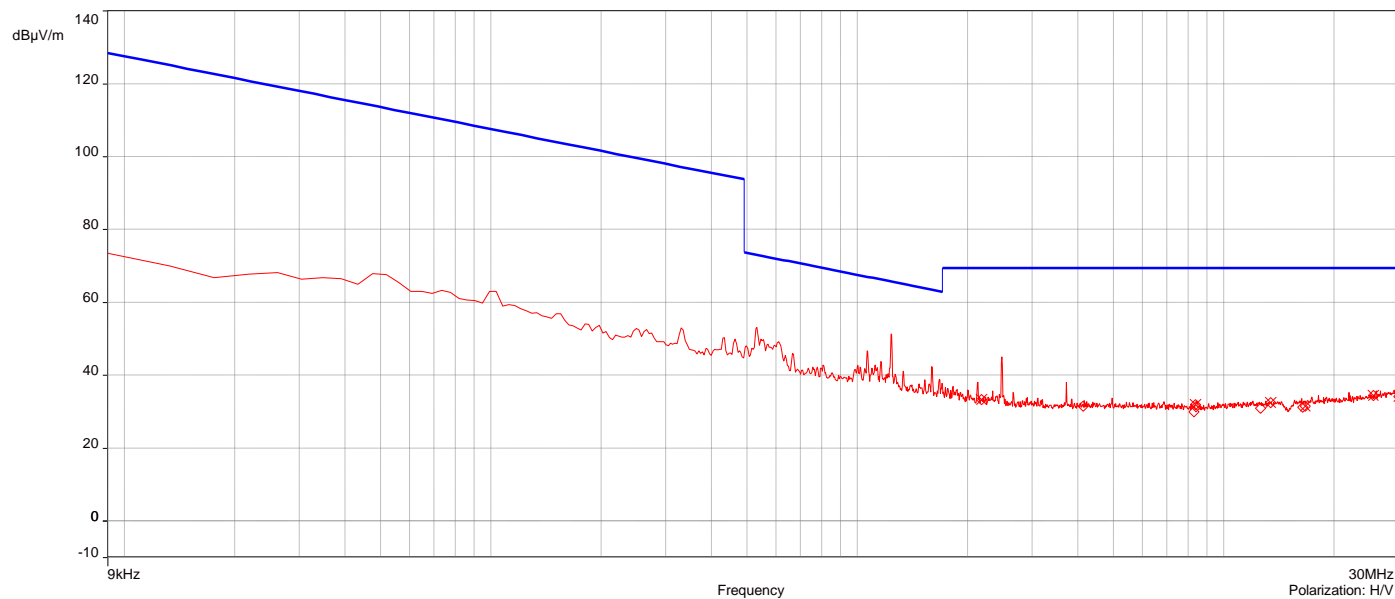


**J23133\_BT\_DH1\_Ch 39\_9kHz-30MHz\_Perpendicular**

8/1/2024 9:28:21 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.185801MHz	32.33	19.59	69.54	-37.21	1.00	7.00	H/V	Passed
2.	13.374042MHz	32.30	19.90	69.54	-37.24	1.00	127.00	H/V	Passed
3.	16.420706MHz	33.45	20.07	69.54	-36.09	1.00	211.60	H/V	Passed
4.	16.694949MHz	31.68	20.11	69.54	-37.86	1.00	59.60	H/V	Passed
5.	25.552128MHz	35.13	21.15	69.54	-34.41	1.00	252.90	H/V	Passed
6.	30MHz	33.60	22.04	40.00	-6.40	1.00	16.00	H/V	Passed

Overall Graphs:

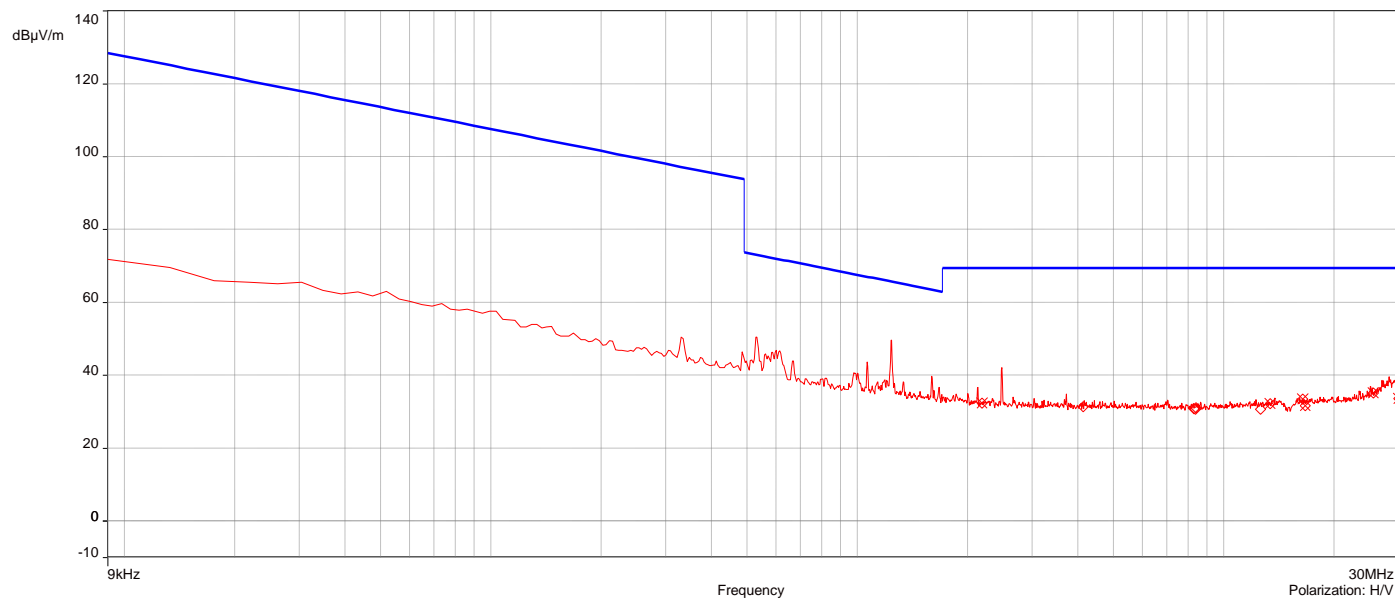


**J23133\_BT\_3-DH1\_Ch 0\_9kHz-30MHz\_Ground-Parallel**

8/1/2024 9:41:47 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.177231MHz	35.07	19.59	69.54	-34.47	1.00	134.70	H/V	Passed
2.	8.291984MHz	32.03	19.53	69.54	-37.51	1.00	115.20	H/V	Passed
3.	13.395467MHz	32.34	19.90	69.54	-37.20	1.00	215.00	H/V	Passed
4.	16.694949MHz	31.71	20.11	69.54	-37.83	1.00	126.00	H/V	Passed
5.	25.659254MHz	35.13	21.15	69.54	-34.41	1.00	60.90	H/V	Passed
6.	30MHz	34.35	22.04	40.00	-5.65	1.00	182.10	H/V	Passed

Overall Graphs:

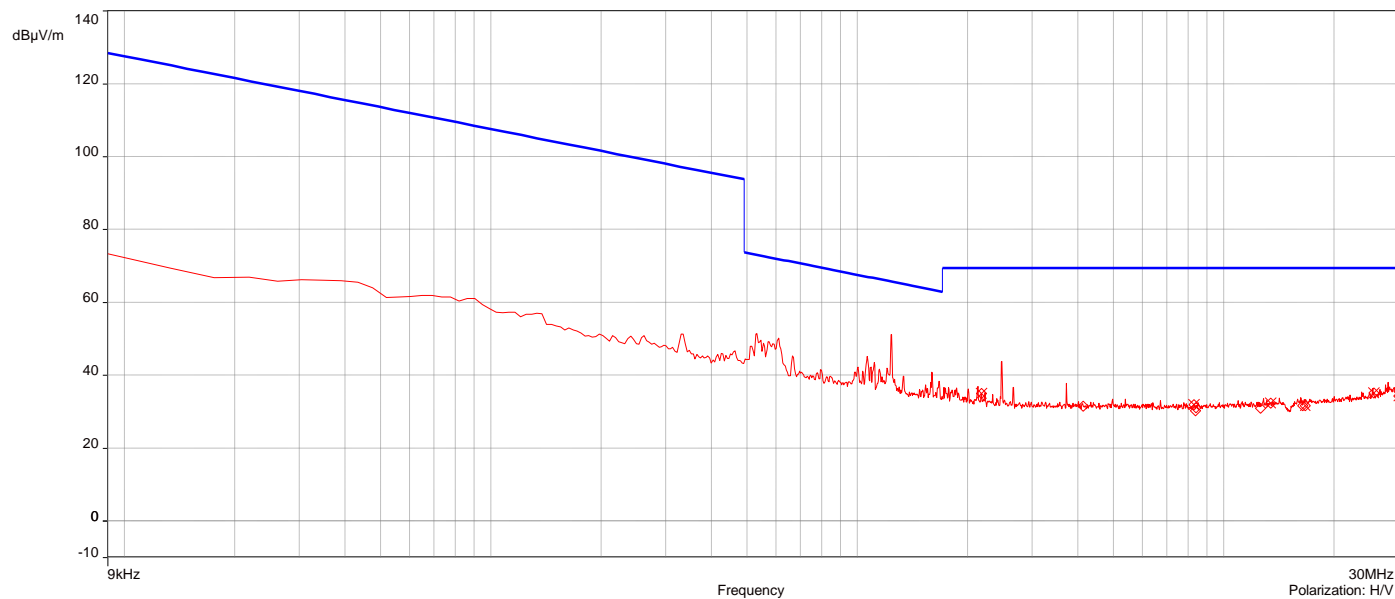


**J23133\_BT\_3-DH1\_Ch 0\_9kHz-30MHz\_Parallel**

8/1/2024 9:34:15 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.177231MHz	33.45	19.59	69.54	-36.09	1.00	10.70	H/V	Passed
2.	12.577024MHz	31.44	19.84	69.54	-38.10	1.00	1.80	H/V	Passed
3.	13.395467MHz	31.86	19.90	69.54	-37.68	1.00	250.00	H/V	Passed
4.	16.694949MHz	32.13	20.11	69.54	-37.41	1.00	308.70	H/V	Passed
5.	25.556413MHz	35.38	21.15	69.54	-34.16	1.00	108.70	H/V	Passed
6.	30MHz	34.05	22.04	40.00	-5.95	1.00	204.00	H/V	Passed

Overall Graphs:

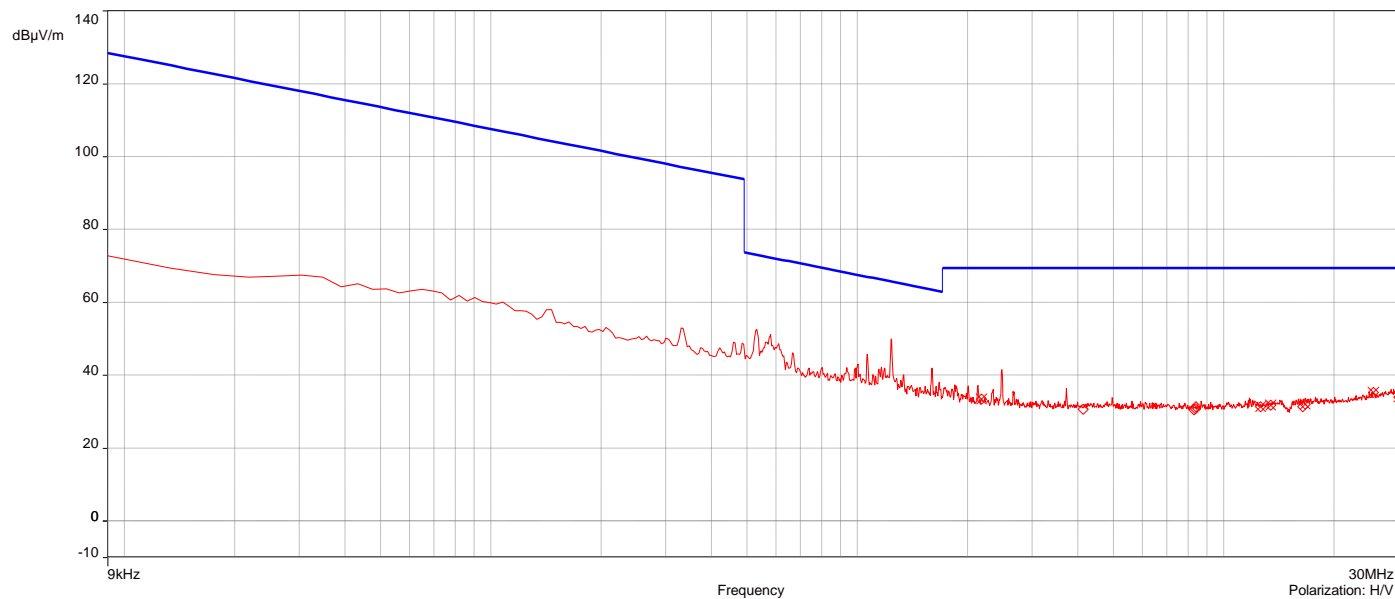


**J23133\_BT\_3-DH1\_Ch 0\_9kHz-30MHz\_Perpendicular**

8/1/2024 9:37:59 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.185801MHz	33.26	19.59	69.54	-36.28	1.00	67.40	H/V	Passed
2.	12.577024MHz	31.66	19.84	69.54	-37.88	1.00	215.60	H/V	Passed
3.	13.399752MHz	31.74	19.90	69.54	-37.80	1.00	311.30	H/V	Passed
4.	16.694949MHz	31.85	20.11	69.54	-37.69	1.00	63.00	H/V	Passed
5.	25.560698MHz	35.69	21.15	69.54	-33.85	1.00	300.30	H/V	Passed
6.	30MHz	34.65	22.04	40.00	-5.35	1.00	289.50	H/V	Passed

Overall Graphs:

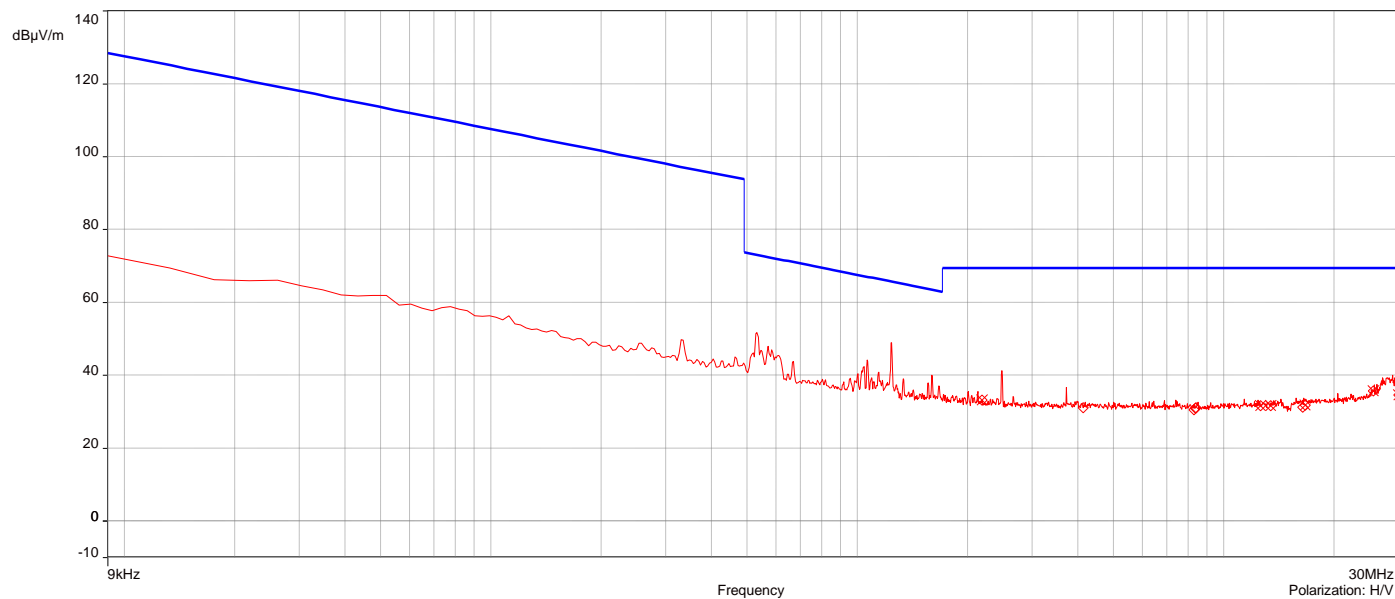


**J23133\_BT\_3-DH1\_Ch 39\_9kHz-30MHz\_Ground-Parallel**

8/1/2024 9:48:49 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.185801MHz	32.91	19.59	69.54	-36.63	1.00	106.20	H/V	Passed
2.	13.404037MHz	32.06	19.90	69.54	-37.48	1.00	334.20	H/V	Passed
3.	16.420706MHz	32.15	20.07	69.54	-37.39	1.00	243.00	H/V	Passed
4.	16.694949MHz	32.02	20.11	69.54	-37.52	1.00	212.80	H/V	Passed
5.	25.654969MHz	36.78	21.15	69.54	-32.76	1.00	249.70	H/V	Passed
6.	30MHz	34.93	22.04	40.00	-5.07	1.00	106.20	H/V	Passed

Overall Graphs:

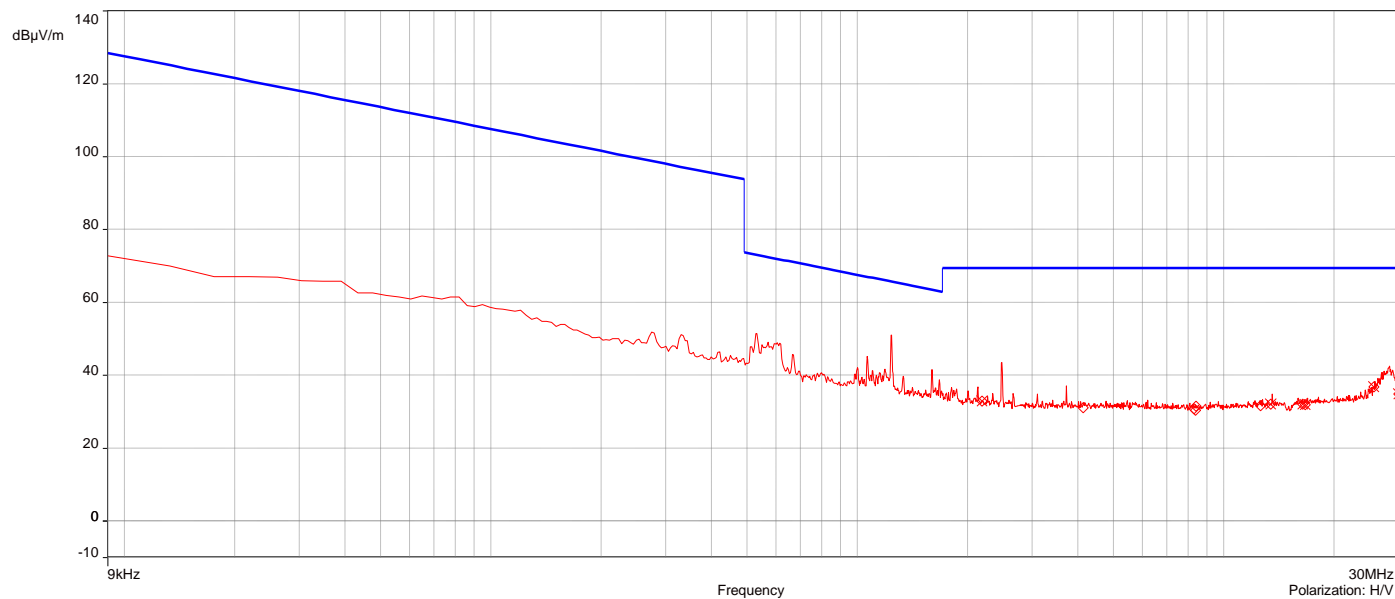


**J23133\_BT\_3-DH1\_Ch 39\_9kHz-30MHz\_Parallel**

8/1/2024 10:34:13 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.185801MHz	33.01	19.59	69.54	-36.53	1.00	91.90	H/V	Passed
2.	4.126924MHz	31.75	19.74	69.54	-37.79	1.00	285.10	H/V	Passed
3.	16.420706MHz	33.83	20.07	69.54	-35.71	1.00	39.70	H/V	Passed
4.	16.694949MHz	32.31	20.11	69.54	-37.23	1.00	152.30	H/V	Passed
5.	25.534988MHz	34.32	21.14	69.54	-35.22	1.00	28.60	H/V	Passed
6.	30MHz	34.89	22.04	40.00	-5.11	1.00	150.30	H/V	Passed

Overall Graphs:

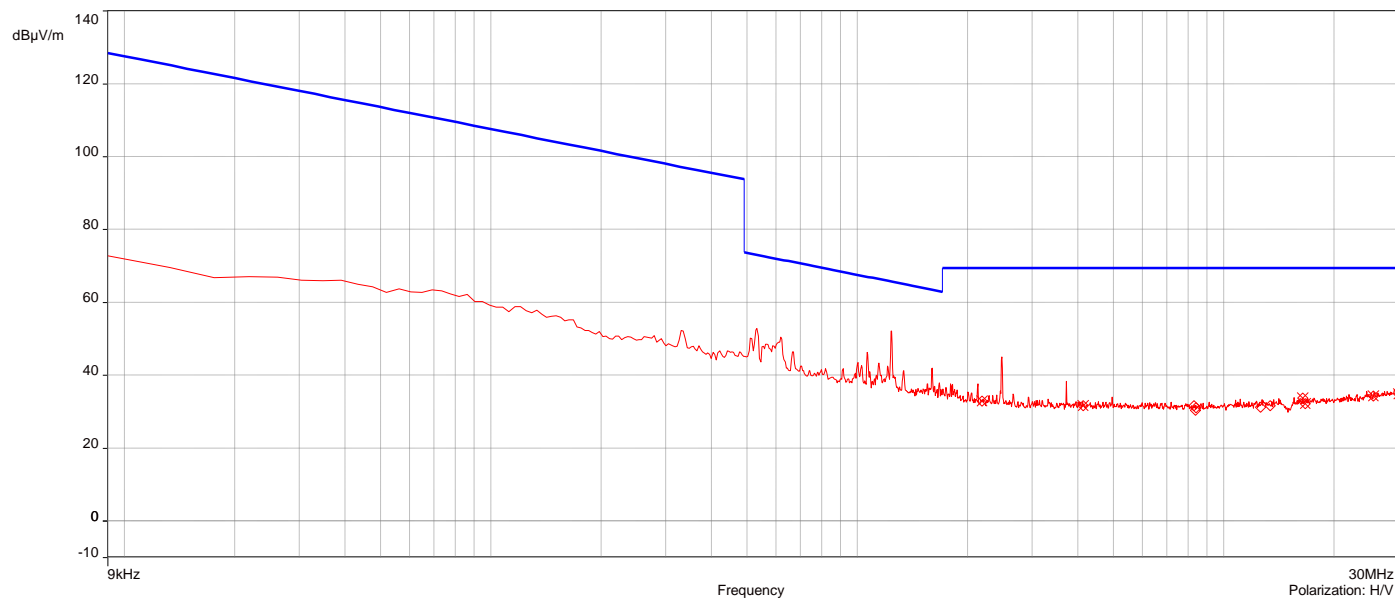


**J23133\_BT\_3-DH1\_Ch 39\_9kHz-30MHz\_Perpendicular**

8/1/2024 9:56:18 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.177231MHz	32.29	19.59	69.54	-37.25	1.00	357.40	H/V	Passed
2.	4.126924MHz	31.33	19.74	69.54	-38.21	1.00	352.40	H/V	Passed
3.	13.382612MHz	32.99	19.90	69.54	-36.55	1.00	149.60	H/V	Passed
4.	16.420706MHz	31.84	20.07	69.54	-37.70	1.00	149.60	H/V	Passed
5.	25.603548MHz	34.47	21.15	69.54	-35.07	1.00	217.40	H/V	Passed
6.	30MHz	34.08	22.04	40.00	-5.92	1.00	349.40	H/V	Passed

Overall Graphs:

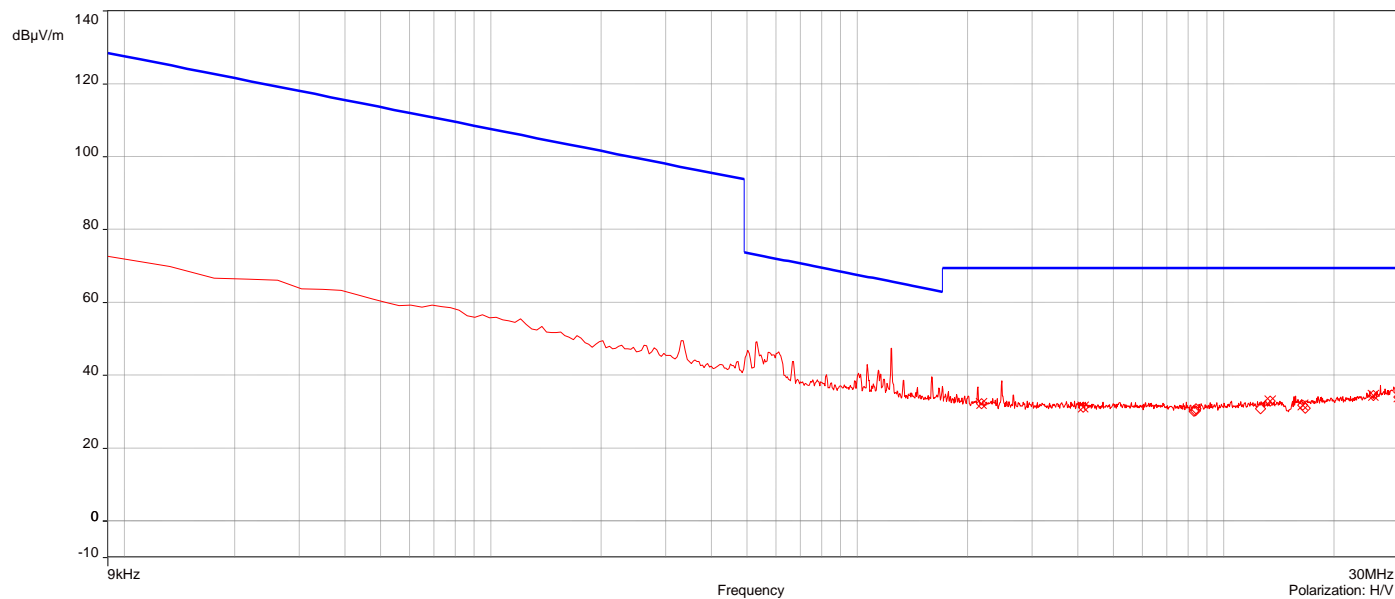





**J23133\_BT\_DH1\_Ch 0\_30MHz-1GHz**

7/31/2024 1:12:35 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	46.376846MHz	14.21	-16.28	40.00	-25.79	1.50	265.90	Vertical	Passed
2.	577.56868MHz	45.51	-5.79	46.00	-0.49	1.00	340.90	Vertical	Passed
3.	602.16248MHz	40.53	-5.30	46.00	-5.47	1.00	353.90	Vertical	Passed
4.	995.66327MHz	49.72	-0.28	54.00	-4.28	1.00	32.10	Vertical	Passed
5.	999.88588MHz	50.23	-0.14	54.00	-3.77	1.00	40.90	Vertical	Passed
6.	577.56868MHz	40.32	-4.73	46.00	-5.68	1.50	108.10	Horizontal	Passed

Overall Graphs:

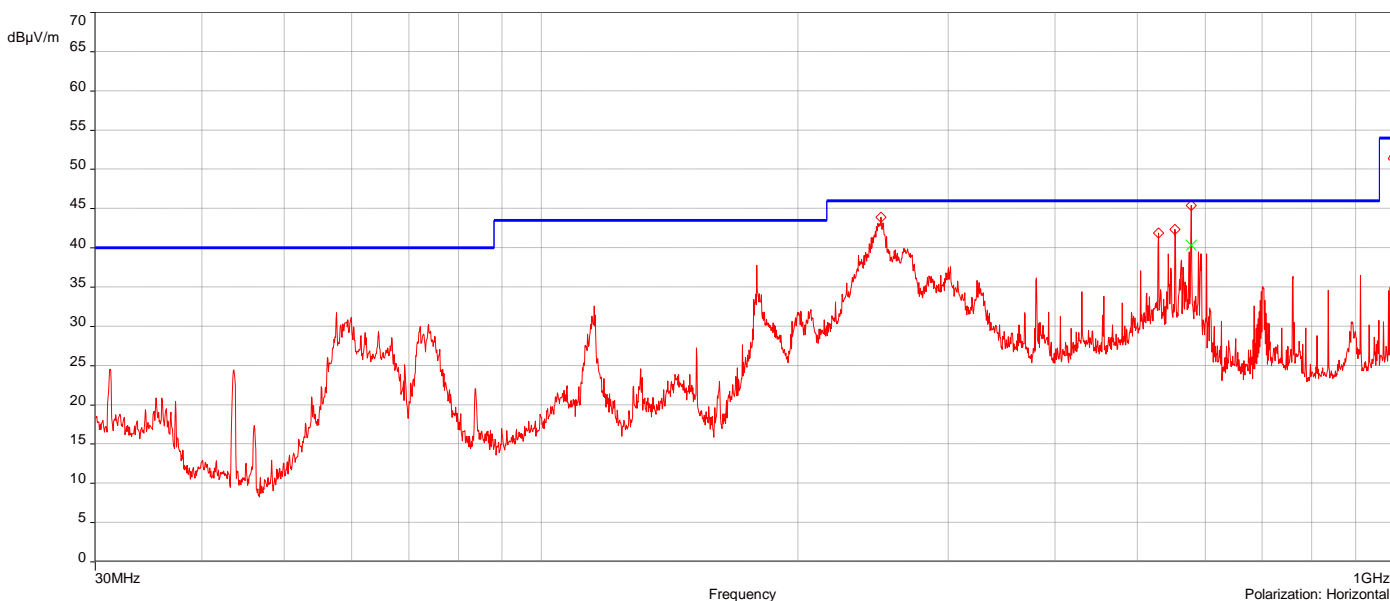

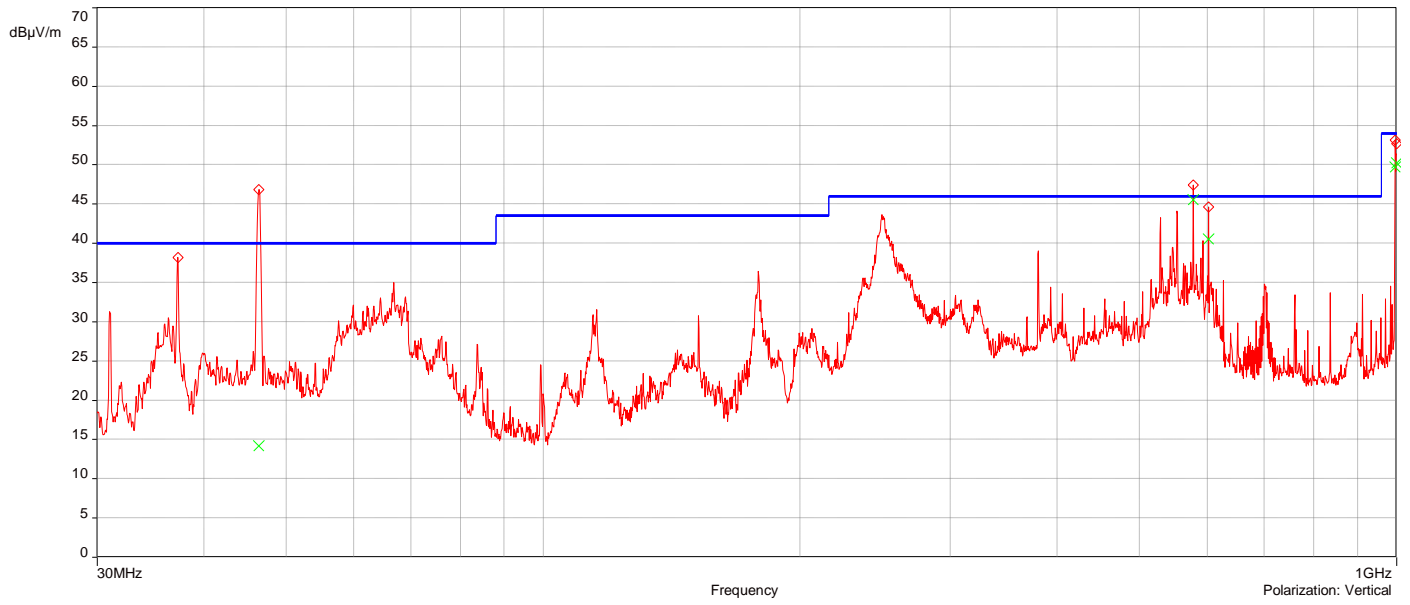


**J23133\_BT\_DH1\_Ch 39\_30MHz-1GHz**

7/31/2024 12:31:52 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	995.66327MHz	49.69	-0.28	54.00	-4.31	1.00	141.10	Vertical	Passed
2.	995.94858MHz	51.86	-0.28	54.00	-2.14	1.00	137.90	Vertical	Passed
3.	999.82881MHz	52.08	-0.15	54.00	-1.92	1.00	134.90	Vertical	Passed
4.	995.60621MHz	53.18	1.12	54.00	-0.82	1.00	301.90	Horizontal	Passed
5.	996.00565MHz	52.54	1.12	54.00	-1.46	1.00	295.90	Horizontal	Passed
6.	999.88588MHz	52.59	1.16	54.00	-1.41	1.00	288.90	Horizontal	Passed

Overall Graphs:



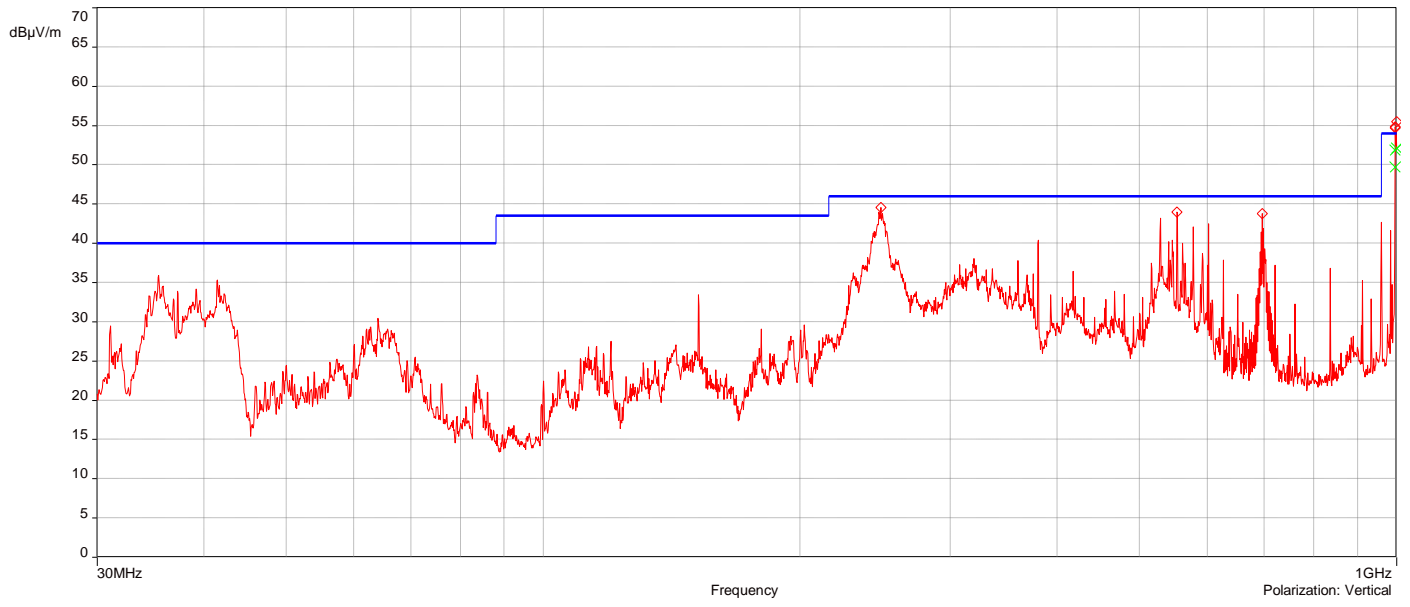



**J23133\_BT\_3-DH1\_Ch 0\_30MHz-1GHz**

7/31/2024 2:28:36 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	33.880228MHz	11.15	-9.07	40.00	-28.85	3.50	173.10	Vertical	Passed
2.	528.38108MHz	42.27	-6.89	46.00	-3.73	1.00	151.10	Vertical	Passed
3.	577.56868MHz	44.89	-5.79	46.00	-1.11	1.00	335.90	Vertical	Passed
4.	602.16248MHz	39.73	-5.30	46.00	-6.27	1.00	358.90	Vertical	Passed
5.	999.88588MHz	50.45	-0.14	54.00	-3.55	1.00	28.10	Vertical	Passed
6.	577.56868MHz	41.80	-4.73	46.00	-4.20	1.50	301.10	Horizontal	Passed

Overall Graphs:

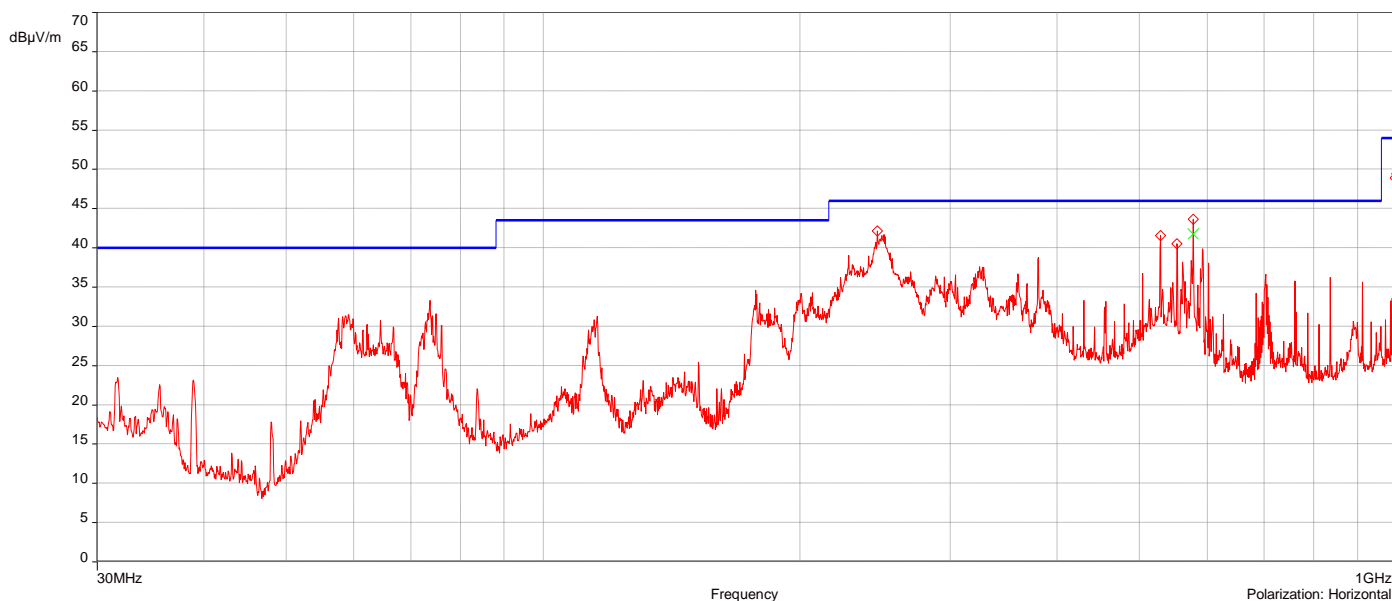

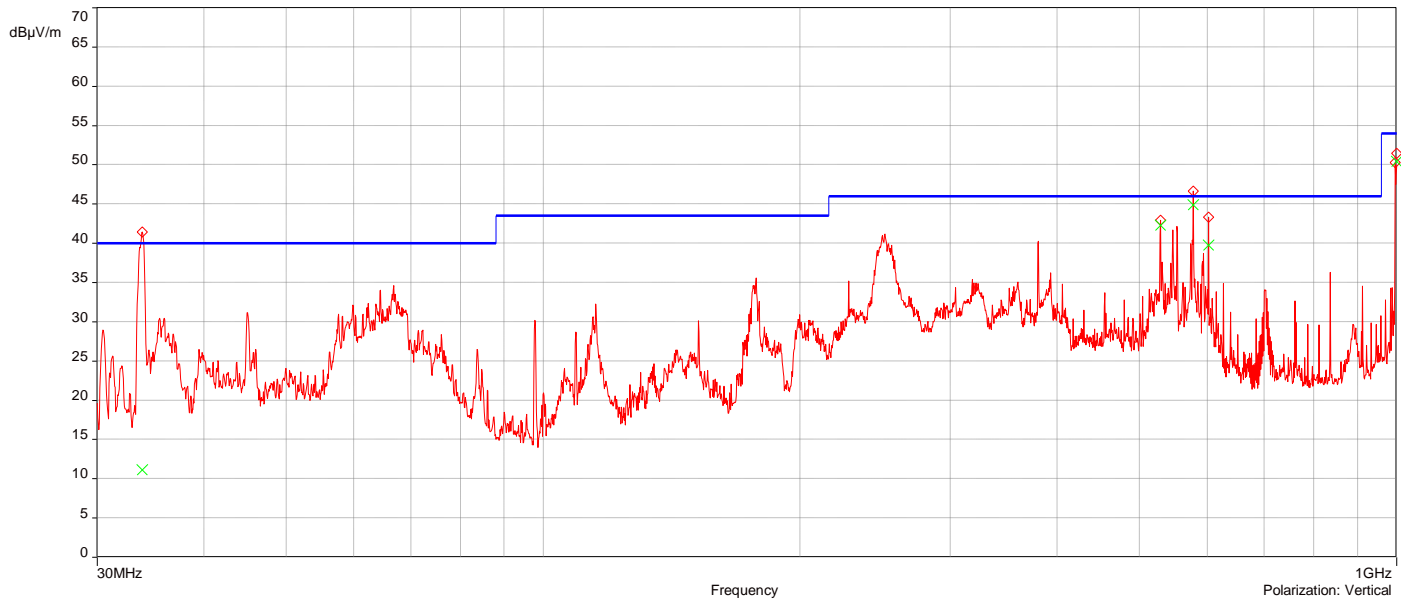



**J23133\_BT\_3-DH1\_Ch 39\_30MHz-1GHz**

7/31/2024 3:21:16 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	38.559327MHz	21.95	-11.80	40.00	-18.05	1.75	68.10	Vertical	Passed
2.	46.776281MHz	17.34	-16.47	40.00	-22.66	1.00	296.90	Vertical	Passed
3.	577.56868MHz	45.39	-5.79	46.00	-0.61	1.00	164.90	Vertical	Passed
4.	995.60621MHz	49.90	-0.28	54.00	-4.10	1.00	35.10	Vertical	Passed
5.	999.88588MHz	49.68	-0.14	54.00	-4.32	1.00	35.10	Vertical	Passed
6.	577.56868MHz	42.25	-4.73	46.00	-3.75	1.50	283.90	Horizontal	Passed

Overall Graphs:

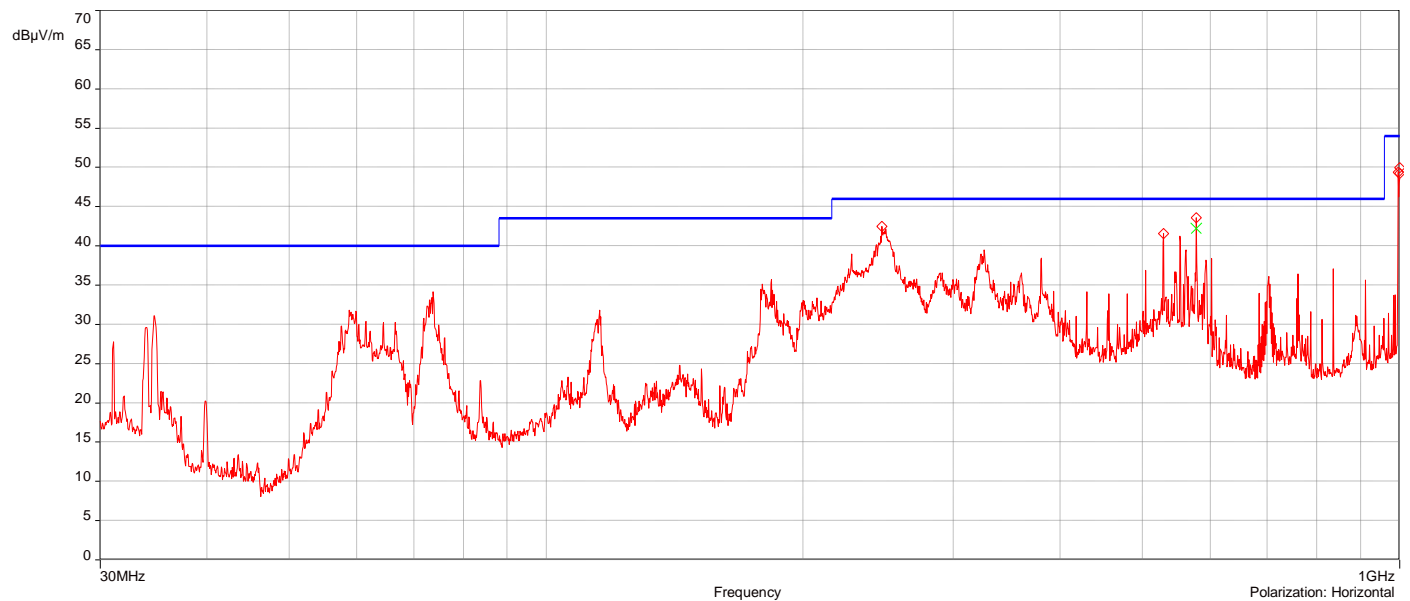

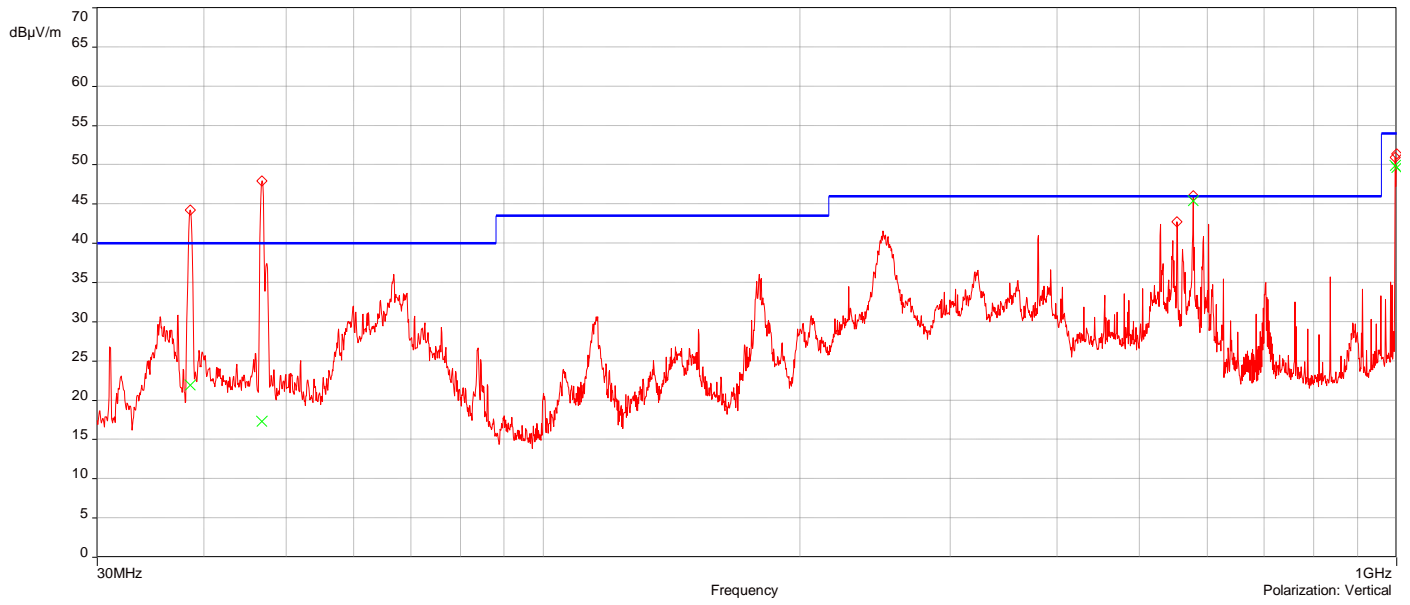



**J23133\_BT\_DH1\_Ch 0\_1-18GHz**


7/23/2024 7:13:59 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	1.7980235GHz	49.20	-4.51	74.00	-24.80	1.00	335.70	Vertical	Passed
2.	3.990588GHz	47.26	3.36	74.00	-26.74	2.50	123.80	Vertical	Passed
3.	11.222801GHz	47.79	11.54	74.00	-26.21	4.00	156.00	Vertical	Passed
4.	17.962999GHz	55.29	21.35	74.00	-18.71	2.50	58.40	Vertical	Passed
5.	3.7500809GHz	49.40	2.73	74.00	-24.60	4.00	196.70	Horizontal	Passed
6.	17.834495GHz	55.39	21.00	74.00	-18.61	2.00	205.40	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	1.7985235GHz	47.86	-4.51	54.00	-6.14	1.00	352.20	Vertical	Passed
2.	17.815995GHz	42.99	21.01	54.00	-11.01	1.00	359.90	Vertical	Passed
3.	1.7985235GHz	48.13	-4.25	54.00	-5.87	1.00	0	Horizontal	Passed
4.	1.9945293GHz	45.51	-2.22	54.00	-8.49	3.00	0.20	Horizontal	Passed
5.	3.7500809GHz	46.26	2.73	54.00	-7.74	4.00	196.70	Horizontal	Passed
6.	17.800994GHz	42.21	20.80	54.00	-11.79	4.00	32.20	Horizontal	Passed

Overall Graphs:



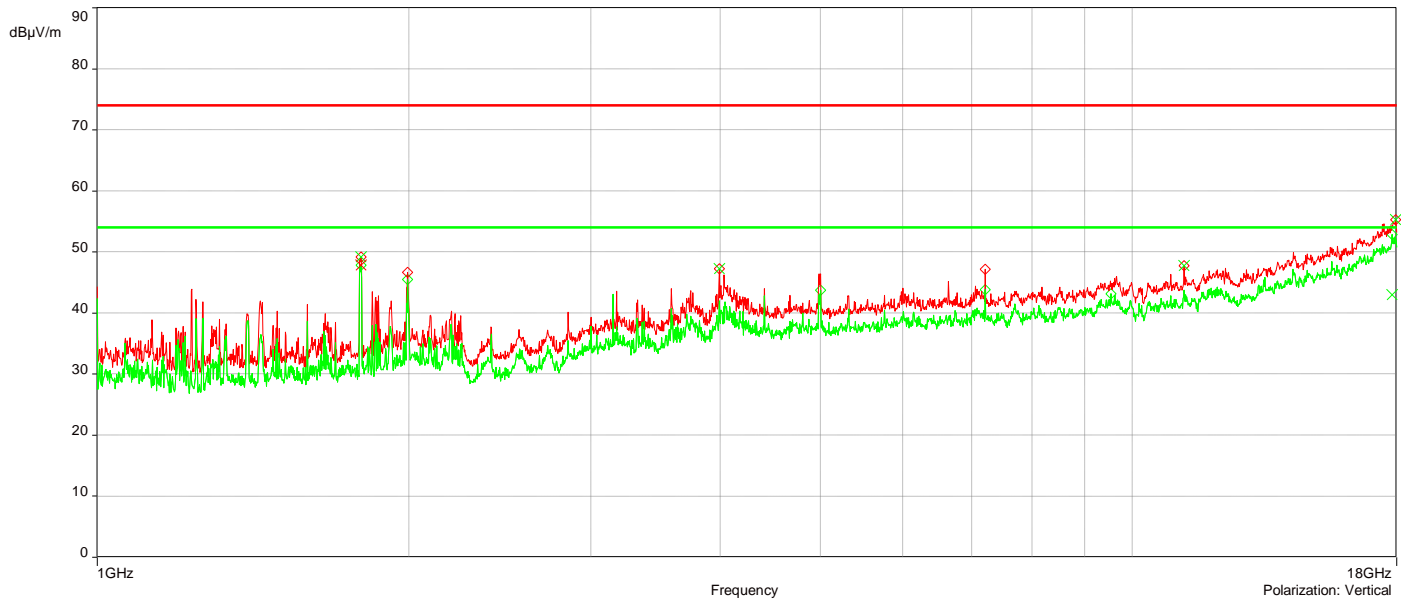


**J23133\_BT\_DH1\_Ch 39\_1-18GHz**

7/23/2024 7:36:29 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	1.7950234GHz	48.62	-4.53	74.00	-25.38	1.00	351.90	Vertical	Passed
2.	3.583076GHz	48.27	2.00	74.00	-25.73	2.00	124.70	Vertical	Passed
3.	4.979117GHz	47.14	5.71	74.00	-26.86	1.00	69.80	Vertical	Passed
4.	6.6591664GHz	46.39	7.04	74.00	-27.61	2.00	87.20	Vertical	Passed
5.	17.845995GHz	55.91	21.19	74.00	-18.09	1.50	345.90	Vertical	Passed
6.	17.797994GHz	55.24	20.78	74.00	-18.76	2.50	359.90	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	1.7945234GHz	32.45	-4.53	54.00	-21.55	1.00	343.90	Vertical	Passed
2.	3.7500809GHz	31.08	2.81	54.00	-22.92	1.00	0.10	Vertical	Passed
3.	7.323186GHz	34.59	7.50	54.00	-19.41	1.00	98.10	Vertical	Passed
4.	17.800994GHz	42.50	20.92	54.00	-11.50	1.00	0.10	Vertical	Passed
5.	1.7945234GHz	28.32	-4.28	54.00	-25.68	1.00	359.90	Horizontal	Passed
6.	17.959999GHz	42.94	21.22	54.00	-11.06	1.00	241.90	Horizontal	Passed

Overall Graphs:

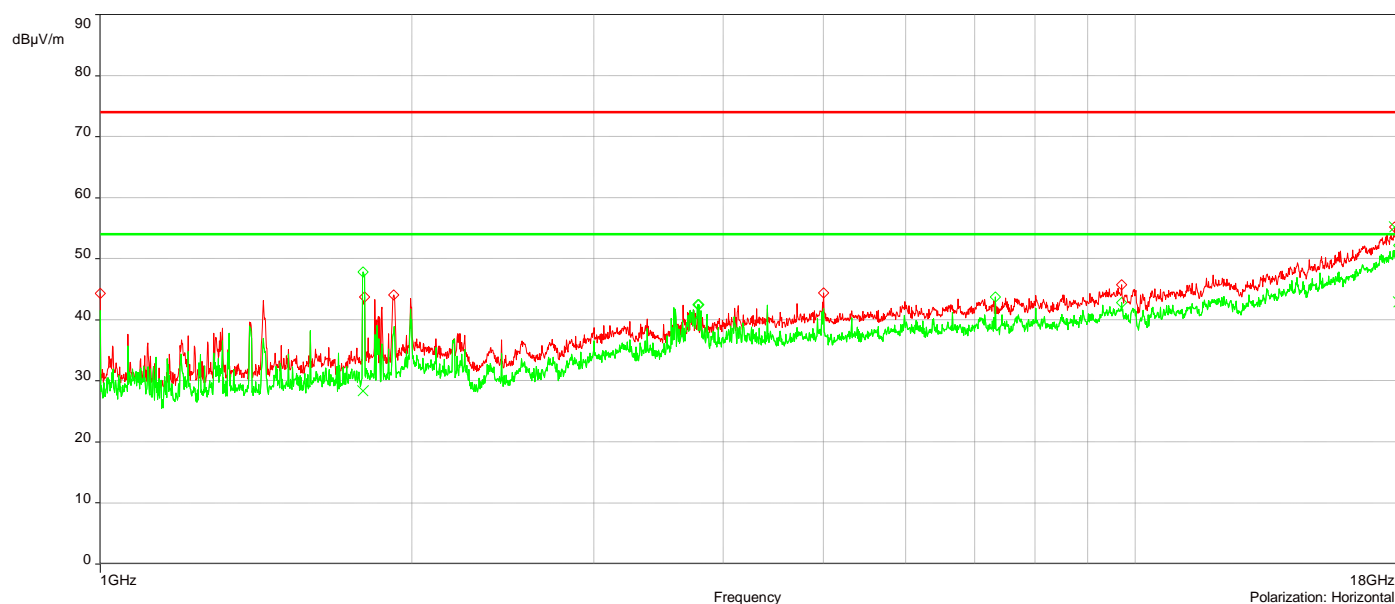




**J23133\_BT\_DH1\_Ch 78\_1-18GHz**


7/23/2024 8:37:26 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	1.7995235GHz	49.03	-4.50	74.00	-24.97	1.00	344.90	Vertical	Passed
2.	1.9950293GHz	46.84	-2.25	74.00	-27.16	1.50	101.20	Vertical	Passed
3.	3.5935763GHz	47.12	1.99	74.00	-26.88	2.00	138.70	Vertical	Passed
4.	17.882497GHz	55.01	21.25	74.00	-18.99	2.00	266.60	Vertical	Passed
5.	17.945498GHz	55.42	21.07	74.00	-18.58	2.00	348.40	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	1.7995235GHz	30.44	-4.50	54.00	-23.56	1.00	344.90	Vertical	Passed
2.	4.7921115GHz	28.09	4.82	54.00	-25.91	1.00	359.90	Vertical	Passed
3.	17.875496GHz	42.94	21.24	54.00	-11.06	1.00	359.90	Vertical	Passed
4.	1.7995235GHz	27.00	-4.24	54.00	-27.00	1.00	0.10	Horizontal	Passed
5.	1.9925292GHz	25.59	-2.25	54.00	-28.41	1.00	115.90	Horizontal	Passed
6.	17.9985GHz	43.29	22.01	54.00	-10.71	4.00	40.10	Horizontal	Passed

Overall Graphs:

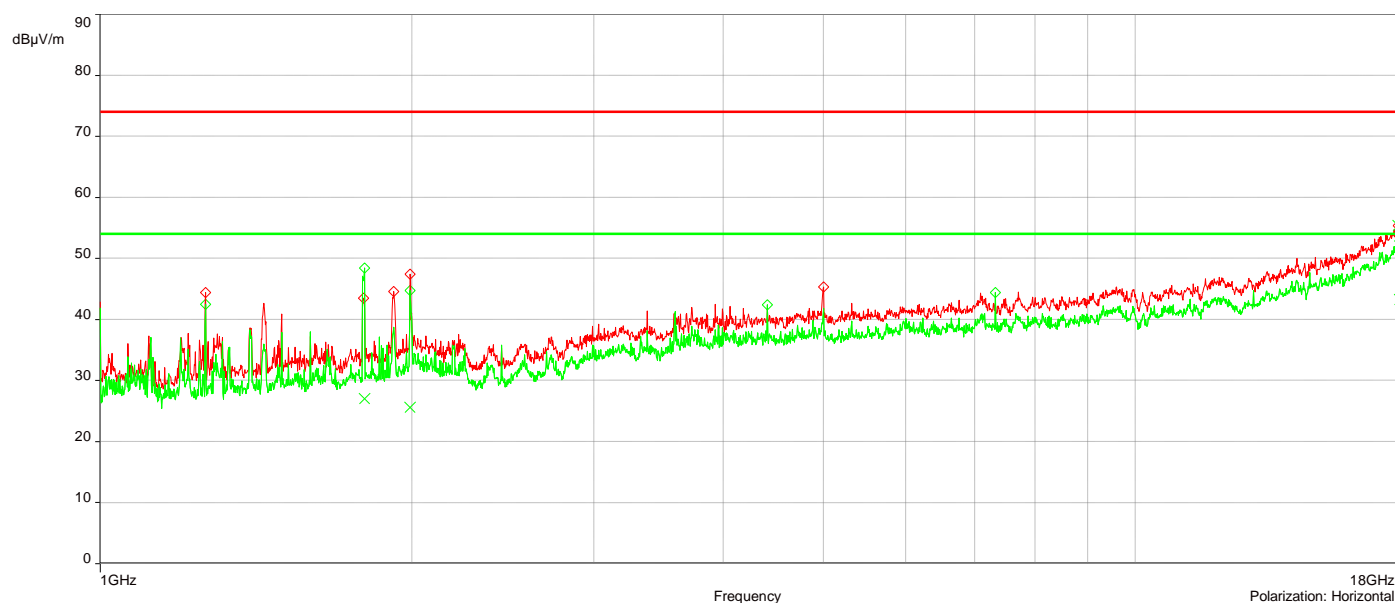

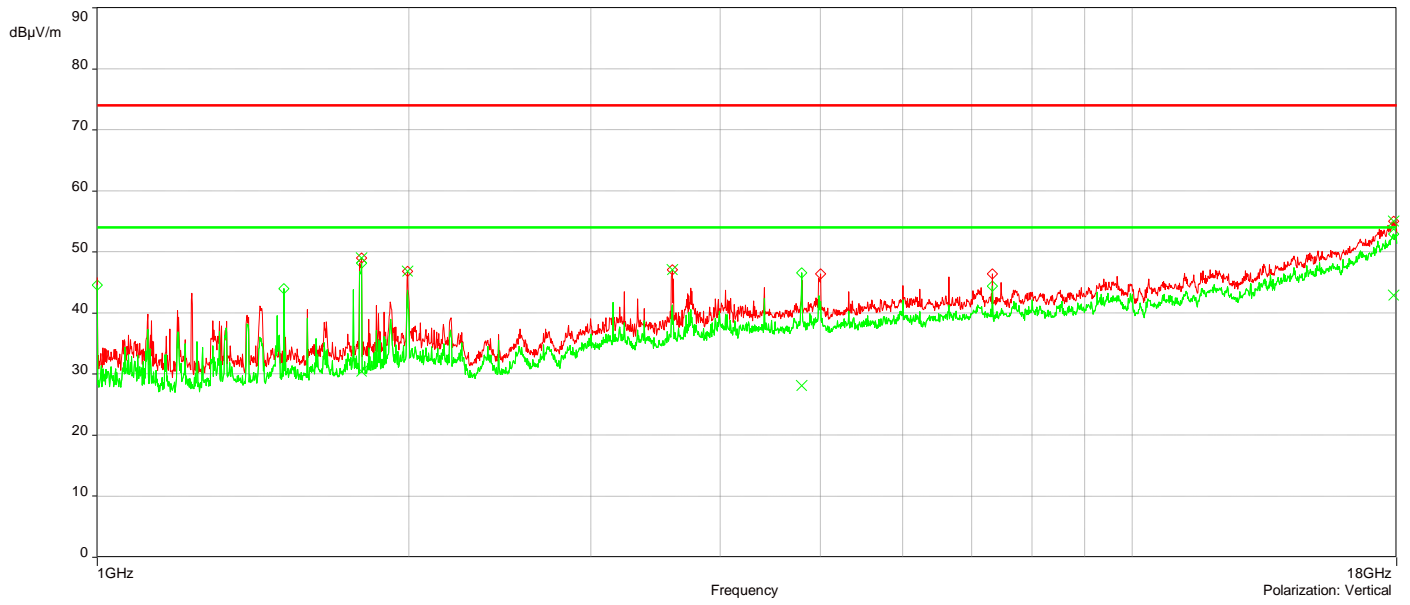

**J23133\_BT\_3-DH1\_Ch 0\_1-18GHz**


7/23/2024 6:54:07 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	1GHz	46.17	-7.69	74.00	-27.83	2.50	57.80	Vertical	Passed
2.	1.7990235GHz	48.62	-4.51	74.00	-25.38	1.00	350.70	Vertical	Passed
3.	1.9915292GHz	47.31	-2.29	74.00	-26.69	4.00	76.60	Vertical	Passed
4.	7.2061825GHz	46.65	7.87	74.00	-27.35	1.00	90.40	Vertical	Passed
5.	17.883497GHz	55.53	21.25	74.00	-18.47	1.00	199.10	Vertical	Passed
6.	17.842495GHz	55.73	21.05	74.00	-18.27	1.00	134.20	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	1.7990235GHz	47.65	-4.51	54.00	-6.35	1.00	350.70	Vertical	Passed
2.	1.9930292GHz	45.60	-2.27	54.00	-8.40	4.00	76.60	Vertical	Passed
3.	17.839995GHz	42.87	21.15	54.00	-11.13	1.00	0.10	Vertical	Passed
4.	1.7990235GHz	47.91	-4.24	54.00	-6.09	1.00	359.90	Horizontal	Passed
5.	1.9930292GHz	45.63	-2.24	54.00	-8.37	4.00	359.90	Horizontal	Passed
6.	17.958999GHz	42.82	21.21	54.00	-11.18	2.00	359.90	Horizontal	Passed

Overall Graphs:



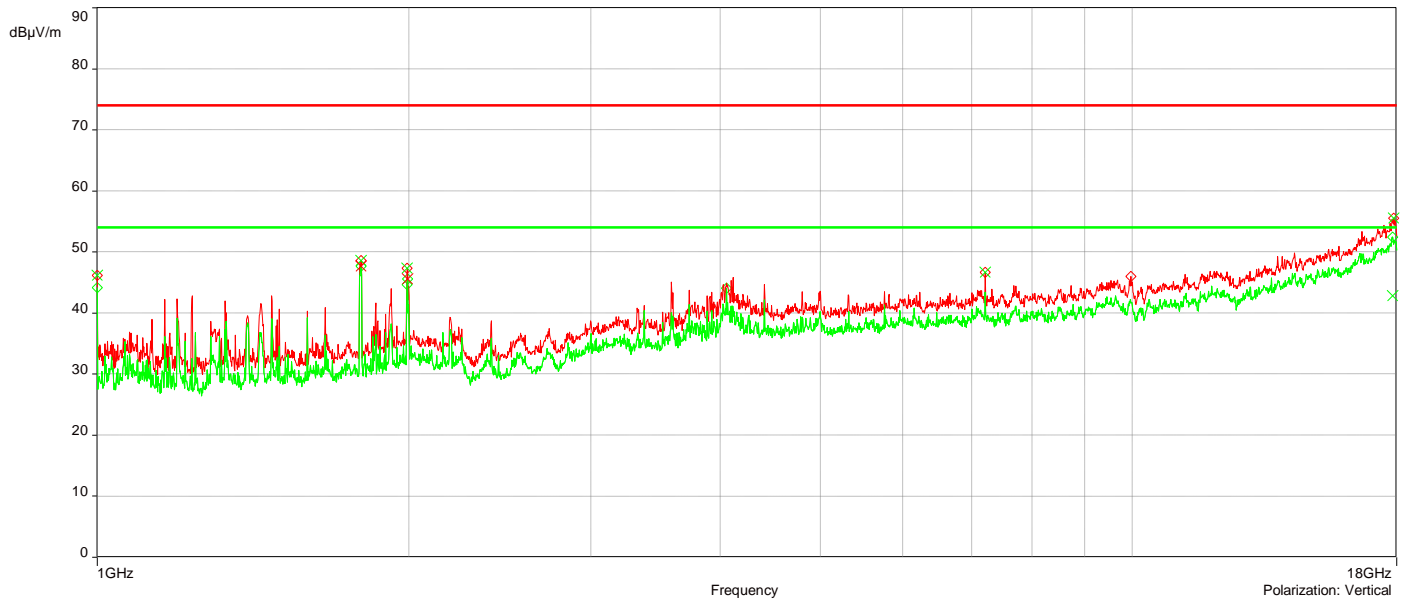




**J23133\_BT\_3-DH1\_Ch 39\_1-18GHz**


7/23/2024 6:20:29 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	4.7846113GHz	47.42	4.79	74.00	-26.58	1.00	2.70	Vertical	Passed
2.	9.6597547GHz	45.61	10.79	74.00	-28.39	1.00	333.10	Vertical	Passed
3.	17.815995GHz	55.51	21.01	74.00	-18.49	1.50	261.10	Vertical	Passed
4.	4.7996118GHz	46.69	4.94	74.00	-27.31	1.00	39.70	Horizontal	Passed
5.	17.791994GHz	54.89	20.75	74.00	-19.11	2.00	98.10	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	1.7665225GHz	21.49	-4.42	54.00	-32.51	1.00	0.00	Vertical	Passed
2.	1.7690226GHz	32.38	-4.43	54.00	-21.62	1.00	0.10	Vertical	Passed
3.	1.7995235GHz	31.24	-4.50	54.00	-22.76	1.00	357.10	Vertical	Passed
4.	17.886497GHz	43.21	21.25	54.00	-10.79	1.00	0.00	Vertical	Passed
5.	1.7995235GHz	26.60	-4.24	54.00	-27.40	1.00	359.90	Horizontal	Passed
6.	17.903497GHz	42.96	21.18	54.00	-11.04	4.00	0.00	Horizontal	Passed

Overall Graphs:

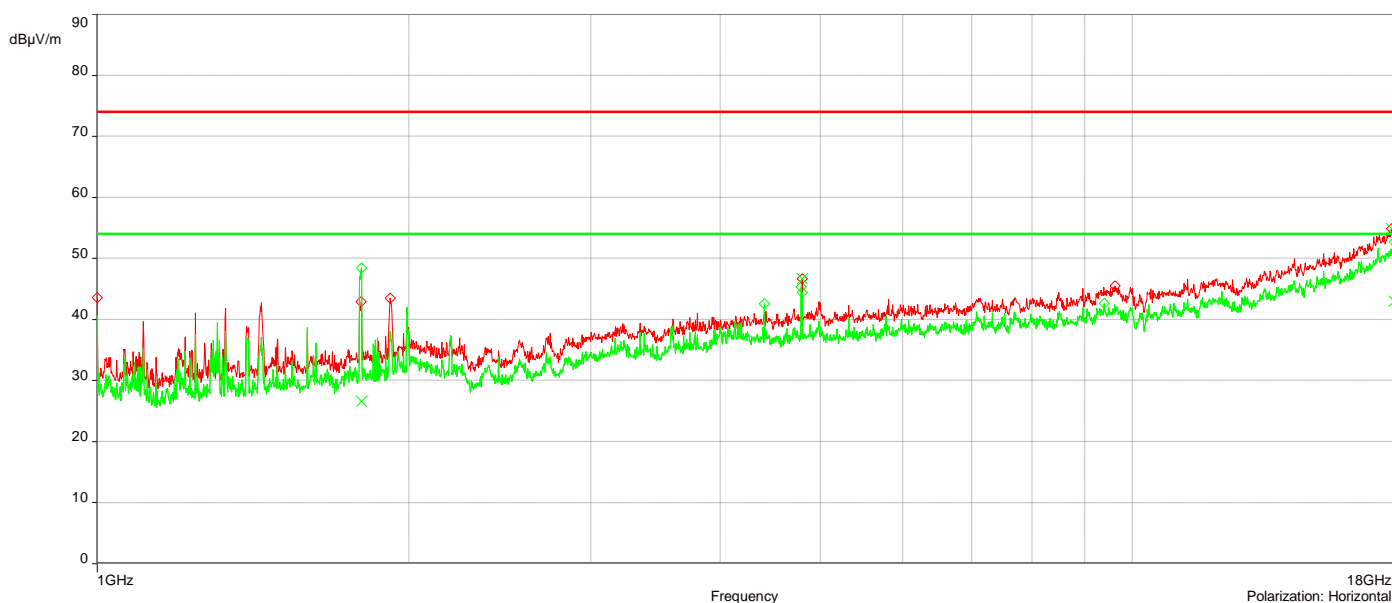

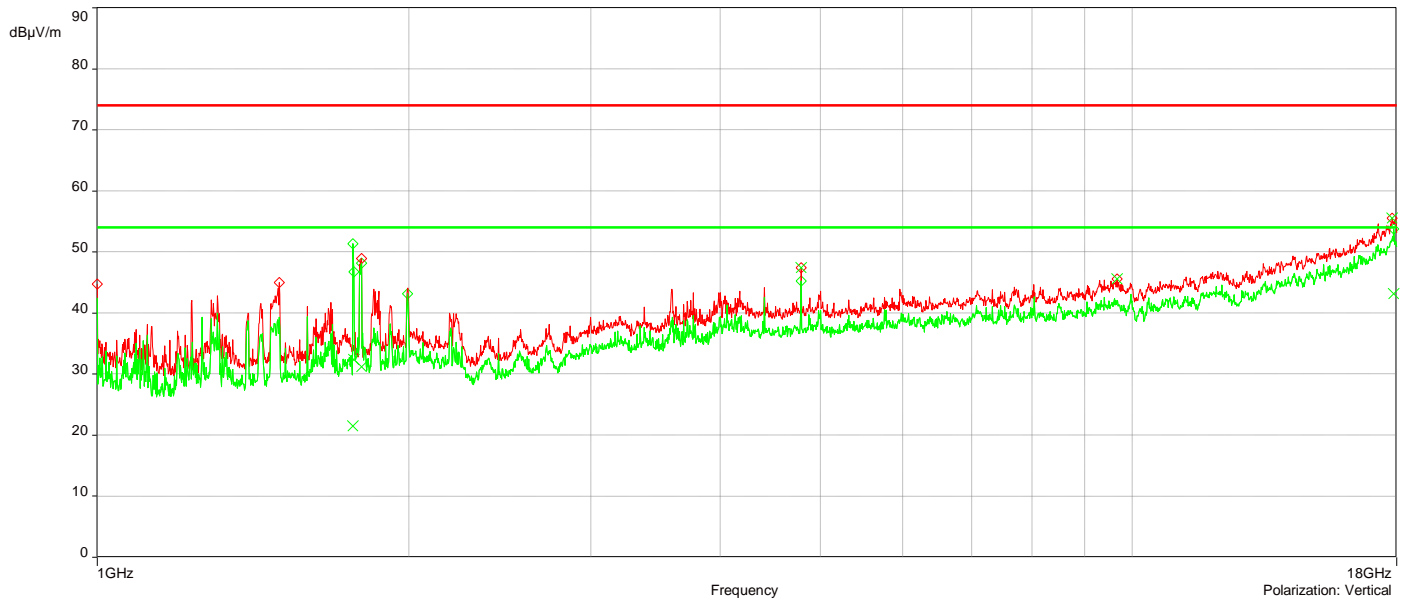


**J23133\_BT\_3-DH1\_Ch 78\_1-18GHz**


7/23/2024 5:40:41 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	1.7960234GHz	48.53	-5.04	74.00	-25.47	1.00	335.70	Vertical	Passed
2.	4.7821112GHz	46.21	4.60	74.00	-27.79	2.00	359.90	Vertical	Passed
3.	7.4396894GHz	47.92	7.63	74.00	-26.08	1.00	81.30	Vertical	Passed
4.	9.5072502GHz	45.81	9.50	74.00	-28.19	1.00	3.60	Vertical	Passed
5.	17.9965GHz	55.38	21.47	74.00	-18.62	1.00	270.70	Vertical	Passed
6.	17.943498GHz	54.46	20.39	74.00	-19.54	3.00	104.90	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	1.7995235GHz	47.88	-5.02	54.00	-6.12	1.00	335.70	Vertical	Passed
2.	7.4396894GHz	46.33	7.63	54.00	-7.67	1.00	81.30	Vertical	Passed
3.	17.642989GHz	51.61	20.16	54.00	-2.39	1.50	132.10	Vertical	Passed
4.	1.7995235GHz	48.15	-4.75	54.00	-5.85	1.00	0.10	Horizontal	Passed
5.	7.4396894GHz	46.35	7.64	54.00	-7.65	1.00	0.10	Horizontal	Passed
6.	17.736992GHz	51.48	20.05	54.00	-2.52	1.50	359.90	Horizontal	Passed

Overall Graphs:

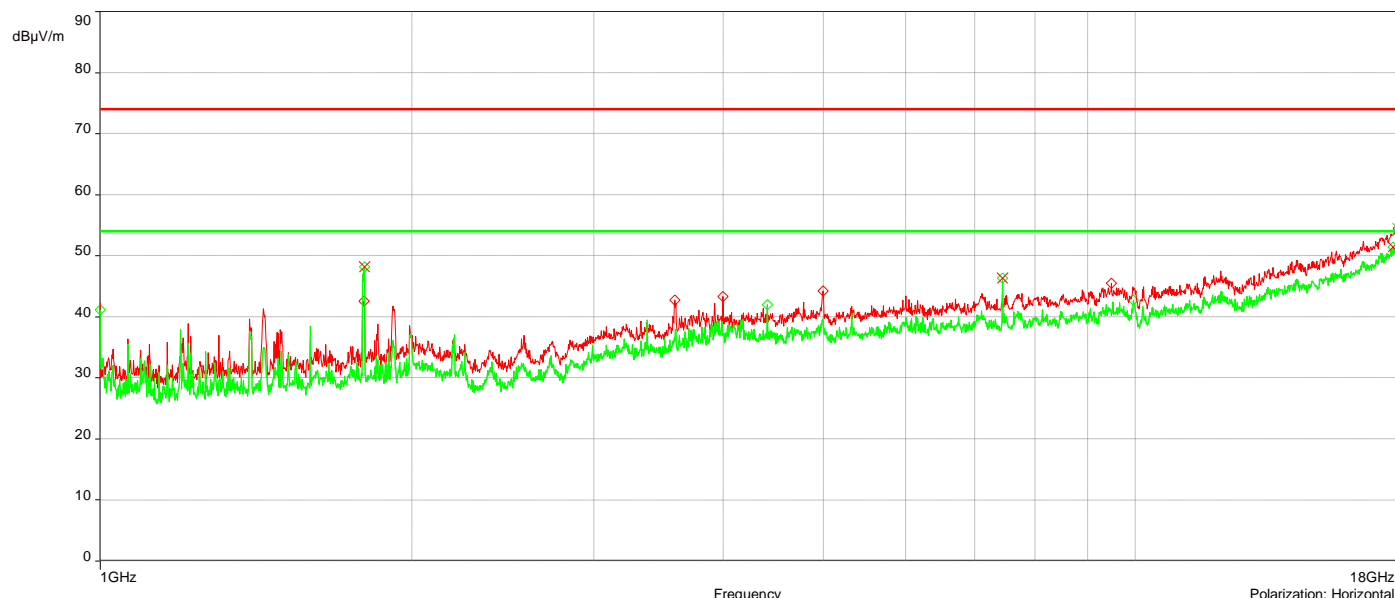

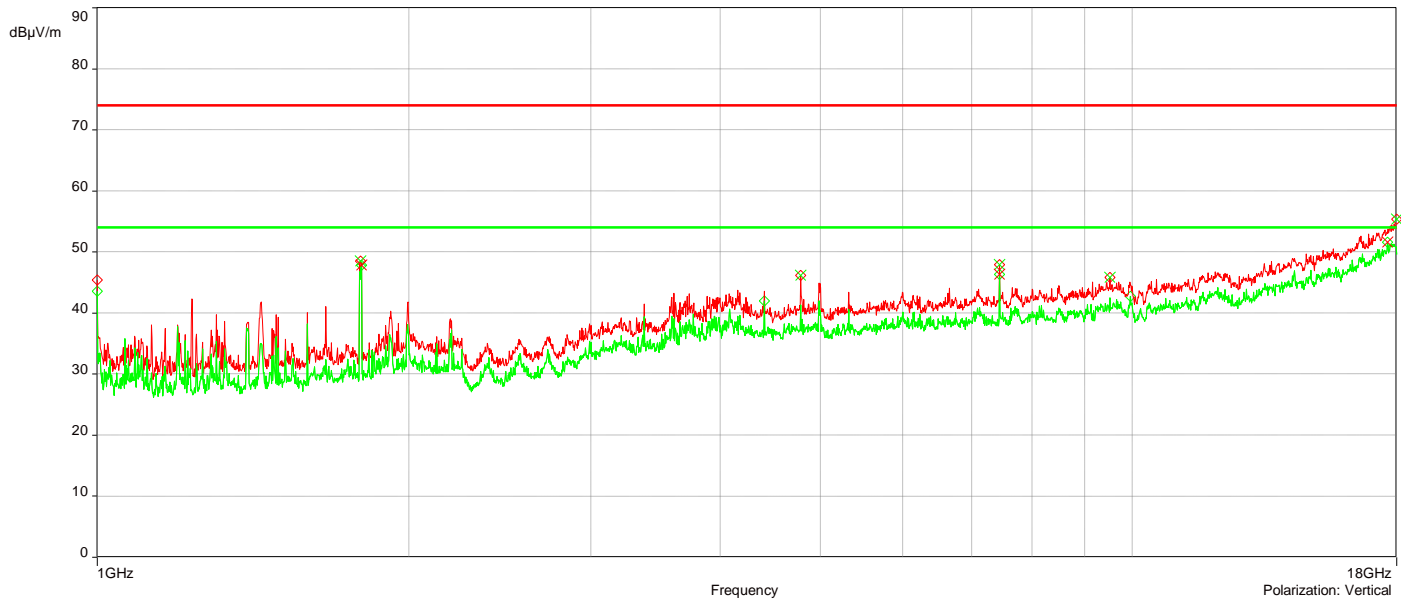


**J23133\_BT\_DH1\_Ch 0\_18-27.5GHz**


7/30/2024 4:02:41 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	26.671559GHz	49.31	1.28	74.00	-24.69	1.53	134.90	Vertical	Passed
2.	26.694835GHz	48.38	1.26	74.00	-25.62	2.18	112.40	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	26.723336GHz	46.09	1.47	54.00	-7.91	2.47	112.40	Vertical	Passed
2.	26.423596GHz	45.62	1.40	54.00	-8.38	2.34	0.10	Horizontal	Passed

Overall Graphs:

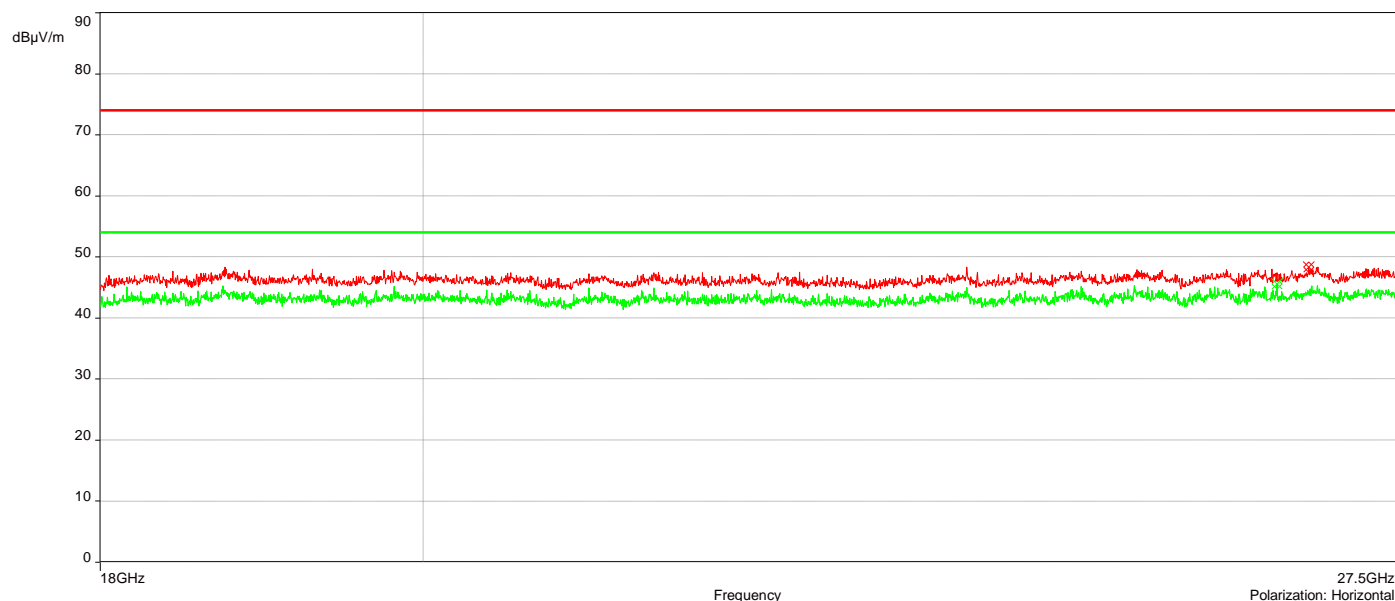

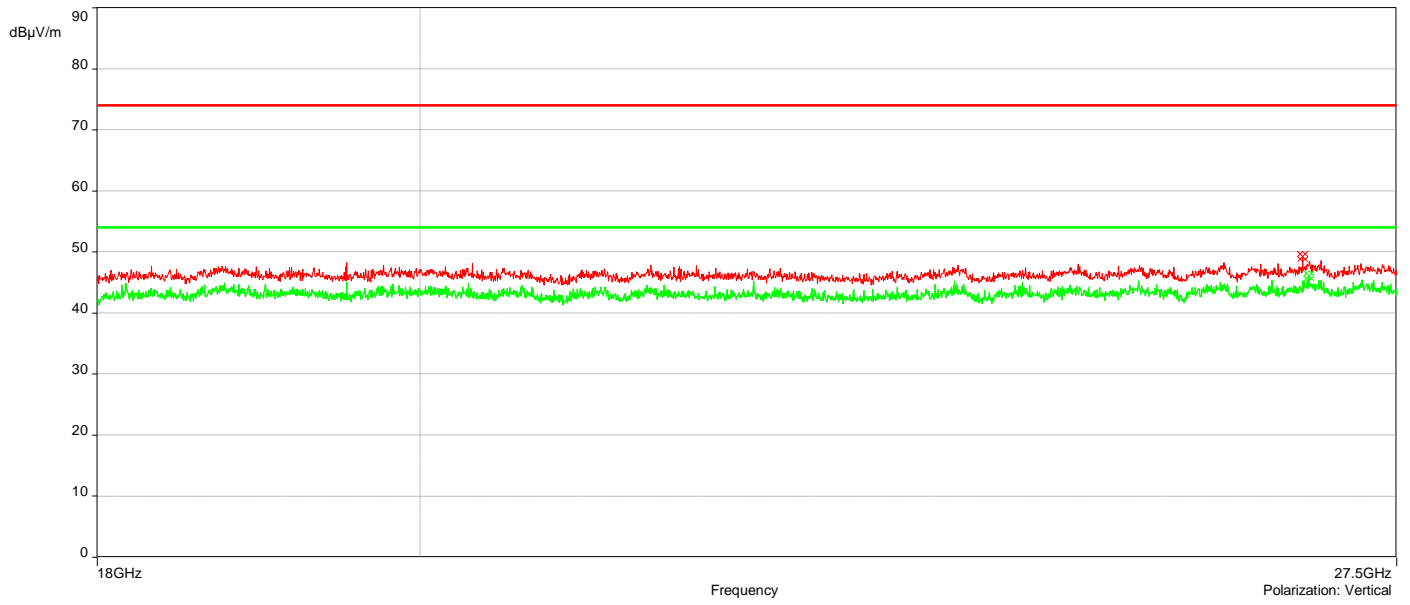


**J23133\_BT\_3-DH1\_Ch 0\_18-27.5GHz**


7/30/2024 4:24:34 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	26.675834GHz	48.97	1.27	74.00	-25.03	2.07	247.60	Vertical	Passed
2.	24.661733GHz	48.76	1.20	74.00	-25.24	1.03	270.10	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	26.568003GHz	45.73	1.83	54.00	-8.27	2.74	0.20	Vertical	Passed
2.	27.211661GHz	46.00	1.06	54.00	-8.00	1.15	0.20	Horizontal	Passed

Overall Graphs:

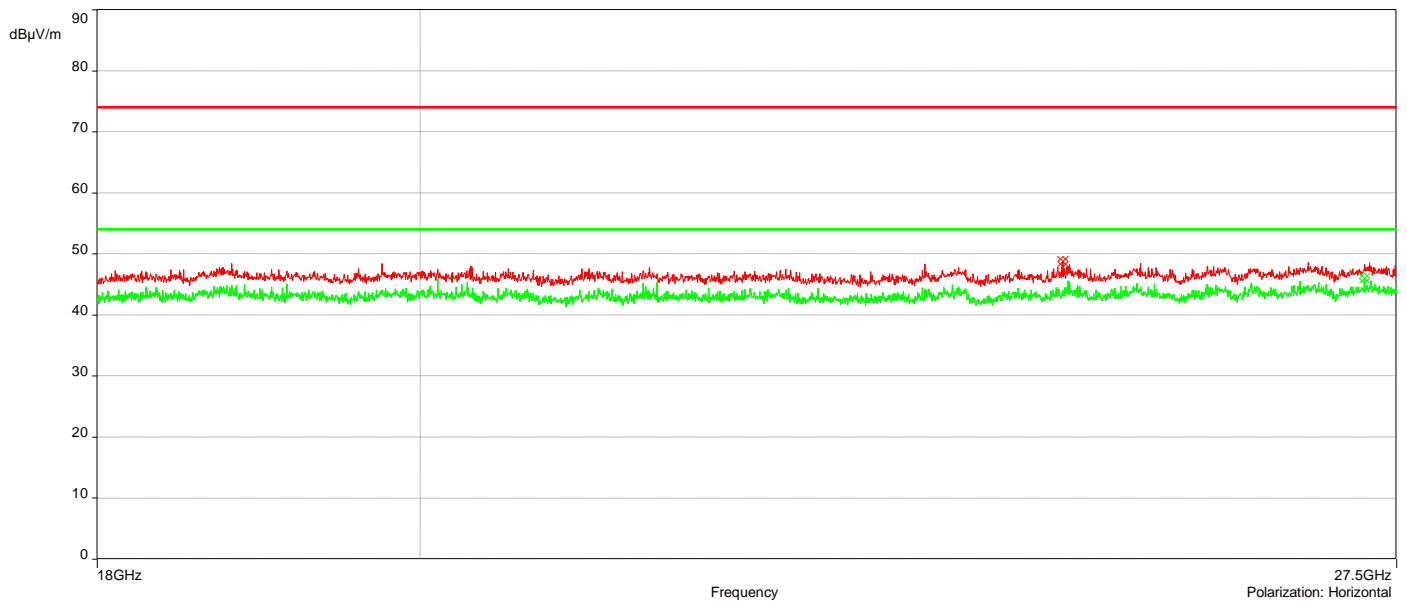

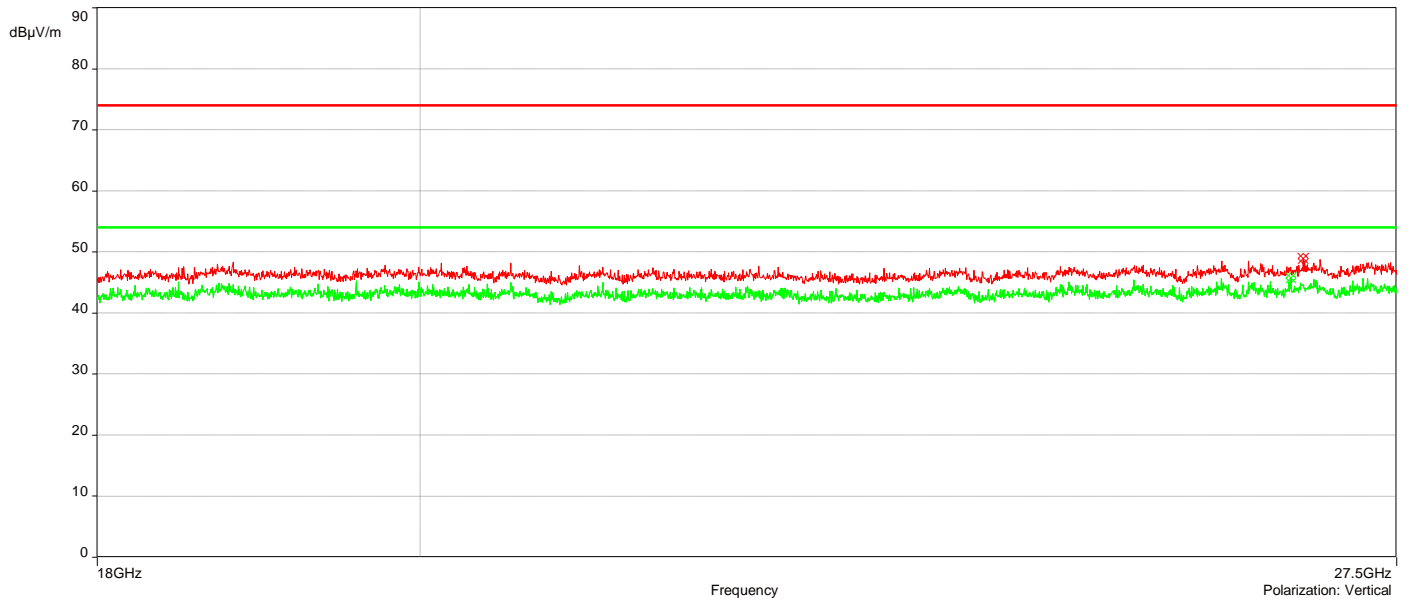




**J23133\_Restricted Bandedge\_BT Classic\_DH1\_Ch 0**

7/23/2024 3:35:10 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.3724462GHz	43.98	-2.39	74.00	-30.02	4.00	269.10	Vertical	Passed
2.	2.494012GHz	44.27	-1.84	74.00	-29.73	2.83	44.00	Vertical	Passed
3.	2.3807154GHz	43.49	-2.47	74.00	-30.51	3.51	89.10	Horizontal	Passed
4.	2.4942021GHz	44.36	-1.82	74.00	-29.64	3.40	156.50	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	2.3724462GHz	43.03	-2.39	54.00	-10.97	4.00	269.10	Vertical	Passed
2.	2.4837469GHz	42.98	-1.87	54.00	-11.02	3.73	179.10	Vertical	Passed
3.	2.3807154GHz	42.23	-2.47	54.00	-11.77	3.51	89.10	Horizontal	Passed
4.	2.4948674GHz	42.74	-1.82	54.00	-11.26	2.85	156.50	Horizontal	Passed

Overall Graphs:

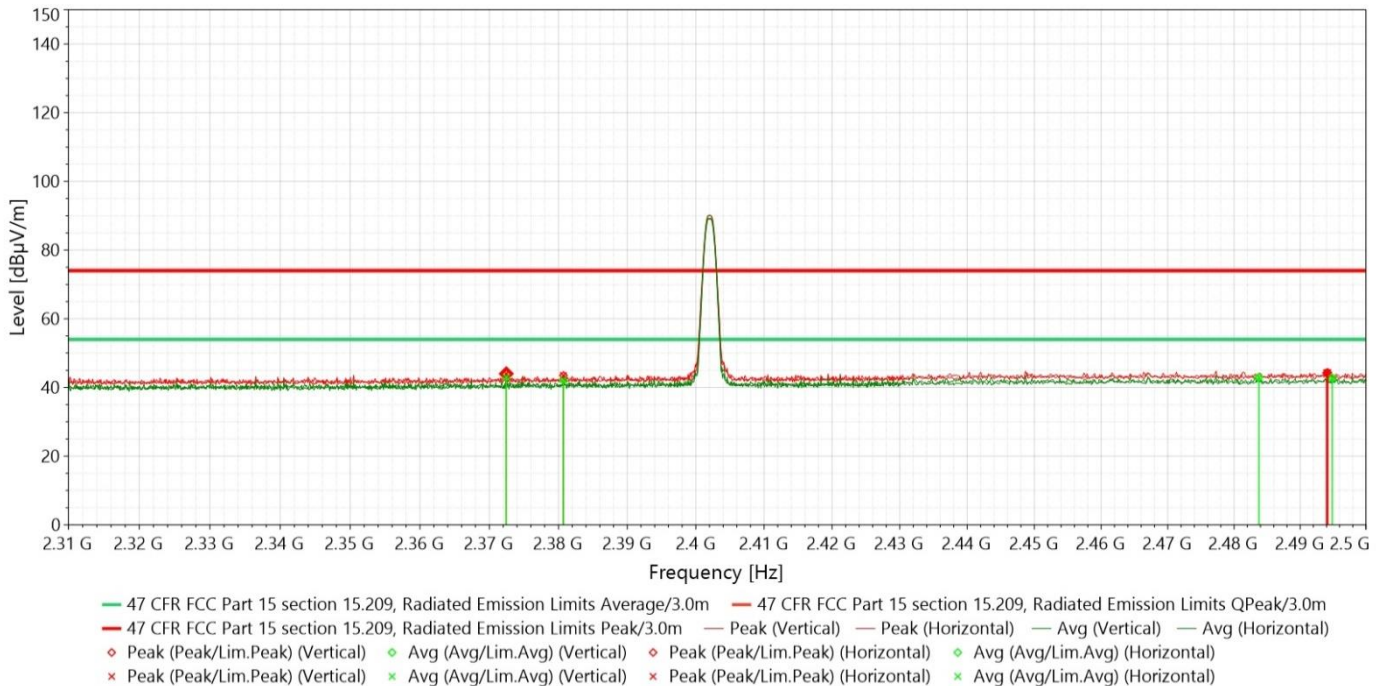


**J23133\_Restricted Bandedge\_BT Classic\_DH1\_Ch 78**

7/23/2024 4:04:37 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.3897449GHz	43.76	-2.31	74.00	-30.24	3.64	0.10	Vertical	Passed
2.	2.4998099GHz	48.27	-1.84	74.00	-25.73	2.21	22.40	Vertical	Passed
3.	2.3829965GHz	43.50	-2.44	74.00	-30.50	2.56	157.40	Horizontal	Passed
4.	2.4970535GHz	45.68	-1.82	74.00	-28.32	1.03	157.40	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	2.3897449GHz	42.66	-2.31	54.00	-11.34	3.64	0.10	Vertical	Passed
2.	2.4998099GHz	47.71	-1.84	54.00	-6.29	2.21	22.40	Vertical	Passed
3.	2.389935GHz	41.92	-2.37	54.00	-12.08	2.10	112.40	Horizontal	Passed
4.	2.4909705GHz	44.10	-1.81	54.00	-9.90	1.29	22.40	Horizontal	Passed

Overall Graphs:

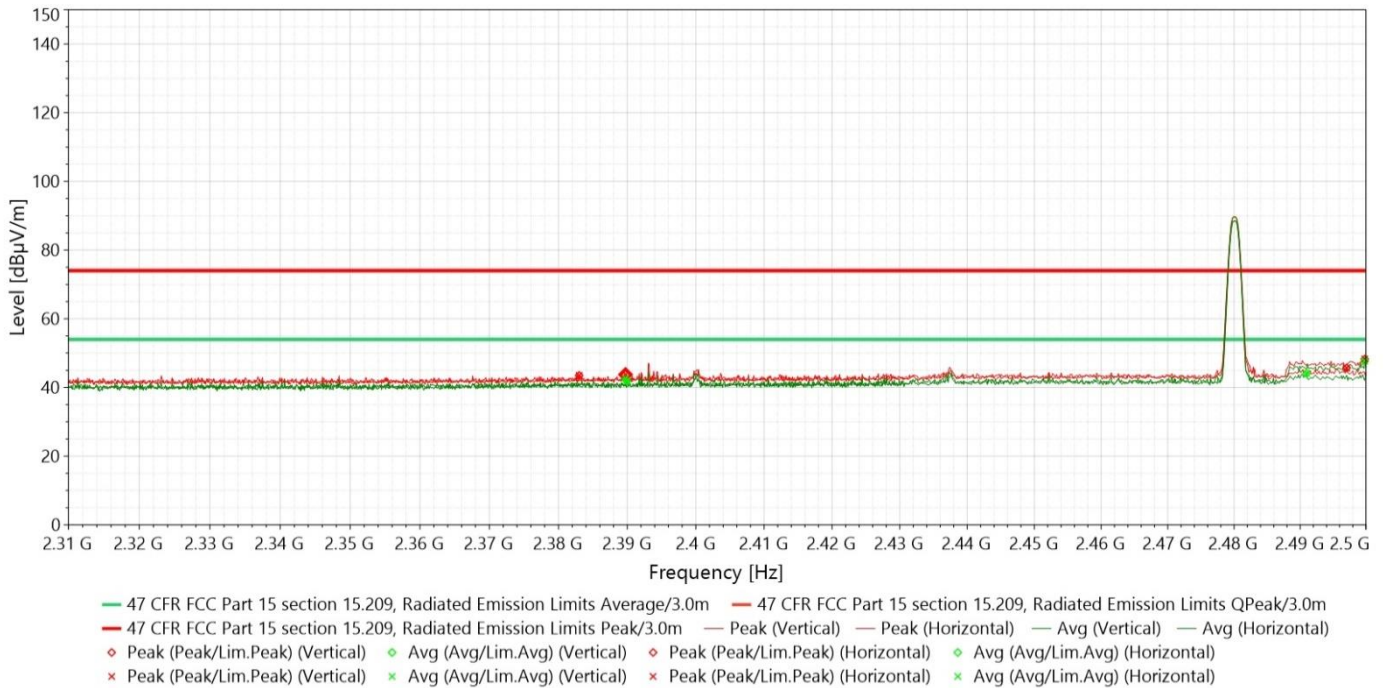


**J23133\_Restricted Bandedge\_BT Classic\_3-DH1\_Ch 0**

7/23/2024 4:46:20 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.3889845GHz	49.09	-2.31	74.00	-24.91	1.18	66.60	Vertical	Passed
2.	2.499905GHz	47.07	-1.84	74.00	-26.93	3.05	156.60	Vertical	Passed
3.	2.3782441GHz	43.84	-2.49	74.00	-30.16	3.92	336.60	Horizontal	Passed
4.	2.4978139GHz	45.63	-1.82	74.00	-28.37	3.52	44.10	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	2.3889845GHz	48.17	-2.31	54.00	-5.83	1.18	66.60	Vertical	Passed
2.	2.4909705GHz	46.03	-1.83	54.00	-7.97	3.14	156.60	Vertical	Passed
3.	2.3772936GHz	42.66	-2.50	54.00	-11.34	4.00	21.70	Horizontal	Passed
4.	2.4932516GHz	44.43	-1.81	54.00	-9.57	1.67	66.60	Horizontal	Passed

Overall Graphs:

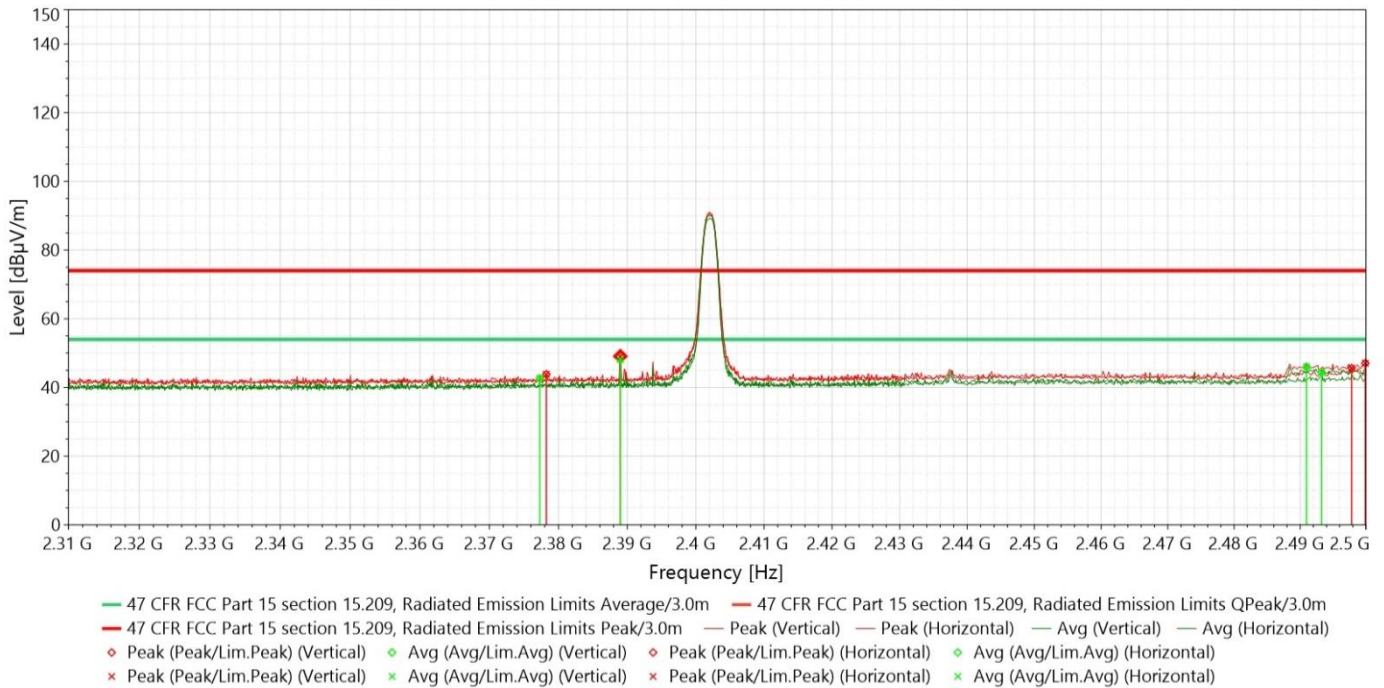


**J23133\_Restricted Bandedge\_BT Classic\_3-DH1\_Ch 78**

7/23/2024 5:08:14 PM

No	Frequency (MHz)	Level Peak Reading (dBµV/m)	Correction Factor (dB)	Limit dBµV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.3886043GHz	45.79	-2.31	74.00	-28.21	1.03	134.90	Vertical	Passed
2.	2.4931566GHz	46.97	-1.84	74.00	-27.03	2.67	202.40	Vertical	Passed
3.	2.3868934GHz	43.86	-2.40	74.00	-30.14	1.02	112.40	Horizontal	Passed
4.	2.4889745GHz	45.31	-1.80	74.00	-28.69	3.97	269.90	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBµV/m)	Correction Factor (dB)	Limit dBµV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	2.3696898GHz	42.20	-2.42	54.00	-11.80	1.47	224.90	Vertical	Passed
2.	2.4971486GHz	45.82	-1.85	54.00	-8.18	2.21	89.90	Vertical	Passed
3.	2.3814757GHz	42.38	-2.46	54.00	-11.62	1.02	22.40	Horizontal	Passed
4.	2.4885943GHz	43.88	-1.80	54.00	-10.12	1.39	67.40	Horizontal	Passed

Overall Graphs:

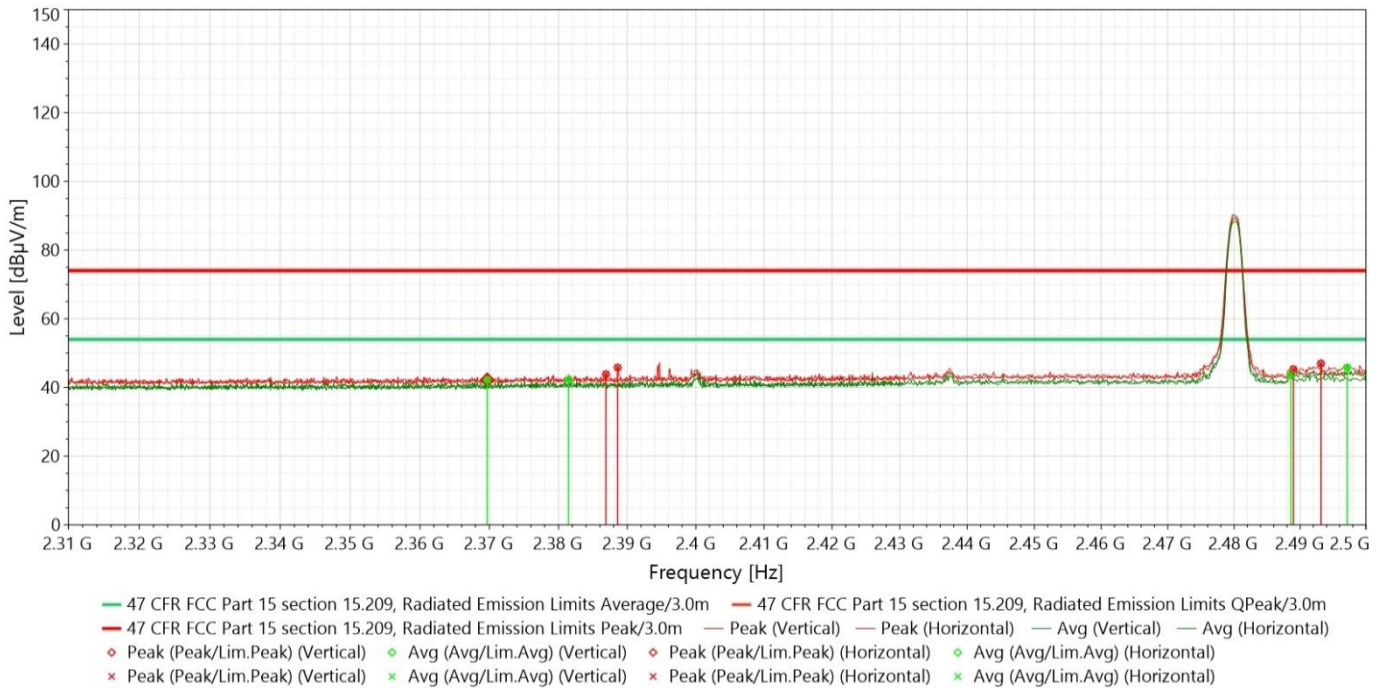

## Document Revisions

Version	Date	Modifier	Changes
1.0	10/23/2024	Aravind Buddana	<ul style="list-style-type: none"><li>• Initial Release</li></ul>
2.0	01/24/2025	Aravind Buddana	<ul style="list-style-type: none"><li>• Updated Section 1 and Section 4.1 with RSS-247 Issue version.</li><li>• Updated Section 1 with EUT FVIN Information</li><li>• Updated Section 4.4.3 Limits of 3-DH1 of carrier frequency separation.</li></ul>

**End of Report**