



## Inner Casting 2 – Side 1




## Inner Casting 2 – Side 2

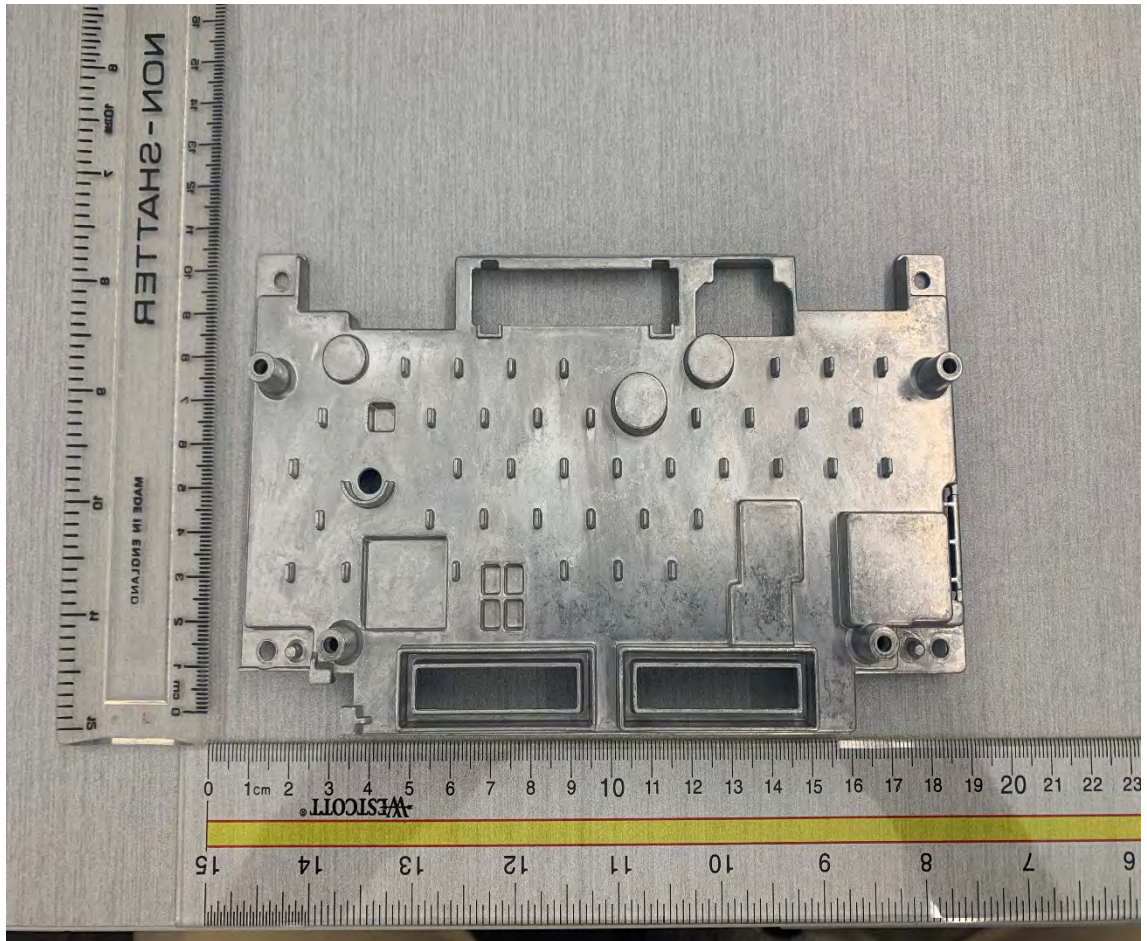

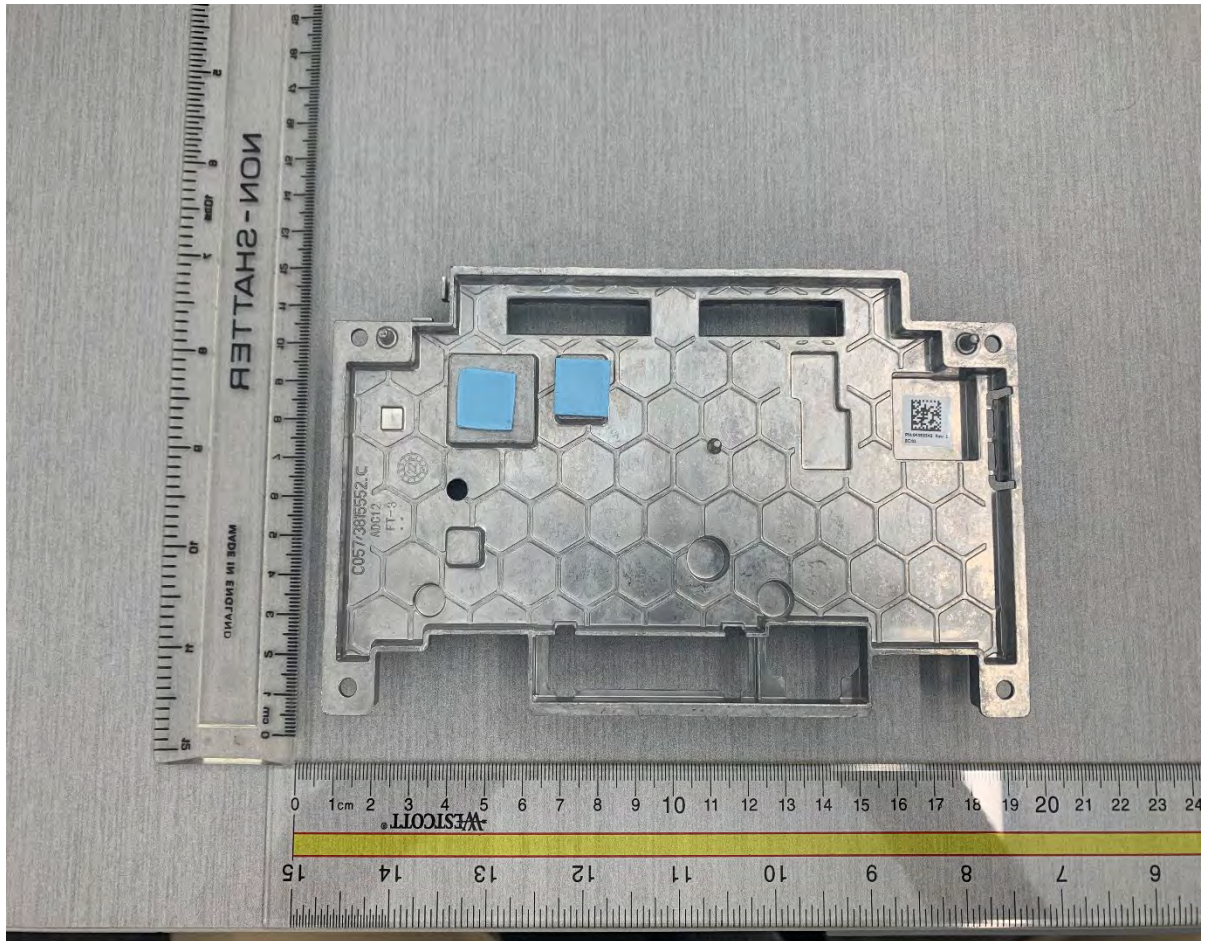

## Back Board – Side 1 (3B MID)

ULF connector:  
2.4 GHz WLAN input to  
the Main PCBA Antenna  
(Please go to the page  
21)

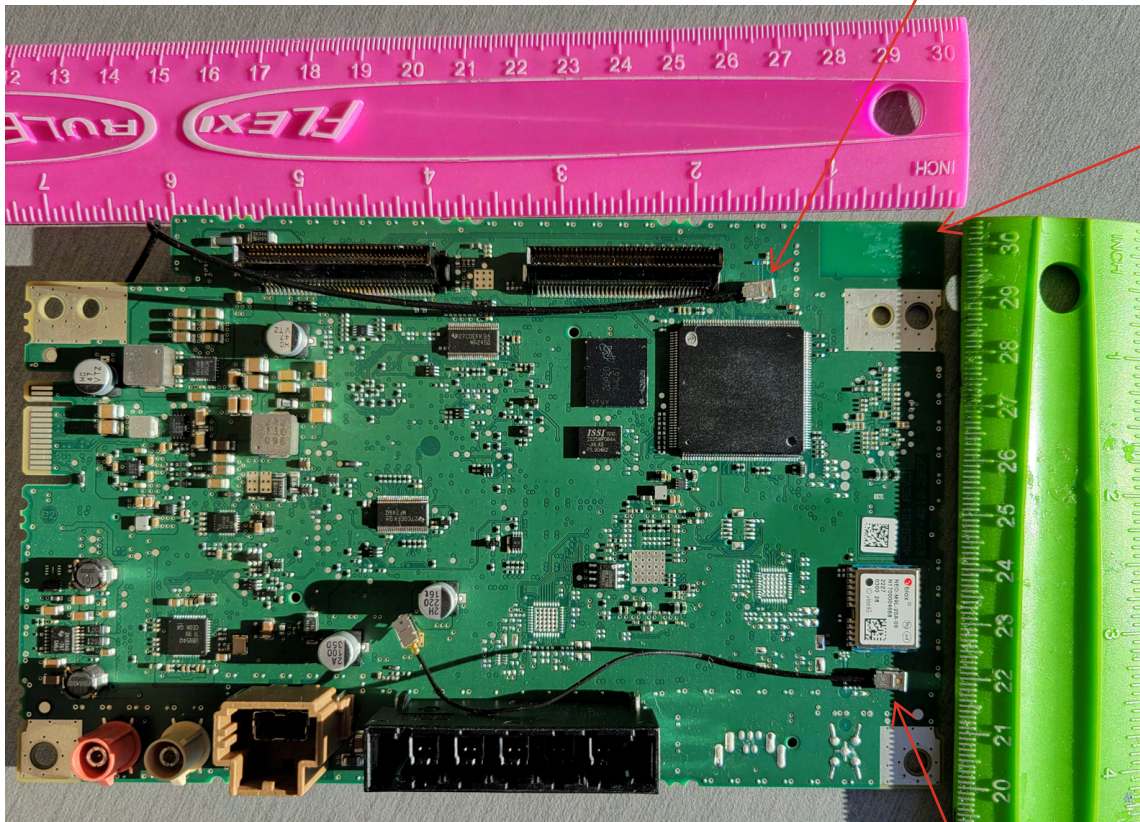

HW capabilities

Main PCBA  
Antenna  
WLAN  
2.4 GHz / 5  
GHz

Supported  
SW configuration

Main PCBA  
Antenna  
WLAN  
2.4 GHz

ULF connector:  
Is to connect the GPS  
Ublox IC to GNSS/GPS  
module. This connexion is  
not used for NA  
variants. (Please go  
to page 9)

## Back Board – Side 1 (2B HIGH)






### Back Board – Side 2 (3B MID)




Back Board – Side 2 (2B HIGH)

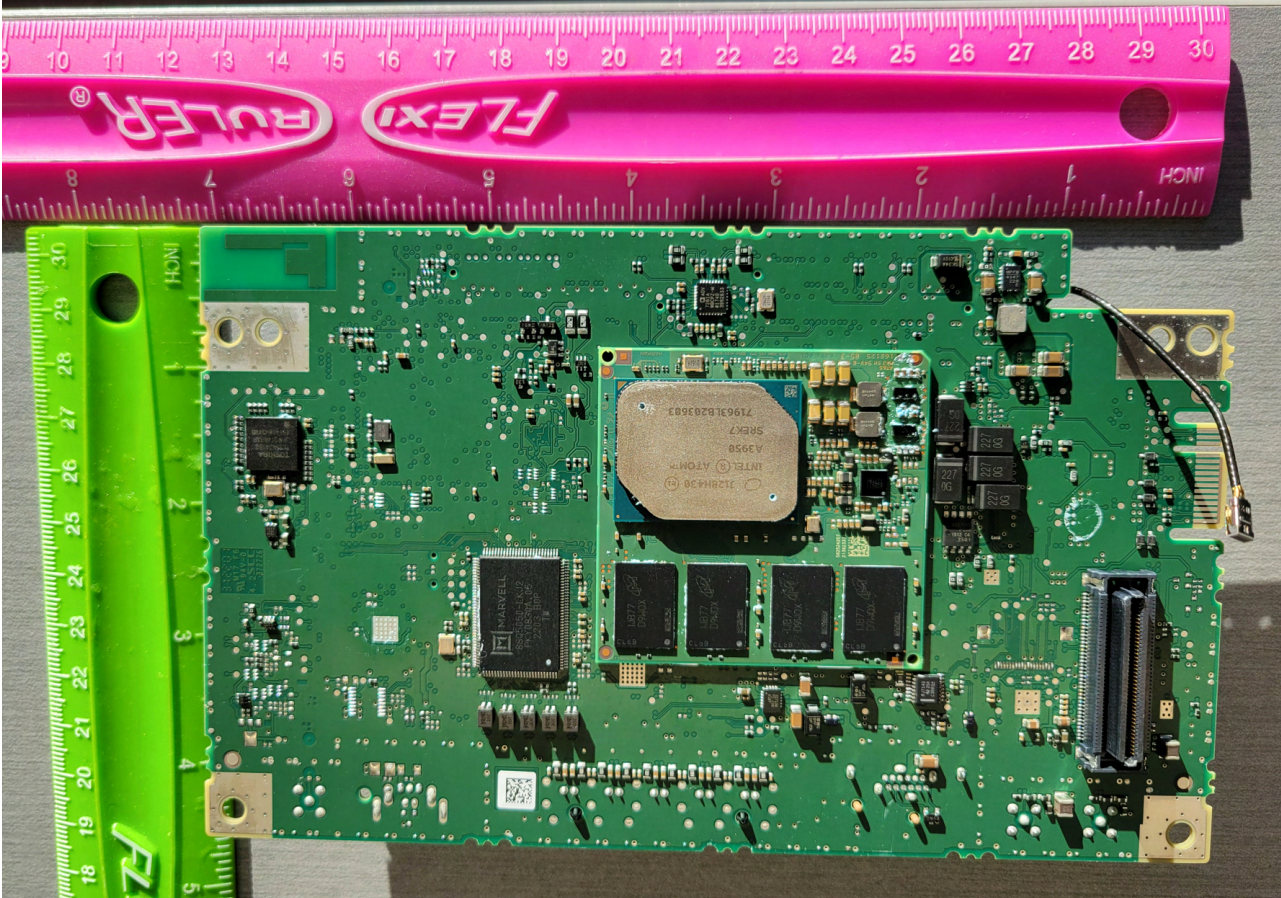




## Front Board – Side 1

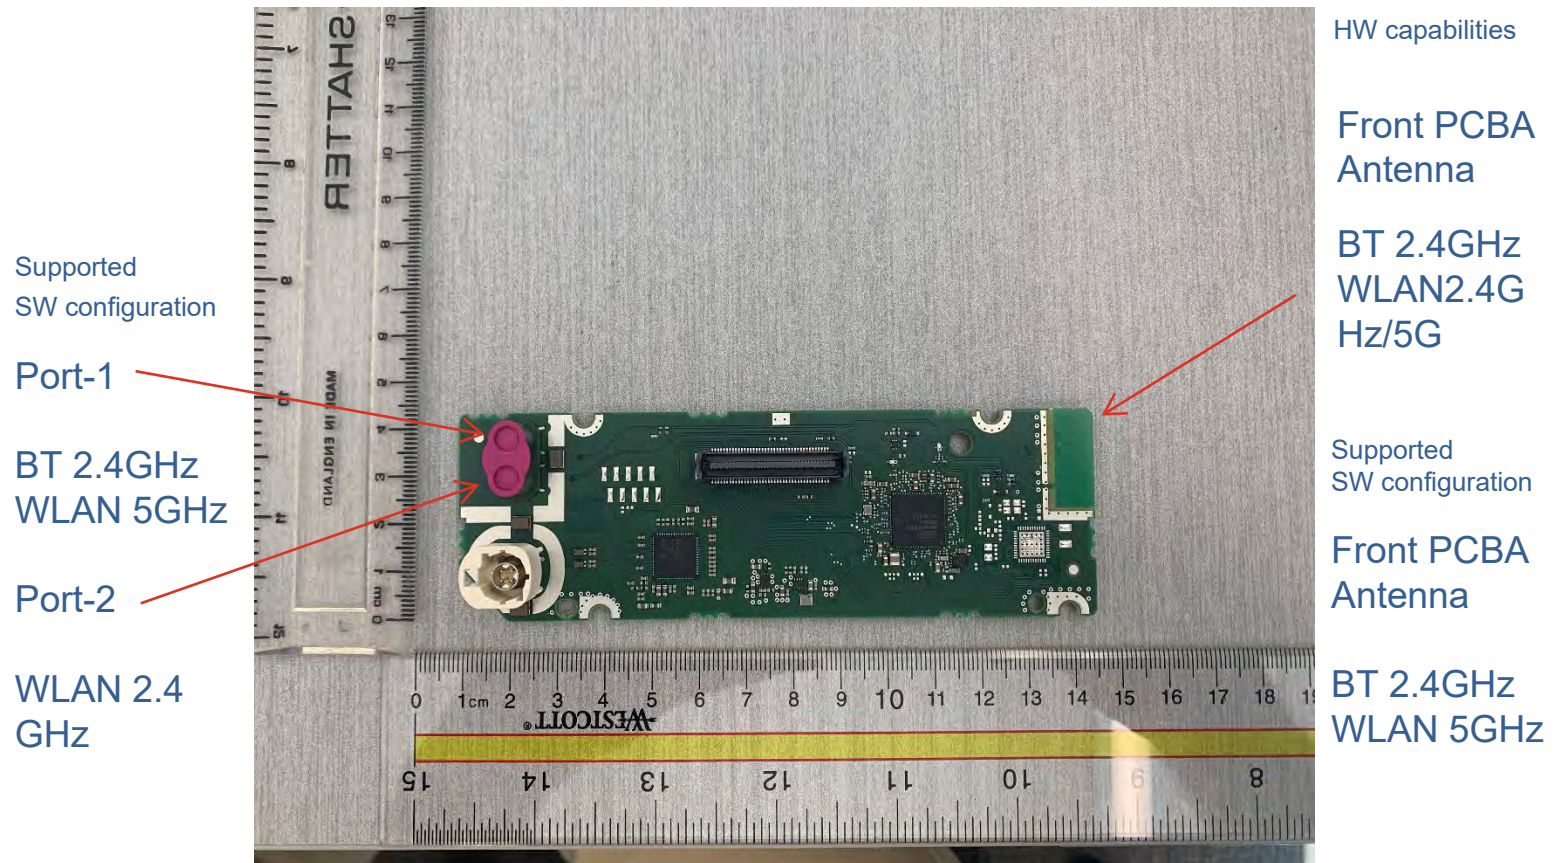


## Front Board – Side 2

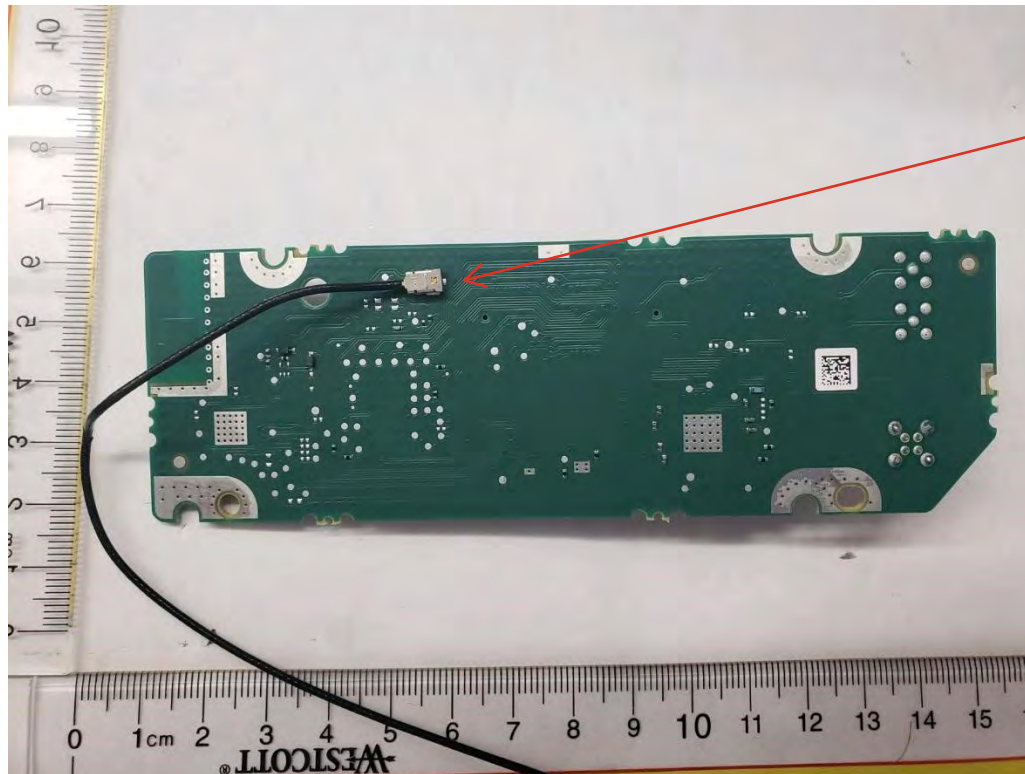

ULF connector:  
2.4 GHz WLAN output to  
the Main PCBA Antenna  
(Please go to the page  
16)



## Bottom Casting – Side 1

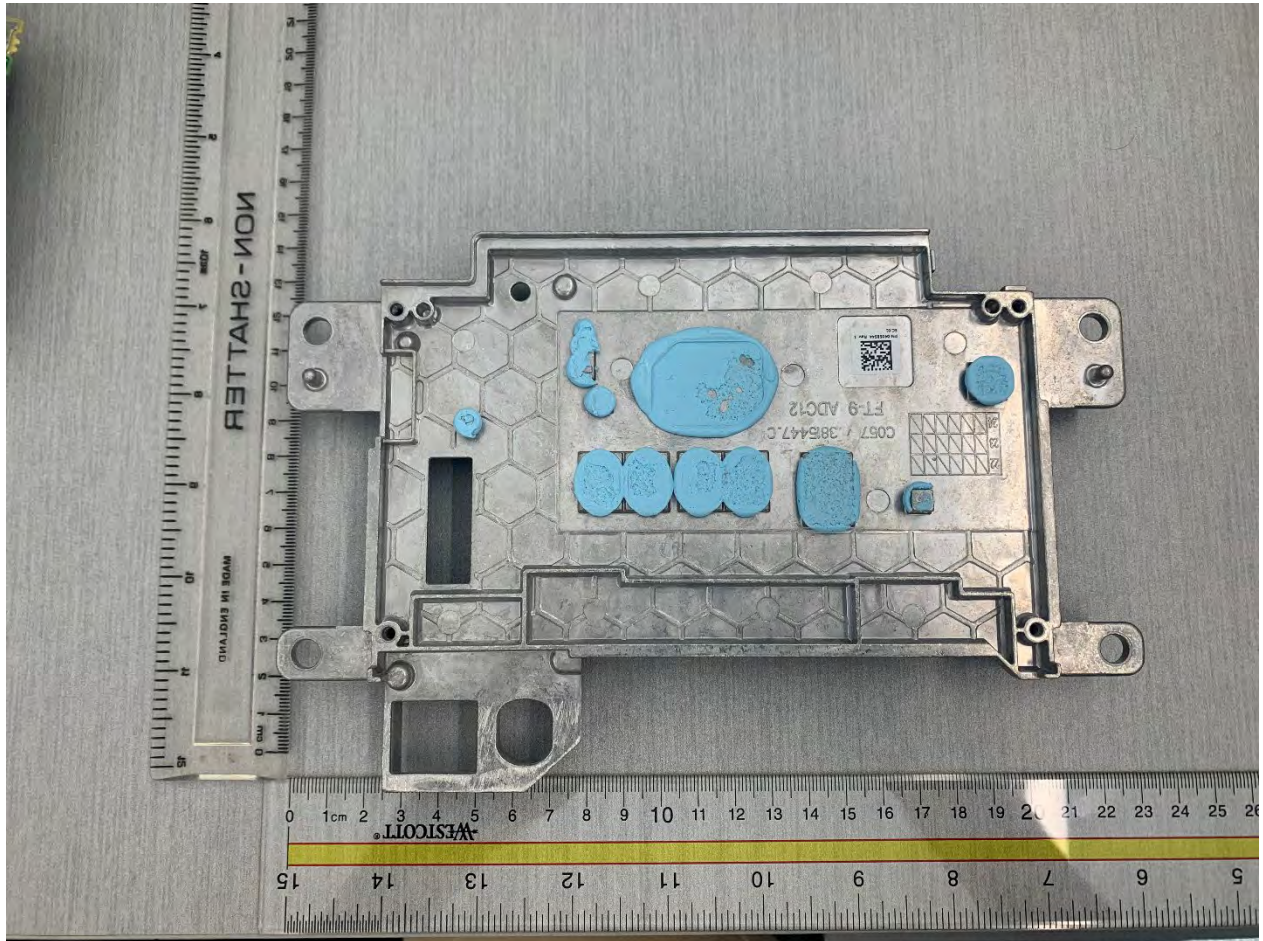

## Bottom Casting – Side 2

