



Model: R1 INT NA 2B HW4

Internal Photos

23 January 2025

Revision 0

Harman International Industries, Inc. 30001

Cabot Drive

Novi, MI 48377

U.S.A.


Table of Contents

Revision History	3
Top Casting – Side 1	4
Top Casting – Side 2	5
Front Plate – Side 1.	6
Front Plate – Side 2	7
Main PCB – Side 1.....	8
Main PCB – Side 2	10
Inner Casting 1 – Side 1	12
Inner Casting 1 – Side 2	13
Inner Casting 2 – Side 1	14
Inner Casting 2 – Side 2	15
Back Board – Side 1	16
Back Board – Side 2	18
Front Board– Side 1	20
Front Board – Side 2	21
Bottom Casting – Side 1	22
Bottom Casting – Side 2	23


Revision History

Revision	Date	Description
0	23 JAN 2025	Initial release.


Top Casting – Side 2

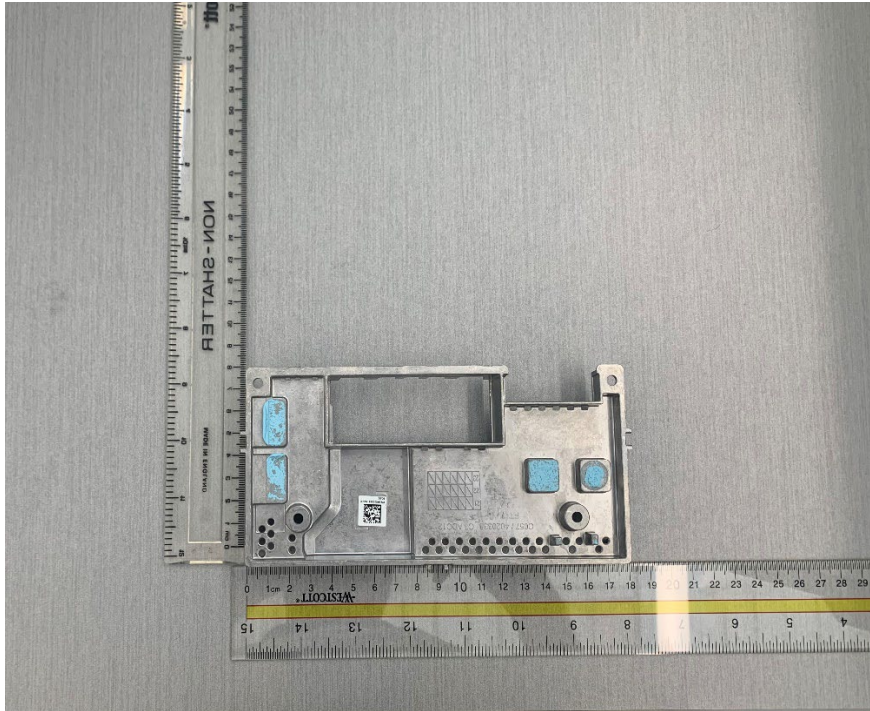


Front Plate – Side 1

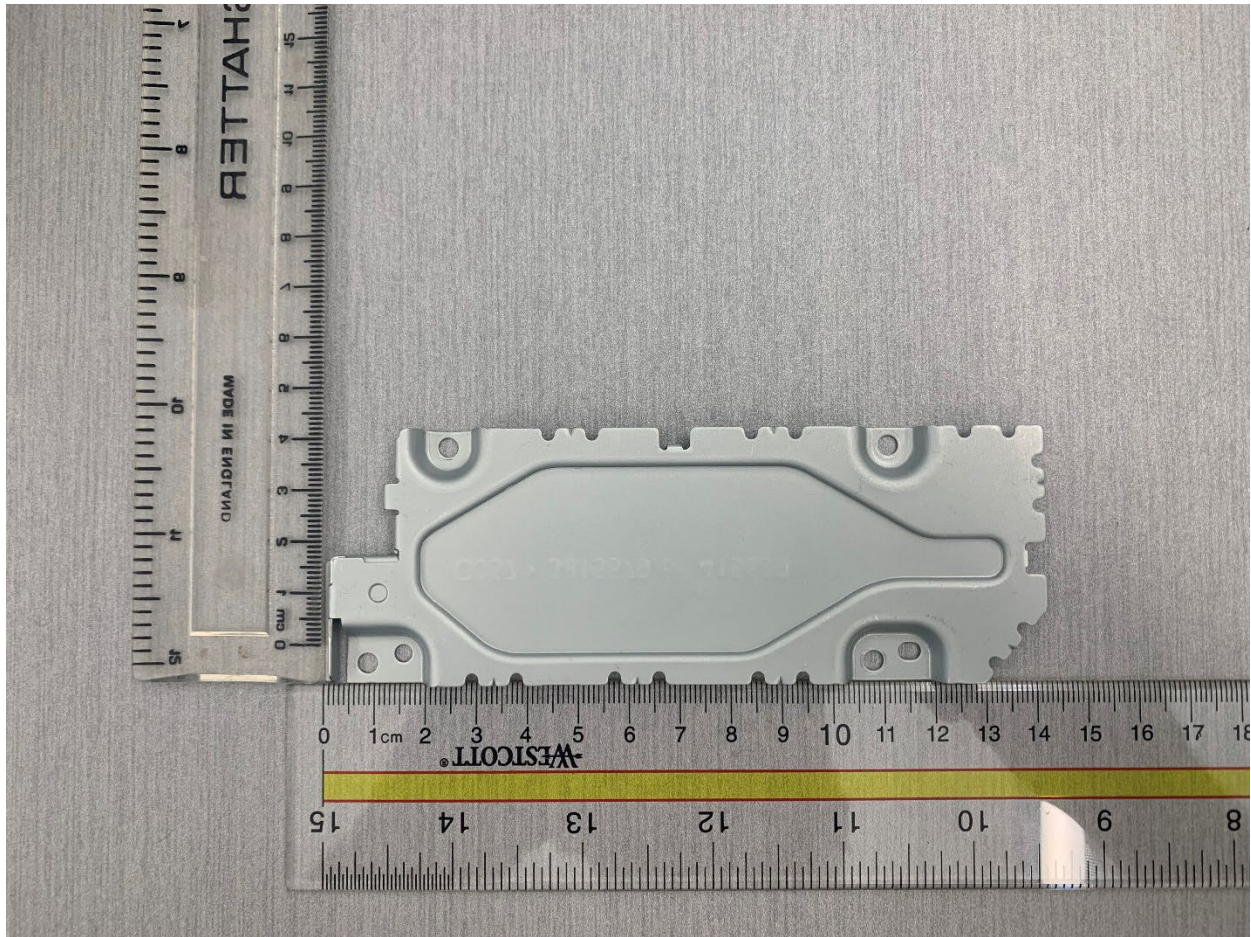


Front Plate – Side 2

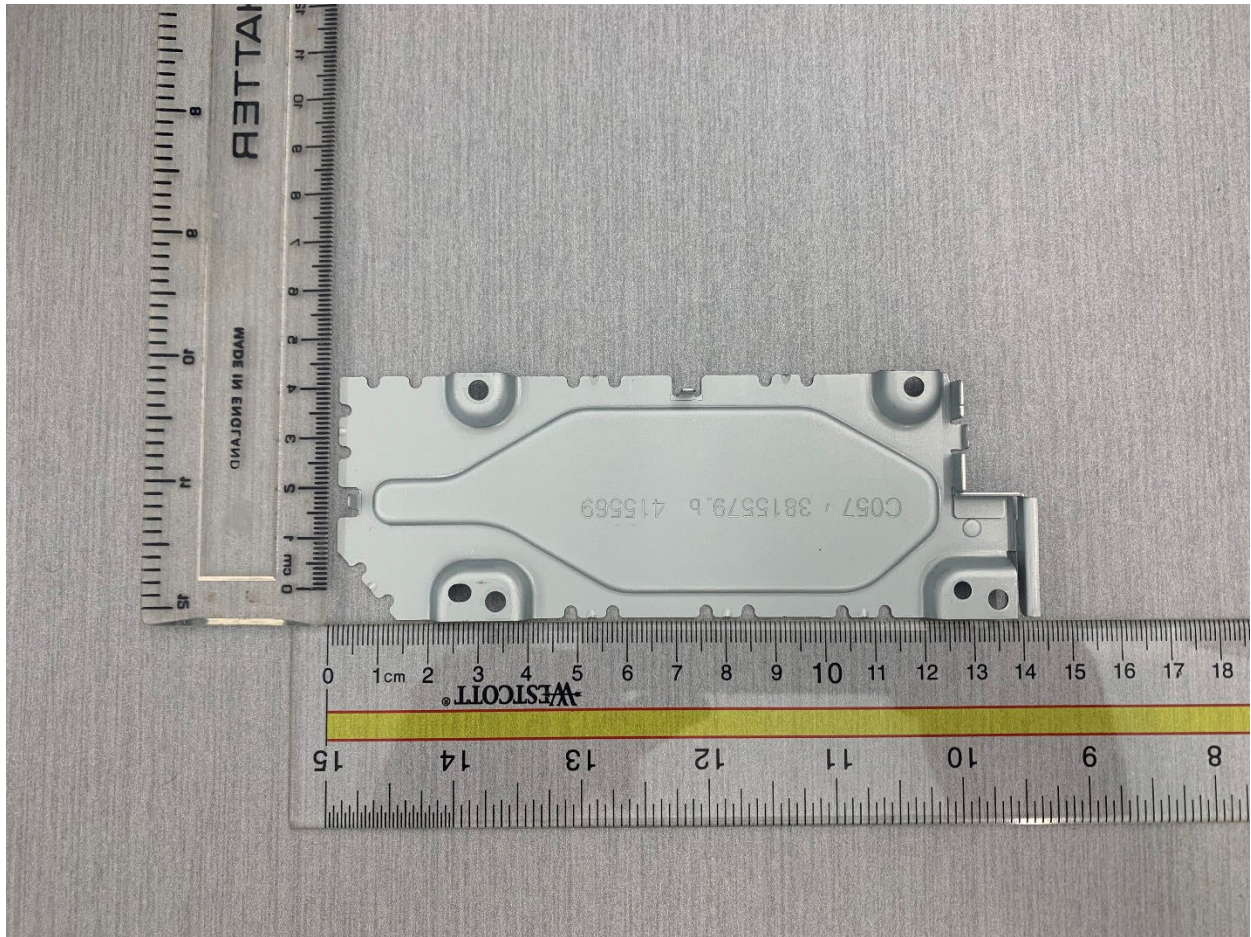

Main PCB – Side 1 (3B MID)

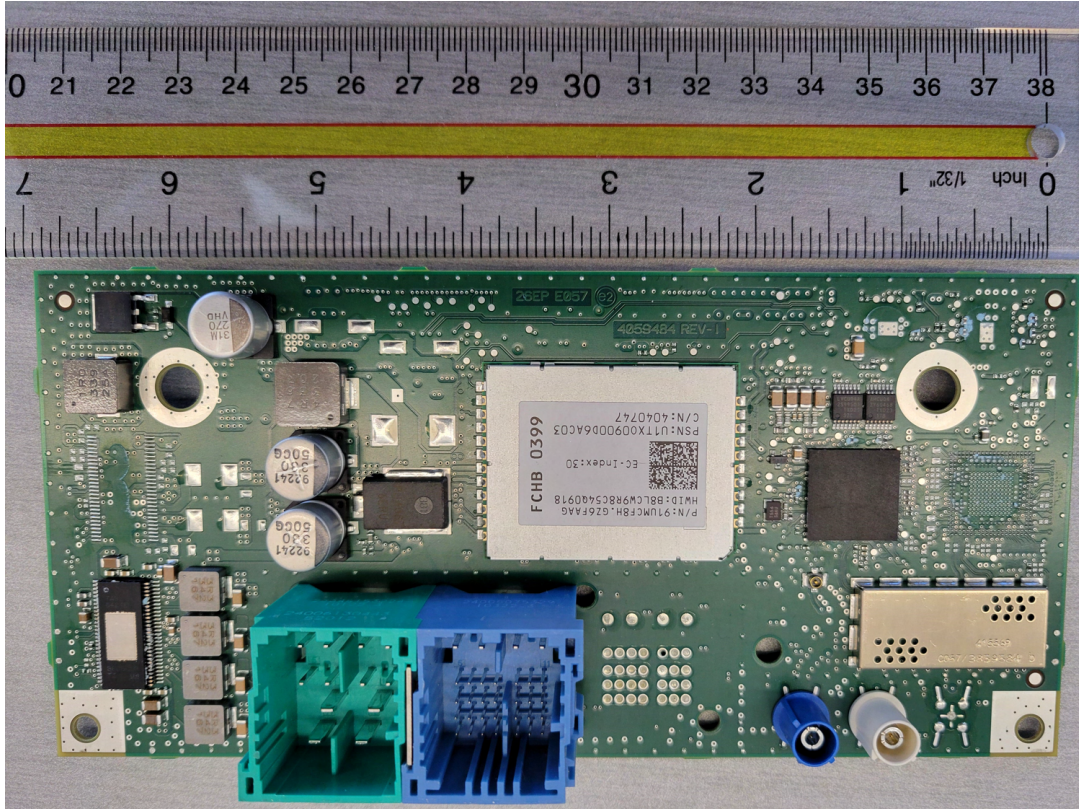

Main PCB – Side 1 (2B HIGH)

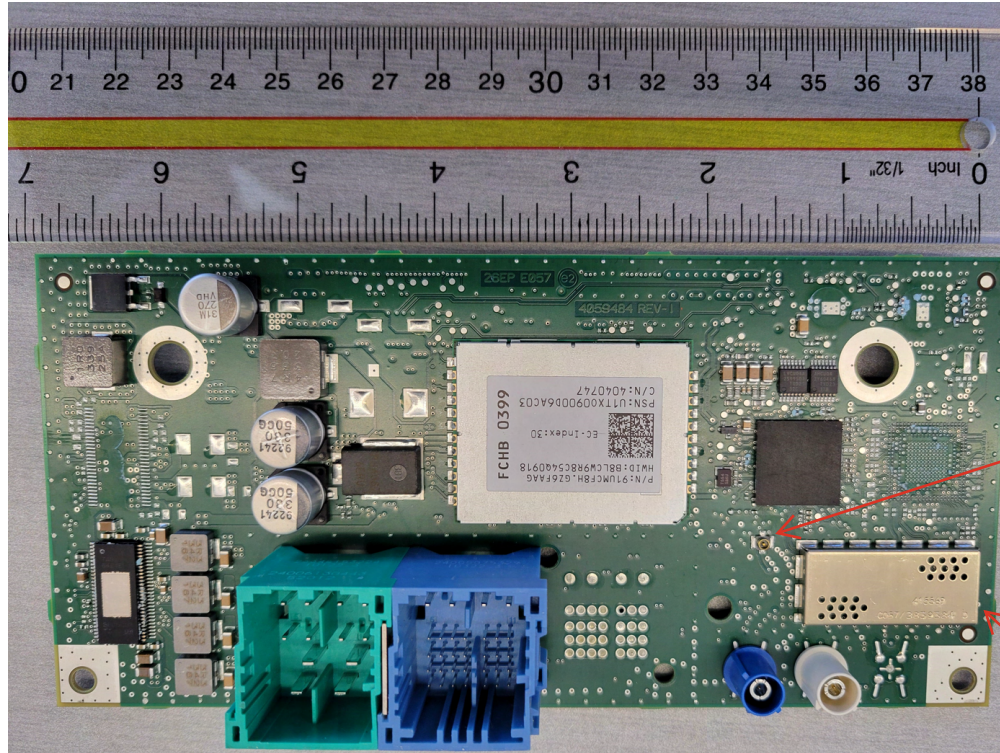


ULF connector:
Is to connect the
GNSS/GPS module
to GPS Ublox IC.
This connexion is
not used for NA
variants. (Please go
to page 16)




The shield is
covering the same
circuit that was
already uncovered
on the 3B Variant


Main PCB – Side 2 (3B MID)

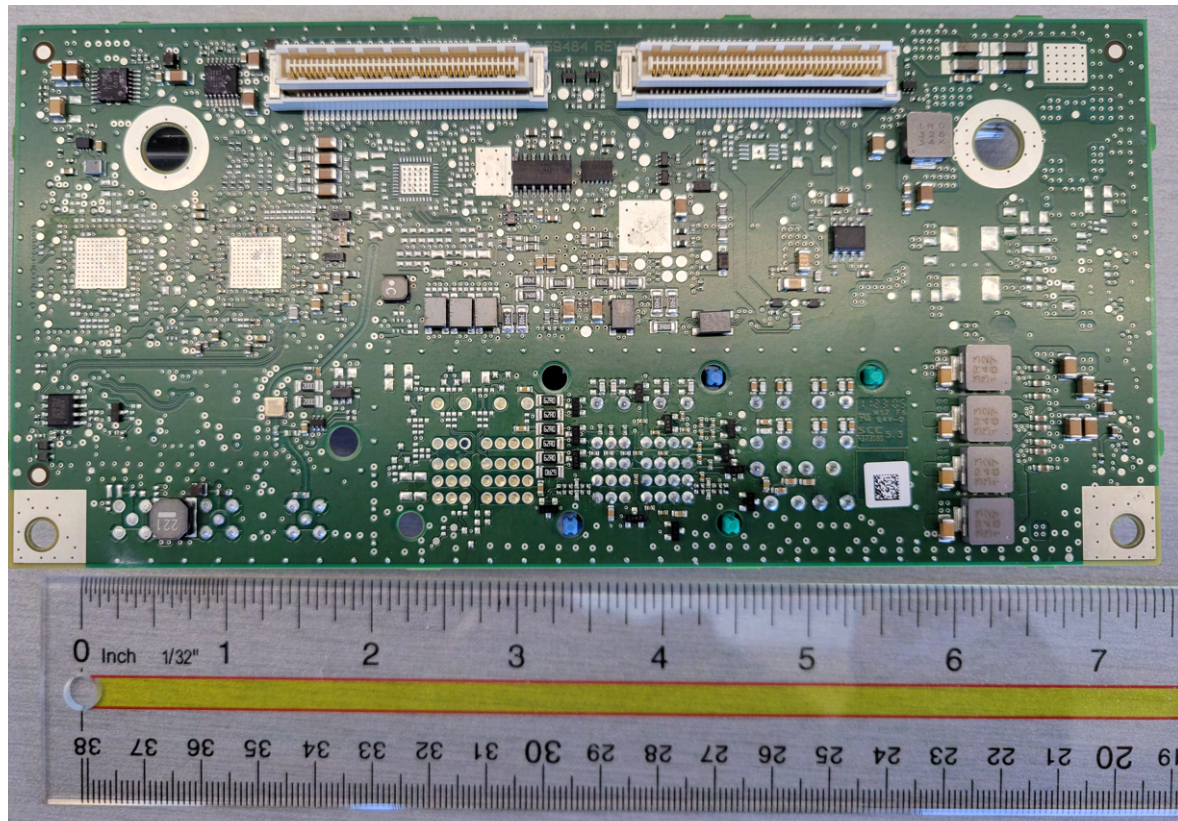

Main PCB – Side 2 (2B HIGH)

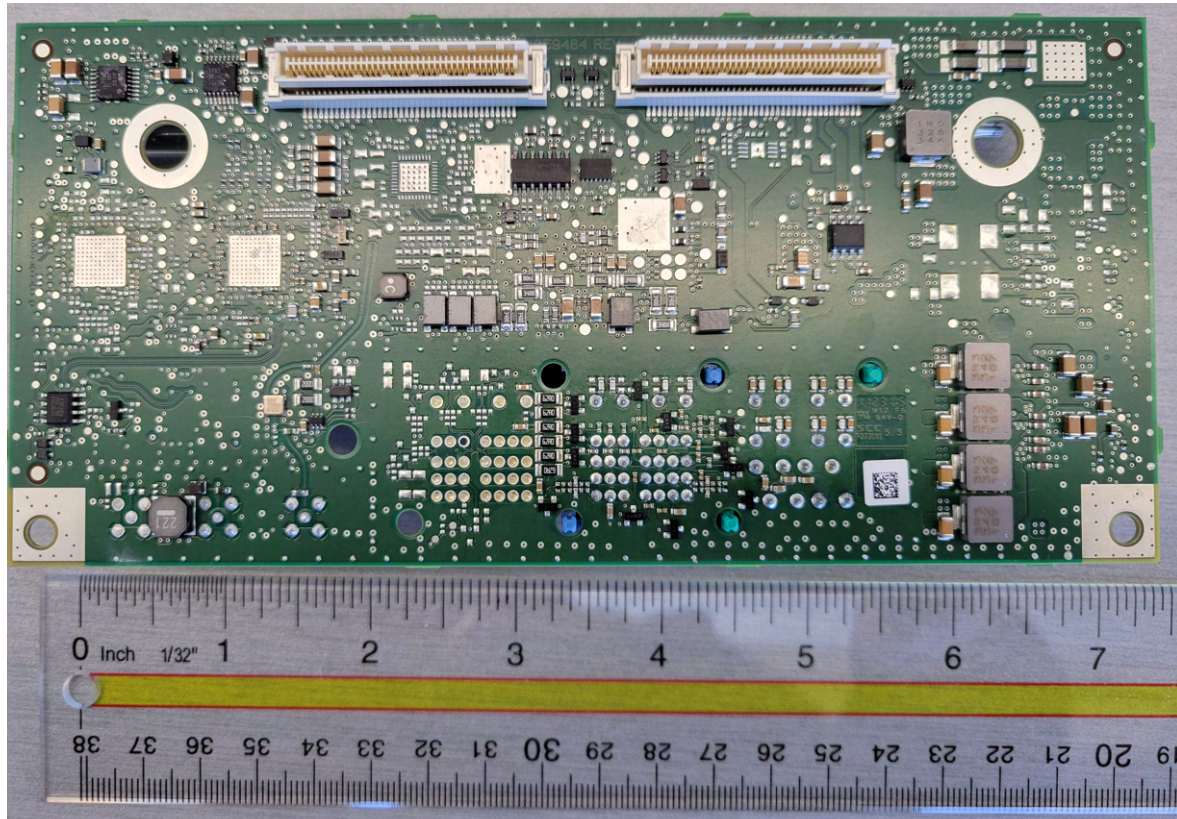

Inner Casting 1 – Side 1

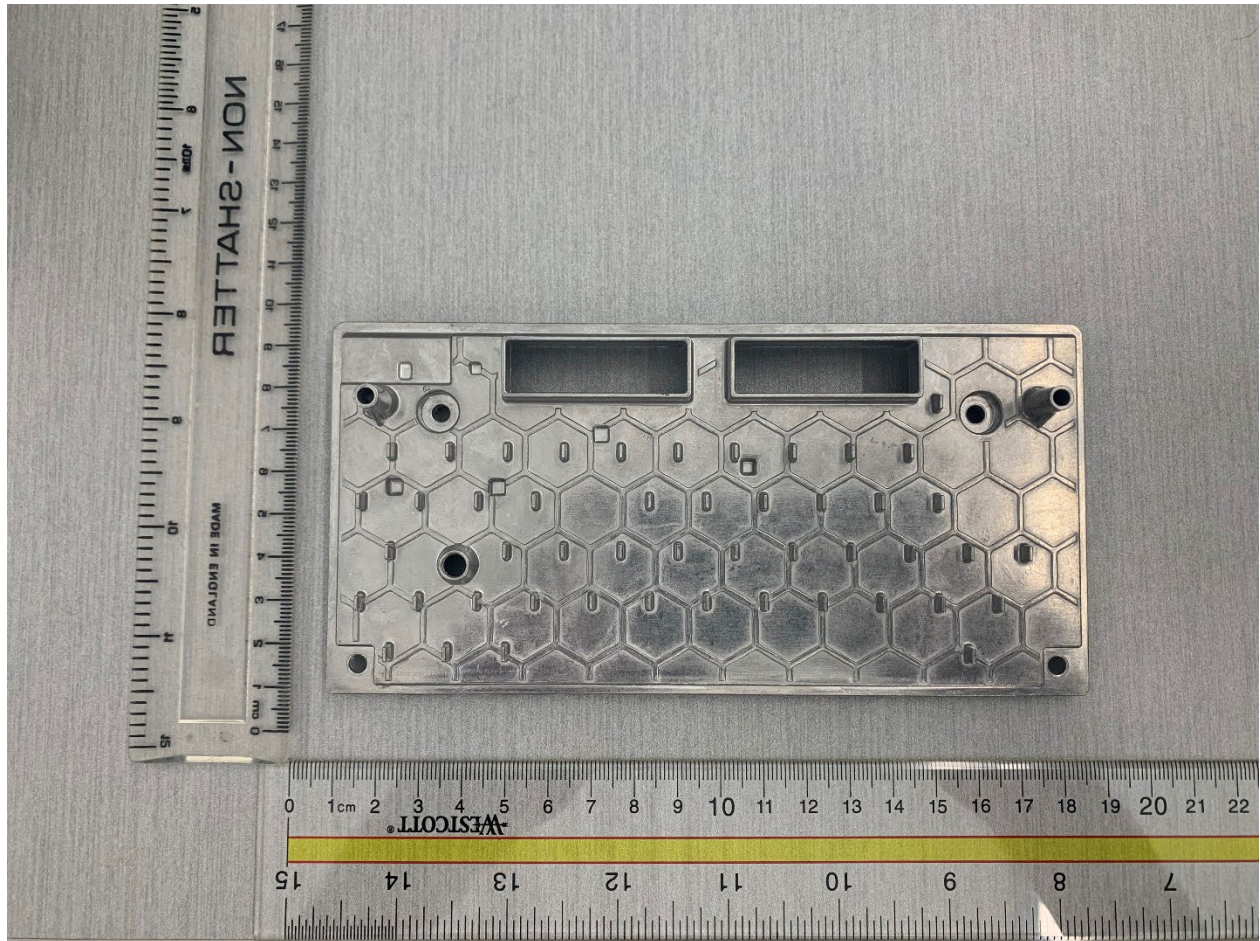

Inner Casting 1 – Side 2

