



# EMC TEST REPORT

**Report No.:** SET2021-07125

**Product Name:** Harman SmartAuto TAG2.0

**FCC ID:** 2AHPN- HSA-20UT-AA

**Model No. :** HSA-20UT-AA

**Applicant:** Harman International Industries, Inc.

**Address:** 30001 Cabot Drive Novi Michigan United States

**Received Date:** 2021.06.02

**Dates of Testing:** 2021.06.02—2021.06.15

**Issued by:** CCIC Southern Testing Co., Ltd.

**Lab Location:** Electronic Testing Building, No. 43 Shahe Road, Xili Street,  
Nanshan District, Shenzhen, Guangdong, China.

**Tel:** 86 755 26627338    **Fax:** 86 755 26627238

This test report consists of **22** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



## Test Report

**Product Name**..... Harman SmartAuto TAG2.0

**Model No.** ..... HSA-20UT-AA

**Trade name**..... Harman

**Applicant**..... Harman International Industries, Inc.

**Applicant Address**..... 30001 Cabot Drive Novi Michigan United States

**Manufacturer** ..... Harman International Industries, Inc.

**Manufacturer Address** ..... 30001 Cabot Drive Novi Michigan United States

**Test Standards**..... 47 CFR Part 15 Subpart B

**Test Result**..... PASS

**Tested by** ..... Zhang Pei Sen

PeiSen Zhang Test Engineer

2021.06.15

**Reviewed by** ..... Chris You

Chris You Senior Engineer

2021.06.15

**Approved by** ..... Shuangwen Zhang

Shuangwen Zhang, Manager

2021.06.15

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>1.1 EUT Description .....</b>	<b>4</b>
<b>1.2 Test Standards and Results .....</b>	<b>5</b>
<b>1.3 Facilities and Accreditations.....</b>	<b>6</b>
1.3.1 Facilities .....	6
1.3.2 Test Environment Conditions.....	6
1.3.3 Measurement Uncertainty .....	6
<b>2. TEST CONDITIONS SETTING .....</b>	<b>7</b>
<b>2.1 Test Peripherals .....</b>	<b>7</b>
<b>2.2 Use of Software Checklist .....</b>	<b>7</b>
<b>2.3 Test Mode .....</b>	<b>7</b>
<b>2.4 Test Setup and Equipments List.....</b>	<b>8</b>
2.4.1 Conducted Emission .....	8
2.4.2 Radiated Emission.....	9
<b>3. 47 CFR PART 15B REQUIREMENTS .....</b>	<b>12</b>
<b>3.1 Conducted Emission.....</b>	<b>12</b>
3.1.1 Requirement .....	12
3.1.2 Test Description .....	12
3.1.3 Test Result.....	12
<b>3.2 Radiated Emission .....</b>	<b>15</b>
3.2.1 Requirement .....	15
3.2.2 Test Description .....	16
3.2.3 Test Result.....	16
<b>APPENDIX II: PHOTOGRAPHS OF EMC TEST CONFIGURATION .....</b>	<b>21</b>

Change History		
Issue	Date	Reason for change
1.0	2021. 06.15	First edition

## 1. GENERAL INFORMATION

### 1.1 EUT Description

EUT Name ..... : Harman SmartAuto TAG2.0  
Trade Name..... : Harman  
Brand Name..... : Harman  
Hardware Version..... : v1.0  
Software Version ..... : N75NA\_TAG20\_V40J  
Power supply..... : 12/24V DC

*Note 1:* The EUT is a Harman SmartAuto TAG2.0

*Note 2:* For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

*Note 3:* All the patterns have been tested and only the worst results are recorded in the report.

*Note 4:* According to the report of SET2020-14574, the change as below:

1. Remove 5 GPIO related devices:

R170/R174/R178/R182/R222/R171/R175/R179/R183/R223/

R172/R176/R180/R184/R226/ R173/R177/R181/R194/R202/

U17/U18/U21/U23/U24/C102/C107/C108/C109/C110.

2. Remove related devices of CAN transceiver circuit corresponding to 1/9PIN: R24/R197/ R199/R206/C104/ Q1/Q2/R26/R48/U20/ R211.

3. Remove GPIO and 12V power supply circuit related devices compatible with single line CAN: R168/C99/ R145/ R140/ C100/ R141/ D9/ U5/ L5/ R103.

*Note 5:* Please refer to ANNEX I for the photographs of the EUT. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer

## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test	Result
1	15.107	Conducted Emission	Y	PASS
2	15.109	Radiated Emission	Y	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.

## 1.3 Facilities and Accreditations

### 1.3.1 Facilities

#### **FCC-Registration No.: CN1283**

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

#### **ISED Registration: 11185A-1**

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until April 20th, 2023.

#### **A2LA Code: 5721.01**

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

### 1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature ( °C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

### 1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	$U_c = 2.6 \text{ dB (k=2)}$
Uncertainty of Radiated Emission: (30MHz~1GHz)	$U_c = 3.91 \text{ dB (k=2)}$
Uncertainty of Radiated Emission: (1~18GHz)	$U_c = 4.5 \text{ dB (k=2)}$
Uncertainty of Radiated Emission: (18~40GHz)	$U_c = 4.9 \text{ dB (k=2)}$

## 2. TEST CONDITIONS SETTING

### 2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

#### Support Cable:

Description	Shield Type	Ferrite Core	Length
Antenna Cable	Un- shielding	No	1.2m

### 2.2 Use of Software Checklist

Software	Version number	Manufacturer	Use the project
ES-K1	V1.73	ROHDE&SCHWARZ	Radiated Emissions below 1GHz
TS+	JS32-RE 2.5.2.0	Tonsceng	Radiated Emissions above 1GHz
EMC32	Version 10.35.10	ROHDE&SCHWARZ	Conducted Emission

### 2.3 Test Mode

The EUT have the following typical setups during the test:


Setup1: EUT working+Charger

Note: only worst-case mode setup 1 mode data provide at the report

## 2.4 Test Setup and Equipments List

### 2.4.1 Conducted Emission

#### A. Test Setup:

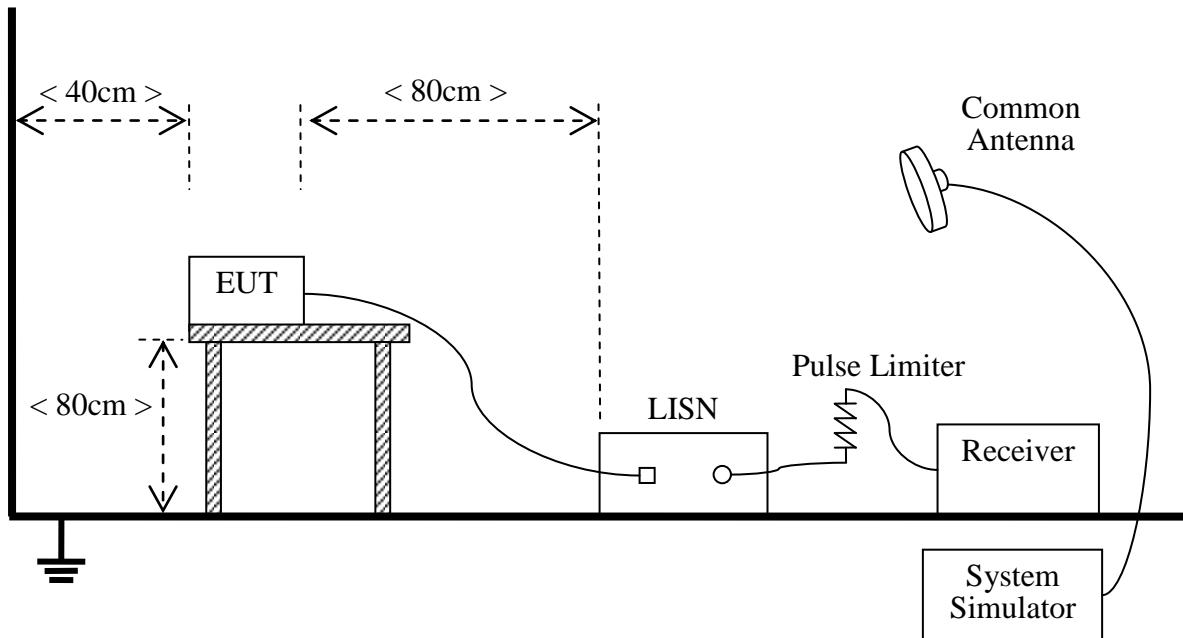

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides  $50\Omega/50\mu\text{H}$  of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


#### B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2020.11.21	2021.09.20
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2020.11.21	2021.09.21
Cable	MATCHING PAD	W7	/	2020.08.02	2021.08.01


## 2.4.2 Radiated Emission

### A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

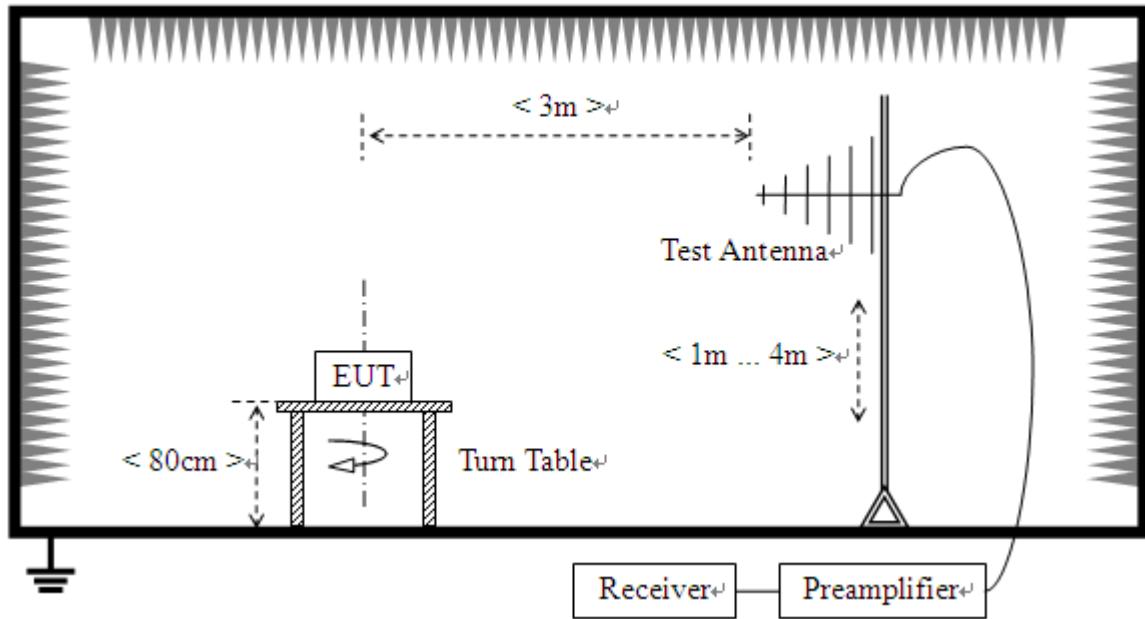

2) For radiated emissions above 1GHz

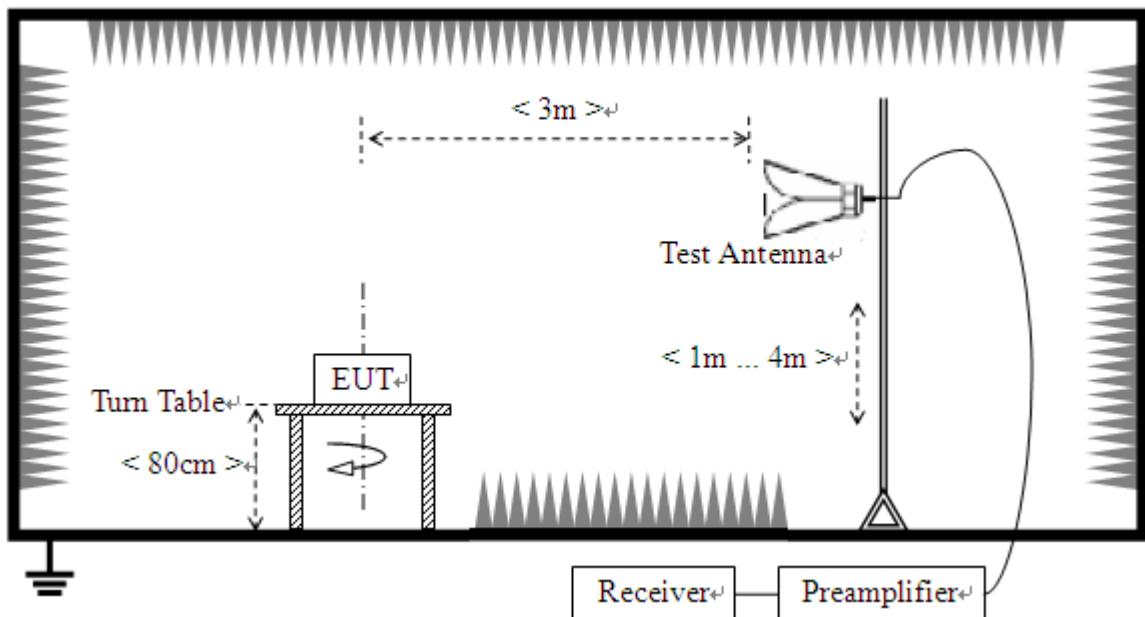

## B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**C. Equipments List:**

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2020.11.21	2021.09.20
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2020.11.21	2021.09.21
Shield Room	Xinju Electronics	L7300*W4500 *H3100	A181003226	2018.09.06	2021.09.05
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	A0902601	2020.06.23	2021.06.23
Broadband Ant.	2786	ETC	A150402239	2018.09.17	2021.09.16
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2020.09.23	2021.08.12
System Simulator	ROHDE&SCHWARZ	CMW500	A150802214	2019.07.30	2021.07.29
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2019.03.25	2023.03.24
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.04.17	2022.04.17

### 3. 47 CFR PART 15B REQUIREMENTS

#### 3.1 Conducted Emission

##### 3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

**Note:**

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 3.1.2 Test Description

See section 2.4.1 of this report.

#### 3.1.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

**Note:**

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.


-Level(dBuv)=Read Level(dBuv)+Correction Factor(dB)

-Margin= Read Level(dBuv)-Limit Line(dBuv)

-Correction factor= LISN Factor(dB)+Cable Loss(dB)+ attenuation factor(dB)

## Test voltage and frequency


### A. Mains terminal disturbance voltage, L phase

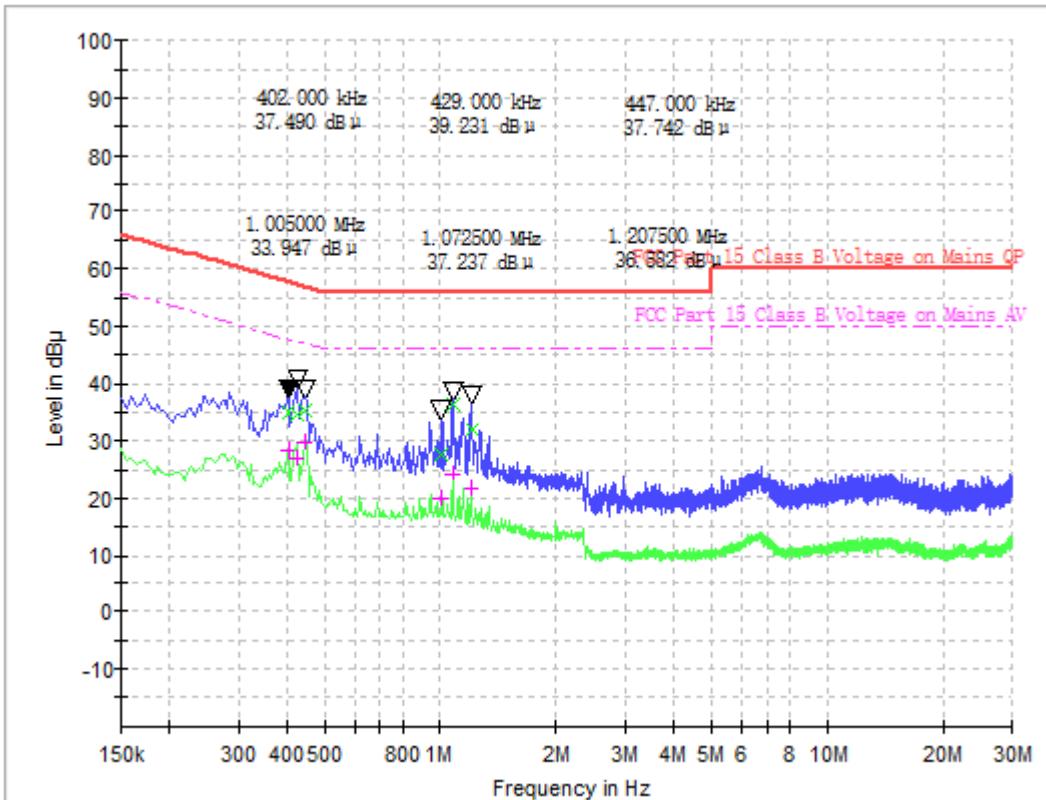

(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB µV)	CAverage (dB µV)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB µV)
0.402000	34.84	28.37	0.1	20.1	22.97	57.8	19.44	47.8
0.429000	34.79	26.78	0.1	20.1	22.48	57.3	20.49	47.3
0.447000	35.35	29.77	0.1	20.1	21.58	56.9	17.16	46.9
1.005000	27.55	19.97	0.1	20.1	28.45	56.0	26.03	46.0
1.072500	36.16	24.29	0.1	20.1	19.84	56.0	21.71	46.0
1.207500	32.00	21.59	0.1	20.1	24.00	56.0	24.41	46.0

### B.Mains terminal disturbance voltage, N phase

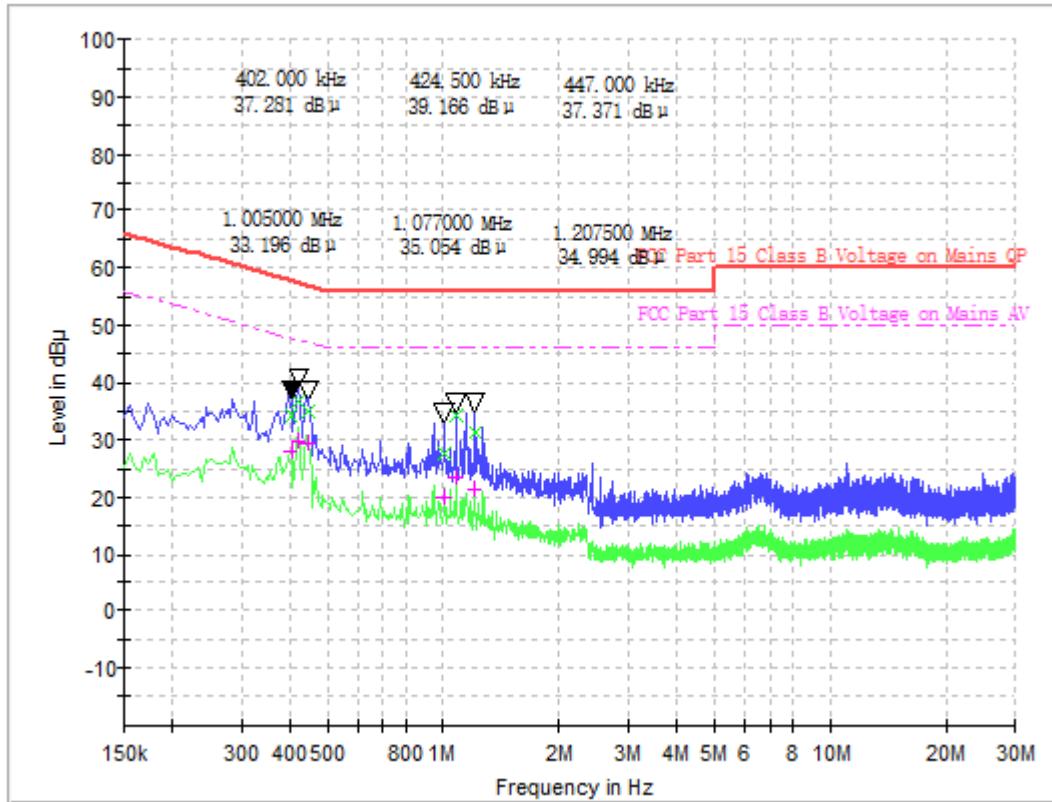

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB μV)	CAverage (dB μV)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μV)
0.402000	34.37	27.98	0.1	20.1	23.44	57.8	19.83	47.8
0.424500	36.71	29.51	0.1	20.1	20.65	57.4	17.85	47.4
0.447000	35.02	29.40	0.1	20.1	21.91	56.9	17.53	46.9
1.005000	27.73	19.86	0.1	20.1	28.27	56.0	26.14	46.0
1.077000	34.28	23.21	0.1	20.1	21.72	56.0	22.79	46.0
1.207500	31.36	21.08	0.2	20.2	24.64	56.0	24.92	46.0

## 3.2 Radiated Emission

### 3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	( $\mu\text{V/m}$ )	(dBuV/m)
0.009 - 0.490	2400/F(kHz)	300m	10000* 2400/F(kHz)	20log 2400/F(kHz) + 80
0.490 - 1.705	2400/F(kHz)	30m	100* 2400/F(kHz)	20log 2400/F(kHz) + 40
1.705 - 30.00	30	30m	100*30	20log 30 + 40
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

- a) As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- b) Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- c) For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- d) For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

#### Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by 20log Emission Level( $\mu\text{V/m}$ ).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $Ld1 = Ld2 * (d2/d1)^2$ .

Example:

F.S Limit at 30m distance is 30uV/m, then F.S Limitation at 3m distance is adjusted as  
 $Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}$ .

### **3.2.2 Test Description**

See section 2.3.2 of this report.

### **3.2.3 Test Result**

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.


The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

-Emission Level(dBuV/m)=  $20\log \text{Emission Level}(\mu\text{V/m})$

-Corrected Reading=Antenna factor+Cable Loss+Read Level+Preamp Factor= Level


### A.Radiation disturbances, antenna polarization:Vertical

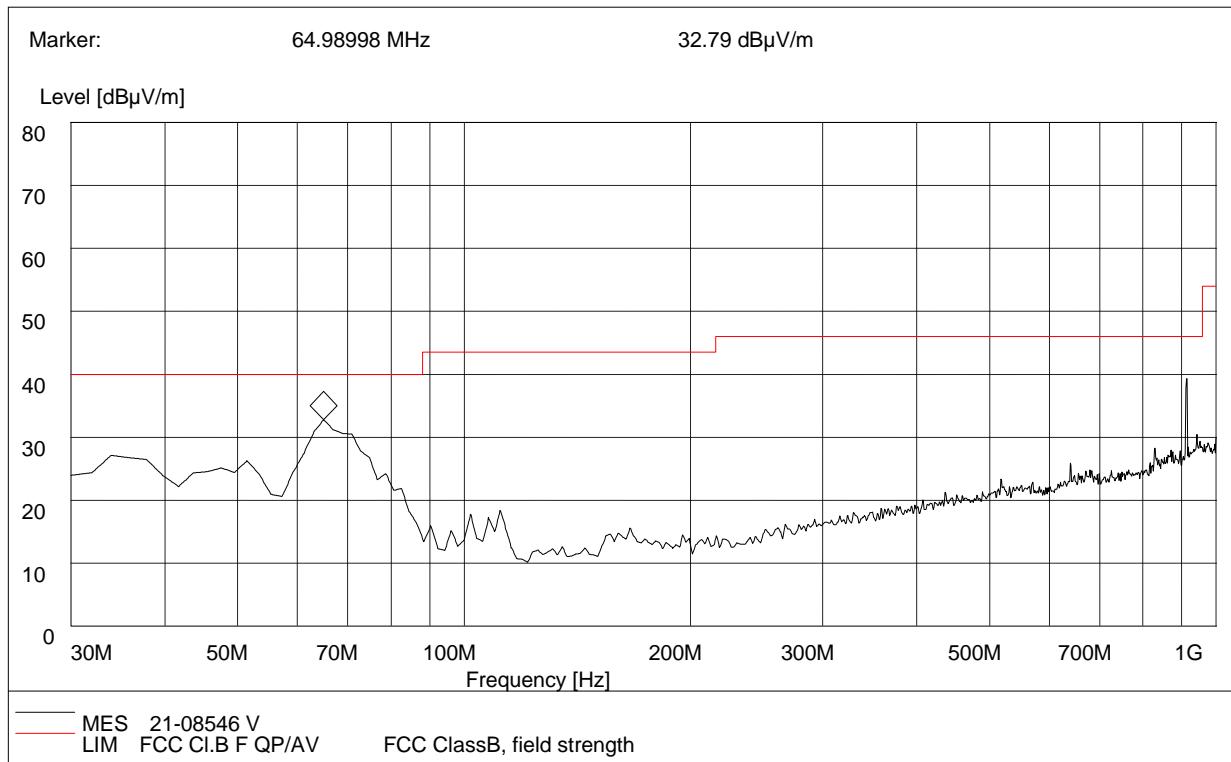

(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
33.82	27.20	120.000	100	40.0	12.80	Vertical	0.4	25.8	Pass
51.23	25.38	120.000	100	40.0	14.62	Vertical	0.6	27.1	Pass
64.21	31.87	120.000	100	40.0	8.13	Vertical	0.5	26.3	Pass
78.59	23.01	120.000	100	43.5	20.49	Vertical	0.6	29.0	Pass
111.64	18.35	120.000	100	43.5	25.15	Vertical	0.5	29.0	Pass
914.40	39.20	120.000	100	46.4	7.20	Vertical	1.1	28.9	Pass

## B.Radiation disturbances, antenna polarization: Horizontal

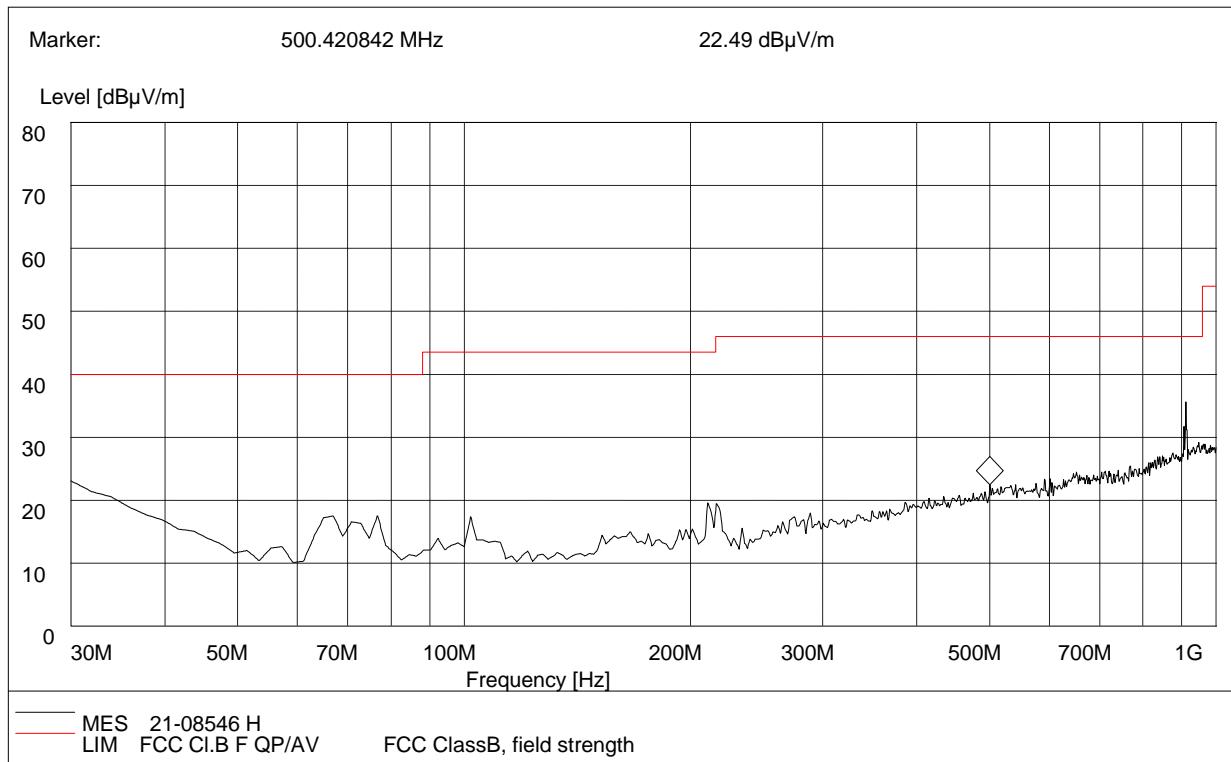


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	22.10	120.000	100	40.0	17.90	Horizontal	0.4	26.3	Pass
66.93	15.90	120.000	100	40.0	24.10	Horizontal	0.5	26.3	Pass
76.65	15.60	120.000	100	40.0	24.40	Horizontal	0.6	28.0	Pass
101.92	15.10	120.000	100	43.5	28.40	Horizontal	0.6	28.0	Pass
210.78	18.20	120.000	100	43.5	25.30	Horizontal	0.6	29.1	Pass
500.42	20.98	120.000	100	46.0	25.02	Horizontal	1.0	29.2	Pass

**Test Result: PASS**


### A.Radiation disturbances, antenna polarization: Horizontal

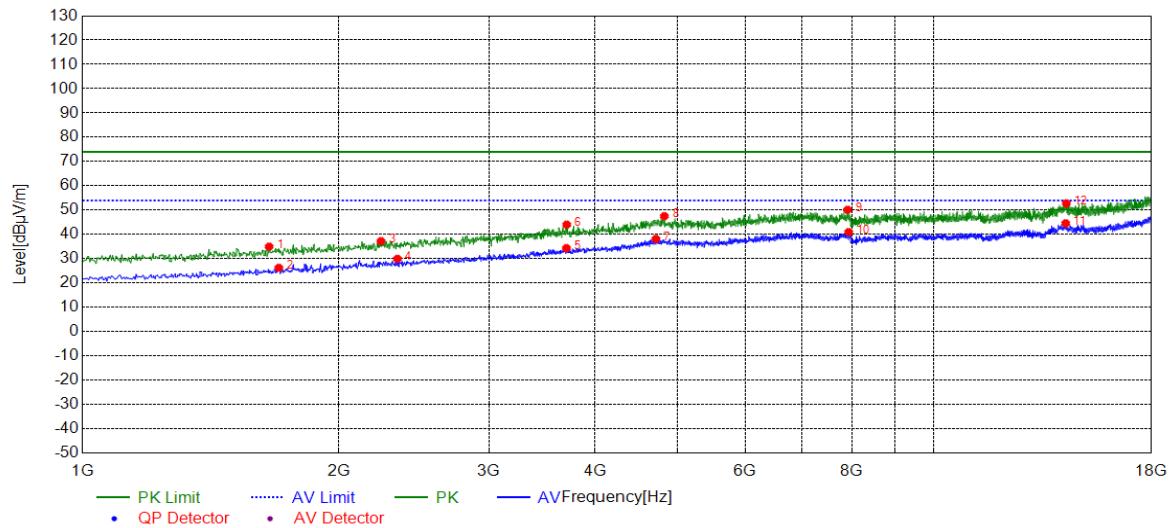

(Plot E: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1656.33	34.97	-12.78	74.00	39.03	PK	100	20	Horizontal
2	1700.54	26.26	-12.60	54.00	27.74	AV	100	10	Horizontal
3	2241.24	37.26	-10.20	74.00	36.74	PK	100	20	Horizontal
4	2343.26	29.96	-9.86	54.00	24.04	AV	100	10	Horizontal
5	3700.14	34.36	-4.21	54.00	19.64	AV	100	20	Horizontal
6	3703.54	44.04	-4.20	74.00	29.96	PK	100	10	Horizontal
7	4713.54	38.14	0.22	54.00	15.86	AV	100	20	Horizontal
8	4822.36	47.53	0.38	74.00	26.47	PK	100	20	Horizontal
9	7913.58	50.15	3.95	74.00	23.85	PK	100	20	Horizontal
10	7937.38	40.98	3.92	54.00	13.02	AV	100	10	Horizontal
11	14269.4	44.57	10.86	54.00	9.43	AV	100	10	Horizontal
12	14296.6	52.76	10.99	74.00	21.24	PK	100	20	Horizontal

## B.Radiation disturbances, antenna polarization: Vertical

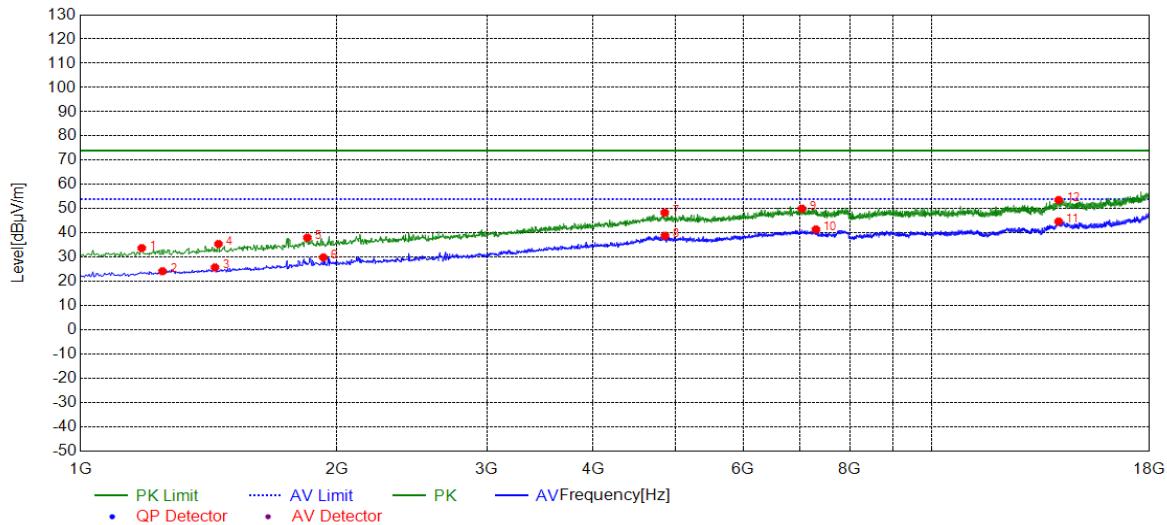

(Plot F: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1180.23	33.77	-14.87	74.00	40.23	PK	100	20	Vertical
2	1248.24	24.23	-14.63	54.00	29.77	AV	100	30	Vertical
3	1438.68	25.82	-13.80	54.00	28.18	AV	100	40	Vertical
4	1452.29	35.47	-13.75	74.00	38.53	PK	100	20	Vertical
5	1846.76	38.08	-11.75	74.00	35.92	PK	100	10	Vertical
6	1928.38	29.93	-11.33	54.00	24.07	AV	100	50	Vertical
7	4852.97	48.41	0.21	74.00	25.59	PK	100	50	Vertical
8	4856.37	38.84	0.19	54.00	15.16	AV	100	20	Vertical
9	7032.80	50.03	3.47	74.00	23.97	PK	100	40	Vertical
10	7304.86	41.47	3.45	54.00	12.53	AV	100	30	Vertical
11	14075.6	44.75	10.37	54.00	9.25	AV	100	30	Vertical
12	14079.0	53.62	10.36	74.00	20.38	PK	100	40	Vertical

## Appendix II: Photographs of EMC Test Configuration


### 1. Radiated Emission Measurement below 1GHz



### 2. Radiated Emission Measurement above 1GHz



### 3. Conducted emission at AC mains input/output port Measurement

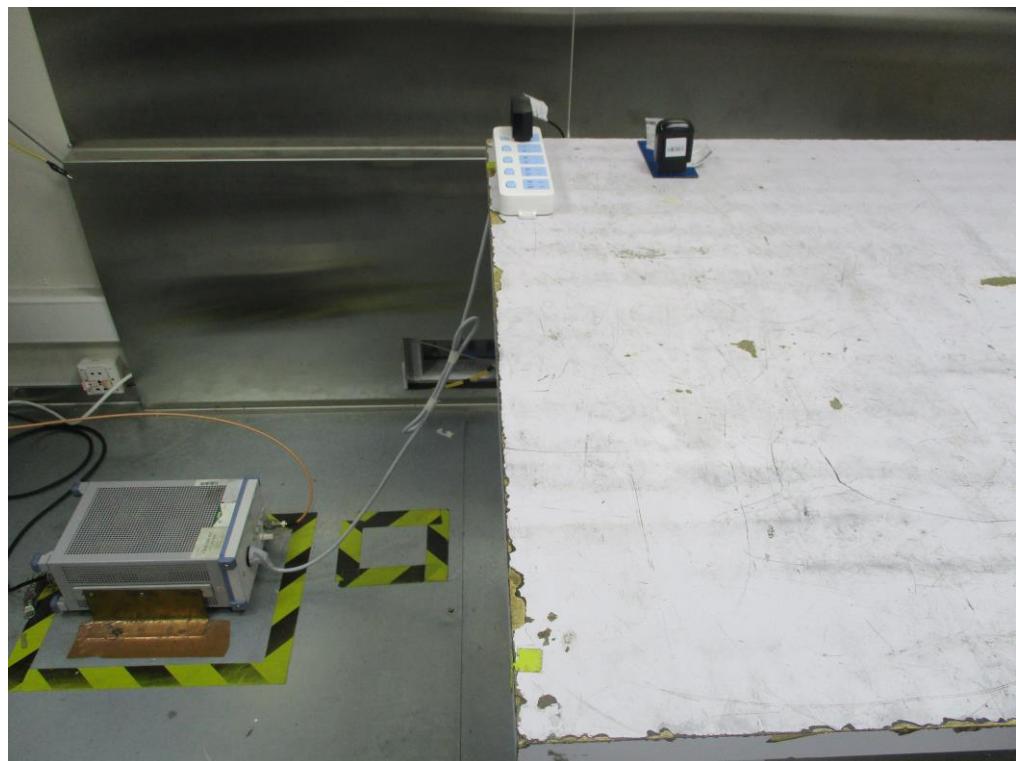

-----End of Report-----