

TEST REPORT

FCC ID: 2AHQFU220U229

Product: Feature Mobile Phone

Model No.: U220+

Additional Model: U229, U269, U873, N9, B310, K18, Z1

Trade Mark: G'FIVE

Report No.: TCT160311E024

Issued Date: Apr. 01, 2016

Issued for:

Gfive Internet(HK) Limited
5F/Tower E, 9th East, Shangxue Industrial Park, Bantian, longgang District,
Shenzhen, China

Issued By:

Shenzhen Tongce Testing Lab.
1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China
TEL: +86-755-27673339
FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification.....	3
2. Test Result Summary	4
3. EUT Description	5
4. Genera Information.....	6
4.1. Test environment and mode.....	6
4.2. Test Mode.....	7
4.3. Description of Support Units.....	7
4.4. Configuration of Tested System	8
4.5. Measurement Results Explanation Example.....	8
5. Facilities and Accreditations	9
5.1. Facilities	9
5.2. Location	9
5.3. Measurement Uncertainty.....	9
6. Test Results and Measurement Data	10
6.1. Conducted Output Power Measurement	10
6.2. Peak to Average Ratio.....	12
6.3. 99% Occupied Bandwidth and 26dB Bandwidth Measurement	18
6.4. Band Edge and Conducted Spurious Emission Measurement	24
6.5. Test Specification.....	24
6.6. Effective Radiated Power and Effective Isotropic Radiated Power Measurement	33
6.7. Field Strength of Spurious Radiation Measurement	38
6.8. Frequency Stability Measurement	49
Appendix A: Photographs of Test Setup	
Appendix B: Photographs of EUT	

1. Test Certification

Product:	Feature Mobile Phone
Model No.:	U220+
Additional Model No.:	U229, U269, U873, N9, B310, K18, Z1
Applicant:	Gfive Internet(HK) Limited
Address:	5F/Tower E, 9th East, Shangxue Industrial Park, Bantian, longgang District, Shenzhen, China
Manufacturer:	Gfive Internet(HK) Limited
Address:	5F/Tower E, 9th East, Shangxue Industrial Park, Bantian, longgang District, Shenzhen, China
Date of Test:	Mar. 11 – Mar. 31, 2016
Applicable Standards:	FCC CFR Title 47 Part 2 FCC CFR Title 47 Part22 Subpart H FCC CFR Title 47 Part24 Subpart E

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Neil Wong

Neil Wong

Date:

Mar. 31, 2016

Reviewed By:

Joe Zhou

Joe Zhou

Date:

Apr. 01, 2016

Approved By:

Tomsin

Tomsin

Date:

Apr. 01, 2016

2. Test Result Summary

Requirement	CFR 47 Section	Result
Conducted Output Power	§2.1046	PASS
Peak-to-Average Ratio	§24.232(d)	PASS
Effective Radiated Power	§22.913(a)(2)	PASS
Equivalent Isotropic Radiated Power	§24.232(c)	PASS
Occupied Bandwidth	§2.1049 §22.917(b) §24.238(b)	PASS
Band Edge	§2.1051 §22.917(a) §24.238(a)	PASS
Conducted Spurious Emission	§2.1051 §22.917(a) §24.238(a)	PASS
Field Strength of Spurious Radiation	§2.1053 §22.917(a) §24.238(a)	PASS
Frequency Stability for Temperature & Voltage	§2.1055 §22.355 §24.235	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product Name:	Feature Mobile Phone
Model :	U220+
Additional Model:	U229, U269, U873, N9, B310, K18, Z1
Trade Mark:	G'FIVE
Hardware Version:	CGC45-MB-V1.1
software Version:	CGC-ANX-V10
Tx Frequency:	GSM/GPRS850: 824.2 MHz ~ 848.8 MHz PCS/GPRS1900: 1850.2 MHz ~ 1909.8MHz
Rx Frequency:	GSM/GPRS850: 824.2 MHz ~ 848.8 MHz PCS/GPRS1900: 1850.2 MHz ~ 1909.8MHz
Type of Modulation:	GSM/GPRS: GMSK
Antenna Type:	Internal Antenna
Antenna Gain:	1.1dBi
Power Supply:	Voltage: 3.7V Battery capacity: 1000mAH3.7Wh
Remark:	All models above are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement.

4. General Information

4.1. Test environment and mode

Operating Environment:

Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar

Test Mode:

Operation mode:	Keep the EUT in communication with CMU200 and select channel with modulation
-----------------	--

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

Description Operation Frequency

GSM 850		PCS1900	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
....			
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
...	...	...	...
250	848.60	809	1909.60
251	848.80	810	1909.80

4.2. Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power. Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10000 MHz for GSM850.
2. 30 MHz to 20000 MHz for PCS1900.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
GSM 850	GSM Link GPRS class 12 Link	GSM Link GPRS class 12 Link
PCS 1900	GSM Link GPRS class 12 Link	GSM Link GPRS class 12 Link

Note: The maximum power levels are chosen to test as the worst case configuration as follows:

GSM multi-slot class 8 mode for GMSK modulation,
RMC 12.2Kbps mode for WCDMA band V and WCDMA band II, only these modes were used for all tests. In addition to above worst-case test, below investigating on all data rates and all modes are compliance with each FCC test case which has specific test limits. For spurious emissions at antenna port, the EUT was investigated the band edges on low and high channels, and the unwanted spurious emissions on middle channel for all modes, the results are PASS, then only the worst-results were reported in the test report. The Radiated Spurious emissions for GSM modes were investigated on the middle channel and the PASS results were not worst than those data tested from the highest power channels.

4.3. Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4. Configuration of Tested System

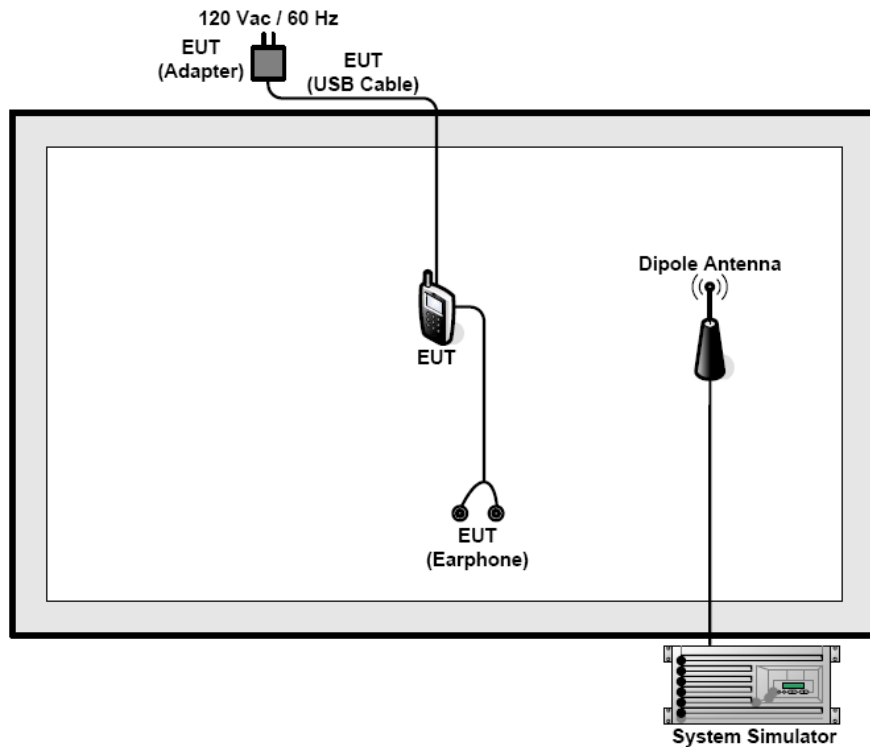

4.5. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example: $\text{Offset(dB)} = \text{RF cable loss(dB)} + \text{attenuator factor(dB)}$.
 $= 4.2 + 10 = 14.2 \text{ (dB)}$

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- CNAS - Registration No.: CNAS L6165

Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Tel: 86-755-36638142

5.3. Measurement Uncertainty


The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$

6. Test Results and Measurement Data

6.1. Conducted Output Power Measurement

6.1.1. Test Specification

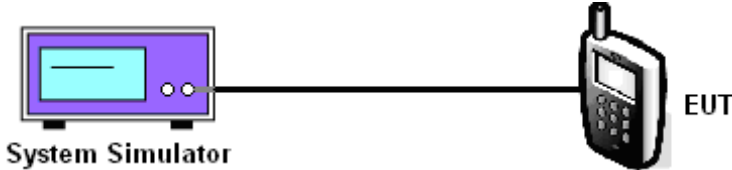Test Requirement:	FCC part 22.913(a) and FCC part 24.232(b)
Test Method:	FCC part 2.1046
Operation mode:	Refer to item 4.1
Limits:	GSM 850 7W PCS 1900 2W
Test Setup:	 The diagram illustrates the test setup. On the left is a 'System Simulator' represented by a computer monitor with a blue screen and two small circles below it. A black line connects the simulator to a mobile phone on the right, labeled 'EUT'.
Test Procedure:	1. The transmitter output port was connected to the system simulator. 2. Set EUT at maximum power through system simulator. 3. Select lowest, middle, and highest channels for each band and different modulation. 4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.
Test Result:	PASS

6.1.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Sep. 11, 2016
Power sensor	Agilent	E9031A	MY41497725	Sep. 11, 2016
Power meter	Agilent	E4418B	GB43312526	Sep. 11, 2016

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.1.3. Test data

Band: GSM 850	Burst Average Power (dBm)		
Channel	128	190	251
Frequency	824.2	836.6	848.8
GSM(voice)	32.08	32.12	32.86
GRPS (GMSK, 1-slot)	30.37	30.26	30.75
GRPS (GMSK, 2-slot)	29.45	29.35	29.70
GRPS (GMSK, 3-slot)	27.73	27.64	27.85
GRPS (GMSK, 4-slot)	25.75	25.78	25.89


Note: Maximum Burst Average Power for GSM.

Band: GSM 1900	Burst Average Power (dBm)		
Channel	512	Channel	512
Frequency	1850.2	1880.0	1909.8
GSM(voice)	29.82	30.91	29.67
GRPS (GMSK, 1-slot)	29.11	29.05	29.56
GRPS (GMSK, 2-slot)	27.19	27.14	27.51
GRPS (GMSK, 3-slot)	25.47	25.43	25.66
GRPS (GMSK, 4-slot)	23.49	23.57	23.70

Note: Maximum Burst Average Power for GSM.

6.2. Peak to Average Ratio

6.2.1. Test Specification

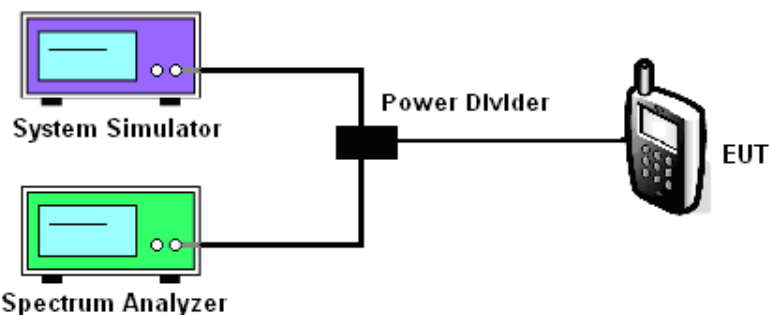Test Requirement:	FCC Part24.232
Test Method:	FCC KDB 971168 v02r02 Section 5.7.1
Operation mode:	Refer to item 4.1
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test Setup:	 The diagram illustrates the test setup. A System Simulator (represented by a purple monitor icon) and a Spectrum Analyzer (represented by a green monitor icon) are both connected to a central Power Divider (represented by a black square icon). The Power Divider is then connected to the EUT (Equipment Under Test, represented by a mobile phone icon).
Test Procedure:	1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1. 2. The EUT was connected to spectrum analyzer and system simulator via a power divider. 3. Set EUT to transmit at maximum output power. 4. For GSM/EGPRS operating modes, signal gating is implemented on the spectrum analyzer by triggering from the system simulator. 5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.
Test Result:	PASS

6.2.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Sep. 11, 2016
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
System simulator	R&S	CMU200	111382	Sep. 11, 2016

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.3. Test Data

Mode	GSM850 (GSM)			GSM850 (GPRS class 8)		
Channel	128	190	251	128	190	251
Frequency (MHz)	824.2	836.6	848.8	824.2	836.6	848.8
Peak-to-Average Ratio (dB)	0.00	0.12	0.08	0.06	0.17	0.05

Mode	GSM 1900 (GSM)			GSM 1900 (GPRS class 8)		
Channel	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	0.04	0.01	0.01	0.00	0.01	0.03

GSM 850


Peak-to-Average Ratio on Channel 128




Peak-to-Average Ratio on Channel 190



Peak-to-Average Ratio on Channel 251

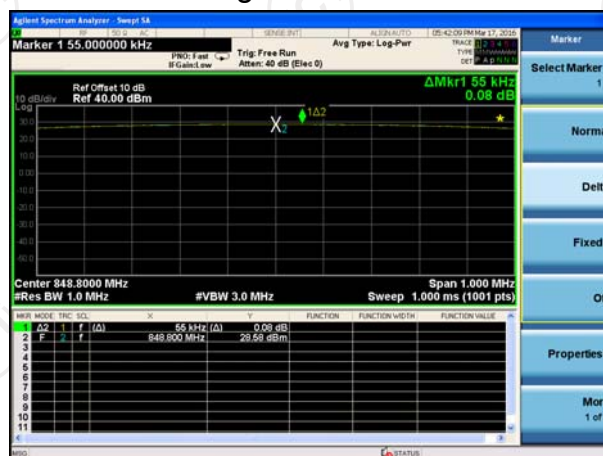


Peak-to-Average Ratio on Channel 128

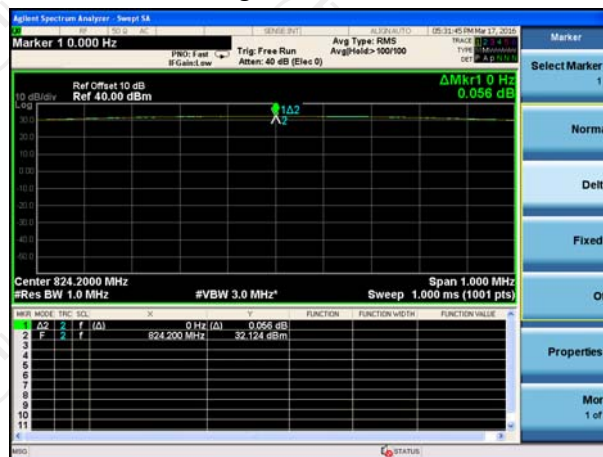


Peak-to-Average Ratio on Channel 190



Peak-to-Average Ratio on Channel 251

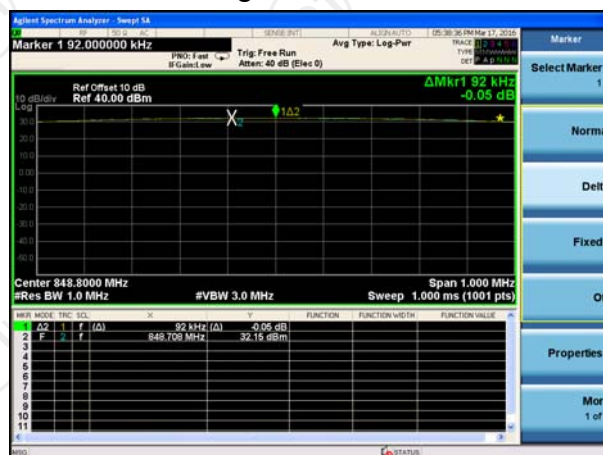

Peak-to-Average Ratio on Channel 512

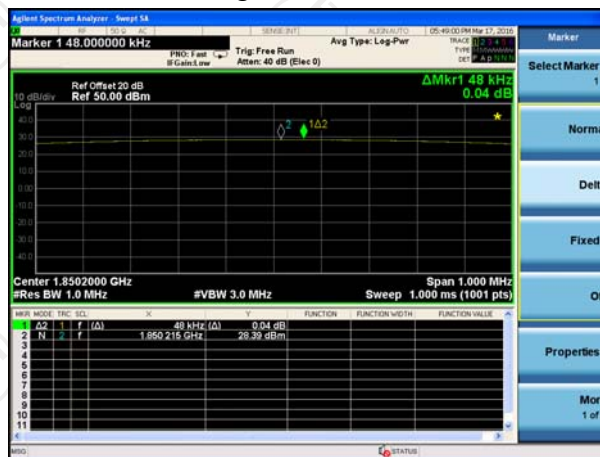

Peak-to-Average Ratio on Channel 661



Peak-to-Average Ratio on Channel 810



Peak-to-Average Ratio on Channel 512



Peak-to-Average Ratio on Channel 661



Peak-to-Average Ratio on Channel 810



6.3. 99% Occupied Bandwidth and 26dB Bandwidth Measurement

6.3.1. Test Specification

Test Requirement:	FCC part 22.913(a) and FCC part 24.232(b)
Test Method:	FCC part 2.1049
Operation mode:	Refer to item 4.1
Limit:	N/A
Test Setup:	The diagram shows a System Simulator (purple box) and a Spectrum Analyzer (green box) connected to a Power Divider (black box). The Power Divider is connected to the EUT (black mobile phone). The System Simulator and Spectrum Analyzer are connected to the Power Divider via cables.
Test Procedure:	1. The testing follows FCC KDB 971168 v02r02 Section 4.2. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold. 5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.
Test Result:	PASS

6.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Sep. 11, 2016
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test data


Cellular Band						
Mode	GSM850 (GSM)			GSM 1900 (GSM)		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
99% OBW (kHz)	243.71	248.94	247.22	244.22	244.31	249.29
26dB BW (kHz)	315.0	319.0	319.9	318.6	315.7	319.6

Cellular Band						
Mode	GSM850 (GPRS)			GSM 1900 (GPRS)		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
99% OBW (kHz)	247.49	248.18	246.03	248.92	242.99	243.58
26dB BW (kHz)	303.3	317.8	314.0	315.8	319.0	310.5


Test plots as follows:

Band:	GSM 850	Test Mode:	GSM Link (GMSK)
-------	---------	------------	-----------------


Occupied Bandwidth Plot on Channel 128

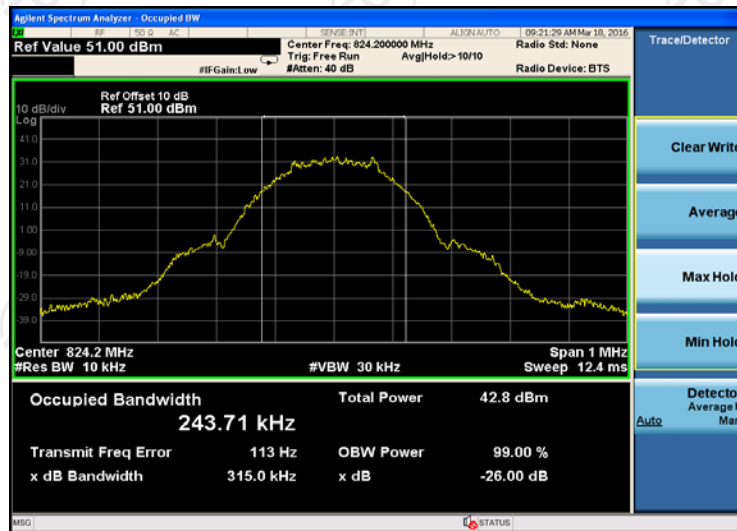

Occupied Bandwidth Plot on Channel 190

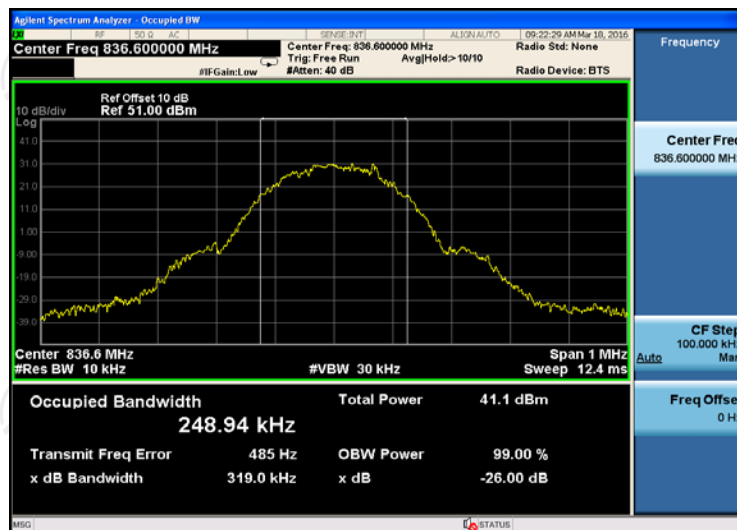

Occupied Bandwidth Plot on Channel 251

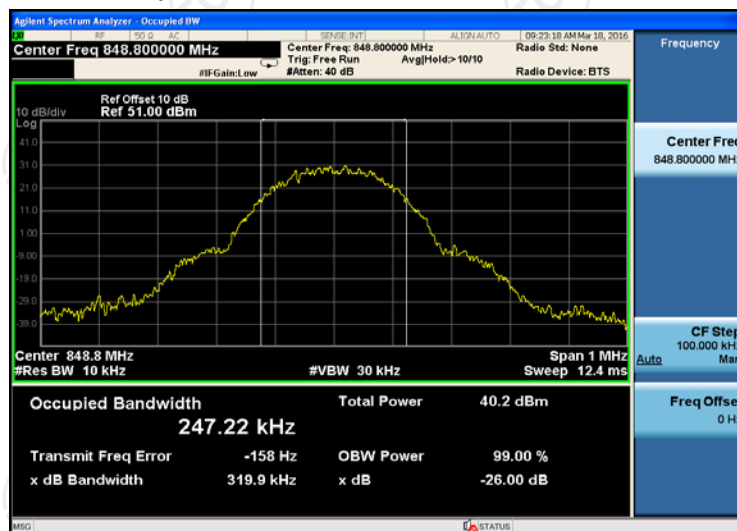


Band:

GSM 1900


Test Mode:

GSM Link (GMSK)


Occupied Bandwidth Plot on Channel 512

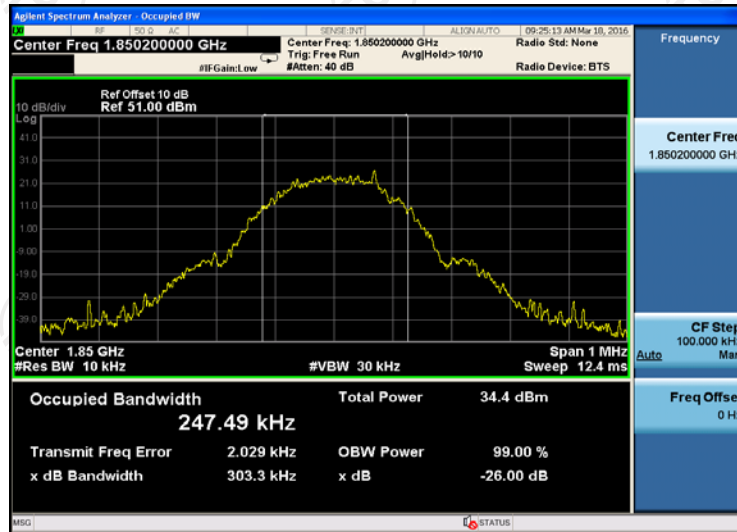

Occupied Bandwidth Plot on Channel 661

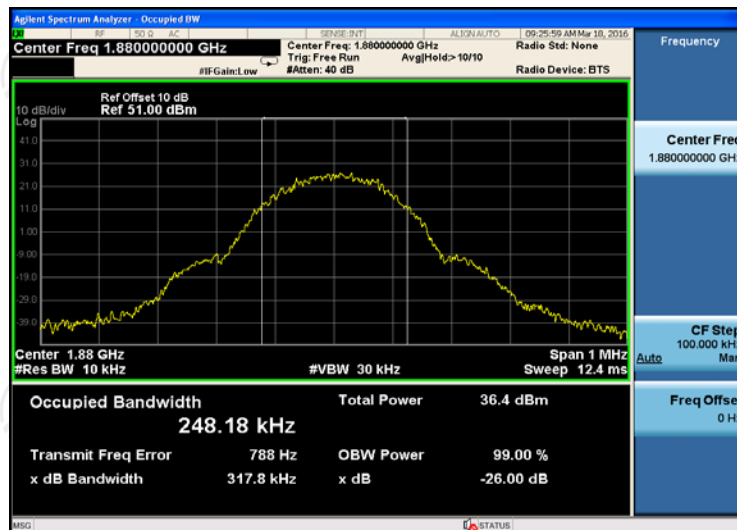

Occupied Bandwidth Plot on Channel 810

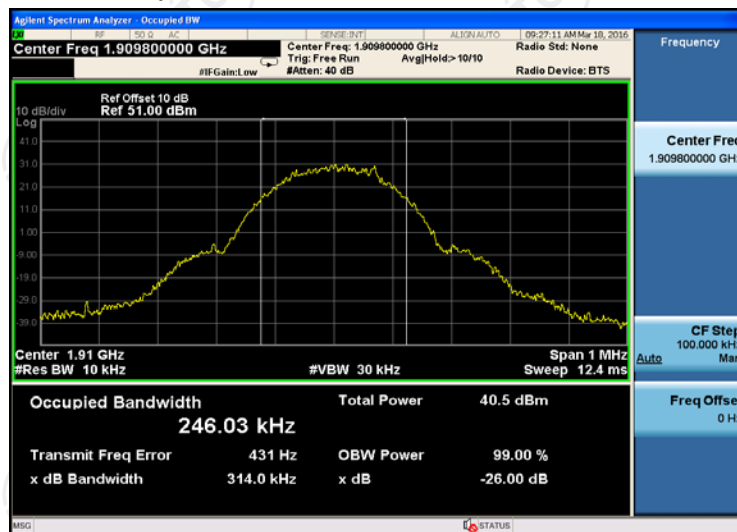


Band:

GPRS850


Test Mode:

GPRS Class 8 Link
(8PSK)


Occupied Bandwidth Plot on Channel 128

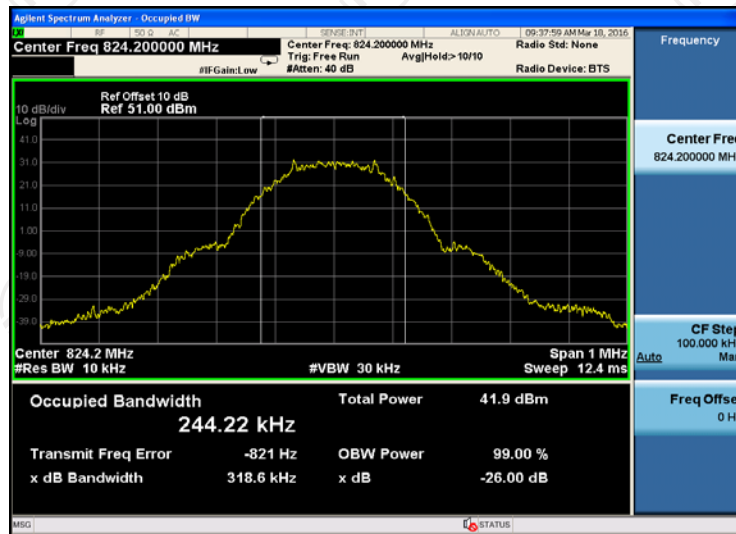

Occupied Bandwidth Plot on Channel 190

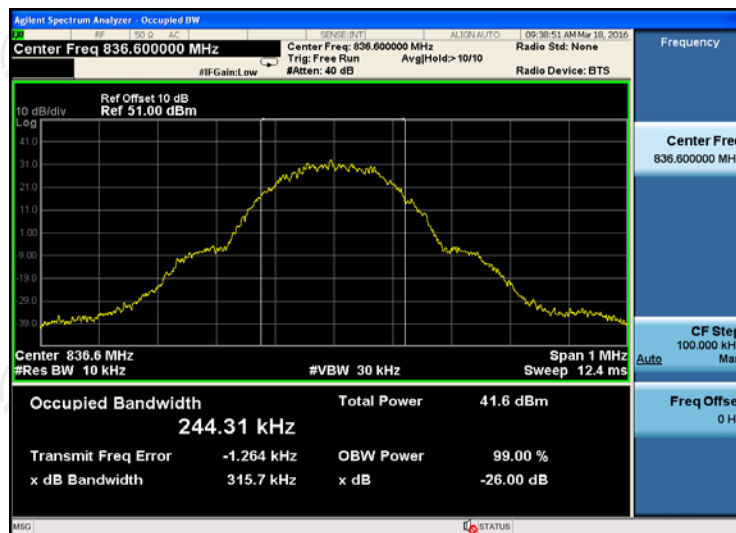

Occupied Bandwidth Plot on Channel 251

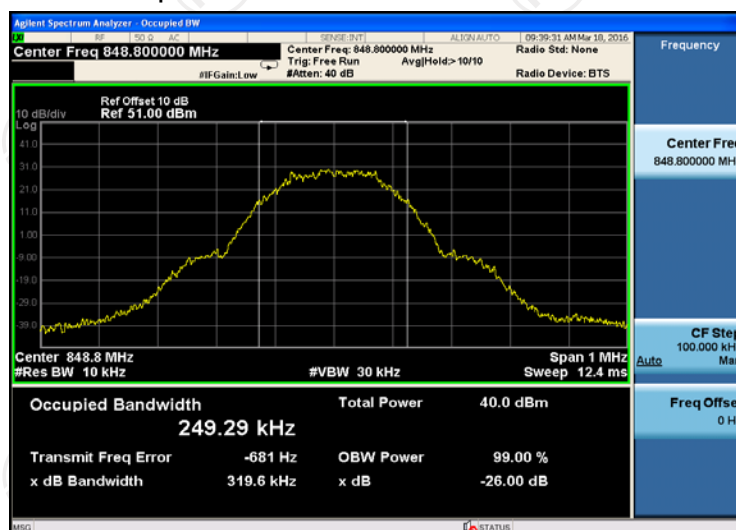


Band:

GPRS1900


Test Mode:

GPRS Class 8 Link
(8PSK)


Occupied Bandwidth Plot on Channel 512

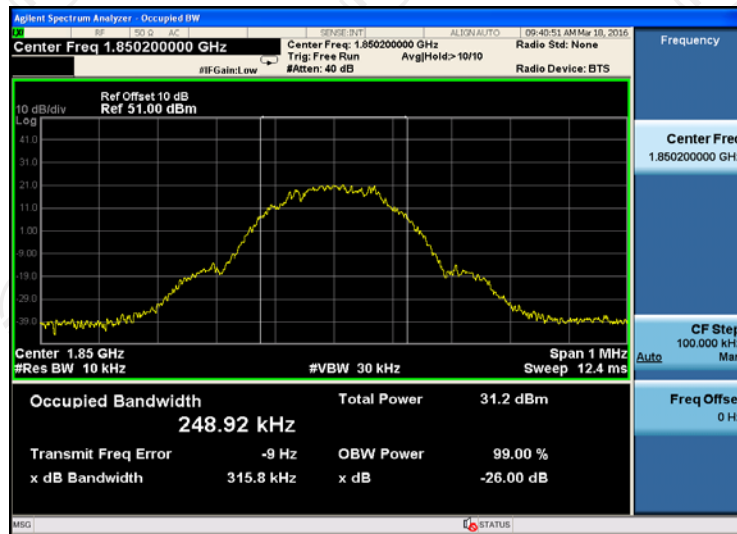

Occupied Bandwidth Plot on Channel 661

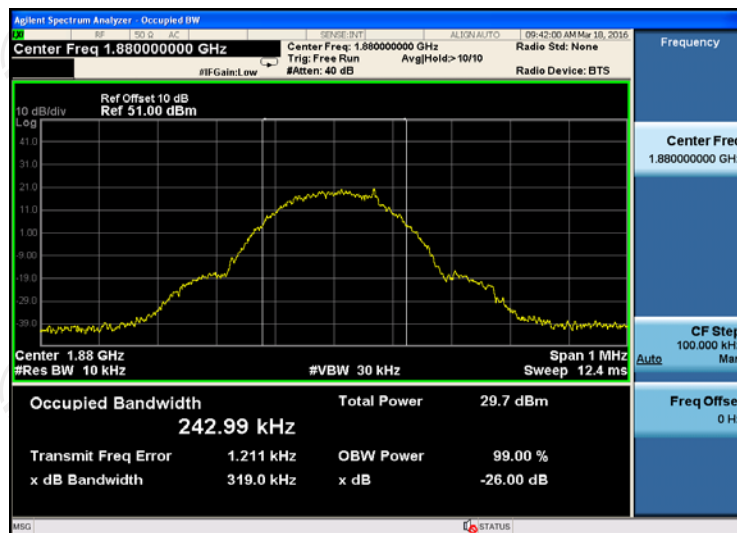


Occupied Bandwidth Plot on Channel 810

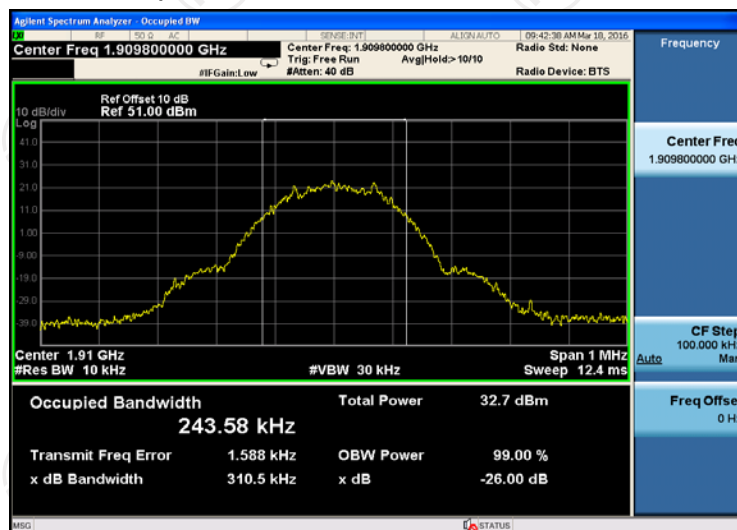

6.4. Band Edge and Conducted Spurious Emission Measurement

6.5. Test Specification

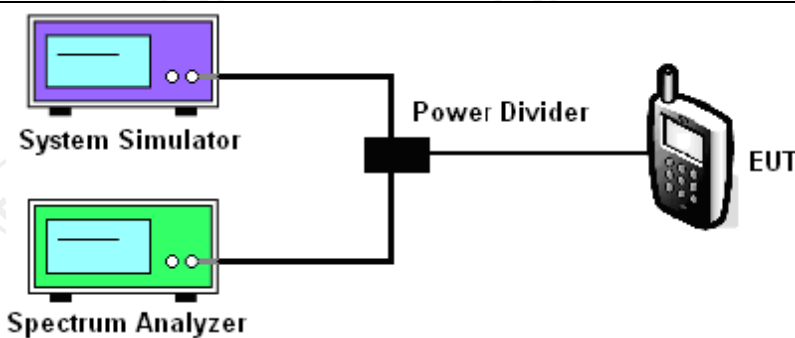Test Requirement:	FCC part22.917(a) and FCC part24.238(a)
Test Method:	FCC part2.1051
Operation mode:	Refer to item 4.1
Limit:	-13dBm
Test Setup:	 The diagram illustrates the test setup. A System Simulator (represented by a purple monitor icon) and a Spectrum Analyzer (represented by a green monitor icon) are connected to a central Power Divider (represented by a black square icon). The Power Divider is then connected to the EUT (Equipment Under Test, represented by a mobile phone icon).
Test Procedure:	1. The testing follows FCC KDB 971168 v02r02 Section 6.0. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The band edges of low and high channels for the highest RF powers were measured. 5. The conducted spurious emission for the whole frequency range was taken. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band. 7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power $P(\text{Watts}) = P(W) - [43 + 10\log(P)] \text{ (dB)} = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$
Test Result:	PASS

6.5.1. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Sep. 11, 2016
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.5.2. Test data


Test plots as follows:

Band:	GSM 850	Test Mode:	GSM Link (GMSK)
-------	---------	------------	-----------------

Lower Band Edge Plot on Channel 128

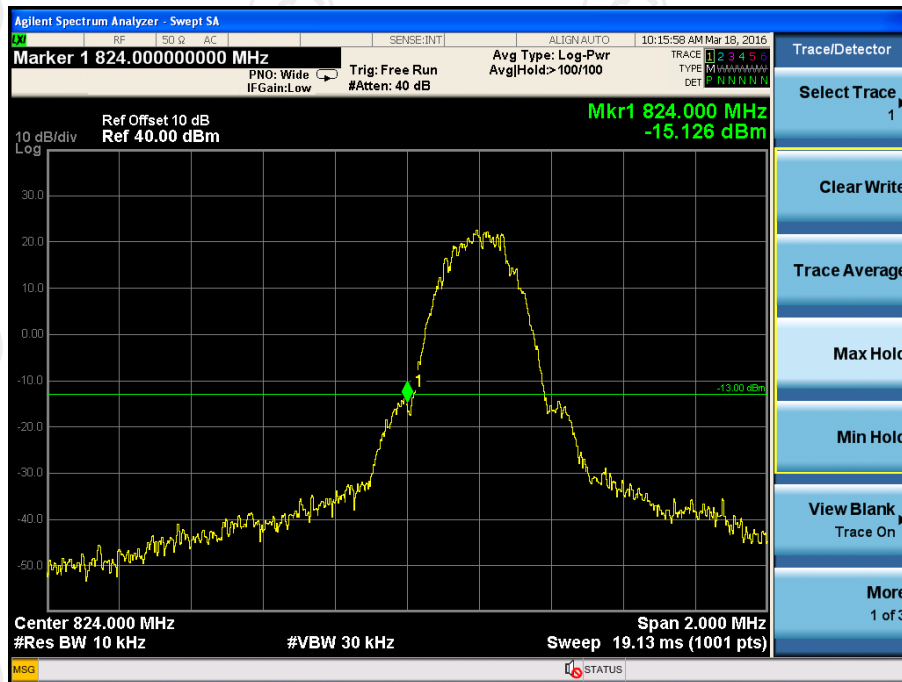

Higher Band Edge Plot on Channel 251

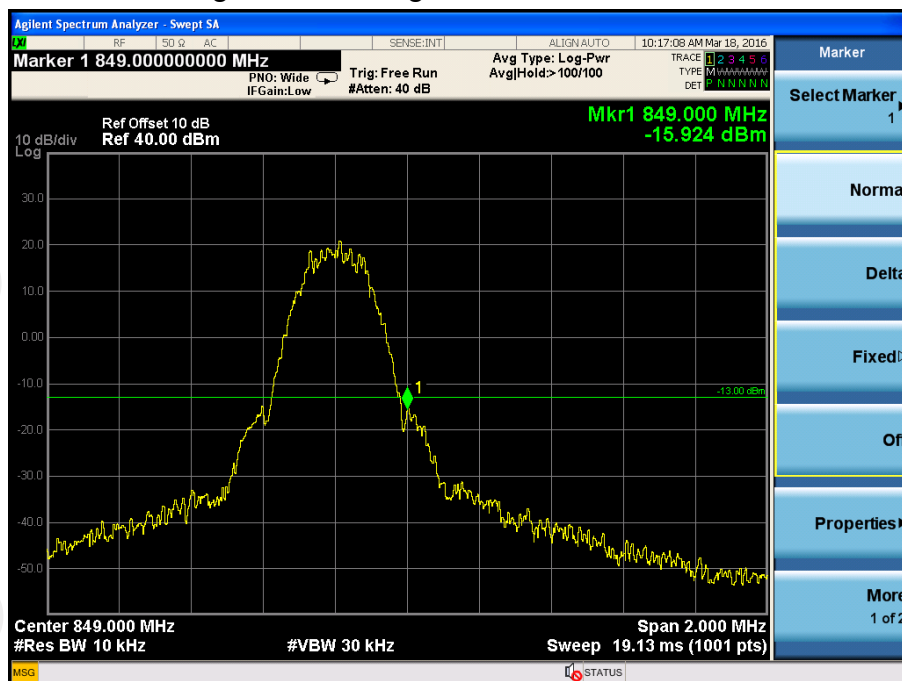


Band:

PCS1900


Test Mode:

GSM Link (GMSK)

Lower Band Edge Plot on Channel 512

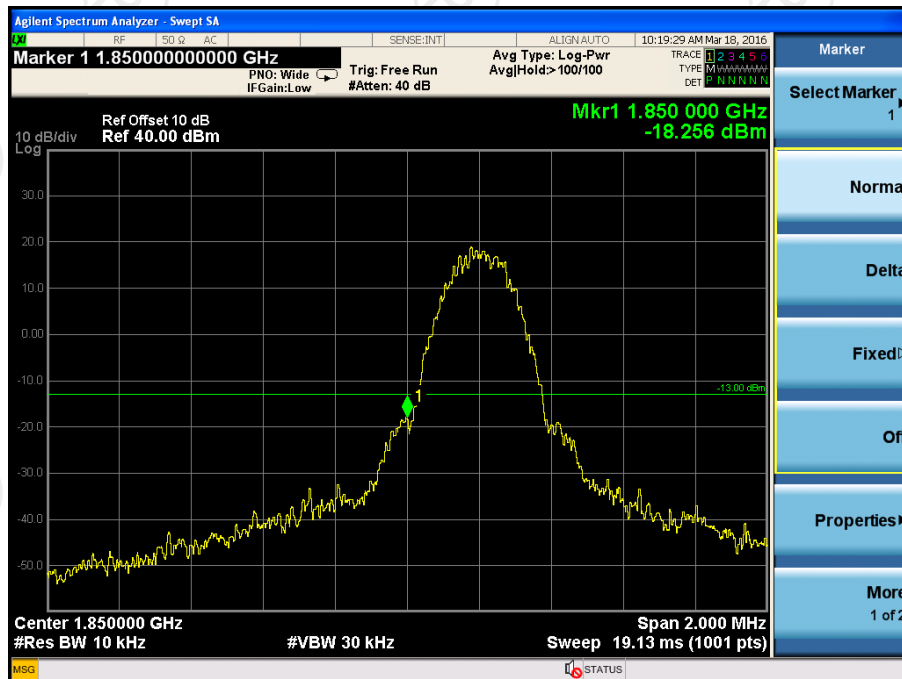


Higher Band Edge Plot on Channel 810

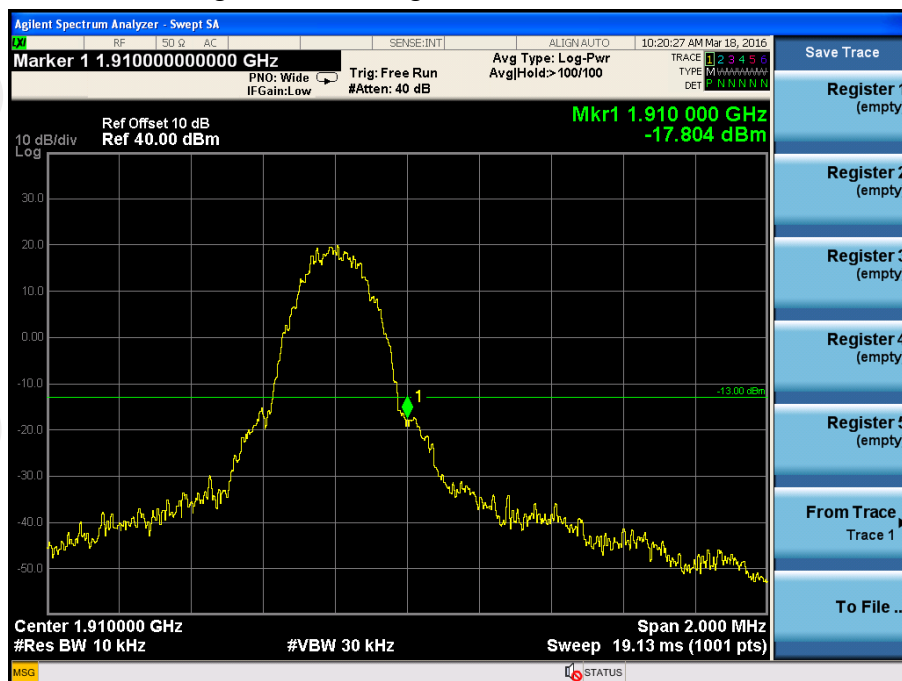


Band:	GPRS 850	Test Mode:	GPRS Class 8 Link (8PSK)
-------	----------	------------	--------------------------

Lower Band Edge Plot on Channel 128

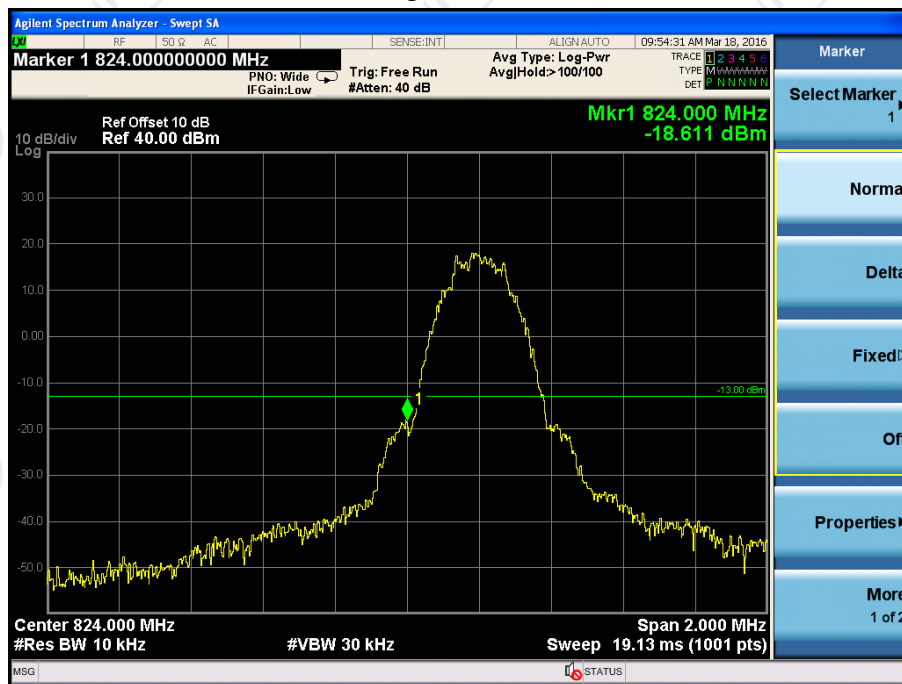

Higher Band Edge Plot on Channel 251

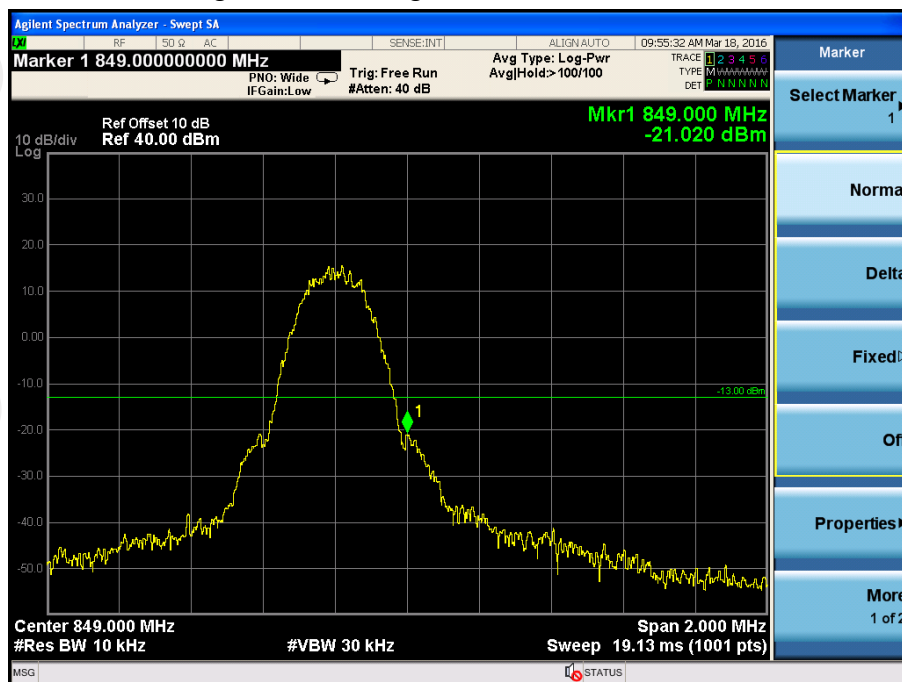


Band:	GPRS 1900	Test Mode:	GPRS Class 8 Link (8PSK)
-------	-----------	------------	--------------------------

Lower Band Edge Plot on Channel 512



Higher Band Edge Plot on Channel 810

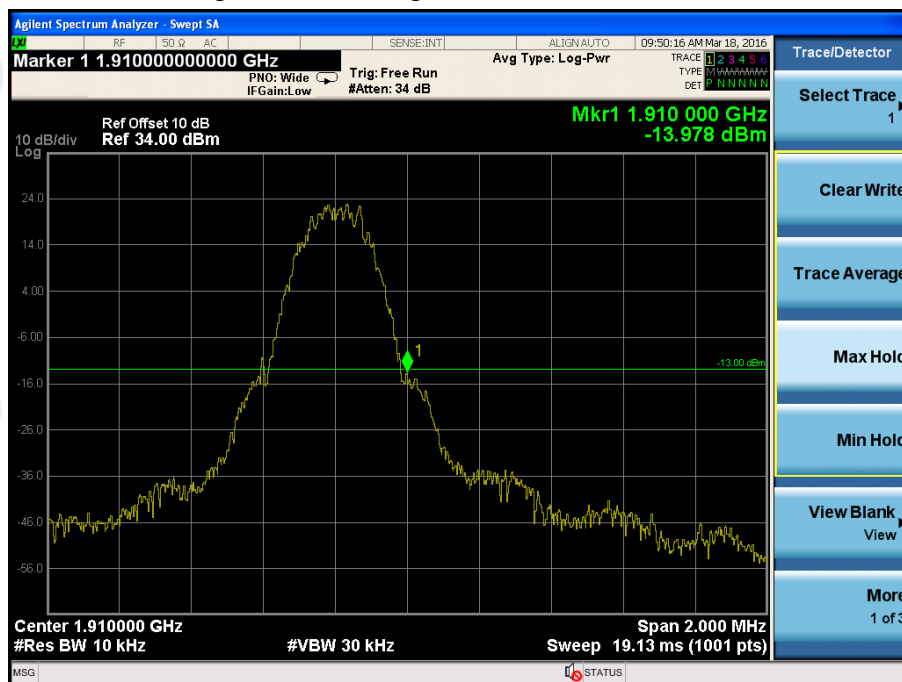


Band:

GSM 850


Test Mode:

GSM Link (GMSK)


Conducted Spurious Emission on Channel 128

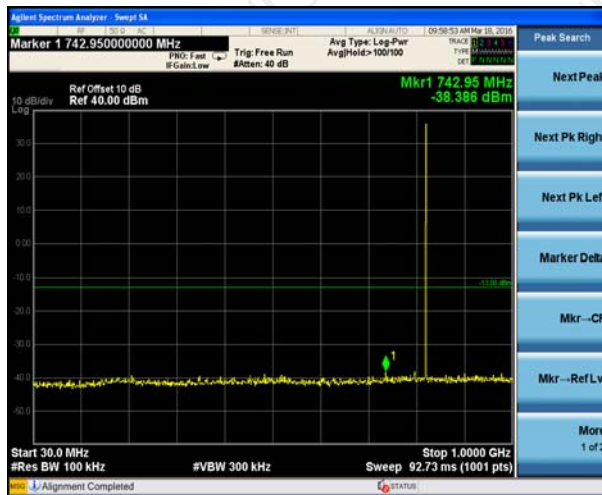

Conducted Spurious Emission on Channel 190

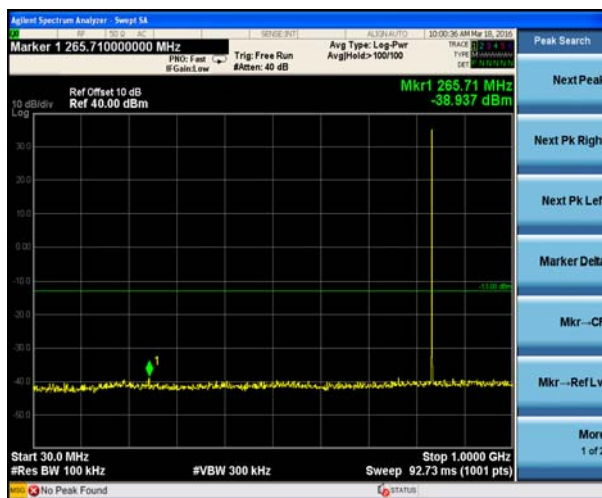

Conducted Spurious Emission on Channel 251

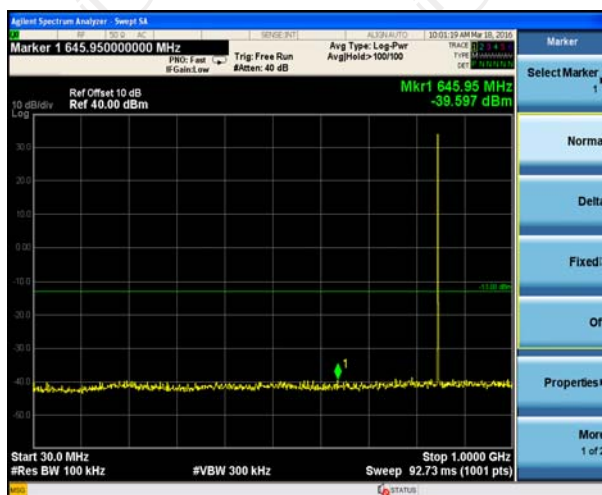


Band:

PCS 1900


Test Mode:

GSM Link (GMSK)



Conducted Spurious Emission on Channel 512

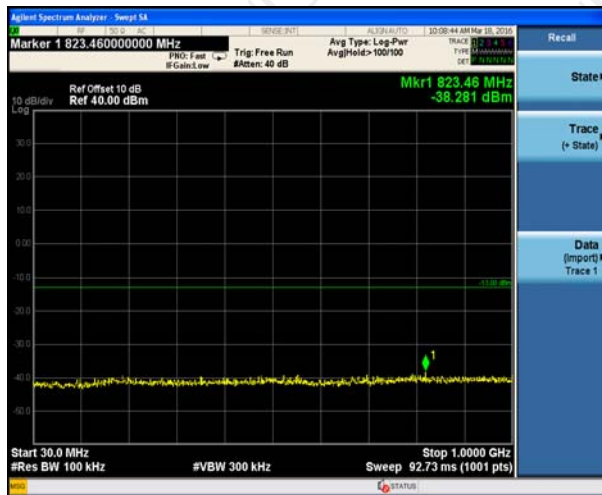

Conducted Spurious Emission on Channel 661

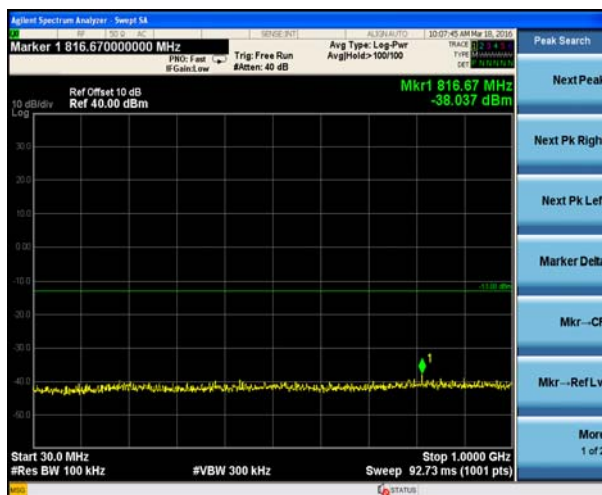

Conducted Spurious Emission on Channel 810

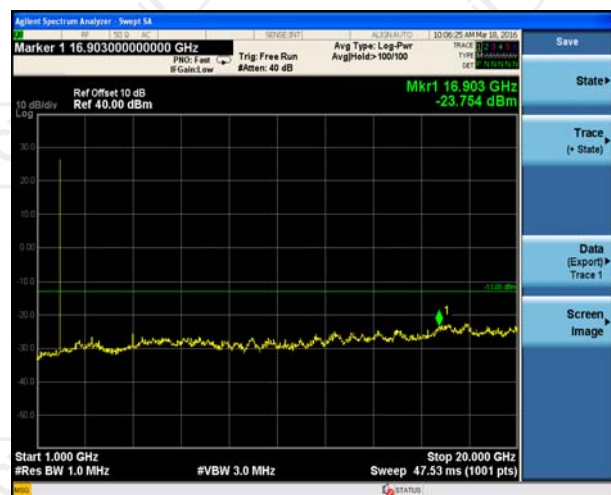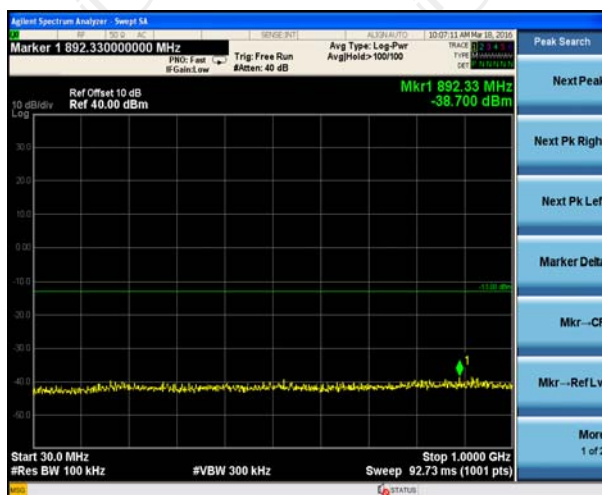


Band:

GPRS 850


Test Mode:

GPRS Class 8 Link
(GMSK)


Conducted Spurious Emission on Channel 128

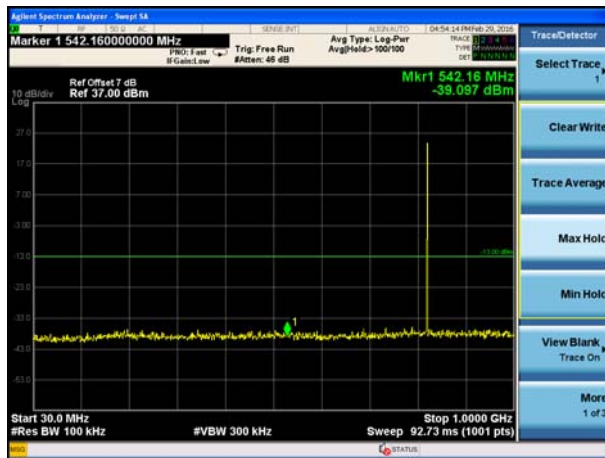

Conducted Spurious Emission on Channel 190

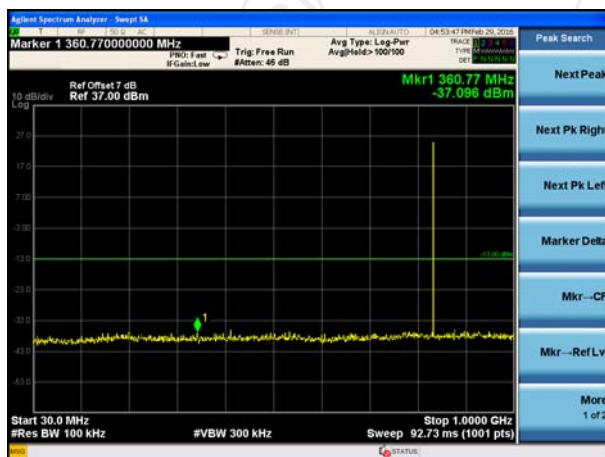

Conducted Spurious Emission on Channel 251

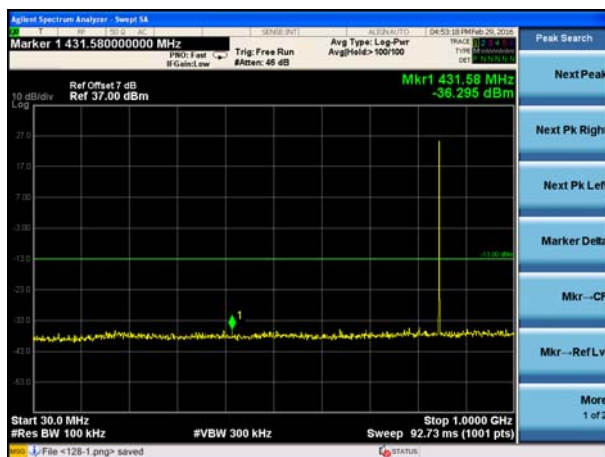


Band:

GPRS 1900


Test Mode:

GPRS Class 8 Link
(GMSK)


Conducted Spurious Emission on Channel 512

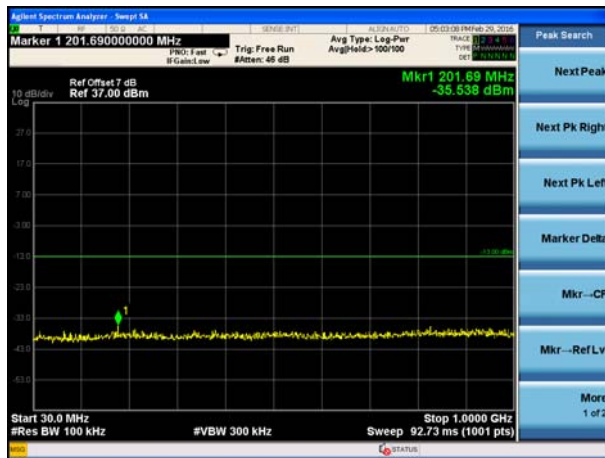

Conducted Spurious Emission on Channel 661

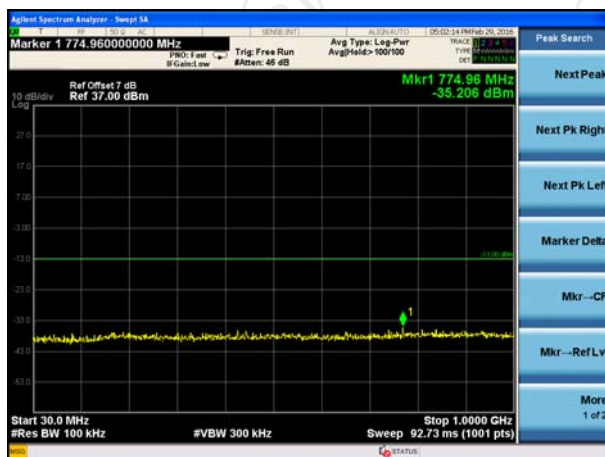



Conducted Spurious Emission on Channel 810

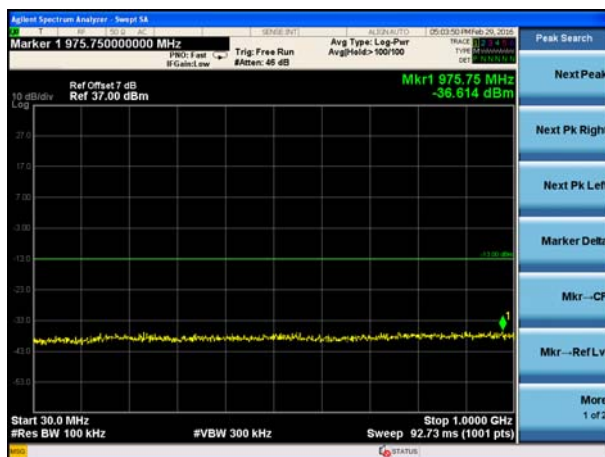

6.6. Effective Radiated Power and Effective Isotropic Radiated Power Measurement

6.6.1. Test Specification

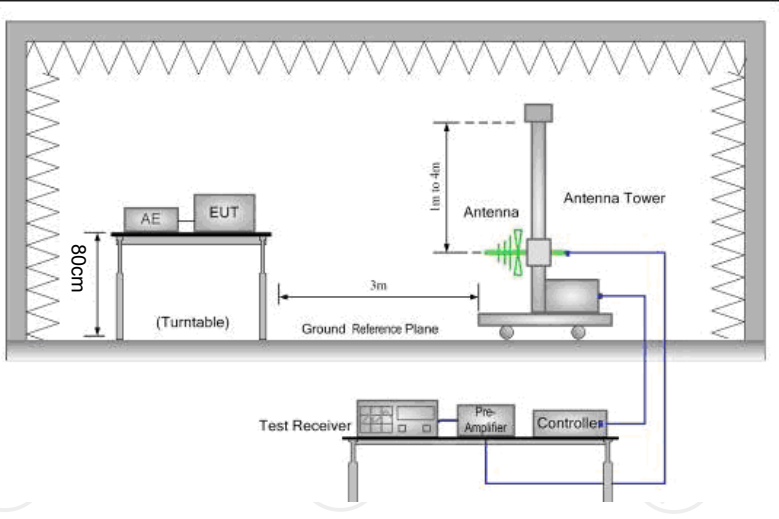Test Requirement:	FCC part 22.913(a) and FCC part 24.232(b)		
Test Method:	FCC part 2.1046		
Receiver Setup:		GSM/GPRS/EDGE	WCDMA/HSPA
	SPAN	500kHz	10MHz
	RBW	10kHz	100kHz
	VBW	30kHz	300kHz
	Detector	RMS	RMS
	Trace	Average	Average
	Average Type	Power	Power
	Sweep Count	100	100
Limit:	GSM850 7W ERP PCS1900 2W EIRP		
Test setup:	For ERP		
	 For EIRP		

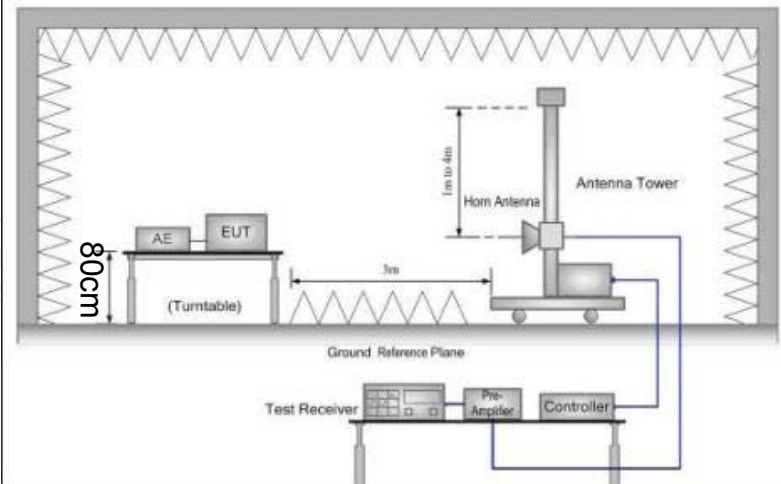

Test Procedure:

1. The testing follows FCC KDB 971168 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at the same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

Test results:

PASS

6.6.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESPI Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Sep. 11, 2016
Spectrum Analyzer	ROHDE&SCHW ARZ	FSEM	848597/001	Sep. 11, 2016
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 11, 2016
Pre-amplifier	HP	8447D	2727A05017	Sep. 11, 2016
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 13, 2016
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 13, 2016
Coax cable	TCT	RE-low-01	N/A	Sep. 11, 2016
Coax cable	TCT	RE-high-02	N/A	Sep. 11, 2016
Coax cable	TCT	RE-low-03	N/A	Sep. 11, 2016
Coax cable	TCT	RE-High-04	N/A	Sep. 11, 2016
Antenna Mast	CCS	CC-A-4M	N/A	Sep. 12, 2016
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.6.3. Test Data

Test Result of ERP

GSM850 (GSM) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.4	14.77	21.66	34.28	2.68
836.4	13.81	21.54	33.20	2.09
848.8	14.99	21.46	34.30	2.69
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.4	7.71	21.66	27.22	0.53
836.4	7.49	21.54	26.88	0.49
848.8	8.35	21.46	27.66	0.58

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

GSM850 (GPRS class 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.4	14.01	21.66	33.52	2.25
836.4	14.04	21.54	33.43	2.20
848.8	14.32	21.46	33.63	2.31
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.4	7.48	21.66	26.99	0.50
836.4	8.18	21.54	27.57	0.57
848.8	8.91	21.46	28.22	0.66

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

Test Result of EIRP

GSM1900 (GSM) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
1850.2	8.14	21.66	29.80	0.95
1880	8.26	21.54	29.80	0.96
1909.8	6.33	21.46	27.79	0.60
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
1850.2	1.92	21.66	23.58	0.23
1880	2.62	21.54	24.16	0.26
1909.8	2.66	21.46	24.12	0.26



$EIRP = LVL (dBm) + Correction Factor (dB)$

GSM1900 (GPRS class 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
1850.2	7.53	21.66	29.19	0.83
1880	8.04	21.54	29.58	0.91
1909.8	7.86	21.46	29.32	0.86
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
1850.2	1.67	21.66	23.33	0.22
1880	2.78	21.54	24.32	0.27
1909.8	2.64	21.46	24.10	0.26

* $EIRP = LVL (dBm) + Correction Factor (dB)$

6.7. Field Strength of Spurious Radiation Measurement

6.7.1. Test Specification

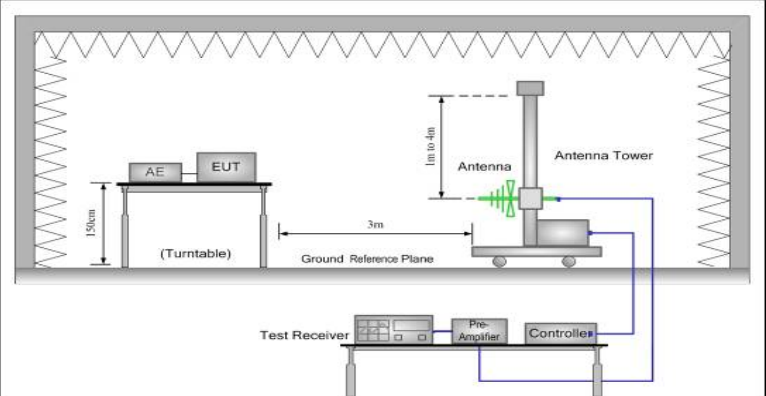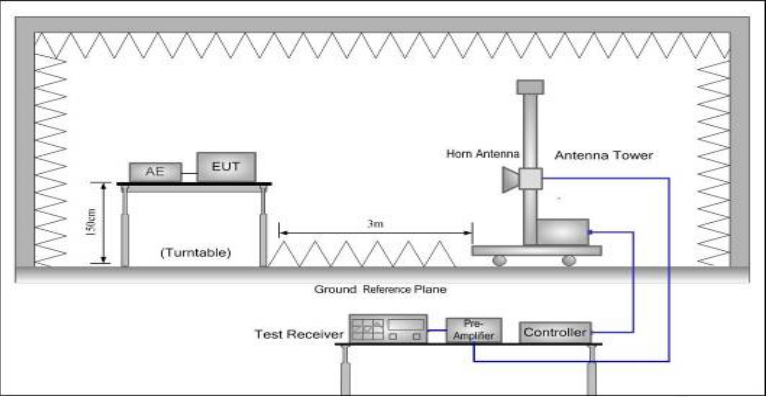Test Requirement:	FCC part 22.917(a) and FCC part 24.238(a)
Test Method:	FCC part 2.1053
Operation mode:	Refer to item 4.1
Limit:	-13dBm
Test setup:	For 30MHz~1GHz  Above 1GHz 
Test Procedure:	1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12. 2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground. 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower. 4. The table was rotated 360 degrees to determine the position of the highest spurious emission. 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations. 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of

	maximum spurious emission. 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. 9. Taking the record of output power at antenna port. 10. Repeat step 7 to step 8 for another polarization. 11. $EIRP\ (dBm) = S.G.\ Power - Tx\ Cable\ Loss + Tx\ Antenna\ Gain$ 12. $ERP\ (dBm) = EIRP - 2.15$ 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band. 14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts) $= P(W) - [43 + 10\log(P)]\ (dB)$ $= [30 + 10\log(P)]\ (dBm) - [43 + 10\log(P)]\ (dB)$ $= -13dBm.$
Test results:	PASS

6.7.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESPI Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Sep. 11, 2016
Spectrum Analyzer	ROHDE&SCHW ARZ	FSEM	848597/001	Sep. 11, 2016
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 11, 2016
Pre-amplifier	HP	8447D	2727A05017	Sep. 11, 2016
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 13, 2016
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 13, 2016
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 13, 2016
Horn Antenna	Schwarzbeck	BBHA 9170	373	Sep. 13, 2016
Coax cable	TCT	RE-low-01	N/A	Sep. 11, 2016
Coax cable	TCT	RE-high-02	N/A	Sep. 11, 2016
Coax cable	TCT	RE-low-03	N/A	Sep. 11, 2016
Coax cable	TCT	RE-High-04	N/A	Sep. 11, 2016
Antenna Mast	CCS	CC-A-4M	N/A	Sep. 12, 2016
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.7.3. Test Data

GSM Link Only:

Below 1GHz

Horizontal:

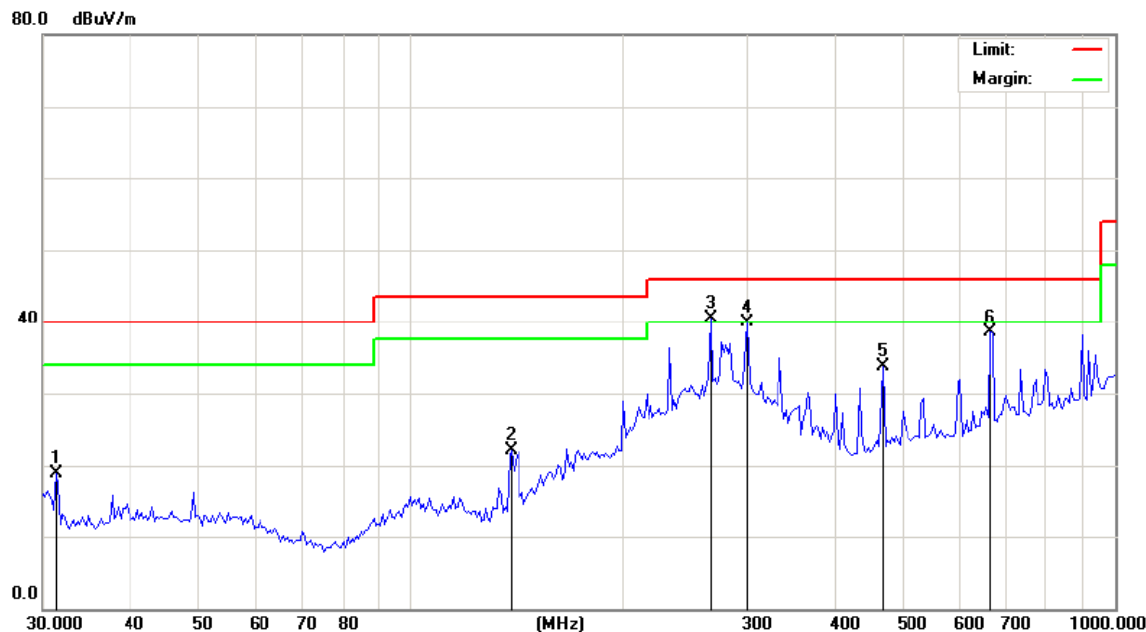

Site

Polarization: **Horizontal**

Temperature: 25


Limit: FCC Part 15B Class B RE_3 m

Power: DC 3.7V

Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.2920	32.47	-13.56	18.91	40.00	-21.09	peak	0	
2		138.8120	37.36	-15.35	22.01	43.50	-21.49	peak	0	
3	*	266.8395	49.88	-9.38	40.50	46.00	-5.50	peak	0	
4		300.6988	48.17	-8.25	39.92	46.00	-6.08	peak	0	
5		468.1650	37.78	-3.99	33.79	46.00	-12.21	peak	0	
6		665.2610	39.19	-0.59	38.60	46.00	-7.40	peak	0	

Vertical:

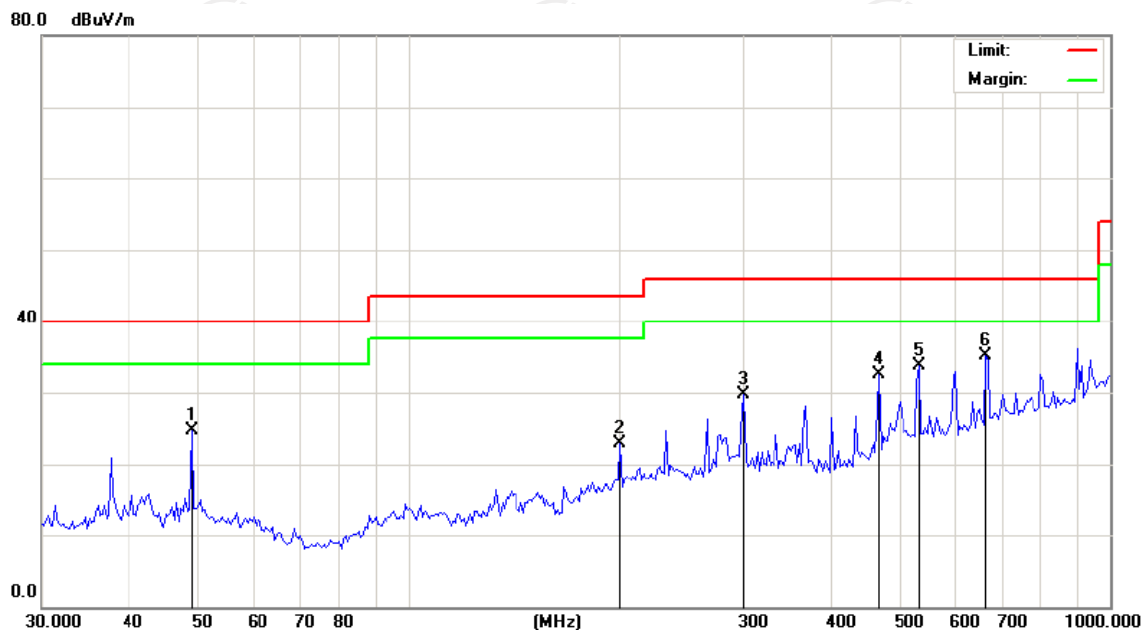

Site Polarization: **Vertical** Temperature: 25
Limit: FCC Part 15B Class B RE_3 m Power: DC 3.7V Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		49.0627	36.74	-12.08	24.66	40.00	-15.34	peak	0
2		200.0432	34.58	-11.67	22.91	43.50	-20.59	peak	0
3		300.6988	38.01	-8.25	29.76	46.00	-16.24	peak	0
4		468.1650	36.56	-3.99	32.57	46.00	-13.43	peak	0
5		535.0377	36.22	-2.60	33.62	46.00	-12.38	peak	0
6	*	665.2610	35.78	-0.59	35.19	46.00	-10.81	peak	0

Note: 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) of GSM850 and PCS1900, and the worst case Mode (Middle channel of GSM850) was submitted only.

Above 1GHz


Band	GSM850		Test channel:	Lowest
Test mode:	GSM Link (GMSK)		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1648.40	Vertical	-46.19	-13.00	PASS
2472.60	V	-39.48		
3296.80	V	-52.75		
1648.40	Horizontal	-41.68		
2472.60	H	-39.42		
3296.80	H	-52.89		
Band	GSM850		Test channel:	Middle
Test mode:	GSM Link (GMSK)		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-41.96	-13.00	PASS
2509.80	V	-45.42		
3346.40	V	-51.59		
1673.20	Horizontal	-41.95		
2509.80	H	-40.58		
3346.40	H	-51.34		
Band	GSM850		Test channel:	Highest
Test mode:	GSM Link (GMSK)		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1697.60	Vertical	-41.23	-13.00	PASS
2546.40	V	-44.38		
3395.20	V	-52.73		
1697.60	Horizontal	-41.24		
2546.40	H	-40.95		
3395.20	H	-52.16		

Band	GSM 1900		Test channel:	Lowest
Test mode:	GSM Link (GMSK)		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3700.40	Vertical	-46.71	-13.00	PASS
5550.60	V	-38.79		
7400.80	V	-51.09		
3700.40	Horizontal	-43.41		
5550.60	H	-38.04		
7400.80	H	-51.67		
Test mode:	GSM 1900		Test channel:	Middle
Test mode:	GSM Link (GMSK)		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-41.75	-13.00	PASS
5640.00	V	-45.00		
7520.00	V	-52.03		
3760.00	Horizontal	-42.64		
5640.00	H	-39.29		
7520.00	H	-51.90		
Test mode:	GSM 1900		Test channel:	Highest
Test mode:	GSM Link (GMSK)		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3819.60	Vertical	-40.12	-13.00	PASS
5729.40	V	-44.68		
7639.20	V	-51.72		
3819.60	Horizontal	-40.99		
5729.40	H	-40.73		
7639.20	H	-52.35		

GSM Link with BT Transmitting:

Below 1GHz

Horizontal:

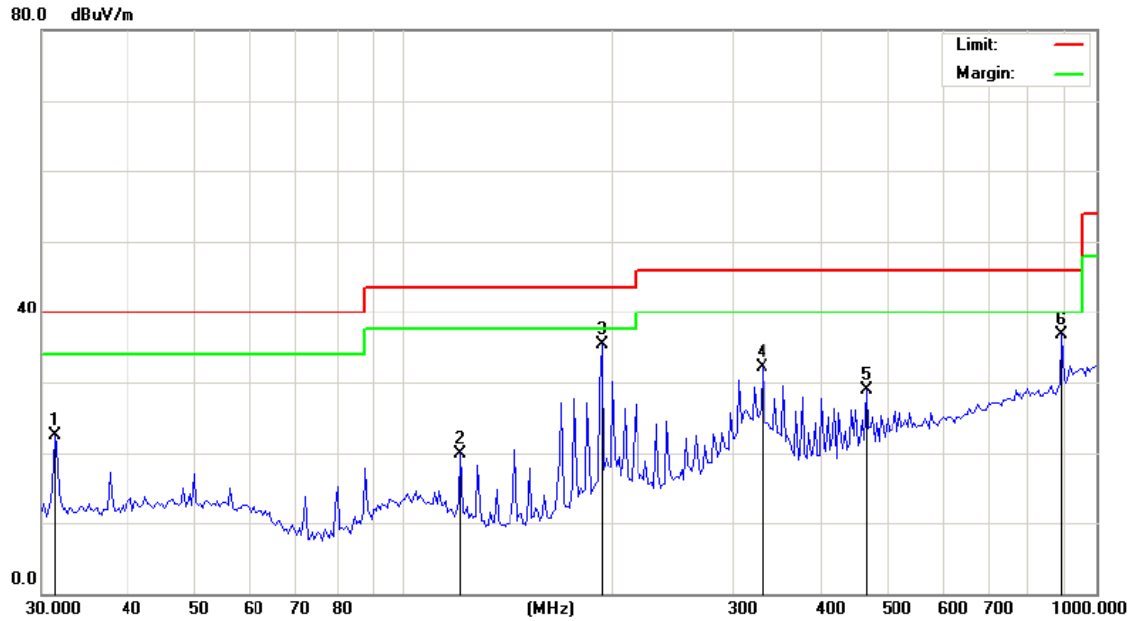

Site

Polarization: **Horizontal**

Temperature: 25


Limit: FCC Part 15B Class B RE_3 m

Power: DC 5V

Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		31.2920	36.03	-13.56	22.47	40.00	-17.53	peak		0
2		120.6118	33.74	-13.74	20.00	43.50	-23.50	peak		0
3	*	193.1366	47.47	-12.15	35.32	43.50	-8.18	peak		0
4		329.4625	39.66	-7.64	32.02	46.00	-13.98	peak		0
5		464.8867	33.01	-4.10	28.91	46.00	-17.09	peak		0
6		893.6557	34.11	2.60	36.71	46.00	-9.29	peak		0

Vertical:

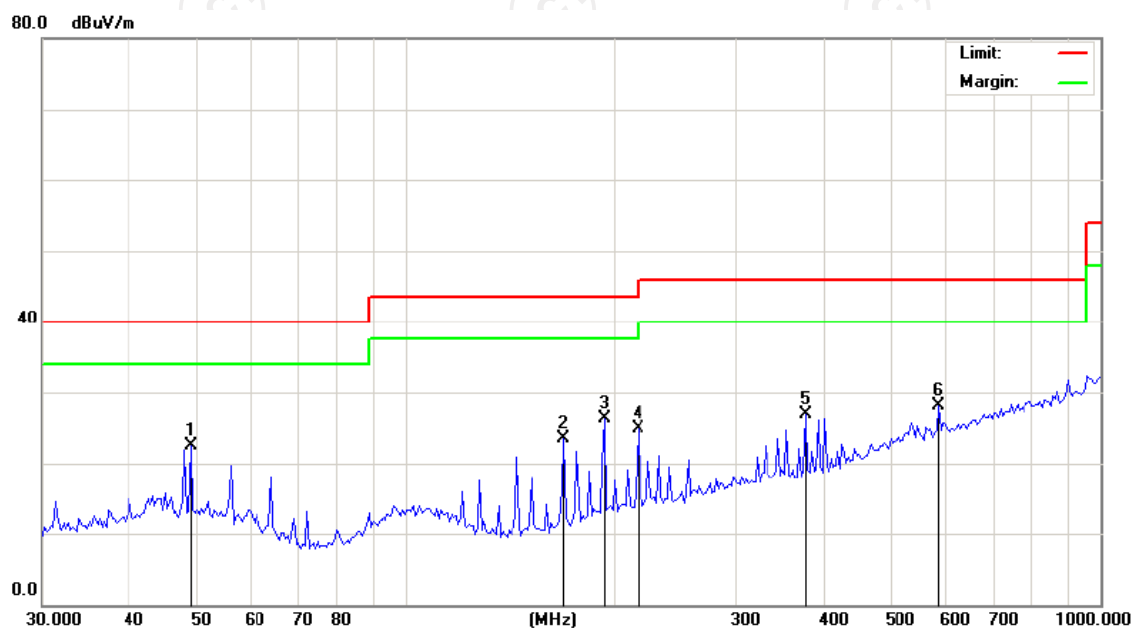

Site

Polarization: **Vertical**

Temperature: 25

Limit: FCC Part 15B Class B RE_3 m

Power: DC 5V

Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		49.0627	34.56	-12.08	22.48	40.00	-17.52	peak	0
2		168.9970	37.30	-13.83	23.47	43.50	-20.03	peak	0
3	*	193.1366	38.38	-12.15	26.23	43.50	-17.27	peak	0
4		216.1197	36.00	-11.12	24.88	46.00	-21.12	peak	0
5		376.5227	33.65	-6.67	26.98	46.00	-19.02	peak	0
6		586.2172	30.18	-2.08	28.10	46.00	-17.90	peak	0

Note: 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) of GSM850 and PCS1900, and the worst case Mode (Middle channel of GSM850) was submitted only.


Above 1GHz

Band	GSM850		Test channel:	Lowest
Test mode:	GSM Link (GMSK)		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1648.40	Vertical	-45.26	-13.00	PASS
2472.60	V	-38.47		
3296.80	V	-50.91		
1648.40	Horizontal	-40.27		
2472.60	H	-37.12		
3296.80	H	-51.64		
Band	GSM850		Test channel:	Middle
Test mode:	GSM Link (GMSK)		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-40.18	-13.00	PASS
2509.80	V	-44.64		
3346.40	V	-50.78		
1673.20	Horizontal	-40.11		
2509.80	H	-39.37		
3346.40	H	-50.19		
Band	GSM850		Test channel:	Highest
Test mode:	GSM Link (GMSK)		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1697.60	Vertical	-40.05	-13.00	PASS
2546.40	V	-42.74		
3395.20	V	-51.94		
1697.60	Horizontal	-40.31		
2546.40	H	-38.66		
3395.20	H	-51.74		

Band	GSM 1900		Test channel:	Lowest
Test mode:	GSM Link (GMSK)		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3700.40	Vertical	-44.15	-13.00	PASS
5550.60	V	-37.26		
7400.80	V	-50.14		
3700.40	Horizontal	-41.89		
5550.60	H	-37.44		
7400.80	H	-50.34		
Test mode:	GSM 1900		Test channel:	Middle
Test mode:	GSM Link (GMSK)		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-40.94	-13.00	PASS
5640.00	V	-43.81		
7520.00	V	-51.22		
3760.00	Horizontal	-41.49		
5640.00	H	-38.32		
7520.00	H	-50.17		
Test mode:	GSM 1900		Test channel:	Highest
Test mode:	GSM Link (GMSK)		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3819.60	Vertical	-38.15	-13.00	PASS
5729.40	V	-43.46		
7639.20	V	-50.84		
3819.60	Horizontal	-39.62		
5729.40	H	-39.48		
7639.20	H	-51.34		

6.8. Frequency Stability Measurement

6.8.1. Test Specification

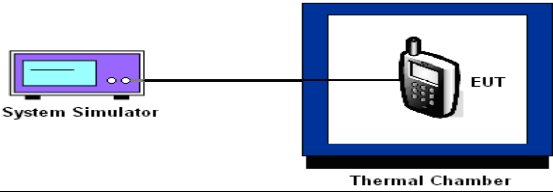Test Requirement:	FCC Part 2.1055(a)(1)(b)
Test Method:	FCC Part 2.1055(a)(1)(b)
Operation mode:	Refer to item 4.1
Limit:	± 2.5 ppm
Test Setup:	 The diagram illustrates the test setup. A 'System Simulator' is connected via a cable to an 'EUT' (Equipment Under Test) which is placed inside a 'Thermal Chamber'.
Test Procedure:	Test Procedures for Temperature Variation 1. The testing follows FCC KDB 971168 v02r02 Section 9.0. 2. The EUT was set up in the thermal chamber and connected with the system simulator. 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute. 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute. Test Procedures for Voltage Variation 1. The testing follows FCC KDB 971168 v02r02 Section 9.0. 2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator. 3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT. 4. The variation in frequency was measured for the worst case.
Test Result:	PASS

6.8.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Sep. 11, 2016

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.8.3. Test Data

Test Result of Temperature Variation

Band :	GSM 850	Channel:	190
Limit (ppm) :	2.5ppm	Frequency:	836.6MHz
Temperature (°C)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
50	15	0.018	PASS
40	27	0.032	
30	10	0.012	
20	28	0.033	
10	31	0.036	
0	33	0.039	
-10	30	0.035	
-20	34	0.040	
-30	30	0.035	

Band :	GSM 1900	Channel:	661
Limit (ppm) :	Note	Frequency:	1880MHz
Temperature (°C)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
50	38	0.020	PASS
40	39	0.021	
30	34	0.018	
20	34	0.018	
10	27	0.014	
0	13	0.007	
-10	28	0.015	
-20	16	0.008	
-30	31	0.016	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH190	GSM	4.2	0.021	2.5	PASS
		3.7	0.025		
		BEP	0.020		
PCS 1900 CH661	GSM	4.2	0.021	(Note 3.)	
		3.7	0.022		
		BEP	0.018		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.5 V.
3. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

*******END OF REPORT*******