

FCC PART 22H, PART 24E TEST REPORT

For

Rope Innovation Co.,Ltd

Room 306-309, Floor 3rd, NO.1 Idea Bank of TGK Technology Park, Chuangye Road 2, Bao'an, Shenzhen, China

FCC ID:2AHRQGPSM508-598

Report Type: Original Report		Product Type: GPS Vehicle Tracker
Test Engineer:	Vincent Zheng	Vincent Zheng
Report Number:	RSZ160614002-0	00B
Report Date:	2016-06-29	
	Rocky Kang	Rocky Kang
Reviewed By:	RF Engineer	
Prepared By:	6/F, the 3rd Phase	320018 320008

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	3
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
SOUTH ART OF TEST RESULTS	······································
FCC§1.1307 (B) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	7
APPLICABLE STANDARD	7
RESULT	
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER	8
APPLICABLE STANDARD	
Test Procedure	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	
FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS	11
APPLICABLE STANDARDS	
Test Procedure	
TEST EQUIPMENT LIST AND DETAILS	
	12

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Rope Innovation Co.,Ltd*'s product, model number: M508(*FCC ID: 2AHRQGPSM508-598*) or the "EUT" in this report was a *GPS Vehicle Tracker*, which was measured approximately: 9.6cm (L) x 7.6 cm (W) x 2.7 cm (H).

Report No.: RSZ160614002-0B

Note: The product, series modelM508-M598 is electrically identical with the model M508, which was selected for fully testing, they are just different in model name, which was explained in the attached declaration letter.

*All measurement and test data in this report was gathered from production sample serial number: 1602508 (Assigned by Shenzhen BACL). The EUT supplied by the applicant was received on 2016-06-14.

Objective

This test report is prepared on behalf of *Rope Innovation Co.,Ltd* in accordance with Part 2-Subpart J, Part 22-Subpart H and Part 24-Subpart E of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D, ANSI C63.4-2014.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.81 dB for 30MHz-1GHz.and 4.88 dB for above 1GHz, 1.95dB for conducted measurement.

FCC Part 22H/24E Page 3 of 13

Test Facility

The test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Report No.: RSZ160614002-0B

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2013. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 22H/24E Page 4 of 13

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

Equipment Modifications


No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	

Report No.: RSZ160614002-0B

Block Diagram of Test Setup

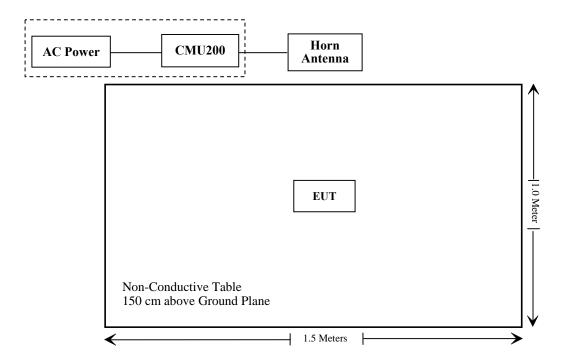

FCC Part 22H/24E Page 5 of 13

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1091	MaximuM Permissible exposure (MPE)	Compliance
\$2.1046; \$ 22.913 (a); \$ 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Bandwidth	Compliance*
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance*
\$ 2.1053 \$ 22.917 (a); \$ 24.238 (a)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance*
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance*

Report No.: RSZ160614002-0B

 $Compliance*: Please \ refer \ to \ the \ module \ report \ with \ FCC \ ID: \ XMR201202M35 \ grant \ on \ 2012-06-11, \ which \ tested \ by \ Siemic \ Inc.$

FCC Part 22H/24E Page 6 of 13

FCC§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Report No.: RSZ160614002-0B

Applicable Standard

According to subpart 1.1310 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure									
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)					
0.3-1.34	614	1.63	*(100)	30					
1.34-30	824/f	2.19/f	$*(180/f^2)$	30					
30-300	27.5	0.073	0.2	30					
300-1500	/	/	f/1500	30					
1500-100,000	/	/	1.0	30					

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm2)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency	Antenna Gain		Tune up Power		Evaluation	Power	MPE Limit	
(MHz)	(dBi)	(numeric)	(dBm)	(mW)	Distance (cm)	Density (mW/cm ²)	(mW/cm ²)	
824-849	5	3.16	35	3162	50	0.318	0.5	
1850-1910	5	3.16	32	1585	50	0.160	1.0	

Note: To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 50cm from nearby persons.

Result: Compliance

FCC Part 22H/24E Page 7 of 13

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

Applicable Standard

According to FCC $\S 2.1046$ and $\S 22.913$ (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.


Report No.: RSZ160614002-0B

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.



Radiated method:

TIA 603-D section 2.2.17

FCC Part 22H/24E Page 8 of 13

Test Equipment List and Details

Manufacturer	Description	Model Serial Number		Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-12-15	2016-12-14
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
НР	Synthesized Sweeper	HP 8341B	2624A00116	2015-07-02	2016-07-01
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
Ducommun technologies	RF Cable	UFA210A-1- 4724-30050U	MFR64369 223410-001	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	104PEA	218124002	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	RG-214	1	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	RG-214	2	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	RG-214	3	2016-06-15	2017-06-15
WEINSCHEL	10dB Attenuator	5324	AU0709	2016-06-18	2017-06-18

Report No.: RSZ160614002-0B

Test Data

Environmental Conditions

Temperature:	26 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2016-06-28.

FCC Part 22H/24E Page 9 of 13

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Conducted Power

Note: The data Please refer to the module report with FCC ID: XMR201202M35 grant on 2012-06-11, which tested by Siemic Inc.

Report No.: RSZ160614002-0B

Radiated Power

GSM Mode:

Receiver	Turntable	Rx Antenna		Substituted			Absolute	FCC Part 22H/24E		
Frequency (MHz)	requency Reading Angl	Angle Degree	Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	ERP for Cellular Band (Part 22H), Middle Channel									
836.6	93.72	350	1.7	Н	27.0	0.30	0.0	26.70	38.45	11.75
836.6	96.83	210	2.0	V	30.1	0.30	0.0	29.80	38.45	8.65
	EIRP for PCS Band (Part 24E), Middle Channel									
1880.00	86.67	179	1.3	Н	18.0	1.40	7.30	23.90	33	9.10
1880.00	90.93	355	1.9	V	21.7	1.40	7.30	27.60	33	5.40

Note:

All above data were tested with no amplifier. Absolute Level = SG Level - Cable loss + Antenna Gain Margin = Limit- Absolute Level

FCC Part 22H/24E Page 10 of 13

FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

Report No.: RSZ160614002-0B

Applicable Standards

FCC § 2.1053, §22.917 and § 24.238.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in $dB = 10 \lg (TX \text{ pwr in Watts}/0.001) - \text{the absolute level}$

Spurious attenuation limit in $dB = 43 + 10 \text{ Log}_{10}$ (power out in Watts)

FCC Part 22H/24E Page 11 of 13

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2016-04-23	2017-04-23
НР	Amplifier	HP8447E	1937A01046	2016-05-06	2017-05-06
НР	Signal Generator	HP 8341B	2624A00116	2015-07-02	2016-07-01
COM POWER	M POWER Dipole Antenna		041000	2015-08-18	2016-08-18
A.H. System	H. System Horn Antenna		SAS-200/571 135		2018-08-17
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-12-15	2016-12-14
the electro- Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
Ducommun technologies	RF Cable	UFA210A-1- 4724-30050U	MFR64369 223410-001	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	104PEA	218124002	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	RG-214	1	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	RG-214	2	2016-06-15	2017-06-15

Report No.: RSZ160614002-0B

Test Data

Environmental Conditions

Temperature:	24 ℃
Relative Humidity:	54%
ATM Pressure:	101.0kPa

The testing was performed by Vincent Zheng on 2016-06-28.

FCC Part 22H/24E Page 12 of 13

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and the worse case data as below)

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Report No.: RSZ160614002-0B

Frequency (MHz) Receiver Reading Angle (dBμV) Receiver Durntable Angle Degree	Pacaivar Turntal	Turntable	Rx Antenna		Substituted			Absolute		
	Angle	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	
156.66	33.85	47	1.7	Н	-63.1	0.27	0	-63.37	-13	50.37
156.66	34.27	125	1.2	V	-62.7	0.27	0	-62.97	-13	49.97
1673.20	61.32	48	1.5	Н	-46.1	1.60	6.90	-40.80	-13	27.80
1673.20	59.83	264	2.4	V	-48.0	1.60	6.90	-42.70	-13	29.70
2509.80	47.53	132	1.3	Н	-57.1	1.70	8.60	-50.20	-13	37.20
2509.80	46.39	24	1.4	V	-58.5	1.70	8.60	-51.60	-13	38.60

PCS Band (Part 24E)

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute		
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
156.66	33.92	121	2.4	Н	-63.1	0.27	0	-63.37	-13	50.37
156.66	35.93	326	2.5	V	-61.1	0.27	0	-61.37	-13	48.37
3760.00	42.74	111	1.6	Н	-56.7	1.90	9.90	-48.70	-13	35.70
3760.00	38.58	230	1.8	V	-60.5	1.90	9.90	-52.50	-13	39.50

Note:

1) Absolute Level = SG Level - Cable loss + Antenna Gain

2) Margin = Limit- Absolute Level

***** END OF REPORT *****

FCC Part 22H/24E Page 13 of 13