



FCC TEST REPORT

Applicant	IotGizmo Corporation				
Address	255 Old New Brunswick, Suite N	N330, Piscataway, New Jersey, United States 08854			
Manufacturer or Supplier	Earda Technologies Co., Ltd	Earda Technologies Co., Ltd			
Address	Block A, LianFeng Creative Indu Town,Nansha District, Guangzh	ustry Park,NO.2 JiSheng Road, HuangGe ou, PRC.			
Product	Smart Dimming Light Switch				
Brand Name	Touch Dimmer				
Model	D6932				
Additional Model & Model Difference	DSCR32 , See items 3.1				
Date of tests	Jan. 24~26, 2019				
The submitted sampl following standards:	The submitted sample of the above equipment has been tested for according to the requirements of the following standards:				
CONCLUSION: The	submitted sample was found to	o COMPLY with the test requirement			
Tested by Evans He Project Engineer / EMC Department Approved by David Huang Supervisor / EMC Department					
mas. He		David Huang			
Date: Jan. 30, 2019					
This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at					

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



Table of Contents

RELE	ASE CONTROL RECORD	3
1 1.1	SUMMARY OF TEST RESULTSMEASUREMENT UNCERTAINTY	
2 2.1 2.2 2.3	GENERAL INFORMATION	5 6
3 3.1 3.1.1 3.1.2	EMISSION TESTCONDUCTED EMISSION MEASUREMENTLIMITS OF CONDUCTED EMISSION MEASUREMENTTEST INSTRUMENTS	7 7
3.1.3 3.1.4 3.1.5 3.1.6	TEST PROCEDURE DEVIATION FROM TEST STANDARD TEST SETUP EUT OPERATING CONDITIONS	8 9
3.1.7 3.2 3.2.1	TEST RESULTSRADIATED EMISSION MEASUREMENTLIMITS OF RADIATED EMISSION MEASUREMENT	10 12 12
3.2.2 3.2.3 3.2.4 3.2.5	TEST INSTRUMENTS TEST PROCEDURE DEVIATION FROM TEST STANDARD TEST SETUP	15 16 17
3.2.6 3.2.7 3.2.8	EUT OPERATING CONDITIONS TEST RESULTS (BELOW 1GHz) TEST RESULTS (ABOVE 1GHz)	18 20
4 5	PHOTOGRAPHS OF THE TEST CONFIGURATION	



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FS190315N012	Original release	Jan. 30, 2019

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD					
Standard Section	Test Item Result		Remark		
FCC Part 15, Subpart B, Class B (sDoC)	Conducted test	PASS	Meets limits minimum passing margin is -2.42dB at 0.5439MHz		
	Radiated Emission Test (30MHz ~ 1GHz)	PASS	Meets limits minimum passing margin is -4.24dB at 319.9370MHz		
	Radiated Emission Test (Above 1GHz)	PASS	Meets limits minimum passing margin is -25.55dB at 1594.41MHz		

Remark 1: Please refer to FCC part 2 2.1077 for sDoC compliance information requirement

Remark 2: Test Lab Information:

Lab: Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

Test Lab Address: Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District Shenzhen, Guangdong, 518108, People's Republic of China

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emission test	0.15MHz ~ 30MHz	+/-3.11 dB
Dedicted enviseigns	30MHz ~ 1GHz	+/-5.12dB
Radiated emissions	Above 1GHz	+/-5.34dB

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Smart Dimming Light Switch
MODEL NO.	D6932
ADDITIONAL MODEL	DSCR32
POWER SUPPLY	AC 100-240V
CABLE SUPPLIED	AC line: Unshielded, Non-detachable, 0.3m.
THE HIGHEST OPERATING FREQUENCY	2.4GHz

NOTE:

- 1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2. For the test results, the EUT had been tested with all conditions, but only the worst case was shown in test report.
- 3. Please refer to the EUT photo document (Reference No.: 190315N012) for detailed product photo.
- 4. Additional models (see above table) are identical with the test model D6932 except it has LCD display, capacitive touch panel and model name for trading purpose, so, based on the differences, we will retest the "AC Power Line Conducted Emissions and Radiated Emissions" test data, others test data please refer to 18071115-FCC-E report.

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080

2.2 DESCRIPTION OF TEST MODES

The EUT were tested under the following modes, the final worst mode was marked in boldface and recorded in this report.

CONDUCTED EMISSION TEST:

DESCRIPTION OF TEST MODE	TEST VOLTAGE	
Normal Woking	AC 120/240V	

RADIATED EMISSION TEST (BELOW 1GHZ):

DESCRIPTION OF TEST MODE	TEST VOLTAGE	
Normal Woking	AC 120/240V	

RADIATED EMISSION TEST (ABOVE1GHZ):

DESCRIPTION OF TEST MODE	TEST VOLTAGE	
Normal Woking	AC 120/240V	

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Lamp	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS	
1	N/A	

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



3 EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107)

EDECLIENCY (MU-)	Class A (dBuV)		Class B (dBuV)	
FREQUENCY (MHz)	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCS30	8471241027	Jan. 04,19	Jan. 04,20
Artificial Mains Network	SCHWARZBECK	HWARZBECK 8127		Jan. 04,19	Jan. 04,20
ISN	Com-Power	ISN T800	34373	Jan. 04,19	Jan. 04,20
Test software	EZ-EMC	ICP-03A1	N/A	N/A	N/A

NOTE: 1. The test was performed CE shielded room...

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080

^{2.} The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2014 (section 7).

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit 20dB) were not recorded.

NOTE:

- 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. Margin value = Emission level Limit value
- 4. Correction factor = Insertion loss + Cable loss
- 5. Emission Level = Correction Factor + Reading Value


3.1.4 DEVIATION FROM TEST STANDARD

No deviation.

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



3.1.5 TEST SETUP

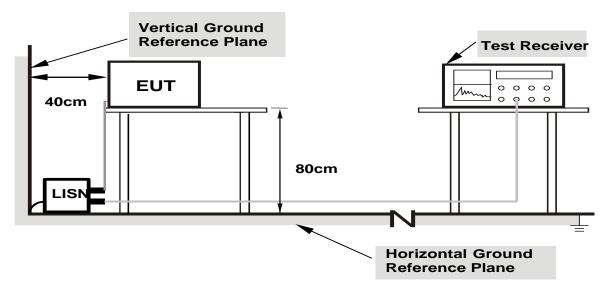

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power of all equipment.
- b. EUT was operated according to the type description in manufacturer's specifications or the User's Manual.

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080




3.1.7 TEST RESULTS

TEST MODE	See section 2.2		9 kHz
TEST VOLTAGE	AC 120	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg.C, 57% RH	TESTED BY	Evans He

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.1773	42.05	QP	10.03	52.08	64.61	-12.53
2	L1	0.1773	21.49	AVG	10.03	31.52	54.61	-23.09
3	L1	0.5166	42.41	QP	10.03	52.44	56.00	-3.56
4	L1	0.5166	20.61	AVG	10.03	30.64	46.00	-15.36
5	L1	1.1757	39.08	QP	10.03	49.11	56.00	-6.89
6	L1	1.1757	18.43	AVG	10.03	28.46	46.00	-17.54
7	L1	2.7942	40.34	QP	10.05	50.39	56.00	-5.61
8	L1	2.7942	17.51	AVG	10.05	27.56	46.00	-18.44
9	L1	5.5506	41.80	QP	10.09	51.89	60.00	-8.11
10	L1	5.5506	20.38	AVG	10.09	30.47	50.00	-19.53
11	L1	16.4823	28.10	QP	10.25	38.35	60.00	-21.65
12	L1	16.4823	10.59	AVG	10.25	20.84	50.00	-29.16

REMARKS: The emission levels of other frequencies were very low against the limit.

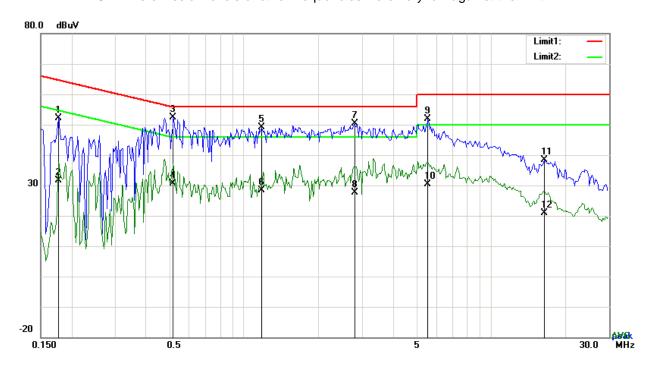


Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



TEST MODE	See section 2.2	6DB BANDWIDTH	9 kHz
TEST VOLTAGE	AC 120	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg.C, 57% RH	TESTED BY	Evans He

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	Ν	0.2085	41.14	QP	10.02	51.16	63.26	-12.10
2	Ν	0.2085	21.47	AVG	10.02	31.49	53.26	-21.77
3	Ζ	0.4503	43.59	QP	10.02	53.61	56.87	-3.26
4	Ν	0.4503	22.82	AVG	10.02	32.84	46.87	-14.03
5	Ν	0.5439	43.56	QP	10.02	53.58	56.00	-2.42
6	Ν	0.5439	21.47	AVG	10.02	31.49	46.00	-14.51
7	Ν	1.9674	42.69	QP	10.04	52.73	56.00	-3.27
8	Ν	1.9674	21.71	AVG	10.04	31.75	46.00	-14.25
9	N	3.1326	43.10	QP	10.05	53.15	56.00	-2.85
10	Ν	3.1326	21.70	AVG	10.05	31.75	46.00	-14.25
11	Ν	5.5428	43.40	QP	10.08	53.48	60.00	-6.52
12	N	5.5428	22.66	AVG	10.08	32.74	50.00	-17.26

REMARKS: The emission levels of other frequencies were very low against the limit.

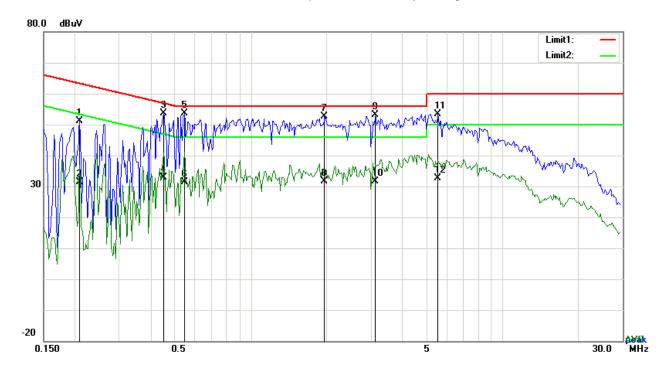

Guangdong 523942, China

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.109)

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dBµV/m)								
Frequencies (MHz)	FCC 15B/ ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B				
30-88	39	29.5						
88-216	43.5	33.1	40	30				
216-230	46.4	25.6						
230-960	40.4	35.6	17	27				
960-1000	49.5	43.5	47	37				

	Radiated Emissions Limits at 3 meters (dBµV/m)							
Frequencies	FCC 15B / ICES-003,	FCC 15B / ICES-003,						
(MHz)	Class A	Class B						
30-88	49.5	40						
88-216	54	43.5						
216-230	56.9	46						
230-960	56.9	40						
960-1000	60	54						
1000-3000	Avg: 60	Avg: 54						
Above 3000	Peak: 80	Peak: 74						

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Note: (1) The lower limit shall apply at the transition frequencies.

- (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com

Tel.: +86 769 8998 2098

Guangdong 523942, China



3.2.2 TEST INSTRUMENTS

FREQUENCY RANGE BELOW 1GHz

Equipment	Equipment Manufacturer		Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESL6	1300.5001K06-100262-eQ	Jan. 04, 19	Jan. 03, 20
Bilog Antenna	Sunol Sciences	JB6	A110712	Feb. 06, 18	Feb. 07, 19
Active Antenna	CMO-POWER	AL-130	121031	Feb. 06, 18	Feb. 07, 19
Signal Amplifier	HP	8447E	443008	Jan. 24,19	Jan. 23, 20
3m Semi-anechoic Chamber	SAEMC	9m*6m*6m	N/A	Oct. 18,18	Oct. 17,19
Test Software	EZ-EMC	ICP-03A1	N/A	N/A	N/A

NOTE: 1. The test was performed in in 3m chamber.

- 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
- 3. The FCC Site Registration No. is 749762.

FREQUENCY RANGE ABOVE 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESL6	1300.5001K06-100262-eQ	Jan. 04, 19	Jan. 03, 20
MXA signal analyzer	Agilent	N9020A	MY49100060	Jan. 04, 19	Jan. 03, 20
Horn Antenna	COM-POWER	HAH-118	71259	Jan. 24,18	Jan. 25,19
Horn Antenna	COM-POWER	HAH-118	71283	Feb. 01, 19	Jan. 31, 20
AMPLIFIER	EM Electornic Corporation	EM01G26G	60613	Jan. 24,19	Jan. 23, 20
AMPLIFIER	AMPLIFIER Emc Instruments Corporation		980077	Jan. 04, 19	Jan. 03, 20
3m Semi-anechoic Chamber	SAEMC	9m*6m*6m	N/A	Oct. 18,18	Oct. 17,19
Test Software	EZ-EMC	ICP-03A1	N/A	N/A	N/A

NOTE: 1. The test was performed in in 3m chamber.

- 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
- 3. The FCC Site Registration No. is 749762.

Page 14 of 23

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



3.2.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2014 (section 12).

<Frequency Range below 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.

NOTE:

- 1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier)
- 4. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) Amplifier Gain(dB) (if the raw value contains the amplifier)
- 5. Margin value = Emission level Limit value



<Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter-to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The bore sight should be used during the test above 1GHz.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test receiver/spectrum was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

NOTE:

- 1. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
- 2. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver
- 3. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier)
- 5. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) Amplifier Gain(dB) (if the raw value contains the amplifier).
- 6. Margin value = Emission level Limit value


3.2.4 DEVIATION FROM TEST STANDARD

No deviation.




3.2.5 TEST SETUP

<Frequency Range below 1GHz>

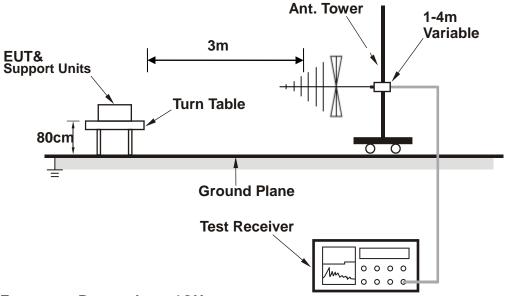

<Frequency Range above 1GHz>

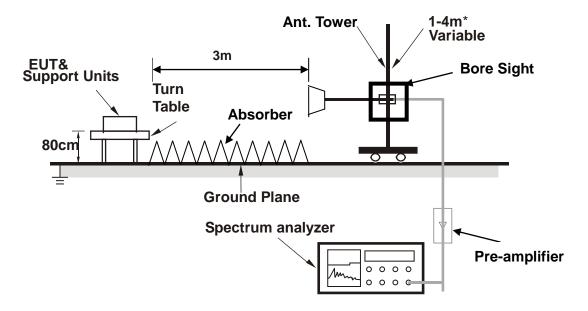

*: depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

3.2.6 EUT OPERATING CONDITIONS

See items 3.1.6.

Fax: +86 769 8593 1080

Email: customerservice.dg@cn.bureauveritas.com

Tel.: +86 769 8998 2098

Page 17 of 23




3.2.7 TEST RESULTS (BELOW 1GHz)

TEST MODE	See section 2.2	FREQUENCY RANGE	30-1000MHz	
TEST VOLTAGE	AC 120V/60Hz	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120kHz	
ENVIRONMENTAL CONDITIONS	25deg. C, 57% RH	TESTED BY: Simon Lin		

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
No.	Frequency	Reading	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
	(MHz)	(dBuV/m)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	132.6850	26.84	13.08	22.39	1.22	18.75	43.50	-24.75	200	148
2	166.0680	29.81	12.11	22.26	1.37	21.03	43.50	-22.47	100	223
3	239.9873	36.86	11.54	22.31	1.67	27.76	46.00	-18.24	100	264
4	319.9370	48.08	14.02	22.23	1.89	41.76	46.00	-4.24	100	21
5	560.6928	32.04	18.55	21.67	2.48	31.40	46.00	-14.60	100	34
6	962.1623	32.36	22.81	20.76	3.24	37.65	54.00	-16.35	100	157

- REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 - 2. Negative sign (-) in the margin column signify levels below the limit.
 - 3. Frequency range scanned: 30MHz to 1000MHz.
 - 4. Only emissions significantly above equipment noise floor are reported.

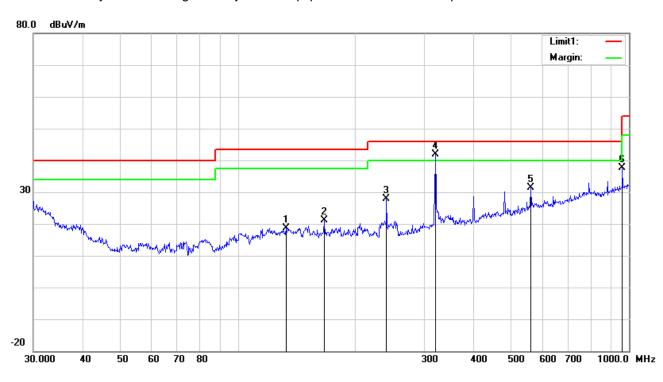

Guangdong 523942, China


Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



TEST MODE	See section 2.2	FREQUENCY RANGE	30-1000MHz		
TEST VOLTAGE	AC 120V/60Hz	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120kHz		
ENVIRONMENTAL CONDITIONS	25deg. C, 57% RH	TESTED BY: Simon Lin			

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
No.	Frequency	Reading	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
	(MHz)	(dBuV/m)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	51.6616	37.64	8.22	22.38	0.79	24.27	40.00	-15.73	100	121
2	88.3421	32.39	7.93	22.34	0.99	18.97	43.50	-24.53	200	331
3	159.7844	33.80	12.60	22.27	1.39	25.52	43.50	-17.98	100	259
4	239.9873	38.32	11.54	22.31	1.67	29.22	46.00	-16.78	100	207
5	319.9370	47.01	14.02	22.23	1.89	40.69	46.00	-5.31	100	31
6	558.7302	36.79	18.52	21.67	2.48	36.12	46.00	-9.88	100	28

- **REMARKS:** 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 - 2. Negative sign (-) in the margin column signify levels below the limit.
 - 3. Frequency range scanned: 30MHz to 1000MHz.
 - 4. Only emissions significantly above equipment noise floor are reported.

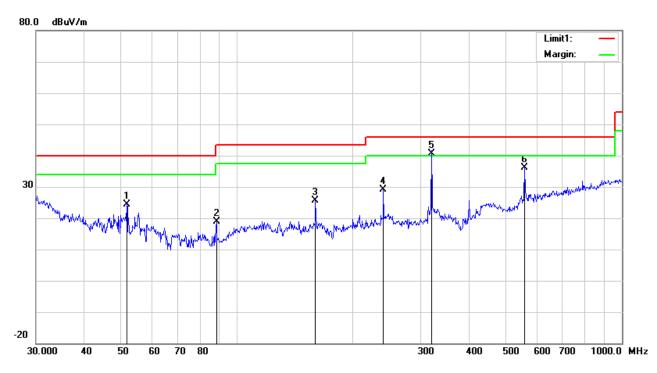

Guangdong 523942, China

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



3.2.8 TEST RESULTS (ABOVE 1GHz)

TEST MODE	See section 2.2	FREQUENCY RANGE	Above 1GHz	
TEST VOLTAGE	AC 120V/60Hz	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak, Average 1MHz	
ENVIRONMENTAL CONDITIONS	25deg. C, 57% RH	TESTED BY: Simon Lin		

Frequency	Read_level	Azimuth	Height	Polarity	Level	Factors	Limit	Margin	Detector
(MHz)	(dBµV/m)		(cm)	(H/V)	(dBµV/m)	(dB)	(dBµV/m)	(dB)	(PK/AV)
3097.69	60.4	156	100	V	-13.24	47.16	74	-26.84	PK
1769.23	63.78	320	100	V	-16.41	47.37	74	-26.63	PK
3009.05	60.6	295	100	V	-12.56	48.04	74	-25.96	PK
3875.8	54.57	19	100	Н	-9.94	44.63	74	-29.37	PK
1594.41	67	51	100	Н	-18.55	48.45	74	-25.55	PK
2802	59.24	114	100	Н	-12.62	46.62	74	-27.38	PK

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.

- 2. Negative sign (-) in the margin column signify levels below the limit.
- 3. Frequency range scanned: 1GHz to 6GHz.
- 4. Only emissions significantly above equipment noise floor are reported.

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



PHOTOGRAPHS OF THE TEST CONFIGURATION









Bureau Veritas Shenzhen Co., Ltd. **Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



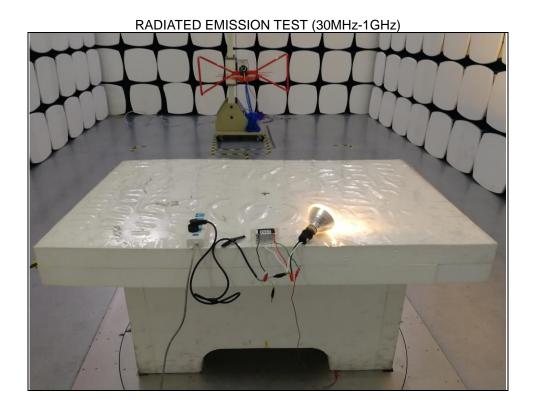

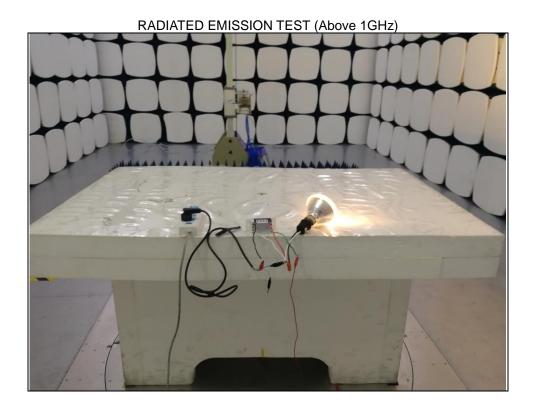

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080